MIL-R-17657C(NU)
6 July 1979
SUPERSEDING
MIL-R-17657B(SA)
26 February 1971

MILITARY SPECIFICATION

RAINCOAT, MAN'S (FOUL WEATHER)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy and is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers the requirements for a waterproof raincoat, made of a double coated nylon twill cloth.

1.2 Classification. The raincoat shall be of one type, and shall be procured in the following sizes as specified (see 6.2):

Schedule of Sizes

Small	- (34-36)
Medium	- (38-40)
Large	- (42-44)
Extra Large	- (46-48)

2. APPLICABLE DOCUMENTS

* 2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing & Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC-8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing, Hole, and Button, Staple
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
V-T-295	-	Thread, Nylon

MILITARY

MIL-F-10884	-	Fasteners, Snap
MIL-B-17757	-	Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-19759	-	Cloth, Coated, Twill, Nylon (Low Count)
MIL-F-21840	-	Fastener Tapes, Hook and Pile, Synthetic

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1393	-	Provisions for Evaluating Quality of Coated Fabric Raincoats

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

RULES AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402).

2.2. Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Attn: Traffic Department, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606).

3. REQUIREMENTS.

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.3 Materials.

* 3.3.1 Basic material. The basic material for the raincoat shall be of chloroprene coated nylon twill conforming to type II of MIL-C-19759, except that the coating shall be unvulcanized.

* 3.3.2 Cloth, corduroy. The corduroy material for the topcollar shall be made of a 100% cotton or of a polyester/cotton blend with not less than 80% cotton. The material shall be constructed utilizing a minimum of eight (8) wales per inch, fast dyed (no sulfur) dark green, black, or olive drab, and weigh not less than eight (8) ounces per square yard. The dyed finished cloth shall be after-treated with a durable water repellant impregnant (see 6.4), and shall show a minimum of "good" fastness to crocking and perspiration. Testing shall be performed as specified in 4.4.1.

* 3.3.3 Thread, nylon. The nylon thread shall conform to type III, size B or E, of V-T-295, except that the colorfastness requirements shall not apply. The thread shall be dyed to match Olive Drab S-1, cable no. 66022, or shall approximate the green shade of the basic material specified in 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

* 3.3.4 Cement, chloroprene. The cementing compound shall have a chloroprene base and the same curing characteristics as the coating compound specified in 3.3.1 The use of reclaimed rubber is prohibited. Cemented sample seams shall have a minimum adhesion of 5 pounds per inch width after vulcanization when tested as specified in 4.4.1. The color of the cement shall approximate the shade of the green coating compound specified in 3.3.1 or shall be unpigmented.

3.3.5 Buttons. The buttons shall conform to type II, class D, style 20-21, 40 line, and style 15, 18 line, of V-B-871. The color shall approximate the green shade of the basic material specified in 3.3.1.

* 3.3.6 Gimp, cotton. The cotton gimp used for reinforcing the buttonholes shall conform to type II, style no. 8, of V-T-280 except that the colorfastness requirements shall not apply. The gimp shall approximate the green shade of the basic material specified in 3.3.1.

3.3.7 Fasteners, snap. The snap fasteners shall consist of a size 1 or 2, 24 line size button with socket for the female half and a size 1 or 2 eyelet with stud for the male half, conforming to style 2, finish 2, of MIL-F-10884.

3.3.8 Fastener tapes. The fastener tapes shall conform to type II, class 3, of MIL-F-21840. The tapes shall be 1 inch in width. The color shall be Green 3422 or shall approximate the green shade of the basic material specified in 3.3.1.

* 3.3.9 Combination label. A combination identification, size, and instruction label, conforming to type IV, classes 12 and 13, of DDD-L-20, shall be printed on a suitable sized piece of unvulcanized basic material or may be marked directly on raincoat. All markings shall be bright yellow in color. The inscription and size of characteristics shall be as follows:

	SIZE OF CHARACTERS INCH
RAINCOAT, MAN'S (FOUL WEATHER)	3/16
CONTRACT NO. DLA-100-00-0-0000 (EXAMPLE)	1/8
STOCK NO. 8405-00-000-0000 (EXAMPLE)	1/8
SIZE: MEDIUM (38-40) (EXAMPLE)	1/8
NAME OF CONTRACTOR	1/8
INSTRUCTION	3/16
This waterproof raincoat has been oversized to fit	3/32
over heavy clothing for use under cold/wet weather	3/32
conditions. If oversized when worn over light	3/32
clothing, use a smaller size	3/32
DO NOT DRY CLEAN	3/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

3.3.10 Dusting medium. The dusting medium used in fabricating the basic material and raincoat, shall be of a suitable medium that does not support mildew growth (see 3.6.3 and 4.4.1).

3.4 Design. The raincoat shall be of a single breasted style, utilizing a one or two piece back with vent and characterized by cemented side, collar joining; and sleeve joining seams. The raincoat shall have one-piece raglon sleeves with a tab and adjustable patch assembly attached, a corduroy topcollar with a tab and adjustable patch assembly attached, on the undercollar, two (2) front patch pockets with flaps, and a buttoned front and snap fastener secured storm flap (see figure 1).

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the specification shall govern.

3.5 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used for cutting the contractors working patterns. The working patterns shall be identical to the standard patterns.

3.5.1 Pattern parts. The component parts shall be cut from the material specified, and in accordance with the following pattern parts:

Materials	Nomenclature of pattern parts	Cut Parts
Cloth, coated, nylon twill	Front and facing (grown-on) left side	1
	Front and facing (grown-on) right side	1
	Sleeve	2
	Storm flap 1/	1
	Pocket	2
	Pocket flap 2/	2
	Undercollar 3/	1
	Collar adjustment tab (one piece)	1
	or	
	Collar adjustment tab (two piece)	2
	Collar tab reinforcement patch	1
	Sleeve adjustment tab (one piece)	2
	or	
	Sleeve adjustment tab (two piece)	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Materials	Nomenclature of pattern parts	Cut Parts
Cloth, coated nylon twill (cont'd)	Sleeve tab reinforcement patch	2
	Collar adjustment patch (left side)	1
	Collar adjustment patch (right side)	1
	Sleeve adjustment patch	2
	Back (one piece)	1
	or	
	Back (two piece)	2
	Facing and vent piece (face up)	1
	or	
	Vent facing (left side)	1
	and	
	Extension vent piece	1
Cloth, corduroy,	Topcollar 3/	1
Templates	Pocket V-strip marker 4/	-
	Pocket finishing cement marker	-
	Flap and pocket cement marker	-

1/ These parts may be cut into two pieces.
2/ This part may be cut into four pieces.
3/ This part may be cut into two pieces with the seam allowance added.
4/ For dual application as marker and locator.

3.6. Construction.

3.6.1 Sewn seams. Stitch and seam types specified in Table I shall conform to FED-STD-751. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats, or open seams will result. Thread breaks shall be secured by starting the repair stitch not less than 1/2 inch in back of the break. Skipped stitches may be repaired using 301 stitch type. The minimum and maximum number of stitches per inch shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

* 3.6.2 Cemented seams and parts. Prior to joining of precemented and dusted parts, the surfaces to be joined shall be washed with a suitable solvent. Care shall be exercised in performing this operation to avoid solvent staining of adjacent surfaces. Unless otherwise specified in table I, all LSA type cemented seams shall overlap 1/2 to 3/4 inch. The width of the cemented area (cemented margin) for seams before joining shall be a maximum of 7/8 inch per single ply of material. The width of the visible cement line allowed for seams after joining shall be a maximum of 3/8 inch on the outside and 3/8 inch on the underside. Whenever possible, cementing shall be performed by shingling or with the aid of templates to insure that the cement lines are even, uniform, and within specified tolerances. Cemented parts such as the pocket and reinforcement patches, shall show a maximum cement line of 3/8 inch around all outer edges. All cemented seams and parts shall be rolled to remove any puckers, tunnels, or wrinkles and shall be dusted in accordance with 3.3.10. Cemented seam types specified in table I, are similar to the seam types specified in FED-STD-751 minus the stitchline.

* 3.6.3 Dusting visible cement lines. Before vulcanization, visible cement lines along edges of seams and parts shall be dusted with the minimum amount of dusting medium necessary to prevent adhesion of uncured coated fabric and cemented surfaces. Care shall be taken to insure only the cemented areas are dusted (see 3.3.10).

* 3.6.4 Vulcanization. The raincoat shall be vulcanized in accordance with the time and temperature requirements supplied by the coated fabric manufacturer (see 4.4.1).

* 3.7 Manufacturing operation requirements. The contractor shall manufacture the raincoat in accordance with every applicable operation specified in Table I. The contractor is not required to follow the exact sequence of operations listed.

3.7.1 Shade and size marking. The component parts shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the raincoat, except parts which may be cut from ends. Any method may be used except:

1. Metal fastening devices
2. Sew-on tickets
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

The use of a rubber stamp, ink pad numbering machine, or pencil is acceptable provided the numbers are legible and are not visible on the outside of the raincoat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. The raincoat shall be cut in strict accordance with patterns furnished, which show size, shape, directional lines for cutting, and notches for proper assembly of all parts. The use of devices such as staples, pins, etc., to hold the working patterns on the basic material during cutting, are not permitted. b. All basic fabric component parts shall be cut from one piece of material except for the inner ply of pocket flap when made from two pieces; "V" stripping for the pockets; collar and sleeve tabs; reinforcement patches, and adjustment patches which may be cut from ends. c. The use of a drill hole is permitted only when the hole is located in an area where it will be covered in a later operation by the cement portion of a cemented component part. d. All other trimmings shall be cut in accordance with pattern or in accordance with Description of Operation when no pattern is furnished. e. The lightly coated (green) side of the basic material shall finish on the outside of the raincoat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1393 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking All parts shall be marked, ticketed, or bundled in accordance with 3.7.1. When parts are cut from ends, the parts will closely match the major component parts of the raincoats.					
4.	Assemble collar adjustment tab and reinforcement patch (cement or stitching). a. Cement method (see Figure 2) 1. Apply cement to the entire surface of the one or two piece tab on the black side. Place a piece of release paper large enough to cover an area of 3/4 to 1 inch on the cemented surfaces at the straight end of tab, and join the two surfaces. 2. Apply cement to the entire surface of the collar adjustment tab reinforcement patch on the black side. 3. Apply cement to an area of 3/4 to 1 inch at the bottom of the straight end of tab on each green side. 4. Insert straight end of collar adjustment tab thru slit of reinforcement patch. Activate cement on green sides of tab and on black side of reinforcement patch. Spread ends of tab in opposite directions, and join tab to patch.		OSf or SSa			

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Assemble collar adjustment tab and reinforcement patch (cementing or stitching) - cont'd					
	or					
	b. Stitching method.					
	Stitch the one or two piece collar adjustment tab 1/16 to 1/8 inch from all outer edges. Reinforcement patch is not required in this method.	301	OSf-1 or SSa-1	8-10	B or E	B or E
10	c. Stitch a 7/8 to 1 1/8 inch length of hook fastener tape to each side of collar adjustment tab as indicated by pattern marks, 1/16 to 1/8 inch from edge of tape on all four sides.	301	LSbj-1	8-10	B or E	B or E
	d. Stitch a 2 7/8 to 3 1/8 inch length of pile fastener tape to the green side of collar adjustment patch (right side) and as indicated by marks on pattern, 1/16 to 1/8 inch from all outer edges of tape	301	LSbj-1	8-10	B or E	B or E
	e. Stitch a 1 to 1 3/8 inch length of pile fastener tape to the green side of collar adjustment patch (left side) and as indicated by marks on pattern, 1/16 to 1/8 inch from all outer edges of tape.	301	LSbj-1	8-10	B or E	B or E

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Assemble sleeve adjustment tabs and patches (cementing or stitching) -					
	a. Cement method (see figure 2)					
	1. Apply cement to the entire surface of the one or two piece adjustment tab on the black side. Place a piece of release paper large enough to cover an area of 3/4 to 1 inch on the cemented surfaces at the straight end of tab and join the two surfaces.		OSf or SSa			
	2. Apply cement to the entire surface of the sleeve adjustment tab reinforcement patch on the black side.					
	3. Apply cement to an area of 3/4 to 1 inch at the bottom of the straight end of tab on each green side.					
	4. Insert straight end of sleeve adjustment tab thru slit of reinforcement patch. Activate cement on green sides of tab and also on black side of patch. Spread ends of tab in opposite directions and join tab to patch.					
	or					
	b. Stitching method					
	Stitch the one or two piece adjustment tab 1/16 to 1/8 inch from all outer edges. Reinforcement patch is not required in this method.	301	SSa-1 and OSf-1	8-10	B or E	B or E

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Assemble sleeve adjustment tabs and patches (cementing or stitching) (cont'd)					
	c. Stitch a 7/8 to 1 1/8 inches length of hook fastener tape to the sleeve adjustment tab as indicated by marks on pattern, 1/16 to 1/8 inch from edge of tape on all four sides. The tape shall finish on the underside of sleeve tab on the finished raincoat.	301	LSbj-1	8-10	B or E	B or E
	d. Stitch a 6 1/8 to 6 3/8 inch length of pile fastener tape to the green side of sleeve adjustment patch as indicated by marks on pattern 1/16 to 1/8 inch from all outer edges of tape.	301	LSbj-1	8-10	B or E	B or E
6.	Assemble collar					
	a. Two piece topcollar, when applicable					
	1. Superimpose the two (2) halves face to face, and stitch the squared ends together 5/16 to 7/16 inch from the edge. Spread seam open and press flat.	301	SSz-3(a)	8-10	B or E	B or E
	2. Double stitch 3/16 inch gauge, with the seam centered between the two rows of stitching.	301	SSz-3(b)	8-10	B or E	B or E
	b. Two piece undercollar, when applicable - Join and cement the squared ends of the undercollar pieces together.	--	LSa	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (Cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Assemble collar (cont'd) c. Activate cement on black side of collar adjustment tab reinforcement patch (see operation 4a, sequence 2), and attach to undercollar as indicated by marks on pattern. The reinforcement patch shall finish on the left side of collar assembly. OR d. When the collar adjustment tab is stitched (see operation 4b), stitch the straight ends of the tab to undercollar as indicated by marks on pattern. e. Position and cement the pile fastener tape and collar adjustment patch ensemble as constructed in operation 4d, to right side of undercollar as worn. The patch ensemble shall be centered and finished approximately one (1) inch from the front edge of collar assembly.	301	Cross-box stitch	8-10	B or E	B or E

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Assemble collar (cont'd)					
	OR					
	f. Stitch the pile fastener tape and collar adjustment patch ensemble to the right side of undercollar as worn. The patch ensemble as positioned above, shall finish with the stitching along all four sides 1/16 to 1/8 inch from edge of patch.	301	LSbj-1	8-10	B or E	B or E
	g. Position and cement the pile fastener tape and collar adjustment patch ensemble as constructed in operation 4e, to left side of undercollar as worn. The patch ensemble shall be so positioned that when the adjustment tab is folded back the hook and pile are superimposed.					
	OR					
	h. Stitch the pile fastener tape and collar adjustment patch ensemble to left side of undercollar as worn, to finish with the stitching along all four sides 1/16 to 1/8 inch from edge of patch. The patch ensemble shall be so positioned that when the adjustment tab is folded back the hook and pile are superimposed.	301	LSbj-1	8-10	B or E	B or E

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Assemble collar (cont'd)					
	i. Join topcollar(s) and undercollar(s) pieces together face to face, and stitch along the sides and around the top 5/16 to 7/16 inch from the edge.	301	SSe-2(a)	8-10	B or e	B or E
	j. Trim corners, turn to finished position working out points.					
	k. Topstitch along the sides and around the top 5/16 to 7/16 inch from the folded edge.	301	SSe-2(b)	8-10	B or E	B or E
7.	Assemble storm fly					
	a. Fold the storm fly piece in half, black side to black side, and cement solid leaving 5/8 to 7/8 inch from one edge uncemented to form a hinge.		OSf			
	or					
	b. When the two piece storm fly is applicable, cement the black side of each piece and join together leaving 5/8 to 7/8 inch from one edge uncemented to form a hinge.		SSa			
8.	Pocket and flap assembly					
	a. Fold the pocket flap piece in half black side to black side, and cement solid		OSf			
	or					
	b. Cement solid the black side of the two piece pocket flap and join together. The superimposed pieces shall have all edges even with no coating visible from either side.		SSa			

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Pocket and flap assembly (cont'd)					
	c. Turn under the top edge of pocket piece where indicated by pattern marks, and cement solid to form a hem.		EFa			
	d. Fold the hem on pocket piece face to face to form a welt. Position the pocket flap over the pocket welt, and join (stitch or cement) at each side.					
	- When sides of assembly are stitched, the stitching shall be 1/16 to 1/8 inch from side edges	301	SSa-1	8-10	B or E	B or E
	e. Tack each lower corner of flap/welt assembly with a 3/8 to 1/2 inch vertical bartack, to finish parallel to the sides (ends) of flap and 1/8 to 3/16 inch from the sides and bottom edges.	Bartack	-	21-28 per bartack	B or E	B or E
	f. Using a template, cement a bias cut 15/16 to 1 1/16 inch wide V-strip of basic material (see 3.3.1) to the sides and bottom edges on inside of pocket piece. ONe half the width of V-strip shall overlap the pocket piece edges, and shall be cemented black side to black side. The ends of the V-strip shall extend 1/2 to 5/8 inch beyond pocket piece into pocket flap.					
	NOTE: As an alternate, the V-strip may be cemented to the front before joining to the pocket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Pocket and flap assembly (cont'd)					
	g. Cement top of pocket flap to front of raincoat as indicated by pattern marks.					
	h. Stitch top of pocket flap to front of raincoat with two rows of 1/4 inch gauge stitching. The outer row of stitching shall be 1/16 to 1/8 inch from top raw edge	301	SSa-2	8-10	B or E	B or E
	i. The two rows of double needle stitching shall be closed at each end with a 3/8 to 1/2 inch bartack or with a single row of stitching at each end. Rectangular box stitching may also be used	Bartack or 301 or Boxstitch	- - - -	21-28 per bartack 8-10 8-10	B or E B or E B or E	B or E B or E B or E
	j. Cement pocket piece, V-strip, and ends of pocket flap to front of raincoat.					
	k. Tack pocket flap to front at each side of flap with a 3/8 to 1/2 inch horizontal bartack centered between the two previously stitched bartacks and 1/8 to 3/16 inch from raw edge. Bartack shall be parallel to ends (width) of flap and shall catch the top corner of welt.	Bartack	-	21-28 per bartack	B or E	B or E

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Pocket and flap assembly (Cont'd)					
	1. Cut a piece of strapping approximately 1 1/2 by 11 inches from the basic material specified in 3.3.1 and cement solid to the underside of the fronts covering all visible pocket flap stitching including the bartacks.		LSBj			
9.	Assemble sleeves					
	a. Cement sleeve inseams, front over back		LSa			
	b. Turn under the raw edges of the sleeves and cement solid to form a 1/2 to 3/4 inch hem.		EFa			
	c. Activate cement on the black side of an assembled sleeve tab reinforcement patch, and cement to each sleeve. The reinforcement patch shall be centered on each inseam, with the bottom edge of the patch 1 3/8 to 1 5/8 inches from the finished bottom edge of sleeve.		LSbj			
	or					
	d. As an alternate, stitch the straight ends of the sleeve adjustment tab to each sleev. The straight end of the sleeve adjustment tab shall be centered on each sleeve inseam, with the bottom edge of tab 1 3/8 to 1 5/8 inches from the finished bottom edge of sleeve.	301	Cross-box-stitch	8-10	B or E	B or E
	NOTE: The sleeve adjustment tabs may be stitched or cemented to the sleeve before joining the inseam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Assemble sleeves (cont'd) e. Cement a sleeve adjustments patch assembly to each sleeve, positioned so that the sleeve tab overlaps 7/8 to 1 1/8 inches and the bottom edge of the patch is 1 3/8 to 1 5/8 inches from the finished bottom edge of the sleeve. or f. Stitch a 6 1/8 to 6 3/8 inches long pile fastener tape to each sleeve, positioned so that the sleeve tab overlaps 7/8 to 1 1/8 inches and the bottom edge of the tape is 1 3/8 to 1 5/8 inches from the finished bottom edge of the sleeve. The stitching shall be along all four sides 1/16 to 1/8 inch from edge of tape NOTE: The adjustment patch or strip of fastener tape may be cemented or stitched to the sleeve before joining the inseam.	301	LSbj-1	8-10	B or E	B or E
10.	Body assembly					
	a. Join and cement two piece back at center back when applicable, left over right.		LSa			
	b. Join and cement fronts to back forming side seams, front over back.		LSa			
	c. Turn under the bottom edge of the fronts and back(s) and cement solid to form a 1/2 to 3/4 inch hem		EFa			

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Body assembly (cont'd)					
	d. Turn under the top edge of the fronts with grown-on facings, and cement solid to form a 3/16 to 5/16 inch hem.		EFa			
	e. Turn under the inner edge of right front (grown-on facing) as indicated by pattern marks, and cement to black side of the front piece along both the folded and outer edges.		EFa			
	f. Turn under the inner edge of left front (grown-on facing) as indicated by pattern marks, and cement to black side of the front piece along the folded edge only.		EFa			
	g. Cement the notched free end of the storm fly to free ends of the facing as indicated by pattern marks, black side of facing over green side of storm fly.		LSa			
	h. Cement the facing and free ends of storm fly to the black side of front piece, with the free ends of the storm fly spread to form a "T"		LSa			
11.	Vent assembly, (One piece back, when applicable)					
	a. When the one piece facing and vent piece is attached, the following sequence shall apply:					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11	Vent assembly (One piece back, when applicable) (cont'd)					
	1. Fold the vent portion in half lengthwise, black side to black side and as indicated by marks on pattern, and cement solid.		OSf			
	2. Cement the facing portion to left vent opening black side of the one piece back over black side of facing with all edges even.		SSa			
	3. The remaining vent portion shall be attached to the right vent opening, cementing the black side of the one piece back over the straight edge of the folded vent portion.		LSa			
	4. Cement the added vent reinforcement hinge to the black side of the one piece back.		SSa			
	or					
	b. When two separate pieces (extension vent and vent facing) are utilized, the following sequence shall apply:					
	1. Cement the vent facing to left vent opening, black side of the one piece back over black side of facing piece with all edges even.		SSa			
	2. Fold the extension vent in half lengthwise black side to black side and as indicated by marks in pattern, and cement solid.		OSf			

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11.	Vent assembly (One piece back, when applicable) (Cont'd)					
	3. Cement the black side of the one piece back over the straight edge of the folded extension vent piece.		LSa			
	4. Cement the added vent reinforcement hinge to the black side of the one piece back.		SSa			
	c. Regardless of the applicable operation, the base of the vent pieces shall be even with the bottom edge of the raincoat and face side up.					
12.	Vent assembly (two piece back, when applicable)					
	a. When the one piece facing and vent piece is utilized, the following sequence shall apply:					
	1. Fold the vent portion in half lengthwise black side to black side and as indicated by marks on pattern, and cement solid leaving 3/4 to 1 inch from the straight edge uncemented.		OSb			
	2. Cement the facing portion to left vent opening, black side of the back piece over black side of facing with all edges even.		SSa			
	3. Position the edge of the right vent opening between the plies of the uncemented vent portion 1/2 to 3/4 inch, and cement solid.		SSj			

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12	Vent assembly (two piece back, when applicable (cont'd)					
	4. Cement the added vent reinforcement hinge to the black side of the back piece.		SSa			
	or					
	b. When two separate pieces (extension vent and vent facing are utilized, the following sequence shall apply:					
	1. Cement the vent facing to left vent opening, black side of back piece over black side of facing piece with all edges even.		SSa			
	2. Fold the extension vent in half lengthwise, black side to black side and as indicated by marks on pattern, and cement solid leaving 3/4 to 1 inch from the straight edge uncemented.		OSf			
	3. Position the edge of the right vent opening between the plies of the uncemented extension vent 1/2 to 3/4 inch, and cement solid.		SSj			
	4. Cement the added vent reinforcement hinge to the blackside of the back piece.		SSa			
	c. Regardless of the applicable operation, the base of the vent pieces shall be even with the bottom edge of the raincoat and face side up.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Assemble hanger loop and attach with collar					
	a. Fold the hanger loop material (see operation 1c) in thirds lengthwise, cementing solid each fold.					
	b. Join and stitch the topcollar to neckline from the lapel step to lapel step, 5/16 to 7/16 inch from the raw edge, simultaneously catching the ends of the centered hanger loop in the line of stitching. The finished hanger loop shall measure 2 1/2 to 3 inches in length and 1/4 to 3/8 inch in width.	301	SSa	8-10	B or E	B or E
	c. Turn collar to its finished position (topcollar face side up), and cement the undercollar to the neckline. The vertex of the collar and extension pieces shall align with the top edge of the lapel steps when finished.		LSa			
	d. Tack each lower corner of the undercollar with a 5/16 to 7/16 inch vertical bartack, positioned parallel to each front edge and approximately 1/8 to 1/4 inch from the side and bottom edge of the collar extension.	Bartack	-	21-28 per bartack	B or E	B or E
14.	Attach snap fasteners					
	a. Attach three (3) studs and eyelets of snap fasteners to the storm flap as indicated by marks on pattern. The stud shall finish on the face side of the flap.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table 1 - Construction of Raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Attach snap fasteners (cont'd)					
	b. Attach three (3) buttons and sockets on the right front to correspond with the studs and eyelets on storm flap in order to assure the following:					
	1. No distortion or bulging occurs when the collar or fronts are in the closed position.					
	2. The front edge is 1/4 to 3/8 inch from the inside edge of the storm flap when in the closed position.					
15.	Make buttonholes.					
	a. Make five (5) horizontal buttonholes through left front of raincoat, with the inside cut edge of eyelet 7/8 to 1 1/8 inch from the folded edge and positioned as follows:					
	1. Top buttonhole shall finish 7/8 to 1 1/8 inch from the top edge of left front.	Buttonhole		55-60 per buttonhole including tack	B or E	B or E
	2. Remaining four (4) buttonholes shall be equally spaced, 6 3/8 to 6 5/8 inch apart.	Buttonhole		"	B or E	B or E

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Attach buttons Attach five (5) of the specified 40-line buttons to the right front with each button reinforced with the 18-line button. The buttons shall correspond with the related buttonholes, so that no distortion or bulging occurs when the fronts are buttoned.	301 or or 101	- -	14-16 per button 14-16 per button	B B	B
17.	Label Cement the combination identification - size - instruction label or print label inscription directly on inside of raincoat, centered across the center back seam and approximately 2 inches from the top edge.					
18.	Vulcanization The assembled raincoat shall be fully vulcanized using a heat curing or pressure vulcanizing process.					
19.	Cleaning a. Trim all thread ends to less than 1/2 inch. b. Clean all removable spots, stains, and shade size markings on outside of raincoat, taking care not to damage coating in the process.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished raincoats shall conform to the dimensions as specified in table II. All measurements and tolerances are expressed in inches, and shall be taken with the raincoat snapped and buttoned and laid smooth and flat

Table II - Finished measurements

Measurement	Size				Tolerance
	Small (34-36)	Medium (38-40	Large (42-44)	X Large (46-48)	
Chest (A)	46	50	54	58	± 1
Length (B)	45	45-1/2	46	46 1/2	± 3/8
Width (C)	56	60	64	68	± 1
Sleeve inseam (D)	18-1/2	18-1/2	18-1/2	18-1/2	± 1/4

NOTE: A thru D refer to Figure 1

A Measurement shall be taken across front at bottom of armhole, folded edge to folded edge.
B Measurement shall be taken at base of undercollar at center back to bottom of raincoat.
C Measurement shall be taken across bottom, folded edge to folded edge.
D Measurement shall be taken from base of armhole along inseam to bottom of sleeve.

* 3.9 End item performance testing. The vulcanized cemented seams shall conform to the requirements listed in TAble III when tested as specified in 4.4. The requirements listed do not refer to stitched or strapped seams.

Table III - Requirements for cemented seams in end item

Characteristics	Requirements	
	Average, Min.	Individual, Min
Seam strength, lbs	150	100
Seam adhesion, lbs/1 inch width	5.0	4.0
Hydrostatic resistance - lb/sq in		
Initial	100	50
After 1 dry cleaning	80	50
After 3 launderings	80	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

3.10 Coating repairs on raincoat

3.10.1 Black coated side (inside). Pinholes and uncoated a eas of a type shall be repaired either before or after curing the assembled rain with the black coating compound specified in 3.3.1. When raincoats are repaired after curing, the repair compound shall be formulated to cure room temperature. The size of the inside repair shall not exceed 3/4 i in length and width. The number of repairs allowed per raincoat on the black coated side shall not exceed four. The repairable area shall be coated with a minimum of two coats of the repair compound. The first c shall completely wet out the defective area and shall be thoroughly wor into the surface. The second coat shall be spread on smoothly and even over the first coating. After the compound is dry, the repaired area shall be lightly dusted with the dusting powder specified in 3.3.10. When fully cured there shall be no lifting of the edges, cracking, flak or removal of the repair compound from the inside repaired area when subjected to a flexing action between the hands.

3.10.2 Green coated side (outside). Any area where the nylon base f is exposed shall be touched-up (hidden), before or after curing, with a suitably thinned solution of the green coating compound specified in 3. When raincoats are repaired after vulcanization, the touch-up solution be formulated to cure at room temperature. Only the minimum amount of solution necessary to hide the uncoated area shall be applied. The numb of repairs allowed per raincoat on the green coated side shall not exce two. The color of the repaired areas shall be a good match to the surrounding coating.

3.11 Workmanship. The finished raincoats shall conform to the quali established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements as specified herein unless disapproved by the Government. The Governmen reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirement specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality performance and inspection. Inspection shall be performed in accordance with MIL-STD-1393.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. A certificate of compliance shall be furnished for all requirements applicable to the corduroy cloth (see 3.3.2), for the material identification of the chloroprene cement (see 3.3.4), for the dusting medium characteristics specified in 3.3.10, and that the raincoats have been vulcanized (see 3.6.4). In addition, components and materials listed in table IV shall be tested for the characteristics specified and in accordance with FED STD-191 whenever applicable. All test reports shall contain the individual values utilized in expressing the final result. For the cloth, coated, nylon twill (vulcanized) the lot size shall be expressed in yards and the sample size shall be 3 continuous yards full width. The sample size shall be as follows:

Lot size (yards)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any requirement specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table IV - Component testing

Component	Characteristic	Requirement paragraph	Test Method
Cloth, coated, nylon twill (volcanized)	Blocking	3.3.1	
	Breaking strength	3.3.1	
	Weight	3.3.1	1/
	Tear strength	3.3.1	
	Hydrostatic resistance	3.3.1	
	Flex stiffness	3.3.1	
	Adhesion of coating	3.3.1	
	Resistance to heat	3.3.1	
Cement, chloroprene	Seam adhesion	3.3.4	5960 2/

1/ Three yards of unvulcanized cloth shall be cured under conditions similar to those used on the end item, and shall be tested to meet the requirements specified in paragraph 3.3.3.4 of MIL-C-19759 for type II vulcanized cloth.

2/ Cemented seam specimens shall be prepared in accordance with 3.6.2, except that the seam shall overlap 1 1/4 inches. After vulcanization, a 1 inch wide by 6 inch long strip shall be marked and cut from the overlapped seam in the length direction.

4.5 End item examination Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1393.

4.6 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1393.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each fully buttoned raincoat shall be laid flat and face side down. folded as follows:

1. Fold the sleeves in towards the back and evenly aligned with the side seams of garment.

2. Fold the bottom edge of garment up towards the top approximately 1/3 of its total length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

5.1.1 Level A (cont'd)

3. Fold both sides in to the center back of garment.

4. Bring up the folded bottom edge of garment to its top, finishing approximately 14 inches by 20 inches. The folded raincoat shall be inserted face side up into a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (± 25 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting. The bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polythylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Level C (Commercial Packaging) - Raincoats shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The contractor may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

* 5.2.1 Level A. Twelve (12) raincoats of one size only, packaged as specified in 5.1, shall be packed in a corrugated fiberboard shipping container conforming to type SF, class weather-resistant, size 3A, grade V2s, of MIL-B-17757. Each shipping container shall be fitted with a liner conforming to type CF, class weather-resistant, variety DW, grade V15c, of MIL-B-17757. Closure and reinforcement requirements shall be as specified in the appendix of the box specification. Level A packages shall be packed flat, twelve (12) in depth within the container with every other one reversed. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same shipping container.

* 5.2.2 Level B. Twelve (12) raincoats, of one size only, packaged as specified in 5.1, shall be packed in a corrugated fiberboard shipping container conforming to type CF, class domestic, size 3A, variety SW, grade 275, of MIL-B-17757. Each shipping container shall be fitted with a liner conforming to type CF, class domestic, variety DW, grade 200, of MIL-B-17757. Closure requirements shall be as specified in the appendix of the box specification. Level A packages shall be packed flat. twelve (12) in depth within the container with every other one reversed. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Towards the end of the contract, or when there are less than the required number per container of the same size, mixed sizes may be packed in the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 2), the shipping container shall be a grade V3c, W5c or W6c fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial Packing) Raincoats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation cost for such supplies. Containers shall be in accordance with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contractor or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

RAINCOAT, MAN'S (FOUL WEATHER)
STOCK NO:
SIZE:
QUANTITY:

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon and under those words shall be legibly printed or stamped the correct quantity and each size contained therein.

6. NTOES

6.1 Intended use. The raincoat is intended for use in conjunction with the sou' wester hat (MIL-H-17656) and the wet weather overalls (MIL-O-22776) for protection of military personnel working in wet or wet/cold conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Sizes required (see 1.2).
c. First article requirements (see 3.2).
d. Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples, address the procuring office issuing the invitation for bids.

6.4 Water repellant treatments. Only these water repellant treatments approved by the U.S. Army Natick Research and Development Command, Natick, MA 01760 and so listed in the invitation for bids or request for proposal, shall be considered acceptable for the related procurement.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Project NO. 8405-N 831

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.


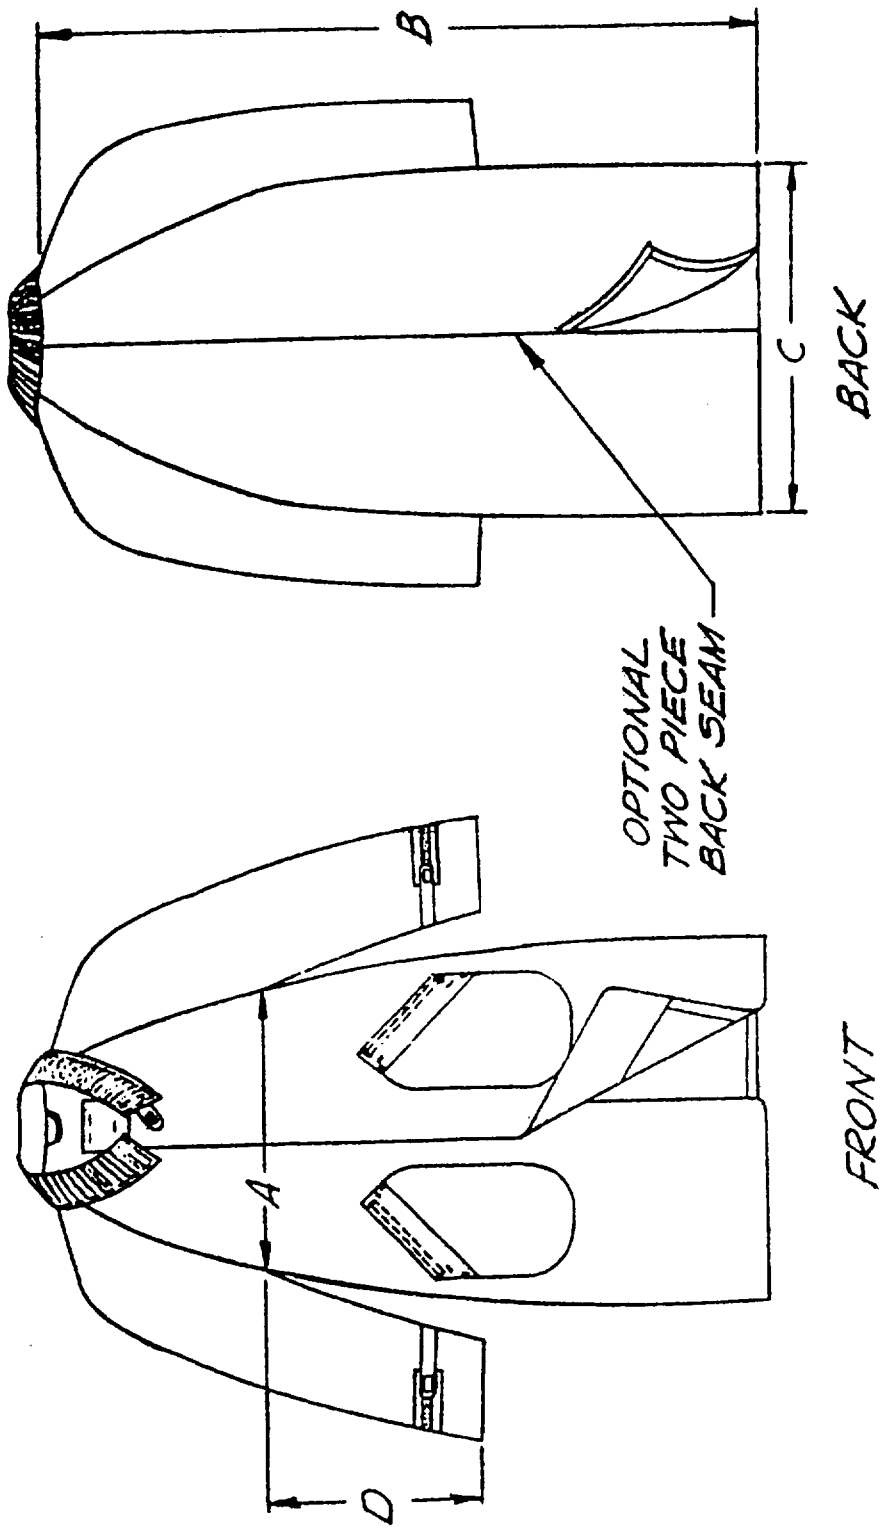


FIG. 1 RAINCOAT, MAN'S (FOUL WEATHER)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.



TOP VIEW

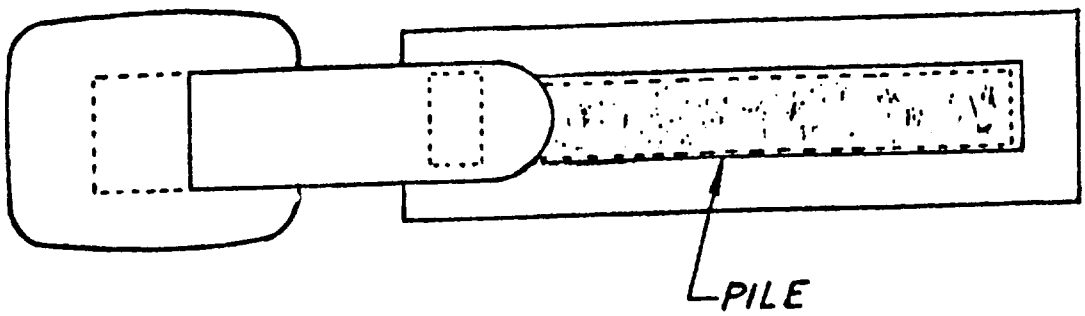

SIDE VIEW

UNDERCOLLAR AND SLEEVE
ADJUSTMENT STRAP ASSEMBLY
FIG. 2 - RAINCOAT, MAN'S, FOUL WEATER

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use submitting comments and suggestions for improvements. All users of military standardization documents are invited to provi suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, ar mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are be considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.