INCH-POUND
MIL-M-38761/2A(SH)
23 July 1990

SUPERSEDING
MIL-M-38761/2(SHIPS)
13 September 1968

MILITARY SPECIFICATION

MICROFILM APERTURE, TABULATING CARDS AND SHIPS DRAWING INDEXES FOR NAVAL SEA SYSTEMS COMMAND SHIPS, SYSTEMS, AND EQUIPMENT, PREPARATION OF

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for the preparation of aperture cards containing drawing microfilm images, their companion tabulating cards, related Ships Drawing Indexes (SDI), and associated lists.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbook. The following specifications, standards, and handbook form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 55Z3, Department of the Navy, Washington, DC 20362-5101 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A EDRS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-B-131	Barrier Materials, Water Vaporproof, Greaseproof, Flexible, Heat-Sealable
MIL-M-9868	Microfilming of Engineering Documents, 35mm, Requirements for
MIL-C-9877	Cards, Aperture
MIL-C-9949	Cards, Copy
MIL-M-38748	Microfiche: For Engineering/Technical Data, Reports, Studies and Related Data, Requirements for
MIL-M-38761	Microfilming and Photographing of Engineering/Technical Data and Related Documents: PCAM Card Preparation, Engineering Data Micro-Reproduction System, General Requirements for, Preparation of

STANDARDS

FEDERAL INFORMATION PROCESSING STANDARDS

PUB 25	Recorded Magnetic Tape for Information Interchange (1600 CPI, Phase Encoded)
PUB 50	Recorded Magnetic Tape for Information Interchange, 6250 CPI (246 CPMM), Group Code Recording
PUB 79	Magnetic Tape Labels and File structure for Information Interchange

MILITARY

MIL-STD-12	Abbreviations for Use on Drawings and in Specifications, Standards, and Technical Documents
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the currentversion before use.

Provided by IHS Markit under license with DLA
No reproduction or networking permitted without license from IHS Not for Resale
Neither approval of any constituent material shall not be construed as a

MIL-STD-399	Microform Formats
MIL-STD-804	Formats and Coding of Aperture, Copy and Tabulating Cards for Engineering Data Micro-Reproduction System

HANDBOOK

MILITARY

MIL-HDBK-331	Directory of DOD Engineering Data Repositories

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of the Federal Information Processing Standards (FIPS) are available to Department of Defense activities from the Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099. Others must request copies of FIPS from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

2.1.2 **Other Government documents and publications.** The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DOD 5220.22-M	Industry Security Manual for Safeguarding Classified Information
DOD Directive 5230.24	Distribution Statements on Technical Documents
DOD Cataloging Handbook H4/H8	Commercial and Government Entity (CAGE)

(Copies of DOD Directive 5230.24, are available from the Commanding Officer, Naval Publications and Forms Center 5801 Tabor Avenue, Philadelphia, PA 19120-5099. Copies of DOD 5220.22-M and Cataloging Handbook H4/H8 are available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T15:24Z
Check the source to verify that this is the currentversion before use.

NAVAL SEA SYSTEMS COMMAND

N0000-00-IDX-000/TMINS	Technical Manual Identification Numbering System
S9040-AA-IDX-010/SWBS	Expanded Ship Work Breakdown Structure for all Ships and Ship/Combat Systems

OFFICE OF CHIEF OF NAVAL OPERATIONS

OPNAVINST 5510.1H	Department of the Navy Information and Personnel Security Program Regulation

(Copies of N0000-00-IDX-010/TMINS, S9040-AA-IDX-010/SWBS and OPNAVINST 5510.1H should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issue of the document which is DOD adopted is that listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issue of the document not listed in the DODISS is the issue of the document cited in the solicitation.

AMERICAN SOCIETY FOR TESTING & MATERIALS

D 3951	Standard Practices for Commercial Packaging

(Applications for copies should be addressed to the American Society for Testing & Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specifications sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Aperture cards. One aperture card shall be prepared, key punched, and interpreted for each frame of the drawing, associated list, and related drawing documents cited in the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

order. The aperture card shall be the Dual Purpose Engineering Document Card, DD Form 1562 (see figure 1) and keypunched in the format specified herein (see 3.4). The aperture card shall meet the card stock requirements of MIL-C-9877 and MIL-C-9949 and have imaged microfilm prepared and mounted in accordance with sequence of frame requirements of MIL-M-9868. The aperture cards shall be arranged in the same sort sequence as the tabular listing (see 3.2.1).

3.1.1 Repository cards. Repository cards (see 6.4.13) of the imaged aperture card shall contain microfilm image type I, class 1 silver halide negative-type microfilm in accordance with the aperture card requirements of MIL-M-38761 and the microfilm classification requirements of MIL-M-9868. The microfilm's diffused transmission density of the background image area for new drawings shall be 1.0 to 1.2 and 0.95 to 1.25 for all other drawings. For computer output microfilm (COM) (see 6.4.6), the transmission density shall be 1.70 minimum.

3.1.2 Distribution cards. Unless otherwise specified (see 6.2), distribution cards (see 6.4.8) of the imaged aperture card shall be as specified herein, and shall contain type II, class 2 copy cards (kind N, diazo type negative microfilm) in accordance with copy card stock requirements of MIL-C-9949, the microfilm classification requirements of MIL-M-9868, and the copy card requirements of MIL-M-38761.

3.2 Tabulating cards. Unless otherwise specified (see 6.2), one engineering data tabulating card, (NAVSHIP Form 9020/27), card code 3 (see figure 2), shall be punched and interpreted for each aperture card using card code T format, and as specified herein (see 3.4). The tabulating cards shall be in the same sort sequence as the tabular listing (see 3.2.1).

3.2.1 Tabular listing. Unless otherwise specified (see 6.2), a tabular listing containing the keypunched data of the tabulating card set shall be prepared in alphanumeric sequence by document number (as primary sort) and type of document, sheet number, and frame number as secondary sorts (see figure 3).

3.3 Security requirements. Aperture and tabulating cards containing classified information shall be identified, marked, and processed in accordance with DOD 5220.22-M and security marking requirements of MIL-STD-804.

3.4 Keypunching and interpretation. Aperture and tabulating cards shall be keypunched and interpreted in accordance with Table I and MIL-STD-804 instructions for DD Form 1562, as applicable, and as specified herein.

3.4.1 Keypunching. The punched holes in all columns of the aperture cards and tabulating cards shall be punched in proper alignment, horizontally as well as vertically. The data punched in all of the fields shall be entered correctly, so as to allow processing by accounting machines in the reproducing, selecting, and updating of master files.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

Insulation resistance shall be not less than the values specified (see 3.1.

TABLE I. *Aperture and tabulating cards keypunching and interpretation requirements.*

Card columns	Data field definitions	Keypunch card columns	Interpret bars	Remarks
1–2	Type of document	1–2	1U2	–
3–17	Document number	3–17	4U18	Left adjusted
18–22	Code identification [Commercial and Government Entity (CAGE) Code]	18–22	54U58	–
23–25	Sheet number	23–25	22U24	Right adjusted, using nonsignificant zeros to fill out the field.
26–27	Revision letter	26–27	19U20	Right adjusted. If not revision is identified insert a dash "–".
28–30	Number of sheets	28–30	25U27	Right adjusted, using nonsignificant zeros to fill out the field.
31–32	Frame number	31–32	29U30 (Tab card 28U29)	Right adjusted, using nonsignificant zeros to fill out the field.
33–34	Number of frames	33–34	31U32 (Tab card 30U31)	Right adjusted, using nonsignificant zeros to fill out the field.
35–38	Ship type	35–38	33U36	Left adjusted
39–42	Hull number	39–42	37U40	Right adjusted, using nonsignificant zeros to fill out the field.
43–46	Drawing index number (Group number)	43–46	41U44 (Tab card 42U45)	Left adjusted, using nonsignificant zeros to fill out the field.
47	Data rights	47	50U	–
48–49	Control activity	48–49	51U52	Left adjusted. Enter appropriate control activity code from MIL-HDBK-331 or as specified by the Government.
50	Drawing size	50	46U	–

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

TABLE I. *Aperture and tabulating cards keypunching and interpretation requirements – Continued.*

Card columns	Data field definitions	Keypunch card columns	Interpret bars	Remarks
51	Card Code	51	None	Keypunch "T" for aperture cards, keypunch "3" for tabulating cards.
52	Security classification	52	60U	–
53	Image plane	53	None	For aperture cards only. Keypunch 8 for type I, class 1, keypunch 9 is type II, class 2.
53–79	Drawing title	53–79	(Tab card 12L38)	If document title exceeds 27 characters, use MIL-STD-12 abbreviations.
77	Camera microfilm	77	None	Keypunch 8 type I, class 1
78	Open	78	None	Aperture cards only
79	Computer output	79	48U	Keypunch "M" for COM, keypunch "D" for CAD
80	Drawing distribution	80	49U	Enter alpha indicator code used on drawing statement code

3.4.1.1 Keypunching aperture and tabulating cards for total number of sheets (card columns 28-30). For those drawings, associated lists, and related drawing documents where the total number of sheets (not cards) exceeds one, only card 001 shall carry the total number of sheets (columns 28-30); on all subsequent cards, the number of sheets (columns 28-30) shall be left blank.

3.4.2 Overpunching. When the sheet number, number of sheets, frame number, or number of frames becomes too large for the designated columns, overpunching shall be used as specified in 3.4.2.1 through 3.4.2.4.

3.4.2.1 Sheet number (columns 23 to 25). For drawings, associated lists, and related drawing documents having more than 999 sheets, the following designations shall be used:

a. Use an 11–zone overpunch in column 23 to add 1000 to the number
b. Use a 12–zone overpunch in column 23 to add 2000 to the number
c. Use an 11–zone overpunch in column 25 to add 3000 to the number
d. Use a 12–zone overpunch in column 25 to add 4000 to the number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

3.4.2.2 Number of sheets (columns 28 to 30). For drawings, associated lists, and related drawing documents having more than 999 sheets, utilize the following designations for the first sheet only:

a. Use an 11−zone overpunch in column 28 to add 1000 to the number
b. Use a 12−zone overpunch in column 28 to add 2000 to the number
c. Use an 11−zone overpunch in column 30 to add 3000 to the number
d. Use a 12−zone overpunch in column 30 to add 4000 to the number.

3.4.2.3 Frame number (columns 31 to 32). For drawings, associated lists, and related drawing documents having more than 99 frames per sheet, the following designations shall be used:

a. Use an 11−zone overpunch in column 31 to add 100 to the number
b. Use a 12−zone overpunch in column 31 to add 200 to the number
c. Use an 11−zone overpunch in column 32 to add 300 to the number
d. Use a 12−zone overpunch in column 32 to add 400 to the number.

3.4.2.4 Number of frames (columns 33 to 34). For drawings, associated lists, and related drawing documents having more than 99 frames per sheet, the following designations shall be used for the first frame only:

a. Use an 11−zone overpunch in column 33 to add 100 to the number
b. Use a 12−zone overpunch in column 33 to add 200 to the number
c. Use an 11-zone overpunch in column 34 to add 300 to the number
d. Use a 12-zone overpunch in column 34 to add 400 to the number.

3.4.3 Special sheet numbering.

3.4.3.1 Complex page or sheet number. Where page or sheet number notations are not in strict numerical sequence or where designators, such as cable numbers, are being used, the sheets shall be sequentially numbered on the index page of the engineering drawing, associated lists, or related drawing document. The sequence numbers shall be placed on the lower, right-hand corner of each page. The sequential number shall be entered on the aperture card as shown in the following example tabulation:

Sheet number (cable number)	Sequential number (columns 23-25)
5134N00−1	001
5134N00−2	002
5134N00−3	003
5134N01−1	004

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

specified in table II.

Sheet number (cable number)	Sequential number (columns 23-25)
5134N01–2	005
5134N01–3	006
5134N02–1	007

3.4.3.2 Documents with sequential designator. For those documents with sequential designators for pages (sheets) such as 1, 1A, 1AA, 1B, 2, and so forth, the numeric information shall be keypunched in columns 23 to 25 and 28 to 34 as shown in Table II.

TABLE II. *Example for documents with sequential designator.*

Card columns data entries				
Sequential designator (page No.)	Columns 23–25 (sheet No.)	Columns 28–30 (No. of sheets)	Columns 31–32 (frame No.)	Columns 33–34 (No. of frames)
1	001	002	01	04
1A	001	00A	02	04
1AA	001	0AA	03	04
1AB	001	00B	04	04
2	002	–	01	01

3.4.4 System and equipment drawings. Aperture and tabulating cards for system drawings (see 6.4.20), equipment drawings (see 6.5.8), associated lists, and related drawing documents shall be keypunched and interpreted as specified in Table I, except the drawing index number (columns 43 to 46), ship type (columns 35 to 38), and hull number (columns 39 to 42) shall be left blank.

3.4.5 Standard and type drawings. Standard drawings (see 6.4.17) and type drawings (see 6.4.22) cards shall be as specified herein. The cards shall be keypunched and interpreted in accordance with Table I, except that the ship type (columns 35 to 38) and hull number (columns 39 to 42) fields shall be left blank.

3.4.6 Superseded Document Card. A general purpose card (see figure 4) shall be used for the Superseded Document Card and shall be prepared, keypunched and interpreted in accordance with MIL-STD-804 requirements for a Superseded Document Card and Table III. This card shall be prepared as a supplemental card to each new microfilmed standard or type drawing which supersedes a standard or type drawing. This card may be used as a supplement for filing purposes when a drawing number is cancelled or superseded by a different number.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

TABLE III. *Superseded document card/general purpose card keypunching and interpretation requirements*

Data field definitions	Keypunch card columns	Interpret bars
Type of document	–	–
Superseded document number	3–17	4U18
CAGE code	18–22	4L8
(Open)	23–24	–
(Open)	25–26	–
(Open)	27–33	–
(Open)	34	32U
Superseding document number	35–49	36U50
Card Code "J" in column 51	50–51	–
Security classification	52	60L
(Open)	53–58	53L58
Superseding document manufacturer's CAGE Code	59–63	36L40
(Open)	64–65	–
(Open)	66–72	54U60
Julian date of superseding drawing	73–77	42L46
Revision symbol of superseding document	78–80	47L49

3.4.7 Technical variance documents (TVD) (see 6.5.21). When specified in the contract or order, aperture and tabulating cards for technical variance documents shall be prepared, keypunched, and interpreted as specified in 3.1, 3.2 and 3.4, except that Table IV keypunch and interpretation requirements shall be used in lieu of Table I. In addition to the keypunch requirements, the distribution (copy) aperture cards shall be identified with a colored stripe. The stripe shall be 1/4 inch in width along the upper edge of the face side of the distribution (copy) card.

3.4.8 Distribution statements. Distribution statements as specified in DoD Directive 5230.24 are to be reflected on aperture and tabulating cards. The distribution statement used shall be the same as that used on the associated drawing. However, only an abbreviated version of the statement need be placed on the card, provided reference is made to the complete statement on the drawing. These distribution statements shall be stamped or printed on the first and last cards only of each drawing card-set. Table V contains examples of distribution statements derived from OPNAVINST 5510., which implements DoD Directive 5230.24, and sample abbreviated versions thereof. All cards shall be punched to reflect the distribution statement alphabetic indicator as indicated in Table I.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

TABLE IV. *Aperture cards, keypunching, and interpretation requirements for technical variance documents.*

Card columns	Data field definitions	Keypunch card columns	Interpret bars	Remarks
1–2	Type of document	1–2	1U2	–
3–12	NAVSEA drawing number	3–12	4U13	Left adjusted
13–16	Drawing index number (Group number)	13–16	14U17	Left adjusted
18–22	Code identification [Commercial and Government Entity (CAGE) Code]	18–22	54U58	From TVD or DOD Cataloging Handbook H4/H8)
23–25	Hull number	23–25	22U24	Right adjusted, using nonsignificant zeros to fill out the field.
26–27	Revision letter	26–27	19U20	Right adjusted. If no revision is identified insert a dash "–".
28–30	TVD	28–30	25U27	Enter "TVD"
31–32	Frame number	31–32	29U30	Right adjusted, using nonsignificant zeros to fill out the field.
33–34	Number of frames	33–34	31U32	Right adjusted, using nonsignificant zeros to fill out the field.
35–46	TVD number	35–46	33U44	Left adjusted
47	Data rights	47	50U	–
48–49	Control activity	48–49	51U52	Left adjusted. Enter appropriate control activity code from MIL-HDBK-331 or as specified by the Government.
50	Drawing size	50	46U	–
51	Card Code	51	None	Keypunch "T"
52	Security classification	52	60U	–
53	Image plane	53	None	Keypunch 8 for type I, class 1, keypunch 9 if type II class 2
77	Camera microfilm	77	None	Keypunch 8 type I, class 1
78–79	Open	78–79	None	–
80	Distribution statement code	80	49U	Enter alpha indicator used on document.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

style restrictions:

TABLE V. *Examples of distribution statements.*

Code	Full Statement (derived from OPNAVINST 5510.1)	Abbreviated form
A	*Distribution statement A.* Approved for public release; distribution is unlimited	*Distribution statement A;* unlimited
B	*Distribution statement B.* Distribution authorized to US Government agencies only; (fill in reason); (date of determination). Other requests for this document shall be referred to (insert controlling NAVSEA office).	*Distribution statement B;*U.S. Gov't; (controlling NAVSEA office)
C	*Distribution statement C.* Distribution authorized to US Government agencies and their contractors; (fill in reason); (date of determination). Other requests for this document shall be referred to (insert controlling NAVSEA office).	*Distribution statement C;* Gov't and contractors; (controlling NAVSEA office)
D	*Distribution statement D.* Distribution authorized to the DOD and DOD contractors only; (fill in reason); (date of determination). Other requests for this document shall be referred to (insert controlling NAVSEA office).	*Distribution statement D;* DOD and contractors; (controlling NAVSEA office)
E	*Distribution statement E.* Distribution authorized to DOD components only; (fill in reason); (date of determination). Other requests for this document shall be referred to (insert controlling NAVSEA office).	*Distribution statement E;* DOD only; (controlling NAVSEA office).
F	*Distribution statement F.* Further distribution only as directed by Commander, Naval Sea Systems Command, 09T; (fill in reason); (date of determination).	*Distribution statement F;* request approval of Commander, Naval Sea Systems Command, 09T
X	*Distribution statement X.* Distribution authorized to US Government agencies and private individuals or enterprises eligible to obtain export-controlled technical data in accordance with OPNAVINST 5510.161 (date of determination). Other requests for this document shall be referred to Commander, Naval Sea Systems Command, 09T.	*Distribution statement X;* certified contractors; Commander, Naval Sea Systems Command, 09T

3.4.9 Computer Output Microfilm (COM). Aperture cards containing COM shall be keypunched and interpreted in accordance with Table I. The Computer Output Microfilm field (column 79) shall contain an "M", except that a "D" shall be entered if the COM is generated directly from a CAD system.

3.5 Ship's Drawing Index (SDI). A listing of all drawings that describe the ship's configuration shall be prepared. The SDI shall include the following drawing types and at a minimum, the mandatory data elements specified in Appendix A:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

a. Arrangement drawings (see 6.4.2)
b. System diagrams (see 6.4.19)
c. Selected Record Drawings (see 6.4.14)
d. Ship's construction drawings (see 6.4.15)
e. As built drawings (see 6.4.3)
f. Standard and type drawings (see 6.4.17 and 6.4.22)
g. Class drawings (see 6.4.4)
h. Manufacturer's equipment drawings designated as certification data sheets (see 6.4.10)
i. Equipment drawing (see 6.4.9) lists and assembly drawings which list detail drawings
j. Drawings used for test equipment and support equipment carried on board ship
k. SHIPALT drawings which show final ship configuration with SHIPALT number, title, and revision (see 6.4.16)
l. Drawings affected by Alteration and Improvement (A&I) items (includes A&I numbers)(see 6.4.1)
m. Technical variance documents (TVD) (see 6.4.21).

Each issued SDI shall have a separate Technical Manual Identification Number (TMIN) in accordance with N0000-00-IDX-000/TMINS.

3.5.1 **Ship's Drawing Index for single ships.** Unless otherwise specified, an index of drawings shall be developed for a single ship of a class which includes the range of drawings in 3.5 and depicts the ship's configuration. The procuring activity shall approve the exact content of the SDI file records and the format of output reports produced therefrom (see 6.2f). The SDI shall be maintained current for the life of the ship.

3.5.2 **Class SDI.** Unless otherwise specified, an SDI shall be developed for an entire class of ships or a group of ships within a single class. The SDI shall be maintained current for the life of the class of ships. The procuring activity shall approve the exact content of the SDI file records and the format of output reports produced therefrom. Data in the class SDI is arranged so that individual ship configurations can be readily determined and includes:

a. The most current revision of each class drawing
b. The effective revision of each drawing applicable to each ship of the class (the "as-built" configuration)
c. Drawings which delineate departures from the class drawing for specific ships including departures from both ship construction drawings and equipment drawings.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

3.5.3 SDI structure. The SDI shall consist of the following in the indicated order:

a. Front matter
b. Drawing index number list
c. Drawing number list
d. Drawing title list
e. Special reports.

3.5.3.1 Front matter. The front matter shall consist of the following (see 3.5.5.3 for microfiche requirements):

a. Cover sheet
b. User guidance
c. Table of contents
d. Contractor and Government Entity (CAGE) Code listing.

3.5.3.1.1 Cover sheet. A cover sheet shall be prepared in the format shown in figure 5. The cover sheet shall contain the following information:

a. Title, "Hull, Machinery and Electrical Plans for (name of ship, class, or group of ships within a class for which the SDI applies)"

b. Identification number – The assigned TMIN shall appear on the cover sheet as well as each page of the SDI

c. Total number of pages

d. A caution statement which shall read:

"CAUTION

DO NOT DISCARD ANY ORIGINAL PAGES EXCEPT THOSE REPLACED BY REVISED PAGES. EACH INCOMING (CHANGE) PAGE SHALL BE DATE STAMPED AS RECEIVED".

e. Revision number

f. Number of pages in original index

g. Prepared by – Name of activity preparing latest revision

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

h. Distributed by – Name of activity distributing SDI

i. Record of change – Each change or revision to the SDI shall be identified and shall contain the following:

(1) Revision no. – A separate line for each issue of the SDI

(2) Revision or change page numbers – This column shall contain the following types of information, as applicable to each revision:

(a) "COMPLETE REVISION" when all pages of the SDI have been reissued; that is, when a new master SDI is issued

(b) "NONE REQUIRED" when the revision affects the cover page and the SDI is reissued as the result of a periodic review

(c) "PAGES REPLACED" – A listing of pages which are included in a partial reissue of the SDI

(d) "PAGES ADDED" – A listing of pages which have been added in a partial reissue of the SDI. Each page shall be identified with the "Master SDI page number" and suffixed with an alphabetic character, such as 101a.

(3) Issued by – The planning yard authorized to re-issue the SDI

(4) Date – Calendar date in military format as identified on the SDI

(5) Forwarding letter or remarks – Reference to the forwarding letter distributing the SDI and a short explanation of the reason or authority for the issue.

j. Distribution statement – Unless otherwise specified on the contract DD Form 254, Department of Defense Contract Security Classification Specification, the SDI cover shall contain the following distribution statement as specified in DoD Directive 5230.24. "DISTRIBUTION STATEMENT B. Distribution authorized to U.S. Government agencies only for administrative or operational use (fill in date of determination). Other requests for this document shall be referred to Commander, Naval Sea Systems Command, Code 09T." Additionally, export control and destruction notices as also required by DoD Directive 5230.24 shall be applied.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

3.5.3.1.2 **User guidance.** Each SDI shall have a description of how to use the master drawing list immediately following the cover sheet. It shall define for the user the contents and general layout, usage, acronyms, index grouping, and abbreviations of each type of listing included in the SDI. An example of a user guidance page is contained in figure 6.

3.5.3.1.3 **Table of contents.** The table of contents shall list in numerical order the set of drawing index group numbers used in the SDI. The corresponding index group title and the page number on which each index group first appears in the SDI shall be printed in line with the index group number. The index grouping system used in the SDI shall be specified. An example table of contents is contained in figure 7.

3.5.3.1.4 **CAGE Code listing.** A listing shall be prepared in CAGE Code order containing each contractor or vendor by name, city and state and the corresponding CAGE Code. DOD Cataloging Handbook H4/H8 identifies additional vendor information (see figure 8). Only those contractor or vendor codes used in the drawing index number list (see 3.5.3.2) shall be included in this listing.

3.5.3.2 **Drawing index number list.** A drawing index number list that contains all drawings applicable to a single ship, class of ships or a group of ships within a single class shall be prepared. Each entry in the listing shall include all mandatory data elements listed in Appendix A which apply to the particular drawing; when specified in the contract or order, additional optional elements shall be included. An example of a drawing index number list for single ships is contained in figure 9. An example of a drawing index for a class SDI is contained in figure 10. The drawing index number list shall be arranged as follows:

a. NAVSEA numbered drawings shall be listed numerically within each Expanded Ships Work Breakdown Structure (ESWBS) grouping as defined in NAVSEA publication S9040-AA-IDX-010/SWBS. Those drawings that were prepared to some other index grouping system shall be listed under the appropriate index grouping system used in the SDI.

b. Each drawing index group down to the third level shall start at the top of a new page. Indentures below the third level shall be in drawing number sequence within the pages of the related third level index group. The drawing index group number and group title shall be specified on the top of the first page for each drawing index group.

c. Each selected record drawing shall be listed in its applicable drawing index group. In addition, selected record drawings for single ships shall be listed numerically under drawing index number "00000" regardless of their drawing index group. Selected record drawings for a class SDI shall also be listed in a special report with drawings arranged by each ship.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

d. Superseded drawings shall be listed in a "99999" drawing index number group. Superseded drawings shall be referenced to the drawing which superseded them with the superseding drawing in the remarks column.

e. Drawings for single ship SDIs that do not have a NAVSEA drawing number shall be listed, as a group, after the drawings with NAVSEA numbers within a particular drawing index group. These vendor or contractor drawings shall be listed first by CAGE Code and then by contractor drawing number sequence. Class SDIs shall list vendor or contractor drawings without NAVSEA drawing numbers in a special report that is sorted by CAGE Code and within each CAGE by contractor drawing number.

f. Supplemental documents including technical variance documents such as modification drawings (see 6.4.11) and SHIPALT drawings shall be listed in numerical sequence with the associated administrative approval document (that is, SHIPALT record number) printed in the remarks column. In addition, any modifying drawing or document shall be listed in the remarks column or other procuring activity approved data field of the affected drawing.

3.5.3.3 Drawing number list. A sequential drawing number listing shall be prepared which arranges all drawings in alpha-numeric order. The first listing shall contain one sort by NAVSEA drawing number with a cross-reference to the corresponding contractor drawing number and corresponding index number. The second listing shall be sorted by the contractor drawing number with a cross-reference to the NAVSEA drawing number and corresponding index number.

3.5.3.4 Drawing title list. When specified in the contract or order, a list sorted by title in alpha-numeric order giving reference to NAVSEA drawing number with a cross-reference to contractor drawing number and corresponding index number shall be prepared. The drawing title listing shall immediately follow the drawing index number listing.

3.5.3.5 Special reports. When specified in the contract or order, additional reports indexed on designated data elements contained in Appendix A shall be included in the class SDI. Example reports for Non-deviation drawings (see 6.4.12) and Submarine Safety Certification Mapping Drawings (see 6.4.18) are contained in figures 11 and 12. The data elements and their arrangement in these examples are only one of possible combinations that may be specified.

3.5.4 Security classification. Unless otherwise specified, the SDI shall not contain classified information. When the SDI contains classified data, the marking of all classified material shall be assigned by the Government in accordance with DOD 5220.22-M. In addition, the assigned document identification number shall reflect the classification level in accordance with N0000-00-IDX-000/TMINS.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

3.5.5 Media. When specified in the contract or order, the SDI shall be prepared in the media stated in paragraphs 3.5.5.1 through 3.5.5.3.

3.5.5.1 Hardcopy. A hardcopy of the SDI shall be prepared and arranged on 11 x 8 1/2 inch paper.

3.5.5.2 Magnetic tape. Unless otherwise specified, the SDI shall be prepared in magnetic tape format in accordance with FIPS PUB 79. The tape volume labels and file labels shall comply with Level 3 or Level 4 of FIPS PUB 79. Formatting for digital SDIs shall include input fields for all data elements defined in Appendix A and shall allow for data retrieval, manipulation, and transferability to other digital mediums and hardcopy. Acceptable tape densities are 1600 and 6250 characters per inch (CPI) only on 9-track tapes in accordance with FIPS PUBS 25, 50, and 79.

3.5.5.3 Microfiche. Unless otherwise specified (see 6.2), the SDI shall be prepared in a microfiche format. Microfiche copies of the SDI reports shall be produced as Computer Output Microfilm (COM) (see 6.4.6). Each SDI report shall include the following:

a. Microfiche envelope
b. Microfiche film
c. User instructions.

3.5.5.3.1 Microfiche envelope. Each separate SDI report shall be enclosed in a microfiche envelope (see figure 13). Each envelope shall contain the following information printed on the front of the envelope:

a. Class identification

b. Report numbers (the Government assigned TMIN for overall SDI; contractor-assigned number for each included special report (see 3.5.3.5))

c. Title

d. Sort sequence(s) for indexes and special reports

e. Name, address, and telephone number of the preparing activity

f. Distribution statement as specified in DoD Directive 5230.24 or the Contract DD Form 254 (see 3.5.3.1.1.j)

g. Location of user instructions on the microfiche.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

3.5.5.3.2 Microfiche film. Unless otherwise specified (see 6.2), microfiche shall be prepared as Type I, Class 1 silver halide and Type II, Class 2 diazotype in accordance with the types, classes, and kinds specified in MIL-M-38748. Each separate fiche of each report shall be prepared in accordance with MIL-STD-399 requirements for Format 5 microfiche, and shall contain an eye-readable portion at the top that is viewable under normal lighting conditions and shall contain the date of the report and other required information to enable the user to locate the correct fiche. Each fiche within a report shall be page numbered in the eye-readable portion. Each frame of the report shall contain the page number of the report in addition to the frame coordinate number on the fiche. A numeric listing of the drawing whose information is contained on the fiche and the fiche frame coordinate number shall be located in the lower right-hand corner of each fiche.

3.5.5.3.3 User instructions. Each individual fiche of each SDI report shall have a description of how to use the report and an explanation of the data elements (see figure 14). The user instructions shall also contain the following:

a. CAGE Code and name of manufacturers contained in the SDI

b. List of drawing title abbreviations

c. General information including:

(1) Data element definitions
(2) Report descriptions
(3) Index criteria and abbreviations

d. Catalog list of ESWBS by number and name

e. Index of numbers on microfiche by:

(1) Grid
(2) Group
(3) NAVSEA drawing numbers.

3.5.5.4 Optically encoded discs. Data shall be recorded on optical disk media in accordance with the requirements of the contract or other form of agreement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Aperture cards and tabulating cards. The quality assurance requirements of MIL-M-38761, and MIL-M-9868 for inspection and testing of aperture and tabulating cards shall apply to all aperture cards, and tabulating cards prepared to this specification.

4.3 Quality conformance inspection. Quality conformance inspections shall be as specified in Table VI. Quality conformance inspections shall be applied to each item prior to being offered for acceptance under the contract. Quality conformance inspection consists of the examinations in 4.2 and the inspections in 4.4. Failure of the item to pass either the examination or inspection shall be cause for rejection.

TABLE VI. *Quality conformance inspections.*

Inspection	Requirements paragraph	Test and inspection paragraph
Aperture cards	3.1	4.4.1
Tabulating cards	3.2	4.4.2
Security requirements	3.3 and 3.4.7	4.4.3
Keypunching	3.4	4.4.4
Ships drawing indexes	3.5	4.4.5
Packaging	5.1 through 5.3.4	4.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

4.4 Methods of inspection.

4.4.1 Inspection of aperture cards. Inspection of aperture cards shall verify the requirements of 3.1 through 3.1.2.

4.4.2 Inspection of tabulating cards. Inspection of tabulating cards shall verify the requirements of 3.2 through 3.2.1.

4.4.3 Inspection of security requirements. Inspection of security requirements shall verify the requirements of 3.3 and 3.4.7.

4.4.4 Inspection of keypunching. Inspection of keypunching shall verify the requirements of 3.4 through 3.4.9.

4.4.5 Inspection of ship's drawing indexes. Inspection of ship's drawing indexes shall verify the requirements of 3.5 through 3.5.5.3.3.

4.5 Inspection of packaging. Inspection of preservation, packaging, packing, and marking for shipment, stowage and storage shall be in accordance with the requirements of 5.1 through 5.3.4.

5. PACKAGING

5.1 Aperture cards and tabulating cards.

5.1.1 Preparation for delivery. Preparation for delivery shall be in accordance with MIL-M-38761 as follows:

5.1.1.1 Preservation and packaging. Aperture and tabulating cards shall be preserved and packaged in accordance with MIL-M-38761 requirements for Level C packaging.

5.1.1.2 Packing. Packing shall be Level C in accordance with MIL-M-38761 requirements for Level C packing.

5.1.1.3 Marking. Marking shall be in accordance with MIL-STD-129 requirements for interior and exterior identification.

5.2 Ship's Drawing Index. SDIs shall be packaged in accordance with ASTM D 3951 in the most economical manner possible to provide adequate protection during shipping. Elaborate containers shall not be used.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T15:24Z
Check the source to verify that this is the currentversion before use.


5.3 Digital Medium. It shall be the responsibility of the sender of the digital document to use best commercial practices in the packaging of media used to transfer the document.

5.3.1 Encoded magnetic computer media. A packing slip showing the names and volume numbers of each tape shall be included in each package. A packing slip shall be affixed to each reel of tape and shall indicate the recording density, 1600 or 6250 CPI. A printed listing of the content of included declaration files shall be on the packing slip or attached to it.

5.3.2 Protection. Encoded tapes shall be protected against exposure to the close proximity of electric motors, magnets, and scanning devices. Such exposure may cause total or partial loss of the encoded data.

5.3.3 Packaging. Encoded magnetic computer tapes shall be placed in a barrier bag or be wrapped in barrier sheet material. The barrier material or bag shall conform to the Type II Class 2 material of MIL-B-131, with at least one of its laminates containing aluminum foil. The package then shall be placed in an appropriate shipping carton. The exterior packaging shall conform to ASTM D 3951.

5.3.4 Marking. Encoded magnetic computer tape shipping containers shall be conspicuously labeled with a warning as shown below.

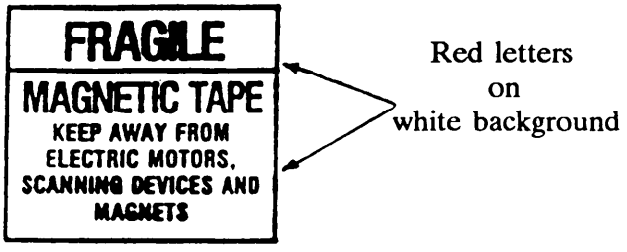

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. Aperture cards and tabulating cards prescribed by this specification are intended to be used for the microform storage, retrieval, and dissemination of engineering drawings of ships, systems, and equipments. Ships drawing indexes are used by ship and shore personnel to identify those on-board drawings applicable to a ship or class of ships that may be needed for maintenance, overhaul, or repair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

6.2. Acquisition requirements. Acquisition documents must specify the following as applicable:

a. Title, number, and date of this specification

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1)

c. If the microfilm to be furnished by the contractor is other than as specified (see 3.1 through 3.1.2)

d. Types of cards (see 6.3):

(1) Repository aperture cards (see 3.1.1)

(2) Distribution aperture cards (see 3.1.2)

(3) Tabulating cards (see 3.2)

(4) Superseded document cards (see 3.4.6)

(5) Technical Variance Document cards (see 3.4.7)

e. Tabular listing of aperture cards (see 3.2.1)

f. Selection of the SDI requirements contained in this specification shall be as specified (see 3.5 through 3.5.5.3):

(1) Ship's drawing index for single ships (see 3.5.1)

(2) Class Ship's Drawing Index (see 3.5.2)

(3) Special reports (see 3.5.3.5)

(4) Hardcopy (see 3.5.5.1)

(5) Magnetic tape (see 3.5.5.2)

(6) Microfiche (see 3.5.5.3).

6.3 Card acquisition. Aperture cards and tabulating cards described herein may be acquired in accordance with General Administrative Federal Supply Schedule, FSC Group 75, Part VIII, Section A, Office Supplies FSC Class 7530.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the currentversion before use.

6.4 Definitions.

6.4.1 Alteration and Improvement (A&I). An Alteration & Improvement is the submarine equivalent to an Alteration Equivalent to Repair (AER). An AER is usually accomplished by Forces Afloat and will normally consist of one or more of the following: the use of different material which has been approved for like or similar use; the replacement of obsolete, worn-out or damaged parts, assemblies, or equipments, requiring renewal by that of later and more efficient design; the strengthening of parts which require repair or replacement; minor modifications involving no significant changes in design or functioning of equipment; and/or the replacement of parts, assemblies, or equipment with like items of later or more efficient design where cost savings can be demonstrated.

6.4.2 Arrangement drawings. Drawings that depict in any projection or perspective drawing technique, with or without controlling dimensions, the relationship of major units of the item depicted.

6.4.3 As built drawings. Drawings for an individual ship that illustrate the final ship and system arrangement, fabrication, and installation where these are not the same as the class or ship alteration (SHIPALT) drawings.

6.4.4 Class drawing. A drawing applicable to more than one ship of the class.

6.4.5 Computer-Aided Design (CAD). A process which uses a computer system to assist in the creation, modification and display of a design.

6.4.6 Computer output microfilm (COM). Microfilm or microfiche containing data reproduced by a recorder from machine-generated signals.

6.4.7 Detail and support equipment drawings. Drawings that depict details of individual parts and assemblies that are not otherwise detailed on ship construction and equipment drawings.

6.4.8 Distribution card. An aperture card that contains a processed, negative polarity, duplicate diazo microfilm second or third generation image.

6.4.9 Equipment drawings. Drawings prepared by manufacturers of Government- or Contractor-furnished equipment which, unless otherwise specified, are identified by a manufacturer drawing number. They include, but are not limited to, certification data sheets, drawing lists, outline drawings, assembly drawings, subassembly drawings, and parts lists.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

6.4.10 Manufacturer's equipment drawings designated as certification data sheets. Supplementary drawings that contain certain contract data, equipment characteristics data, drawing references, etc., which must be furnished for each contract, purchase order, or equipment produced or procured by a contractor, except when an outline drawing, drawing list, or other type of document containing equivalent data is specified in lieu of a certification data sheet.

6.4.11 Modification drawings. Drawings that modify ship construction and equipment drawings to accomplish specific tasks such as a SHIPALT. In some cases, these drawings are recorded in the SDI as technical variance documents against the parent drawings that they modify.

6.4.12 Non-deviation drawings. Ship construction and equipment drawings from which no departure in the materials, manufacture, or installation may be made without prior approval of the Government.

6.4.13 Repository card. An aperture card that contains a processed, negative polarity, camera original microfilm first generation image.

6.4.14 Selected Record Drawings. A designated group of drawings and related data made applicable to an individual ship that illustrates final shipboard installation of important features, systems, and arrangements. They are prepared by the contractor normally from configuration drawings provided by the Design Yard, and are maintained current throughout the life of the ship.

6.4.15 Ship's construction drawings. Drawings prepared by the contractor necessary for construction of the ship and assigned NAVSEA drawing numbers:

a. Configuration drawings define ship configuration, components, and systems. Examples include system diagrams, space arrangements, and steering gear arrangements.

b. Sectional construction (SC) drawings developed for use by the shipbuilders in construction of the ship.

c. Ship support drawings are drawings that meet the requirements for logistics technical documentation. Ship support drawings are usually developed from configuration or SC drawings.

6.4.16 SHIPALT drawings. Drawings that are utilized by a shipyard or other activity (including Ship's Force) for the accomplishment of SHIPALT work. These drawings also provide a record of ship configuration after SHIPALT accomplishment, are used by Ship's Force in maintenance and casualty control, are used by material support activities in determining support requirements,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

and are used by NAVSEA to maintain system and compartment configuration control. These drawings include, as required, system drawings and diagrams, arrangement drawings, structural drawings, manufacturing drawings, assembly and detail drawings, ripout drawings, temporary access/egress drawings, modification drawings, cabling sheets, and special drawings.

6.4.17 Standard drawings. NAVSEA controlled drawings that delineate arrangements or details of systems, equipment, or components, and from which no departure is permitted without specific approval.

6.4.18 Submarine safety certification mapping drawings. Drawings required for certification of elements of the NAVSEA submarine material certification requirements.

6.4.19 System diagram. A drawing that delineates features and functional relationships of system elements composing the system assembly by means of graphical symbols and lines.

6.4.20 System drawings. Drawings prepared by manufacturers of Government- or Contractor-furnished systems which, unless otherwise specified, are identified by a manufacturer drawing number. They include, but are not limited to, drawing lists, outline drawings, assembly drawings, and subassembly drawings.

6.4.21 Technical variance document (TVD). A document used to record minor variances against a drawing when the variance will not be made to the final drawing. Examples of such documents are engineering notices, liaison action requests, waivers, government furnished equipment variance data, drawings, and drawing revision notices.

6.4.22 Type drawings. NAVSEA drawings that delineate or illustrate design features of systems or components which are subject to development by the contractor to ensure full compliance with specifications, and which contain mandatory features from which no departure is permitted without specific approval.

6.5 Subject term (keyword) listing:

Data elements
Distribution cards
Distribution statements
Keypunching
Microfiche
Magnetic tape
Repository cards
Technical variance documents

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing activity
Navy – SH
(Project EDRS-N090)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

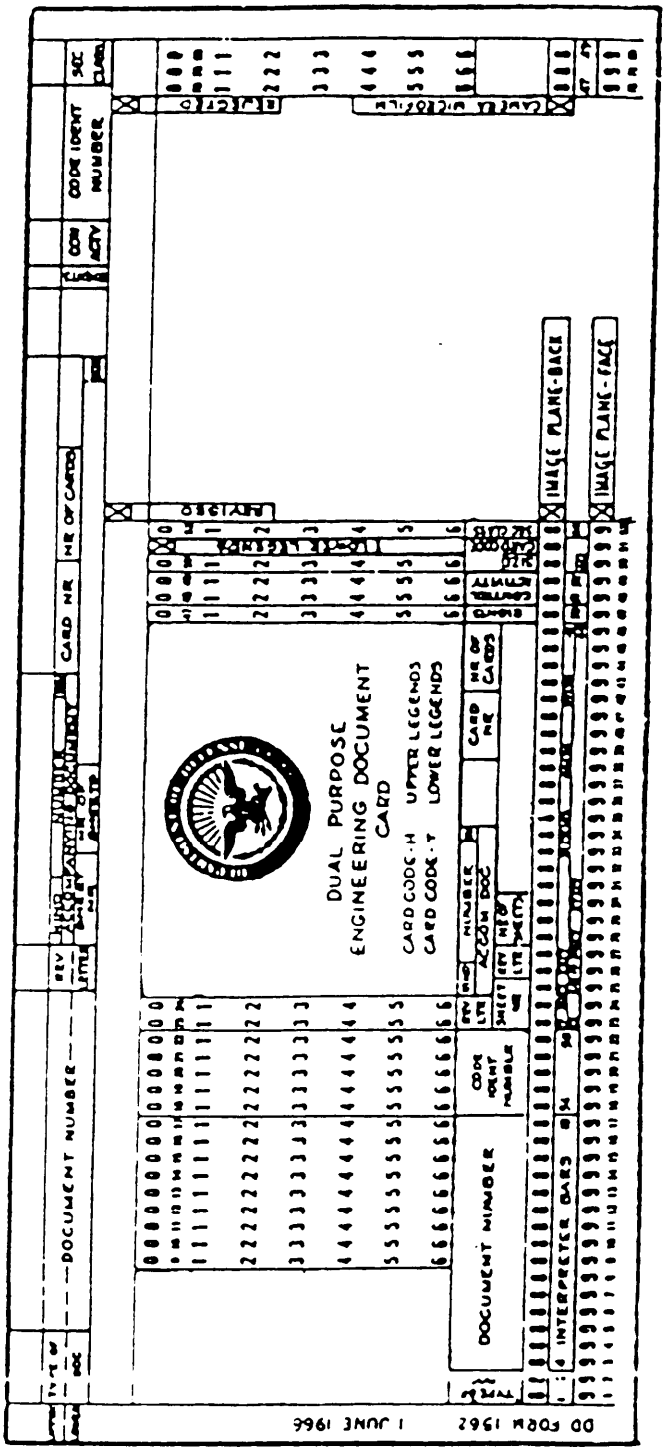


FIGURE 1. *Sample DD Form 1562 Dual Purpose Engineering Document Card (card code H/T).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

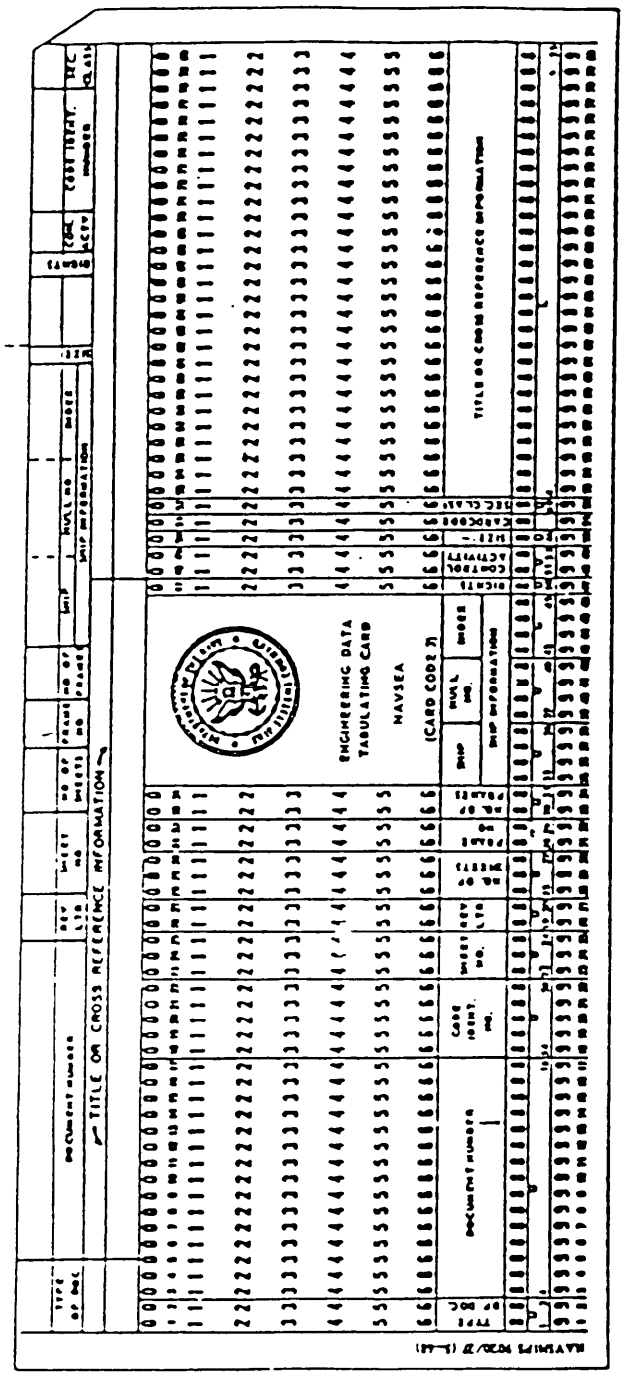


FIGURE 2. *Sample NAVSHIP 9020/27 Engineering Data Tabulating Card.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

Date _____ PCAM Tabular Listing for _____

Type of Doc	Document Number	CAGE CODE	Sht #	Rev	# of Shts	Frame #	# of Frames	Ship Type	Hull #	Dwg Index #	Data Rights	Cont Act	Dwg SZ	Card Code	Sec Class	Dist Stmt	Drawing Title

FIGURE 3. *Example of tabular listing for aperture cards.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

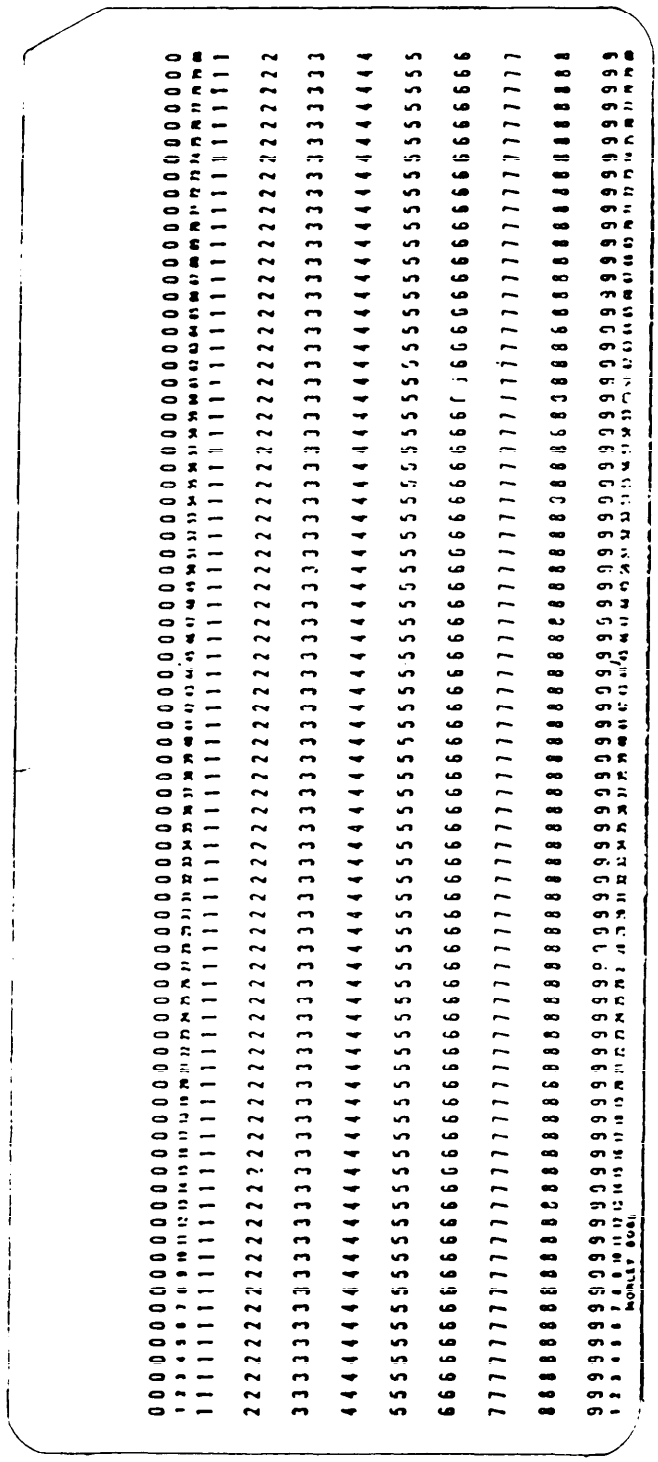


FIGURE 4. *Sample General Purpose Card.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

S9DDG-XX-SDI-010/DDG-XXX
TOTAL NO. OF PAGES
INCLUDING THIS COVER: 610

CAUTION
DO NOT DISCARD ANY
ORIGINAL PAGES
EXCEPT THOSE REPLACED
BY REVISED PAGES

SHIP'S DRAWING INDEX
HULL, MACHINERY AND ELECTRICAL PLANS
FOR
USS EVERSAIL (DDG XXX)

REV NO 4

EACH INCOMING (CHANGE)
PAGE SHALL BE DATE
STAMPED AS RECEIVED

ORIGINAL INDEX (605 PAGES) PREPARED BY: NAVSHIPYD PTSMH DISTRIBUTED BY: NAVSHIPYD PTSMH

RECORD OF CHANGE PAGES ISSUED OR RECEIVED

REVISION NO.	PAGE NUMBER - ISSUED REVISED - OR ADDED	ISSUED BY	DATE	FORWARDING LETTER OR REMARKS
1.	COMPLETE REVISION	NAVSHIPYD PTSMH	10 OCT 1986	END FY 85 OVERHAUL
2.	NONE REQUIRED	NAVSHIPYD PTSMH	15 APR 1987	SEMI-ANNUAL REVIEW
3.	485, 500, 602, 606	NAVSHIPYD PTSMH	15 OCT 1987	SEMI-ANNUAL REVIEW
4.	307, 607 THRU 609	NAVSHIPYD PTSMH	6 APR 1988	FY 87 SRA

DISTRIBUTION STATEMENT B. Distribution authorized to U.S. Government agencies only for administrative or operational use, April 1988. Other requests for this document shall be referred to Commander, Naval Sea Systems Command, Code 09T

DESTRUCTION NOTICE: Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

FIGURE 5. *Example of an SDI cover sheet.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

USER GUIDANCE

SPDDG-XX SDI-010/DDG-XXX
REV 00

This SDI consists of the following sections:

1. Table of Contents. The table of contents lists in numerical order, each drawing index group that appears in this SDI along with their corresponding subjects. All drawings associated with the drawing index are on the corresponding page number.

2. Commercial and Government Entity (CAGE) Code Listing. The listing, in numerical order according to CAGE Code, lists each manufacturer and name. Additional information concerning the manufacturer can be found in H4/H8 Commercial and Government Entity Code Handbook.

3. Drawing Index Number List. The drawings in this list are grouped by index number with drawings listed in ascending numerical order within each drawing index number. The following acronyms and abbreviations are used in this SDI:

a. Action Indicators

(1) A - Addition - Indicates this drawing has been added since the last revision.

(2) C - Changed - Indicates this drawing has been changed since the last revision.

(3) D - Deleted - Indicates the drawing has been deleted since the last revision.

(4) S - Superseded - Indicates a superseding action since last revision.

b. Drawing Title - Title as it appears in the drawing title block or abbreviated title.

c. Drawing Index Number - Expanded Ship Work Breakdown Structure

d. NAVSEA Dwg. No. - NAVSEA identification listed in title block - If not applicable this field will be blank.

e. Rev - Revision letter of NAVSEA drawing number.

f. Shts - Number of sheets of the drawing.

g. Contractor/Vendor Dwg. No. - Contractor or vendor number appearing on the drawing.

h. Revision - Contractor or vendor's revision identifier.

i. CAGE Code - Contractor or vendor's CAGE Code.

j. Remarks - Additional items applicable to the drawing.

k. Remarks

(1) SRD - Selected Record Drawing

(2) ND - Non-Deviation Drawing

(3) SS - Subsafe Drawing

(4) NC - Noise Control

(5) SEC - Security Classification

- (S) Secret
- (C) Confidential
- (N) None

(6) NFD - Nuclear Propulsion Drawing - An "X" denotes a drawing under the technical cognizance of the reactor planning yard and NAVSEA 08.

4. Drawing Number Listing. The drawing number listing provides a listing of all SDI drawings in Alpha-Numeric order by drawing number. List number 1 is sorted by NAVSEA drawing number with a cross-reference Number to the contractor drawing number. List number 2 is sorted by contractor drawing number with a cross-reference to the NAVSEA drawing number and corresponding drawing index number. These lists are provided as a quick reference to locate drawings.

5. User Note. Anyone who changes/alters the ship or notices any errors in the SDI shall report those changes/errors to applicable Hull Planning Yard. This requirement is exempt from report control procedures by NAVSEAINST 5214.2.

15 MAY 87

FIGURE 6. *Example of a user guidance page.*

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the currentversion before use.

DDG-XXX S9DDG-XX-SDI-010/DDG-XXX
REV 00

TABLE OF CONTENTS

ESWBS	TITLE	PAGE NO.
000000	SELECTED RECORD DRAWINGS	1
11000	SHELL AND SUPPORT STRUCTURE	8
11100	SHELL PLATING, SURFACE SHIP AND SUBMARINE PRESSURE HULL	17
11300	INNER BOTTOM	19
11400	SHELL APPENDAGES	21
11500	STANCHIONS	48
11900	LIFT SYSTEM FLEXIBLE SKIRTS AND SEALS	50
12000	HULL STRUCTURAL BULKHEADS	52
12100	LONGITUDINAL STRUCTURAL BULKHEADS	55
12200	TRANSVERSE STRUCTURAL BULKHEADS	57
14000	HULL PLATFORMS AND FLATS	58
14100	1ST PLATFORM	60
16100	STRUCTURAL CASTINGS, FORGINGS, AND EQUIV. WELDMENTS	62
16200	STACKS AND MACKS (COMBINED STACK AND MAST)	63
17000	MASTS, KINGPOSTS, AND SERVICE PLATFORMS	75
17100	MASTS, TOWERS, TETRAPODS	76
19000	SPECIAL PURPOSE SYSTEMS	79
19100	BALLAST, FIXED OR FLUID, AND BUOYANCY UNITS	86
22100	PROPULSION BOILERS	97

FIGURE 7. *Example Table of Contents.*

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the currentversion before use.

S9DDG-XX-SDI-010/DDG-XXX
REV 00

DDG-XXX

COMMERCIAL AND GOVERNMENT ENTITY CODE

CAGE	NAME
00062	MARINE ELECTRIC RFD INC.-BROOKLYN/NY
00159	ACME ELEC CORP.-CUBA/NY
00289	MARINE ELECTRIC CORP-BROOKLYN/NY
00502	ADEL DIV OF DELAVAL TURBINE CALIFORNIA INC-BURBANK/CA
00736	AIR MAZE CORP-CLEVELAND/OHIO
00928	COLT INDUST INC-NEW YORK/NY
01255	LITTON INDUST INC-BEVERLY HILLS/CA
01289	GEN ELEC CO STEAM TURB-GR MANUFACTURING DEPT-LYNN/MA
01411	WESTINGHOUSE ELECTRIC CORP-BUFFALO/NY
01414	AIRCRAFT POROUS MEDIA INC-GLEN COVE/NY
01425	MAGNETEK INC. LOUIS ALLIS DIV-MILWAUKEE/WI
01518	ALNOR INSTRUMENT CO-SKOKIE/IL
01526	GENICOM CORP-WAYNESBORO/VA
02734	RCA CORP GOVERNMENT AND COMMERCIAL SYSTEMS PRODUCTS-MOORESTOWN/NJ
02995	OPPENHEIMER PRECISION PRODUCTS INC.-WILLOW GROVE/PA
03501	GENERAL ELECTRIC CO-TURBINE OPNS-SCHENECTADY/NY
03775	DYNA EMPIRE T-C DEPT-GARDEN CITY LI/NY
03936	SPERRY MARINE INC.-CHARLOTTSVILLE/VA
04034	IMO DELAVAL INC.-GEMS SENSOR DIVISION-PLAINVILLE/CN
04073	BABCOCK AND WILCOX CO-NEW YORK/NY
04579	AURORA PUMP CO-AURORA IL
04613	KEYSTONE VALVE-HOUSTON/TX
04845	AUTOMATIC SW CO/FLORHAM PARK/NJ
05168	BAILEY CONTROLS-WICKLIFFE/OH
05381	MODERN METAL MFG-NEW YORK/NY
05853	PTC-BORDENTOWN/NH
05991	ITT-BARTON INST. CITY OF INDUSTRY CALIF-MONTEREY PARK/CA
06032	ANTENNA PRODUCTS CO-MINERAL WELLS/TX

AS OF MAY 198/

FIGURE 8. *Example of Commercial and Government Entity (CAGE) Code Page.*

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the currentversion before use.

S9DDG-XX-SDI-010/DDG-XXX
FORMAL ISSUE: 010
UPDATE ISSUE: 00
DATE OF DATA: 08/13/87
PAGE: 150

USS EVERSAIL (DDG-XXX)

SHIP'S DRAWING INDEX
DRAWING INDEX NUMBER LIST

ESWBS NO: 32000

POWER DISTRIBUTION SYSTEMS

A=Add
C=Change
D=Delete
S=Supersede

	Drawing Title	Dwg Index No.	NAVSEA Dwg No. / Type / Hull	Rev SHTS	Contractor/ Vendor Dwg. No. / Revision / CAGE CODE	Remarks	S R D	N S D	S N E C	P C D
S	PWR SYS CABLING DECK DWG MN DK & BELOW FR 200 TO STERN	32040	5350217 DDG-XXX	J 005	3204-W08 REV: F CAGE: 24804	SUPERSEDES		S	N	
						4671480				
S	PWR SYS CABLING DECK DWG MNDK & ABOVE FR 180 TO 150	32040	5350218 DDG-XXX	V 018	3204-W09 REV: G CAGE: 24804	SUPERSEDES			N	
						4671481				
S	PWR SYS CABLING DECK DWG MN DK & ABOVE FR 150 TO 180	32040	5350219 DDG-122	L 006	3204-W10 REV: J CAGE: 24804	SUPERSEDES			N	
						4671482				
S	POWER SYS FEEDERS ISO CABLING DIAG	32040	5350220 DDG-XXX	H 007	3204-W11 REV: D CAGE: 24804	SUPERSEDES			N	
						4671483				
S	POWER SYSTEM ONE LINE DIAG-60 HZ	32040	5350221 DDG-XXX	AE 113	3204-W12 REV: E CAGE: 24804	SUPERSEDES			N	
						4671485				
S	POWER SYSTEM ONE LINE DIAG-400 HZ	32040	5350222 DDG-XXX	F 008	3204-W13 REV: F CAGE: 24804	SUPERSEDES			N	
						4671485				
S	PWR SUPPLIES TO ELEX EQUIP ONE LINE DIAG	32040	5350223 DDG-XXX	V 048	3204-W14 REV: F CAGE: 24804	SUPERSEDES			N	
						4671486				

FIGURE 9. *Example of a drawing index list for a single ship SDI.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

```
                                                
```

```
                                                
```


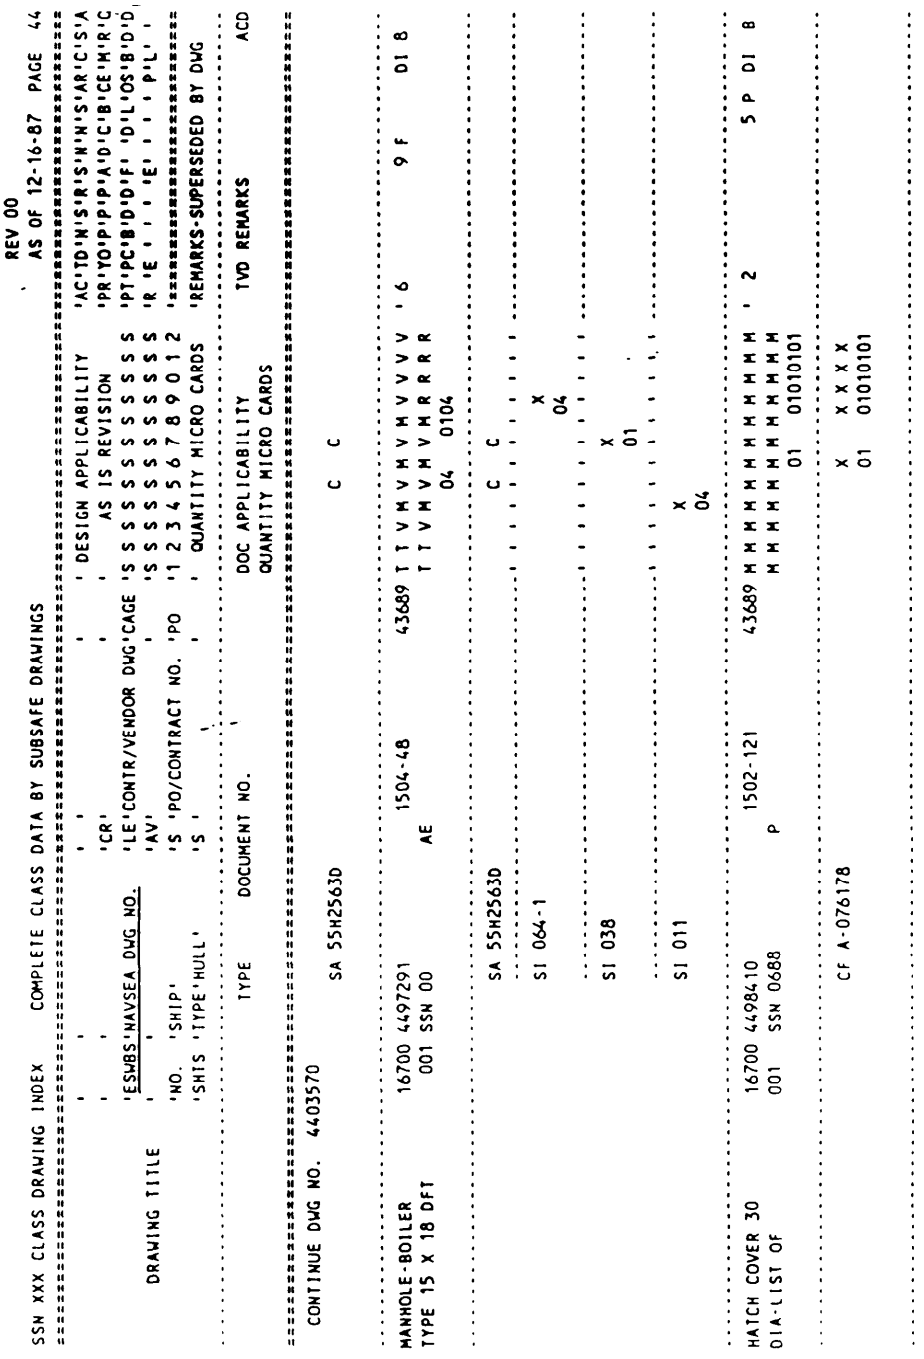


FIGURE 12. *Example of a ship's drawing index for SUBSAFE drawings.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

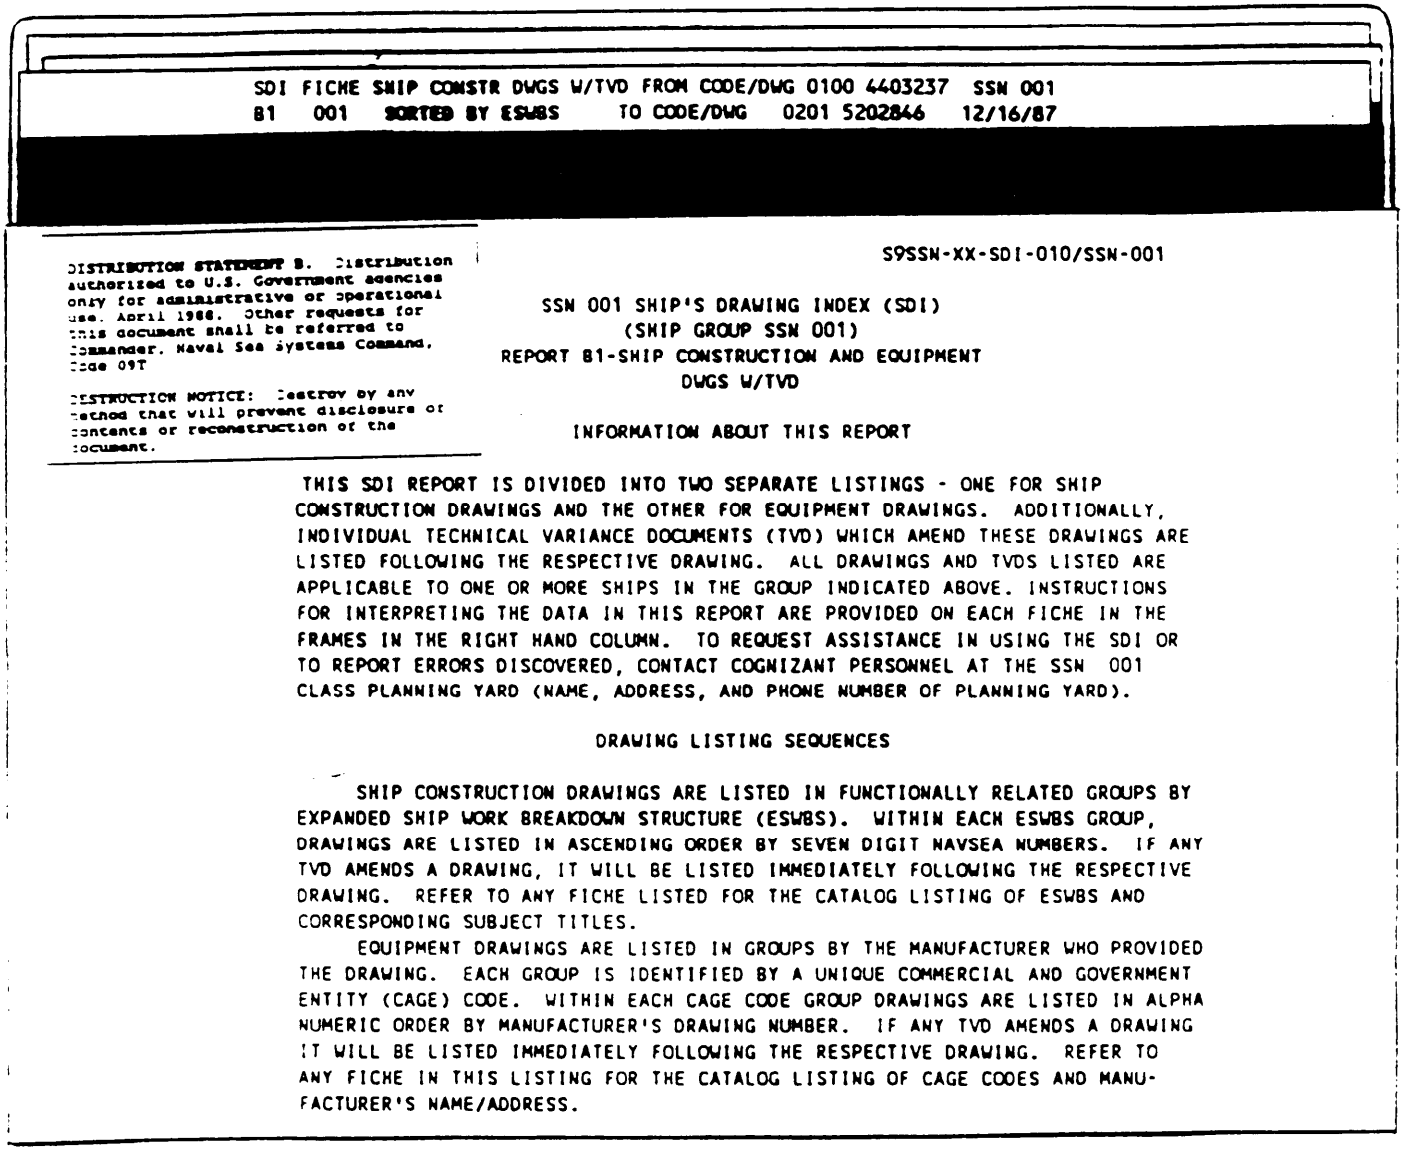

SDI FICHE SHIP CONSTR DWGS W/TVD FROM CODE/DWG 0100 4403237 SSN 001
81 001 SORTED BY ESWBS TO CODE/DWG 0201 5202846 12/16/87

DISTRIBUTION STATEMENT B. Distribution authorized to U.S. Government agencies only for administrative or operational use. April 1988. Other requests for this document shall be referred to Commander, Naval Sea Systems Command, Code 09T

DESTRUCTION NOTICE: Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

S9SSN-XX-SDI-010/SSN-001

SSN 001 SHIP'S DRAWING INDEX (SDI)
(SHIP GROUP SSN 001)
REPORT 81-SHIP CONSTRUCTION AND EQUIPMENT
DWGS W/TVD

INFORMATION ABOUT THIS REPORT

THIS SDI REPORT IS DIVIDED INTO TWO SEPARATE LISTINGS - ONE FOR SHIP CONSTRUCTION DRAWINGS AND THE OTHER FOR EQUIPMENT DRAWINGS. ADDITIONALLY, INDIVIDUAL TECHNICAL VARIANCE DOCUMENTS (TVD) WHICH AMEND THESE DRAWINGS ARE LISTED FOLLOWING THE RESPECTIVE DRAWING. ALL DRAWINGS AND TVDS LISTED ARE APPLICABLE TO ONE OR MORE SHIPS IN THE GROUP INDICATED ABOVE. INSTRUCTIONS FOR INTERPRETING THE DATA IN THIS REPORT ARE PROVIDED ON EACH FICHE IN THE FRAMES IN THE RIGHT HAND COLUMN. TO REQUEST ASSISTANCE IN USING THE SDI OR TO REPORT ERRORS DISCOVERED, CONTACT COGNIZANT PERSONNEL AT THE SSN 001 CLASS PLANNING YARD (NAME, ADDRESS, AND PHONE NUMBER OF PLANNING YARD).

DRAWING LISTING SEQUENCES

SHIP CONSTRUCTION DRAWINGS ARE LISTED IN FUNCTIONALLY RELATED GROUPS BY EXPANDED SHIP WORK BREAKDOWN STRUCTURE (ESWBS). WITHIN EACH ESWBS GROUP, DRAWINGS ARE LISTED IN ASCENDING ORDER BY SEVEN DIGIT NAVSEA NUMBERS. IF ANY TVD AMENDS A DRAWING, IT WILL BE LISTED IMMEDIATELY FOLLOWING THE RESPECTIVE DRAWING. REFER TO ANY FICHE LISTED FOR THE CATALOG LISTING OF ESWBS AND CORRESPONDING SUBJECT TITLES.

EQUIPMENT DRAWINGS ARE LISTED IN GROUPS BY THE MANUFACTURER WHO PROVIDED THE DRAWING. EACH GROUP IS IDENTIFIED BY A UNIQUE COMMERCIAL AND GOVERNMENT ENTITY (CAGE) CODE. WITHIN EACH CAGE CODE GROUP DRAWINGS ARE LISTED IN ALPHA NUMERIC ORDER BY MANUFACTURER'S DRAWING NUMBER. IF ANY TVD AMENDS A DRAWING IT WILL BE LISTED IMMEDIATELY FOLLOWING THE RESPECTIVE DRAWING. REFER TO ANY FICHE IN THIS LISTING FOR THE CATALOG LISTING OF CAGE CODES AND MANUFACTURER'S NAME/ADDRESS.

FIGURE 13. *Example of a microfiche envelope.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

S9SSN-XX-SDI-010/SSN-XXX
REV 00

GENERAL INFORMATION
SHIP'S DRAWING INDEX (SDI)
FRONT MATTER

This Front Matter is organized into three major sections, A through C. If you have difficulty in finding the information you need in the SDI, you may telephone (Name and phone number of POC)

CONTENTS

A. Data Element Definitions - Defines all data items contained in SDI
B. Report Description - A Brief Summary of each sort, sequence, and content.
C. Indexing criteria and abbreviations

(A)
DATA ELEMENT DEFINITIONS

In this sample format of data elements, the numbers above and below data field title correspond to SDI data elements, which are defined below.

```
                                                                                                                (10) (12) (14) (16) (18) (20) (22)
          (2)                                  (6)                                                      (9)  (11) (13) (15) (17) (19) (21) (23)
               (3)                                 -----DESIGN APPLICABILITY--(7)-- S  R  A  L  S  N  N  C  P  C  S  V  S  M  M
               NAVSEA    (4)       (5)             -----CONSTR APPLICABILITY--(8)-- T  E  P  O  M  D  C  C  R  M  R  M  E  I  E
    (1)   ESWBS DWG NO   CLS CONTR DWG NO CAGE 0  0  0  0  0  0  0  0  0  0  0  E  A  V  C  C     D  S  O  B  D  C  C  C  D
DRAWING TITLE             REV                 0  0  0  0  0  0  0  0  0  0  0  A  C  L                    P  L
               NO    SHIP                     0  1  2  3  4  5  6  7  8  9  10 M  T
               SHTS  TYPE HULL                   SOURCE FSCM       ESWBS       SUPERSEDED DWG (28)
               (24)  (25)                           (26)           (27)

                    TYPE  DOCUMENT NO (29)          ----DOCUMENT APPLICABILITY-(30)   TVD REMARKS (31)
```

1. DRAWING TITLE. The abbreviated title of the drawing. (If you have difficulty interpreting a title, refer to list of Drawing title Abbreviations in the last section of this Front Matter.)

2. ESWBS NO. (S9040-AA-IDX-010/ESWBS Expanded Ship Work Breakdown Structure for all Ships and Ship/Combat Systems). The ESWBS functionally categorizes the drawing subject. In section C of this Front Matter, part 1 lists ESWBS titles in numerical order, and part 2 lists ESWBS titles alphabetically.

//

FIGURE 14. *Example user instructions.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

S9SSN-XX-SDI-010/SSN-XXX
REV 00

(B)
REPORT DESCRIPTION

THE SDI CONSISTS OF 11 SEPARATE REPORTS (A, B, C1, D, G, H, K, L, M, N, AND P) AND IS DISTRIBUTED MONTHLY. THE VARIOUS REPORTS PROVIDE USERS WITH FLEXIBILITY IN LOCATING DRAWINGS. A SUMMARY OF REPORTS IS PROVIDED BELOW.

REPORT LETTER & TITLE	CONTENT	SORT SEQUENCE
B. SHIP CONSTRUCTION AND EQUIPMENT DRAWINGS WITH TVD (TECHNICAL VARIANCE DOCUMENTATION)	ALL DRAWINGS AND TVD IN THE DATA BASE	FOUR LISTINGS FOR THE CLASS: 1) ALL DRAWINGS WITH NAVSEA NUMBERS SORTED BY NAVSEA NUMBER FOLLOWED BY APPLICABLE TVD. 2) ALL DRAWINGS WITH NAVSEA NUMBERS, SORTED BY ESWBS AND THEN BY NAVSEA NUMBER. EACH DRAWING IS FOLLOWED BY APPLICABLE TVD. 3) ALL DRAWINGS WITHOUT NAVSEA NUMBERS, SORTED BY CONTRACTOR DRAWING NUMBER. EACH DRAWINGS IS FOLLOWED BY APPLICABLE TVD. 4) ALL DRAWINGS WITHOUT NAVSEA NUMBERS, SORTED FIRST BY CAGE AND THEN BY CONTRACTOR DRAWING NUMBER. EACH DRAWING IS FOLLOWED BY APPLICABLE TVD.
D. SELECTED RECORD DRAWINGS	EACH SHIPS CLASS BASELINE DRAWINGS FROM WHICH SELECTED RECORD DRAWINGS ARE DEVELOPED (CODED S) AND SELECTED RECORD DRAWINGS (SRD) (CODED R)	EACH SHIP'S BASELINE ("CHASSIS") AND SRD DRAWINGS ARE LISTED TOGETHER. BASELINE DRAWINGS ARE LISTED FIRST FOR EACH SHIP, SORTED BY NAVSEA DRAWING NUMBER. FOLLOWING THEM ARE EACH SHIP'S SRD DRAWINGS SHORTED BY NAVSEA NUMBER.

FIGURE 14. *Example user instructions – Continued.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A

SDI DATA ELEMENT DEFINITIONS

10. SCOPE. This Appendix is a mandatory part of the specification. The information contained herein is intended for compliance as indicated in the listing of SDI data element definitions, which are to be used in establishing the SDI database.

10.1 Mandatory Fields. Mandatory fields may be left blank if not applicable to a particular drawing or ship type.

activity's discretion.

20. APPLICABLE DOCUMENTS. This section is not applicable to this Appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Definitions
(mandatory)[1]

Data element no.	Data element name	Length	Format	Definition and remarks	Data entry requirements
1	NAVSEA drawing number	15	Numeric LJ	NAVSEA drawing number, EXACTLY as it appears in the drawing title block	Mandatory
2	NAVSEA drawing revision	6	Alpha numeric LJ	NAVSEA drawing revision number, EXACTLY as it appears in the drawing title block	Mandatory
3	Drawing/consol-dated index number	5	Alpha numeric LJ	Identifies the drawing indexing number EXACTLY as shown in the drawing title block	Mandatory
4	Drawing index group	10	Alpha numeric LJ	Major grouping system of drawings listed in the SDI. This code can be of the following codes: Old BSCI SSIC Old SSIC "S" Group BSCI ESWBS	Mandatory
5	Action indicator	1	Alpha	Identifies a change made to the drawing record since the last revision of the SDI. The following are valid values: A – Drawing added C – Drawing changed, i.e., revision number D – Drawing deleted S – Drawing is superseded.	Mandatory

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Descriptions
(mandatory)[1] – continued.

Data element No.	Data element name	Length	Format	Definition & remarks	Data entry requirements
6	Contractor/ vendor drawing number	28	Alpha numeric LJ	Drawing number assigned by the contractor/ vendor, EXACTLY as shown in drawing title block	Mandatory
7	Commercial and government entity (CAGE) code	5	Alpha numeric	Identifies the organization/manufacturers that developed, own or is responsible for the drawing	Mandatory
8	Contractor/ vendor drawing revision	6	Alpha numeric LJ	Drawing revision level associated with drawing number EXACTLY as it appears on drawing	Mandatory
9	Drawing title	112 (28x4)	Alpha numeric LJ	Title of the drawing, if document title exceeds 112 characters, use MIL-STD-12 abbreviations	Mandatory
10	Supersedes	28	Alpha numeric LJ	Indicates whether a drawing SUPERSEDES another drawing. This data element will appear in the remarks section. This field shows the NAVSEA or contractor number of the superseded drawing.	Mandatory
11	Modified by	28	Alpha numeric LJ	Indicates whether the drawing is MODIFIED BY an associated drawing. This data element will appear in the remarks section and will show the NAVSEA or contractor number of the modifying drawing.	Mandatory

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Definitions
(mandatory)[1] – continued.

Data element No.	Data element name	Length	Format	Definition and remarks	Data entry requirements
12	Ship type	4	Alpha LJ	Identifies the ship type, such as SSN, FFG, CVA, to which the ENTIRE SDI applies, when combined with HULL NUMBER	Mandatory
13	Hull number	4	Numeric LJ	Identifies the hull number which is associated with the SDI, when combined with HULL TYPE	Mandatory
14	Remarks	56 (28x2)	Alpha numeric LJ	Contains information associated with the drawing	Mandatory
15	Security classification	1	Alpha	Identifies the Security Classification (SEC) assigned to the drawing, or any sheet within the drawing in accordance with MIL-STD-804	Mandatory
16	Nuclear indicator	1	Alpha	An "X" identifies whether the drawing pertains to a Reactor Plant Drawing (NPD) under the cog of the Reactor Plant Planning Yard	Mandatory
17	SRD indicator	1	Alpha	An "R" identifies whether the drawing is a Selected Record Drawing (SRD)	Mandatory
18	Number of sheets	4	Numeric RJ	Indicates the total number of drawing sheets, using leading zeros	Mandatory

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Definitions
(mandatory)[1] – continued.

Data element No.	Data element name	Length	Format	Definition and remarks	Data entry requirements
19	Non-deviation	1	Alpha	Identifies drawings designated by acquisition manager as non-deviation (ND): Y – Yes N – No	Mandatory
20	Subsafe	1	Alpha	SUBSAFE designated drawings (SS): S – SUBSAFE Q – Quality Assurance List (QAL) T – Does not contain QAL but specifically contains QAL items furnished on other QAL pages.	Mandatory
21	Noise control	1	Alpha	Noise control designated drawing (NC): Y – Yes N – No	Mandatory
22	Drawing type	2	Alpha	Identifies a generic grouping of drawings by function and shall conform with format of MIL-STD-804 such as CD, PL, WL.	Mandatory

[1]See 10.1 on page 43.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Definitions
(optional)[1]

Data element No.	Data element name	Length	Format	Definition and remarks	Data entry requirements
23	Functional group code	10	Alpha numeric LJ	The FGC is a discrete numbering system that will uniquely define each Functionally Significant Item (FSI). The FGC provides a top-down breakdown arrangement which any part of the ship, systems, equipments and assemblies can be addressed relative to its next higher assembly.	Optional
24	Superseded by	28	Alpha numeric LJ	Indicates whether a drawing has been SUPERSEDED BY the associated drawing. This data element will appear in the remarks section. This field shows the NAVSEA or contractor number of the superseding drawing.	Optional
25	Modifies	28	Alpha numeric LJ	Indicates whether a drawing MODIFIES another drawing. This data element will appear in the remarks section. This field shows the NAVSEA or contractor number of the modified drawing.	Optional
26	Hull class numbers	4	Numeric LJ	Identifies the hull type number as it appears in the title block of the drawing.	Optional
27	SHIPALT	17	Alpha numeric LJ	Ship Alteration Identification Number: This data element will appear in the remarks section.	Optional

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Definitions
(optional)[1] – continued.

Data element No.	Data element name	Length	Format	Definition and remarks	Data entry requirements
28	Reactor plant indicator	1	Alpha	Identifies if the drawing is a reactor plant drawing: Y – Yes N – No	Optional
29	Steam plant indicator	1	Alpha	Identifies if the drawing is a steam and electric plant drawing.	Optional
30	TVD document type	2	Alpha numeric	Identifies the generic class or type of the document described by the number, such as EN, WA, or DV.	Optional
31	TVD document number	15	Alpha numeric LJ	The full number of an associated engineering document of the type identified by the engineering document type data element	Optional
32	Acquisition responsibility	2	Alpha numeric	Identifies the organization that issues/ maintains the drawing	Optional
33	Approval category	2	Alpha numeric	Identifies the type of approval required for the drawing	Optional
34	Part/section code	2	Numeric	Identifies the type and source of the drawing	Optional
35	Design applicability drawing revision	2X No. of ships	Alpha numeric RJ	Identifies the latest revision of the drawing to which the individual ship(s) listed is intended to be built or modified	Optional

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Definitions
(optional)[1] – continued.

Data element No.	Data element name	Length	Format	Definition and remarks	Data entry requirements
36	Special coded notes	1	Numeric	Identifies a special relationship between the drawing and some other document such as SVTM, SSM, MDWG or DWG	Optional
37	System safety baseline	1	Alpha	"S" identifies whether the drawing is one of those that comprise the System Safety Baseline	Optional
38	Configuration management baseline	1	Alpha	"B" identifies whether the drawing is one of those that comprise the configuration management baseline	Optional
39	Hull "AS-IS" applicability	2x No. of ships	Alpha numeric RJ	Identifies the latest revision reflecting the "as-is" condition of an individual ship	Optional
40	TVD remarks	28	Alpha numeric LJ	Lists amplifying data/requirements pertaining to each TVD document	Optional
41	Supplemental record applicability	2x No. of ships	Alpha numeric	Identifies hulls that are applicable to the TVD	Optional
42	TVD microfilmed cards	2	Numeric	Shows the number of microfilm aperture cards for a TVD	Optional
43	Not on board	1	Alpha	Identifies a drawing that is not available (or is not available in microfilm)	Optional
44	Microfilm media	1	Alpha	Identifies whether a drawing is in microfilm (M) or microfiche (F) form.	Optional

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T15:24Z
Check the source to verify that this is the current version before use.

APPENDIX A
SDI Data Item Definitions
(optional)[1] – continued.

Data element No.	Data element name	Length	Format	Definition and remarks	Data entry requirements
45	On board location	1	Alpha numeric	Identifies planned on-board storage location for the drawing. This requires a location code table to be included in User Guidance or Instructions.	Optional
46	Command and control system (CCS) INDICATOR	1	Alpha numeric	Identifies relationship to Command and Control System (CCS): C -- Command and Control System R -- Drawing related to the Command and Control System.	Optional
47	Rights-in-data	1	Alpha	These drawings contain information that the contractor considers to be trade secrets.	Optional

[1]See 10.2 on page 43.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-M-38761/2A(SH)	23 July 1990

3. DOCUMENT TITLE

Microfilm Aperture, Tabulating Cards and Ships Drawing Indexes For

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Naval Sea Systems Command (SEA 55Z3)	(1) Commercial (703) 602-6020	(2) AUTOVON 332-6020
c. ADDRESS (Include Zip Code) Washington, DC 20362-5101	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T15:24Z
Check the source to verify that this is the current version before use.