24 June 1971
SUPERSEDING
MIL-P-43484(GL)
22 March 1967

MILITARY SPECIFICATION

PRINTING PLANT, SPECIAL WARFARE, SEMITRAILER MOUNTED

1. SCOPE

1.1 This specification covers one type self sufficient special warfare printing plant mounted in 3 semitrailer vans, together with a connecting annex.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

F-F-310	- Filter, Air Conditioning (Viscous-Impingement Type, Replaceable).
V-T-285	- Thread, Polyester.
AA-C-291	- Chairs, Folding, Metal
AA-S-700	- Stools, Filing and General Purpose, Steel.
GG-T-678	- Trimmer, Photographic, Hand, Portable.
QQ-A-200/8	- Aluminum Alloy Bar, Rod, Shapes, and Tube, Extruded, 6061 and 6062.
QQ-A-200/9	- Aluminum Alloy Bar, Rod, Shapes, and Tube, Extruded, 6063.
QQ-A-225/8	- Aluminum Alloy Bar, Rod, Wire, and Special Shapes; Rolled, Drawn, or Cold Finished, 6061.
QQ-A-250/8	- Aluminum Alloy, 5052, Plate and Sheet.
QQ-A-250/11	- Aluminum Alloy, 6061, Plate and Sheet.
QQ-S-630	- Steel, Bar, Carbon, Hot Rolled, (Merchant Quality).
QQ-S-634	- Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-S-698	- Steel, Sheet and Strip, Low Carbon.
QQ-S-763	- Steel Bars, Shapes, and Forgings - Corrosion Resisting.
QQ-S-766	- Steel Plates, Sheets, and Strip - Corrosion Resisting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

RR-C-114 - Can, Flammable Waste.
RR-C-271 - Chains, and Attachments, Welded, Weldless, and Roller Chain.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-P-664 - Primer, Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
WW-P-406 - Pipe, Steel (Seamless and Welded (For Ordinary Use).
AAA-S-121 - Scales, Weighing, General Specifications For.
MMM-A-121 - Adhesive, Bonding, Vulcanized, Synthetic Rubber to Steel.
PPP-T-60 - Tape, Pressure-Sensitive Adhesive, Waterproof, For Packaging.
PPP-B-621 - Box, Wood, Nailed and Lock-Corner.

MILITARY

MIL-P-116 - Preservation, Methods Of.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-B-131 - Barrier Material, Water Vaporproof, Flexible.
MIL-V-173 - Varnish, Moisture-And-Fungus-Resistant (For the Treatment of Communications, Electronic, and Associated Electrical Equipment).
MIL-C-496 - Clips, End, Strap.
MIL-P-514 - Plates, Identification, Transportation - Data and Blank.
MIL-W-530 - Webbing and Tape, Textile, Cotton, General Purpose, Natural or in colors.
MIL-B-543 - Buckles, Tongueless and Web Strap.
MIL-H-639 - Hooks (For Belts, Straps, and Equipage Items).
MIL-D-3464 - Dessicants, Activated, Bagged, Packaging Use and Static Dehumidification.
MIL-R-5001 - Rubber, Latex Foam Sponge.
MIL-W-6110 - Wood, Determination of Moisture Content Of.
MIL-G-16491 - Grommet, Metallic.
MIL-E-20652 - Eyelets, Metallic, With Washers.
MIL-C-20696 - Cloth, Coated, Nylon, Water-Proof.
MIL-F-21840 - Fastener Tape, Hook and Pile, Nylon.
MIL-P-43478 - Printing Plant, Annex, Special Warfare, Semi-Trailer Mounted.
MIL-C-43480 - Camera, Copying, Lithographic Process, Overhead, Darkroom Type, 11 by 14 inches.
MIL-E-52031 - Extinguisher, Fire, Vaporizing-Liquid; CF_3 BR; 2-3/4 Pound, With Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams and Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-281 - Automobile, Trucks, Truck-Tractors, Trailers and Trailer Dollies, Preservation and Packing Of.
MIL-STD-461 - Electromagnetic Interference Characteristics, Requirements for Equipment.
MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement Of.
MS 20257 - Hinge, Continuous.
MS 20365 - Nut, Self Locking, 250 Deg. F.
MS 20426 - Rivet, Solid, Counter Sunk 100 Degrees, Precision Head, Aluminum and Aluminum Alloy.
MS 20470 - Rivet, Solid-Universal Head, Aluminum and Aluminum Alloy.
MS 20600 - Rivet, Blind, Structural Pull Stem, Self-Plugging, Protruding Head Type.
MS 20601 - Rivet, Blind, Self-Plugging, 100 Degree Flush Head, Type II, Class 2.
MS 35058 - Switches, Toggle, Single Pole, One-Hole Mounting.
MS 35333 - Washer, Lock, Flat, Internal Tooth.

DRAWINGS

ARMY NATICK LABORATORIES

6-1-5106 - Printing Plant, Special Warfare, Semi-Trailer Mounted; Drawing List.

(Miniature copies of drawings 6-1-1700, 6-1-5009, 6-1-5011, and 6-1-5014, identified as figures 1 through 4 respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H-28 - Screw Thread Standards for Federal Services

UNITED STATES DEPARTMENT OF COMMERCE

Commercial Standard CS45 - Douglas Fir Plywood

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

AMERICAN SOCIETY FOR TESTING MATERIALS (ASTM)

47 - Steel For Bridges and Buildings
D2016-65 - Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

NATIONAL FIRE PROTECTION ASSOCIATION, INTERNATIONAL (NFPA).

National Electrical Code - No. 70

(Application for copies should be addressed to the National Fire Protection Association, International, 60 Batterymarch Street, Boston, Mass. 02110.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- When specified, (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2, 6.2, and 6.3).

3.2 Alternate components.- Components offered as equivalent to components specified hereinafter and on the referenced drawings as a specific manufacturer's part number or equal shall be functionally equal to the manufacturer's part number identified and of equal or better quality. The incorporation and inclusion of such a component in the design of the specified end product shall not require modification or change to any other specified component, and shall not reduce ease of maintenance to it or any other components, unless such

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

modification or change is specifically approved by the contracting officer. Prior to manufacture of the first article or if none, the initial production unit, the supplier shall submit for the contracting officer's approval, a list identifying each proposed alternate component, together with proof that each listed component complies with requirements specified above. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of manufacture of the first article or initial production unit, as applicable, but does not relieve the supplier of responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

3.3 Major assemblies.- The semi-trailer mounted special warfare printing plant, hereafter referred to as "printing plant" shall consist of the major assemblies indicated in table I (see 4.4.5).

TABLE I.- Major assemblies

Quantity	Nomenclature	
1	Camera and platemaking van	3.4.1.1
1	Editorial van	3.4.1.2
1	Press van	3.4.1.3
1	Connecting annex	3.4.1.4

3.4 Design.- The printing plant shall conform to the design, details and dimensions shown on the drawings listed on Drawing 6-1-5106. When modifications to the items identified by a manufacturer's model or part number, or equal, and Government furnished property are required, those modifications shall be as shown on the applicable drawings.

3.4.1 Semitrailer vans.- The semitrailer vans used to house various components of the printing plant shall be three-M146C Government furnished semitrailer vans (shop) (see table III), equipped and adapted by the contractor for printing and necessary supporting operations in accordance with the referenced drawings. The completely equipped semitrailers shall be hereinafter referred to as the editorial van, camera and platemaking van, and press van. Each van shall be equipped with an independent heating, air conditioning, and humidification system; a water supply, distribution and water drainage system; electric power distribution system for 120/208 volts A.C., 3 phase, 4 wire power source; external tool box; lighting, storage cabinets, work benches, stools, and all other equipment shown on the drawings and specified herein (see 4.4.3).

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.

3.4.1.1 Camera and platemaking van.- The camera and platemaking van shall be partitioned and equipped as shown on Drawing 6-1-5014. The forward section darkroom area is used for process photography as associated with the platemaking operation. The water storage tank, pressure tank and pump for the entire printing plant water system is located within the darkroom area. The central portion of the van houses the various items of supporting equipment required to complete the platemaking operations. The rear section is for handling, storage, and conditioning of up to 24 rolls of paper during the printing plant operation. Under travel conditions, the rear section is utilized for storage of 6 rolls of paper in addition to components of the dismantled connecting annex (see 3.4.1.4).

3.4.1.2 Editorial van.- The editorial van shall be partitioned and equipped as shown on Drawing 6-1-5011. The forward section is for use in composing and editorial work associated with the printing plant operation. The rear section is for handling, storage, and conditioning of up to 24 rolls of paper during the printing plant operation. Under travel conditions, the rear section is utilized for storage of 6 rolls of paper in addition to various components of the dismantled connecting annex (see 3.4.1.4).

3.4.1.3 Press van.- The press van shall be equipped as shown on Drawing 6-1-5009. The rear central portion of this van is occupied by a web-fed, rotary, offset printing press. The motor generator unit for this press is located against the front wall of the van. An offset duplicating machine is located at the front of the roadside portion of the van. The remaining area is occupied by various items of supporting equipment necessary for printing press and duplicating machine operations.

3.4.1.4 Connecting printing plant annex.- The connecting annex shall be a portable, fabric covered and lightproof, height adjustable, platform type shelter conforming to MIL-P-43478. During printing plant operation, the connecting printing plant annex is used as a passageway for personnel, equipment, and supplies from one van to another; as a loading and unloading platform, and for temporary storage of equipment and supplies, as required.

3.5 Materials and components.- Materials and components shall conform to the specified requirements of referenced specifications, standards, and requirements specified herein and on the applicable drawings. Selection of materials and components not specifically defined shall be left to the discretion of the supplier provided the completed printing plant complies with all the provisions of this specification.

3.5.1 Components.-

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.

3.5.1.1 Padlocks.- The padlock and keys for the exterior tool box of each van shall be a duplicate of the padlocks and keys supplied on the Government furnished van (see table III). Each tool box padlock shall be furnished with an attached clevis and chain and 2 keys.

3.5.1.2 Component description.- Due to space limitations on the various drawings, table II has been included herewith to provide a complete description of certain components of the printing plant, not completely defined on the drawings. Components not included in table II shall conform to the requirements shown on the drawings or as defined elsewhere herein.

3.5.1.3 Chair, folding (steel).- Chairs shall be gray in color and conform to type I, style A, class 1 of AA-C-291.

3.5.1.4 Stool, general purpose, steel.- Stools shall be gray in color and conform to type II, size 1 of AA-S-700.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

TABLE II.- Component description

Item	Description	Location: Press van	Location: C&P van	Location: Ed. van
Air conditioner	Cooling capacity - 36,000 BTU/Hr at 115 F; Heating capacity - 40,980 BTU/Hr (12 KW); Reheat capacity - 20,490 BTU/Hr; Humidification capacity - 39,000 grains/hour. Design to maintain the following conditions within the semi-trailer vans: Cooling - 78 F. (plus or minus 3 F) with 50 percent relative humidity ± 5 percent. Heating - 78 F. (plus or minus 3 F) with 50 percent relative humidity ± 5 percent. Ambient operating temperature - minus 35 F. to plus 115 F. Airflow Co. No. SAC-FS-36-S2, or equal.	X	X	X
Bulletin board	Bulletin Board, 20 x 30 inches, cork composition surface and oak frame, Arthur Brown No. 95110 or equal (see Drawing 6-1-5081)	X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

TABLE II.- Component description (cont'd)

Item	Description	Location: Press van	Location: C&P van	Location: Ed. van
Composing machine, photoprinting type	Machine, composing; photoprinting type; dial operated; single line copy; changeable type discs; automatic exposure timing; table model; for 35 mm paper and film; external, automatic processing unit. Varityper Corp., Model No. 80 composing machine and Model No. 85 processing unit, or equal. Typemaster shall be furnished in the quantity, style, size, and language specified in the contract or order (see 6.2).			X
Plunger can	Plunger can and holder, Addressograph Multigraph Corp. No. A-120-6400-AS or equal	X		
Safelight, darkroom	Safelight, darkroom, photographic, swivel bracket for wall, ceiling, or brick mounting; for use with 5-1/2 inch diameter filter equipped with in-line switch and plug cap. Two (2) each units shall be furnished equipped with 15 watt frosted, medium screw, 115 volt incandescent lamps. Wratten series OA greenish-yellow filters and Wratten series red filters. Eastman Kodak 2-way safelight Model A or equal		X	
Varigraph	Varigraph production outfit with composing table complete. Varigraph Co. or equal			X

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:31Z
Check the source to verify that this is the current version before use.

TABLE II.- Component description (cont'd)

Item	Description	Location: Press van	Location: C&P van	Location: Ed. van
Composing machine, changeable type, font style	Machine, composing, Varityper; changeable-type fonts; differential letter spacing (A, B, C, and D); automatic two way vertical loading attachment (one half point graduation); line length signal light; carbon paper ribbon mechanism; gunsight pointer on easyread plotting scale; centering scale; calibrated plotting scale rack; print and nonprint mechanism; electric keyboard; powered carriage return; 115 volt, 60 Hz single phase. Varityper Corporation Model 1010 or equal. Type fonts shall be furnished in the quantity, style no., point size, horizontal spacing, and language specified in contract or order (see 6.2).			X
Light viewing	Darkroom inspection lights size 18 x 20 x 10 inches - white 15W fluorescent lights. NuArc DLV 200 or equal (see Drawing 6-1-5104-63-1)		X	
Camera, copying	Camera, copying, lithographic process, Overhead, Darkroom Type, 11 by 14 inches; with vacuum pump and motor. MIL-C-43480		X	
Table, line-up and register	Table, line-up and register; light top table; replaceable clear glass top; protected plastic light diffuser with insulating airspace; table top adjustable from 0 to 45 degrees of tilt with positive screw lock both sides fluorescent light replaceable by front panel removal; one-piece welded construction; adjustable stainless steel straight edges; knee room design working area 25 inches wide by 21 inches deep (front to back); 36 inches high; overall dimensions approximately 29 inches wide by 25 inches deep. Leedal Catalog No. 41-T or equal		X	

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-21T21:31Z
Check the source to verify that this is the current version before use.

TABLE II.- Component description (cont'd)

Item	Description	Location: Press van	Location: C&P van	Location: Ed. van
Timer	Timer, Dimco-Gray Co. Model 300 or equal: minute and second timing from 1 second to 60 minutes; 8 inch diameter dial; luminous hands and numerals; focus-time switch and buzzer alarm (see Drawing 6-1-5109-59-1)		X	
Mixer	Mixer, kneading, laboratory; 5 quart capacity; three speed selective transmission; with two dough hooks; two bowls. The Hobart Mfg. Co. Model No. N-50, or equal	X		
Duplicating machine	Offset process, 10-1/2 by 16-1/2 inches image area: with center blower, centrifugal clutch, single level ink control, four feeler fingers, light fixture, auxiliary vibrator roller, oscillating repelex rider roller, receding stacker; set of 3 chrome plated cylinders including wide blanket and parts for feeding 17 inch long paper; chrome plated master cylinder with fixed pin bar clamp and trailing pin plate with compensating chrome plated impression cylinder; frame assembly for receding stacker and slitting unit. Addressograph-Multigraph Corp., No. 1250 LW, or equal.	X		
Dryer, film	Film dryer, table top model. Approximately 11-1/4 inches wide by 17-7/8 inches deep by 35-3/4 inches high. Oscar Fisher Co., Inc., Model No. 17301, or equal		X	

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:31Z
Check the source to verify that this is the current version before use.

TABLE II.- Component description (cont'd)

Item	Description	Location: Press van	Location: C&P van	Location: Ed. van
Cleaner, vacuum	Cleaner, vacuum; hand type; with exposed separator; with blower outlet; 132 cu. ft. per min. suction air volume (1-1/2 inch hose) 20,700 feet per min. blowing air velocity (at nozzle). Attachments: one each dust proof bag, brush, inlet hose connection, 4 ft. lg. flexible hose, metal nozzle, plastic nozzle, shoulder strap. AC/DC, 60 Hz, single phase, 2/3 HP motor. Ideal Industries, Inc. Model No. 22-113, or equal		X	
File cabinet	Shaw Walker Company No. V1271F file cabinet w/7629 box drawers in top opening or equal			X
Roller cleaner	Roller cleaner, table model, 38 inch nominal size, 115 volt, 60 Hz, single phase	X		

	Inches (nominal)
Length	60
Height, front	12
Height, rear	12
Width	16
Length between bumper plates	38
Drain size	1/2
Minimum diameter roller	3/4
Maximum diameter roller	2-3/4
Jomac, Inc., or equal	

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-21T21:31Z
Check the source to verify that this is the current version before use.

TABLE II.- Component description (cont'd)

Item	Description	Location: Press van	Location: C&P van	Location: Ed. van
Scale, dial indicating	Scale, dial and beam indicating; 10 lbs weighing capacity. Dial data - straight face type, avoirdupois system, 0 to 10 lbs. range, .01 lb. maximum value of interval of graduation. Beam data - avoirdupois system, 0 to 1 lb. range, .01 lb. maximum value of interval of graduation. Platform type, with tare bar; pendulum type dial mechanism; with counterpoise weights, 5 lb., 2 lb. and 1 lb; with dash pot oil can and service manual, scale lock and unlock device. Tower and dial set at 45 degree angle. AAA-S-121	X		
Typewriter	Typewriter, nonportable, completely electric; 13 inch carriage; elite type; upper-case and lower-case characters; American Standard Keyboard, 42 to 44 character keys			
Heater, water	Heater, water, electric, glass lined tank, 6 gal capacity 1000 watt heater, 118 volt, 60 Hz, single phase, Mor-Flo Industries, Inc. Model S6, or equal	X	X	
Temperature control	Temperature control unit, photographic processing, FH-6B (FSN 6740-880-5553) modified per applicable drawing and circulating pump, Oscar Fisher Model GR-1 or equal		X	
Hoist	Chisholm-Moore Hoist Div, Columbus McKinnon Corp or equal; furnished without hooks and rigging lug but modified per applicable drawings		X	X

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:31Z
Check the source to verify that this is the current version before use.

TABLE II.- Component description (cont'd)

Item	Description	Location		
		Press van	C&P van	Ed. van
Plate whirler	Plate whirler, bench type, Douthitt Corp Model MDP 12 x 16 inches or equal, but modified per applicable drawing		X	
Water pump and tank	Pump and tank, 300 GPH shallow well type, Sears Roebuck 259,551 or equal		X	
Platemaker	Platemaker with base, NuArc Company No. FT18A or equal		X	
Can, flammable waste	Can, flammable waste, 10 gal size, Type I of RR-C-114	X	X	
Film storage cabinet	Model BCH 20V, with 1/5 HP, 1750 BTU 115 volt, 60 Hz, Evaporation Temperature + 45 degrees, Bendix Westinghouse or equal		X	

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-21T21:31Z
Check the source to verify that this is the current version before use.

3.5.2 Government furnished components.- The components in table III will be furnished by the Government and shall form a part of the printing plant (see 6.2 and 6.4).

TABLE III.- Government furnished components

Nomenclature	Location		
	Press van	C&P van	Ed. van
Semitrailer, van: shop, 6-ton, 2 wheel, M146C, MIL-S-45311 complete with padlocks --	X	X	X
First aid kit, general purpose, 12 unit (see 6.4)	X	X	X
Extinguisher, fire, monobromotrifluromethane; hand type, shatterable cylinder, penetrating seal valve, 2-3/4 lbs. capacity, with mounting bracket. MIL-E-52031 (see 6.4)	X	X	X
Water conditioner, photographic ion exchange type. Overall dimensions approximate 25-1/4 inches long by 16-1/2 inches wide by 32-1/4 inches high. Type No. PH-644 UF, MIL-W-11912, (see 6.4)		X	
Printing press, offset, web-fed, for special warfare. Type I, 2-color press (1-color one side and 1-color other side of the web, or 2-colors one side of web). MIL-P-43477	X		
Paper, roll, offset, 50 pound book, white, 32 inch dia. x 16 inch wide with 3 inch dia. core, 12 each stored; 6 in C&P van and 6 in Ed. van		X	X

3.6 Construction.- Details of construction shall conform to requirements shown on the drawings and as hereinafter specified.

3.6.1 Machined components.- Machined components shall be within the dimensional tolerances established on the drawings. All rough and sharp edges shall be removed. Threaded portions shall conform to Handbook H28, for the size thread required.

3.6.2 Sheet metal components.- Sheet metal components shall be within the dimensional tolerances established on the drawings. All like bends shall be

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.

of uniform radius and unless otherwise specified on the drawings, radii shall be as small as practicable, in relation to sheet metal thickness. Bends of a major character, and embossing, when applicable, shall be accomplished using metal dies and fixtures to insure uniformity of size and shape. All exposed sheet metal edges shall be finished to remove sharp edges and burrs.

3.6.3 Riveting.- Rivet holes shall be of a diameter to insure a snug fit with the rivet shank after setting. When practicable, rivet holes shall be drilled or punched at time of assembly. Setting of rivets shall be accomplished so that mating surfaces shall be drawn tight. The rivet heads shall be in full contact with mating surfaces, concentric with the rivet shank, and rivet heads shall be free from splits, burrs, and sharp edges.

3.6.4 Welding.- The surface of parts to be welded shall be clean and free from scale, paint, grease, and foreign matter. When aluminum, corrosion resisting steel, or other ferrous metal alloy is welded, welding rod of a chemical composition compatible with the parts being welded shall be used. Welds shall be uniformly run without voids. All welding scale shall be removed after welding has been accomplished, and all projections and rough edges shall be ground smooth. Spot welds when utilized, shall be sound, smooth, and free from pits and flashes.

3.6.5 Threaded connections.- Unless otherwise specified on the drawings, threaded connections shall not be peened, staked, or otherwise deformed to prevent disassembly of the threaded components.

3.6.5.1 Pipe thread connections, water system.- A commercially available, non-hardening anti-seize thread compound shall be applied to pipe threads in the water system prior to assembly in the line.

3.6.6 Metallic pipe, and tube bending.- All pipe and tube bends, when required, shall be free from kinks, buckles, and noticeable deformation in cross section.

3.6.7 Electric wiring.- Unless otherwise shown on the various applicable drawings, electrical wiring shall comply with the provisions of the National Electrical Code (NFPA No. 70).

3.6.8 Cementing of floor surfacing.- The safety walk material shall be applied to the floor surfaces of the vans so that the surfacing is in contact with the van floor and free from air pockets or other defects indicative of incomplete bond. Surface preparation and application of adhesive and surfacing material shall be in accordance with the material manufacturer's recommendations.

3.6.9 Sight levels.- The lateral and longitudinal sight levels, mounted on the exterior and interior of each van, shall be positioned and set parallel to the shelter floor surface. When tested as specified in 4.4.4, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

position of the vial bubble of the test level and lateral and longitudinal sight levels shall correspond.

3.6.10 Water tightness.- All parts and equipment attached to the exterior surfaces of the shelters shall be caulked at the time of assembly to the shelter to prevent entrance of water at the mating surfaces. Caulking shall be accomplished by application of a commercial, nonhardening, plastic form caulking compound applied, when possible, to the mating surfaces. When tested as specified in 4.4.2, there shall be no evidence of water within the vans.

3.6.11 Electromagnetic compatibility.- The end item shall be designed and equipped for electromagnetic compatibility in accordance with class IIB of MIL-STD-461 (see 4.4.6).

3.6.12 Wood components.- Wood components, fabricated from the grade and specie of wood specified on the applicable drawings, shall have a moisture content between 8 and 12 percent at time of assembly, when tested in accordance with 4.3.2. The component parts and assembly shall be free of splits, checks, honeycombing, casehardening, knots, sap streaks, bark pockets, insect or larvae channels, and pitch pockets.

3.7 Finish.-

3.7.1 Vans, interior.- All interior surfaces of the vans shall be cleaned and rehabilitated, when necessary, to restore the original color and finish to surfaces scarred or damaged during progress of the work required by this specification.

3.7.1.1 Components.- All surfaces of components shall be prepared and primed (see 3.7.1.1.1 and 3.7.1.1.2) and enameled (see 3.7.1.1.3) on all surfaces visible after installation and during use, with exceptions as follows:

(a) Components identified by brand name, or equal, shall not be further finished provided such components have received the manufacturer's final applied enamel or plated finish.
(b) Corrosion resisting steel surfaces shall not be primed or enameled.
(c) Surfaces adversely affected by paint films shall not be primed or enameled.
(d) Exterior surfaces of electrical circuit components shall be enameled to match the interior green enamel.
(e) The fire extinguisher and first aid kit shall not be primed or enameled to obscure the characteristic color associated with the items.
(f) The wood surfaces of the drawing board and duck boards (drain boards) shall not be primed or enameled. Rifle rack shall be finished as specified on the applicable drawing.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.

3.7.1.1.1 Surface preparation.- Metal surfaces requiring paint shall be prepared for painting by any method or type of TT-C-490. All other surfaces requiring paint shall be thoroughly dry and free from dust and loose material prior to painting.

3.7.1.1.2 Priming.- After surface preparation (see 3.7.1.1.1), a primer designed for metal surfaces shall be applied to all metal surfaces prior to enameling.

3.7.1.1.3 Enameling.- After thorough drying of primer, metal and wood surfaces shall be given 2 coats of interior wall paint. The color shall match the interior color of the Government furnished vans. The first coat of enamel shall be thoroughly dry prior to application of the second coat. The finished enameled surfaces shall be uniformly coated, smooth, free from sags, excess buildup, orange peel, runs, and teardrops.

3.7.2 Shelters, exterior.- Parts and equipment attached to exterior surfaces by the supplier shall be cleaned, primed, and enameled in accordance with the supplier's regular commercial practice. The final applied finish shall match the color and gloss of the original finish of the Government furnished vans. Exterior surfaces shall be rehabilitated, when necessary, to restore the original color and finish to exterior surfaces scarred or damaged during progress of the work required by this specification.

3.8 Marking.- In addition to existing markings, each completed van shall be marked for identification in accordance with requirements hereinafter specified.

3.8.1 Van exterior.- An identification plate conforming to type IV of MIL-P-514 shall be attached to each semi-trailer van, adjacent to existing identification plates on the vans. All blank spaces on the plate shall contain the required information indented in the spaces provided. Included as information shall be the Federal Stock No. (FSN) and nomenclature of the 3 trailer printing plant, and the FSN and nomenclature of the van to which the plate is attached. Plate size may be expanded if necessary to receive all of the required data.

3.8.2 Circuit breakers, electric.- Each circuit breaker within the circuit breaker panel box shall be identified by means of a plastic or metal plate permanently lettered to identify the circuit serviced. The lettered plate shall be secured within the circuit breaker panel box in a location clearly identifying each circuit breaker.

3.9 Maintenance tools.- Maintenance tools specified (see 6.2), shall be furnished by the various equipment manufacturers with their equipment and stored within the van housing the equipment.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T21:31Z
Check the source to verify that this is the current version before use.

3.10 Performance characteristics.- The printing plant shall withstand the 100 mile road test in 4.4.1 without adversely affecting water tightness, functioning of any component, or dislocation or damage to any component, fastener, or weld. The water supply system shall withstand the 60 pounds per square inch gage (psig) hydrostatic test in 4.4.3.1 for not less than 10 minutes, without evidence of leaks. The water drainage system shall be tested as specified in 4.4.3.2 to determine that all water in the supply system can be discharged by gravity flow. The darkroom area of the camera and platemaking van and the paper storage area of the camera and platemaking van, and the editorial van, shall be light-tight to the extent that no light rays are observed through partitions, doors, or door closures, when tested in accordance with 4.4.3.3.

3.11 Workmanship.- The end item shall be clean and free from defects such as loose parts or components, rough or sharp edges, and misaligned or improperly placed components. All cabinet drawers, doors, and functioning components shall operate smoothly and without binding.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a first article is required, it shall be examined in accordance with 4.3.4 and tested in accordance with 4.4.1 through 4.4.6. The presence of any visual defect, any dimension not within specified requirements, or failure to pass any test, shall be cause for rejection of the preproduction sample.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 Testing for moisture content of wood.- The moisture content requirement in 3.6.12 shall be determined in accordance with ASTM D2016-65, at time of assembly. When testing is performed by the electric moisture meter method,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

3 determinations shall be made on each sample unit. The average of the 3 determinations shall be the moisture content of the sample unit. The lot shall be all component parts offered for inspection at one time and just prior to assembly. The sample unit shall be one component part. The inspection level shall be S-1 and the acceptable quality level (AQL) shall be 4.0, expressed in terms of defects per hundred units.

4.3.3 Process examination.- Examination shall be made at appropriate stages of manufacture to determine compliance with requirements in table IV. When noncompliance is noted, correction shall be made to affected items and process. Any failure to comply shall be cause for rejection of the items affected and the lot in process.

TABLE IV.- Process examination

Requirement	Requirement paragraph
Welding (cleaning and welding rod)	3.6.4
Pipe thread connections (application of thread compound)	3.6.5.1
Water tightness (caulking of mating surfaces)	3.6.10
Surface preparation (TT-C-490)	3.7.1.1.1
Priming (metal surfaces)	3.7.1.1.2
Enameling (2 coats)	3.7.1.1.3

4.3.4 End product inspection.-

4.3.4.1 Visual examination.- Each completely assembled printing plant shall be examined for compliance with material requirements and for defects in design, construction, workmanship, finish, dimensions, and marking; including type, make, condition and method of securing components and supplies within the appropriate van as specified in section 3. Any noncompliance noted shall be cause for rejection of the end item.

4.3.5 Testing of the end product.- Each production printing plant shall be tested in accordance with 4.4.1 through 4.4.5 with no evidence of failure. The initial production printing plant shall be tested in accordance with 4.4.6 with no evidence of failure. The test in 4.4.6 need not be repeated during the life of the contract providing subsequent printing plants are identical to the units tested and accepted.

4.3.6 Examination of preparation for delivery.- Examination shall be made to determine that preservation, packaging, packing, and marking requirements of section 5 of this specification are complied with. Any deviation from specified requirements shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

4.4 Tests.- Tests shall be performed in the sequence set forth hereinafter.

4.4.1 Road test.- Each van, with all contents including rolls of paper where applicable, secured as specified in 5.1.1.5 thru 5.1.1.5.2 shall be towed by a tractor over a 100 mile test course. The vans shall be towed at top legal speed and as road conditions permit, for this type equipment. Not less than 50 percent of the test course shall be unimproved roads such as earth or partially surfaced gravel, and the remainder shall be improved roads such as concrete, asphalt, or macadam. The test shall include not less than 20 quick starts and stops of the vehicle on grades of not less than 5 percent or greater than 10 percent. Fifty percent of the starts and stops shall be made on ascending grades and 50 percent on descending grades. Any nonconformance with water tightness or any component, fastener, or weld dislocated or damaged shall constitute failure of this test.

4.4.2 Rain test.- The printing plant shall be exposed to simulated rainfall at the rate of 3 inches, plus or minus 1 inch, per hour as measured at the surface of the equipment by a U.S. Weather Bureau type gauge. The rainfall shall be produced by means of a water spray nozzle of such design that the water shall be emitted in the form of droplets. The angle of rainfall shall be varied up to 45 degrees from vertical. The rainfall shall be dispersed uniformly over the test area within rainfall limits specified above. Each of the four sides shall be exposed to the rainfall for not less than 15 minutes for a total duration of not less than 1 hour. Each side exposure shall include exposure of the top. Any nonconformance with the requirements of 3.6.10 shall constitute failure of this test.

4.4.3 Performance.- Each completed printing plant shall be connected to a 120/208 volt A.C., 3 phase, 4-wire electric power source. Each electrical and mechanical component including the heating, air conditioning, and humidification system, shall be operated in accordance with suppliers maximum specified limits. Printed copy shall be produced as specified (see 4.4.5 and 6.2). Any nonconformance shall constitute failure of this test.

4.4.3.1 Water supply system.- With the vans levelled, the water supply system between the vans shall be interconnected. The entire system shall then be filled to capacity with a measured volume of water. All air in the system shall be displaced by water except that a normal head of air will be permitted in the water pump pressure tank. A hydrostatic pressure of not less than 60 psig shall then be developed and maintained for not less than 10 minutes to determine no leakage exists (see 3.10). Any nonconformance shall constitute failure of this test.

4.4.3.2 Water supply drainage.- After completion of the test in 4.4.3.1, and with the power supply to the water pump off, and no further water introduced, all faucets, drain valves, and drain plugs shall be opened in turn,

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.

to permit gravity drainage of the system. The water supply interconnection between vans shall also be disconnected or drained free of water. All water discharged shall be collected in containers and the total volume noted. Any discrepancy between the volume of water collected and the volume of water introduced (see 4.4.3.1) shall constitute failure of this test (see 3.10).

4.4.3.3 Light-tightness.- The darkroom area of the camera and platemaking van shall be tested by having an inspector, with normal vision, stand in the darkened darkroom area with the passage door closed and all lights on in the remainder of the van. The partitions and doors between the paper storage area and normal work area of the camera and platemaking van, and the editorial van, shall be tested by having the inspector stand in the darkened paper storage area, with passage and exit doors closed, and all lights on in the remainder of the van. Any visible evidence of light penetration from any source, shall constitute noncompliance with the light-tightness requirement in 3.10.

4.4.4 Sight levels.- Settings of exterior lateral and longitudinal sight levels shall be checked for compliance with 3.6.9 using an 18 inch carpenter's level, with a properly set vial, as follows:

a. The setting of the lateral sight levels shall be checked with the carpenter's level placed over the lateral centerline of the interior floor surface with the vial over the intersection of the lateral and longitudinal centerlines.

b. The setting of the longitudinal sight levels shall be checked with the carpenter's level placed over the longitudinal centerline of the interior floor surface, with the vial of the level over the intersection of the longitudinal and lateral centerlines.

Any nonconformance shall constitute failure of this test.

4.4.5 Operational test.- Each printing plant, including all the items shown in table I, shall be completely assembled and operated as a unit to verify compliance with all requirements of this specification. The supplier shall furnish all necessary equipment, supplies, personnel, facilities, materials, incidental services and supporting equipment needed to perform tests on each printing plant. The text of material to be printed and the color of impressions shall be as specified (see 6.2). Failure of any item to assemble, interconnect, or operate as specified shall constitute failure of this test.

4.4.6 Electromagnetic compatibility test.- The initial unit of production shall be tested by the supplier in accordance with test methods CE03 and RE02

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.

of MIL-STD-462. The Government reserves the right to witness tests performed by the supplier or an independent testing agency. The supplier shall furnish the contracting officer written certification that the Interference Control Plan, the EMI/EMC Test Plan, the Electromagnetic Test Report and the requirements meet MIL-STD-461 (see 3.6.11).

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A.

5.1.1 Level A.-

5.1.1.1 Draining.- All water bearing vessels, including piping, valves, pumps, etc., except the ionic water conditioning unit, shall be drained and dried, with dried compressed air and the drains closed or sealed.

5.1.1.2 Cleaning.- All uncoated exposed surfaces, including surfaces covered by removable covers, shall be cleaned process C-1 of MIL-P-116.

5.1.1.3 Preservation.- Spare parts, tools, and accessories, cleaned as specified in 5.1.1.2, shall be preserved method I of MIL-P-116. All cleaned surfaces, except corrosion resisting steel, brake drums and V-belt pulleys, of the following components shall be coated with preservative conforming to configuration G or L of type P-7 of MIL-P-116:

a. Web-fed, two-color offset printing press
b. Duplicator
c. Ink and water dampener rollers
d. Scale
e. Mixer
f. Generator
g. Stools
h. Typewriter (very light coating of preservative)
i. Composing machine (very light coating of preservative)
j. Pivots and locks of the platemaker
k. Line up and register table
l. Light top table
m. Track, rollers and locking devices of the plate camera

The V-belts shall be removed from all ferrous metal pulleys on the web-fed, two-color offset printing press, the air conditioners, and the roller cleaner. The pulleys and brake drum shall be coated with primer conforming to TT-P-664, the primer dried and the belts replaced.

5.1.1.4 Lubrication.- All bearings shall be lubricated to capacity with the manufacturer's lubricant containing a rust inhibitor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

5.1.1.5 Packaging.- Spare parts, tools, and accessories shall be packaged in snug-fitting boxes conforming to class 1, style 4 of PPP-B-621. The gross weight of each box shall not exceed 100 pounds.

5.1.1.5.1 Securing.- The ink, paper stops, paper blocks and chains, and the hoist chains shall be secured with tape conforming to class 1 of PPP-T-60. The stools, electric cables, ladders and hoist, shall be secured with the means provided. The paper roll shafting, rear covers, cranks, and the top of the cleaning tank shall be secured with annealed wire. The web-fed press brake counter balance weight, packaged spare parts and tools, quartz line lights and the camera shall be provided with wood blocking and bracing that shall prevent movement or damage while in transit. Wood blocking and bracing shall not bear against trailer sides or components susceptible to damage. The tops of the line up and register, light top tables, and vacuum plate maker shall be crisscrossed with tape, the tops secured, covered with corrugated fiberboard and the fiberboard secured to the tops. Cushioning material shall be used as required to prevent damage to finished surfaces and to protect fragile items. The covers shall be placed over the composing machines and typewriter.

5.1.1.5.2 Connecting annex.- The connecting annex shall be dismantled. The connecting annex cover shall be compactly folded, with the location markings on the roof and the erection instruction label exposed, placed within the cover provided, and the cover secured with the rope ties. The dismantled annex shall be placed within the vans and secured with means provided.

5.1.1.6 Desiccant.- Desiccant shall be in accordance with MIL-D-3464. Unit quantity per bag shall be 80 units. After the components of each trailer unit have been preserved and packaged as specified in 5.1, and just prior to sealing as specified in 5.1.1.7, the desiccant shall be placed as follows:

(a) Sixteen bags (8 around the web-fed, two-color offset printing press, 2 within the generator compaetment, and 6 throughout the trailer) shall be placed and secured within the interior of the printing press trailer.
(b) Five bags shall be placed and secured within the interior of the editorial trailer with an additional one under each of the three composing machines and the typewriter.
(c) Sixteen bags (10 in the darkroom, 4 in the compartment with the line up and register table, and 2 in the aft compartment), shall be placed and secured within the camera and platemaker trailer. One bag shall be placed in the fan compartment of each air conditioner. Bare metal surfaces, which may come in contact with the bagged desiccant, shall be separated by a sheet of barrier material conforming to grade A of MIL-B-121.

5.1.1.7 Sealing.- Barrier material and tape specified herein shall conform to MIL-B-131 and class 1 of PPP-T-60, respectively. Immediately after

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:31Z
Check the source to verify that this is the current version before use.

application of desiccant, each composing machine and typewriter shall be covered with barrier material, and the barrier material sealed to the bench with tape. All doors of each trailer shall be locked with padlock provided and all openings into the trailer sealed with minimum 3-inch wide tape. Openings (such as fan compartment of the air conditioners and louvers) too large to seal with tape, shall be sealed with a combination of barrier material and tape. The exterior tool box shall be padlocked. Stickers shall be placed in a conspicuous place on all doors to indicate that the trailer contains desiccant.

5.1.1.8 Exterior of each trailer including running and landing gear.- Each trailer shall be preserved in accordance with the applicable requirements for level B (Mobile) of MIL-STD-281.

5.2 Marking.- In addition to any special marking required in the contract or order, each trailer shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The printing plant is intended for use in tactical situations where early and rapid distribution of leaflets, based on timely intelligence, will psychologically affect the immediate attitude and behavior of the enemy soldier in a manner detrimental to his war effort. Each van has been designed to maintain temperatures within the range between 65 F. and 75 F., and relative humidity at 50 percent, plus or minus 5 percent, when ambient conditions range from minus 25 F. to plus 115 F.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.1, 4.2, and 6.3).
(c) Quantity, style, size, point, horizontal spacing and language font required for composing machines (see table II).
(d) Source and delivery of Government furnished property and components as applicable (see table III).
(e) Maintenance tools required (see 3.9).
(f) Text of material to be printed and ink color (see 4.4.3 and 4.4.5).

6.2.1 Contract data requirements.- Any requirements for equipment manuals and publications for the items covered by this specification should be included in DD Form 1423 and cited in the contract.

6.3 First article.- When a first article is required, it should be inspected and approved under the appropriate provisions of ASPR 7-104.55. The

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.

first article should be an initial production item. The first article should consist of one (1) completely assembled and finished printing plant including all major assemblies as shown in table I and in complete operational readiness. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Identification of Government furnished components.- The following components listed in table III may be identified by the Federal Stock Number (FSN) listed below:

Component	FSN
First aid kit	6545-922-1200
Extinguisher, fire	4210-555-8837
Water conditioner	6740-356-5397

Custodian:

Army - GL

Review activity:


Army - WC, MD, ME

Preparing activity:

Army - GL

Project No. 3610-A207

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

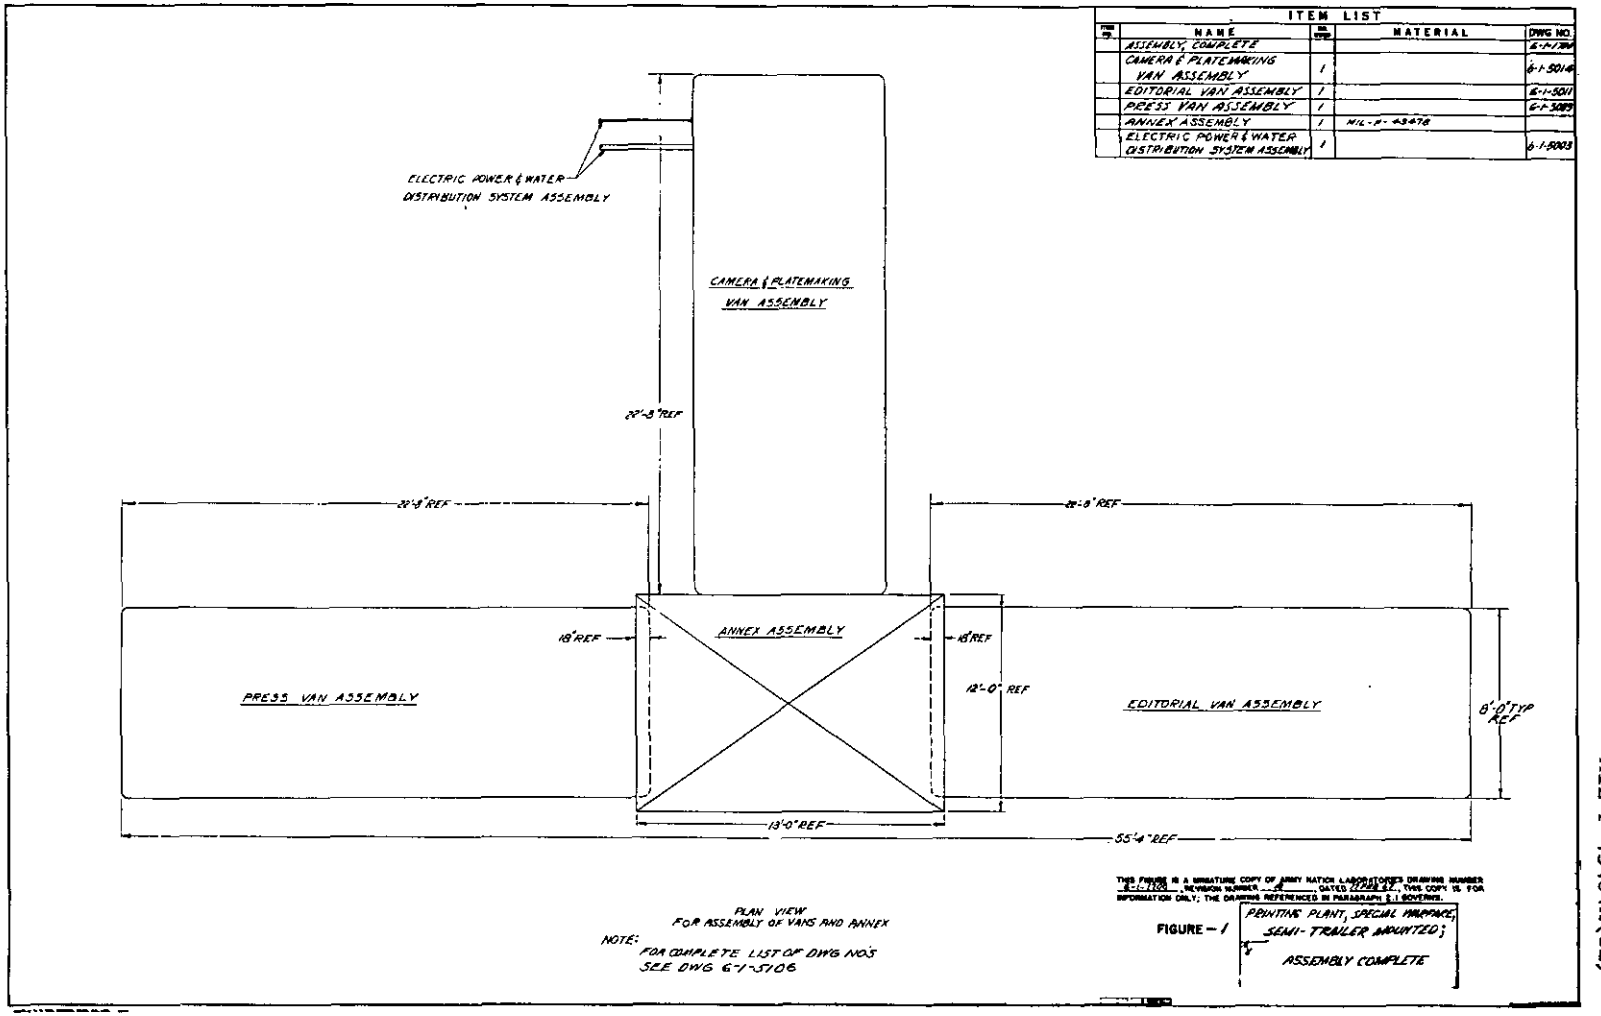


PLAN VIEW
FOR ASSEMBLY OF VANS AND ANNEX

NOTE:
FOR COMPLETE LIST OF DWG NOS
SEE DWG 6-1-5106

THIS FIGURE IS A MINIATURE COPY OF ARMY MATICK LABORATORIES DRAWING NUMBER 6-1-5106, REVISION NUMBER -A-, DATED 17 FEB 61. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE – 1 PRINTING PLANT, SPECIAL PURPOSE, SEMI-TRAILER MOUNTED; ASSEMBLY COMPLETE

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:31Z
Check the source to verify that this is the current version before use.

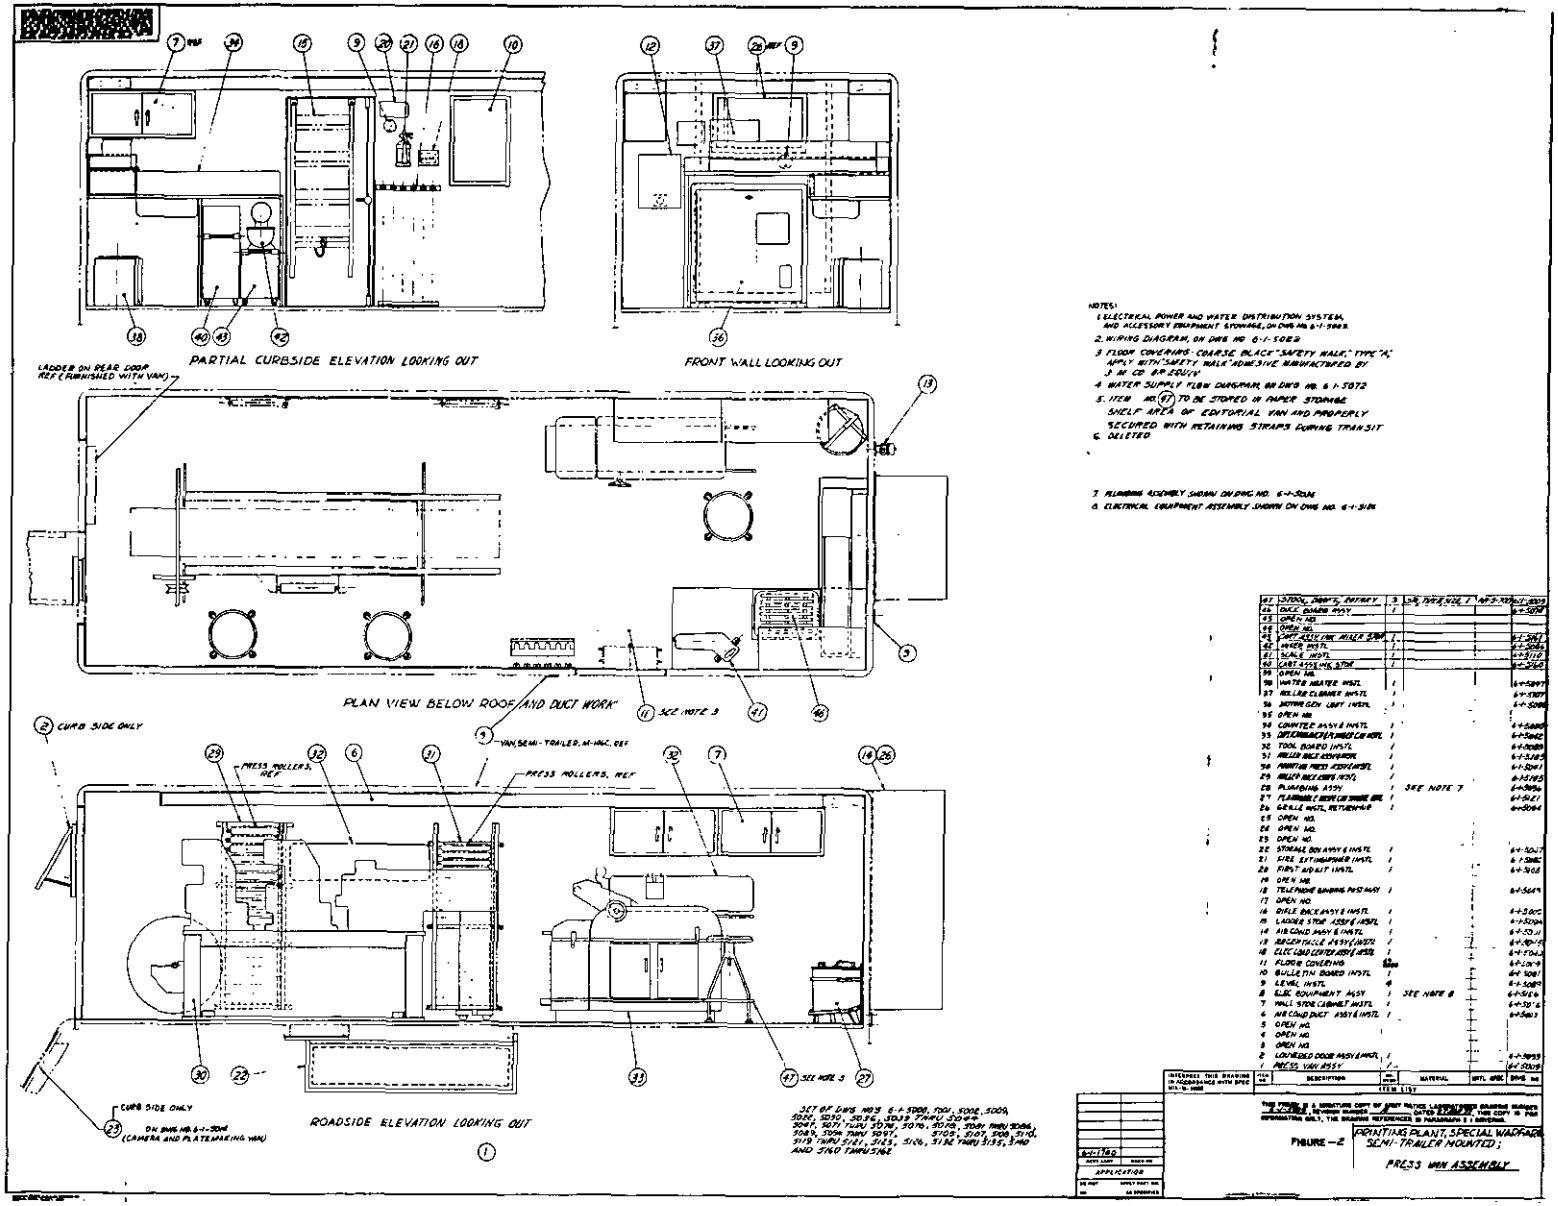

NOTES:
1. ELECTRICAL POWER AND WATER DISTRIBUTION SYSTEM, AND ACCESSORY EQUIPMENT STOWAGE, ON DWG NO. 6-1-5003.
2. WIRING DIAGRAM, ON DWG NO. 6-1-5003
3. FLOOR COVERING: COARSE BLACK "SAFETY WALK," TYPE "A," APPLY WITH "SAFETY WALK" ADHESIVE MANUFACTURED BY 3M CO. OR EQUAL.
4. WATER SUPPLY FLOW DIAGRAM, ON DWG NO. 6-1-5012
5. ITEM NO. (47) TO BE STORED IN PAPER STOWAGE SHELF AREA OF EDITORIAL VAN AND PROPERLY SECURED WITH RETAINING STRAPS DURING TRANSIT
6. DELETED
7. PLUMBING ASSEMBLY SHOWN ON DWG NO. 6-1-5006
8. ELECTRICAL EQUIPMENT ASSEMBLY SHOWN ON DWG NO. 6-1-5006

ITEM NO.	DESIGNATION	QTY	MATERIAL
47	(2000) SHEET, PAPER	3	
46	DOOR ASSY	1	
45	OPEN NO.		
44	OPEN NO.		
43	CHART ASSY (INC. MILES STAR)	1	
42	MIXER INSTL	1	
41	SCALE INSTL	1	
40	CART ASSY (INC. STAR)	1	
39	OPEN NO.		
38	WATER HEATER INSTL	1	
37	ROLLER CLEANER INSTL	1	
36	MOTOR GEN UNIT INSTL	1	
35	OPEN NO.		
34	COUNTER ASSY & INSTL	1	
33	LIFT CHARGER/PLATEMAKER CABINET	1	
32	TOOL BOARD INSTL	1	
31	ROLLER RACK ASSEMBLY	1	
30	PRINTING TEST EQUIPMENT	1	
29	ROLLER RACK CURVE INSTL	1	
28	PLUMBING ASSY	1	SEE NOTE 7
27	PLATEMAKER DOOR CURTAIN ASSY	1	
26	GRILLE INSTL, RETURN AIR	1	
25	OPEN NO.		
24	OPEN NO.		
23	OPEN NO.		
22	STORAGE BOX ASSY & INSTL	1	
21	FIRE EXTINGUISHER INSTL	1	
20	FIRST AID KIT INSTL	1	
19	OPEN NO.		
18	TELEPHONE BANDING INSTALL	1	
17	OPEN NO.		
16	RIFLE RACK ASSY & INSTL	1	
15	LADDER STOR. ASSY & INSTL	1	
14	AIR COND ASSY & INSTL	1	
13	RINGER FILLE ASSY (INSTL)	1	
12	ELEC LOAD CENTER ASSY & INSTL	1	
11	FLOOR COVERING	1 Lot	
10	BULLETIN BOARD INSTL	1	
9	LEVEL INSTL	4	
8	ELEC EQUIPMENT ASSY	1	SEE NOTE 8
7	WALL STOR CABINET INSTL	1	
6	AIR COND DUCT ASSY & INSTL	1	
5	OPEN NO.		
4	OPEN NO.		
3	OPEN NO.		
2	LOUVERED DOOR ASSY & INSTL	1	
1	PRESS VAN ASSY	1	


SET OF DWGS NO'S 6-1-5000, 5001, 5002, 5003, 5004, 5010, 5015, 5030 THRU 5035, 5041, 5071 THRU 5076, 5078, 5079, 5098, 5099, 5084, 5089, 5094 THRU 5097, 5118 THRU 5121, 5123, 5126, 5132 THRU 5135, 5140 AND 5160 THRU 5162

6-1-1160

APPLICATION

FIGURE -2 PRINTING PLANT, SPECIAL WARFARE, SEMI-TRAILER MOUNTED; PRESS VAN ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

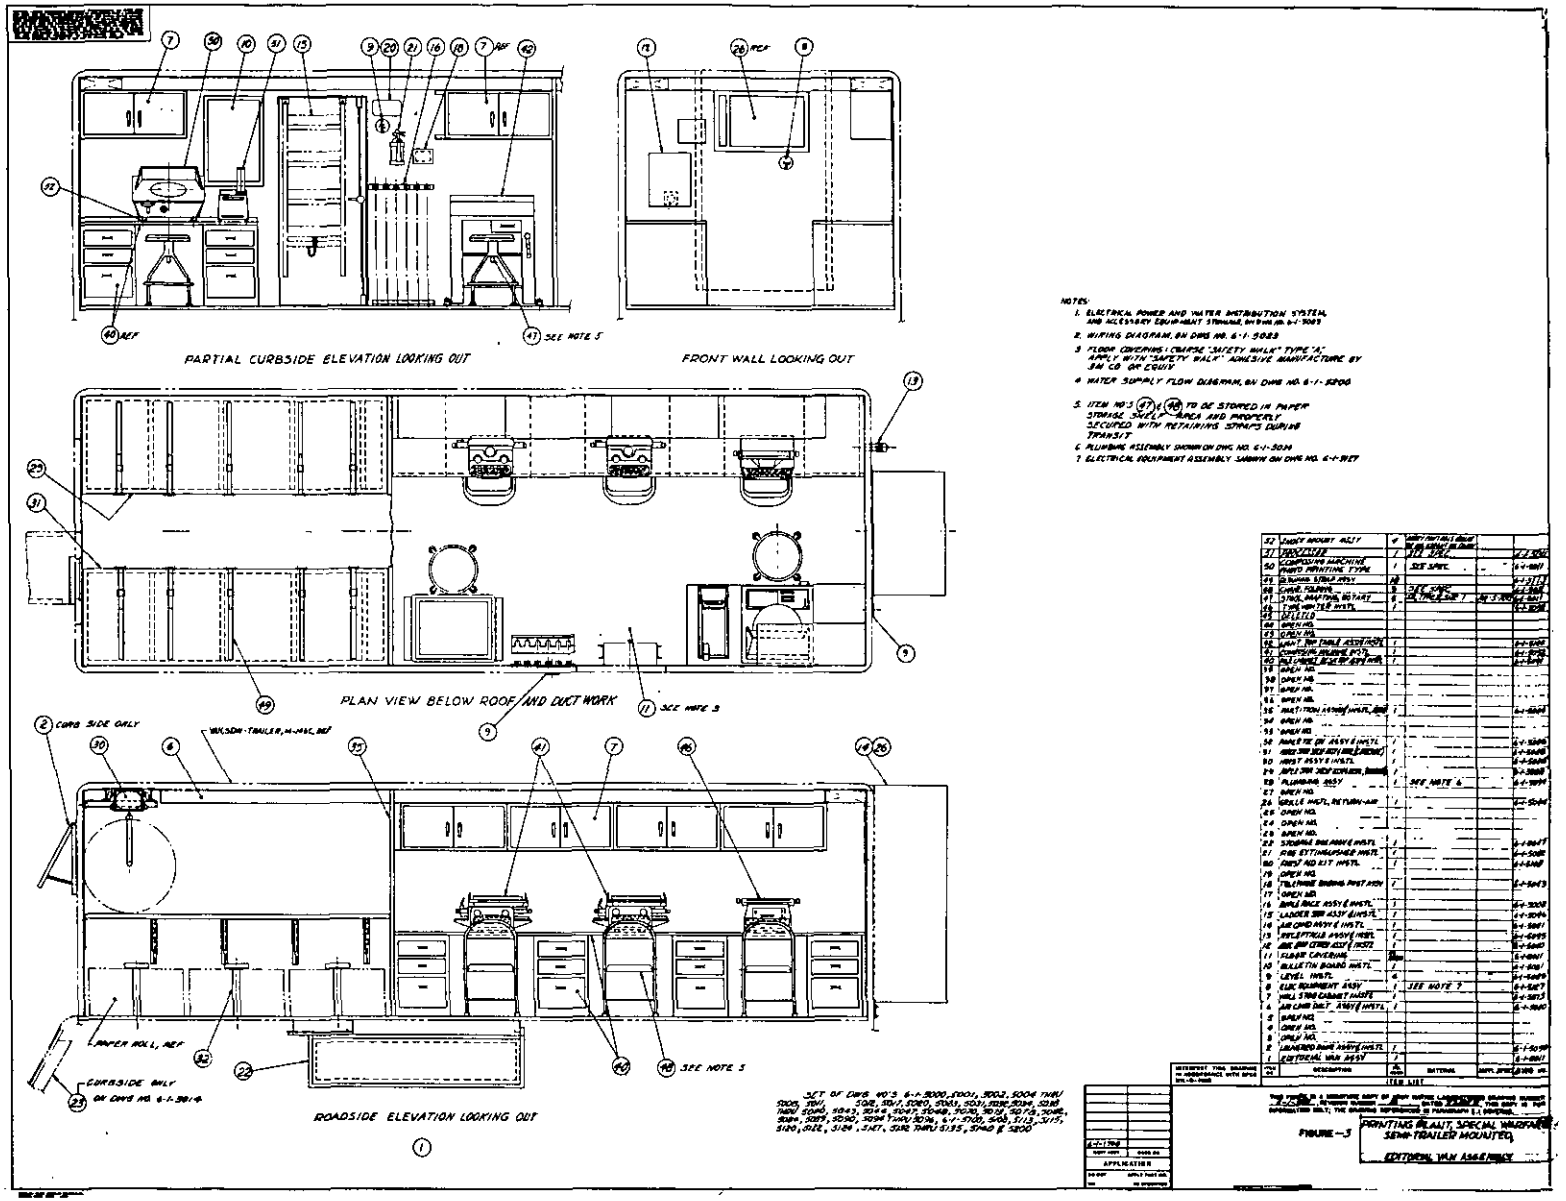

MIL-P-43484A(GL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-158/12871

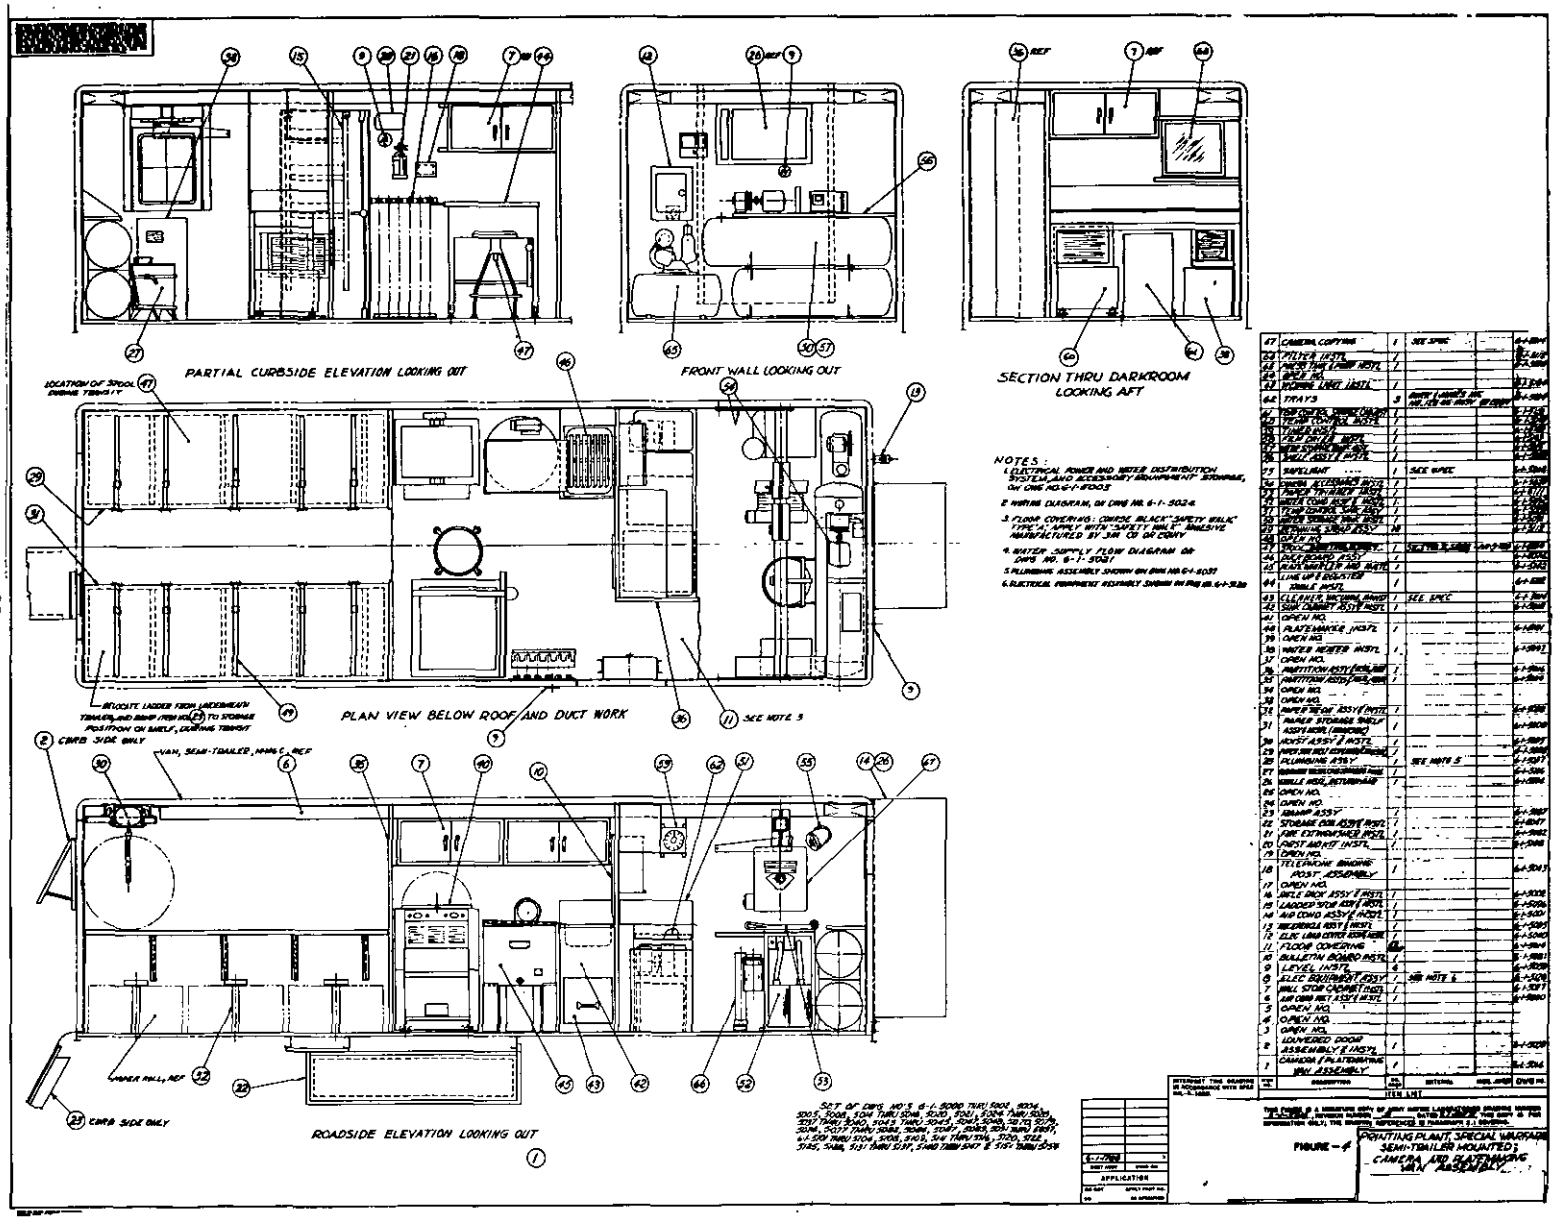

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:31Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Printing Plant, Special Warfare, Semitrailer Mounted MIL-P-43484A(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:31Z
Check the source to verify that this is the current version before use.