MIL-W-55056C(ER)
5 October 1982
SUPERSEDING
MIL-W-55056B(EL)
15 December 1966

MILITARY SPECIFICATION

# WIND MEASURING SET AN/PMQ-6( )
# (UNITS OF)

This specification is approved for use by Electronics Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the following units of Wind Measuring Set AN/PMQ-6( ) (see 6.3):

Case, Accessories CY-2507( )/U
Case, Accessories CY-2508( )/U
Case, Indicator, Wind Speed CY-2499( )/PMQ-6
Case, Standardized Components (Transmitter) Electric CY-2498( )/PMQ-6
Indicator, Wind Speed ID-624( )/GM
Mast, Assembly AB-503( )/U
Terminal Box J-1005( )/PMQ-6
Transmitter, Wind Speed T-610( )/MMQ-1

1.2 The following units, not covered by this specification, together with those listed above, comprise the Wind Measuring Set AN/PMQ-6( ):

Barometer, Aneroid ML-102( )
Cable Assembly, Special Purpose, Electrical CX-4552( )/U (55 ft)
Cable Assembly, Special Purpose, Electrical CX-4552( )/U (150 ft)
Cable Assembly, Special Purpose, Electrical CX-4553( )/U

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Electronics Research and Development Command, Combat Surveillance and Target Acquisition Laboratory, ATTN: DELCS-PE, Fort Monmouth, New Jersey 07703, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

Case (for MIL-102( )) CY-1059( )/UM
Reel, Cable RC-427( )/U
Reel, Cable RC-428( )/U

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

| | |
|---|---|
| MIL-P-116 | - Preservation, Methods Of. |
| MIL-P-11268 | - Parts, Materials, And Processes Used In Electronic Equipment. |
| MIL-M-13231 | - Marking Of Electronic Items. |
| MIL-F-14072 | - Finishes For Ground Signal Equipment. |
| MIL-C-45662 | - Calibration Of Standards. |

STANDARDS

MILITARY

| | |
|---|---|
| MIL-STD-105 | - Sampling Procedures And Tables For Inspection By Attributes. |
| MIL-STD-169 | - Extreme Temperature Cycle. |
| MIL-STD-170 | - Moisture Resistance Test Cycle For Ground Signal Equipment. |
| MIL-STD-454 | - Standard General Requirements For Electronic Equipment. |
| MIL-STD-461 | - Electromagnetic Emission And Susceptibility Requirements For The Control Of Electromagnetic Interference. |
| MIL-STD-810 | - Environmental Test Methods. |

2.1.2 Other government documents, drawings, and publications. The following other government documents, drawings, and publications form a part of this specification to the extent specified herein:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

DRAWINGS

ELECTRONICS COMMAND

| | |
|---|---|
| SC-DL-193206 | - Mast, Assembly AB-503( )/U. |
| SC-DL-193207 | - Case, Accessories CY-2508( )/U. |
| SC-DL-193208 | - Terminal Box J-1005( )/PMQ-6. |
| SC-DL-193209 | - Case, Accessories CY-2507( )/U. |
| SC-DL-193210 | - Case, Indicator CY-2499( )/PMQ-6. |
| SC-DL-193211 | - Case, Standardized Components CY-2498( )/PMQ-6. |
| SC-DL-193212 | - Pump Assembly. |
| SC-DL-193404 | - Pump Handle Assembly. |
| SC-DL-281916 | - Indicator, Wind Speed ID-624( )/GM. |
| SC-DL-281961 | - Transmitter, Wind Speed T-610( )/MMQ-1. |
| SC-GL-57773 | - T-610( )/MMQ-1, Gages For. |
| SM-C-193336 | - Hose Assembly. |
| SPI 1G00185 | - Special Packaging Instruction. |

(Copies of specifications, standards, handbooks, drawings and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. Wind Measuring Set AN/PMQ-6( ) consists of a wind transmitter, an indicator, an air pump, a barometer with case, and a portable mast. In the transport condition, the three mast base legs are secured along the side of the portable mast. All other components and tools required to erect and utilize this equipment are stored in carrying cases.

3.2 First article. When specified, the contractor shall furnish sample units for first article inspection and approval (see 4.3 and 6.2c).

3.3 Construction. The equipment shall be constructed in accordance with the requirements of this specification and equipment drawings referenced in 2.1.2. The requirements of MIL-P-11268 shall apply when the part, material or process is not specified by drawing. In addition to the requirements of this specification, the following shall apply:

a. Recycled, virgin and reclaimed materials. Without jeopardizing the intended use of equipment furnished to this specification, selection of materials will be governed by the following:

(1) There is no exclusion to the use of recovered materials.
(2) There is no requirement that equipment be manufactured from virgin materials.
(3) Reclaimed materials are required to the maximum extent possible.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.4 Finish. The equipment shall be finished in accordance with MIL-F-14072 and the equipment drawings (see 4.4).

3.5 Marking.

3.5.1 General. Marking shall conform to MIL-M-13231 and the equipment drawings (see 4.4).

3.5.2 Serial numbers. The units listed in 1.1 shall have serial number, except terminal box J-1005( )/PMQ-6.

3.6 Performance; Mast AB-503( )/U.

3.6.1 Operational. The nominal air pressure (gage) required to completely extend the mast (operating position) shall be 20psi (138kPa), with maximum pressure of not more than 35psi (241kPa). It shall require a period of not more than 5 minutes to fully extend the mast.

3.6.2 Height stability and friction. The mast shall remain at any desired height between fully extended and completely retracted positions for at least 1 hour without additional air pressure being required from the pump. The extension and contraction of the mast shall be smooth and even with no points of excessive friction that will affect rapid ascent or descent.

3.6.3 Torque. The torque required to turn the mast for orientation shall not exceed a force of 10 pounds (4.54kg) applied at a point 1-inch (2.54cm) from the end of each turning handle.

3.6.4 Torsional rigidity. The total twist over the entire length of the mast shall not exceed 10 mils.

3.6.5 Mil scale. The mil scale shall turn freely by hand with the lock screw disengaged, but shall not rotate by hand pressure when the lock screw is in the locked position.

3.6.6 Pump operation. The pump shall conform to the operational requirements of 3.6.1.

3.7 Performance: Transmitter, Wind Speed T-610( )/MMQ-1, Indicator, Wind Speed ID-624( )/GM and Terminal Box J-1005( )/PMQ-6.

3.7.1 Transmitter, Wind Speed T-610( )/MMQ-1. The transmitter shall meet the following requirements:

3.7.1.1 Generator output. The generator shall provide dc voltages in direct relationship with wind speed (rotation of impeller shaft) as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

| Shaft speed (rpm) | Equivalent wind speed (knots) | Equivalent wind speed (km/h) | Voltage (vdc ±1.0%) |
|---|---|---|---|
| 103 | 4.3 | 8.0 | 0.593 |
| 206 | 8.7 | 16.1 | 1.186 |
| 412 | 17.4 | 32.2 | 2.373 |
| 516 | 21.7 | 40.2 | 2.972 |
| 619 | 26.1 | 48.3 | 3.565 |
| 825 | 34.8 | 64.4 | 4.752 |
| 1031 | 43.4 | 80.4 | 5.938 |

3.7.1.2 Sine-cosine potentiometer outputs. The potentiometer voltages shall conform to the following equations with the potentiometer working into a load of 200,000 ohms ±0.25%:

$$E_1 = \tfrac{1}{2} E \sin \emptyset \pm 1.0\%$$

$$E_2 = \tfrac{1}{2} E \cos \emptyset \pm 1.0\%$$

Where E = Input voltage to slip rings.

$E_1$ = Voltage output at terminals B and C.

$E_2$ = Voltage output at terminals A and B.

$\emptyset$ = Angle between "zero" position of the vane (transmitter) and the wind direction.

NOTE: "Zero" position is defined as that when the transmitter is pointed at the same azimuth as the "N" on the side of the vertical support housing and when the locking pin of the mast adapter is displaced 22.5 degrees counter-clockwise from the vertical plane in which the vane is oriented.

3.7.1.3 Torque, starting. The shaft shall start and continue to rotate when a constant torque of 0.70 ozf-in (.005N-m) is applied in the counter-clockwise direction.

3.7.1.4 Torque, stopping. The shaft rotation shall stop at a torque load of less than 0.45 ozf-in (.003N-m).

3.7.1.5 Static balance of vane. The vane shall require not more than 5 ozf-in (.035N-m) of torque, applied to the lighter end, in order to restore the vane to a horizontal position.

3.7.1.6 Tail vane shaft bearing friction. Friction of this bearing shall be such that a torque of 3.60 ozf-in (.025N-m) applied to the vane will rotate the vane for so long as the torque is applied.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.7.2 Indicator, Wind Speed ID-624( )/GM.

3.7.2.1 Linearity. With the indicator controls set as specified in 4.11, the cross wind and range wind meter shall be linearly calibrated such that the meter indications shall vary by not more than ±0.9 knot (1.7km/h) from the following values:

TABLE I. Voltage input vs meter (outer scale) indication.

| Voltage input (vdc) | Meter indication | |
|---|---|---|
| | (knots) | (km/h) |
| 0.593 | 8.7 | 16.1 |
| 1.186 | 17.4 | 32.2 |
| 1.779 | 26.1 | 48.3 |
| 2.372 | 34.8 | 64.4 |
| 2.965 | 43.4 | 80.4 |

With the indicator controls set as specified in 4.11, except that the scale selector switches shall be in the inner scale position, the meter indications shall vary by not more than 0.4 knot (0.7km/h) from the following values:

TABLE II. Voltage input vs meter (inner scale) indication.

| Voltage input (vdc) | Meter indication | |
|---|---|---|
| | (knots) | (km/h) |
| 0.297 | 4.3 | 8.0 |
| 0.593 | 8.7 | 16.1 |
| 0.890 | 13.0 | 24.2 |
| 1.186 | 17.4 | 32.2 |
| 1.483 | 21.7 | 40.2 |

3.7.2.2 Time constant. The time constant of each circuit shall correspond to the values indicated by the time constant dial to within ±10% when tested in accordance with 4.11.2.

3.7.2.3 Cross wind and range wind indications. The cross wind and range wind meters shall approximate the values of 4.11.3b within ±1% at the points indicated for a constant wind speed of 17.4 knots (32.2km/h).

3.7.3 Terminal box J-1005( )/PMQ-6.

a. There shall be no breakdowns or momentary arcing when the terminal box is tested in accordance with 4.12.2.

b. The terminal box shall conform to the tests of 4.12.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.8 Interchangeability. Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment (see 4.8). Individual items shall not be handpicked for fit or performance; however, matched pairs or sets, when permitted, may be interchangeable as such. Reliance shall not be placed on any unspecified dimensions, rating, characteristic, etc.

3.9 Service conditions. The equipment shall meet the following service conditions (where a test is referenced, meeting the test requirement shall be considered as compliance with the requirement):

3.9.1 Operation. Continuous use for a period of 3 years, under the worldwide environmental conditions specified in 3.9.2 through 3.9.5 with a duty cycle of 6 hours "ON" and 6 hours "OFF" and with not more than normal maintenance and replacement of parts. Where the contractor is required to make a selection of parts, materials, processes, construction methods, etc., he shall be guided by this requirement.

3.9.2 Temperature (see 4.13):

a. Operating. Ambient temperature in the range of 150°F to -65°F (65.6°C to -53.9°C). (The high temperature includes effect of sunload). Exposure at the high temperture extreme not to exceed 4 hours, and at the low temperature extreme not to exceed 72 hours, at any one time.

b. Nonoperating. Exposure in the range of 160°F to -80°F (71.1°C to -62.2°C); exposure at the high temperature extreme not to exceed 4 hours, and at the low temperature extreme not to exceed 24 hours, at any one time.

3.9.3 Relative humidity (transmitter and indicator only) (see 4.14). Up to 97% relative humidity for 20 hours; and exposure at 100% relative humidity, with condensation, for 4 hours.

3.9.4 Immersion (cases only) (see 4.15). Three feet (91.4cm) of fresh water for 2 hours.

3.9.5 Rain (terminal box and transmitter) (see 4.16). There shall be no evidence of leakage.

3.9.6 Shock; bench-handling (see 4.17). The equipment shall meet full specified performance and there shall be no physical damage.

3.10 Tropicalization of material. In addition to the requirements of MIL-P-11268 and the equipment drawings (see 2.1.2), the following is required:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

3.10.1 Fungus. Equipment and assemblies shall show no evidence of viable fungus or corrosion when subjected to 28 days of fungus test in accordance with 4.19. (Corrosion is defined as any visible degradation that can be attributed to flaky, pitted, blistered, or otherwise loosened finish on the metal surface.)

3.11 Salt fog. The equipment and assemblies shall be exposed, in their operating configuration, to 48 hours of salt fog in accordance with 4.18 and shall show no evidence of corrosion as evidenced by any visible degradation that can be attributed to flaky, pitted, blistered or otherwise loosened finish on the metal surface.

3.12 Electromagnetic interference (EMI). The wind speed transmitter T-610( )/MMQ-1 shall meet the emanation and susceptibility limits of MIL-STD-461, class ID (see 4.4). Application of suppression components and techniques shall conform to that specification. If the contractor considers it desirable to modify the equipment proper in order to facilitate conformance with the specified emanation and susceptibility limits, he shall obtain approval from the contracting officer before proceeding with the modification. MIL-STD-461 is not required for Weston Model 750 generator, series A14R or A16R.

3.13 Preconditioning. The equipment shall be capable of meeting the requirements herein, without subsequent processing after subjection to the bounce preconditioning of 4.6 (also see 4.5).

3.14 Workmanship. The equipment shall be manufactured and assembled in accordance with requirement 9 of MIL-STD-454 and the applicable portions of the following paragraphs of MIL-P-11268:

- General requirements for plastic material and plastic parts.
- Wiring and cabling, including:
  - Slack.
  - Protection.
  - Clearance.
  - Splicing.
  - Connections, general.
  - Grounding, general.
  - Shielding on wire and cable.
- Flux and cleaning agents for soldering.
- Process for soldering.
- Cleaning.
- Riveting.
- General requirements for securing of parts.
- Cleaning of welding.
- Process for welding.
- Mechanical operation of controls.
- Self-tapping screws.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (does not include packaging) (see 4.3).

b. Inspection covered by subsidiary documents (see 4.4).

c. Quality conformance inspection.

(1) Quality conformance inspection of equipment before packaging (see 4.5).

(2) Quality conformance inspection of packaging (see 4.20).

4.3 First article. This inspection will be performed by the contractor unless otherwise specified in the contract. It shall consist of the first article inspection specified in the subsidiary documents covering the items listed in 4.4, and the inspection for group A (table III), group B (table IV), group C (table V) and performed in that order except the operation of the mast AB-503( )/U, transmitter T-610( )/MMQ-1 and the indicator ID-624( )/GM in table III shall be last.

TABLE III. Group A inspection.

| Inspection | Requirement paragraph | Test method paragraph | AQL(% defective) | |
|---|---|---|---|---|
| | | | Major | Minor |
| Visual and mechanical | | | | |
| Case, CY-2498( )/PMQ-6 | 3.14 | 4.7 | 1.0 | 4.0 |
| Case, CY-2499( )/PMQ-6 | 3.14 | 4.7 | 1.0 | 4.0 |
| Case, CY-2507( )/U | 3.14 | 4.7 | 1.0 | 4.0 |
| Case, CY-2508( )/U | 3.14 | 4.7 | 1.0 | 4.0 |
| Indicator, wind speed ID-624( )/GM | 3.14 | 4.7 | 1.0 | 4.0 |
| Mast assembly AB-503( )/U | 3.14 | 4.7 | 1.0 | 4.0 |
| Transmitter, wind speed T-610( )/MMQ-1 | 3.14 | 4.7 | 1.0 | 4.0 |
| Terminal Box J-1005( )/PMQ-6 | 3.14 | 4.7 | 1.0 | 4.0 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

| Inspection | Requirement paragraph | Test method paragraph | AQL(% defective) Major | AQL(% defective) Minor |
|---|---|---|---|---|
| Mast and pump (mast AB-503( )/U) | | | | |
| Height stability and friction | 3.6.2 | 4.9.2 | 1.0 for the group | |
| Torque | 3.6.3 | 4.9.3 | | |
| Torsional rigidity | 3.6.4 | 4.9.4 | | |
| Mil scale | 3.6.5 | 4.9.5 | | |
| Pump operation | 3.6.6 | 4.9.6 | | |
| Operational 1/ | 3.6.1 | 4.9.1 | | |
| Electrical and mechanical: | | | | |
| Transmitter, wind speed T-610( )/MMQ-1 | | | | |
| Generator output | 3.7.1.1 | 4.10.1 | 1.0 2/ | |
| Sine-cosine output | 3.7.1.2 | 4.10.2 | | |
| Indicator, wind speed ID-624( )/GM | | | | |
| Time constant | 3.7.2.2 | 4.11.2 | 1.0 2/ | |
| Linearity | 3.7.2.1 | 4.11.1 | | |
| Terminal box J-1005( )/PMQ-6 | | | | |
| Continuity | 3.7.3b | 4.12.1 | 1.0 2/ | |
| Voltage breakdown | 3.7.3a | 4.12.2 | | |
| Transmitter, wind speed T-610( )/MMQ-1 and indicator, wind speed ID-624( )/GM | | | | |
| Operation | 3.7.1<br>3.7.2 | 4.11.3<br>4.11.3a<br>4.11.3b | 1.5 2/ | |

1/ This test shall be conducted through a minimum of 5 cycles of operation for procurement inspection. The test will be conducted through 30 cycles of operation in first article inspection or 2 items of the first 10 produced when first article inspection is not required by contract. The operational inspection of group A inspection shall be 100%.

2/ All electrical defects are major category.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.4 Inspection covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before packaging:

| Item | Where required |
|---|---|
| Finish | 3.4 |
| Marking | 3.5 |
| EMI | 3.12 |

4.5 Quality conformance inspection of equipment before packaging. The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the government at its discretion may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements (see 6.6). Test equipment for government verification inspection shall be made available by the contractor. The operational tests of group A inspection for Mast AB-503( )/U, Transmitter T-610( )/MMQ-1 and Indicator ID-624( )/GM shall be last. Transmitter T-610( )/MMQ-1 and indicator ID-624( )/GM shall be preconditioned in the respective cases for transport.

4.5.1 Group A inspection. This inspection shall conform to table III of this specification and the inspection procedures of MIL-STD-105 using general inspection level II. Group A inspection shall be performed in any order which is satisfactory to the government.

4.5.2 Group B inspection. This inspection shall conform to table IV of this specification and to the procedure of MIL-STD-105 using special inspection levels S-4 for normal, tightened and reduced inspection. Group B inspection shall be performed on units that have been subjected to and passed group A inspection. The AQL for group B inspection shall be 4% defective.

4.5.2.1 Order of inspection within group B. Group B inspection shall be performed in any order which is satisfactory to the government.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

TABLE IV. Group B inspection.

| Inspection | Requirement paragraph | Test method paragraph |
|---|---|---|
| Transmitter, wind speed T-610( )/MMQ-1 | | |
| Torque, starting | 3.7.1.3 | 4.10.3 |
| Torque, stopping | 3.7.1.4 | 4.10.4 |
| Vane, static balance | 3.7.1.5 | 4.10.6 |
| Tail vane shaft bearing friction | 3.7.1.6 | 4.10.5 |
| Interchangeability (overall) | 3.8 | 4.8 |

4.5.3 Group C inspection. This inspection shall consist of the tests specified in table V and shall be performed on units that have been subjected to and met groups A and B inspection. Sample units shall be selected in accordance with 4.5.3.1. Individual samples shall be subjected to the specific tests listed in table V(A).

TABLE V. Group C inspection.

| Inspection | Requirement paragraph | Test method paragraph |
|---|---|---|
| Subgroup I | | |
| Temperature (cases and terminal box not included) | 3.9.2 | 4.13 |
| Humidity (mast, pump, cases and terminal box not included) | 3.9.3 | 4.14 |
| Immersion (cases only) | 3.9.4 | 4.15 |
| Rain (transmitter and terminal box only) | 3.9.5 | 4.16 |
| Subgroup II | | |
| Shock; bench-handling (indicator only) | 3.9.6 | 4.17 |
| Salt fog (transmitter, indicator and pump box assembly only) | 3.9.11 | 4.18 |
| Fungus | 3.10.1 | 4.19 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

TABLE V(A). Group C inspection test sequence.

| Unit 1 | Unit 2 | Unit 3 |
|---|---|---|
| Temperature<br>Shock; bench-handling<br>Rain | Humidity<br>Salt fog | Fungus |

4.5.3.1 Sampling for inspection of equipment. Three items from the first 10 produced shall be selected at random and subjected to subgroups I and II of group C inspection. One item from each 20 produced thereafter shall be subjected to subgroup I inspection only. Subgroup II of group C inspection will not be required if first article tests are specified in the contract.

4.5.3.2 Noncompliance. The contractor shall immediately report in writing each group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials, as applicable, and (ii) all units of product which were manufactured under the same conditions and which the government considers subject to the same failure. Reports shall be forwarded to the responsible technical activity designated in the contract through the government quality assurance representative. After corrective action has been taken, additional sample units shall be subjected to group C inspection (all inspections, or the inspections which the same failed. at the option of the government) and groups A and B inspection may be reinstituted; however, final acceptance and shipment will be withheld until the group C reinspection results have shown that the corrective action was effective.

4.5.4 Reinspection of conforming group C sample units. Unless otherwise specified, sample units which have been subjected to and passed group C inspection may be accepted on the contract, provided all damage is repaired and the sample units are resubjected to and pass group A inspection.

4.6 Bounce preconditioning. The unit, with shock mounts (if any) removed or blocked, shall be placed in its normal operation position on the table of the package tester, type 1000-SC, as made by the L.A.B. Corporation, Skaneatales, New York, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a .03125 inch (0.79mm) thick strip of material under one corner or edge of the unit to a distance of 3 inches (76.2mm) as the unit bounces. The unit shall be subjected to this preconditioning for 5 minutes. After bounce preconditioning, the unit shall not be repaired, alined, cleaned, or otherwise changed prior to subjection to acceptance inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.7 Visual and mechanical inspection. The equipment shall be examined for the defects listed in MIL-STD-454 and table VI.

TABLE VI. Classification of visual and mechanical defects.

| Classification | Defect |
|---|---|
| Major | Ineffective connections (electrical and physical).<br>Improper weld.<br>Use of riveting for mounting capacitors, resistors, transformers, inductors or miniature tube sockets.<br>Loose or defective rivets or other securing parts.<br>Finish peeling or cracking.<br>Cover missing (terminal box).<br>Damaged, missing parts, or out of balance of transmitter, wind speed T-610( )/MMQ-1 including impellers, tail vane, connector housing and connections.<br>Improperly applied or poorly fitting gaskets for covers.<br>Improper or poorly mounted hardware, including catches on cases.<br>Missing, broken, inoperative or defective parts of pump assembly, hose or valve system.<br>Damaged or inaccurate peepsights, levels or mil scale.<br>Damaged or inoperative mast section.<br>Ineffective mast seals. |
| Minor | Sharp points, rough surfaces on soldered joints.<br>Excess of flux and corrosive material, or lack of cleaning and removal of loose particles.<br>Poor screwthreads, washers not properly seated.<br>Soft or brittle materials subject to corrosion through lack of protective coating.<br>Poor, inadequate, or improperly applied finishes. |

4.8 Inspection for dimensional interchangeability. When a listed dimension is not within specified or design limits, it shall be considered a major defect. The following dimensions shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.8:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

a. External and internal dimensions of cases, covers, and insertable assemblies, when such dimensions affect mating of parts.

b. Dimensions of cavities, when such dimensions affect insertion of items.

c. Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.

d. Location of connectors, locking pins, fasteners, slides, and mountings which receive mating parts of plug-in assemblies and major units; and location of the mating parts on the plug-in assembly or major unit.

e. Size and form of special threads.

f.

| Unit | Drawing list |
|---|---|
| Transmitter wind speed T-610( )/MMQ-1 | SC-GL-57773 |

4.9 Mast and pump tests (Mast AB-503( )/U).

4.9.1 Operational. The mast shall be operated from fully retracted to fully extended positions and return with a 12 pound (5.4kg) equipment load (either real or simulated) and the guys in place, to determine compliance with 3.6.1.

4.9.2 Height stability and friction. The mast, loaded with a 12 pound (5.4kg) equipment load (real or simulated) and guyed, shall be tested for stability at position of one-third, one-half, two-thirds and fully extended, and for friction (rapid ascent and descent) for conformance with 3.6.2.

4.9.3 Torque test. Test for compliance with 3.6.3 the maximum force required to turn (orient) the mast, with the mast fully extended, both sets of guys in place and tensioned, and the mast carrying an equipment load of 12 pounds (5.4kg) (real or simulated).

4.9.4 Torsional rigidity. The fully erected and guyed mast with a 12 pound (5.4kg) equipment load (either real or simulated) shall be subjected to 3 lbf-ft (4.1N-m) twisting force applied to the top of the top section of the mast. The total twist shall be measured at the top of the mast for conformance with 3.6.4.

4.9.5 Mil scale. The mil scale shall be checked for compliance with 3.6.5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.9.6 Pump operation. The pump shall be tested for conformance with 3.6.6.

4.10 Wind speed transmitter T-610( )/MMQ-1.

4.10.1 Generator output. For production or first article test connect a wire wound potentiometer across the generator output leads to provide a 4700 ohm load with the sine/cosine potentiometer disconnected from the circuit. Rotate the impeller shaft in a counter-clockwise direction at the shaft speeds indicated in 3.7.1.1. A geared head, multi-spindle synchronous motor or similar device coupled to the impeller shaft may be used to obtain the required speeds except for first article testing. First article testing shall be accomplished by placing the completely assembled wind transmitter in a wind tunnel at the Bureau of Standards, Washington, D.C., mounted as in normal operation and measuring generator voltage output and shaft speeds for conformance to the values specified in 3.7.1.1 with the wind speeds controlled to within ±0.9 knot (1.7km/h) or 5 percent, whichever is greater. Only the generator output voltage need be measured during production testing (mechanical rotation of generator shaft as specified above at a constant speed) to determine compliance with 3.7.1.1.

4.10.2 Sine-cosine output. Measurements to determine compliance with 3.7.1.2 shall be made at a constant generator shaft speed of 1031 rpm (43.4 knots) (80.4km/h) or by applying a dc potential of 5.93 volts ±1.0% to the slip rings (top-positive, bottom-negative) after mechanically-electrically zeroing and phasing of the sine-cosine potentiometer. The separate voltages of the sine (B-C) and cosine (A-B) sections shall be measured at each 15 degree increment through 360 degrees rotation of the transmitter. This test shall be conducted with the transmitter (less impeller) mounted in an approved test fixture with "zero" position as defined in 3.7.1.2. The test fixture shall have an azimuth scale-plate graduated at 15 degree intervals.


4.10.3 Torque test; starting. Apply a constant torque of 0.70 ozf-in (.0049N-m) (see figure 1) to the impeller shaft in a counter-clockwise direction (viewed from the impeller end or front) to determine compliance wtih 3.7.1.3.

4.10.4 Torque test; stopping. Start the shaft in a counter-clockwise direction by applying a torque of 0.75 ozf-in (.0053N-m). Increase the "stopping" torque from zero to 0.45 ozf-in (.0032N-M) to determine compliance with 3.7.1.4. A "stopping" torque of 0.45 ozf-in (.0032N-m) or greater does not pass the test.

4.10.5 Vane shaft bearing friction. Attach a piece of twine to the transmitter rain shield with a piece of pressure-sensitive tape. Wind the twine onto the rain shield smoothly, without overlapping, by rotating the vane. Pass the free end of the twine over a frictionless pulley (see




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

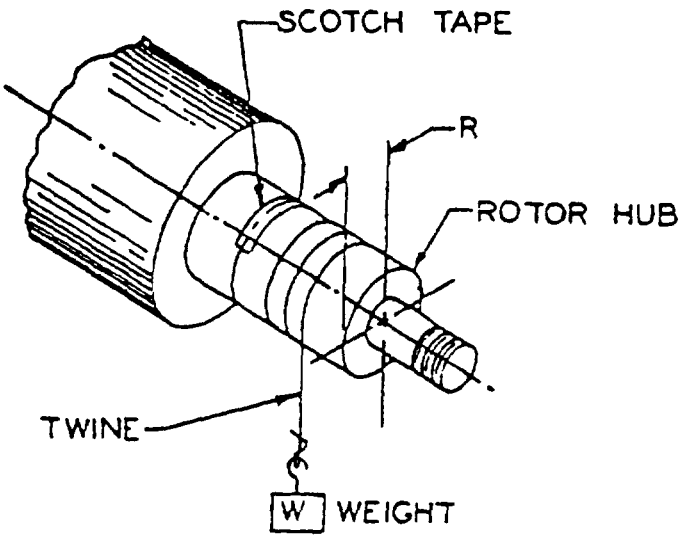


Torque (ozf-in) applied to shaft is RxW where R is in inches and W is in ounces.

FIGURE 1. Torque test.

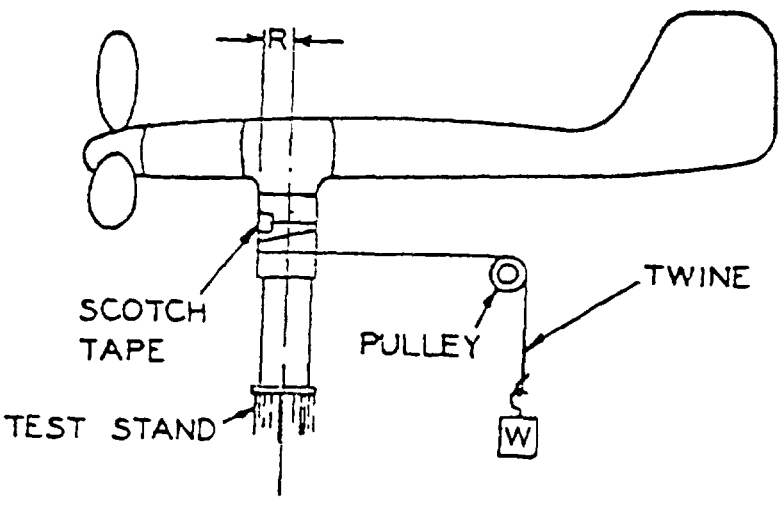


Torque (ozf-in) applied to vane is RxW where R is in inches and W is in ounces.

FIGURE 2. Vane shaft bearing friction.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

figure 2). Attach a weight to the free end of the twine to apply 3.60 ozf-in (.0254N-m) of torque to the vane. The bearing friction shall conform to 3.7.1.6.

4.10.6 Static balance. Place the wind transmitter in a horizontal test fixture. Rotate the vane so that its long axis is horizontal, and observe the position assumed by the vane when it is free to rotate. Apply a torque load to the lighter end of the transmitter to determine compliance with 3.7.1.5. Weight in nose or on tail of vane shall be varied to meet this condition.

4.11 Indicator ID-624( )/GM preliminary adjustments (average reading). To operate the indicator as an average reading instrument, set or adjust the controls as follows:

a. Rotate the "average reading-direct reading" switch to the "average reading" position.

b. Rotate the switch marked "minutes" to the zero position.

c. Operate both meter scale switches to the inner position.

d. Operate the power switch to the "ON" position. Allow the instrument to warm up for about 3 minutes.

e. Actuate the "full scale adjust-zero adjust-operate" switch to the "zero" position.

f. Electrically zero each meter by means of the respective "zero adjust" potentiometer.

g. Check the grid bias of each tube by means of the "grid bias check" switches. (NOTE: The correct grid bias will be indicated by a meter reading of 50. The tolerance in adjusting the grid bias shall not exceed one-half of a division on each meter.)

h. If the meter indicates that the grid bias is improperly adjusted, depress the "bias check" switch, hold it closed and rotate the "bias adjust" potentiometer until the proper reading is indicated. When the "bias adjust" potentiometer is changed to achieve this result, it may be necessary to readjust the "zero adjust" potentiometer, since the two controls interact with each other. Repeat steps "e," "f" and "g" until the readings specified in step "g" are achieved.

i. Operate the "full scale adjust-zero adjust-operate" switch to the "full scale" position.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

j. Depress the "signal voltage check" switch; hold it closed and simultaneously adjust the signal voltage "adjust" potentiometer until both meters read full scale.

k. Adjust the "full scale adjust" potentiometers until the meters read full scale. The cross wind meter pointer should deflect to the left of zero and the range-wind meter should deflect to the right of zero.

l. Recheck the electrical zero setting and readjust if necessary. There is a slight interaction between the zero setting and the full scale setting.

m. Set the "full scale adjust-zero adjust-operate" switch to the "operate" position.

n. Operate both meter-scale switches to the outer position.

4.11.1 Linearity of indicator. Apply the incremental voltages specified in table I to terminals A and B, and C and B. The meter indications shall conform to table I. Repeat the previous step but with input voltages as given in table II and with the meter scale switches in the inner position. The meter readings shall conform to the values specified in table II.

4.11.2 Time constant test. Adjust the indicator controls as specified in 4.11, steps "a" through "m."

a. Actuate the "full scale adjust-zero adjust-operate" switch to the "full scale" position.

b. Rotate the "minutes" switch to the time constant to be checked.

c. Operate the left-right (for the cross wind meter) to position the pointer until full scale deflection is obtained.

d. Actuate the "full scale adjust-zero adjust-operate" switch to the "zero adjust" position. The meter pointer shall then deflect to 36.8 percent of the full scale value of 21.7 knots (40.2km/h) in the time indicated by the selected time constant. The accuracy shall conform to 3.7.2.2.

4.11.3 Operation. The indicator shall be connected to the wind transmitter as in normal operation, with the transmitter mounted in a test fixture (see 4.10.2) and tested for compliance with 3.7.2. This test shall be as follows:

a. Wind speed. Mechanical rotation of the impeller shaft of the wind transmitter (see 4.10.1) to simulate wind speed is permissible. Shaft



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

speeds in revolutions per minute (rpm) and indications (readings) in knots (km/h) shall be as indicated in 3.7.1.1. This test shall be conducted at "zero" position for headwind indication and at the 90° position for cross wind indication.

b. Cross wind and range wind indications. The wind transmitter shall be rotated in increments of 15 degrees through 360 degrees of azimuth. Mechanical rotation of the impeller (generator) shaft is permissible.

| Azimuth settings (degrees) | Cross wind (knots) | Range wind (knots) | Azimuth settings (degrees) | Cross wind (knots) | Range wind (knots) |
|---|---|---|---|---|---|
| 0 | 0 | HW17.4(1/) | 195 | R4.5(4/) | TW16.8 |
| 15 | L4.5(3/) | HW16.8 | 210 | R8.7 | TW15.0 |
| 30 | L8.7 | HW15.0 | 225 | R12.2 | TW12.2 |
| 45 | L12.2 | HW12.2 | 240 | R15.0 | TW8.7 |
| 60 | L15.0 | HW8.7 | 255 | R16.8 | TW4.5 |
| 75 | L16.8 | HW4.5 | 270 | R17.4 | 0 |
| 90 | L17.4 | 0 | 285 | R16.8 | HW4.5 |
| 105 | L16.8 | TW4.5(2/) | 300 | R15.0 | HW8.7 |
| 120 | L15.0 | TW8.7 | 315 | R12.2 | HW12.2 |
| 135 | L12.2 | TW12.2 | 330 | R8.7 | HW15.0 |
| 150 | L8.7 | TW15.0 | 345 | R4.5 | HW16.8 |
| 165 | L4.5 | TW16.8 | 360 | 0 | HW17.4 |
| 180 | 0 | TW17.4 | | | |

1/ HW = Headwind
2/ TW = Tailwind
3/ L = Left
4/ R = Right

NOTE: Metric equivalents for wind velocities listed in preceding chart are as follows:

| | |
|---|---|
| 4.5 knots (8.3km/h) | 15.0 knots (27.8km/h) |
| 8.7 knots (16.1km/h) | 16.8 knots (31.1km/h) |
| 12.2 knots (22.6km/h) | 17.4 knots (32.2km/h) |

4.12 Electrical tests (terminal box J-1005( )/PMQ-6).

4.12.1 Continuity test. Terminal box J-1005( )/PMQ-6 shall be tested to determine proper connection and continuity between connectors.

4.12.2 Voltage breakdown test. A potential of 400 volts dc shall be applied between connections (pins or terminals) and between the connections and the connector shells (housing) to determine compliance with 3.7.3.

NOTE: Test equipment shall be calibrated in accordance with this specification. When calibration is not specified, MIL-C-45662 shall apply.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.13 Temperature test. The equipment shall be subjected to the temperature cycle shown on MIL-STD-169. Performance shall be as follows for "a:" Mast and pump; "b:" as specified by table V, group C:

| Step | Test method paragraph | Performance |
|---|---|---|
| a. 2a and 7 | 4.9.1 thru 4.9.6 | Test for compliance with 3.6.1 thru 3.6.6. Equipment may be removed from test chamber for test (mast vertical) if size of chamber will not permit full extension of mast. Such test must be conducted immediately upon removal from chamber. |
| b. 1 3 7 | 4.10 and 4.11 | 3.7 thru 3.7.2.3 |

4.14 Moisture-resistance test. The indicator and wind transmitter shall be tested as follows:

4.14.1 Test conditions.

a. Do not move equipment from the humidity chamber for measurements.

b. Start measurements not more than 5 minutes after power is applied to the equipment. Complete measurements as rapidly as possible. Do not leave power on after measurements have been completed.

4.14.2 Test method.

a. Dry at 130°F ±5°F (54.4°C ±2.8°C) for 24 hours.

b. Condition at 77°F ±5°F (25°C ±2.8°C) and 40 to 50% relative humidity for 24 hours.

c. Take measurements as specified in 4.14.3, and readjust or re-aline as necessary to meet full specification requirements.

d. Subject to continuous cycling for two 48-hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to MIL-STD-170. The measurements specified in 4.14.3 shall be made during the periods shown in the standard and shall comply with 4.14.3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

e. After cycling has been completed, condition the equipment for 24 hours at 77°F ±5°F (25°C ±2.8°C), and 50% ±10% relative humidity. Then adjust for optimum performance, using only those means provided by the equipment. No repair or replacement of parts shall be made. After adjustment, the equipment shall meet full specified performance for those measurements specified in 4.14.3.

4.14.3 Performance. Measurements made during test and specified performance during cycling shall be as follows:

| Measurement | Performance requirement during cycling | Test method paragraph |
|---|---|---|
| Time constant and linearity | 3.7.2 thru 3.7.2.3 | 4.11.1, 4.11.2 |
| Operation tests | 3.7.1 thru 3.7.1.6 | 4.10 thru 4.10.6 |

4.14.4 Failure. If any equipment fails to meet the performance specified in 4.14.3 during cycling, it shall be re-aligned or readjusted once. If the equipment then fails to meet 4.14.3 or fails subsequently during cycling, it does not pass the test. In addition, if the equipment fails to meet full specification requirements after conditioning and adjustment, as specified in 4.14.2e, it does not pass the test.

4.15 Immersion test (cases only). The cases loaded to simulate weight and distribution of the equipment normally housed therein, shall be immersed to a minimum covering depth of 3 ft (91.4cm) of fresh water for 2 hours. Immediately prior to immersion, the temperature of the cases shall be 40 Fahrenheit (22.2 Celsius) degrees or more above the temperature of the water. The tank in which the cases are immersed shall be of sufficient capacity to maintain the water within ±2 Fahrenheit (1.1 Celsius) degrees of its initial temperature or the temperature of the water shall be maintained within those limits by other means. After completion of the 2 hour period of immersion, the cases shall be removed from the water and wiped dry on the exterior surfaces. The cases shall be opened immediately after drying of the exterior surfaces. There should be no evidence of leakage when the cases are opened (see 3.9.4).

4.16 Rain test (transmitter T-610( )/MMQ-1 and terminal box J-1005( )/PMQ-6. The equipment shall be tested as follows: (NOTE: During this test, the transmitter shall be restrained from rotating on its shaft and caps shall be placed over the receptacles of the terminal box.)

a. Dry at 150°F ±5°F (65.6°C ±2.8°C) for 48 hours.

b. Condition for 4 hours at 77°F ±5°F (25°C ±2.8°C) and 50% ±10% relative humidity.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

c. Take the measurements specified in 4.11.3 to insure that the equipment meets specified performance.

d. Place the equipment, in its normal operating position, in a test chamber maintained at 77°F ±5°F (25°C ±2.8°C). Allow simulated rainfall to fall on exposed surfaces of the equipment. The water shall be at a temperature of 65°F ±5°F (18.3°C ±2.8°C) and shall fall freely at a rate of 2 inches (50.8mm) per hour. Maintain this condition for 1 hour.

e. With the rainfall continuing at the 2 inches (50.8mm)/hr rate, introduce a simulated wind blowing horizontally at 17.4 ±4.3 knots (32.2 ±8km/h) against one side of the equipment. The water shall fall on exposured surfaces and be blown by the wind against one side of the equipment. Maintain this condition for 1 hour.

f. Rotate the support 90 degrees horizontally, to expose a second side of the component to the wind and rain. Maintain this condition for 1 hour.

g. Continue as in 4.16f until all 4 sides of the support have been exposed to the wind and rain, each side for 1 hour.

h. Immediately after completion of the foregoing, repeat the measurements specified in 4.16c without removal from the chamber but with the rain and wind discontinued. Complete the measurements within 1 hour. The equipment shall meet specified performance.

i. Open the equipment. There shall be no visible evidence of leakage.

4.17 Shock test; bench-handling (indicator ID-624( )/GM only). The chassis-and-front-panel assembly shall be removed from its enclosure and placed in a suitable position as for servicing on a 2-inch (50.8mm) solid fir bench top. The test, simulating shocks liable to occur during servicing, shall be performed as follows:

a. Tilt up the assembly through an angle of 30 degrees, using one edge of the assembly as an axis, and permit the assembly to drop back freely to the horizontal. Repeat, using other practicable edges of the same horizontal face as axes, for a total of 4 drops.

b. Repeat "a," with the assembly resting on other faces, until it has been dropped for a total of 4 times on each face on which the assembly might practically be placed during servicing.

4.18 Salt fog. The equipment and assemblies shall be exposed in their operating configuration to salt fog in accordance with method 509 of MIL-STD-810 for 48 hours. Equipment and assemblies shall not be opened and shall not be required to be operated.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

4.19 Fungus. The equipment and assemblies shall be subjected to 28 days of the fungus test specified in method 508 of MIL-STD-810. For gasket or other non-hermetically sealed equipments, the parts and materials of the chassis shall be sprayed with the spore suspension. The interior of the case shall also be sprayed. The equipment shall be subjected to the test in this open condition.

4.20 Quality conformance inspection of packaging. Quality conformance inspection of packaging shall be in accordance with group A, group B and, when required (see 6.2d), the group C (rough handling) requirements of MIL-P-116. Inspection lots shall be in accordance with MIL-P-116.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with SPI 1G00185.

6. NOTES

6.1 Intended use. Wind measuring set AN/PMQ-6( ) is used to determine cross and range wind velocities up to and including 43.4 knots (80.4km/h). The wind speed transmitter is mounted at the top of a 50 ft (15.2m) telescopic mast. The wind speed indicator is ground operated at distances up to and including 450 ft (137.2m) from the base of the mast.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Level A or level B preservation and packing (see section 5).

c. Number of first articles, if required, to be submitted for approval (see 3.2).

d. When rough handling test is required (see 4.20).

e. Marking and shipping of samples.

f. Place of final inspection.

g. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.3 Nomenclature. The parentheses in the nomenclatures will be deleted or replaced by a letter identifying the particular design, for example: AN/PMQ-6W. The contractor should apply for nomenclature in accordance with the applicable clause in the contract (see 1.1 and 1.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

6.4 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - ER

Preparing activity:
Army - ER
(Project 6660-A059)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-W-55056C WIND MEASURING SET AN/PMQ-6( )

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

| SUBMITTED BY *(Printed or typed name and address — Optional)* | TELEPHONE NO |
|---|---|
| | DATE |

**DD FORM 1 OCT 76 1426** EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

**BUSINESS REPLY CARD**

FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding Officer
US Army Electronics Research and Development
Command
ATTN: DELCS-PE
Fort Monmouth, New Jersey 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:13Z
Check the source to verify that this is the current version before use.