MIL-M-11024B(WC)

6 June 1975
SUPERSEDING
MIL-M-11024A(ORD)
8 July 1958
W/AMENDMENT 1
4 October 1961

MILITARY SPECIFICATION

MECHANISM, RECOIL, 155MM HOWITZER: M6A2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for one type of hydropneumatic recoil mechanism for use with the 155mm Howitzer.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

Federal		
NN-P-530	-	Plywood, Flat Panel
QQ-S-781	-	Strapping, Steel, Flat and Seals
PPP-T-60	-	Tape, Packaging, Waterproof
Military		
MIL-C-104	-	Crate, Wood, Lumber and Plywood Sheathed, Nailed and Bolted
MIL-P-116	-	Preservation, Packaging, Methods Of
MIL-B-121	-	Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-H-5606	-	Hydraulic Fluid, Petroleum Base, Aircraft, Missile and Ordnance
MIL-H-6083	-	Hydraulic Fluid, Petroleum Base, for Preservation and Testing
MIL-G-10944	-	Gages, Dimensional Control
MIL-P-14232	-	Parts, Equipment and Tools for Army Material, Packaging and Packing Of
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition Of

FSC 1025

Source: https://assist.dla.mil -- Downlo
Check the source to verify that this is the

STANDARDS

Military
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

Rock Island Arsenal
F7148074 - Mechanism Recoil M6A2

PUBLICATIONS

U.S. Government
SF 32 - General Provisions

Rock Island Arsenal
DC7148074 - Quality Engineering Data List

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. Requirements for submission of first article shall be as specified in the contract (see 6.1).

3.2 Materials, construction and design. The recoil mechanism shall conform to the material, construction and design requirements specified herein and on Drawing F7148074.

* 3.2.1 Alignment. The axis of the recoil cylinder, piston rods, and piston rod stuffing boxes shall be aligned with each other and with the gun slides in accordance with applicable drawings.

* 3.2.2 Elevating arc. The elevating arc shall be in alignment with the axis of the cradle trunnions in accordance with applicable drawings. It shall have the intended tooth contact (see applicable drawing) with the axis of the elevating arc and with the elevating shaft pinion of the mount at all positions of elevation.

3.3 Performance characteristics.

3.3.1 Recoil mechanism. The recoil mechanism shall be filled with hydraulic fluid, bled, and refilled until all air and measurable moisture

Source: https://assist.dla.mil -- Downloaded: 2026-10-1
Check the source to verify that this is the current version

are eliminated. The initial and subsequent filling of the hydraulic system shall be with hydraulic oil conforming to MIL-H-5606 or MIL-H-6083, and filtered through a 5 micron filter. Prior to and after gymnastication, the hydraulic system shall be free of all magnetic or abrasive particles that may cause damage to the inner surfaces of the operating mechanism, or malfunction of the system. Testing shall be as specified in 4.5.2.2.

* 3.3.1.1 Mechanical gymnastication. The recoil mechanism shall be mechanically gymnasticated in recoil and counter recoil for 25 cycles after final assembly. The recoil mechanism shall operate without erratic movement or malfunctioning of the system. Seepage of oil through the mating surfaces shall not exceed two (2) cubic centimeters in any 24-hour period. Testing shall be as specified in 4.5.2.2.

3.3.1.2 Friction. Friction of the floating piston, recoil piston rod, and counter recoil piston rod shall be within the limits specified in Table I after assembly, gymnastication, proof firing, and after resting at least 48 hours. Testing shall be as specified in 4.5.2.2.

TABLE I

Friction in Pounds Per Square Inch of Hydraulic Pressure

Part Name	Minimum **	Maximum **
Floating Piston	70	170
Recoil Piston Rod and Counter Recoil Piston Rod	110	425

** Buffer must be five-inches out of battery when friction values are taken.

3.3.1.3 Oil index. The oil index shall function without evidence of interference throughout its entire range of travel. There shall be only sufficient leakage to provide necessary lubrication. Oil wetting around the piston stem is permissable. Testing shall be as specified in 4.5.2.2.

* 3.3.1.4 Nitrogen filling valve. The nitrogen filling valve shall show no indication of leakage when observed for five (5) minutes. Testing shall be as specified in 4.5.2.2.

* 3.3.1.5 Foamed oil and contaminated oil. After proof firing and gymnastication oil shall be withdrawn slowly from the recoil mechanism into a straight sided glass beaker and examined within one (1) minute. The oil shall be five (5) percent or less foam by volume, and when exposed to the atmosphere for fifteen minutes, the aeration bubbles shall disappear. There shall be no sediment at the bottom of the glass beaker at any time. Testing shall be as specified in 4.5.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T
Check the source to verify that this is the current version b

3.3.2 Proof-firing. The recoil mechanism shall be subjected to proof-firing by firing four (4) Government standard rounds, 155 mm or equivalent, in accordance with Table II. A standard round is one employing a 95 pound inert projectile, powder loaded to give a muzzle velocity of 1,890 feet-per-second, and a average powder pressure of not less than 29,000 pounds per square inch nor more than 32,000 pounds per square inch. The recoil mechanism shall function without evidence of malfunction or failure. Testing shall be as specified in 4.5.2.3.

TABLE II

Proof-firing

No. of rounds	Percent of rated maximum pressure	Elevation
1	100	0°
1	115	65° (max)
1	100	65° (max)
1	100	0°

3.4 Marking. The recoil mechanism shall be marked in accordance with the drawings, and identified by a serial number assigned by the procuring activity (see 6.1).

3.5 Workmanship. Workmanship and finish shall be in accordance with the highest grade practice used in manufacturing military weapons. Finished items and parts shall not exhibit poor material and processing such as seams, laps, cracks, visible steps, sharp edges, nicks, scratches, burrs, deformations and missing operations which may affect serviceability, functioning, operation, appearance or safety. Fins and other extraneous metal shall be removed from cast or forged parts. Hammering to shape, salvage operations (including repair by welding) or other similar practice shall not be permitted without prior approval of the contracting officer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specifications where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-
Check the source to verify that this is the current versio

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)
b. Quality conformance inspection (see 4.5)

4.4 First article inspection. The first article (initial) production unit(s)) shall be submitted for inspection in accordance with the contract (see 6.1). The first article shall be representative of the production processes to be used during quantity production. The first article shall be subjected to the quality conformance inspection specified herein, and such other inspection as necessary to determine that all requirements of the contract have been met.

4.5 Quality conformance inspection.

* 4.5.1 Examination, inspection and test provisions. Quality assurance provisions used in conjunction with this specification specify those product characteristics considered to be minimum inspection requirements for acceptability to assure conformance with performance and interchangeability requirements of the item.

* 4.5.1.1 Parts inspection. Inspection of parts shall be as specified in the contract (see 6.1). All inspection records, including certified test reports, operator/process certifications, certification of conformance for Military Standards (MS) and commercial items for parts and assemblies shall be maintained on file and made available upon request.

* 4.5.1.2 The quality assurance provisions shall be applied at the earliest practical point in manufacture at which it is feasible to inspect for acceptance without risk of change in the characteristics by subsequent operations. Reinspections of these characteristics on the completed product is not required provided that assurance exists that the characteristic has not been changed, degraded, or damaged by subsequent manufacturing, assembly or handling, and that adequate inspection records are maintained. In any event, the Government reserves all rights under General Provisions, Standard Form 32 (Inspection Article 5).

4.5.1.3 Parts. Inspection of parts and subsequent assemblies shall be accomplished prior to assembly into the end item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17
Check the source to verify that this is the current version

* 4.5.1.4 In-Process Control. The contractor shall establish in-process inspection at strategically located points throughout his manufacturing processes to assure continuous control of product quality. Except for unmodified standard and commercial parts, the contractor's inspection system shall provide for inspection and approval of the first piece at each operation or the finished part before quantity production. In addition, the contractor shall provide and maintain work gages and other measuring and testing devices necessary to accomplish inspection and control quality during his manufacturing processes.

* 4.5.1.5 Inspection Records. Contractor's records of inspection shall be accurate, complete and available to the Government upon request. The contractor's records of inspection shall provide, as a minimum, the following information:

a. Contract order number.
b. Drawing and specification number.
c. Nomenclature.
d. Number of pieces inspected.
e. Individual characteristics inspected.
f. Conformance/nonconformance criteria.
g. Description and quantity of defects found.
h. Results of inspection (e.g., identification of nonconforming and of nonconforming product). Actual inspection and test results shall be recorded when actual measurements and tests were the basis for conformance/nonconformance decisions.
i. Date of inspection.
j. The following shall be included when sampling is used:

(1) Sampling plan.
(2) Acceptable Quality Levels (AQLs) used.
(3) Lot size and lot number.
(4) Sample size.

* 4.5.1.6 The contractor shall make available to the Government representative records of qualifications of operators and equipment for special processes (i.e., magnetic particle, radiographic, etc.), to applicable Government specifications and standards. This shall apply whether the special processes are performed at the sub-contractor's facility or at the contractor's plant. All inspection records, including certified test reports, operator/process certifications, test reports, reports of visits to subcontractors, etc., shall be maintained on file at the contractor's plant and made readily available to the Government representative, upon request, for the duration of the contract and for three (3) years thereafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-
Check the source to verify that this is the current versio

4.5.1.7 Examination.

4.5.1.7.1 Recoil mechanism. Each recoil mechanism shall be visually and manually examined to determine compliance with 3.2. Each step in the examination shall include a visual examination for proper cleaning and presence of the specified protective coating and to determine the general quality, completeness of manufacture, assembly , and workmanship. Recoil mechanisms failing to meet the requirements shall be rejected.

4.5.1.7.2 Alinement. Visually and manually examine each recoil mechanism for the requirements of 3.2.1.

4.5.1.7.3 Elevating arc. Visually and manually examine each elevating arc for the requirements of 3.2.2.

4.5.1.7.4 Marking. Visually examine each recoil mechanism for legibility, completeness of marking, and serial numbers in compliance with 3.4.

4.5.2 Testing.

* 4.5.2.1 Failure data. Unless otherwise specified herein, all tests shall be conducted on a complete recoil mechanism. If test requirements cited herein are not met, acceptance of the mechanism shall be deferred and the contractor shall accomplish as applicable, the following actions:

a. Conduct a failure analysis study performing a dimensional physical and visual examination of the components which are suspected to be the cause of failure or malfunction.
b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defect(s) in future production.
c. Examine mechanisms, partially assembled mechanisms, and components (including components and subassemblies at in-process or final assembly) to insure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.
d. Submit the results of the failure analysis and corrective actions taken to the Government for review and approval prior to submitting a reconditioned lot for retest.

4.5.2.2 Recoil mechanism testing. Each recoil mechanism shall be tested for performance and product characteristics (see 3.3.1 and 3.3.1.1 through 3.3.1.5) using the test method specified in 4.6.1 and 4.6.1.1 through 4.6.1.6. Failure of the recoil mechanism to meet the requirements shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T1
Check the source to verify that this is the current version bef

4.5.2.3 Proof-firing testing. Each recoil mechanism shall be proof-fired (see 3.3.2) using the test method specified in 4.6.2. Proof-firing shall be performed by the Government. Proof-firing for acceptance of the recoil mechanism may be combined with that of the weapon and carriage. In such combined tests, rounds in addition to those required by Table II may be fired. After completion of the proof-firing test the recoil mechanism shall be examined for leaks, breaks, deformations. Failure of the recoil mechanism to perform as intended shall be cause for rejection.

4.5.2.4 Certification Provisions.

* 4.5.2.5 Certified test reports (CTR). The contractor shall make available to the Government, a certified test report for each lot of parts, assemblies, subsystems and systems by lot number prior to acceptance. Certified test reports are NOT required for Military Standard (MS) and commercial items. This test report is in addition to and not in lieu of any rights of the Government under this contract or law. A CTR may be used as an element incident to, but shall not be used as the sole basis for, Government acceptance of the contract item(s). As a minimum, the report shall contain the following:

a. Name of company and date.
b. Contract number or purchase order number, national stock number and drawing number.
c. Complete nomenclature of supplies together with lot number or other identification. The quantity in each lot or shipment will be given.
d. All inspections and tests required by contract (i.e., material, processes, performance, functional, etc.) shall be recorded in test reports. These reports shall identify each lot, submitted for acceptance by lot number, the specification or drawing, revision and date, grade or type as applicable, number of specimens tested, specified characteristics and requirements, and actual results obtained.
e. Reports of the raw material producer's chemical and physical analysis.
f. A statement, as follows, certifying that material meets all requirements of the contract:

"The undersigned individually, and as the authorized representative of the contractor, warrants and represents that: All of the information supplied above is true and accurate; the material covered by this certificate conforms to all contract requirements (including but not limited to the drawings and specifications); the inspection and test results, and the analysis appearing herein are true and accurate; and this certificate is made for the purpose of inducing payment and with knowledge that the information and certification may be used as a basis for payment."

Source: https://assist.dla.mil -- Downloaded: 2026-10-1
Check the source to verify that this is the current version

g. Signature and title of certifying official.

* 4.5.2.6 Certificate of Conformance (COC). A Certificate of Conformance (COC) is required for Military Standard (MS) and commercial items. When a Certified Test Report (CTR) is NOT required for material and process specification requirements, a COC, supported by inspection and test data, material analysis, or certification, from the raw material producer or processor shall be made available to the Government for specifications covering raw material, processed material and processes. The contractor shall make the COC available to the Government prior to or with the request to perform acceptance inspection approval by the Government. This is in addition to and not in lieu of any rights of the Government under this contract or law. A COC may be used as an element incident to, but shall not be used as the sole basis for, Government acceptance of contract item(s). As a minimum, the COC shall contain the following:

a. Name of company and date.
b. Contract number or purchase order number, national stock number and drawing number.
c. Complete nomenclature of supplies together with lot number or other identification. The quantity in each lot or shipment will be given.
d. A statement, as follows, certifying that material meets all requirements of the contract:

"The undersigned individually, and as the authorized representative of the contractor, warrants and represents that: All of the information supplied above is true and accurate; the material covered by this certificate conforms to all contract requirements (including but not limited to the drawings and specifications); the analysis appearing herein is a true and accurate analysis; and this certificate is made for the purpose of inducing payment and with knowledge that the information and certification may be used as a basis for such payment."

e. Signature and title of certifying official.

* 4.5.3 Inspection equipment.

* 4.5.3.1 Acquisition, calibration, maintenance and disposition. Unless otherwise specified (see 6.2), responsibility for acquisition, calibration, maintenance and disposition of acceptance inspection and test equipment prescribed on the Data List, DL 7148074 and for all other inspection equipment required by applicable specifications shall be in accordance with MIL-I-45607 and MIL-C-10944.

Source: https://assist.dla.mil -- Downloaded: 2026-10-1
Check the source to verify that this is the current version

* 4.5.3.1.1 Alternative inspection methods and inspection equipment may be used by the contractor when such methods and equipment equal or exceed the specified accuracy and provide, as a minimum, the quality assurance required in the contractual documents. Prior to applying such alternative inspection methods and inspection equipment, the contractor shall describe them in a written proposal and shall demonstrate for the approval of the Procuring Contracting Officer (PCO) that their effectiveness is equal to or better than the contractual quality assurance method or equipment.

* 4.5.3.2 Contractor provided acceptance inspection and test equipment. Inspection and test equipment used shall be capable of repeatable measurements, by various experienced personnel, to an accuracy of 10% of the total tolerance of the characteristic being inspected.

a. The contractor shall be responsible for providing all standard measuring and test equipment required.
b. The contractor is responsible for providing such quantities of all inspection and test equipment as required to support:

(1) Similar multiple inspection at the contractor's facilities.
(2) Inspection operations at sub-contractor's facilities.
(3) Required periodic calibration, maintenance or replacement.

* 4.5.3.3 Equipment Utilization. Use of contractor's or Government-furnished inspection equipment, when desired by the Government Representative, shall be permitted without charge. Government- furnished acceptance inspection equipment shall not be used by the contractor in lieu of work gages and equipment.

4.5.3.4 Packaging examination and testing. Unless otherwise specified (see 6.1), the packaging and marking examination and testing shall be in accordance with inspection provisions A of MIL-P-14232.

4.6 Test methods.

4.6.1 Recoil mechanism test. The recoil mechanism shall be checked for nitrogen pressure, recoil oil, and other operating parameters specified on Drawing F7148074 prior to subjecting the recoil mechanism to the gymnastication test.

4.6.1.1 Mechanical gymnastication test. The recoil mechanism shall be mechanically gymnasticated for 25 cycles. Upon completion of gymnastication, the recoil mechanism shall be subjected to the testing specified below:

Source: https://assist.dla.mil -- Downloaded: 2026
Check the source to verify that this is the current ve

4.5.1.2 Oil leakage test. After the recoil mechanism has been gymnasticated, the recoil mechanism shall be completely wiped dry. The recoil mechanism shall set idle for a 24-hour period and leakage of oil shall not exceed two (2) cubic centimeters as specified in 3.3.1.1.

4.6.1.3 Friction test. Manometer readings shall be taken and recorded on the recoil rod assembly, counter recoil assembly, and on the floating piston assembly to determine that the friction of these components does not exceed the limits specified in Table I. This test should be repeated after gymnastication, proof-firing, and resting 48 hours.

4.6.1.4 Oil index test. After the reserve oil has been replaced, the oil index shall be examined for the requirements of 3.3.1.3.

4.6.1.5 Nitrogen filling valve test. The recuperator cylinder head assembly shall be mounted in a contractor designed government approved test fixture and subjected to 4200 pounds per square inch air pressure. There shall be no sign of leakage when observed for a period of five (5) minutes.

* 4.6.1.6 Foamed oil and contaminated oil test. Immediately after mechanical gymnastication and proof-firing, oil shall be withdrawn slowly from the mechanism into a glass beaker. The recoil mechanism shall be rejected, if after exposure to the atmosphere for one (1) minute the quantity of foam exceeds five (5) percent by volume, and when aeration bubbles in the oil do not disappear after exposure to the atmosphere for 15 minutes. In addition, the oil withdrawn for the above test shall be inspected for contaminated oil. Contaminated oil is when sediment appears at the bottom of the glass beaker after exposure to the atmosphere for one (1) hour.

4.6.2 Proof-firing test. Proof-firing of the recoil mechanism shall consist of firing both standard and specific pressure rounds of ammunition. Proof-firing shall be performed by the Government and shall be in accordance with Table II. Velocimeter records of recoil and counter recoil shall be taken during proof-firing if such action is deemed necessary by the inspector or contracting officer.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level A.

5.1.1.1 Cleaning. Exterior unpainted surfaces of the recoil mechanism shall be cleaned by process C-1 of MIL-P-116. Machined surfaces shall be cleaned by process C-8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T1
Check the source to verify that this is the current version be

5.1.1.2 Drying. All cleaned surfaces shall be dried by the applicable procedure specified in MIL-P-116.

5.1.1.3 Preservation.

5.1.1.3.1 Recoil mechanism bore. Apply preservation P-9 of MIL-P-116 to the interior surfaces of the recoil mechanism bore.

5.1.1.3.2 Unpainted exterior surfaces. Apply automotive and artillery grease P-11 of MIL-P-116 to all unpainted surfaces.

5.1.1.4 Unit packaging.

5.1.1.4.1 Equilibrator trunnions and trunnion bore. Wrap preserved surfaces of the equilibrator trunnions and trunnion bore with Type I, Grade A, Class 2 barrier material of MIL-B-121 and secure the wraps in place with Type III, Class 2, PPP-T-60 tape.

5.1.1.4.2 Connecting rod. The loose end of the connecting rod shall be securely wired to the recoil mechanism.

5.1.2 Level B. Level B shall be the same as specified for Level A.

5.1.3 Commercial. Not applicable.

5.2 Packing.

5.2.1 Level A. Fabricate and assemble a shipping container conforming with Class 2, Style B of MIL-C-104. The skid base shall be constructed as indicated in Figure 2 using the materials listed in Figure 1. Part 14 (Detail D) shall be assembled by nailing the four discs to the 4 x 4 inch blocks, two (2) discs on each end. Wrap Part 14 with barrier material conforming to Type I, Grade A, Class 2 of MIL-B-121 where the block comes in contact with metal surfaces and secure the wrap with Type III, Class 2 PPP-T-60 tape. Locate the wrapped block in the trunnion holes. Locate Parts 12 and 13 blocks (see Figure 1) and details E and F (Figure 4). Holes shall be drilled through blocks and sill (Part 4) in accordance with the drawings (see Figure 2). Secure blocks (Parts 12 and 13) to the sill base with a carrier bolt washer (MS35751-83), flat washer (MS27183-14), lock (MS35338-46) and (MS51967-8) - eight bolts, nuts and washers are required. After the nuts are tightened, apply a coating of P-1 preservative of MIL-P-116 on the exposed surface of carriage bolts to prevent backing off. Load the recoil mechanism onto the shipping base by slinging from an overhead crane and lowering it onto the container base, locating the wrapped equilibrator trunnion in the grooves of the support (Part 12). Part 15 is to be located on top of the trunnion. Align blocks 13 and 14 on the end of the arc and secure by nailing. Secure front trunnion to support (Part 12) with two pieces of Type I, Class B, QQ-S-781 steel strapping. An additional two of the forementioned steel

Source: https://assist.dla.mil -- Downloaded: 2026-10-17
Check the source to verify that this is the current version

straps shall be placed over the recoil mechanism, one adjacent the elevating arc and one adjacent to front yoke assembly (see Figure 2). Drill or punch four holes in one end of each strap and attach to the sill base by nailing. Secure strapping, with seals. Locate container top and close in accordance with MIL-C-104.

5.2.2 Level B. Level B shall be the same as specified for Level A.

5.2.3 Commercial. Not applicable.

5.3 Marking. Identification marking for the recoil mechanism shall be applied on a 14-inch x 20-inch x 3/8-inch plywood panel (NN-P-530). The panel shall be secured to the recoil mechanism with wire. Marking requirements shall be in accordance with MIL-STD-129.

SILL SKID-BASE BILL OF MATERIALS

PART NO.	ITEM DESCRIPTION	QTY REQ'D	MATERIAL	DIMENSIONS
1	Rubbing Strip	2	Wood	102 1/2" x 5 5/8" x 3/4"
2	Auxiliary Rubbing Strip	4	Wood	2" x 6" x 29 1/4"
3	Floor Board	1	Wood	101" x 28 1/2" x 3/4"
4	Side Sill (see Detail A)	2	Wood	2" x 6" x 99 1/2"
5	End Sill	2	Wood	2" x 6" x 23 3/4"
6	Bridging	2	Wood	2" x 6" x 16 15/16"
7	Bridging (see Detail B)	2	Wood	2" x 6" x 23 3/4"
8	Bridging	2	Wood	2" x 6" x 51 5/8"
9	Bridging (see Detail C)	2	Wood	2" x 6" x 23 3/4"
10	Bridging	2	Wood	2" x 6" x 7 15/16"
11	Support	2	Wood	7 5/8" x 5 5/8" x 3/4"
12	Support (see Detail E)	2	Wood	4" x 6" x 20 3/4"
13	Block (see Detail F)	2	Wood	22 3/8" x 7 5/8" x 3 1/4"
14	Support (see Detail D)	2	Wood	See Figure 3
14A	Disc	4	Plywood	4 3/4" Dia. x 3/4"
14B	Block	1	Wood	4" x 4" x 15"
15	Block (see Detail G)	1	Wood	1 5/8" x 2" x 5 5/8"

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T1
Check the source to verify that this is the current version be

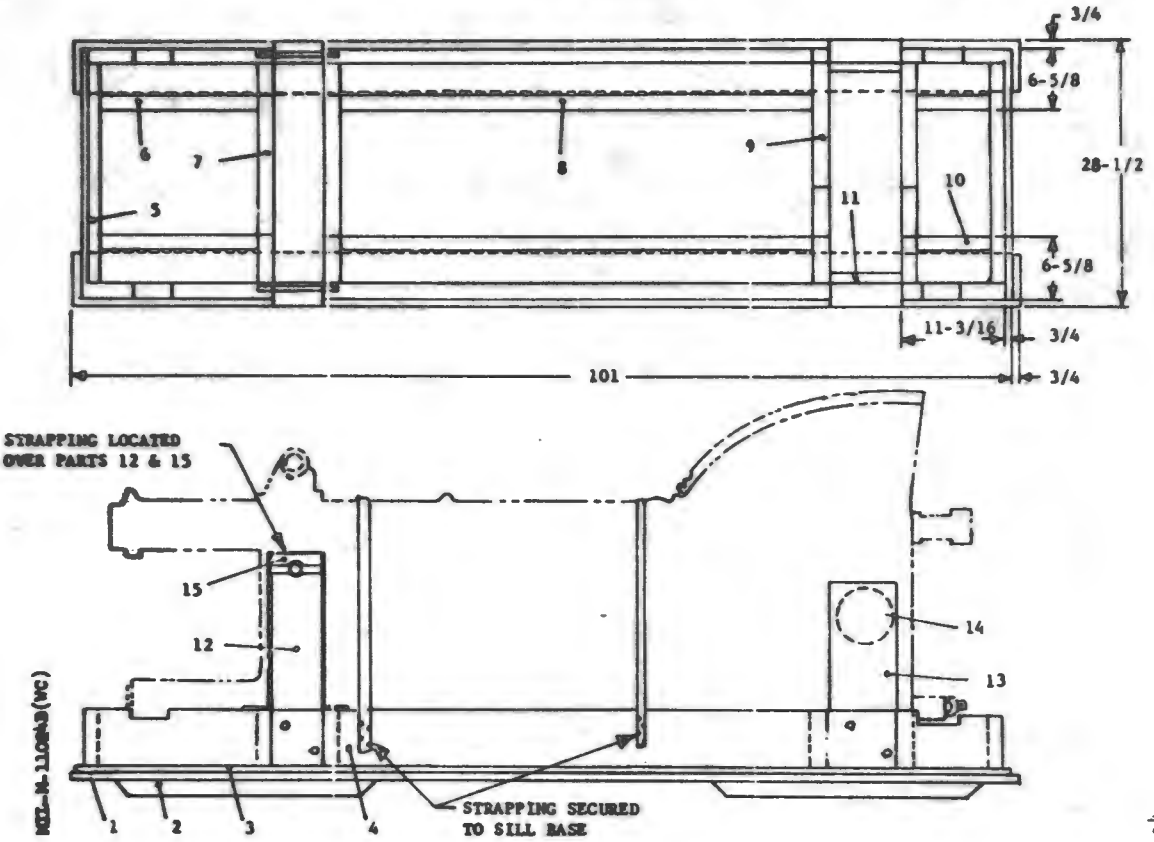


FIGURE 2 Sill Skid Base and Blocking Fabrication

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:002
Check the source to verify that this is the current version before use.


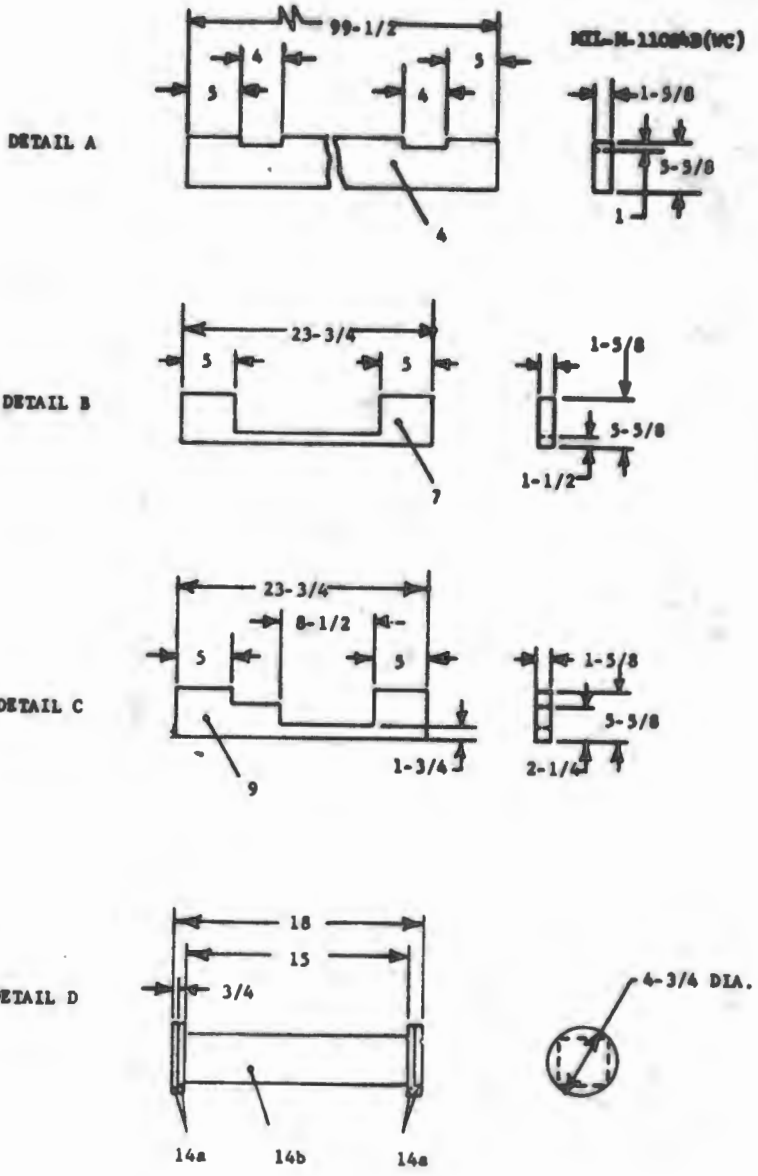



Figure 3 Blocking Fabrication

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:00Z
Check the source to verify that this is the current version before use.


DETAIL E

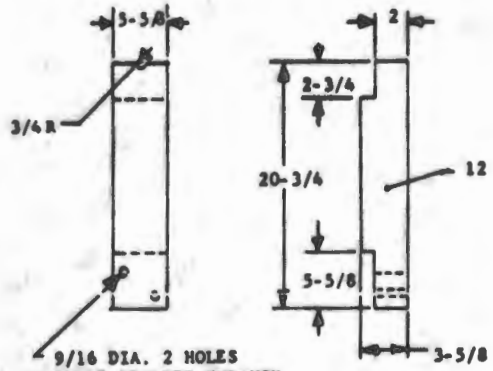

DETAIL F

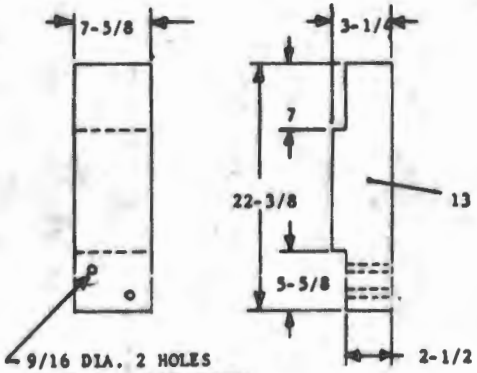

DETAIL G



16

Figure 4 Blocking Fabrication

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T1
Check the source to verify that this is the current version be

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements:

a. Title, number and date of this specification.
b. List of drawings and specifications pertinent to the recoil mechanism, showing applicable revision dates.
c. Shipping instructions for first article (see 3.1).
d. Block of serial numbers (see 3.4).
e. Examination criteria for components (see 4.5.1.1).
f. Index to lists of inspection gages and parts gaged pertinent to the recoil mechanism, showing applicable revision dates.
g. Packaging examination and testing, if different (see 4.5.3.4).
h. List of acceptance inspection equipment to be furnished the contractor (see 4.5.3.1) and responsibilities for other Government property to be furnished the contractor.

6.1.2 Contract data requirements. When warranted, requirements for reports of the results of examination and testing shall be specified on a DD Form 1423 included in the contract.

6.2 Unless otherwise specified (see 6.1) the contract should specify the application of MIL-I-45607 on the Management Control System Summary List, DD Form 1660.

6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - WC

Preparing activity:
Army - WC

Project number:
1025-A110

Source: https://assist.dla.mil -- Downloaded: 2026-10-1
Check the source to verify that this is the current version