MILITARY SPECIFICATION

CHASSIS, TANK: ARMORED VEHICLE, BRIDGE LAUNCHER, M60A1

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of full-tracked tank chassis which with subsequent adaption mounts a 60 foot launched bridge. This specification is limited to the vehicular chassis of the launcher.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: DRSTA-GSS, Warren, MI 48090, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC 2350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS
FEDERAL

TT-E-527	- Enamel, Alkyd, Lusterless.

MILITARY

MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-E-52798	- Enamel, Alkyd, Camouflage.
MIL-C-62779	- Chassis, Tank, Armored Vehicle, Bridge Launcher, M60A1 & M48A5; Processing for Storage and Shipment of.

STANDARDS
FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	- Identification Marking of U.S. Military Property.
MIL-STD-193	- Painting Procedures Tactical Vehicles (Tracked and Wheeled).
MIL-STD-1474	- Noise Limits for Army Materiel.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS
ARMY

10934200	- Tank, Chassis, M60A1, Transporter, AVL Bridge.
10934403	- Production Lubrication Chart.

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity, or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Preproduction model. When specified (see 6.2), a preproduction model of the chassis to be furnished under this specification shall be produced after award of contract and before beginning production. Preproduction model shall be representative of units to be manufactured in quantity, and shall be constructed with tools and equipment normally used in quantity production.

3.2 Initial production chassis. Chassis manufactured on initiation of quantity production shall be inspected and shall pass initial production inspection (see 4.4). Initial production chassis shall be representative of vehicles to be furnished under this specification and shall include all current modifications. No modifications shall be applied to subsequent chassis without prior approval of the Government.

3.2.1 Chassis reliability. Chassis shall demonstrate a minimum of 180 hours Mean-Time-Between-Failure (MTBF) during 4,000 miles of operational tests in accordance with the operational profile (see 3.2.3). For calculating MTBF, the definition of combat mission failures in the M60A1 Tank RAM-D failure definition and scoring criteria shall be used.

3.2.2 Chassis maintainability. The chassis shall not exceed the following maintenance ratios:

Organizational maintenance:	0.05
Direct support maintenance:	0.04
Combined maintenance:	0.09

The maintenance ratio shall be calculated by dividing the total maintenance man-hours (exclusive of daily crew checks and services) by the total operating hours.

3.2.3 Operational profile. Profile shall consist of:

a. 25 percent on paved roads, either concrete or asphalt or any combination of the two.
b. 25 percent on gravel and dirt roads with at least 10 percent of this distance under mud conditions.
c. 25 percent on level, cross country.
d. 25 percent on hilly, cross country.

3.3 Materials. Materials shall be as specified herein and in referenced specifications, standards and drawings. Material shall be free of defects which adversely affect performance or serviceability of the finished product (see 6.6).

3.3.1 Qualified products. The contractor shall be responsible for using parts and assemblies from Qualified Products Lists (QPLs) whenever available. Contractor's inspection records shall specifically list all QPL items by number and date of the QPL, name of supplier, and part or drawing number(s). When parts and assemblies are approved as qualified products but not yet listed on the QPL, the contractor shall list the products by number and date of the approved document and name of supplier(s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.3.2 Ozone resistance. When rubber components are required to be ozone resistant, the degree of resistance shall be as specified in applicable specifications or drawings.

3.4 Construction. Chassis components, subassemblies, and assemblies shall be fabricated into a complete chassis in accordance with Drawing 10934200, drawings subordinate to 10934200, and applicable specifications and standards. All parts requiring identification shall be marked in accordance with MIL-STD-130.

3.4.1 Welding repairs. Welding repairs of any type or class shall be made only when, and to the extent, specifically authorized by the acquisitioning activity.

3.4.2 Stowed equipment. The chassis shall be capable of stowing all on-vehicle equipment (OVE) items in the spaces provided.

3.4.3 Electrical system. The chassis electrical system shall consist of the hull electrical subsystem as described below. System shall be 24 volts direct current (VDC), nominal.

3.4.3.1 Power plant electrical. The power plant electrical equipment shall consist of the following: sending units necessary to provide engine data in the form of electrical signals to the operator's instrument panel, an engine electrical disconnect to facilitate engine removal and replacement, an electrical starter motor capable of starting the engine, and an air-cooled generator.

3.4.3.2 Interior lighting. Each crew position shall contain a domelight to provide general illumination when required. The domelight shall contain provisions for adjusting light intensity and red filter for night vision adaptation.

3.4.3.3 Auxiliary outlet. One outlet (24 Vdc nominal) shall be provided in the hull to mate with the OVE trouble light assembly. The auxiliary outlet circuit shall be protected with a 15 ampere, automatic reset, circuit breaker.

3.4.3.4 Engine manifold heater. The wiring for the engine manifold heater shall provide a switch-actuated chassis battery circuit to the engine. Operation of the pushbutton switch on the purge pump handle, with the starter switch depressed, shall provide chassis battery voltage to pin "a" of the multiple connector at the engine electrical quick disconnect.

3.4.3.5 Communications system power supply. Provisions shall be made through a mating connector to supply power to the communications system from the hull electrical system.

3.4.4 Fluid systems.

3.4.4.1 Hydraulic system. Provisions shall be made to assure internal cleanliness of the chassis hydraulic system. Hydraulic lines and connections shall be free from leakage in excess of a seep (see 6.5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.4.4.2 Fuel system. Provisions shall be made to assure internal cleanliness of the fuel system prior to initial fueling. Fuel system shall be free from leaks.

3.4.4.3 Fuel tanks (rapid fill). Fuel tanks shall be capable of receiving 50 gallons of fuel per minute.

3.5 Performance. After being subjected to the break-in run and procedures of 3.5.14, the chassis, loaded to simulate an M60A1 vehicle weight of 112,600 pounds (lbs), shall perform as specified herein under all operating conditions.

3.5.1 Power plant and power train. The power plant shall function throughout all gear and speed ranges without loss of lubricants or damage that may cause failure of the chassis. The power train and associated controls shall be capable of operation throughout all speed and steering ranges without binding of linkages, loss or lubricants, grabbing, chattering or slippage when controls are applied to steer, stop, or hold chassis.

3.5.2 Environments. The chassis shall operate in ambient air temperature of 115 degrees Fahrenheit (^{o}F) to -25°F and with special equipment installed, at temperatures to -65°F.

3.5.2.1 Cooling system. With chassis operating in ambient temperature of 115°F, the engine oil temperature shall not exceed 250°F at the heat exchanger outlet. The transmission oil temperature shall not exceed 300°F at the heat exchanger inlet. Temperature indicators on the driver's panel shall remain in the green area.

3.5.2.2 Level road acceleration. The chassis shall accelerate from a standing start on level road through a distance of 200 feet in a time period of not more than 13 seconds.

3.5.2.3 Level road speeds. Chassis shall operate at sustained speeds of 30 mph and 2.5 mph on level road without damage to power plant and power train.

3.5.2.4 Level road drift. When traveling between 25 and 30 mph on level road, in a straight line the chassis drift shall not exceed 3 feet in 100 feet, without manual steer correction.

3.5.2.5 Level road stopping. The chassis traveling at 20 mph on level road, shall stop within 60 feet from point of brake application. Drift shall not exceed 4 feet. Steering correction is allowed.

3.5.2.6 Grades and slopes. Chassis shall ascend longitudinal grades of 60 percent in forward and reverse gear without stalling or damage to power plant and power train. Chassis shall operate on right and left side slopes of 30 percent. During grade and slope operations, normal engine lubricating oil pressures shall be maintained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.5.2.6.1 Engine starting (grades and slopes). Chassis standing on a 60 percent grade for not less than 2 minutes and with engine idling under no load between 700 and 750 rpm, the engine shall be stopped for not less than 2 minutes. The engine shall restart in not more than 1 minute when headed either up or down grade. A similar engine stopping and starting test shall be accomplished on 30 percent right and left side slopes.

3.5.2.6.2 Fuel supply (grades and slopes). During engine operation, the fuel system shall maintain fuel supply to the engine when ascending and descending 60 percent grades in forward and reverse gear, and when chassis is being operated on 30 percent side slopes with either side of chassis up slope.

3.5.2.6.3 Holding. With the chassis standing on a 60 percent grade, with service brakes applied, the chassis shall be held stationary when headed either up or down grade. With parking brake engaged and all other holding devices inoperative, the chassis shall be held stationary when headed either up or down grade.

3.5.2.6.4 Grade speeds. The chassis shall operate at a sustained speed of 10 mph while ascending a 10 percent grade and at 20 mph while ascending a 3 percent grade.

3.5.2.7 Shallow water fording. Chassis shall ford a level, hard-bottom body of water 48 inches in depth, including wave, without special equipment. With the chassis standing in water 48 inches in depth for 30 minutes, the accumulation of water shall be not more than 1-1/2 inches on the crew compartment hull floor measured in the center of the "V".

3.5.2.7.1 Engine starting (shallow water). With the chassis standing for 30 minutes in water 48 inches in depth, the engine operating at 1,000 rpm for 15 minutes, then stopped for 15 minutes, the engine shall restart in not more than 3 minutes. All accessories shall function satisfactorily during and after fording operations.

3.5.2.7.2 Lubricant contamination. After fording operations, the water content of the transmission, engine, final drives, and suspension system lubricants shall be not more than 2 percent by volume.

3.5.2.8 Trench crossing. The chassis shall cross trenches 36 inches in depth and 102 inches in width without stalling or damage to suspension and other vehicle equipment.

3.5.2.9 Vertical obstacles. The chassis shall cross over vertical obstacles 36 inches in height while moving forward without stalling or damage to suspension and hull floor, speed not to exceed 5 mph.

3.5.2.10 Turning. The chassis shall turn 360° to the right and left in pivot, in neutral steer, within a circle 35 feet in diameter.

3.5.2.11 Sealing. Except as specified in 3.5.2.7.2, all seals and sealer shall prevent the entrance of water and foreign matter under all operating conditions. Static seals shall provide an interference fit of sealing surfaces preventing the leakage of fluids intended to be contained by

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

the seals. Dynamic seals shall prevent fluid leakage in the form of a drop (see 6.5.1) when the chassis is standing idle. Evidence of lubricant at seals specifically designed to allow exit of flushed lubricants shall be permitted.

3.5.2.11.1 Escape hatch seal. The escape hatch seal shall prevent entrance of water into the crew compartment, under all operating conditions.

3.5.3 Controls. When installed in accordance with applicable drawings, all electrical, mechanical, and hydraulic controls shall operate without malfunction throughout all ranges of operation under all chassis operating conditions.

3.5.4 Adjustment mechanisms. When installed and adjusted in accordance with applicable drawings, all adjustment mechanisms shall function properly and maintain adjustment settings during all chassis operating conditions.

3.5.5 Generator voltage. Generator voltage shall be regulated to not less than 27.8 Vdc and not more than 28.3 Vdc.

3.5.5.1 Generator blower motor. The generator blower motor shall be capable of delivering a constant flow of air through the generator.

3.5.6 Air cleaner blower motors. Each air cleaner blower motor shall provide a flow of air through each blower outlet. The air cleaner blower motors shall be wired to preclude blower operation when engine is not running.

3.5.7 Lights. All lights shall operate as specified on applicable drawings through all chassis operating conditions. All electrical contacts and connections shall maintain positive contact under all chassis operating conditions.

3.5.8 Locking, unlocking and actuated mechanisms.

3.5.8.1 Hull drain valves. After unlocking lever, the force required to operate the front drain valve lever shall not exceed 17 pounds at the end of the hand grip to actuate the valve a minimum of 3/8-inch travel. After unlocking lever, the force required to operate the rear drain valve lever shall not exceed 25 pounds at a point just below the knob to actuate the valve through a minimum of 11/16-inch travel.

3.5.8.2 Escape hatch release. The force required to operate the handle to release escape hatch shall be 50 $\pm$ 10 pounds pull at a point 1/2-inch from the end of the handle.

3.5.8.3 Operator and assistant operator's seat. With the operator or assistant operator in seated position, the force required to actuate the fore and aft seat adjustment lever shall not exceed 12 pounds at the end of the lever.

3.5.8.4 Fuel shutoff valve. The engine shall stop firing and rotating within a maximum of 30 seconds after the manual fuel shutoff valve is actuated to the "OFF" position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.5.9 Fire extinguisher. The fixed fire extinguisher system, when installed in accordance with applicable drawings, shall be readily accessible for operation internally or externally. Actuating the internal controls shall simultaneously stop the supply of fuel to the engine. The maximum effort required to discharge the system either internally or externally shall be not more than 55 pounds. A time delay of more than 6 seconds but less than 11 seconds shall occur on the first shot between actuating of the release mechanism and entrance of CO_2 into the engine compartment.

3.5.10 Personnel heater. The heater shall be capable of starting with the switch in either high or low position. The blower motor shall operate at reduced speed when the heater is turned on. The burner shall ignite within 4 minutes of heater turn-on. Subsequent to ignition, the heater shall be capable of generating high or low heat and the blower motor shall run at full speed. Turning the heater "off" shall cause both the burner to extinguish and the blower motor to shut off within 3.5 minutes.

3.5.10.1 Heater fuel pressure. With either of the fuel system pumps and the heater pump operating, the chassis fuel system shall produce a minimum pressure of 7 pound per square inch (psi) at the outlet of the heater pump line.

3.5.11 Engine smoke generator. The chassis shall discharge smoke from both exhaust pipes when the engine is running and the smoke generator switch is in the "on" position.

3.5.11.1 Smoke grenade discharger circuits.

3.5.11.1.1 Arming. The power-on (ready) lamp in the grenade power box shall illuminate when the master battery switch and the grenade system power switch are both ON.

3.5.11.1.2 Circuit voltage. Voltage at the smoke grenade discharger firing pins shown in figure 2 shall be indicated at Table I when the power-on (ready) lamp in the grenade power box is illuminated and the appropriate firing pushbutton is actuated.

TABLE I. Smoke grenade discharger firing pin voltage.

Firing Pushbutton	Left side Discharger Firing pins	Right side Discharger Firing pins	Voltage
Right	1, 2, 5	3, 4, 6	Vehicle (Ref. 3.4.3.1.1)
Right	3, 4, 6	1, 2, 5	0 ± 0.5 Vdc
Left	3, 4, 6	1, 2, 5	Vehicle (Ref. 3.4.3.1.1)
Left	1, 2, 5	3, 4, 6	0 + 0.5 Vdc

3.5.12 Vibration and noise level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.5.12.1 Equipment and operation. Equipment operation shall not exceed the maximum acceptable noise level specified in table II.

TABLE II. Maximum acceptable noise levels for army Materiel command equipment (continuous noise).

Octave band center frequency (Hz)	Maximum acceptable noise level (db ref. 0.0002 microbar)
63	121
125	111
250	103
500	102
1000	100
2000	100
4000	100
8000	100

3.5.12.2 Operator's protection. Noise hazard caution signs shall be posted in all crew stations. The signs shall be clearly visible to all personnel.

3.5.13 Painting, marking, and data plates.

3.5.13.1 Painting. The exterior and interior of the chassis and all components that require painting shall be prepared and painted in accordance with MIL-STD-193. Chassis exterior paint shall be forest green camouflage, lusterless, alkyd enamel conforming to MIL-E-52798. The engine compartment paint shall be gloss white, matching color chip 17875 of MIL-STD-595. The crew compartment paint shall be semigloss green, matching color chip 24533 of MIL-STD-595. All sliding parts and operating contact surfaces shall be free of paint.

3.5.13.2 Marking. Marking and marking paint shall conform to TT-E-527. Marking paint shall be lusterless black, matching color chip 37038 of FED-STD-595.

3.5.13.3 Identification and data plates. All plates shall be in accordance with applicable drawings.

3.5.14 Break-in run. The break-in run will include preliminary checks of suspension, controls, power plant, etc., and provide wear-in for final adjustments. The break-in run will include the following activities and conditions:

a. Preparation. Prior to break-in run, except for equipment and component installations and servicing performed by the contractor as a final processing of the chassis for acceptance, the chassis shall be completely assembled and all adjustments completed. The chassis, including all applicable components requiring lubrication, shall be lubricated in accordance with production lubrication chart D 10934403. Engine oil conforming

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

to the applicable seasonal grade of MIL-L-2104 shall be used. Specific applications by grades or types for various expected seasonal temperature ranges shall be as specified. Fuel/water separator and primary fuel filter shall be bled of air by loosening each respective bleed plug and operating the in-tank fuel pump. After air is bled, tighten the bleed plugs.

b. Oil pressure and temperature. Prior to the start of the break-in run, the engine shall be operated at 800 to 1200 rpm until lubricating oil is at operating pressure and temperature. If at any time during break-in run, the engine has been stopped for at least 30 minutes, the engine shall again be operated as above before continuing break-in run. Proper oil pressure and temperature shall be maintained during operation on level ground, 60 percent grades, and 30 percent side slopes.

c. Operation and distance. Each chassis shall be given a break-in run for the distances specified in table III on smooth, level, hardsurfaced roads. The chassis shall be operated over the undulating section of road (see figure 1) during "a" and "b" divisions of the break-in run, the undulating section will be bypassed.

TABLE III. Speeds and distances for break-in run.

Division of run	Speed mph	Distance miles	Test conditions
a	0 to 10	10	Track (road)
b	11 to 15	15	Track (road)
c	16 to 20	10	Track (road)
d	21 to Max.	10	Track (road)

d. Reverse operation. After each division of the break-in run, the chassis shall be stopped, the engine allowed to idle for not less than 2 minutes, and then driven in reverse for a distance of not less than 50 feet at speeds between 2 and 7 miles per hour (mph).

e. Condition after run. After completion of the break-in run, the engine shall idle between 700 and 750 rpm. Prior to chassis being submitted to the Government for acceptance, all suspension wheel bearings shall be checked to determine if adjustments are correct and readjusted as required. There shall be no defects indicative of damaged components or maladjustments that may cause faulty chassis operation.

3.5.15 Workmanship. Workmanship shall be of a quality to assure that chassis and components are free from defects of a workmanship nature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Materials and qualified products. The contractor's records shall be reviewed to determine conformance to 3.3, 3.3.1 and 3.3.2.

4.1.2 Parts and components. Parts, components, and assemblies shall be inspected for conformance to requirements of drawings subodinate to 10934200 and applicable specifications and standards. When applicable, inspection shall also be in accordance with Supplementary Quality Assurance Provisions (SQAPs) or Quality Assurance Requirements (QARs).

4.1.3 Subjection to break-in run. To determine conformance to 3.5, each chassis shall be subjected to the break-in run prior to being subjected to its appropriate inspection, see 4.2.

4.2 Classification of inspections. Classification of inspections shall be as follows:

a. Preproduction model inspection (see 4.3 and 6.2).
b. Initial production vehicle inspection (see 4.4).
c. Quality conformance inspection (see 4.6).

4.3 Preproduction model inspection. One preproduction model sample (see 3.1) shall be inspected at a location approved by the Government to determine conformance to requirements of this specification. Inspection shall consist of examination as specified in 4.5.2 and all tests specified herein.

4.3.1 Failure. Failure to pass any examination or test or defects in excess of acceptable quality levels (AQLs) specified, shall be cause for refusal to grant preproduction model approval.

4.4 Initial production chassis inspection. On beginning production, three vehicles shall undergo, and shall pass, initial production inspection (see 3.2). One vehicle shall undergo first production vehicle inspection and the second and third chassis will be subjected to the initial production test.

4.4.1 First production chassis inspection.

4.4.1.1 In-process examination. During fabrication of the first production chassis, an in-process examination will be conducted by representatives of TACOM Product Assurance Directorate to evaluate conformance of materials and workmanship to specified requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

Examination shall be made at the contractor's or subcontractor's facility prior to application of primer and paint. Processing and welding procedures, quality system, and inspection records shall be evaluated during this examination.

4.4.1.2 Completed first production chassis contractor inspection. The first completed production vehicle shall be road tested and inspected by the contractor, as specified in 4.5.5, to determine conformance to contract and specifications. After inspection, the contractor shall submit the vehicle (and all inspection records and certifications) to the responsible Government inspection element at contractor's plant for preliminary examination.

4.4.1.3 Preliminary examination. The responsible Government inspection element will conduct a preliminary examination, as specified in 4.5.2, of the first completed production chassis.

4.4.1.4 Provisional inspection. Provisional inspection of the first completed production chassis shall be conducted jointly by representative of TACOM Product Assurance Directorate and the responsible Government inspection element. Contractor shall provide any required assistance. Testing shall be as specified in 4.5.5. Contractor shall make available his inspection plan, records, and certifications pertinent to the chassis and components.

4.4.1.5 Repair of defects. Defects, found as a result of the foregoing inspections, shall be corrected by the contractor at no cost to the Government. Failure of the contractor to correct defects promptly shall be cause for suspension of acceptance of chassis until corrective action has been approved by the Government.

4.4.1.6 Chassis disposition. On completion of first production chassis inspection, the chassis shall remain at the manufacturing facility, as a production sample, and shall be the last chassis shipped on contract. Chassis may be released sooner at the discretion of the Government. The contractor shall service and maintain chassis during this period.

4.4.1.7 Final approval and acceptance. Final approval and acceptance of the first production chassis shall be withheld until the second and third chassis are accepted (see 4.4.2).

4.4.2 Second and third initial production chassis inspection. Two additional chassis (see 4.4) from the first month production or the first 20 produced, shall be subjected to the initial production test.

4.4.2.1 Initial production test. To determine conformance to Section 3 (inclusive), vehicles will be examined as specified in 4.6.2 and tested as specified in table VI. Subsequently, the vehicles shall be tested as specified in 4.4.2.2. Tests shall be performed by the Government at a site approved by the Government and shall require no more than 120 days. Delays caused by vehicle breakdown due to poor quality of workmanship or material or failure of the contractor to comply with specification or drawing requirements, shall not be the basis for adjustment of the contract performance dates, delivery schedule, or contract price. The contractor shall expeditiously furnish repair parts as required to support testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.4.2.2 Test profile. Second test chassis shall be subjected to four repetitions of the 1,000 mile cycle contained in table IV for a total test mileage of 4,000 miles. Third test chassis shall be subjected to the initial production tests outlined in table VI and then to four repetitions of the 1,000 mile cycle contained in table IV.

TABLE IV. One-thousand mile test cycle.

Course	Mileage and speed 1/
Hard-surfaced roads	250
Gravel and dirt roads	250
Level cross-country	250
Hilly cross-country	250

1/ Speeds shall be varying up to the maximum safe speed in all applicable gear ranges depending on course and conditions.

4.4.2.3 Reliability verification. To determine conformance to 3.2.1, a point estimate of the MTBF equal to greater than 180 hours must be demonstrated during the test.

4.4.2.4 Maintainability verification. To determine conformance to 3.2.2, it shall be determined, during test, that point estimates of maintenance ratios are not exceeded.

4.4.2.5 Failure. Failure of the chassis attributable to a deficiency in workmanship or materials, during or as a result of the test, shall be cause for rejection of the chassis. Further, the Government may refuse to continue acceptance of production chassis until evidence has been provided by the manufacturer that corrective action has been taken to eliminate the cause of the deficiency. Any deficiency found during or as a result of the test, shall be prima facie evidence that all chassis already accepted prior to completion of the IPT, are similarly deficient unless evidence satisfactory to the contracting officer is furnished by the contractor that they are not similarly deficient. Such deficiencies on all chassis shall be corrected by the contractor at no cost to the Government.

4.5 Quality conformance inspection.

4.5.1 Inspection provisions.

4.5.1.1 Lot size. An inspection lot shall consist of all chassis produced during an identifiable production period and submitted at one time for acceptance inspection. Production period shall not exceed 1 month.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.5.1.2 Sampling for examination. For the purpose of visual, dimensional, and primary function examination, a representative sample shall be selected from each inspection lot in accordance with inspection level II of MIL-STD-105. Before sampling, the contractor shall 100 percent examine the first 10 vehicles to establish a process average (see 6.4), to allow normal sampling in accordance with MIL-STD-105.

4.5.1.3 Sampling for tests. All chassis of the lot shall be quality conformance tested, see 4.5.4.

4.5.2 Examinations. Visual, dimensional, and primary functional examination shall consist of examination of the chassis for conformance to applicable drawings and this specification. Examinations shall be performed against the classification of defects and with the acceptable quality levels (AQLs) specified in table V. Defects found during examinations shall be listed on the deficiency sheet for the chassis. The following constitutes a part of the classification of defects (see 6.5.3):

a. Any weep constitutes a minor defect.
b. Any seep constitutes a minor defect.
c. Any drip constitutes a major defect when the vehicle has been standing idle and the components are at ambient temperature.
d. Any droplet that occurs at a static fit, metal to metal, or gasket combination shall constitute a major defect.

TABLE V. Classification of defects.

Category	Defect	Method of examination
Major:	AQL 25 defects/100 units	
101	Engine; malfunction, leaks, mounting improper. 1/	Visual and functional
102	Transmission; malfunction, leaks.	Visual and functional
103	Transfer gear differential steer and final drive units: malfunction, leaks.	Visual and functional
104	Fuel system components: malfunction, leaks. 1/	Visual and functional
105	Cooling system components; malfunction, damage, leaks.	Visual and functional
106	Instrumentation, switches, warning, indicating and safety devices; malfunction, damage, calibration.	Visual and functional
107	Electrical system components circuits, and communication system; malfunction, lighting sequence improper. 2/	Visual and functional
108	Suspension system, components; adjustments, damage, leaks, clearance improper, misalignment.	Visual and functional SIE 3/
109	Tracks; damage, pad separation.	Visual and SIE 3/

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects - Continued.

Category	Defect	Method of examination
110	Hatch covers; fit improper, malfunction, leaks, damage, non-conformance.	Visual and functional
111	Hydraulic components; malfunction, leaks, damage.	Visual and functional
112	Vision devices and receptacles; damage, malfunction.	Visual and functional
113	Covers, grilles, ducts, vents, panels, stowage boxes, seats, fenders, and hardware; malfunction, locking devices, damage.	Visual and functional
114	Controls; malfunction, clearance improper.	Visual and functional
115	Track device sprockets and drive shafts; damage, clearance improper.	Visual and SIE 3/
116	Adjustment mechanisms; malfunction, clearance improper.	Visual and functional
117	Hull; structural and welding defects.	Visual and functional
118	Towing pintle, lifting eyes, hooks and brackets malfunction, defects.	Visual and functional
119	Seats, crash pads, and straps; damaged, seat control malfunction.	Visual
120	Fire extinguisher system control; seals missing, components damage.	Visual
121	Wire, tubing or hoses; defective, damage.	Visual
122	Hydraulic control system; malfunction, damage, droplets.	Visual and functional
123	Manual back-up hydraulic pump; damaged, malfunction, clearance improper.	Visual and functional
124	Control panel; malfunction, damage, improper indicators.	Visual and functional
125	Lubrication and lubricants; contamination.	Visual
Minor:	AQL 150 defects/100 units	
201	Engine; improper component assembly.	Visual and functional
202	Transmission; improper component assembly or installation.	Visual and
203	Transfer gear, differential steer and final drive units; improper component assembly or installation.	Visual and functional
204	Fuel system components; improper line clearance, assembly or installation. 1/	Visual and functional
205	Cooling system components; improper assembly or installation.	Visual and functional
206	Instrumentation, switches, warning, indicating and safety devices; improper assembly or installation.	Visual and functional

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects - Continued.

Category	Defect	Method of examination
207	Electrical system components, circuits, and communications system; improper assembly or installation. 2/	Visual and functional
208	Suspension system components and adjustments; improper installation or assembly, bolt or nut torque.	Visual and functional SIE 3/
209	Tracks; tension, installation or assembly improper, including bolt torque, damage.	Visual and SIE 3/
210	Hatches, covers; improper assembly or installation.	Visual and functional
211	Hydraulic components; improper assembly or installation, fluid level and type.	Visual and functional
212	Vision devices and receptacles; improper assembly, installation or clearance.	Visual and functional
213	Covers, grilles, ducts, vents, panels, stowage boxes, seats, fenders, and hardware: improper fits, adjustment, installation or defective welds, seals, adhesion, hardware or sheet metal.	Visual and funtional
214	Controls; improper assembly, or installation.	Visual and SIE 3/
215	Track drive sprockets and drive shafts; improper assembly, installation or bolt torque.	Visual and SIE 3/
216	Adjustment mechanisms; improper assembly, or installation.	Visual and functional
217	Towing pintle, lifting eyes, hooks and brackets; improper fit, installation assembly, or adhesion welding defects, damaged.	Visual and functional
218	Seats, crash pads, and straps; data card incomplete, improper assembly or installation, fit or adhesion, welding defects.	Visual and functional
219	Fire extinguisher system control; data card incomplete, improper assembly, installation, coding or protection.	Visual
220	Wiring, tubing or hoses; defective, missing, improper installation, coding or protection.	Visual
221	Paint; application or color improper.	Visual
222	Tube fittings; defective, missing, improperly installed.	Visual
223	Decals, marking data and instruction plates; missing, improper location or size, defective.	Visual
224	Lubrication and lubricants; improper application, types and levels.	Visual
225	Protective and anti-skid coatings; application, materials and coverage improper.	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects - Continued.

Category	Defect	Method of examination
226	Record forms, and publications; missing, improperly processed or secured.	Visual
227	Manual backup, hydraulic pump; improper installation.	Visual and functional
228	Hydraulic control system; improper assembly, installation, fluid level, precharge pressure	Visual and functional
229	Fasteners; improper assembly, torque.	Visual and functional

1/ Fuel leaks constitute a special defect and will result in total inspection of the lot for this defect.
2/ Filament failures are not to be classified as major or minor defects.
3/ SIE means Standard Inspection Equipment.

4.5.2.1 Unclassified defects. Defects considered to be departures from good workmanship but having no bearing on function, safety, interchangeability, or life shall be noted in writing. Such defects recurring in five consecutive lots or ten lots or more within a 30 day period, will be added to the minor classification of defects with no increase in AQL. A workmanship defect may be dropped from the minor classification or characteristics when five consecutive lots are found free from the defect.

4.5.2.2 Examination failure. If a vehicle fails to pass any examination specified herein, the Government shall stop acceptance until evidence has been provided by the contractor that corrective action has been taken.

4.5.3 Classification of tests. Classification of tests shall be as follows:

a. Quality conformance tests (see 4.5.4).
b. Control tests (see 4.5.5).
c. Comparison tests (see 4.5.6).

4.5.4 Quality conformance tests. To determine conformance to Section 3 (inclusive), the contractor shall subject each chassis to the quality conformance tests specified in table VI. After the tests, the chassis shall be examined for evidence of fuel or lubricant leakage or other defects. All defects found during tests shall be listed on the deficiency sheet for the quality conformance (see 6.7).

4.5.4.1 Test failure. If a chassis fails to pass any quality conformance test specified herein, the Government shall withhold acceptance of subsequent chassis until evidence has been provided by the contractor that corrective action has been taken.

4.5.5 Control tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.5.5.1 Frequency. One of the first 10 chassis produced and thereafter one permonth shall be selected at random by the Government, for control testing after break-in run.

4.5.5.2 Control test procedure. Chassis selected for control testing shall be loaded in accordance with 3.5 and shall be operated for a distance of not less than 5 miles. Subsequently, chassis shall be subjected to quality conformance examinations (see 4.5.2), acceptance tests (see 4.5.4), and control tests specified in table VI.

4.5.5.3 Failure. If the chassis fails to pass any control test specified herein, the Government shall withhold acceptance of subsequent chassis until evidence has been provided by the contractor that corrective action has been taken.

4.5.6 Comparison tests. The Government may select chassis at any time during the contract production period and subject them to the examinations specified in 4.6.2 and all tests specified in table VI to compare existing chassis quality with previous standards; and to reveal operation of the chassis in the field. These tests shall be conducted at Government laboratories or proving grounds designated by the contracting officer.

4.5.6.1 Chassis selection. Chassis selected for comparison testing shall have passed quality conformance examination and quality conformance testing but shall not have been control tested. Chassis shall be loaded in accordance with 3.5.

4.5.6.2 Test failure. Failure of any chassis tested to conform to any of the requirements specified in the contract or any major defects of a workmanship or materials nature, occuring during or as a result of the test cycle, may be considered cause for refusal to continue acceptance of chassis by the Government until objective action has been taken to eliminate the cause of failure. Any defect found during or as a result of the test shall be prima facie evidence that chassis accepted subsequent to the accepted initial production test vehicle or previous acceptable comparison test, are similarly defective, unless evidence satisfactory to the contracting officer is furnished by the contractor that they are not similarly defective. Such defects on all chassis shall be corrected by the contractor at no cost to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification and location of inspections and tests.

Title	Requirement	Preproduction and initial production 1/	Quality conformance 2/	Control 2/
Construction	3.4	4.6.1	4.6.1	4.6.1
Performance	3.5	4.6.2		4.6.2
Power plant and power train	3.5.1	4.6.3		4.6.3
Environments	3.5.2	4.6.4		4.6.4
Cooling system	3.5.2.1	4.6.4.1		4.6.4.1
Acceleration	3.5.2.2	4.6.5		4.6.5
Level road speeds	3.5.2.3	4.6.6	4.6.6	
Level road drift	3.5.2.4	4.6.7	4.6.7	
Level road stopping	3.5.2.5	4.6.8	4.6.8	
Grades and slopes	3.5.2.6	4.6.9	4.6.9	
Engine starting (grades and slopes)	3.5.2.6.1	4.6.9	4.6.9	
Fuel supply (grades and slopes)	3.5.2.6.2	4.6.9	4.6.9	
Holding	3.5.2.6.3	4.6.9	4.6.9	
Grade speeds	3.5.2.6.4	4.6.9	4.6.9	
Shallow water fording	3.5.2.7	4.6.10	4.6.10	
Engine starting (shallow water)	3.5.2.7.1	4.6.10.1	4.6.10.1	
Lubricant contamination	3.5.2.7.2	4.6.10.2	4.6.10.2	4.6.10.2
Trench crossing	3.5.2.8	4.6.11		4.6.11
Vertical obstacles	3.5.2.9	4.6.12		4.6.12
Turning	3.5.2.10	4.6.13	4.6.13	
Sealing	3.5.2.11	4.6.14		4.6.14
Escape hatch seal	3.5.2.11.1	4.6.15	4.6.15	
Controls	3.5.3	4.6.16	4.6.16	
Adjustment mechanisms	3.5.4	4.6.16	4.6.16	
Generator voltage	3.5.5	4.6.17	4.6.17	
Generator blower motor	3.5.5.1	4.6.17	4.6.17	
Air cleaner blower motor	3.5.6	4.6.18		4.6.18
Lights	3.5.7	4.6.19	4.6.19	
Driver night viewer power circuit	3.5.7.1	4.6.19		4.6.19
Locking, unlocking and actuated mechanisms	3.5.8			
Hull drain valves	3.5.8.1	4.6.20		4.6.20
Escape hatch release	3.5.8.2	4.6.21	4.6.21	
Operator and assistant operator's seat	3.5.8.3	4.6.22	4.6.22	
Fuel shutoff valve	3.5.8.4	4.6.23		4.6.23
Fire extinguisher	3.5.9	4.6.24	4.6.24	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification and location of inspections and tests - Continued.

Title	Requirement	Preproduction and initial production 1/	Quality conformance 2/	Control 2/
Personnel heater	3.5.10	4.6.25	4.6.25	
Heater fuel pressure	3.5.10.1	4.6.25		4.6.25
Engine smoke generator	3.5.11	4.6.26		4.6.26
Vibration and noise level	3.5.12			
Equipment operation	3.5.12.1	4.6.27		4.6.27
Operator's protection	3.5.12.2	4.6.27	4.6.27	
Painting, marking and data plates	3.5.13			
Painting	3.5.13.1	4.6.28	4.6.28	
Marking	3.5.13.2	4.6.28	4.6.28	
Data plates	3.5.13.3	4.6.28	4.6.28	
Break-in run	3.5.14	4.6.29	4.6.29	
Workmanship	3.5.15	4.6.30	4.6.30	

1/ = Government Proving Ground.
2/ = Contractor Premises.

4.6 Methods of inspection.

4.6.1 Construction examination. Conformance to 3.4 (inclusive) shall be determined during visual, dimensional, and primary functional examination (see 4.5.2).

4.6.2 Performance tests. Conformance to 3.5 shall be determined during all tests specified in table VI.

4.6.3 Power plant and power train test. Conformance to 3.5.1 shall be determined during steering and braking tests (see 4.6.8 and 4.6.13).

4.6.4 Environments test. Conformance to 3.5.2 shall be determined during initial production and comparison tests (see 4.4.2.1 and 4.5.6).

4.6.4.1 Cooling system test. Conformance to 3.5.2.1 shall be determined during initial production and comparison tests (see 4.4.2.1 and 4.5.6).

4.6.5 Acceleration test. To determine conformance to 3.5.2.2, the chassis shall be operated as specified and performance timed.

4.6.6 Level road speeds test. To determine conformance to 3.5.2.3, the chassis shall be operated under specified conditions. A speed of not less than 30 mph shall be maintained for 10 minutes with engine at full governed speed. A speed of not less than 2.5 mph shall be maintained 5 minutes with engine at full governed speed and transmission in low gear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.6.7 Level road drift test. To determine conformance to 3.5.2.4, chassis shall be operated on smooth, paved surface at speed indicated. Test shall be run twice in each direction and the average drift at end of four runs shall not exceed requirements.

4.6.8 Level road stopping test. To determine conformance to 3.5.2.5, the chassis shall be operated on smooth, paved surface at speed indicated. Stopping distance shall be measured and shall not exceed requirements.

4.6.9 Grade and slope tests. To determine conformance to 3.5.2.6, 3.5.2.6.1, 3.5.2.6.2, 3.5.6.3, and 3.5.6.4, chassis shall be operated on the grades and slopes indicated and performance observed.

4.6.10 Shallow water fording test. To determine conformance to 3.5.2.7, chassis shall be operated in 48 inches of water for not less than the time indicated and water depth in the hull measured.

4.6.10.1 Engine starting (shallow water) test. To determine conformance to 3.5.2.7.1, the chassis and the engine, shall be operated as required and the engine observed for proper restart within indicated time. Accessories and instruments shall be observed for proper operation.

4.6.10.2 Lubricant contamination test. To determine conformance to 3.5.2.7.2, after completion of fording test, lubricant samples shall be tested for water content. Test results shall be submitted to the Government inspector.

4.6.11 Trench crossing test. To determine conformance to 3.5.2.8, chassis shall be operated over obstacles of the dimensions stated and observed for performance and visually examined for physical damage.

4.6.12 Vertical obstacles test. To determine conformance to 3.5.2.9, chassis shall be operated over obstacles of the dimensions stated, observed for performance, and visually examined for physical damage.

4.6.13 Turning test. To determine conformance to 3.5.2.10, chassis shall be operated as stated. When measured, the pivot-circle shall not exceed requirement.

4.6.14 Sealing test. To determine conformance to 3.5.2.11, seals shall be visually examined after completion of all mobile tests.

4.6.15 Escape hatch seal test. To determine conformance to 3.5.2.11.1, chassis shall be exposed to heavy-rain conditions (natural or simulated) and hatch seal visually examined for leakage. Hatch shall also be observed for leakage during fording test (see 4.6.10).

4.6.16 Controls and adjustment mechanisms test. To determine conformance to 3.5.3 and 3.5.4, controls shall be observed for proper function during mobile test operations. After mobile test operations, adjustment mechanics shall be observed for adjustment maintenance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.6.17 Generator and blower tests. To determine conformance to 3.5.5 and 3.5.5.1 with engine running at various speeds, generator voltage shall be tested for requirements. Air flow to the generator shall be observed for continuous flow.

4.6.18 Air cleaner blower test. To determine conformance to 3.5.6 with engine running, all air outlets shall be examined for continuous air flow. Further examination shall show that air flow stops when engine is switched off.

4.6.19 Lights. Conformance to 3.5.7 and 3.5.7.1 shall be determined during visual, dimensional, and primary functional examination (see 4.5.2).

4.6.20 Hull drain valves test. To determine conformance to 3.5.8.1, drain valve levers shall be unlocked and the effort required to open the valves measured. Effort shall not exceed requirement for each valve.

CAUTION: Valves shall be closed and locked after test.

4.6.21 Escape hatch release test. To determine conformance to 3.5.8.2, the force required to release hatch locking device shall be measured and shall be within required tolerances. Hatch shall be reclosed and chassis subjected to shallow water fording test (see 4.6.10).

4.6.22 Operator's seat test. To determine conformance to 3.5.8.3, with an average weight person (180 pounds nominal) in the seat, force required to actuate adjustment lever shall be measured and shall not exceed requirement.

4.6.23 Fuel shut-off test. To determine conformance to 3.5.8.4, the engine shall be operated at 50 percent of governed rpm, manual shut-off valve shall be actuated to "off" position. Time required for engine to stop shall be measured and shall not exceed requirement.

CAUTION: Fuel valve shall be returned to "ON" position and the system primed and bled of air.

4.6.24 Fire extinguisher. To determine conformance to 3.5.9, the fire extinguisher shall be tested for operation. With the engine idling at 700 to 800 rpm, the internal control shall be pulled with a maximum effort of 55 pounds using a force gage. The first shot shall acutate one bottle. After a time delay of more than 6 seconds but less than 11 seconds, the engine shall have stopped and the system shall begin discharging CO_2 into the engine compartment and in the center of the engine "V". After returning the handle to its original position, a second actuation shall discharge the remaining two bottles of CO_2. Removal and weighing of each CO_2 bottle after test shall show a minimum of 9 pounds of CO2 discharged during test.

CAUTION: When conducting these tests, safety precautions shall be exercised (see 6.3.1).

4.6.25 Personnel heater test. To determine conformance 3.5.10 and 3.5.10.1, the heater shall be started and observed for proper operation and tested for conformance to all requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

4.6.26 Engine smoke generator test. To determine conformance to 3.5.11, activate the engine smoke generator switch when the engine is warm and operating at 1600 rpm. Verify that both right and left exhaust ducts emit white smoke.

NOTE: Do not test the engine smoke generator for more than 15 seconds, nor within a building, nor with personnel exposed to the exhaust plume.

4.6.26.1 Smoke grenade discharger circuits tests.

4.6.26.1.1 Arming test. To determine conformance to 3.4.3.11.1, operate the master battery switch to ON and the grenade system power switch to ON, and verify that the power-on (ready) lamp in the grenade power box illuminates. Operate the grenade system power switch to OFF and verify that the power-on (ready) lamp is extinguished.

4.6.26.1.2 Circuit voltage test. To determine conformance to 3.4.3.11.2, arm the circuit as specified in 4.4.2.14.7.1 and verify that the power-on (ready) lamp is illuminated. Actuate the RIGHT firing pushbutton and verify that the voltage on the smoke grenade discharger pins shown in figure 2 is as specified in 3.4.3.11.2. Actuate the LEFT firing pushbutton and verify that the voltage on the smoke grenade discharger pins is as specified. Return power-on (ready) switch to OFF and verify that voltage is not present on any of the firing pins.

4.6.27 Vibration and noise level test. To determine conformance to 3.5.12.1 and 3.5.12.2, the average of three noise level readings at each octave band shall be determined at each operator's head position under normal operating procedures. The sound-level meter, microphone-related equipment, and techniques employed shall be in accordance with MIL-STD-1474. Verify that the noise hazard signs are clearly visible to personnel in all crew stations.

4.6.28 Painting and marking examination. Conformance, to 3.5.13, 3.5.13.1 and 3.5.13.2 shall be determined during visual, dimensional, and primary functional examination (see 4.5.2).

4.6.29 Verfication of break-in run. To determine conformance to 3.5.14 before any chassis inspections are performed, the contractor shall give written notice to the Government inspection element that all requirements of 3.5.14 have been met.

4.6.30 Workmanship examination. Conformance to 3.5.13, shall be determined during visual, dimensional, and primary functional examination (see 4.5.2).

5. PREPARATION FOR DELIVERY

5.1 Processing for storage and shipment. Unless otherwise specified (see 6.2), preparation for delivery shall be in accordance with Level B of MIL-C-62279.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The tank chassis is intended for use as a transporting launcher for an AVL bridge after subsequent adaptation of the launching and bridge mechanism to the chassis.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. If preproduction model is required.
c. If preparation for delivery is other than Level B of MIL-C-62279.

6.3 Safety precautions.

6.3.1 Fire extinguisher (see 4.6.24). Caution should be exercised in handling carbon dioxide fire extinguisher cylinders. They should not be dropped, permitted to strike each other, or be handled roughly. Extreme care should be exercised during reinstallation to avoid tripping fire extinguisher control system since physical injury is highly probable.

6.4 Process average. Sampling may be initiated if process average value for the first 20 assemblies inspected is less than the AQL specified in classification of defects for major and minor defects.

$$\text{Process average} = \frac{\text{Number of defects}}{\text{Number of vehicles inspected}} \times 100$$

If computed process average exceeds specified AQL, 100 percent inspection shall be performed and continued until such time that process average for 20 consecutive assemblies is less than the specified AQL.

6.5 Definitions.

6.5.1 Recurring major defects. A major defect is recurring when the same defect occurs more than once in the same sample or when the defect occurs in two successive samples. A major defect may be considered recurring when the historical inspection records ("P" chart or equivalent) reflect such a condition. Recurring major defects shall be cause for the entire lot or lots to be inspected for the recurring defects.

6.5.2 Recurring minor defects. A minor defect is recurring if it occurs more than twice in the same sample or when the defect occurs in four successive samples. Recurring minor defects shall be cause for the entire lot or lots to be inspected for the recurring defects.

6.5.3 Leaks. The following definitions shall be used for the examination of defects for leaks:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

a. Weep: - Any evidence of fluid beyond the seal.
b. Seep: - Any evidence of fluid beyond the seal that does not result in formation of a droplet.
c. Droplet: - Any evidence of fluid beyond the seal that results in the formation of a droplet.
d. Drip: - Any evidence of fluid beyond the seal where droplet forms and falls.

6.6 Recycled materials. Use of recycled materials which meet the requirements of applicable material specifications without jeopardizing intended use of the item shall be encouraged (see 3.2)

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 2350-A294

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

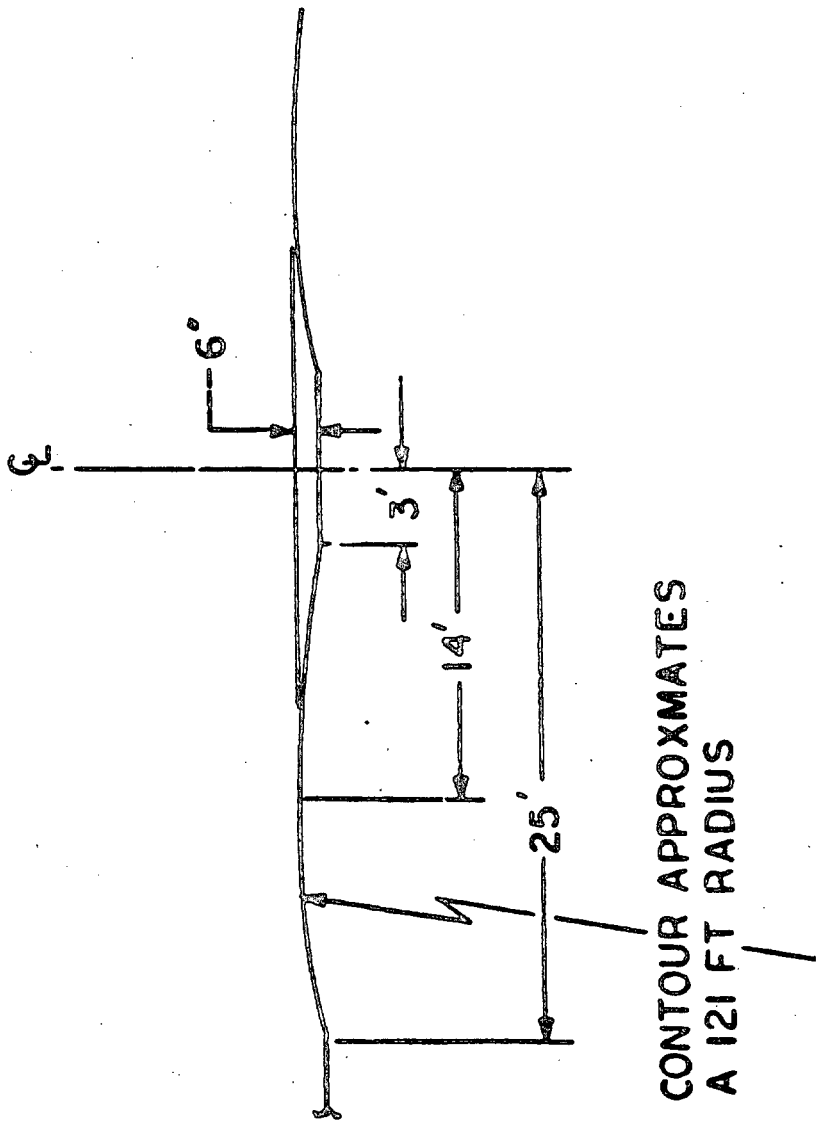


FIGURE 1. Profile of test track (artificial bump)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding General
Tank Automotive Command
ATTN: DRSTA-GSS
Warren, MI 48090

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-62267(AT)	Chassis, Tank, Armored Vehicle, Bridge Launcher, M60A1

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.