MIL-A-62337(AT)
3 September 1986
SUPERSEDING
(see 6.5)

MILITARY SPECIFICATION

AIR CLEANER ASSEMBLY

This specification is approved for use within the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a 900 cubic foot per minute (cfm), fender-mounted, heavy-duty, two-stage, dry-type air cleaner assembly referred to herein as the "assembly" (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 2940
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS
MILITARY

MIL-F-62309	- Filter Element, Air.

STANDARDS
FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-100	- Engineering Drawing Practices.
MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-193	- Painting Procedures and Marking for Vehicles, Construction Equipment and Material Handling Equipment.
MIL-STD-454	- Standard General Requirements for Electronic Equipment.
MIL-STD-45662	- Calibration System Requirements.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS
ARMY

11669740	- Filter Element.
12325888	- Air Cleaner Assembly.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise speciifed, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C800 - Glass Fiber Blanket Insulation.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), the contractor shall furnish assemblies which shall be subjected to first article inspection (see 4.4). First article inspection samples, properly marked with identifying information shall be representative of the units to be furnished to the Government. All subsequent assemblies delivered to the Government shall conform to these samples in all of their pertinent physical and performance attributes.

3.2 Materials. Materials shall be as specified herein and in referenced specifications, standards, and drawings. Materials shall be uniform and free from imperfections or defects which affect their serviceability. All nonmetallic materials shall be inherently fungistatic or treated to resist fungus growth except when used for components of potted or otherwise moisture sealed assemblies (see 4.8.1 and 6.3).

3.3 Design and construction.

3.3.1 Configuration. The assembly shall be constructed as specified herein and in accordance with Drawing 12325888. The assembly shall incorporate a precleaner, filter element and a vehicle exhaust dust ejection system (VEDES) precleaner scavenging manifold (see 4.8.1 and 4.8.2).

3.3.1.1 Filter element. The filter element shall be in accordance with MIL-F-62309 and Drawing 11669740 (see 4.8.1).

3.3.2 Serviceability. Servicing, cleaning, and reassembly shall be accomplished without the use of special tools and without disturbing the air cleaner connections to the engine (see 4.8.1).

3.3.3 Weight. The weight of the assembly shall not exceed 600 pounds (lb) (see 4.8.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.4 Interchangeability. The assembly shall be designed and fabricated in accordance with the interchangeability requirements of MIL-STD-100 (see 4.8.1).

3.4 Performance. Except as otherwise specified herein, performance requirements shall be met under the following conditions (see 4.8.4):

a. Temperature - 73 ± 18 degrees Fahrenheit (°F).
b. Humidity - 35 ± 5 percent (%).
c. Density of air - 0.073 pounds per cubic foot at 80°F and 29.92 inches of mercury (Hg).
d. Pressure - 30 ± 1 inches of Hg.
e. Dust - Chemical analysis of the test dust shall be as shown in table I. Particle size distribution shall be as shown in table II.
f. Dust feed rate - 0.025 ± 0.005 gram per cubic foot of air.

TABLE I. Chemical analysis of test dust.

Substance	Percent by weight
Silicon dioxide (SiO_2)	67 to 69
Ferric oxide (Fe_2O_3)	3 to 5
Aluminum oxide (Al_2O_3)	15 to 17
Calcium oxide (CaO)	2 to 4
Magnesium oxide (MgO)	0.5 to 1.5
Total alkalis as sodium oxide (Na_2O)	3 to 5
Ignition loss	2 to 3

TABLE II. Particle size distribution.

Particle size (microns)	Percent of total weight	
	Coarse grade	Fine grade
0 - 5	12 ± 2	39 ± 2
5 - 10	12 ± 3	18 ± 3
10 - 20	14 ± 3	16 ± 3
20 - 40	23 ± 3	18 ± 3
40 - 80	30 ± 3	9 ± 3
80 - 200	9 ± 3	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1 Initial airflow restriction. The initial airflow restriction of the assembly shall not exceed 9 inches of water at a rated flow of 900 cfm. The humidity condition of 3.4 shall not apply (see 4.8.4.1).

3.4.2 Dust capacity. When operating with a stepped airflow in accordance with table III and fed coarse dust in accordance with table II, assembly shall be capable of operating to an airflow restriction of 20 inches of water. The time for the assembly to reach the restriction of 20 inches of water shall be not less than 80 hours. The coarse dust efficiency shall be not less than 99.9% and the scavenge system efficiency shall be not less than 97% (see 4.8.4.2).

TABLE III. Stepped airflow.

Time (minutes)	Rated airflow (%)	Rated airflow (cfm)	Scavenge airflow (cfm)
10	100	900	70
10	80	720	92
10	60	540	107
10	40	360	120
10	20	180	128
10	60	540	107

3.4.3 Dust efficiency. The assembly dust filtration efficiency shall be not less than 99.5% when subjected to a rate airflow of 900 cfm, scavenge air flow of 70 cfm, and fed fine dust in accordance with table II for 30 minutes (see 4.8.4.3).

3.4.4 Post service airflow restriction. The assembly airflow restriction shall not exceed the recorded initial airflow restriction (see 3.4.1) by more than 1 inch at a rated airflow of 900 cfm after cleaning the filter element (see 4.8.4.4).

3.4.5 Air leakage resistance. There shall be no more than a 2-inch drop of water in 3 minutes when the assembly is subjected to a vacuum of 30 $\pm$ 0.50 inches of water. The humidity condition of 3.4 shall not apply (see 4.8.4.5).

3.4.6 Environmental conditions.

3.4.6.1 Vibration. The assembly shall be capable of withstanding the vibration profile of figure 1 for a period of 80 minutes (including forced dwells of 13 1/3 minutes each) in each of the three mutually perpendicular axes (see 4.8.4.6.1).

3.5 Painting. Unless otherwise specified (see 6.2), the preparation, conditioning, and painting of the assembly shall be in accordance with applicable provisions of MIL-STD-193. Exterior color shall be in accordance with color chip 24087 (olive drab) of FED-STD-595 (see 4.8.2).

3.6 Identification marking. Identification and marking shall be in accordance with MIL-STD-130 and shall include the maximum rated airflow in cubic feet per minute (see 4.8.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Axis	Sweep Acceleration 5-500-5 Hz 1/ at 0.9 Octaves/Minutes	Forced Dwells					
	G-LEVEL 2/	PRIMARY		2ND		3RD	
		Accel. G-level	Freq. Hz	Accel. G-Level	Freq. Hz	Accel. G-level	Freq. Hz
Vertical (Z)	0.9	4.2	20	2.4	105	2.4	265
Transverse (Y)	0.9	1.5	50	1.8	100	-	-
Longitudinal (X)	0.9	1.2	245	-	-	-	-

1/ Hertz (Hz).

2/ Gravity (G).

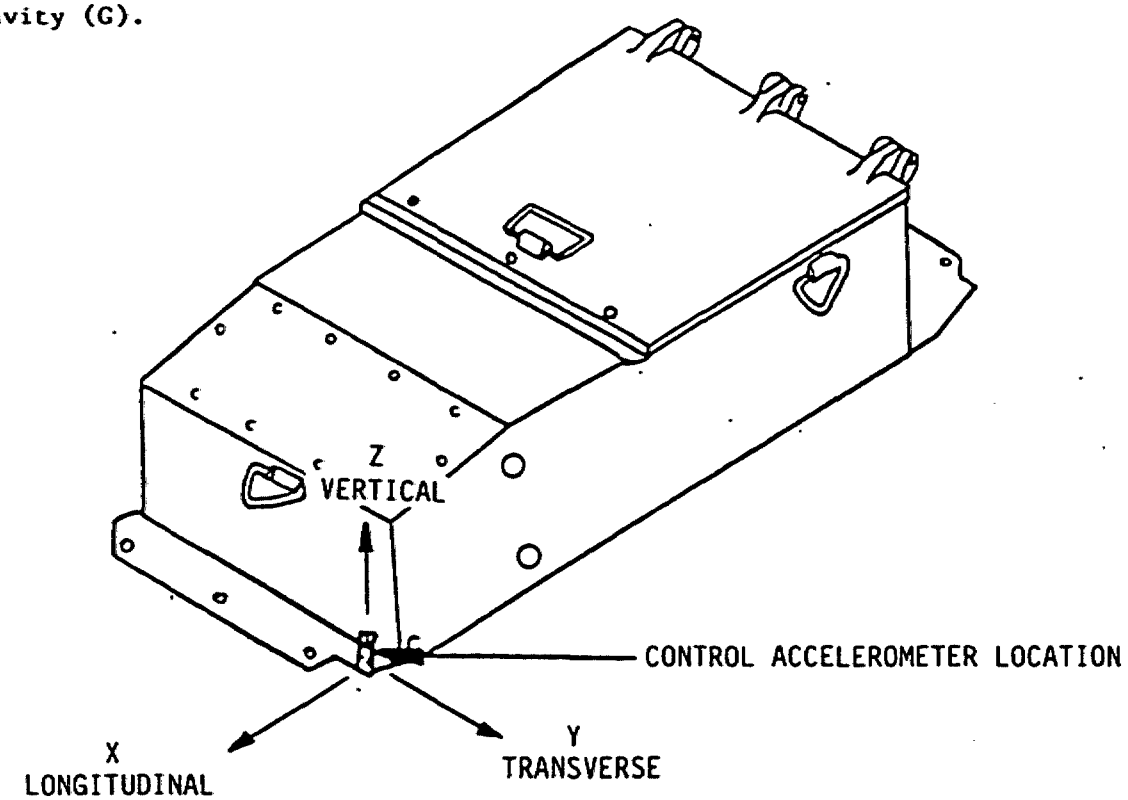


Figure 1. Vibration Levels for Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. Workmanship shall be in accordance with MIL-STD-454, requirement 9 (see 4.8.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply wih all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Inspection equipment. Unless otherwise specified in the contract (see 6.2), the contractor is responsible for the provision and maintenance of all inspection equipment necessary to assure that supplies and services conform to contract requirements. Inspection equipment must be capable of repetitive measurements to an accuracy of 10 percent of the measurement tolerance. Calibration of inspection equipment shall be in accordance with MIL-STD-45662.

4.2 Classification of inspection:

a. First article inspection (see 4.4).
   1. Preproduction inspection (see 4.4.1).
   2. Initial production inspection (see 4.4.2).

b. Quality conformance inspections (see 4.5).
   1. Examination (see 4.5.2).
   2. Tests (see 4.5.3).

c. Control tests (see 4.6).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature 73 $\pm$ 18°F
b. Barometric pressure $28.5 \begin{smallmatrix} +2 \\ -3 \end{smallmatrix}$ inches Hg
c. Relative humidity 50 $\pm$ 30 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. First article inspections shall be performed on preproduction or initial production samples as specified herein. Approval of the first article sample by the Government shall not relieve the contractor of the obligation to supply assemblies that are fully representative of those inspected as a first article sample. Any changes or deviation of the production units from the first article sample shall be subject to the approval of the contracting officer.

4.4.1 Preproduction inspection. When specified (see 6.2), the preproduction sample shall consist of two assemblies. Preproduction inspection shall consist of inspection as specified in table IV, in the order listed in table V.

4.4.2 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select two assemblies from the first 10 assemblies, produced under the production contract for initial production inspection. Initial production units shall be inspected as specified in table IV, and in the order listed in table V.

4.4.3 First article inspection failure. Test item deficiencies, during or as a result of the first article test, shall be cause for rejection of the items until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiency. Any deficiency found, during or as a result of the first article test, shall be evidence that all items already produced prior to completion of the first article test are similarly deficient unless contrary evidence satisfactory to the contracting officer is furnished by the contractor. Such deficiencies on all items shall be corrected by the contractor. The Government shall not accept products until first article testing is completed to the satisfaction of the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of inspections.

Title	Requirement	Inspection	First article	Quality conformance		Control
				Examination	Test	
Materials and construction	3.2, thru 3.3.2 and 3.3.4	4.8.1	X			
Defects (see 4.5.2 and table VI)	3.3.1, 3.5, 3.6, and 3.7	4.8.2	X	X		
Weight	3.3.3	4.8.3	X		X	
Performance	3.4	4.8.4				
Initial airflow restriction	3.4.1	4.8.4.1	X		X	
Dust capacity	3.4.2	4.8.4.2	X			X
Dust efficiency	3.4.3	4.8.4.3	X			X
Post service airflow restriction	3.4.4	4.8.4.4	X			X
Air leakage resistance	3.4.5	4.8.4.5	X		X	
Vibration	3.4.6.1	4.8.4.6.1	X			

TABLE V. Sequence of tests.

Test sequence	Inspection	First article sample 1	First article sample 2	Control
Design and construction	4.8.1 and 4.8.2	X	X	
Weight	4.8.3	X	X	
Air leakage resistance	4.8.4.5	X	X	X
Initial airflow restriction	4.8.4.1	X	X	X
Dust efficiency	4.8.4.3			X
Dust capacity	4.8.4.2	X	X	X 2/
Post service airflow restriction	4.8.4.4 1/	X	X	X
Dust efficiency	4.8.4.3	X	X	
Vibration	4.8.4.6.1	X	X	

1/ See 4.8.4g.
2/ See 4.8.4h.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Sampling.

4.5.1.1 Lot formation. An inspection lot shall consist of all the assemblies of one type and part number, from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

4.5.1.2 Sampling for examination. Samples for quality conformance examination shall be selected in accordance with general inspection level II of MIL-STD-105. Before sampling may be initiated, the contractor shall establish by examination of at least 20 consecutively produced assemblies that the process average percent defective, as defined in MIL-STD-105, is not greater than the specified AQLs.

4.5.1.3 Sampling for tests. Samples for test shall be selected in accordance with level II of MIL-STD-105.

4.5.2 Examination.

4.5.2.1 Acceptable quality level. Each sample selected in accordance with 4.5.1.2 shall be examined to determine conformance to the following acceptable quality levels (AQL).

Classification	AQL
Major	1.0
Minor	2.5

4.5.2.2 Classification of defects. For examination purposes, defects shall be classified as listed in table VI.

TABLE VI. Classification of defects.

Category	Defect	Method of examination
Critical	None	
Major	AQL 1.0% Defective	
101	Assembly, incomplete (see 3.3).	Visual
102	Dimensions affecting interchangeability, out of tolerance (see 3.3.1).	SIE 1/
103	Identification marking, improper (see 3.6).	Visual
104	Faulty workmanship affecting performance (see 3.7).	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects - Continued.

Category	Defect	Method of examination
Minor	AQL 2.5% Defective	
201	Dimensions not affecting interchangeability, out of tolerance (see 3.3.1).	SIE 1/
202	Paint, improper application or color (see 3.5).	Visual
203	Faulty workmanship affecting appearance (see 3.7).	Visual

1/ SIE = Standard Inspection Equipment.

4.5.3 Test. Samples selected in accordance with 4.5.1.3 shall be subjected to the quality conformance tests specified in table IV.

4.6 Control tests. Control tests shall be conducted on one assembly from each lot of 50 units consecutively produced, except that not more than one test shall be performed in a 1-month period, nor less than one test in a 3-month period. The assemblies shall be subjected to the tests specified in table IV, in the order listed in table V.

4.7 Failure. Failure of any assembly to pass any of the specified quality conformance or control tests shall be cause for the Government to refuse acceptance of the production quantity represented, until action taken by the contractor to correct defects and prevent recurrence has been approved by the Government.

4.8 Methods of inspection.

4.8.1 Materials and construction. Conformance to 3.2 through 3.3.2, and 3.3.4 shall be determined by inspection of contractor records providing proof or certification that design, construction, processing, and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.8.2 Defects. Conformance to 3.3.1, 3.5, 3.6, and 3.7 shall be determined by examination for the defects listed in table VI. Examination shall be visual, tactile, or by measurement with standard inspection equipment.

4.8.3 Weight. To determine conformance to 3.3.3, the assembly shall be weighed.

4.8.4 Performance. Except as otherwise specified herein, test conditions and procedures shall be in accordance with 3.4 and the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

a. The test setup for all tests requiring airflow shall be as shown in figure 2.
b. Dust feed rates shall be averaged over 10-minute intervals.
c. Measured airflow restriction values shall be corrected to the specified air density (see 3.4c) to an accuracy of 0.1 inch of water.
d. Actual airflow values used in tests shall be corrected to standard conditions (see 3.4c) and shall be within ± 2% of specified values.
e. The assembly shall be mounted in its normal operating attitude as shown in figure 2, and shall be electrically grounded.
f. In all tests, the assembly shall be connected to a turbine vacuum source as shown in figure 2. This vacuum source shall provide a scavenge airflow as specified in 3.4.2.
g. For first article testing, two filter elements shall be used for each assembly tested. The second filter shall be inserted subsequent to the post service airflow restriction test prior to the dust efficiency test.
h. For control testing, two filter elements shall be used for each assembly tested. The second filter shall be inserted prior to the dust capacity test and shall have met the requirements for initial airflow restriction.
i. Air shall be drawn through the assembly with a turbine vacuum source to insure filter element dryness before starting tests.

4.8.4.1 Initial air flow restriction. To determine conformance to 3.4.1, the assembly shall be subjected to a dust free airflow of 900 cfm through a new filter element. The restriction to flow shall be measured and recorded.

4.8.4.2 Dust capacity. To determine conformance to 3.4.2, the assembly shall be mounted in the test setup of figure 2, and complete 1 hour cycles with stepped flow rates as specified in table III. The restriction to flow (pressure drop through the assembly and master filter) shall be recorded each time the flow is adjusted to 900 cfm. The test shall be conducted, until the airflow restriction at 900 cfm reaches 20 inches of water. Coarse dust shall be fed into the input side of the assembly at 0.025 ± 0.005 grams per cubic foot of actual input airflow. Verify that the operational time is at least 80 hours. At approximately 20-hour intervals of continuous operation or whenever the test setup is required to be shutdown, the filter element shall be viewed through the assembly outlet for visual signs of dust tracking on the clean side of the seal or the filter element media. Any visual signs of dust tracking shall be cause for rejection. Verify at the conclusion of testing that the coarse dust efficiency of 99.9% was attained and that the scavenge system efficiency was not less than 97%. The following formulas shall be used to calculate coarse dust or scavenge system efficiency:

$$\text{Scavenge system effciency} = \frac{W_1 - [(W_4 - W_5) + (W_2 - W_3)]}{W_1} \times 100$$

$$\text{Coarse dust efficiency (\%)} = \frac{W_1 - (W_2 - W_3)}{W_1} \times 100$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

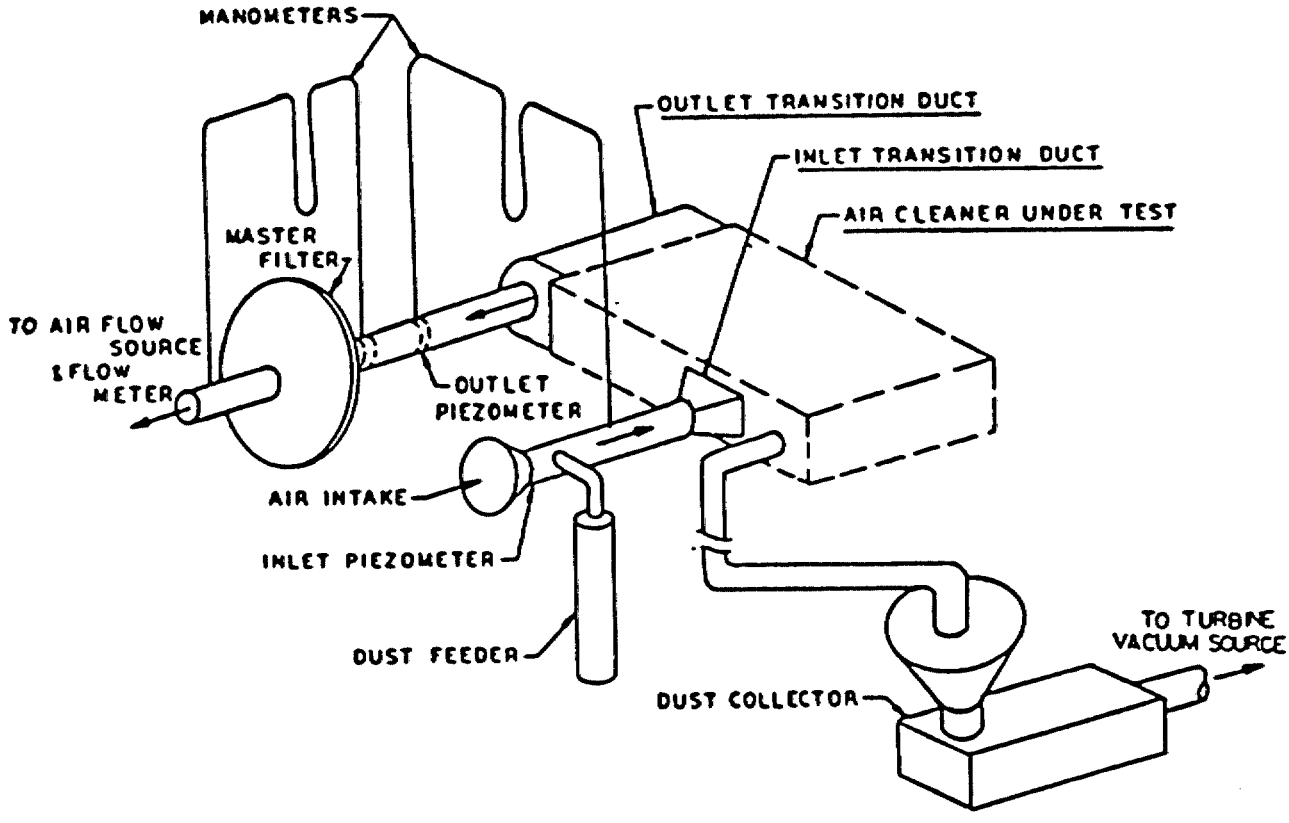


Figure 2. Typical Test Set Up (Air Cleaner with VEDES Scavenging)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Where:

W_1 = Weight of coarse dust fed into the assembly.

W_2 = Weight of master filter element and its entrapped dust.

W_3 = Weight of master filter element at start of test.

W_4 = Weight of filter element, its entrapped dust and dust encasing the sides of the filter housing compartment.

W_5 = Weight of filter element at start of test.

4.8.4.3 Dust efficiency. To determine conformance to 3.4.3, the assembly shall be mounted in the test setup of figure 2 with a master filter (see 4.8.4.3.1) at the output end of the assembly. Fine dust as specified in table II shall be placed in a dust feeder; and fed into the input side of the assembly at 0.025 $\pm$ 0.005 gram per cubic foot of actual input airflow for 30 minutes with an airflow of 900 cfm and a scavenge airflow of 70 cfm. Restriction at the start of the test, and at 10 minute intervals throughout the test shall be recorded. The master filter shall be removed from the test setup taking care not to disturb the entrapped dust and reweighed as specified in 4.8.4.3.1. All fine dust and master filter element weighings shall be accurate to 0.01 gram. Other weighings shall be accurate to 0.01 gram wherever possible but never less accurate than 0.1 gram. The dust efficiency of the assembly shall be 99.5% when computed using the following formula:

$$\text{Dust efficiency (\%)} = \frac{W_1 - (W_2 - W_3)}{W_1} X\ 100$$

Where: W_1 = Weight of dust fed into the assembly.

W_2 = Weight of master filter and its entrapped dust.

W_3 = Weight of master filter before test.

4.8.4.3.1 Preparation of the master filter. A master filter conforming to ASTM C800, shall be placed in an air oven and dried for 6 hours at a temperature of 200°F to 240°F, prior to insertion in the test setup. This drying time may be reduced, and the master filter considered as completely dry, if there is no change in weight of the master filter over two consecutive 10-minute intervals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.8.4.4 Post service airflow restriction. To determine conformance to 3.4.4, after the dust capacity test of 4.8.4.2, the filter element shall be removed and cleaned of dust by using clean, dry, compressed air with 100 ± 10 pounds per square inch (psi) line pressure, and a nozzle inside diameter of not less than 1/8 inch. The air nozzle shall be inserted into each pocket or serration of the filter element, using a back and forth motion along the length of each serration, and a direct flow into each pocket from inside out. After the filter element is thoroughly air cleaned, it shall be reassembled in the assembly. The assembly shall be subjected to a dust free flow of 900 cfm of air through the filter element. The restriction to flow shall be measured and recorded.

4.8.4.5 Air leakage resistance. To determine conformance to 3.4.5, the assembly shall be sealed at all inlets and outlets and subjected to a vacuum of 30 ± 0.50 inches of water. The vacuum decay (leakage) shall be monitored for 3 minutes.

4.8.4.6 Environmental conditions.

4.8.4.6.1 Vibration. To determine conformance to 3.4.6.1, the assembly shall be mounted on vibrating equipment with the filter element inserted and scavange exhaust attached (see figure 2). The assembly shall vibrate for a period of 80 minutes at an amplitude of 0.9 gravity units (g) and frequency rate from 5 to 500 to 5 hertz (Hz) in each of the three mutually perpendicular axes shown in figure 1. The forced dwells of figure 1 shall be performed in place of the resonance search and dwells. Connections and instrumentation shall be attached to permit testing as follows:

a. Test level shall be as specified in figure 3 conducted at ambient temperatures. The time schedule shall be a total of 80 minutes per axis including the forced dwells of figure 1.
b. The test item shall be vibrated along each axis in accordance with the condition above. The frequency of applied vibration shall be swept over the specified range Logarithmically in accordance with figure 4. The specified sweep time is that of an ascending plus a descending sweep and is twice the ascending sweep time shown in figure 4 for the specified range. Linear sweep rates shall be substituted for the logarithmic sweep rate. When linear sweep rates are used, the total frequency range shall be divided into logarithmic frequency bands having similar time intervals such that each time interval is the time of ascending plus a descending sweep for the corresponding band. The sum of these time intervals shall equal the sweep time specified for the applicable frequency range. The linear sweep rate for each band is then determined by dividing each bandwidth in cps by one half the sweep time in minutes for each band. The logarithmic frequency bands may be readily determined from figure 4. The frequency bands and linear sweep rates shown in table VII shall be used for the 2 (or 5) to 500 cps and 5 to 2000 cps frequency ranges. For test frequency ranges of 100 cps or less, no correction of the linear sweep rate is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

c. After vibration, the assembly shall be examined for structural damage and shall be subjected to an air leakage test (see 4.8.4.5) and the dust efficiency test (see 4.8.4.3). The filter element shall be cleaned as specified in 4.8.4.4 prior to performing the dust efficiency test.

TABLE VII. Linear cycling rates.

Total frequency range	Frequency band cps	Sweep time in minutes (min-max-min)	Linear cycling rate (cps/min)
2 - 500 cps or 5 - 500 cps as applicable	2 to 5 5 to 22.5 22.5 to 110 110 to 500	3 6 5 4	2 5.8 35 195
5 - 2000 cps	5 to 22.5 22.5 to 110 110 to 500 500 to 900 900 to 2000	6 5 4 3 2	5.8 35 195 267 1100

5. PACKAGING

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking for the desired level shall be in accordance with the applicable packaging standard or packaging data sheet specified by the contracting authority (see 6.2j).


6. NOTES

6.1 Intended use. The filter element is intended specifically for use on full-tracked, combat M60 series tnaks.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Title, number, and date of the applicable drawing (see 3.3).
c. If first article samples are not required (see 3.1).
d. If painting shall be other than as specified (see 3.5).
e. If responsibility for inspection shall be other than as specified (see 4.1).
f. If responsibility for inspection equipment shall be other than as specified (see 4.1.2).
g. If inspection conditions shall be other than as specified (see 4.3).
h. If preproduction inspection is required (see 4.1.1).
i. If initial production inspection is not required (see 4.4.2).
j. Selection of applicable level and packaging standard or packaging data sheet (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

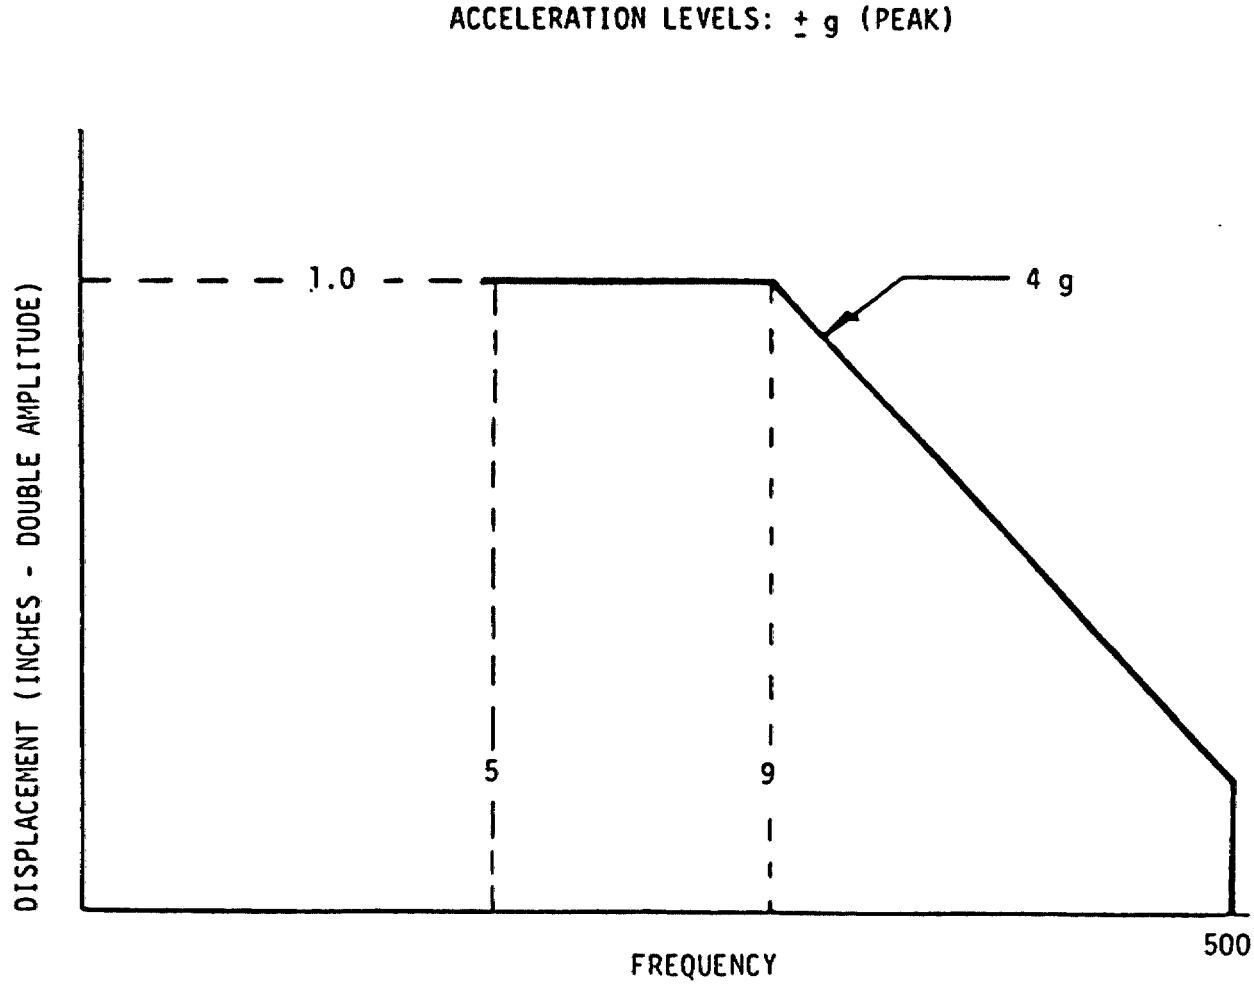

NOTE: All curves shall be extended to 2 CPS when test item resonances below 5 CPS are expected.

FIGURE 3: Vibration test curve for equipment installed in ground vehicles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

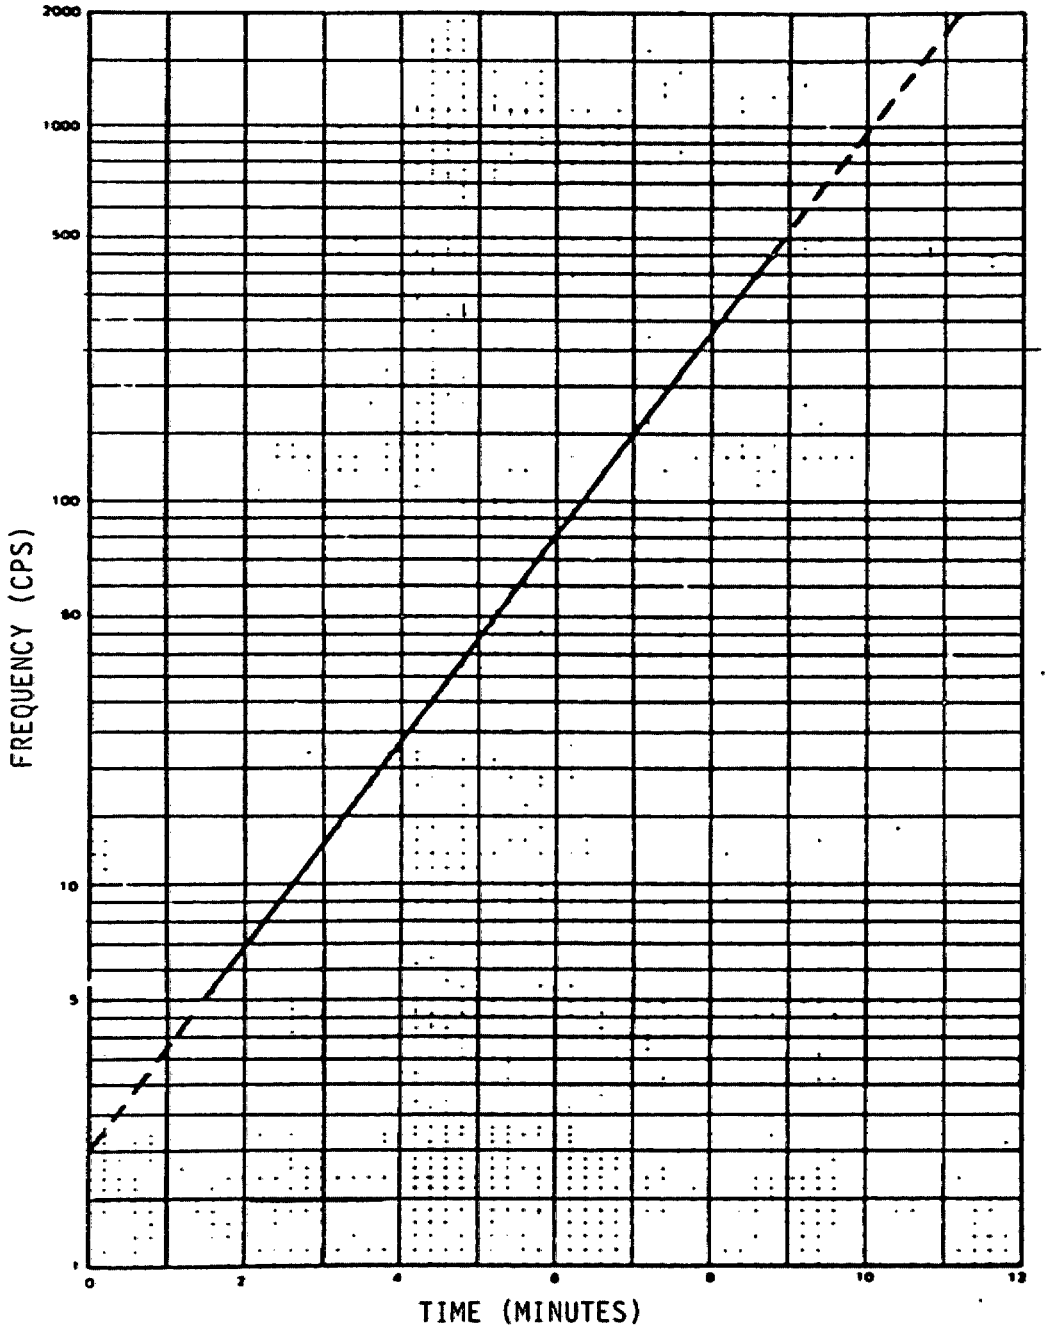


FIGURE 4. Logarithmic sweep

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.3 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specification without jeopardizing the intended use of the item shall be encouraged (see 3.2).

6.4 Subject term (key word) listing.

Air Cleaner, Heavy Duty, Dry Type.
Filter Element, Air Cleaner, Dry Type.

6.5 Supersession data. This military specification supersedes General Dynamics purchase description M60PD-A-62337(AT), dated 7 October 1982.

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project 2940-A129)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
'FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Tank-Automotive Command
ATTN: AMSTA-GDS
Warren, MI 48397-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.