MILITARY SPECIFICATION

MODULE, ENERGY TRANSFER

This specification is approved for use by Picatinny Arsenal, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions and preparation for delivery criteria for one type of energy transfer module (ETM) designated as Module, Energy Transfer.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-S-46860	- Soldering of Metallic Ribbon Lead Materials to Solder Coated Conductors, Process for Reflow
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-S-6872	- Soldering Process, General Specification for

STANDARDS

MILITARY

MIL-STD-202	- Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-810	- Environmental Test Methods
MIL-STD-1169	- Packaging, Packing and Marking for Shipment of Inert Ammunition Components
MIL-STD-1460	- Soldering of Electrical Components and Printed Wiring Assemblies, Procedure for

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

DRAWINGS

PICATINNY ARSENAL

PRODUCT AND PACKAGE DRAWINGS

9237603	- Cover Assembly
9237608	- ETM Assembly
9237610	- ETM (Substrate) Assembly

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Materials and Components. The contractor shall furnish objective evidence (see 6.4.1) that materials and components comply with all specification requirements. Components shall meet the applicable requirements of MIL-STD-454.

3.1.1 Component Reliability. All capacitors, semiconductors, and integrated circuit devices shall be preconditioned in accordance with the requirements of the component specification drawing.

3.1.2 Substrate Assembly Burn-In. Each ETM substrate assembly (drawing 9237610) shall be burned-in a minimum of 96 hours at 160 ± 5 degrees Fahrenheit (°F). Input voltage shall be 34.0 (+.5, -0) volts direct current (vdc). Output load shall be 150 K ohms ± 10%. Following burn-in each substrate shall be tested in accordance with 3.1.4.

3.1.3 High Temperature Stabilization. Each ETM cover assembly (drawing 9237603) shall be subjected to 24 hours at 160 °F ± 5°F without power applied. Following stabilization, each cover assembly shall be tested in accordance with 3.1.4.

3.1.4 Post Burn-In and High Temperature Stabilization Test Requirements. Testing shall consist of demonstrating the requirements of 3.7.2a and 3.7.2b at the 34.0 (+.5, -0) vdc input level with the exception that short circuit and reverse voltage conditions shall be applied for a minimum of 5 seconds. The devices shall then be tested in accordance with 4.5.3.2 and 4.5.3.3 at room ambient temperature.

3.1.5 Soldering. All electrical hand solder connections shall be in accordance with MIL-STD-1460. Mechanical soldering shall be in accordance with MIL-S-6872. Reflow soldering (see Substrate Assembly Dwg. 9237610) shall be in accordance with MIL-S-46860.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

3.2 Assembly (9237608). The ETM shall comply with all requirements specified on drawing 9237608, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First Article. This specification contains technical provisions for first article inspection (see 4.3). Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.4 Serialization and Marking. The contractor shall mark modules and assign serial numbers as required by the drawing. The contractor may select any serial numbers. Serial numbers shall not be duplicated.

3.5 Insulation Resistance. The insulation resistance between ETM terminals (all terminals shorted together) and the case shall not be less than 100 megohms when subjected to a potential of 500 ± 50 volts direct current (vdc) with the current limited to 5 milliamperes. Testing shall be performed in accordance with 4.5.1.

3.6 Dielectric Strength. The ETM shall withstand a potential of 500 ± 50 volts root mean square (vrms), 60 Hertz (Hz) between terminals (all terminals shorted together) and the case for a minimum period of one minute without evidence of physical damage. Testing shall be performed in accordance with 4.5.2.

3.7 Functional Requirements.

3.7.1 Input Current. The input current of the ETM under no-load conditions shall not exceed 150 milliamperes direct current at an input voltage of 34 (+.5, -0) vdc. Testing shall be performed in accordance with 4.5.3.1.

3.7.2 Protective Circuits. The ETM shall exhibit no evidence of physical or functional damage after the following conditions have been applied for a minimum of five minutes:

a) A short circuit is applied across the output terminals.

b) The polarity of the input terminals is reversed.

In each case, the ETM shall comply with the requirements of 3.7.3, 3.7.4 and 3.7.5 following removal of the above conditions.

3.7.3 No-Load Output Voltage. The no-load output voltage at the ETM output terminals shall not exceed 175 vdc at an input voltage of 34 (+.5, -0) vdc, nor shall it be less then 130 vdc at an input voltage of 28 (+0, -.5) vdc. Testing shall be performed in accordance with 4.5.3.2.

3.7.4 Input-Output Response. The no-load output voltage at the ETM output terminals shall attain a minimum value of 150 vdc in a maximum of one second following application of an input voltage of 34 (+.5, -0) vdc. Testing shall be performed in accordance with 4.5.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

3.7.5 Output Voltage. The output voltage across the one ohm resistor in the specified load shall rise to a minimum value of 50 vdc in a maximum of 10 microseconds (usec). At 20 usec minimum, the output voltage shall be no less than 25% of the peak output voltage (see waveform on Figure 1). Unless otherwise specified herein, the input voltage shall be 28 (+0, -.5) vdc. Testing shall be performed in accordance with 4.5.3.4.

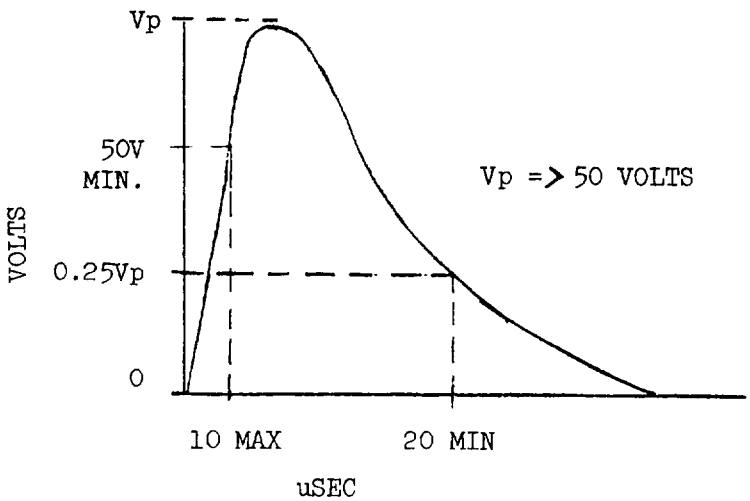


Figure 1. Typical Output Voltage Waveform

3.8 Environmental Tests. The ETM shall comply with the visual inspection and failure criteria of Table I and the requirements of 3.5, 3.6, and 3.7 at +73 + 5°F before and after each environmental test (See exception in notes at bottom of Table II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

Table I

Pre and Post Environmental Visual Examinations

Visual Inspections	Perform visual examinations on each module initially and following environments as indicated below					
	Low Temp	High Temp	Temp Shock	Vibration	Mech Shock	Accel-eration
Marking legibility	X	X	X			
Deterioration of external finish	X	X	X			
Loose terminals	X		X	X	X	
Cracks in glass seal around terminals	X	X	X		X	
Cracks in solder between cover and can	X		X	X	X	
Loose internal components			X	X	X	X

3.8.1 Low Temperature. The ETM shall comply with the functional requirements of 3.7.3; 3.7.4; and 3.7.5 at a temperature of -40° + 5°F when tested in accordance with 4.5.4.

3.8.2 High Temperature. The ETM shall comply with the functional requirements of 3.7.3; 3.7.4; and 3.7.5 at a temperature of +140° + 5° when tested in accordance with 4.5.5.

3.8.3 Temperature Shock. The ETM shall exhibit no indication of physical or functional damage after being subjected to sudden extremes of temperature in accordance with 4.5.6.

3.8.4 Shock. The ETM shall exhibit no indications of physical or functional damage after being subjected to mechanical shock in accordance with 4.5.7.

3.8.5 Operational Vibration. The ETM shall exhibit no indications of physical or functional damage after being subjected to operational vibration in accordance with 4.5.8.

3.8.6 Acceleration. The ETM shall exhibit no indications of physical or functional damage after being subjected to acceleration in accordance with 4.5.9.

3.9 Workmanship. All assemblies shall be constructed and finished in a thoroughly workmanlike manner. Conformal coating, and adhesives shall be free of cracks, holes, warpage, excess porosity, excessively large inclusions and other similar plastic defects. Particular attention shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

given to neatness, marking, cleaning and freedom of parts from burrs and sharp edges, which might affect performance or result in injury during handling. All parts shall be free from chips, dirt, grease, rust, and other foreign material. The cleaning method shall not be injurious to any of the parts nor shall the parts be contaminated by the cleaning agents.

4. QUALITY ASSURANCE PROVISION

4.1 Responsibliity for Inspection and Standard Quality Assurance Provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of Inspection. The following types of inspection shall be conducted on this item:

a) First Article Inspection
b) Quality Conformance Inspection

4.3 First Article Inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2. The first article sample shall consist of eight complete ETM assemblies.

4.3.2 Inspections to be Performed. The first article samples submitted in accordance with 4.3.1 will be subjected by the Government to any or all the requirements of the applicable drawing and to the inspections of Table II. Tests shall be performed in the sequence indicated in Table II. Except for visual inspections, all examinations and tests in Table II shall be considered as Major category (see 4.4.4).

4.3.3 Rejection. See MIL-A-48078.

4.4 Quality Conformance Inspection.

4.4.1 Inspection Lot Formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examination. See MIL-A-48078 and table of classification of Defects and Tests herein. Unless 100% inspection is specified in the Classification of Defects or Test tables sampling plans for major and minor defects shall be in accordance with Tables IV and V.

4.4.3 Testing. Testing is described in the Quality Conformance Inspection Table (Table III). None of the Quality Conformance Inspections or Tests are destructive. Items so tested may be returned to the inspection lot.

4.4.4 Inspection Equipment. Inspection equipment shall be designed or specified by the contractor in accordance with MIL-A-48078. The contractor shall submit inspection and test equipment designs for Major category tests for approval in accordance with MIL-A-48078 and 6.3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

TABLE II - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	ENERGY TRANSFER MODULE (ETM)				9237608
					NEXT HIGHER ASSEMBLY
CATEGORY (see 4.3.2)	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Objective evidence for components	-	-	3.1	Visual
**	Improper reflow solder on substrate assembly (dwg. 9237610)	8	-	3.1.5	Visual
**	Improper soldering of electrical connections at terminals	8	-	3.1.5	Visual
	Improper mechanical solder of cover assembly to can assembly	8	-	3.1.5	Visual
	Marking improper, illegible or missing	8	-	3.4	Visual
	Serial numbers missing	8	-	3.4	Visual
	Evidence of poor workmanship	8	-	3.9	Visual
	Insulation resistance	8	-	3.5	4.5.1
***	Dielectric strength	8	-	3.6	4.5.2
	Input current	8	-	3.7.1	4.5.3.1
	Protective circuits	8	-	3.7.2	--
	Maximum output voltage	8	-	3.7.3	4.5.3.2
	Input-output response	8	-	3.7.4	4.5.3.3
*	Output voltage	8	-	3.7.5	4.5.3.4
	Low temperature	8	-	3.8.1	4.5.4, TABLE I
	High temperature	8	-	3.8.2	4.5.5, TABLE I
	Temperature shock	8	-	3.8.3	4.5.6, TABLE I
	Vibration	8	-	3.8.5	4.5.8, TABLE I
	Shock	8	-	3.8.4	4.5.7, TABLE I
	Acceleration	8	-	3.8.6	4.5.9, TABLE I

NOTES: *Provide scope trace pictures of output voltage or equivalent verification.
**Soldering inspections shall be performed prior to soldering of cover assembly to can.
***Dielectric strength shall be performed only before low temp. and after completion of all environments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

TABLE III - QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER
	ENERGY TRANSFER MODULE (ETM)				9237608
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major:					
101.	Input Current		100%	3.7.1	4.5.3.1 (See Note 1)
102.	Protective Circuits		100%	3.7.2	- - (See Note 2&3)
103.	Output Voltage		100%	3.7.3	4.5.3.2 (See Note 1)
104.	Input-Output Resonse		100%	3.7.4	4.5.3.3 (See Note 1)
105.	Output Voltage		100%	3.7.5	4.5.3.4 (See Note 2)
106.	Insulation Resistance		100%	3.5	4.5.1 (See Note 2)
107.	Post Burn-In Test		100%	3.1.2	3.1.4 (See Note 2)
108.	Post Temperature Stabilization Test		100%	3.1.3	3.1.4 (See Note 2)
109.	Improper location of mounting holes		Table IV	3.2	Gage
110.	Improper diameter of mounting holes		Table IV	3.2	Gage
111.	Vent hole in can improperly soldered		100%	-	Visual
112.	Loose internal components		100%	-	Visual
113.	Terminals bent or otherwise damaged		100%	-	Visual
114.	Obstruction in mounting holes		100%	-	Visual
115.	Improper alignment of mounting holes (cover to can)		100%	-	Visual
116.	Improper reflow solder on substrate assembly (dwg. 9237610)		100%	3.1.5	Visual
117.	Improper soldering of electrical connections at terminals		100%	3.1.5	Visual
118.	Improper mechanical solder of cover assembly to can assembly		100%	3.1.5	Visual

NOTES:
1. Record variable data
2. Go-No Go data only - variable data need not be recorded
3. Conditions shall be applied for 5 seconds minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

TABLE III (CONT.) - QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 9237608
	ENERGY TRANSFER MODULE (ETM)				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor:					
201.	Marking, improper, illegible or missing		Table V	3.4	Visual
202.	Serial numbers missing		100%	3.4	Visual
203.	Evidence of poor workmanship		Table V	3.9	Visual

NOTES:

*All soldering inspections shall be performed prior to soldering of cover assembly to can assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

TABLE III (CONT.) - QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER
	Preparation for Delivery				Not Applicable (See 5)
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
101.	Preservation and packaging not per MIL-STD-1169		Table IV	5.1	Visual
102.	Packing not per MIL-STD-1169		Table IV	5.2	Visual
Minor:					
201.	Marking not per MIL-STD-1169		Table V	5.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

Table IV
*Sample Plan

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

Table V
*Sample Plan

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-9	all	14-16	12	28-33	16	77-121	20
10	9	17-18	13	34-41	17	122-273	21
11	10	19-22	14	42-54	18	over 273	22
12-13	11	23-27	15	55-76	19		

*NOTE: If any sample fails to meet the applicable requirements during sample inspections or tests, screen the entire lot for the characteristic found defective in the sample.

4.4.5 Inspection Records. Inspection records of tests and inspections required by Quality Conformance Inspection Table III shall be forwarded with each inspection lot in accordance with 6.2.1

4.5 Test Methods and Procedures. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.5.1 Insulation Resistance (see 3.5). Insulation resistance shall be measured in accordance with method 302 of MIL-STD-202 with an approved insulation resistance tester. Test duration shall be 1 minute minimum.

4.5.2 Dielectric Strength (see 3.6). Dielectric strength shall be tested in accordance with method 301 of MIL-STD-202 with an approved dielectric strength tester. Test duration shall be 1 minute minimum.

4.5.3 Functional Tests.

4.5.3.1 Input Current (see 3.7.1). Input current shall be tested with approved test equipment.

4.5.3.2 No Load Output Voltage (see 3.7.3). Output voltage shall be tested with approved test equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

4.5.3.3 Input-Output Response (see 3.7.4). The output voltage response at the ETM output terminals shall be tested with approved equipment.

4.5.3.4 Output Voltage (see 3.7.5). The output voltage functional test shall be performed with approved test equipment. The required test load and typical output voltage waveform are illustrated on Figure 1 and 2.

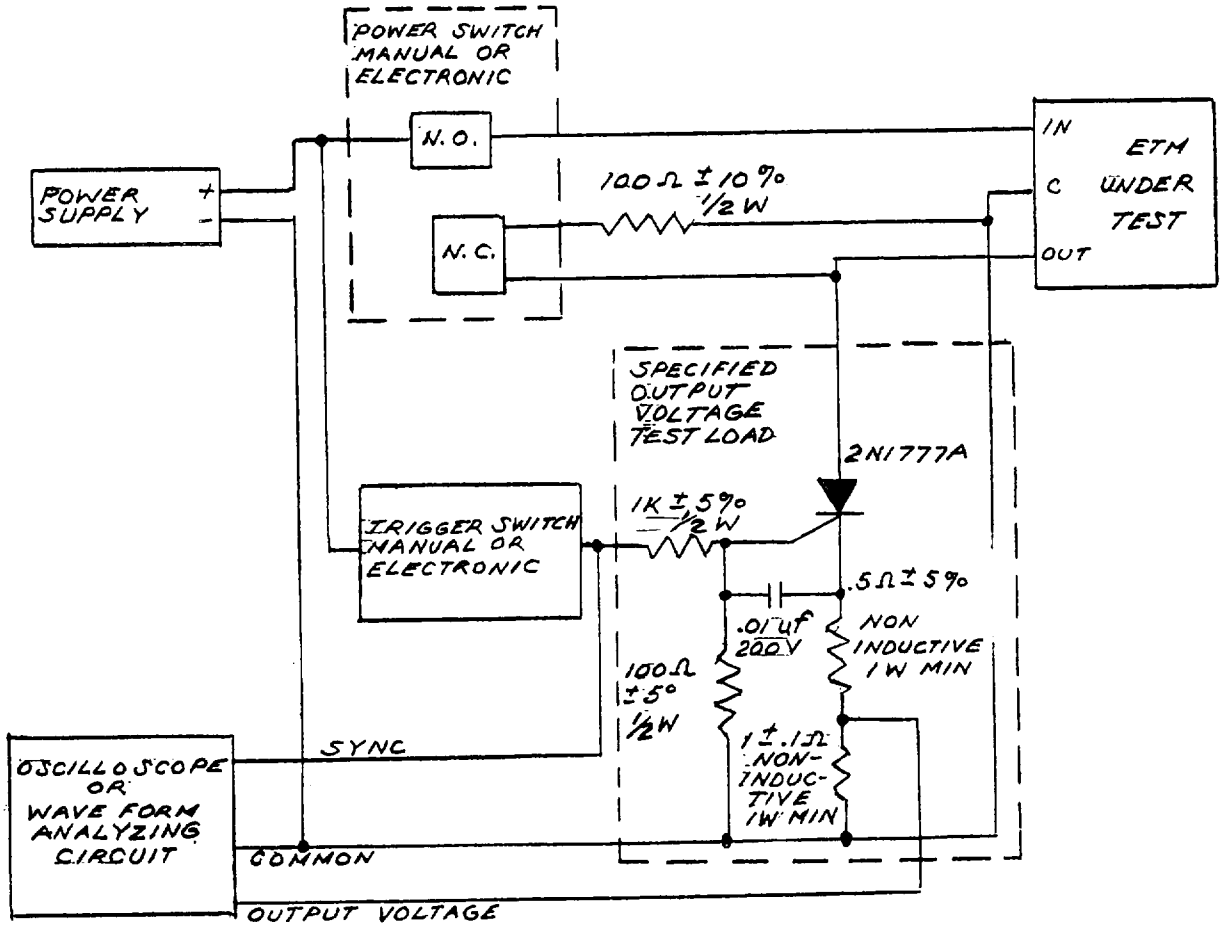


Figure 2. Output Voltage Test Load

4.5.4 Low Temperature (see 3.8.1). Low temperature tests shall be performed in accordance with MIL-STD-810, method 502. Items shall be stabilized at -40°F ± 5°F for a minimum of four hours prior to performing functional tests.

4.5.5 High Temperature (see 3.8.2). High Temperature tests shall be performed in accordance with MIL-STD-810, method 501, Procedure I except that items shall be stabilized at +140°F ± 5°F for a minimum of four hours prior to performing functional tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

4.5.6 Temperature Shock (see 3.8.3). Temperature shock shall be performed in accordance with MIL-STD-810, method 503, except that the temperature limits shall be 155°F ± 5°F and -40°F ± 5°F.

4.5.7 Shock (see 3.8.4). Shock tests shall be performed in accordance with MIL-STD-810, method 516.1, Procedure IV, Figure 516.1-2 except that the shock level shall be 50 ± 5.0 G's for 11 ± 1.0 milliseconds (ms).

4.5.8 Operational Vibration (see 3.8.5). Operational vibration shall be performed in accordance with MIL-STD-810, method 514.1, Table 514.1-V, Procedure V and the following schedules of Figure 514.1-5. The ETM shall be non-operating during this test.

a) Sinusoidal: (Curve T) except that the test time per cycle shall be 20 minutes. One cycle shall be performed with the ETM conditioned for at least 2 hours at both -40 ± 5°F and +155 ± 5°F in each axis.
b) Random Sustain: (Curve AE) except that the test time per axis shall be 3 minutes.
c) Random Boost: (Curve AG) except that the test time per axis shall be 10 seconds.

4.5.9 Acceleration (see 3.8.6). Acceleration tests shall be performed in accordance with MIL-STD-810, method 513, Procedure I. The test level shall be 50 ± 5.0 G's and the test time shall be one minute. The ETM shall be non-operating during the test.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging. Items shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169, level A or C as specified (see 6.2).

5.2 Packing. Packing shall be in accordance with instructions contained in MIL-STD-1169, level A or C as specified (see 6.2).

5.3 Marking. Marking shall be in accordance with MIL-STD-1169.

6. NOTES

6.1 Intended Use. The item covered by this specification is intended for use in the LANCE Missile System Adaption Kit.

6.2 Ordering Data. See MIL-A-48078.

6.2.1 Contract Data Requirements. Quality conformance inspection records shall be provided and distributed in accordance with Data Item Description DI-R-1724 (Items 1 and 2) when specified on a 1423 Form incorporated in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

6.3 Submission of Inspection Equipment Designs for Approval. See 6.2.2 and 6.2.3 of MIL-A-48078.

6.4 Definitions.

6.4.1 Objective Evidence. Records of contractor quality controls and inspections which can be verified.

6.5 Supersession data. This specification supersedes the requirements of Purchase Description PA-PD-3149A dated 19 July 1975.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No. NUOR-A071

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:22Z
Check the source to verify that this is the current version before use.