MIL-S-62549(AT)
18 November 1987
SUPERSEDING
(see 6.4)

MILITARY SPECIFICATION

SEMITRAILER, LOW BED, 40 TON NOMINAL PAYLOAD FOR TRANSPORTATION OF HEAVY ENGINEER CONSTRUCTION EQUIPMENT, M870A2

This specification is approved for use within the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a level frame, low bed semitrailer equipped with a folding gooseneck for front loading and movement of heavy engineer construction equipment.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 2330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS
FEDERAL

GG-P-455	- Plates and Foils, Photographic (Photosensitive Anodized Aluminum).
TT-C-490	- Cleaning Methods for Ferrous Surfaces and Pretreatment for Organic Coatings.

MILITARY

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-L-2105	- Lubricating Oil, Gear, Multipurpose.
MIL-W-3912	- Wood Parts and Wood Substitutes, Fabricated: for Transport of Vehicle Bodies and Similar Applications.
MIL-M-7866	- Molybdenum Disulfide, Technical, Lubrication Grade.
MIL-A-8421	- Air Transportability Requirements, General Specification for.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-P-46105	- Primer Coating; Weld Through, Zinc-Rich.
MIL-R-46164	- Rustproofing of Military Vehicles and Trailers.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.
MIL-C-53039	- Coating, Aliphatic Polyurethane, Single Component, Chemical Agent Resistant.
MIL-V-62038	- Vehicles, Wheeled: Preparation for Shipment and Storage of.

STANDARDS
FEDERAL

FED-STD-H28	- Screw-Thread Standard for Federal Services.
FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-193	- Painting Procedures and Markings for Vehicles, Construction Equipment and Materiel Handling Equipment.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-642	- Identification Marking of Combat, Tactical and Transport Vehicles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.
MIL-STD-1261	- Arc Welding Procedures for Constructional Steels.
MIL-STD-1366	- Material Transportation Systems Dimensional and Weight Constraints, Definition of.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems Equipment and Facilities.
MIL-STD-45662	- Calibration Systems Requirements.
MS35746	- Coupling, Automotive: Air Brake Lines.
MS52125	- Composite Light-Tail, Stop, Turn and Marker.
MS53007	- Plate Identification: Emergency and Service Automotive Air Brake.
MS75021	- Connector, Receptacle, Electrical-12 Contact, Intervehicular, 28 Volt, Waterproof.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

ARMY

7411021	- Coupling Assembly, Dummy.
7722333	- Grommet Electrical Connector.
7723309	- Nut Grommet - Retaining Size 28.
7731428	- Cover Assembly, Receptacle.
13226E7194	- Camouflage Pattern M870.

DEPARTMENT OF TRANSPORTATION (DOT)

Federal Motor Carrier Safety Regulation (FMCSR)

393.41	- Parking Brake System.
393.45	- Brake Tubing and Hose Adequacy.
393.46	- Brake Tubing and Hose Connections.
393.52	- Brake Performance.
393.70	- Coupling Devices and Towing.
393.95	- Emergency Equipment Required.
393.96	- Emergency Equipment, Additional Required.

Federal Motor Vehicle Safety Standards (FMVSS)

108	- Lamps, Reflective Devices and Associated Equipment.
119	- New Pneumatic Tires for Vehicles other than Passenger Cars.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

120	- Tire Selection and Rims for Motor Vehicles other than Passenger Cars.
121	- Air Brake Systems-Trucks, Busses and Trailers.
125	- Warning Devices.

(Application for copies should be addressed to the Department of Transportation, Federal Highway Administration, Washington, D.C. 20591.)

(Copies of specifications, standards, drawings, publications, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTH D 2000	- Rubber Products In Automotive Application, Classification System for.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J133	- Fifth Wheel Kingpin Performance - Commercial Trailer and Semitrailers.
SAE J318	- Air Brake Gladhand Service (Control) and Emergency (Supply) Line Couplers - Trucks, Truck-Tractors and Trailers.
SAE J348	- Wheel Chocks.
SAE J534	- Lubrication Fittings.
SAE J588	- Turn Signal Lamps.
SAE J560	- Seven-Conductor Electrical Connector for Truck-Trailer Jumper Cable.
SAE J682	- Rear Wheel Splash and Stone Throw Protection.
SAE J701	- Truck Tractor Semitrailer Interchange Coupling Dimensions, Information Report.
SAE J702	- Brake and Electrical Connection Locations Truck-Tractor and Truck-Trailer.
SAE J753	- Lubrication Chart-Construction and Industrial Machinery.
SAE J754	- Lubricant Types.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

SAE J848	- Fifth Wheel Kingpin, Heavy Duty, Commercial Trailers and Semitrailers.
SAE J875	- Trailer Axle Alignment.
SAE J1292	- Automobile, Truck, Truck-Tractor, Trailer and Motor Coach Wiring, Recm. Practice.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

THE TIRE AND RIM ASSOCIATION, INC.

Yearbook

(Application for copies should be addressed to the Tire and Rim Association, Inc., 3200 W. Market Street, Akron, OH 44313.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), the contractor shall furnish semitrailers which shall be subjected to first article inspection (see 4.4). First article inspection samples, properly marked with identifying information shall be representative of the unit to be furnished to the Government. All subsequent semitrailers delivered to the Government shall conform to these samples in all of their pertinent physical and performance attributes.

3.2 Life cycle operation. The reliability and maintainability requirements shall be demonstrated over the life cycle operations of the semitrailer when operated for a total of 6,000 miles (mi) per vehicle in accordance with the operational profile in table I, the payload and distribution requirements of 3.2.1, and the environmental conditions of 3.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

TABLE I. Road test profile, 6,000 mi.

Course	Mileage (mi)	Loading condition
Primary road	2700	rated payload
	300	empty
Improved secondary road	2420	rated payload
	280	empty
Off-road 1/	300	rated payload

1/ Level to slightly hilly.

3.2.1 Payload and distribution. The semitrailer shall be capable of transporting the rated payload without permanent deformation to the frame or gooseneck, while operating at the terrain profile specified in table I, with the load distribution specified in table II. The semitrailer shall be suitable for the concentrated, pin point and localized stresses caused by trucks, track pads and wheels, and any other normally distributed loads on the platform caused by the full range of intended use specified in Appendix A. Maximum allowable kingpin load shall not exceed 44,730 pounds (lb) with the semitrailer fully loaded.

TABLE II. Payload distribution.

Rated payload (lb)	Distribution	
	Length, feet (ft) 1/	Width, inches (in) 2/
56,000	18	30
80,000	18	30

1/ Length of evenly distributed payload in center of load space
2/ Width of each crawler track, centered on load space.

3.2.2 Environmental conditions. The semitrailer shall be operational after a 24 hour (hr) cold soak in ambient temperature ranging from minus (-) 25 degrees Fahrenheit (°F) to plus (+) 120°F, capable of operating in hot, humid tropical environments and dry, dusty conditions, and capable of being stored for extended periods in temperatures ranging from -28 to +160°F without damage.

3.2.3 Reliability. The reliability of the semitrailer shall have a design goal requirement of 6,000 mean miles between failure (MMBF) as specified in 3.2. For calculation of MMBF, a failure shall exist when the semitrailer prevents operations, reduces performance below essential levels, indicates that further operation would be unsafe, or indicates that further operations might result in extensive damage to the equipment. Any of these conditions that cannot be corrected by the crew in 1 hr using basic issue items (BII) that are carried on the truck-tractor or the semitrailer is considered to be a failure. Maintenance and human induced failures are excluded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.2.3.1 Frame reliability. The frame reliability shall have a design requirement of 150,000 mi average frame life which may be demonstrated by analytical calculations.

3.2.4 Maintainability. The total maintenance time, excluding driver and crew checks and services shall not exceed 8 manhours during 6,000 mi of specified operation. This equates to a maintenance ratio (MR) of 0.04 at 30 mi of operation equivalent to one hr of operation. The scheduled maintenance interval shall be six months or 6,000 mi. Any of these conditions that cannot be corrected by the crew in one hr using BII is considered to be a failure. Maintenance and human induced failures are excluded.

3.3 Materials. Material used in the manufacture of the vehicle shall be new and of highest commercial quality as normally used for this type of equipment, considering strength, durability, ductility, best engineering practice and the purpose for which the equipment is to be used; and shall be as specified, where applicable.

3.3.1 Recycled, virgin, and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 6.3.1).

3.3.2 Dissimilar metals. Dissimilar metals shall be electrically insulated from one another to minimize or prevent galvanic corrosion.

3.4 Design and construction. The semitrailer, lowbed shall be a tactical support mobility vehicle with a payload rated at 80,000 lb capacity and shall have a folding gooseneck which shall be operated by a winch and cable from the truck-tractor. The operation of the gooseneck will be designed to permit one-man operation for loading and unloading various types of construction equipment. The semitrailer shall not exceed the Passe-Partout International (PPI) clearance dimensions specified in figure 1.

3.4.1 Weights and dimensions. The semitrailer, without payload, resting on level ground and with the platform level, shall conform to the weights and dimensions specified below:

a.	Payload rating	40 ton
b.	Maximum overall width, with outriggers	120 in
c.	Maximum reducible width, with outriggers folded	96 in
d.	Minimum length of center bed (Load)	18 ft
e.	Maximum height of deck (Load bed)	40 in
f.	Minimum ground clearance (Load bed)	12 in
g.	Maximum curb weight	19,500 lb

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.4.1.1 Interchange coupling. The interchange coupling dimensions specified below shall be in accordance with SAE J701:

a.	Minimum support clearance radius	88 in
b.	Maximum swing radius	84 in
c.	Range of kingpin setting	16-30 in
d.	Upper fifth wheel plate height, loaded	65 ± 1 in

3.4.2 BII.

3.4.2.1 Wrench. A tire lug wrench shall be provided.

3.4.2.2 Highway warning kit. A highway warning kit including three emergency reflectors and four red flags shall be furnished and shall conform to FMVSS 125 and FMCSR 393.95. The kit shall be in a metal or plastic box and located in the tool box of the gooseneck.

3.4.2.3 Pocket for equipment record folder and manuals. A pocket for the vehicle operation manuals and the Government furnished log book shall be furnished and stowed in the tool box located under the floor of the gooseneck.

3.4.3 Screw threads. Unless otherwise specified (see 6.2), all screw threads shall be in accordance with FED-STD-H28.

3.4.4 Frame splices. Where frame members are spliced, joints shall be reinforced to fulfill the static loading requirements of 3.2.1 and the dynamic loading requirements of 3.4. Frame splices shall be included with technical proposal and shall be designed to avoid stress concentration. All splice welds shall be continuous.

3.4.5 Chassis. The semitrailer chassis shall have sufficient rigidity and strength to withstand both unloaded and fully loaded semitrailer in the operations of loading, unloading, and dynamic transport.

3.4.6 Frame assembly. Level with folding gooseneck. Main frame members shall be braced with a sufficient number of cross-members to insure stability. The Rear cross-members shall extend the full width of the semitrailer. The main structural members of the frame assembly shall be manufactured from low alloy high strength steel. All parts of the frame shall be electric-arc welded. When the semitrailer is loaded with rated payload, the maximum fiber stress in any frame member shall be no greater than 33 percent (%) of the frame material yield strength. The semitrailer shall be equipped with rear loading beavertail to sustain repeated loading as specified in 3.5.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.4.7 Folding gooseneck. The gooseneck shall be of full width of the semitrailer and with tapered approach ramp for safe loading of equipment. A hinged connection between the load carrying portion and the gooseneck deck shall permit the gooseneck to be laid on the ground in a prone position, to form a continuous full width ramp and loading approach to the semtrailer deck. A locking arrangement shall be provided to enable the gooseneck to be held erect in a fixed gooseneck type position. The folding gooseneck shall have a failsafe mechanical lock for transport and be non-binding during lowering and raising. The locks shall be safe and not deform in transportation, including front trailer supports complying with the performance and adjustment characteristics of SAE J701. A means of lubrication shall be provided for all moving parts and components.

3.4.8 Flooring. The platform shall be floored with hardwood in accordance with Class 1 of MIL-W-3912 and be capable of withstanding crawler tractor grousers and sheeps-foot rollers. Flooring shall be fastened to the frame in a manner without perforating the main frame rail. The wood surface shall be at least 3/8 in higher than adjoining metal members to prevent metal-to-metal contact of load and semitrailer. Flooring shall be laid lengthwise, as close together as practicable, attached with corrosion resistant countersunk bolts and bridge style floor clips to eliminate drilling frame members. The top of countersunk bolt heads shall be no less than 1/8 in and not more than 1/4 in below the top of the wood surface. Center inlaid floor shall be removable and of appropriate size to provide planks for a level load bearing surface when placed on outriggers. Wood shall completely cover the gooseneck except for the stowage compartment.

3.4.9 Wheel well covers. Wheel well covers shall be provided to service the wheels. There shall be no interference between the tires and platform or wheel well covers when the semitrailer is loaded to specified payload and subjected to the suspension system articulation specified herein.

3.4.10 Storage area. The storage area shall be provided to accommodate the various equipment and tools necessary for operation. It shall be provided with drain holes. The storage area shall be of sufficient size and 3 capacity of minimum nine cubic feet (ft^3) and shall provide storage for eight load binders, eight chains, and a crow bar.

3.4.11 Kingpin. The semitrailer shall be equipped with a floating type kingpin conforming to the dimensions specified in SAE J848. The kingpin retainer shall be constructed so as able to withstand a drawbar pull specified in SAE J133.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.4.11.1 Upper fifth wheel plate. The upper fifth wheel plate shall be adequate for coupling to a fully oscillating fifth wheel and be of sufficient size to cover a fifth wheel of 36 inches in diameter. The forward edge of the plate shall have a turned up lip for ease of coupling with a truck-tractor.

3.4.12 Suspension. The suspension system shall be of a rated capacity or equal to the load imposed at the ground when semitrailer is loaded with its specified payload. The suspension system shall consist of a combination of spring and walking beam suspension. Means shall be provided for axle and suspension alignment in accordance with SAE J875.

3.4.12.1 Axles. The semitrailer shall have a minimum of 3 axles capable of performing under conditions as depicted in requirements for suspension. The axle loads, with the semitrailer loaded with rated payload, shall be at least equal to 25,000 lb for each axle measured at the ground.

3.4.12.2 Suspension and axle clearances. Clearances shall preclude interference between suspension, axles, wheels or tires, and any portion of the vehicle under the conditions specified herein. Difference in height for specified set of dual wheels shall be measured at the center of the tread on the outer tire.

3.4.13 Wheel, rims, tires and tubes. Wheels, rims, tires and tubes shall be in accordance with the Tire and Rim Association recommendations and FMVSS 119 and FMVSS 120. Tire, rim size, wheel size and ply rating shall be the same for all wheels on each vehicle.

3.4.13.1 Tires. Tires shall be radial tube type with highway tread. The cold inflation pressure shall be matched to the payloads specified in accordance with the Tire and Rim Association. The tire shall be a minimum size and rating of 10.00 by 15, load range G.

3.4.13.2 Inner tubes. For tube-type tires, inner tubes shall be of the heavy duty type, and shall be of proper size for tires furnished. Tire flaps shall be provided for tube-type tires in accordance with Tire and Rim Association recommendations.

3.4.13.3 Tire carrier. Mounting provisions shall be provided on the beavertail for at least one spare tire and wheel, readily accessible for removal and replacement by one operator.

3.4.13.4 Spare wheel assembly. Spare wheel(s) or rim(s) with inflated tire(s) shall be mounted on the tire carrier specified in 3.4.12.3. The spare tire(s) shall be the same type, size tread design, and ply rating as the tires furnished on the semitrailer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.4.13.5 Articulation (wheels). Sufficient articulation shall be provided on each wheel under each of the following conditions and with the full payload on the roadbed of the semitrailer. Allowable load variation at each wheel from the mean or uniform loading is ± 30% when the axles are articulated as follows:

a. With first and third wheels on one side and center wheel on opposite side, elevated four inches above remaining wheels.
b. With any pair of opposite wheels elevated four inches above remaining wheels.
c. With any two pairs of opposite wheels elevated four inches above remaining pair.

3.4.14 Brakes. The brakes shall be of the full-air internal expanding type and shall conform to FMCSR 393.45, 393.46, and 393.52 and FMVSS 121. The brake system shall include piping, hose connections, gladhands, spring loaded dust covers or dummy gladhands equipped with security chains, air reservoirs (with remote operating control for the drain valve positioned above the bottom of the frame rail), automatic slack adjusters, brake chambers, relay emergency valve, and all other parts and connections required for a complete air-brake system. All brake linings shall be constructed from non-asbestos materials. Location of air fittings shall be near the front of the gooseneck and shall be recessed in the gooseneck to preclude damage. All components of the braking system shall be installed above the bottom of axles to provide adequate road clearance when traveling over uneven or rough terrain. No part of the foundation brakes shall extend below the bottom of wheel rims.

3.4.14.1 Parking brakes. The semitrailer shall be equipped with a minimum of two spring actuated parking brakes that shall hold the semitrailer, heading up or downhill with rated payload, on a 10% grade despite the depletion of the compressed air supply. The parking brakes shall be automatically applied upon disconnection of the emergency air line and under emergency conditions. The parking brakes shall conform to FMCSR 393.41.

3.4.14.2 Gladhands/coupler. The semitrailer shall be equipped with connectors for service and emergency air in accordance with SAE J318 or MS35746. The service brake connector shall be yellow and the emergency red. The location of the connectors shall be as specified in SAE J702. Gladhand tags conforming to MS53007-1, "service", and -2, "emergency", and dummy coupling assembly conforming to drawing 7411021, shall be furnished and properly installed.

3.4.14.3 Brake chambers. The semitrailer shall be equipped with commercial heavy duty spring applied type brake chambers with environmental covers, boots and diaphrams of a type unaffected by environmental conditions specified in 3.2.2. A manual means of disengaging the spring actuated parking brake independent of any power source shall be provided to allow emergency operation of the semitrailer. A means for manual lubrication and adjustment of the slack adjusters shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.4.15 Reserved.

3.4.16 Electrical.

3.4.16.1 Lighting system. The lighting system shall be 12 volts (V) direct current (dc) with all associated components and shall comply with FMCSR Part 393 and FMVSS 108. The system shall include no less than two composite lights as specified in MS52125-1. Lights and reflectors shall be recessed or guarded to protect them from damage during normal operation of the semitrailer. All wiring shall be properly routed and secured to protect against snagging or tearing. Lights and reflectors shall not be mounted on vertical surfaces of the rub rails or semitrailer bumpers. All electrical wiring shall conform to SAE J1292 using minimum 14 gauge wire.

3.4.16.2 Blackout lighting. The light emitting diode (LED) blackout stop and marker shall operate on 24 V. The emission of any vehicle light source, which may be illuminated in the blackout mode, shall be limited to the visible spectrum, 380 to 700 nanometers. No energy shall be emitted in the 700 to 1200 nanometer portion of the electromagnetic (EM) spectrum. Emission peaks shall not be more than 1% of the peak emission in the visible spectrum. Turn signals and clearance lights are to be inoperative during blackout mode.

3.4.16.3 Receptacle system, 12-24 V. The semitrailer shall be equipped with one 12 contact receptacle with cover, and one 7 contact receptacle with cover installed at the front of the semitrailer. The 12 contact receptacle shall conform to MS75021-1 and be equipped with a cover assembly conforming to Drawing 7731428, nut grommet, retainer conforming to Drawing 7723309, and grommet, electrical connector conforming to Drawing 7722333. The 7 contact receptacle shall conform to SAE J560 round socket for an intervehicle connector cable. The 12 contact receptacle shall be provided with necessary components to each circuit to reduce the voltage of a tactical military design truck tractor from 24 V to 12 V shall be connected through the necessary resistors into the 12 V semitrailer circuits as follows:

a. Not used
b. Connect to Circuit Number 3
c. Not used
d. Connect to Circuit Number 1
e. Connect to Circuit Numbers 2 and 6
f. Not used
g. Not used
h. Connect to Circuit Number 5
i. Not used
j. Not used
k. Not used
l. Not used

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

In addition, the connection between circuit 2 and 6, on the 7 pin connector, shall have a readily accessible external switch to allow for breaking of this circuit when the 7 pin connector is attached to the towing tractor in lieu of the 12 pin MS connector. Circuits b and j on tactical truck tractors are combination stop and turn signal indicator circuits. The normal 12 V turn signal lights will function both as turn signals and stop lights and the normal 12 V stop lights will not be in operation when the semitrailer is connected to a towing vehicle with a 24 V power supply. Because of this condition., the number 4 stop light circuit is not connected to the 24 V, 12 contact receptacle.

3.4.17 Transportability. The semitrailer shall be capable of being transported by rail, air and marine modes worldwide. The applicable transportability criterion is set forth in MIL-STD-1366. Preparation of the semitrailer to be transported by any mode shall be accomplished in 15 minutes (min) (total) or less by no more than two individuals using only tools on board. Storage on the vehicle shall be provided for all parts removed from the semitrailer.

3.4.17.1 Slinging provision. The semitrailer shall be equipped with lift points to permit slinging a fully loaded semitrailer in accordance with class 1 or 3, type II of MIL-STD-209.

3.4.17.2 Rail impact. The fully loaded semitrailer shall withstand rail impact testing in accordance with MIL-STD-810, method 516, procedure VIII without any damage or degradation in performance.

3.4.17.3 Air transport. The semitrailer shall be air transportable by the C130 aircraft in accordance with the criterion set forth in MIL-A-8421.

3.4.17.4 Vehicle tiedown. The semitrailer shall be equipped with a minimum of eight tiedowns on each side, and each tiedown shall be capable of withstanding a load of not less than 45,000 lb without failure or permanent deformation when the load is applied at an angle up to 45° from the longitudinal axis. Tiedown hardware to permit transportation of the vehicle in accordance with Type II, Class 2 of MIL-STD-209 shall be provided. Instruction shall be included for component removal when required for transport. The tiedown procedure shall permit tiedown of the vehicles to the floor (or deck) of the transport medium in such a manner as to prevent shifting or movement in any direction.

3.4.17.5 Lashing rings. Minimum 16 each, D-rings recessed around the perimeter of the semitrailer; two on gooseneck, two on the deck top at the rear of the load bed, and the remaining equally spaced on each side of the frame including suspension area. Each D-ring shall be of manufacturers heavy duty type. The tiedown provisions will permit securement of equipment in accordance with MIL-STD-209, for Type II equipment and Class 5 cargo tiedown provisions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.4.18 Stake pockets. Minimum ten each, stake pockets installed five on each side to accept four by four inch stakes with bottom stop and drainage provisions. The stake pockets shall be equally spaced from front to rear of the loading space, except when interference with critical frame members occurs.

3.4.l9 Outriggers. The semitrailer shall be equipped with folding outriggers for deck widening to 120 in. The outriggers shall be properly located for using center inlaid flooring planks of sufficient thickness to carry the payloads. Outriggers are also to be provided in the area of the roadwheels and to the rear of the semitrailer to sufficiently support the plank and payloads.

3.4.20 Rear wheel splash and stone throw protection. Anti sail mud flaps shall be provided at the rear of the rear wheels and shall be in accordance with SAE J682. The splash and stone throw protection assembly shall be capable of being removed with ordinary personnel tools.

3.4.21 Lift fitting. A heavy duty lift fitting, with removable pin for quick disconnect cable attachment, shall be provided and located at the center front of the gooseneck. The removable lifting pin shall be attached to the body of the semitrailer with a corrosion resistant chain to prevent loss and its bore shall be provided with lubrication fitting. The lifting attachment shall be capable of two times the load imposed by the unit cable.

3.5 Performance.

3.5.1 Automotive. The semitrailer, fully equipped and loaded with rated payload, shall meet all the requirements specified herein without any evidence of part failure or permanent damage when coupled to suitable tractors and operated under the speed and slope condition specified in table III.

TABLE III Speed and slope.

Condition	Payload (lb)	Minimum speed, Miles per hour (mph)
Unimproved roads; other reasonable hard uneven terrain	None	10
Unimproved roads; other reasonable hard uneven terrain	56,000 1/ 80,000 2/	10
Highways	56,000 1/ 80,000 2/	

1/ M916, 6x6 Truck-tractor
2/ M920, 8x6 Truck-tractor

3.5.2 Turning ability. The semitrailer shall be capable of assuming a 90° angle in both directions to the coupled towing vehicle without cramping, side-slipping, or damage to the semitrailer or the towing vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.5.3 Side slopes. The loaded semitrailer when towed by the specified truck-tractors shall be capable of operating on a 20% side slope without slipping or upsetting.

3.5.3.1 Gradeability. Semitrailer shall be capable of operating on a 0 to 20% grade heading up and down the respective grades without malfunction. When the semitrailer is on any incline specified herein, the semitrailer shall not interfere with any component of the truck-tractor, except where the upper fifth wheel plate is coupled to the truck-tractor fifth wheel plate.

3.5.4 Fording ability. The semitrailer shall ford salt and fresh water to a depth of 18 inches without any special servicing or protection before fording. No evidence of water leakage or moisture penetration into sealed wheel bearings, shall be permitted.

3.5.5 Braking. The service brakes shall stop the semitrailer-tractor combination, with the semitrailer loaded with specified payload, within the stopping distance requirements of FMVSS 121.

3.5.6 Tracking ability. The semitrailer shall conform to the tracking requirements of FMCSR 393.70.

3.5.7 Folding gooseneck ability. The gooseneck shall be capable of folding to the ground and of being raised and locked with the semitrailer fully loaded without any evidence of component failure, deformation or misalignment.

3.5.8 Rear and side loadings. The semitrailer, coupled with truck-tractors, shall be capable of being loaded from both the rear and the side when they are in a position adjacent to earth ramps.

3.5.9 Ozone resistance. All rubber components and accessories shall be ozone resistant and shall be tested in accordance with suffix letter C of ASTM D2000.

3.6 MANPRINT.

3.6.1 Safety. The semitrailer shall comply with all FMCSR and FMVSS regulations applicable to a vehicle of this weight class at the time of manufacture. it shall be free of sharp projections or edges that may cause the operator or maintainer injury. Operators and maintenance personnel shall not be unknowingly exposed to rotating or moving parts, hot surfaces, electrically energized components, components containing high pressures or other inherently hazardous components or systems. Consideration should be given to expected failure mode situation in addition to normal operations.

3.6.2 Human factor engineering (HFE). All subsystems and components of the semitrailer shall meet all safety and HFE requirements specified in MIL-STD-1472.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.7 Painting. All semitrailers shall be painted to provide a low reflectance CARC surface. The camouflage pattern will be supplied by the Government in accordance with Drawing 13226E7194. The final painted surface shall be three color camouflage pattern applied in two coats at least 1.8 mils thick (total), without sags, runs, or thin areas and shall conform to MIL-C-46168 or MIL-C-53039. The three color pattern segments required shall be as follows:

a. 41 ± 5% of the surface area shall be of the color black, conforming to chip 37030 of FED-STD-595.
b. 15 ± 5% of the surface area shall be of the color camouflage brown 383, conforming to chip 30051 of FED-STD-595.
c. 44 ± 5% of the surface area shall be of the color camouflage green 383, conforming to chip 34094 of FED-STD-595.

3.7.1 Cleaning and treating. The semitrailer and components shall be cleaned and treated in accordance with MIL-STD-193 except that all hardware and trim not normally painted shall be treated to provide a matte finish. In addition, contact areas of ferrous sheet metal 0.125 inch thickness and under, which cannot be primed after welding or are not zinc clad steel, shall be cleaned in accordance with TT-C-490 and primed in accordance with MIL-P-46105.

3.8 Rustproofing. The semitrailer shall be rustproofed in accordance with MIL-R-46164.

3.9 Welding. Welding shall not be employed as a repair measure for defective parts. Welding procedures shall be in accordance with MIL-STD-1261. Weld penetration shall be such as to provide transfer of maximum design stress through base metals. Fillet welds shall be provided when necessary to reduce stress concentration.

a. Weld joint design and construction shall provide adequate material for transferral of load through the joint from one member to another without significant increase in stress.
b. All welders shall be tested and qualified and submit specimens (samples or actual parts) simulating all welding conditions. Specimens shall be available to the government quality assurance representative for each welder prior to performing production welding. The government quality assurance representative may require requalification of welders, welding equipment operators or equipment to the recorded welding procedures when the quality is suspect based on inspection results.

3.10 Marking. The semitrailer exterior markings shall be placed and sized in accordance with MIL-STD-642. Markings, letters and numbers on the semitrailer shall be lusterless paint conforming to MIL-C-53039 or MIL-C-46168. Black chip 37030 of FED-STD-595 shall be used over a green or brown background. Camouflage green 383, chip 34094 of FED-STD-595, shall be used over black background.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

3.10.1 Instructional markings. Markings, such as tire pressure, tiedown points, center of gravity (empty), etc. shall be applied to the semitrailer in block letters or numbers from 7/8 to one inch in height.

3.10.2 CARC marking. All semitrailers shall have the word "CARC" painted in block letters in a conspicuous location as near to the data plates as practical. Height of block letters shall be in the range specified in 3.10.1.

3.10.3 National symbol. A three inches star shall be applied on the semitrailer in accordance with MIL-STD-642.

3.10.4 Temporary and concealed markings. When specified (see 6.2), all semitrailers supplied to foreign nations shall have temporary markings. Semitrailers requiring temporary or concealed markings shall be in accordance with MIL-STD-642.

3.11 Data plates. Metal data plates shall be provided in accordance with type I, for identification plates, or type III, general use, composition C of MIL-P-514, shall be photosensitive aluminum in accordance with type I, class I of GG-P-455 and shall have a black background.

3.11.1 Lubricants. Military equivalent of commercial lubricants shall be depicted on a plate conforming to SAE J753 installed in a readily accessible area of the gooseneck. The plate shall indicate ambient temperature range for the various lubricants.

3.12 Lubrication. Lubrication means shall be provided for all moving parts requiring lubrication. Grease lubrication fittings shall conform to SAE J534. Lubricants shall be selected in accordance with SAE J754. The selected multipurpose lubricant (MPL) shall be functionally conforming to MIL-L-2105, the multipurpose grease with molybdenum disulfide (MPGM) shall be conforming to MIL-M-7866 and the multipurpose grease (MPG) shall be conforming to MIL-G-10924.

3.13 Servicing and adjustment. Prior to delivery, the manufacturer shall service and adjust each semitrailer for customer operational use, including at least the following:

a. Inflation of all tires.
b. Adjustment of the brakes.
c. Proper functioning of all lights.
d. Complete lubrication.

3.14 Workmanship. Workmanship shall be of such a quality which will assure that the vehicle and its components are free of defects that compromise, limit or reduce the capability of the vehicles system in the performance of its intended use. Bolted and riveted construction shall be secure in accordance with its intended use. All fuels, lubricants, and hydraulic fluids shall be provided clean and filtered in accordance with their intended use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractors overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Inspection equipment. Unless otherwise specified in the contract (see 6.2), the contractor is responsible for the provision and maintenance of all inspection equipment necessary to assure that supplies and services conform to contract requirements. Inspection equipment must be capable of repetitive measurements to an accuracy of 10% of the measurement tolerance. Calibration of inspection equipment shall be in accordance with MIL-STD-45662.

4.1.3 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of (a) surveillance of the operation to determine that practices, methods, and procedures of the written quality assurance system plan are being properly applied, and (b) Government product inspection to measure the quality of the product offered for acceptance. Deviation from the prescribed or agreed upon procedure, or instances of poor practices which might have an adverse effect upon quality of the product, will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies shall be cause for suspension of acceptance until corrective action has been made, or until the conformance of the product to prescribed criteria has been demonstrated.

4.1.4 Qualified products. When a part or component is specified to conform to a specification having a Qualified Products List (QPL), the contractor shall make available to the Government documentation of item acquisition from such QPL. The documentation shall include the QPL date and identification of the supplier, purchase order, and quantity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.1.5 Quality assurance provisions. In the conduct of inspection, the contractor shall adhere to Quality Assurance Provisions (QAP) and General Quality Assurance Provision (STA Form 458) as applicable and as required by the documents forming part of this specification.

4.1.6 Certification. Where certification (see 4.8.1) is required to verify material or component conformance to a specification, the contractor shall furnish such certification along with documented test results and performance and analytical data, as applicable.

4.2 Classification of inspection:

a. First article inspection (see 4.3).
   1. First production vehicle inspection (FPVI) (see 4.3.1).
   2. Shakedown test (see 4.3.2).
   3. Initial production test (IPT) (see 4.3.3).

b. Quality conformance inspections (QCI) (see 4.4).
c. Control tests (see 4.5).
d. Comparison tests (see 4.6).

4.3 First article inspection. First article inspection shall be performed on the first production semitrailer and on three additional semitrailers, randomly selected by the Government, which shall be designated as initial production vehicles. Approval of the first article samples shall not relieve the contractor of the obligation to supply semitrailers that are fully representative of those inspected as a first article sample. Any change or deviation of production vehicles from the first article sample shall be subject to the approval of the contracting officer.

4.3.1 FPVI.

4.3.1.1 In-process inspection. The first production vehicle (a) shall be inspected during fabrication to determine conformance of materials and workmanship to specified requirements. These inspections shall preceed application of primer and paint. Processing and welding procedures, the quality system, inspection records, calibration procedures, welder certifications shall be reviewed and evaluated.

4.3.1.2 Completed vehicle inspections.

4.3.1.2.1 Contractor inspection. The first production and initial production semitrailers shall be road tested and completely inspected by the contractor for conformance to the requirements of the contract and specification in its entirety. The road test shall be as specified in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.3.1.2.2 Preliminary inspection. The first production and initial production semitrailers shall be subjected to an inspection, examination and road tests by the responsible Government inspection element and Government Procuring Activity. This inspection will be a thorough and complete inspection for conformance to the requirements of the contract and specification in their entirety. Road tests shall be performed as specified in 4.5.2.

4.3.1.2.3 Vehicle disposition. After completion of inspection, the first production semitrailer shall remain at the manufacturing facility, as a production sample, and be the last vehicle of its type shipped on the contract. The semitrailer may be released sooner at the discretion of the contracting officer. The contractor shall service and maintain the semitrailer during this period in accordance with applicable documents for care and preservation while in storage. All configuration changes taking place after the first production inspection, shall be made to the first production semitrailer so that the semitrailer will be representative of the current configuration throughout the life of the contract. No configuration changes may be implemented on production vehicles after Government conditional acceptance of the first production vehicle (applicable vehicle type) without written authorization from the contracting officer.

4.3.2 Shakedown tests. Following the first production trailer inspection and road test, the trailer shall be subjected to a 2,000 mi shakedown test, by the contractor, in accordance with table IV, except that the mileage shall be 1,000 mi on hard surface and 1,000 mi on secondary roads with 900 mi of each type surface at maximum payload and 100 mi of each surface without payload, utilizing the contractor equipment. A written test report will be submitted as per contractual requirements.

TABLE IV. IPT test profile, 6,000 mi. 1/

Course	Mileage (mi)	Speed (mph) 2/	Loading condition
Hard-surfaced	2,700	55	rated payload
road 3/	300	55	empty
Improved			
secondary road			
Munson gravel	1,114	35	rated payload
	150	35	empty
Churchville “C”	1,114	35	rated payload
	100	35	empty
Belgian block	192	35	rated payload
	30	35	empty
Off-road 4/	300	10	rated payload

1/ IPT test to be conducted at Aberdeen proving ground.
2/ Speeds shall be up to and including values specified.
3/ Hard-surfaced road such as Perryman high speed paved.
4/ Off-road (Level to slightly hilly) such as Perryman “2”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.3.3 IPT (first article). To determine conformance to section 3 of this specification in its entirety and contractual requirements, the Government shall select initial production trailers to be tested. The trailers shall be representative of production trailers. The trailers will be tested for 6,000 mi to include endurance, performance, reliability, maintainability, design, welding, materials, and workmanship, as specified in table V. All the tests shall be performed by the Government at a Government selected test site, utilizing all tables specified herein. The contractor shall have repair parts prepositioned at the test sites to expeditiously provide for adequate support of the tests at no cost to the Government.

TABLE V. Location for tests.

Title of test	Requirement	Test Paragraph	Place of manufacture		Government test site
First production Vehicle inspection					
In-process inspection		4.3.1.1	X		
Preliminary inspection		4.3.1.2.2	X		
Vehicle disposition		4.3.1.2.3	X		
Shakedown test		4.3.1.2.4	X		
IPT (first article)	Section 3 inclusive, 3.1	4.3.2			X
Reliability	3.2, 3.2.3, 3.2.3.1	4.3.2.1			X
Maintainability	3.2.4	4.3.2.2			X
QCI and acceptance		4.4.7	X		
Controls tests		4.5	X		
Comparison tests		4.6			X
			Accept-ance	Control	
Examinations, inspections, and tests		4.7	X	X	X
Materials check	3.3, 3.3.1	4.7.1	X	X	
Screw threads check	3.4.3	4.7.2	X	X	X
Lashing rings check	3.4.17.5	4.7.3	X	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

TABLE V. Location for tests - Continued.

Title of test	Requirement	Test Paragraph	Place of manufacture		Government test site
			Acceptance	Control	
Lashing rings test	3.4.17.5	4.7.3.1		X	X
Axle and suspension check	3.4.12, 3.4.12.1, 3.4.12.2	4.7.4	X		
Axle and suspension test	3.4.12 thru 3.4.12.2	4.7.4.1		X	X
Tires, tubes and wheels check	3.4.13, 3.4.13.1, 3.4.13.2	4.7.5	X		
Tires, tubes and wheels test	3.4.13 thru 3.4.13.2	4.7.5.1		X	X
Tire carrier and spare wheel check	3.4.13.3 thru 3.4.13.4	4.7.5.2	X	X	X
Rear wheel splash and stone throw protection	3.4.19	4.7.6	X	X	X
Wheel well covers check	3.4.9	4.7.7	X		
Wheel well covers test	3.4.9	4.7.7.1		X	X
Brake system check	3.4.14, 3.4.14.1, 3.4.14.3	4.7.8	X		
Brake operating test	3.4.14, 3.4.14.1	4.7.8.1		X	X
Brake system test	3.4.14 thru 3.4.14.3, 3.5.5	4.7.8.2			X
Kingpin check	3.4.11	4.7.9	X	X	X
Upper fifth wheel plate check	3.4.11.1	4.7.10	X	X	X
Lift fitting check	3.4.21	4.7.11	X		
Lift fitting test	3.4.21	4.7.11.1		X	X
Frame check	3.4.4, 3.4.5, 3.4.6	4.7.12	X		
Frame test	3.2.3.1, 3.4, 3.4.4, 3.4.5, 3.4.6	4.7.12.1		X	X
Storage area check	3.4.10	4.7.13	X	X	X
BII check	3.4.2 thru 3.4.2.3	4.7.14	X	X	X
Floor	3.4.8	4.7.16	X		X
Stake pockets	3.4.18	4.7.17	X		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

TABLE V. Location for tests - Continued.

Title of test	Requirement	Test Paragraph	Place of manufacture		Government Test site
			Acceptance	Control	
Outriggers	3.4.19	4.7.18	X	X	X
Folding gooseneck	3.4.7, 3.5.7	4.7.19	X	X	X
Intervehicular connections	3.4.14.2	4.7.20	X	X	X
Electrical system check	3.4.16 thru 3.4.16.3	4.7.21	X		
Electrical systems	3.4.16 thru 3.4.16.3	4.7.21.1	X	X	X
Lubrication	3.11.1, 3.12	4.7.22	X		
Rustproofing	3.8	4.7.23	X		
Wood treatment	3.4.8	4.7.24	X		
Welding	3.9	4.7.25	X	X	X
Painting and marking check	3.7, 3.7.1, 3.10 thru 3.10.4	4.7.26	X	X	X
Polyurethane paint inspection method	4.7.26	4.7.26.1	X		
Marking check	3.10 thru 3.10.4	4.7.27	X		X
Data plates check	3.11	4.7.28	X		X
Transportability provision check	3.4.17, 3.4.17.1				
	3.4.17.4	4.7.29	X		
Transportability provisions	3.4.17 thru 3.4.17.4	4.7.29.1			X
Turning ability test	3.5.2	4.7.30		X	X
Tracking ability test	3.5.6	4.7.31		X	X
Articulation test	3.4.13.5	4.7.32		X	X
Dimension and clearance inspection	3.4.1, 3.4.1.1, 3.4.10, 3.4.11, 3.4.11.1	4.7.33		X	X
Rear and side Loading test	3.5.8	4.7.34			X
Front loading test	3.4, 3.4.7, 3.5.7	4.7.35		X	X
Climatic tests	3.2.2	4.7.36			X
Compatibility test	3.2.1, 3.4 3.4.1, 3.4.1.1 3.4.21, 3.5.8, 6.1	4.7.37			X
Side slope test	3.5.3	4.7.38			X
Fording test	3.5.4	4.7.39			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

TABLE V. Location for tests – Continued.

Title of test	Requirement	Test Paragraph	Place of manufacture		Government test site
			Acceptance	Control	
Performance test	3.5, 3.5.1, 3.5.9	4.7.40			X
Gradeability test	3.5.3.1	4.7.41			X
Safety check	3.6.1	4.7.42	X		X
Safety test	3.6.1	4.7.42.1			X
Human factors engineering test	3.6.2	4.7.43			X
Servicing and adjustment check	3.13	4.7.44	X		X
Workmanship check	3.14	4.7.45	X		X

4.3.3.1 Reliability verification. To determine conformance to 3.2, 3.2.3, and 3.2.3.1, a point estimate value greater than 6,000 mi must be demonstrated during test. The point estimate will be computed using the cumulative test mileage of all trailers divided by the cumulative number of chargeable failures of all trailers.

4.3.3.2 Maintainability verification. To determine conformance to 3.2 and 3.2,4, an MR of less than or equal to that specified in 3.2.4 must be demonstrated during tests. The MR will include all maintenance actions with the exception of driver/crew checks and services, and maintenance induced errors.

4.3.4 Test failure. Failure of the trailer(s) as the result of deficiencies related to design, welding, workmanship or deficient materials encountered during, or as a result of tests shall be cause for rejection of the trailers until evidence has been provided by the manufacturer that corrective action has been taken to eliminate the deficiency. Any deficiency found during or as a result of tests shall be prima facie evidence that all trailers produced prior to completion of tests are similarly deficient, unless evidence satisfactory to the contracting officer is furnished by the contractor that they are not similarly deficient. Deficiencies on all trailers shall be corrected by the contractor at no cost to the Government.

4.4 Inspection provisions.

4.4.1 Lot size. A lot shall consist of all trailers, submitted at one time for acceptance inspection, and manufactured under essentially the same conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.4.1.1 Sampling, process average. Sampling may be initiated if the process average for the first 50 consecutively serial numbered trailers inspected, is less than the Acceptable Quality levels (AQL) specified in the classification of defects for critical, major, and minor defects. Process average will be computed as follows:

$$\text{Process average} = \frac{\text{Number of defects x 100}}{\text{Number of trailers inspected}}$$

If the computed process average exceeds the specified AQL, the 100% inspection shall be performed and continued until such time that the process average for 50 consecutively serial numbered trailers is less than the specified AQL. When sampling is authorized, MIL-STD-105, level II will apply.

4.4.2 Samples. Samples shall consist of complete semitrailers with all on-vehicle-equipment (OVE) installed.

4.4.3 Examinations. Visual, dimensional, and preliminary functional examination shall consist of examination of trailers for conformance to the applicable drawings and the requirements of this specification. Examinations shall be preformed utilizing the classification of defects in table VI with AQLs, as specified.

TABLE VI. Classification of defects.

Category	Characteristic	Defect	Method of Inspection
Critical	AQL 0.0% defective		
01	Axles and trunnions	Inoperative	Functional
02	Brake system components	Inoperative	Functional
03	Air line and fittings	Air leaks over 2 pounds per square inch per minute, chaffing	Functional
04	Electrical system components (turn indicators, clearance lights, brake lights including bulbs)	Inoperative	Functional
05	Folding gooseneck	Restricted operation, will not lock in up position	Functional
06	Intravehicular connecting plugs	Pin misalignment, deformation	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects - Continued.

Category	Characteristic	Defect	Method of Inspection
Major	AQL 1.0% defective		
101	Frame	Structural, welding or riveting defects	Visual
102	Axles and trunnions	Improper assembly or installation; welding defects; unusual noise; lube leaks	Visual and functional
103	Brake system	Malfunction; component Damage, nonconformance, air leaks	Visual and functional
104	Electrical system components	Malfunction; lighting sequence improper, damage	Visual and functional
105	Suspension system	Damage, improper assembly or installation of major components	Visual and functional
106	Wheels and tires	Condition, type, improper installation, lug nut torque	Visual and functional
107	Folding gooseneck	Malfunction, damage, improper assembly	Visual and functional
108	Upper fifth wheel plate and kingpin	Improper assembly or mounting, damaged surfaces	Visual
109	Tracking ability	Nonconformance	Visual
110	Truning ability	Nonconformance	Visual
111	Towing speed (highway)	Nonconformance	Functional
112	Operating units	Overheating	Functional
113	Lubricating fitting and drain plugs	Defective, missing, improper installation	Visual
114	Outriggers	Damage, improper assembly or installation, ease of operation	Visual and functional
115	Tiedowns, lashing and lifting devices	Missing, improperly located, welding defects	Visual
116	Intervehicular connections	Damage, malfunctions	Visual
117	OVE	Missing, damaged	Visual
118	Paint	Mixing, application improper, voids	Visual and test

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects - Continued.

Category	Characteristic	Defect	Method of Inspection
Minor	AQL 2.5% defective		
201	Wheels and tires	Tire pressure	Gage
202	Electrical cable, tubing, wires and ground	Improperly coded, protected, installed or assembled	Visual
203	Brake system components	Improper assembly or installation	Visual
204	Electrical system	Improper assembly or installation	Visual
205	Suspension system components	Improper assembly or installation	Visual
206	Frame	Improper assembly or installation	Visual
207	Intervehicular connectors	Improper assembly or installation	Visual
208	Reflectors	Missing, defective, improper installation	Visual
209	Platform and deck	Missing screws or bolts, improperly located or installed	Visual
210	Wood decking	Missing, defective, improper installation or treatment	Visual
211	Paint	Improper color, runs, sags	Visual
212	Deals, data and instruction plates	Incomplete data, improper size or installation	Visual
213	Lubrication	Improper application	Visual
214	Protective coatings	Improper application, coverage or materials	Visual
215	Rear wheel splash and stone throw protection	Damage, improper assembly or installation	Visual

4.4.4 Recurring major deficiencies. A major deficiency is recurring when the same defect occurs more than once in the same sample, or when the defect occurs in two successive samples. A major defects may be considered recurring when the historical inspection records ("P chart or approved equivalent) reflect such a condition. Recurring major deficiencies shall be cause for the entire lot or lots to be inspected for the recurring deficiencies. The deficiencies shall be corrected by the contractor when found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.4.5 Recurring minor deficiencies. A minor deficiency is recurring if it occurs more than twice in the same sample, or when the defect occurs in four successive samples, Recurring minor deficiencies shall be cause for the entire lot or lots to be inspected for the recurring deficiencies and correction shall be accomplished prior to acceptance.

4.4.6 Unclassified characteristics. All unclassified defects having no bearing on function, safety, interchangeability of life, but which are considered departures from good workmanship, shall be noted in writing. Workmanship deficiencies falling within this category and recurring in five consecutive lots, or in ten lots or more within a 30-day period, shall be added to the minor characteristics with no increase in AQLs. This deficiency may be deleted from the minor classification of characteristics when five consecutive lots are found free of the deficiency.

4.4.7 QCI and acceptance. To determine conformance to section 3 in its entirety, each completed trailer shall be examined and inspected as specified in tables V and VI and road tested for a distance of not less than 15 mi by the contractor. Trailer(s) shall be completely assembled and serviced. Each trailer and its components and sub-systems shall be fully inspected for proper function and operation and correction of defects made as required. The trailer will be re-run an additional 15 mi and examined as necessary to validate corrections and to assure an acceptable trailer.

4.4.7.1 Failure. If a trailer fails to pass any acceptance test specified in table V, the Government inspector shall reject the entire-lot or trailer(s) and shall stop acceptance of subsequent trailers until evidence has been provided by the contractor that corrective action has been taken to correct the deficiencies causing the rejection.

4.5 Control tests.

4.5.1 Frequency. The Government shall select at random, 1 semitrailer out of each 40 trailers produced or 1 for each month of production for the control tests specified in 4.5.2 and tables V and VI.

4.5.2 Fifty-mile test. Each trailer selected for control test by the Government shall be operated for a distance of not less than 50 mi by the contractor. Trailers shall be completely assembled and serviced. The test course or area shall be selected by the manufacturer and shall be 30 mi of paved and 20 mi of secondary roads, The 50-mi shall be with the trailer loaded with a properly distributed load as specified in the contract.

4.5.3 Failure. If the trailer selected fails to pass any of the control tests, the Government inspector shall stop acceptance examination and testing on subsequent trailers until such time as conditions causing the failure have been remedied. Any defect found during or as a result of the test shall be prima facie evidence the trailer(s) accepted subsequent to the previous acceptable control test trailer(s) are similarly defective unless evidence satisfactory to the contracting officer

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

is furnished by the contractor that there are not similar defects. Such defects on all trailer(s) shall be corrected by the contractor at no cost to the Government. The contractor shall correct defects on all trailer(s) represented by the failed control test trailer(s). Another trailer(s) with corrective action implemented shall be subjected to the control test.

4.6 Comparison test. The Government may select semitrailer(s) at any time to examinations and test as specified in tables I through VII to determine conformance to contractual, specification, performance, materials, welding, workmanship, and design requirements and to compare the test results with previous standards. The tests shall be conducted at Government proving grounds or other test site(s) designated by the Government. The semitrailer(s) shall be tested with payloads as specified. The semitrailer(s) selected shall not include any semitrailer(s) previously tested for conformance to 4.5 (control test).

TABLE VII. Comparison test profile, 3,000 mi. 1/

Course	Mileage (mi)	Speed (mph) 2/	Loading condition
Hard-surfaced	1,350	55	rated payload
road 3/	150	55	empty
Improved			
secondary road			
Munson Gravel	557	35	rated payload
	75	35	empty
Churchville “C”	557	35	rated payload
	50	35	empty
Belgian block	96	35	rated payload
	15	35	empty
Off-road 4/	150	10	rated payload

1/ Comparison test to be conducted at Aberdeen proving ground.
2/ Speeds shall be up to and including values specified.
3/ Hard-surfaced road such as Perryman high speed paved.
4/ Off-road (level to slightly hilly) such as Perryman "2".

4.6.1 Test failure. Failure of any trailer(s) tested to comply with any of the requirements specified in the contract or any major defects, of design, workmanship, welding, or material nature occuring during or as a result of the test cycle, may be considered cause for refusal to continue acceptance of trailer(s) by the Government until objective evidence has been provided by the manufacturer that corrective action has been taken. Any defect found during or as a result of the test shall be prima facie evidence that all trailer(s) are similarly defective unless evidence satisfactory to the contracting officer is furnished by the contractor that they are not similarly defective. Such trailer(s) shall be corrected by the contractor at no cost to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.7 Examinations, inspection, and tests.

4.7.1 Materials check. Materials shall be checked for conformance to the requirements specified by 3.3, 3.3,1 and 3.3.2.

4.7.2 Screw threads check. The screw threads shall be checked for conformance to the requirements specified by 3.4.3.

4.7.3 Lashing rings check. To determine conformance to 3.4.17.5, each semitrailer, less payload, shall be checked for proper installation and location of cargo tiedowns as specified.

4.7.3.1 Lashing rings test. To determine conformance to 3.4.17.5, the semitrailer shall be tested for specified requirements.

4.7.4 Axle and suspension check. To determine conformance to 3.4.12, 3.4.12.1, and 3.4.12.2, the suspension system and axles shall be checked for proper assembly and installation of components and conformance to specified requirements.

4.7.4.1 Axle and suspension test. The axles and suspension shall be tested to determine conformance to the requirements specified by 3.4.12 through 3.4.12.2.

4.7.5 Tires, tubes and wheels check. To determine conformance to 3.4.13, 3.4.13.1, and 3.4.13.2, the tires and wheels shall be checked for proper assembly, installation, and conformance to specified requirements.

4.7.5.1 Tires, tubes and wheels test. The tires, tubes and wheels shall be tested to determine conformance to the requirements specified by 3.4.13 through 3.4.13.2.

4.7.5.2 Tire carrier and spare wheel check. The spare wheel and mounting provisions shall be checked to determine conformance to the requirements specified by 3.4.13.3 and 3.4.13.4.

4.7.6 Rear wheel splash and stone throw protection. To determine conformance to 3.4.20, splash and stone throw protection provisions shall be checked for specified requirements.

4.7.7 Wheel well covers check. The wheel well covers shall be checked to determine conformance to the requirements specified by 3.4.9.

4.7.7.1 Wheel well covers test. The wheel well covers shall be tested to determine conformance to the requirements specified by 3.4.9.

4.7.8 Brake system check. To determine conformance to 3.4.14, 3.4.14.1, and 3.4.14.3, the complete brake system and air lines shall be checked for proper assembly and installation of components and conformance to specified requirements. The load or the 10% slope is not required for this check. Air leaks are not allowed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.7.8.1 Brake operation test. To determine conformance to 3.4.14 and 3.4.14.1, the semitrailer service brakes, parking brake and emergency brakes and air lines shall be operated to assure operation to specified requirements. The 10% slope is not required for this test. Air leaks are no allowed.

4.7.8.2 Brake system test. To determine conformance to 3.4.1.4 through 3.4.14.3, and 3.5.5, the brake system and air lines shall be operated and tested to assure operation to specified requirements. Air leaks are not allowed.

4.7.9 Kingpin check. To determine conformance to 3.4.11, the kingpin shall be checked for proper installation and conformance to specified requirements.

4.7.10 Upper fifth wheel plate check. The upper fifth wheel plate shall be checked for proper installation and conformance to requirements specified by 3.4.11.1.

4.7.11 Lift fitting check. The lift fitting shall be checked for proper installation and conformance to requirements specified by 3.4.21.

4.7.11.1 Lift fitting test. The lift fitting shall be tested for conformance to the requirements specified by 3.4.21.

4.7.12 Frame check. To determine conformance to 3.4.4, 3.4.5, and 3.4.6, the frame shall be checked for proper construction, as specified. Welds shall be visually checked to the free of slag, spatter, undercut porosity, lack of fusion, cracks, and other similar defects.

4.7.12.1 Frame test. The frame shall be tested, to determine conformance to 3.2.3.1, 3.4.4, 3.4.5, and 3.4.6.

4.7.13 Storage area check. To determine conformance to 3.4.10, the storage area shall be checked for the requirements specified.

4.7.14 BII check. The BII shall be checked to determine conformance to the requirements specified by 3.4.2 through 3.4.2.3.

4.7.15 Reserved.

4.7.16 Floor. To determine conformance to 3.4.8, flooring shall be checked for proper installation and conformance to specified requirements.

4.7.17 Stake pockets. To determine conformance to 3.4.18, stake pockets shall be checked for proper construction, installation, and conformance to specified requirements.

4.7.18 Outriggers. To determine conformance to 3.4.19, the outriggers shall be checked for proper operation, construction, and conformance to specified requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.7.19 Folding gooseneck. To determine conformance to 3.4.7, and 3.5.7, the gooseneck shall be checked for proper construction and function as specified. The gooseneck on each trailer shall be raised and lowered, coupling and uncoupling the trailer to and from the prime mover. The gooseneck shall be checked to be free of binding during this operation and to fold flat to the ground when lowered.

4.7.20 Intervehicular connections. To determine conformance to 3.4.14.2 and 3.4.16.3, intervehicular connections shall be checked for specified requirements.

4.7.21 Electrical system check. To determine conformance to 3.4.16 through 3.4.16.3, the electrical system and all components shall be checked for proper assembly, installation, function and conformance to specified requirements. Spectrum testing is not required for this check..

4.7.21.1 Electrical system test. The electrical system shall be tested to determine conformance to the requirements specified by 3.4.16 through 3.4.16.3.

4.7.22 Lubrication. To determine conformance to 3.11.1, and 3.12, the vehicle shall he checked for proper lubrication as required. Lubrication fittings and lubrication data plates shall be checked for proper installation, function, and conformance to specified requirements.

4.7.23 Rustproofing. Rustproofing shall be checked for proper application as specified in 3.8.

4.7.24 Wood treatments. Wood shall be checked for proper treatment as specified in 3.4.8.

4.7.25 Welding. To determine conformance to 3.9, all welds shall be checked for conformance to specified requirements.

4.7.26 Painting and marking check. To determine conformance to 3.7. 3.7,1, and 3,10 through 3,10.4, all applicable surfaces shall be checked for cleaning, treatment, priming and painting as specified. Identification markings shall be checked for specified requirements. Top coat polyurethane paint will be inspected in accordance with paragraphs 4.7.26.1.

4.7.26.1 Polyurethane paint inspection method. To determine conformance to 4.7.26, the painting test specified by the contract, section C.X, shall be performed.

4.7.27 Marking check. All markings shall be check to determine conformance to the requirements specified by 3.10 through 3.10.4.

4.7.28 Data plates check. All data plates shall be checked for installation complete data to determine conformance to the requirement specified by 3.11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.7.29 Transportability provision check. To determine conformance to 3.4.17, 3.4.17.1, and 3.4.17.4, each semitrailer, less payload, shall be checked for proper installation and location of lift points, vehicle tiedown, and markings as specified.

4.7.29.1 Transportability provisions. To determine conformance to 3.4.17 through 3.4.17.4, the semitrailer, with rated payload, shall be subjected to sling, tiedown, and lifting requirements as specified.

4.7.30 Turning ability test. To determine conformance to 3.5.2, the trailer combination shall be operated as specified and checked for specified turning angle in both directions and observed for interference with the prime mover and damage to the trailer or prime mover. The required load is specified by the test performed.

4.7.31 Tracking ability test. To determine conformance to 3.5.6, the semitrailer shall be tested according to specified requirements.

4.7.32 Articulation test. To determine conformance to 3.4.13.5, the axle and suspension system, with payload specified by the test performed, shall be tested for specified requirements.

4.7.33 Dimension and clearance inspection. To determine conformance to 3.4.1, 3.4.1.1, 3.4.10, 3.4.11, and 3.4.11.1, the semitrailer shall be inspected for specified requirements.

4.7.34 Rear and side loading test. To determine conformance to 3.5.8, a vehicle as specified in the contract, shall be rear end loaded and also side loaded with a semitrailer adjacent to earth ramps as specified. Any damage to the semitrailer or truck-tractor during loading or failure of the semitrailer to permit loading of the vehicle shall be cause for rejection. No other aids to the semitrailer other than specified earth ramps shall be used.

4.7.35 Front loading test. To determine conformance to 3.4, 3.4.7, and 3.5.7, loading requirement, a vehicle as specified in the contract shall be front loaded with the semitrailer gooseneck unfolded flat to the ground as specified. Any damage to the semitrailer during loading for failure of the semitrailer to permit loading of the vehicle shall be cause for rejection.

4.7.36 Climatic tests. To determine conformance to 3.2.2, semitrailer(s) shall be tested for specified requirements.

4.7.37 Compatibility test. To determine conformance to 3.2.1, the semitrailer(s), with specified payload, shall be tested for conformance to requirements 3.4, 3.4.1, 3.4.1.1, 3.4.21, 3.5.8 and 6.1 with each truck-tractor specified. Each truck-tractor and semitrailer combination shall be weighed to assure that the truck-tractor specifications are not exceeded. Each truck-tractor specified shall be used to accomplish the mileages required for each test semitrailer(s). The test mileages will be divided equally between truck-tractors. Each truck-tractor shall furnish the test semitrailer with 24V electrical power for 50% of its allotted mileage and 12V electrical power for the remainder of its allotted mileage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

4.7.38 Side slope test. To determine conformance to 3.5.3, the semitrailer shall be operated on a 20% slope as specified with each specified truck-tractor.

4.7.39 Fording test. To determine conformance to 3.5.4, the semitrailer shall be operated in a water depth as specified. After the fording operations, the wheel bearings and electrical components shall be checked for water contamination.

4.7.40 Performance test. The semitrailer shall be tested to determine conformance to the requirements specified by 3.5, 3.5.1, and 3.5.9.

4.7.41 Gradeability test. The semitrailer shall be tested to determine conformance to the requirements specified by 3.5.3.1.

4.7.42 Safety check. The semitrailer shall be checked to determine conformance to the requirements specified by 3.6.1. Ambient temperature and weather conditions only.

4.7.42.1 Safety test. The semitrailer shall be tested to determine conformance to the requirements specified by 3.6.1.

4.7.43 Human factors engineering test. The semitrailer shall be tested to determine conformance to the requirements specified by 3.6.2.

4.7.44 Servicing and adjustment check. The semitrailer shall be checked for servicing and adjustments to determine conformance to the requirements specified by 3.13.

4.7.45 Workmanship check. The semitrailer shall be checked for departures from workmanship requirements specified by 3.14.

4.8 Inspection of packaging. Inspection of packaging shall be accomplished to assure conformance to the requirements specified in 3.13, and section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking for the desired level shall be in accordance with the applicable packaging requirements, and MIL-V-62038 as specified by the contracting authority (see 6.2).

6. NOTES

6.1 Intended use. The semitrailers covered by this specification are of the heavy-duty type used by commercial construction companies engaged in the transport of heavy engineer construction equipment and material associated with construction operations as depicted in appendix A. The semitrailers, coupled with truck-tractors M916, 6x6 has a gross combination weight rating (GCWR) of 160,000 lb, and M920, 8x6 has a GCWR of 130,000 lb.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. If first article inspection is not required (see 3.1).
c. If screw threads and fittings are other than as specified (see 3.4.2).
d. Temporary or concealed markings if required (see 3.9.3).
e. If responsibility for inspection shall be other than as specified (see 4.1).
f. If responsibility for inspection equipment shall be other than as specified (see 4.1.2).
g. The number of initial production tests required (see 4.3.2.1).
h. If lot formation shall be other than as specified (see 4.4.2.1.1).
i. Selection of applicable level and packaging requirements (see 5.1).

6.3 Definitions.

6.3.1 Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (see 6.3.2).

6.3.2 Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C. 1342 et seq.), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.3.3 Primary roads. Primary roads are defined as paved roads.

6.3.4 Improved secondary roads. Improved secondary roads are defined as unpaved roads that have been prepared by grading, filling, and compacting and are periodically maintained by filling holes, grading and rolling, as applicable.


6.3.5 Off-road. Off-road is defined as unimproved secondary unmaintained roads, trails natural terrain with holes, washboards, uneven surfaces, stones, gravel and debris of various types to the environment.

6.4 Supersession data. This military specification supersedes the Purchase Description ATPD 2100, dated 15 April 1986.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.
Forty ton semitrailer, low bed.
Low bed semitrailer, 40 ton.
M870A2, low bed semitrailer, 40 ton.
M870A2, semitrailer, transporter
Semitrailer, M870A2, 40 ton.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

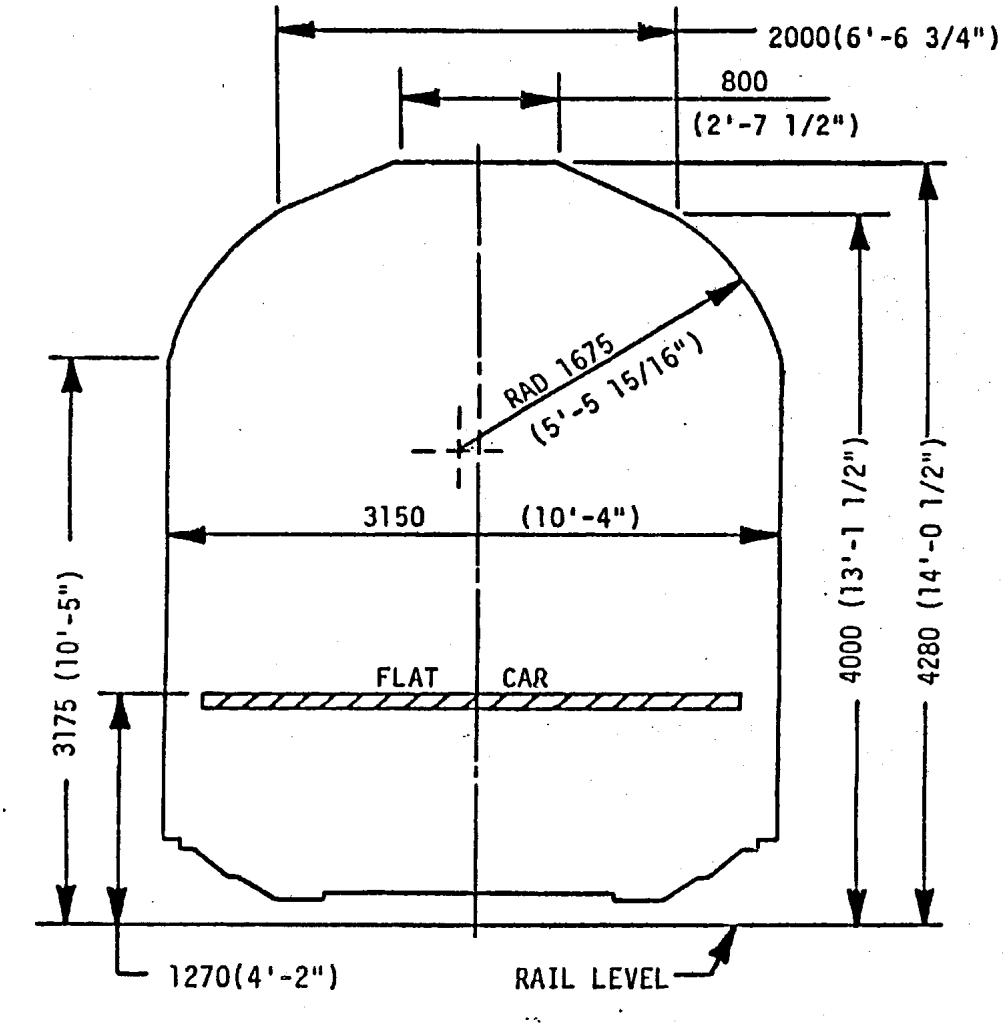

NOTE:

DIMENSIONS SHOWN THUS: MILLIMETERS (FEET-INCHES)

FIGURE 1. Passe-Partout International (PPI) guage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

APPENDIX A

10. Following are typical loads to be transported, loaded and unloaded on the semitrailer. The physical configuration may vary for each load to facilitate the mission intended.

10.1 Intended payloads up to GVWR.

- Tracked and rubber tire tractors w/blade and rippers.
- Self-propelled and towed scrapers.
- Tracked and rubber tire front end scoop loaders.
- Motor graders.
- Power excavators and cranes.
- Ditching machines.
- Paving machines.
- Road compaction rollers, including sheepsfoot type.
- Concrete and Asphalt plants.
- Structural beams.
- Pipe and culverts
- Packaged cement.
- Masonry and lark rocks.
- Other earthmoving and construction machinery, well as construction materials.

10.2 Attached are typical engineer construction equipment and their basic physical characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project 2330-A987)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:47Z
Check the source to verify that this is the current version before use.