MIL-B-46789A(AT)
19 May 1975
SUPERSEDING
MIL-B-46789(MO)
17 September 1963

MILITARY SPECIFICATION

BLASTING MACHINE, AUXILIARY FIRING, EMERGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a hand operated device which produces an electrical output through generator action for emergency firing of fire power on full tracked combat vehicles.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

TT-E-489	-	Enamel, Alkyd, Gloss (for exterior and interior surfaces).

Military

MIL-F-13927	-	Fungus Resistance Test; Automotive Components.
MIL-L-45662	-	Calibration System Requirements.
MIL-L-52043	-	Lacquer, Semi-Gloss, Cellulose Nitrate.

STANDARDS

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-202	-	Test Methods for Electronic and Electrical Component Parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

MIL-STD-454 - Standard General Requirements for Electronic Equipment.
MIL-STD-810 - Environmental Test Methods.

DRAWINGS
Army
8675771 - Blasting Machine Assembly, Auxiliary Firing.
11599607 - Blasting Machine, Basic Unit.
11637536 - Blasting Machine.
11679045 - Blasting Machine Assembly.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal, shall apply.

NATIONAL BUREAU OF STANDARDS
Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. REQUIREMENTS

3.1 Preproduction. The blasting machine furnished under this specification shall be a product which has been represented by preproduction samples that have been inspected and have passed the preproduction testing specified herein (see 4.1.2 and 6.2).

3.1.1 Initial production. Initial production units shall be subjected to inspection and tests conforming to requirements specified herein. During production, units shall be subjected to quality inspections to assure continued conformance to the requirements specified herein.

3.2 Design and construction. THE design, construction and assembly shall conform to Drawing 8675771, 11599607, 11637536 or 11679045 (see 6.2).

3.3 Materials. Materials specified herein and in the referenced drawings, specifications, and standards shall be free from all defects and imperfections that might affect the serviceability and function of the finished product.

3.3.1 Parts. Exposed functional parts shall be fabricated from suitable corrosion resistant material or treated to prevent corrosion. Exposed non-functional parts shall be painted white conforming to TT-E-489 or MIL-L-52043.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

3.3.2 Threads. All internal and external threads shall conform to Handbook H28.

3.4 Performance.

3.4.1 Electrical output. The assembly shall have the electrical output listed in Table I at each of the conditions specified.

Table I. Electrical output

CONDITION	ROTOR SHAFT INPUT TORQUE (LB IN) ± 10%	RESISTIVE LOADS (OHMS)*	PEAK OUTPUT VOLTAGE (MINIMUM)
a	70	1.47 ± 1%	3.1
b	70	20.50 ± 1%	27.0
c	70	Open Circuit	44.0
d	100	1.47 ± 1%	3.8
e	100	20.50 ± 1%	38.7
f	100	Open Circuit	60.0
g	130	1.47 ± 1%	4.4
h	130	20.50 ± 1%	49.4
i	130	Open Circuit	74.0

*Pure resistive load with no more than 1% inductive impedance component at 1000 Hz.

3.4.1.1 Operating position. The assembly shall meet the electrical output requirements of 3.4.1 when operated in any of the following positions:

a. Shaft in a vertical position with handle down.
b. Shaft in a vertical position with handle up.
c. Shaft in a horizontal position.

3.4.1.2 Dielectric strength. The assembly shall show no evidence of loosening, cracking, charring, arc over, or other damage after being subjected to a test of 500 volts root mean square at a frequency of 60 hertz (Hz) applied for one minute between case and output leads.

3.4.1.3 Insulation resistance. The assembly shall have an insulation resistance of not less than 100 megohms between the internal wiring and the case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

3.4.2 Physical characteristics.

3.4.2.1 Rotation. The direction of rotation of the handle to produce the electrical output (see 3.4.1) shall be clockwise when viewed from the handle end. One cycle of rotation shall be 150 ± 5.0 degrees and return to original position.

3.4.2.2 Torque. The assembly shall show no evidence of failure, electrical or mechanical after repeated operation at 130 pounds inch (lbs in) of torque throughout the complete rotation of the rotor shaft.

3.4.2.3 Operational stability. The assembly shall withstand 10,000 cycles of operation at a rate not in excess of 10 cycles of rotation per minute. The torque, load resistance, and electrical output shall conform to condition b listed in table I.

3.4.3 Environmental conditions.

3.4.3.1 Waterproofness. The assembly shall be capable of withstanding 6 pounds per square inch differential (psid) while submerged in water for 30 minutes, in the non-operating mode, with no evidence of leakage. The assembly shall be electrically and mechanically operable subsequent to submersion. The electrical output shall conform to 3.4.1.

3.4.3.2 Sand and dust proof. The assembly shall be capable of withstanding a sand and dust velocity of 2500 ± 500 feet per minute (fpm) for 6 hours at 77 degrees Fahrenheit (^{o}F) and 2500 ± 500 feet per minute (fpm) for 6 hours at 160°F with no evidence of failure, electrical or mechanical. The electrical output shall conform to 3.4.1.

3.4.3.3 Fungus resistance. The assembly shall be capable of withstanding a fungus environment at 93 to 100 percent relative humidity without electrical or mechanical failure. The electrical output shall conform to 3.4.1.

3.4.3.4 Shock resistance. The assembly shall be capable of withstanding a saw tooth wave shock pulse of 75 gravity unit (g) peak for a duration of 6 milliseconds (msec), with no evidence of failure, electrical or mechanical. The electrical output shall conform to 3.4.1.

3.4.3.5 Corrosion resistance. The assembly shall be capable of withstanding a 5 percent salt solution spray at a maintained temperature of 95° ± 2° -3°F for a minimum (min) of 48 hours with no evidence of failure, electrical or mechanical. The electrical output shall conform to 3.4.1.

3.4.3.5 Vibration resistance. The assembly shall be capable of withstanding the vibration profile per figure 1 for a period of two hours in each of three mutually perpendicular axis with no evidence of failure, electrical or mechanical. The electrical output shall conform to 3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

3.4.3.7 Temperature stability. The assembly shall meet the requirements specified herein at ambient air temperature ranging from -25°F to 125°F and shall show no evidence of failure, electrical or mechanical, after storage at an ambient air temperature ranging from -65° to 160°F.

3.5 Identification marking. The blasting machine shall be marked in accordance with Standard MIL-STD-130 and shall include at least the following:

(a) Name of item.
(b) Manufacturer's name or trade mark.
(c) Manufacturer's part number.
(d) Military part number.
(e) Manufacturer's serial number.

3.6 Workmanship. Workmanship shall conform to MIL-STD-454, Requirement 9.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection equipment. Unless otherwise specified in the contract, the supplier is responsible for the provisions and maintenance of all inspection and test equipment necessary to assure that supplies conform to contract requirements. Commercial, modified commercial, or supplier-designed inspection equipment or measuring setups must be capable of repetitive measurements to an accuracy of 10% of the component tolerance. Calibration of inspection and test equipment shall be in accordance with MIL-C-45662.

4.1.2 Preproduction. If required by the procuring activity (see 6.2), two units shall be inspected by the supplier at locations approved by the procuring activity. Preproduction inspection shall be performed per table II and III. The inspection sequence shall be in accordance with table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

Table II. Sequence and inspection applied to each sample

Test Sequence	Paragraph Number	Preproduction Sample		Initial Production Sample	
		1	2	1	2
Electrical Output	4.2.4.1.1	x	x	x	x
Design and Construction	4.2.4.4	x	x	x	x
Physical Characteristics	4.2.4.2	x	x	x	x
Performance	4.2.4.1	x	x	x	x
Waterproofness	4.2.4.3.1	x	x	x	x
Sand and Dust Proof	4.2.4.3.2	x		x	
Fungus Resistance	4.2.4.3.3		x		
Corrosion Resistance	4.2.4.3.5	x		x	
High Temperature	4.2.4.3.7	x	x	x	x
Low Temperature	4.2.4.3.8	x	x	x	x
Shock Resistance	4.2.4.3.4	x	x	x	x
Vibration Resistance	4.2.4.3.6	x	x	x	x
Preparation for Delivery	4.2.3				x

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

Table III. Category of inspection

DESCRIPTION	REQUIREMENT	METHOD	QUALITY INSPECTIONS		QUALITY CONFORMANCE INSPECTIONS		
			PREPRODUCTION	INITIAL PRODUCTION	LOT-BY-LOT SAMPLING AQL	INSPECTION ACCEPTANCE (100%)	CONTROL
Performance	3.4	4.2.4.1					
Electrical Output	3.4.1	4.2.4.1.1	x	x		x	
Operating Position	3.4.1.1	4.2.4.1.2	x	x			1/50
Dielectric Strength	3.4.1.2	4.2.4.1.3	x	x			1/50
Insulation Resistance	3.4.1.3	4.2.4.1.4	x	x	2.5		
Physical Characteristics	3.4.2	4.2.4.2					
Configuration	3.2	4.2.4.2.1	x	x	6.5		
Rotation	3.4.2.1	4.2.4.2.2	x	x	6.5		
Torque	3.4.2.2	4.2.4.2.3	x	x			
Operational Stability	3.4.2.3	4.2.4.2.3	x	x			
Environmental Conditions	3.4.3	4.2.4.3					
WaterProofness	3.4.3.1	4.2.4.3.1	x	x			1/50
Sand and Dust Proof	3.4.3.2	4.2.4.3.2	x	x			
Fungus Resistance	3.4.3.3	4.2.4.3.3	x				
Shock Resistance	3.4.3.4	4.2.4.3.4					
Pre. and Initial Prod.		4.2.4.3.4.1	x	x			
Control		4.2.4.3.4.2					1/50
Corrosion Resistance	3.4.3.5	4.2.4.3.5	x	x			
Vibration	3.4.3.6	4.2.4.3.6					
Pre. and Initial Prod.		4.2.4.3.6.1	x	x			
Control		4.2.4.3.6.2					1/50
High Temperature	3.4.3.7	4.2.4.3.7	x	x			1/50
Low Temperature	3.4.3.7	4.2.4.3.8	x	x			1/50
Design and Construction	3.2	4.2.4.4					

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

Table III. Category of inspection (Cont'd)

DESCRIPTION	REQUIREMENT	METHOD	QUALITY INSPECTIONS: PREPRODUCTION	QUALITY INSPECTIONS: INITIAL PRODUCTION	QUALITY CONFORMANCE INSPECTIONS: LOT-BY-LOT SAMPLING AQL	QUALITY CONFORMANCE INSPECTIONS: INSPECTION ACCEPTANCE (100%)	QUALITY CONFORMANCE INSPECTIONS: CONTROL
Materials, Processes and Parts		4.2.4.4.1					
Materials	3.3	4.2.4.4.1.1	x	x	6.5		
Parts	3.3.1	4.2.4.4.1.2	x	x	6.5		
Threads	3.3.2	4.2.4.4.1.3	x	x	6.5		
Identification and Marking	3.5	4.2.4.4.2	x	x	6.5		
Workmanship	3.6	4.2.4.4.3	x	x	6.5		
Preproduction	3.1	4.1.2	x				
Initial Production	3.1.1	4.1.2.2		x			
Preparation for Delivery	5	4.2.3		x	6.5		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.1.2.1 Preproduction failure. Failure of a preproduction item in any of the requirements specified shall be cause for cessation of inspection. When corrective measures satisfactory to the procuring activity have been taken, inspection may be continued.

4.1.2.2 Initial production. Unless otherwise specified, the procuring activity shall select two items from the first ten produced under a production contract (see 6.2). The supplier shall inspect these items for conformance to all requirements listed in tables II and III. The inspection sequence shall be in accordance with table II. Once verification and validation of compliance with these requirements has been accomplished, quality conformance inspection of the remainder of the production contract shall be as specified (see 4.2).

4.1.2.2.1 Initial production failure. Failure of an initial production item during or as a result of initial production inspection shall be cause for rejection of the item. Further, the procuring activity shall refuse acceptance of production items until evidence of corrective action is provided.

4.2 Quality conformance inspections.

4.2.1 Lot-by-lot inspection. Lot-by-lot inspection shall consist of sampling and acceptance (100%) inspection as listed in table III. An inspection lot shall consist of all assemblies of one type, submitted at one time for Quality Conformance Inspection.

4.2.1.1 Sampling. A sample shall be selected from each inspection lot with the sample size determined in accordance with MIL-STD-105, inspection level II. The sample shall be subjected to visual and dimensional inspection as specified and to the acceptable quality levels (AQL) listed in table III.

4.2.1.1.1 AQL validation. Before sampling can commence for any production contract, a minimum of 20 assemblies shall be subjected to 100% inspection to verify conformance to requirements listed in table III. Process average for each requirement shall be computed as specified below. If the computed process average for the requirement exceeds the specified AQL, 100% inspection shall be continued until the process average for twenty consecutive assemblies is less than the specified AQL.

$$\text{Process average} = \frac{\text{Number of Defectives}}{\text{Number of Items Inspected}} \times 100$$

4.2.1.1.2 Sampling failures. Any assembly found defective shall be rejected and the defective processed in accordance with the acceptance and rejection provisions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.2.1.2 Acceptance (100%) inspection. For the requirements listed for acceptance (100%) inspection in table III, each assembly of the inspection lot shall be subjected to and pass the tests listed. Inspection shall be performed by the supplier at the place of manufacture except as specified in 4.1.

4.2.1.2.1 Acceptance (100%) inspection failures. Any assembly that fails to conform to any acceptance (100%) inspection shall be rejected. The rejected assembly may be repaired or corrected and resubmitted for inspection.

4.2.2 Control inspection. Unless otherwise specified (see 6.2), control inspection shall be conducted by the supplier for maintaining control of those requirements whose length, expense, or destructiveness prohibit their inclusion under lot-by-lot inspection. Control inspection assemblies shall be selected at the frequencies specified in 4.2.2.1 and 4.2.2.2 and subjected to inspections to verify conformance to the requirements listed in table III. Control inspection is not required on the initial production control quantity.

4.2.2.1 Control inspection of one in fifty (1/50). Except as noted in 4.2.2, control inspection as listed in table III shall be performed on one assembly from each fifty produced or on one assembly every two months, whichever occurs first. The assembly shall be randomly selected from the production quantity represented.

4.2.2.1.1 Control inspection failure of one in fifty. Failure of the assembly to meet these specified control inspections shall be considered cause for rejection of the production quantity represented. When cause for failure is determined, necessary corrections shall be made and proven by test of three randomly selected assemblies from that production quantity. One of the three assemblies shall be subjected to all specified inspections. Control inspection verification for the remaining two assemblies shall be limited to those parameters directly related to the failure cause and those parameters affected by the corrective action taken.

4.2.2.2 Control inspection frequencies other than one in fifty. Control inspection shall be performed on one assembly at the intervals listed in table III. The assembly may be selected from either the first ten units produced for the interval defined, or the last ten assemblies produced from the preceding interval.

4.2.2.2.1 Control inspection failure of other than one in fifty. Failure of a control assembly to meet these specified inspections shall be considered cause to reject subsequent assemblies until deficiencies that caused this failure are corrected and proven by test of three consecutively produced assemblies. Control inspection verification for these assemblies shall be limited to these parameters directly related to the failure cause and those parameters affected by the corrective action taken.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.2.3 Preparation for delivery. The assembly shall be inspected by the supplier prior to shipment to ensure conformance to the preservation, packaging and marking requirements in section 5 of this specification.

4.2.4 Test methods and procedures.

NOTE: (a) Requirements for the following tests are listed in table III.
(b) Perform the electrical output test of 4.2.4.1.1 prior to all other tests.

4.2.4.1 Performance tests.

4.2.4.1.1 Electrical output. To determine conformance to 3.4.1, connect the assembly to the resistive loads of table I and subject the rotor handle to the corresponding specified torques. Measure the peak output voltage to verify that it is not less than the specified value. Figure 2 describes an acceptable arrangement of test equipment to determine the electrical output.

4.2.4.1.2 Operating position. To determine conformance to 3.4.1.1, subject the assembly to the electrical output test of 4.2.4.1.1 at each specified operating position.

4.2.4.1.3 Dielectric strength. To determine conformance to 3.4.1.2, perform the dielectric strength test between the case and output leads in accordance with MIL-STD-202, Method 301, using 500 volts rms at a frequency of 60 Hz for a period of 60 ± 5 seconds. During this test, verify that the assembly shows no evidence of loosening, cracking, charring, or arcing.

4.2.4.1.4 Insulation resistance. To determine conformance to 3.4.1.3, measure the insulation resistance between each conductor and case in accordance with MIL-STD-202, Method 302, Test Condition B. Verify that the resistance is not less than 100 megohms.

4.2.4.2 Physical characteristics.

4.2.4.2.1 Configuration. Visually examine the assembly for conformance to Drawing 8675771, 11599607, 11637536 or 11679045. Verify that the configuration is as specified.

4.2.4.2.2 Rotation. Examine the assembly to verify that the direction or rotation of the handle conforms with 3.4.2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.2.4.2.3 Operating stability. To determine conformance to 3.4.2.2 and 3.4.2.3, mount the assembly as specified in Figure 2, and subject it to 10,000 cycles of operation at the rate not in excess of 10 cycles per minute. Perform the test as follows:

(a) 990 cycles at condition b.
(b) 10 cycles at condition h.
(c) Perform the electrical output test of 4.2.4.1.1.
(d) Repeat for a total of 10,000 cycles.

4.2.4.3 Environmental tests.

NOTE: (a) Units undergoing qualification inspections of table III shall be subjected to performance tests before, during (where required in test method) and immediately after each environmental test performed.
(b) Units undergoing conformance control inspections of table III shall have passed the acceptance tests as indicated therein. After all environmental tests have been completed, the units shall be tested only once for the post environmental performance tests specified.

4.2.4.3.1 Waterproofness. Submerge the assembly in distilled water contained in a vacuum vessel. Observe for air leakage while holding a vacuum differential of 6 psi for not more than 30 minutes. Repeat the test after inverting the assembly. A steady stream of bubbles from any surface shall be cause for rejection. At the conclusion of this test, verify that the assembly passes the electrical output test of 4.2.4.1.1.

4.2.4.3.2 Sand and dust proof. Subject the assembly to the sand and dust proof test of MIL-STD-202, Method 110, Test Condition A, using a sand and dust velocity of 2500 ± 500 fpm for 6 hours at 77°F and 2500 ± 500 fpm for 6 hours at 160°F. At the conclusion of this test verify that the assembly passes the electrical output test of 4.2.4.1.1.

4.2.4.3.3 Fungus resistance. Subject the assembly to the fungus resistance test of MIL-F-13927, Method A, Class 2. At the conclusion of this test verify that the assembly passes the electrical output test of 4.2.4.1.1.

4.2.4.3.4 Shock resistance.

4.2.4.3.4.1 Production and initial production. Subject the assembly to the shock test specified in MIL-STD-810, Method 516, Procedure I, for a total of 18 saw tooth wave shock pulses. Peak amplitude shall be 75.0 ± 7.5g with a time duration of 6.0 ± 0.6 msec measured at the 10 percent amplitude points. At the conclusion of this test verify that the assembly passes the electrical output test of 4.2.4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.2.4.3.4.2 Control. This test shall be the same as 4.2.4.3.4.1, except the shock level shall be limited to 30 ± 3g.

4.2.4.3.5 Corrosion resistance. Subject the assembly to the corrosion resistance test of MIL-STD-202, Method 101, Test Condition B. At the conclusion of this test verify that the assembly passes the electrical output test of 4.2.4.1.1.

4.2.4.3.6 Vibration resistance.

4.2.4.3.6.1 Preproduction, and initial production. Subject the assembly to the vibration test specified in MIL-STD-810, Method 514, Procedure VIII, except vibration level shall be as shown in Figure I. Sweep time shall be 16 minutes per cycle and the total cycling time per axis shall be two hours in each of the three mutually perpendicular axes. Resonance search shall be conducted at room temperature. After resonance (if any) has been determined place the assembly in a 125°F ambient environment and subject it to vibration sweeps with resonance dwell at points (if any) detected. At the conclusion of this test, return the assembly to room temperature and verify that it passes the electrical output test of 4.2.4.1.1.

4.2.4.3.6.2 Control. This test shall be the same as 4.2.4.3.6.1 except the dwell time at each resonance shall be two minutes and the test shall be conducted at 70 ± 10°F ambient temperature.

4.2.4.3.7 High temperature. Subject the assembly to the high temperature test specified in MIL-STD-810, Method 501, Procedure II, except storage temperature of step 4 shall be 160°F. At the conclusion of the storage temperature test, stabilize the assembly at 125°F and subject it to the electrical output test of 4.2.4.1.1. After testing, return the assembly to room ambient temperature and verify that it passes the electrical output test of 4.2.4.1.1.

4.2.4.3.8 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-810, Method 502, Procedure I. Maintain the temperature at -65°F for a period of 12 hours minimum. At the conclusion of this time, stabilize the assembly at -25°F and subject it to the electrical output test of 4.2.4.1.1. After testing, return the assembly to room ambient temperature and verify that it passes the electrical output test of 4.2.4.1.1.

4.2.4.4 Design and construction.

4.2.4.4.1 Materials, processes and parts.

4.2.4.4.1.1 Materials. A certification shall be provided attesting that exposed functional parts have been fabricated from corrosion resistant materials or treated to prevent corrosion.

4.2.4.4.1.2 Parts. A certification shall be provided attesting that exposed non-functional parts have been painted white conforming to TT-E-489 or MIL-L-52043.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.2.4.4.1.3 Threads. A certification shall be provided attesting that all internal and external threads have been tested with go and no-go gages to determine their conformity to Handbook H-28.

4.2.4.4.2 Identification and markings. Visually examine the assembly for identification and markings in accordance with MIL-STD-130 and 3.5.

4.2.4.4.3 Workmanship. Perform visual examinations on each item of the inspection lot at all phases of inspection testing in accordance with MIL-STD-454, Requirement 9, to assure it is free of any defects which may affect the basic materials, or performance, electrical or mechanical.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing and marking. Preservation, packaging, packing and marking shall be in accordance with the applicable packaging standard or packaging data sheet specified by the procuring activity (see 6.2).

6. NOTES

6.1 Intended use. The blasting machine covered by this specification is for emergency use as an alternate firing method in the event of power failure in the vehicle. It is a hand twist operated device which produces an electrical output through generator action.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Applicable drawing (see 3.2).
(c) Preproduction samples when required and sample quantity if different (see 3.1 and 4.1.2).
(d) Whether initial production inspection is required (see 4.1.2.2).
(e) Whether control inspection is required (see 4.2.2).
(f) Selection of applicable packaging standard or packaging data sheet (see 5.1).

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 2590-A151

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

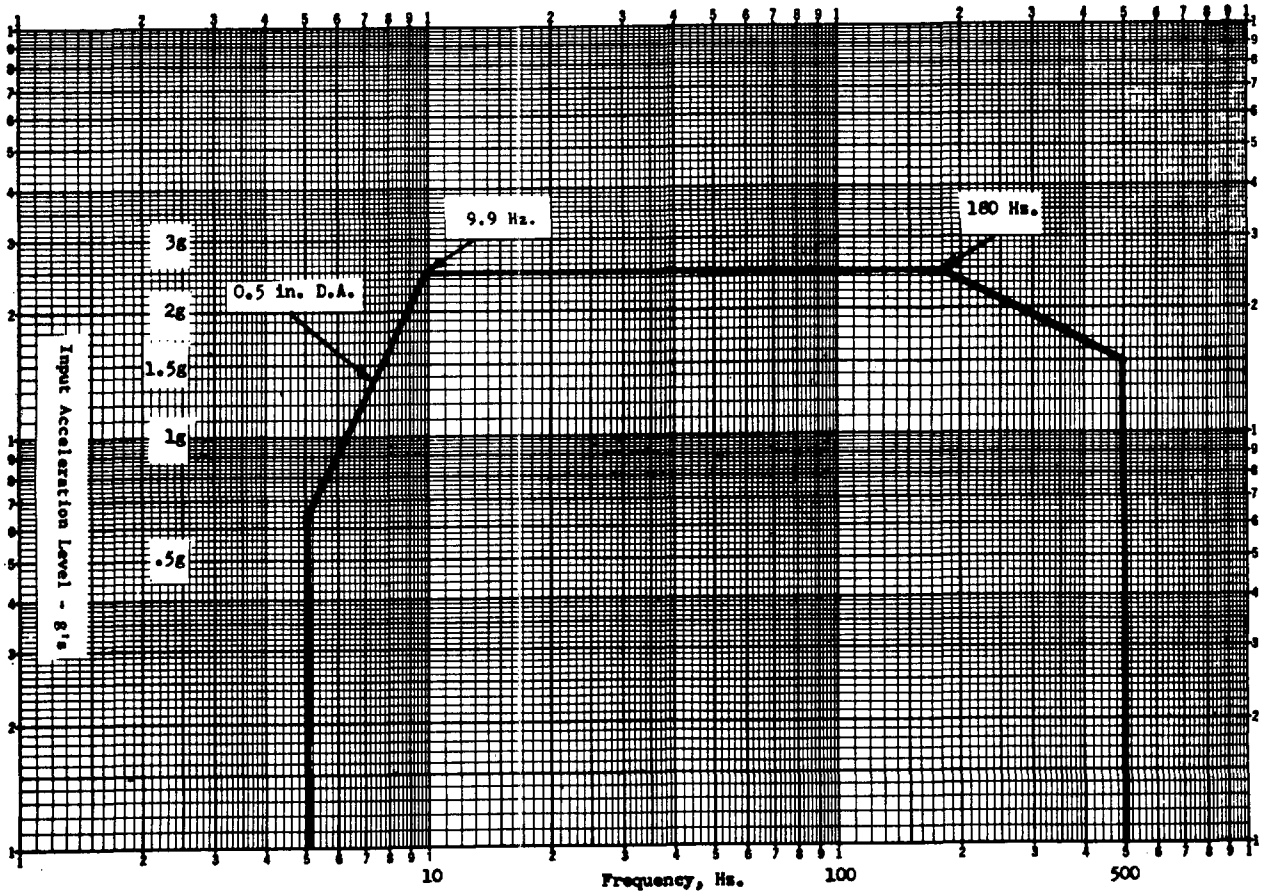


Figure 1 Vibration Profile

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

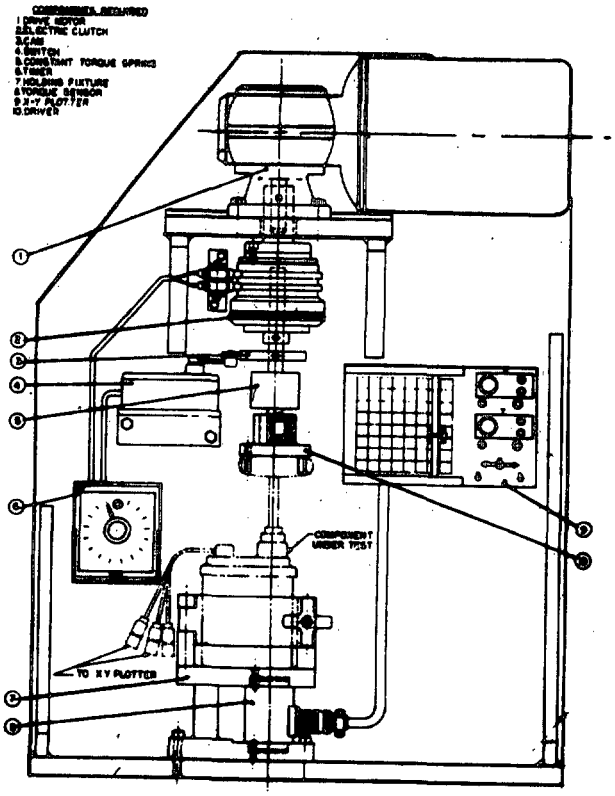


Figure 2 Electrical Output Test Fixture

☆U.S. GOVERNMENT PRINTING OFFICE: 1975-603-131/1409

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-B-46789A(AT)

ORGANIZATION

CITY AND STATE	CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*	DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.