METRIC

MIL-DTL-46789D(AT)
23 July 2010

SUPERSEDING
MIL-DTL-46789C(AT)
4 September 1998

DETAIL SPECIFICATION

BLASTING MACHINE, AUXILIARY FIRING, EMERGENCY

This specification is approved for use by the U.S. Army Tank Automotive Research, Development and Engineering Center (TARDEC), Research, Development and Engineering Command (RDECOM), Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an auxiliary firing blasting machine, hereinafter to be referred to as "assembly", which produces an electric output through generator action for emergency firing of fire power on full tracked combat vehicles.

1.2 Classification. Blasting machines furnished are of the following classes (see 6.2).


Class 1 - 8675771
Class 2 - 11599606
Class 3 - 11637536
Class 4 - 11679045
Class 5 - 12282970
Class 6 - 12918973

Comments, suggestions, or questions on this document should be addressed to U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to DAMI_STANDARDIZATION@conus.army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 2590

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

1.3 Part or Identifying Number (PIN). The PINs to be used for the blasting machines acquired to this specification are created as follows:

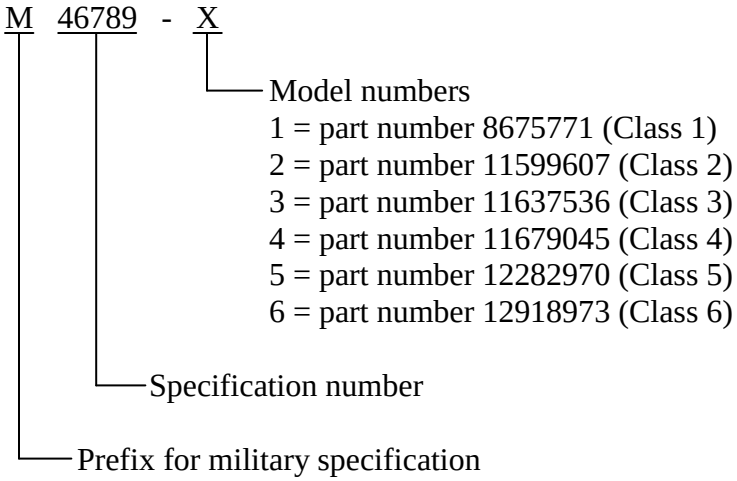

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-202 - Tests Methods for Electronic and Electrical Component Parts
MIL-STD-810 - Environmental Test Methods

(Copies of these documents are available from https://assist.daps.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

U.S. ARMY TACOM DRAWINGS

8675771	-	Blasting Machine, Basic Unit
11599606	-	Blasting Machine, Basic Unit
11637536	-	Blasting Machine
11679045	-	Blasting Machine Assembly
12282970	-	Blasting Machine Assembly
12918973	-	Blasting Machine Assembly

(Copies of these drawings are available from DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000.)

NUCLEAR REGULATORY COMMISSION

10CFR30	-	Rules of general applicability to domestic licensing of byproduct material
10CFR40	-	Domestic licensing of source material

(Copies of these documents are available from www.gpoaccess.gov/cfr/index.html or U.S. Government Printing Office, 732 North Capitol St. NW, Washington, DC 20401.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

ASTM INTERANATIONAL

ASTM G21	-	Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi (DoD Adopted)

(Copies of these documents are available from www.astm.org or ASTM International, P.O. Box C700, West Conshohocken, PA 19428-2959.)

MASTER PAINTERS INSTITUTE (MPI)

MPI #9	-	Alkyd, Exterior, Gloss (MPI Gloss Level 6)

(Copies of these documents are available from www.mpi.net or Master Painters Institute, 2800 Ingleton Avenue, Burnaby, BC V5C 6G7 Canada.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.1.1.

3.2 Materials. Materials shall be as specified herein and as in the referenced drawings, specifications, and standards and shall be free from all defects and imperfections that might affect the serviceability and function of the finished product (see 4.5).

3.2.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs (see 4.5).

3.2.2 Corrosion resistance. Function parts exposed to the environment shall be fabricated from suitable corrosion resistant material or treated to prevent corrosion (see 4.5).

3.2.3 Threads. All internal and external threads shall conform to commercial American Standards (see 4.5 and 6.5).

3.2.4 Finish. Non-functional metal parts exposed to the environment shall be painted white with enamel conforming to MPI #9 or equivalent (see 4.5.1).

3.3 Design and construction. The design, construction and assembly of the blasting machine shall conform to Drawings 8675771, 11599606, 11637536, 11679045, 12282970 or 12918973, as applicable (see 4.5 and 6.2).

3.4 Operating requirements. Each assembly shall provide the following functional, operational, and performance capabilities.

3.4.1 Electrical output. The assembly shall generate an electrical output not less than that listed in table I at each of the conditions specified (see 4.6.1, 4.6.1.1 and 6.2). (Not applicable to blasting machines covered by Drawings 12282970 or 12918973; for which the electrical output requirements shall be as specified on their respective drawing (see 4.6.1.2 and 6.2).

3.4.2 Operating position. The assembly shall meet the electrical performance requirements of table I (Assemblies 12282970 and 12918973, as appropriate per their respective drawing requirements) when operated in any of the following positions (see 3.4.1 and 4.6.2):

a. Shaft in a vertical position with handle down.
b. Shaft in a vertical position with handle up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

c. Shaft in a horizontal position.

TABLE I. Electrical output.

Condition	Rotor shaft input 1/ torque (N·m) ±10%	Resistive loads (ohms) 2/	Peak output voltage (minimum)
A	7.9	1.47 ±1%	3.1 3/
B	7.9	20.50 ±1%	27.0
C	7.9	Open circuit	44.0
D	11.3	1.47 ±1%	3.8
E	11.3	20.50 ±1%	38.7
F	11.3	Open circuit	60.0
G	14.7	1.47 ±1%	4.4
H	14.7	20.50 ±1%	49.4
I	14.7	Open circuit	74.0

1/ Specified torque is the applied torque at the start of the stroke measured after 5° of shaft rotation when the backlash of the gear drive mechanism is eliminated. Torque should be sufficiently constant throughout the stroke so that neither maximum nor minimum values of torque deviate from average torque by more than 15%. Torque at no point in the power stroke may exceed the maximum specific value of torque.

2/ Pure resistive load with no more than 1% inductive impedance component at 1000 Hertz (Hz).

3/ Shall be 0.9 volts minimum 50 milliseconds after peak voltage.

NOTE: N·m = Newton meters, % = percent

3.4.3 Dielectric strength. The assembly shall operate safely at its rated voltage and withstand momentary overpotentials due to switching, surges, and similar phenomena (see 4.6.3).

3.4.4 Insulation resistance. The assembly shall have an insulation resistance of not less than 100 megohms between the internal wiring and the case (see 4.6.4).

3.4.5 Rotation. The direction of rotation of the handle to produce the electrical output shall be clockwise when viewed from the handle end. One cycle of rotation shall be 150 ±5° and return to original position (see 4.6.5).

3.4.6 Torque. The assembly shall show no evidence of failure, electrically or mechanically, after repeated operation at 14.7 N-m of torque throughout the complete rotation of the rotor shaft (see 4.6.5.1).

3.4.7 Operational stability. The assembly shall withstand 10,000 cycles of operation without failure (see 4.6.5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

3.5 Interface requirements. The assembly shall conform to the interface envelope dimensions, mounting and electrical interfaces in the applicable drawing (see 4.7).

3.6 Support and ownership requirements. The assembly shall possess the following life cycle ownership characteristics (see 4.8).

3.6.1 Safety. The assembly shall pose no hazards, physically or electrically to personnel operating the blasting machine (see 4.8.1).

3.6.2 Identification marking. The assembly shall prominently display at least, the item's name, manufacturer's name or trademark, manufacturer's part number, cage code serial number and PIN (military part identification number) on the outer surface, in permanent, easily visible, straight simple letters and numbers (see 4.8.2).

3.7 Operating environment requirements**.** Each assembly shall operate under the following environmental conditions, without degradation in performance.

3.7.1 Waterproofness. The assembly shall be capable of withstanding 41 kilopascals (kPa) differential while submerged in water (see 4.9.1).

3.7.2 Sand and dust resistance. The assembly shall be capable of withstanding blowing sand and dust at a velocity of 762 ±152 meters per minute (m/min) (see 4.9.2).

3.7.3 Fungus. The assembly shall be capable of withstanding a fungus environment at 93 to 100% relative humidity (see 4.9.3).

3.7.4 Shock. The assembly shall be capable withstanding a sawtooth wave shock pulse of 75 gravity units (g) (see 4.9.4).

3.7.5 Corrosion resistance. The assembly shall be capable of withstanding a 5% salt solution spray (see 4.9.5).

3.7.6 Vibration. The assembly shall be capable of withstanding the severe vibration profile as specified in figure 2 with sweep times of 16 min/cycle and the total cycling time per axis shall be two hours in each of the three mutually perpendicular axes (see 4.9.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

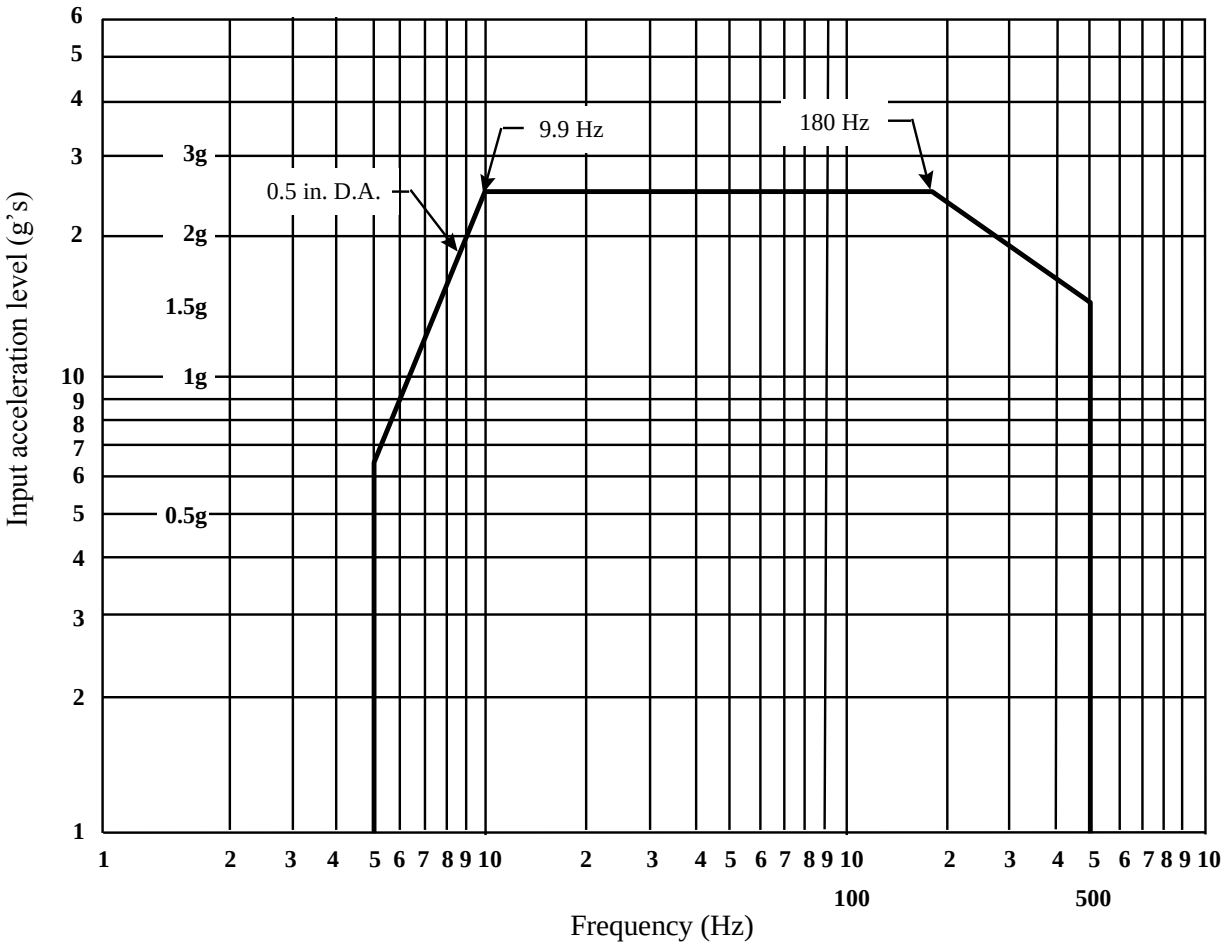


FIGURE 2. Vibration profile.

3.7.7 Temperature stability. The assembly shall meet the requirements specified herein at ambient temperatures ranging from -32 °C to 52 °C and shall show no evidence of failure, electrical or mechanical, after storage at an ambient temperature ranging from -54 °C to -8 °C (see 4.9.7 and 4.9.8).

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.1.1)
   1. Preproduction inspection (see 4.1.2)
   2. Initial production (see 4.1.3)
b. Conformance inspection (CI) (see 4.2)
   1. Examinations (see 4.2.2)
   2. Tests (see 4.2.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.1.1 First article inspection. First article inspection shall be performed on preproduction and initial production units as specified herein. Approval of the first production units by the Government shall not relieve the contractor of the obligation to supply assemblies that are fully representative of those inspected as a first article (see 6.3).

4.1.2 Preproduction inspection. When specified (see 6.2), the preproduction sample shall consist of 2 units. Preproduction inspection shall consist of inspection as specified in table II.

4.1.3 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select two units from the first ten produced under the production contract for the initial production inspection. The initial production samples shall be inspected as specified in table II.

4.1.4 First article test sequence. First article tests shall be conducted on the sample in accordance with the test sequence specified in table III.

4.2 Conformance inspection. Conformance inspection shall include the examination of 4.2.2 and the tests of 4.2.3. Noncompliance with any of the specified requirements shall be cause for rejection of the sample and the inspection lot. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1 (see 6.4).

4.2.1 Sampling plan. The sampling plan shall be as specified in the contract or work order (see 6.2).

4.2.2 Examination. The sample selected in accordance with 4.2.1 shall be examined as specified in table II. The major defects are safety, identification markings and interface while the minor defect is the finish. The acceptance number in all cases is zero.

4.2.3 Test (100% inspection). Each item shall be subjected to the CI tests specified in table II.

4.3 Verification methods. The types of verification methods included in this section are visual, inspection, measurement, sample tests, full scale demonstration tests, or equivalent tests, simulation modeling, engineering evaluation, component properties analysis, and similarity to previously-approved or previously-qualified designs.

4.3.1 Verification alternatives. The manufacturer may propose alternative test methods, techniques, or equipments including the application of statistical process control, tool control, or cost-effective sampling procedures, to verify performance. See the contractor for alternatives that replace verifications required by this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of inspections.

Title	Requirement	Inspection	First article		CI	
			Prepro-duction	Initial production	Exam	Test (100%)
Group A:						
Materials, design & construction	3.2, 3.2.1, 3.2.2, 3.2.3, 3.3	4.5	X	X		
Finish	3.2.4	4.5.1	X	X	X	
Operational requirements						
Electrical output	3.4.1	4.6.1	X	X		
Electrical output (100%) inspection		4.6.1.1				X
Operation position	3.4.2	4.6.2	X	X		
Dielectric strength	3.4.3	4.6.3	X	X		
Insulation resistance	3.4.4	4.6.4	X	X		
Rotation	3.4.5	4.6.5	X	X		
Torque & operational Stability	3.4.6 & 3.4.7	4.6.5.1	X	X		
Interface requirements	3.5	4.7			X	
Support and ownership requirements	3.6	4.8				
Safety	3.6.1	4.8.1	X	X	X	
Identification marking	3.6.2	4.8.2	X	X	X	
Operating environment requirements	3.7	4.9				
Waterproofness	3.7.1	4.9.1	X	X		
Sand & dust proof	3.7.2	4.9.2	X	X		
Fungus resistance	3.7.3	4.9.3	X			
Shock resistance	3.7.4	4.9.4	X	X		
Corrosion resistance	3.7.5	4.9.5	X	X		
Vibration	3.7.6	4.9.6	X	X		
High temperature	3.7.7	4.9.7	X	X		
Low temperature	3.7.7	4.9.8	X	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

TABLE III. First article test sequence. 1/

Title	Requirement	Test	Preproduction sample		Initial production sample	
			1	2	1	2
Design & construction	3.3	4.5	X	X	X	X
Operating requirements	3.4	4.6	X	X	X	X
Electrical output	3.4.1	4.6.1	X	X	X	X
Physical characteristics	3.4.5, 3.5	4.6.5, 4.7	X	X	X	X
Waterproofness	3.7.1	4.9.1	X	X	X	X
Sand & dust proof	3.7.2	4.9.2	X		X	
Fungus resistance	3.7.3	4.9.3		X		
Shock resistance	3.7.4	4.9.4	X	X	X	X
Corrosion resistance	3.7.5	4.9.5	X		X	
Vibration resistance	3.7.6	4.9.6	X	X	X	X
High temperature	3.7.7	4.9.7	X	X	X	X
Low temperature	3.7.7	4.9.8	X	X	X	X

1/ Perform tests in the order listed.

4.4 Test fixture. When specified herein, the blasting machine assembly shall be mounted in a test fixture as illustrated in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

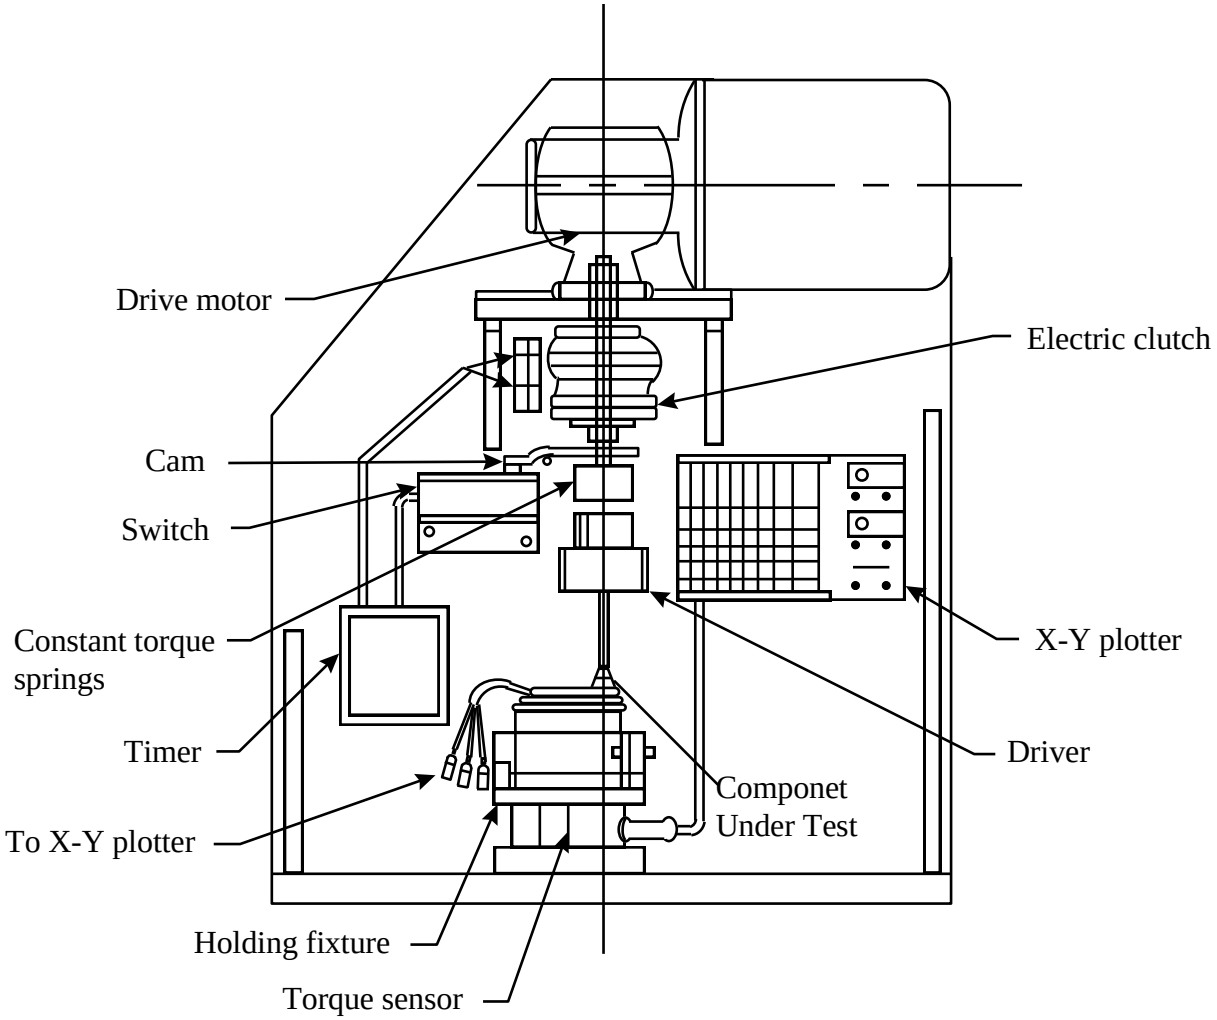


FIGURE 1. Test fixture.

4.5 Materials, design and construction. Conformance to 3.2 through 3.2.3 and 3.3, shall be determined by inspection of contractor records providing proof or certification that design, construction, processing, and materials conform to requirements. Applicable records shall include drawing, specification, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.5.1 Finish. To determine conformance to 3.2.4, the assembly shall be visually checked for smoothness, uniformity, and free from wrinkling, orange peel and any irregularities.

4.6 Operating requirements verification.

4.6.1 Electrical output. To determine conformance to 3.4.1, the assembly shall be mounted in the test fixture and connected to the resistive loads of table I and subject the rotor

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

handle to the corresponding specified torques. Measure the peak output voltage to verify that it is not less than the specified value.

4.6.1.1 Electrical output (100% inspection) (not applicable to PIN 12282970 or 12918973). To determine conformance to 3.4.1 (condition D), each assembly shall be mounted in the test fixture and connected with a 1.47 Ω ±1% resistive load across the output terminals as described in table I, condition D. The electric output shall be minimum 3.8 volts at peak and 1.1 volts, 50 ms later with a rotor shaft input torque not greater than 11.3 N-m applied throughout the 150 ±5° shaft rotation (see 3.4.5).

4.6.1.2 Electrical output (100% inspection) for PINs 12282970 and 12918973. To determine conformance to 3.4.1 each assembly shall be tested as per the appropriate assembly drawing.

4.6.2 Operating position. To determine conformance to 3.4.2, the assembly shall be mounted in the test fixture and subjected to the electrical output test of 4.6.1 at each specified operating position.

4.6.3 Dielectric strength. To determine conformance to 3.4.3, perform the dielectric strength test between the case and output leads in accordance with MIL-STD-202, Method 301 or equivalent (see 4.3.1), using 500 volts rms at a frequency of 60 Hz for a period of 60 ±5 seconds. During this test, verify that the assembly shows no evidence of loosening, cracking, charring, or arcing.

4.6.4 Insulation resistance. To determine conformance to 3.4.4, measure the insulation resistance between each conductor and case in accordance with MIL-STD-202, Method 302, Test Condition B or equivalent (see 4.3.1). Verify that the resistance is not less than 100 megohms.

4.6.5 Rotation. To determine conformance to 3.4.5, the assembly shall be mounted in the test fixture (see figure 1) or equivalent and the direction and angular rotation of the handle shall be verified.

4.6.5.1 Torque and operating stability. To determine conformance to 3.4.6 and 3.4.7, the assembly shall be mounted in the test fixture (see figure 1) and subjected to 10,000 cycles of operation at the rate not in excess of 10 cycles per minute. Perform the test as follows:

a. 990 cycles at condition B
b. 10 cycles at condition H
c. Perform the electrical output test of 4.6.1
d. Repeat for a total of 10,000 cycles

> Not for assemblies 12282970 and 12918973.

NOTE: For Assemblies 12282970 and 12918973, perform the tests per their respective assembly drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.7 Interface requirements verification. Verify the envelope dimensions and mounting interface by measurement and placement, and the electrical interface by connection and disconnection of cables and connectors, in the existing location on different types of fully tracked combat vehicles (see 3.5).

4.8 Support and ownership requirements verification.

4.8.1 Safety inspection. To determine conformance to 3.6.1, assemblies shall be inspected for hazardous burrs, nicks, sharp edges, foreign materials, or other imperfections that pose physical danger to an installer/operator. Inspect the assembly for exposed, frayed, unsecured, or otherwise improperly protected circuits that pose electrical danger to the installer/operator (see 6.8).

4.8.2 Identification. To determine conformance to 3.6.2, verify the presence of the required markings on the assembly. After performing all environmental tests in 4.9, re-inspect the assembly markings for readability.

4.9 Operating environment requirements verification.

4.9.1 Waterproofness. To determine conformance to 3.7.1, submerge the assembly in distilled water contained in a vacuum vessel. Observe for air leakage while holding a vacuum differential of 41.4 kPa for not more than 30 minutes. Repeat the test after inverting the assembly. A steady stream of bubbles from any surface shall be cause for rejection. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

4.9.2 Sand and dust proof. To determine conformance to 3.7.2, subject the assembly to the sand and dust proof test of MIL-STD-202, Method 110, test condition A or equivalent (see 4.3.1), using a sand and dust velocity of 762 ±152 m/min for 6 hours at 25 °C and 762 ±152 m/min for 6 hours at 71 °C. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

4.9.3 Fungus resistance. To determine conformance to 3.7.3, subject the assembly to the fungus resistance test of ASTM G21. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

4.9.4 Shock resistance. To determine conformance to 3.7.4, subject the assembly to the shock test specified in MIL-STD-810, Method 516.4, procedure I or equivalent (see 4.3.1), for a total of 18 sawtooth wave shock pulses. Peak amplitude shall be 75.0 ±7.5 g with a time duration of 6.0 ±0.6 ms measured at the 10 percent amplitude points. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

4.9.5 Corrosion resistance. To determine conformance to 3.7.5, subject the assembly to the corrosion resistance test of MIL-STD-202, Method 101, test condition B or equivalent (see 4.3.1). Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

4.9.6 Vibration resistance. To determine conformance to 3.7.6, subject the assembly to the vibration test specified in MIL-STD-810, Method 514.4, procedure VIII or equivalent (see 4.3.1), except vibration level shall be as shown in figure 2. Sweep time shall be 16 minutes per cycle and the total cycling time per axis shall be two hours in each of the three mutually perpendicular axes. Resonance search shall be conducted at room temperature. After resonance (if any) has been determined place the assembly in a 52 °C ambient environment and subject it to vibration sweeps with resonance, dwell at points (if any) detected. At the conclusion of this test, return the assembly to room temperature. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

4.9.7 High temperature. To determine conformance to 3.7.7, subject the assembly to the high temperature test specified in MIL-STD-810, Method 501.3, Procedure II or equivalent (see 4.3.1), except storage temperature of step 4 shall be 71 °C. At the conclusion of the storage temperature test, stabilize the assembly at 52 °C and subject it to the electrical output test of 4.6.1. After testing, return the assembly to room ambient temperature. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

4.9.8 Low temperature. To determine conformance to 3.7.7, subject the assembly to the low temperature test specified in MIL-STD-810, Method 502.3, Procedure I or equivalent (see 4.3.1). Maintain the temperature at -54 °C for a period of 12 hours minimum. At the conclusion of this time, stabilize the assembly at -32 °C and subject it to the electrical output test of 4.6.1. After testing, return the assembly to room ambient temperature. Following this test the assembly shall be subjected to and pass the electrical output test of 4.6.1.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The assembly covered by this specification is for emergency use as an alternate firing method in the event of power failure in the vehicle. It is a manually operated device which produces an electrical output through generator action. These assemblies are military unique because they are used for the manually emergency firing of military weapons and

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

should be able to operate satisfactorily and reliably after being stored at the extreme ambient temperatures of -54 to 71 °C.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b Class of the blasting machine (see 1.2).
c. If required, the specific issue of individual documents referenced (see 2.2.1, 2.2.2 and 2.3).
d. If first article inspection is required (see 3.1).
e. PIN or drawing number (see 3.3 and 6.7).
f. Electrical output requirements for 12282970 and 12918973 (see 3.4.1).
g. If preproduction inspection is required (see 4.1.2).
h. If initial production is other than as specified (see 4.1.3).
i. Sampling plan (see 4.2.1).
j. Packaging requirements (see 5.1).

6.3 First article. When requiring a first article inspection, contracting documents should provide specific guidance to offerors. This guidance should cover whether the first article is a first article sample, a first production item, or a standard production item from the contractor's current inventory and the number of test items. These documents should also include specific instructions regarding arrangements for examinations, approval of the first article test results, and disposition of first articles. Pre-solicitation documents should provide Government waiver rights for samples for first article inspection to bidders offering a previously acquired or tested product. Bidders offering such products who wish to rely on such production testing should furnish evidence with the bid that prior Government approval is appropriate for the pending contract (see 4.1.1).

6.4 Conformance inspection. Affordable conformance inspection with confidence varies depending upon a number of procurement risk factors. Some of these factors include: Contractor past performance, government schedules and budget, product material and design maturity, manufacturing capital equipment and processes applied, the controlled uniformity of those processes, labor skill and contracting documents should indicate those tests desired from table II and their designated frequency based on risk assessment for the procurement (see 4.2).

6.5 Threads. FED-STD-H28 or ASME B1.1 can be used for guidance on thread design (see 3.2.3).

6.6 Subject term (key word) listing.

Electrical generator
Hand generator
Manual generator
Rotary generator

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.

6.7 Safety. MIL-HDBK-454 may be used as a guide for safety (see 4.8.1).

6.8 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 2590-2010-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:56Z
Check the source to verify that this is the current version before use.