MIL-C-50675A (AR)
13 June 1981
SUPERSEDING
MIL-C-56675 (MU)
15 April 1971

MILITARY SPECIFICATION

CIRCUIT ASSEMBLY, AGC: 10549228

This specification is approved for use by the US Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an Automatic Gain Control (AGC) Circuit Assembly hereinafter referred to as AGC Assembly, used in Radar Receiver R-1475/VPS-2, part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-C-46357	Computer, Gun Direction; M18 Manufacturing Processes and Inspection of
MIL-C-50679	Circuit Board Assembly, AGC: 10549230

FSC: 1285

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

DRAWINGS (See 6.4)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)

F10549228	AGC Circuit Assembly

PACKAGING DATA SHEET

10549228	Packaging of AGC Circuit Assembly

(Copies of specifications, standards, drawings and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication. The AGC Assembly shall be manufactured in accordance with Drawing F10549228 and drawings pertaining thereto.

3.2 General specifications. Where applicable, the AGC Assembly shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishings
d. Part identification and marking
e. Workmanship
f. Soldering electrical connections

3.2.2 MIL-C-46357.

a. Etched circuit assemblies
b. Wiring
c. Threaded fasteners
d. Marking
e. Finishes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

3.3 Environmental service conditions.

3.3.1 Vibration. The AGC Assembly shall be mounted on the vibration table in normal service position. The AGC Assembly shall meet the requirements of 3.4 and 3.5 after being subject to continuous vibration for 2 hours along each of three mutually perpendicular axes within the frequency range of 10 to 55 hertz (Hz) and a half amplitude excursion of 1/64 inch. The rate of change of frequency at each frequency range shall not exceed 1 Hz per second. Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock. The AGC Assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (G) and a pulse duration of 11 ±1 millisecond (ms). The G value of each impulse shall be within ±10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5.5 ms.

3.3.3 Altitude.

3.3.3.1 Operating. The AGC Assembly shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Nonoperating. The AGC Assembly shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 inches Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The AGC Assembly shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40°F and +155°F.

3.3.4.2 Nonoperating (storage). The AGC Assembly shall not suffer permanent damage when subjected to not less than 4 hours at each temperature extreme of -65°F and +160°F, and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating). The AGC Assembly shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity of 95 ±5 percent for a period of not less than 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram.

3.5 Performance. The direct current (dc) resistance of J3 shall be 150 ohms ±5 percent. The assembly shall meet the requirements of 3.5.1.

3.5.1 Input and output characteristics. The AGC Assembly shall provide two gated AGC output levels, proportional to the signal strength of the video

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

input pulse. Gating of the output signals shall be initiated by an external trigger pulse. When supplied with the inputs specified in Table I, with the exception that the video Input Signal amplitude shall be 0.0V in lieu of 1.5V, the AGC Assembly shall provide the outputs specified in Table I.

TABLE I. Input and output characteristics

Requirement	Characteristic	Terminals
Input voltage	+15.0±0.1 Vdc	J6-5, 7 (+15 V) J6-6, 9 (+15 V RET)
Input voltage	-15.0±0.1 Vdc	J6-8 (-15 V) J6-6 (-15 V RET)
Input signal, video	Positive pulse of 1.5V, 0.2 microseconds (μs) wide, delayed 3.0 μs from leading edge of prerange gate trigger	J1
Input signal, prerange gate trigger	Positive pulse of 2.5V. 10.0 μs wide with a frequency of 20.0 KHz.	J3
Output to pre IF amplifier	A negative pulse having a high level voltage of 5.0±1.5V and a low level voltage of 0.0±0.2V, when terminated to a resistance of 850 ohms. Pulse shall be 5.5±2.0 μs wide (50% points), and shall have a leading edge fall time of 0.5±0.3 μs and a trailing edge rise time of 0.8±0.4 μs (10%-90% points).	J4
Output to IF amplifier	A negative pulse having a high level voltage of 5.0±1.5V and a low level voltage of 0.0±0.2V, when terminated to a resistance of 850 ohms. Pulse shall be 5.5±2.0 μs wide (50% points), and shall have a leading edge fall time of 0.5±0.3 μs and a trailing edge rise time of 0.8±0.4 μs (10%-90% points).	J5

3.5.2 Output. With the inputs specified by Table I applied to the AGC Assembly, adjust the amplitude of the input signal to J1 to obtain a low level voltage of 4.0±0.1V on J5. The low level voltage on J4 shall be 0.6±0.1V. When the input signal is further adjusted to obtain a low level voltage of 6.0±0.1V on J5, the low level voltage on J4 shall be 2.6±0.2V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. All parts and assemblies shall be free from burrs, chips, sharp edges, cracks, unblended radii, surface blisters, excess flash, corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agents. Surface coating shall be continuous except for a few slight scratches not exposing the base material. The assembly operations shall be performed in a thorough, workmanlike manner consistent with the best practices of the industry. All required markings shall be neat and sharply defined.

3.7 First Article Inspection. This specification makes provisions for First Article Inspection. Requirements for the submission of First Article Samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) submission. The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three AGC Assemblies manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provision (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.2.3 Functional tests. The requirements and tests in Table II shall be inspected on a 100 percent basis. All examinations and tests shall be conducted at the standard ambient temperature (60°F and 90°F).

TABLE II. Classification of defects
(100 percent inspection)

Characteristic	Requirement	Test procedures
Critical: None		
Major:		
101. Electrical	3.4	4.6.2
102. Performance	3.5	4.6.3
Minor: None		

4.3.3 Rejection. Rejected lots shall be screened for all defective characterisitcs. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.4 Special sampling. One AGC Assembly shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table III. Three AGC assemblies shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control samples shall meet the requirements and tests in Table IV.

TABLE III. Special sampling

Control test	Requirement	Test procedures
301. Fabrication	3.1	Applicable drawings - Visual
302. General specifications	3.2	MIL-F-13926 & MIL-C-46357 - Visual

TABLE IV. Special sampling, environmental

Characteristic	Requirement	Test procedure
303. Vibration	3.3.1	4.6.1.1
304. Shock	3.3.2	4.6.1.2
305. Altitude	3.3.3	4.6.1.3
306. Temperature	3.3.4	4.6.1.4
307. Humidity (nonoperating)	3.3.5	4.6.1.5

4.4.1 Failure of sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.


TABLE V. Test equipment list

Item number	Description
1. Power supply	0 to 20 Vdc, regulated; ac ripple less than 50 mV peak-to-peak, 500 milliamps (mA) current capacity.
2. Power supply	0 to 20 Vdc, regulated; ac ripple less than 50 mV peak-to-peak, 500 mA current capacity.
3. Pulse generator	Adjustable positive pulse amplitude from 0.75 to 5V. Pulse width adjustable from 0.2 to 20 µs. Rise and fall time not greater than 10 nano seconds (ns): PRF, 20 kHz. External trigger input with adjustable delay of up to 3.0 µs.
4. Pulse generator	Same as item 3, however, external triggering is not required.
5. Dc digital voltmeter	Visual display 4 digits minimum, 99.99 V, 9.999 V and 0.9999 V full scale. Accuracy ±0.1% of reading, ± digit.
6. Oscilloscope	Dual channel. Vertical rise and fall time not greater than 10 ns. Sweep lengths of 1.0 µs or greater per division. Scope probe, 10 megohm input resistance.
7. Resistive termination	850 ohm, coaxial, type BNC.
8. Resistive termination	850 ohm, coaxial, type BNC.
9. Test Harness	Figure 1.

TABLE VI. Test harness parts list

Designation	Part	Description
J6	Connector	ITT Cannon DEM-9S or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

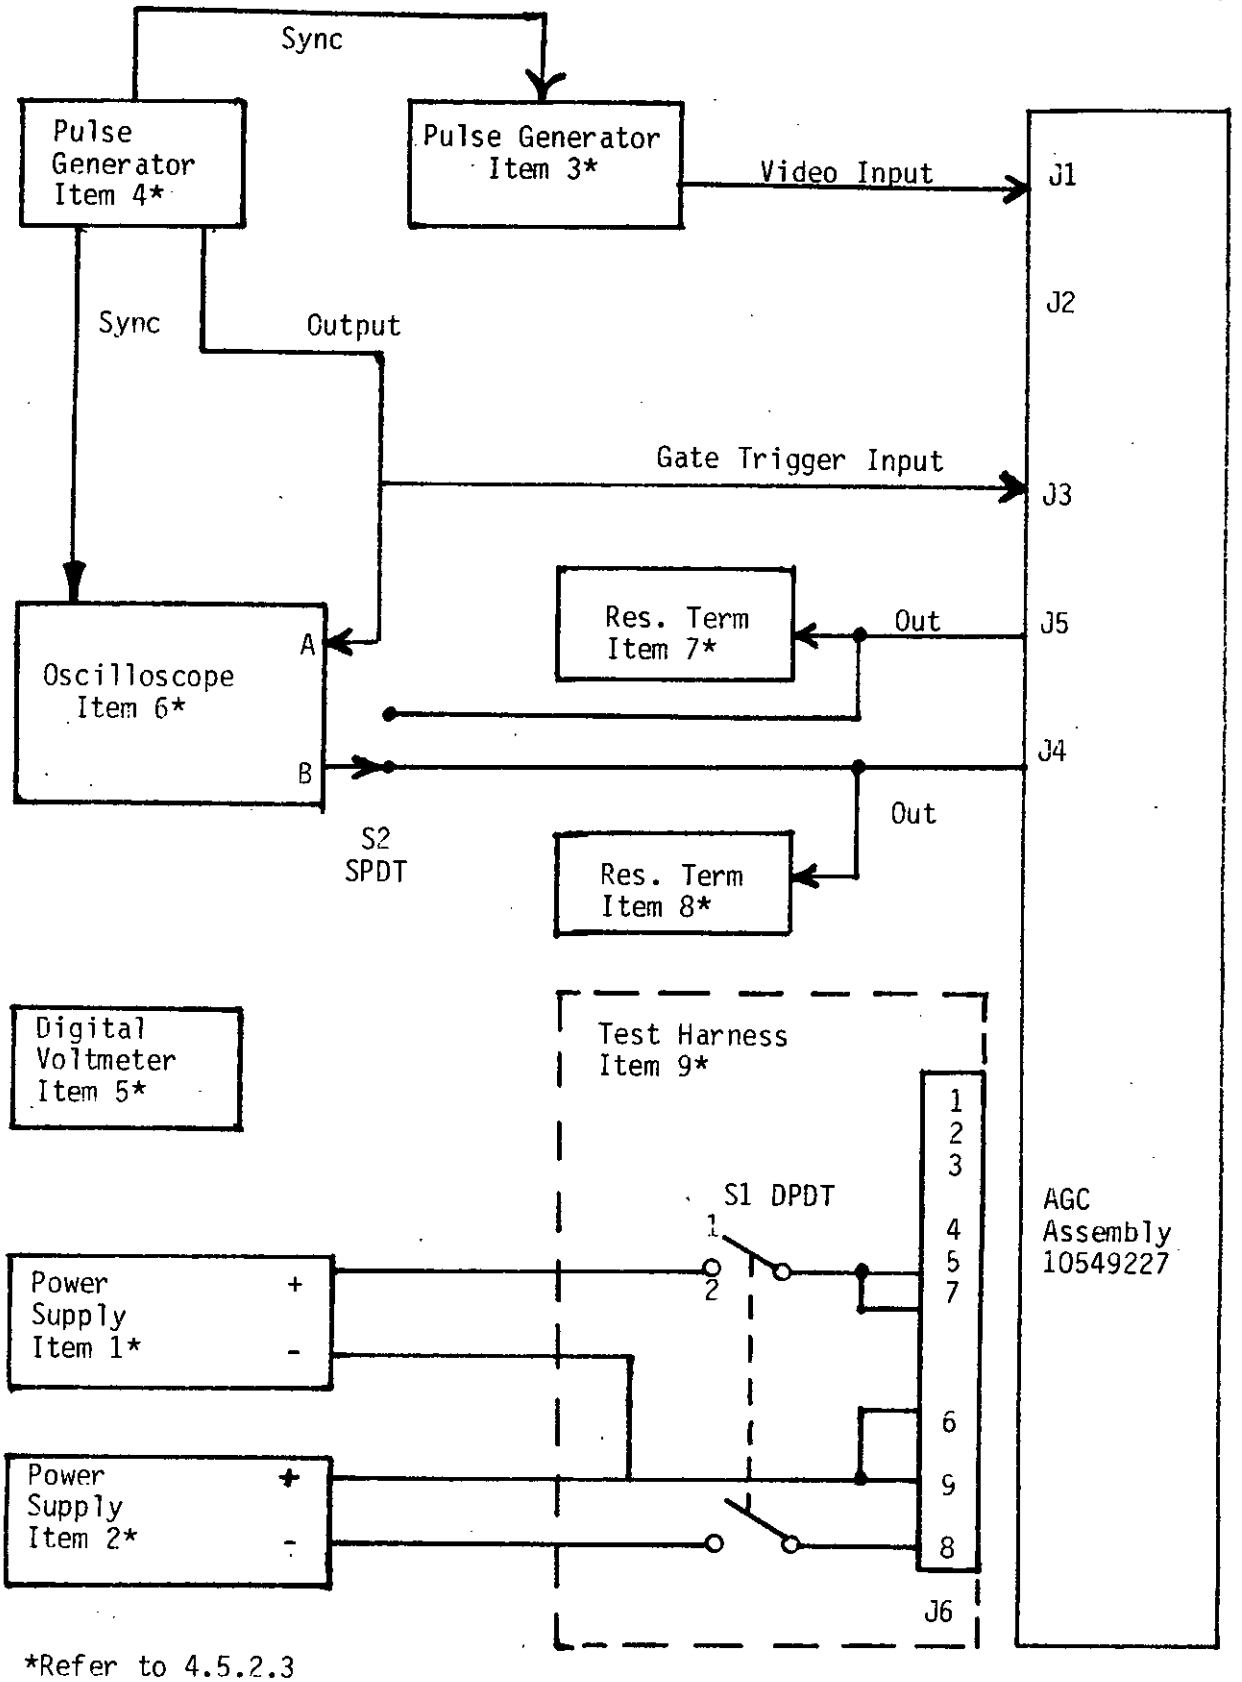

*Refer to 4.5.2.3

FIGURE 1. AGC Assembly test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.5.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Test equipment. In conjunction with 4.5.2.2, the standard test equipment listed in Table V shall be utilized in performing the applicable test of 4.6.

4.6 Test methods and procedures.

4.6.1 Environmental. Environmental tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.6.1.1 Vibration. The test shall be performed as specified in Method 514, Procedure IX, Part I of MIL-STD-810 except that failure criteria do not apply. After vibration, the AGC Assembly shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.1.

4.6.1.2 Shock. This test shall be performed as specified in Procedure I, Method 516 of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 g. After the shock impulses, the AGC Assembly shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.2.

4.6.1.3 Altitude (nonoperating and operating). This test shall be performed as specified in Procedure I, Method 500 of MIL-STD-810 except that in Step 2 the altitude shall be limited to 40,000 feet (5.5 in Hg). Operation of Step 3 shall be the performance tests specified in 4.6.3.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 501 of MIL-STD-810. The temperature of Step 2 shall be +160°F. The temperature of Step 3 shall be maintained for not less than 4 hours. The temperature of Step 4 shall be +155°F. In Step 5, the temperature shall be maintained for 4 hours and the AGC Assembly shall be tested in accordance with 4.6.2 and 4.6.3 during this time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.6.1.4.2 Low (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 502 of MIL-STD-810. The temperature of Step 2 shall be -65°F maintained for not less than 4 hours. The temperature of Step 4 shall be -40°F. In Steps 5 and 7, the AGC Assembly shall be tested in accordance with 4.6.2 and 4.6.3

4.6.1.5 Humidity (nonoperating). This test shall be performed in accordance with Procedure II, Method 507 of MIL-STD-810. The AGC Assembly shall be tested in accordance with 4.6.3.

4.6.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

4.6.3 Performance. The selected AGC Assemblies shall be ohm metered at J3 to verify that the dc input resistance of J3 is 150 ohms ±5 percent. The assemblies shall be tested as follows:

4.6.3.1 Input and output characteristics. Connect test equipment items 1 through 9 as shown in Figure 1. Apply and maintain ±15.0 Vdc input voltages as specified in Table I, and input video signal amplitude is 0.0 Vdc.

4.6.3.2 AR1 zero. Connect the digital voltmeter to the output of AR1. Short circuit R2 and R3 by attaching jumper wires across these resistors. Adjust R60 for a reading of 0.000 ±0.001 Vdc on the digital voltmeter. Remove the jumper wires from across R2 and R3.

4.6.3.3 Prerange gate. Set pulse generator, item 4, for a positive pulse of 2.5 V, 10 µs wide with a pulse repetition frequency (PRF) of 20 kilohertz (kHz). Using oscilloscope, item 6, verify that the prerange gate pulse is present at J4 and J5. With J4 and J5 terminated into 850 ohms, the prerange pulse shall be a negative pulse having a high level voltage of 5.0+1.5V and a low level voltage of 0.0+0.2V. Pulse shall be 5.5±2.0 µs wide (50% points), and shall have a leading edge fall time of 0.5±0.3 µs and a trailing edge rise time of 0.8±0.4 µs (10% - 90% points).

4.6.3.4 Video gate pulse. Attach a jumper wire from the junction of R19 and C12 to ground. Apply the video input signal and prerange gate trigger, specified in Table I, by adjusting output amplitude levels and delay on the pulse generators, item 3 and 4, for input video signal voltage of 1.5 Vdc. Using oscilloscope, item 6, with a 10-megohm probe, observe the pulse at the cathode of CR14. This pulse shall have a positive minimum amplitude of 4.0 V and a negative maximum amplitude of -1.0 V. Pulse rise time shall be 0.5 µs maximum. Slope of the pulse top shall not exceed 0.25 V peak-to-peak.

4.6.3.5 Gain adjustment. With a jumper wire from the junction of R19 and C12 to ground apply the video input signal and prerange gate trigger specified in Table I. Attach the digital voltmeter, item 5, to the output of AR1. Adjust the output amplitude of pulse generator, item 3, until the digital voltmeter reads +1.0 Vdc. Connect the digital voltmeter as specified in Table VII. Set each adjustment for the output specified in Table VII. (Remove jumper wire after completion of tests.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Adjustments

DVM Connection	Adjustment	Output
AR2 output	R61	-1.80 ±0.05 Vdc
AR4 output	R64	+1.50 ±0.05 Vdc
J4	R62 1/	0.0 ±0.2 Vdc

1/ Turn counterclockwise (ccw) until output reaches specified limit but no further.

4.6.3.6 AGC tracking. With the inputs to the AGC Board Assembly as specified in Table I, adjust the amplitude of the video input signal at J1 to obtain a low level voltage of 4.0+.1V at J5 as monitored on scope, item 6. Connect scope to J4 and adjust R62 for a low level voltage of 0.6+.1V. When the input signal at J1 is further increased to obtain an output low level at J5 of 6.0±.1V, the low level at J4 shall be 2.6±.2V.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 10549228. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use. The AGC Assembly is used in the Radar Receiver R-1475/VPS-2, part of Radar Set AN-VPS-2. The AGC Assembly produces two gated AGC levels. One level is supplied to the IF amplifier to control the IF amplifier gain. The second level may be delayed so that it develops an output only at video inputs above a predetermined amplitude. This delayed AGC level is applied to the IF preamplifier to control its gain.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Applicable packaging data sheet number (see 5.1).

c. Selection of applicable level of preservation packaging and packing.

d. Level of protection required.

e. Applicable stock number.

f. Requirement for first article submission.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

6.3 Submission of designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring of the equipment. Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract. Submit designs as required to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAF-I, Dover, NJ 07801.

When the contractor submits inspection equipment designs to the Government for approval, he shall give the following information in his letter of transmittal:

a. The contract number.
b. The contract item (name, model number, etc.).
c. The designs remaining to be submitted and the expected date of transmittal.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

6.5 Changes to previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project No. 1285-A514

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-50675A CIRCUIT ASSEMBLY, AGC: 10549228

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN: DRDAR-QAF
DOVER, NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.