MILITARY SPECIFICATION

PRECIPITATOR (ELECTROSTATIC), VENT FOG, SHIPBOARD USE

1. SCOPE

1.1 This specification covers requirements for the design and construction of an electrostatic precipitator for preventing the emanation of oil mist from breather vents of gear boxes and other such equipment.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

TT-P-645 - Primer, Paint, Zinc-Chromate, Alkyd Type.

MILITARY

MIL-S-901 - Shock Tests, H.I. (High-Impact); Shipboard Machinery, Equipment and Systems, Requirements for.
MIL-E-917 - Electric Power Equipment, Basic Requirements for (Naval Shipboard Use).
MIL-D-963 - Drawings, Electrical, Hull and Mechanical Equipment For Naval Shipboard Use.
MIL-Q-9858-Quality Control System Requirements.
MIL-M-15071-Manuals, Equipment and Systems.
MIL-E-15090-Enamel, Equipment, Light-Gray (Formula No. 111).
MIL-P-15137-Provisioning Technical Documentation for Repair Parts for Electrical and Mechanical Equipment (Naval Shipboard Use).
MIL-P-15328-Primer, Pretreatment, Formula No. 117, for Metals.
MIL-I-16910- Interference Measurement Radio, Methods and Limits; 14 Kilocycles to 1000 Megacycles.
MIL-P-17545-Primer Coating, Steel Ship Maintenance, Alkyd-Red Lead Type, Formula No. 116.
MIL-E-17555-Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of.

STANDARDS

MILITARY

MIL-STD-167- Mechanical Vibrations of Shipboard Equipment.
MIL-STD-242- Electronic Equipment Parts Selected Standards.
MIL-STD-278- Welding and Allied Processes for Machinery for Ships of the United States Navy.
MIL-STD-701- Preferred and Guidance Lists of Semiconductor Devices.

PUBLICATIONS

BUREAU OF SHIPS

NAVSHIPS 250-637-2 - Instructions for Torch Brazing of Ferrous and Non-Ferrous Piping.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 4460

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

2.2 Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

OFFICIAL CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules.

(Application for copies should be addressed to the Official Classification Committee, 1 Park Avenue at 33rd Street, New York 16, N.Y.).

3. REQUIREMENTS

3.1 Preproduction sample. - Prior to beginning production, a sample precipitator shall be examined and tested as specified in 4.2 (see 6.3).

3.2 Materials. - All materials forming a part of the finished product shall be suitable for the purpose intended. The materials shall be free from any defects that might affect the serviceability or appearance of the finished product. Materials shall be in conformance with the requirements specified herein.

3.2.1 Insulation materials. - Insulation materials and application techniques shall conform to MIL-E-917. Class A or B insulation material shall be used and shall be flame and arc resistant and non-toxic.

3.2.2 Corrosion protection. - Corrosion-resisting steel, copper and brass referenced herein are considered satisfactory corrosion-resisting materials. Corrosion-resisting steel, when fabricated by any method that tends to reduce corrosion-resisting properties, shall be normalized to restore those properties before being assembled in any unit.

3.2.2.1 Parts fabricated from other than corrosion-resisting materials and those parts in direct contact with the oil mist shall be protected against corrosion after fabrication with chemicals, electrolytic processes, plating or suitable paints and enamels. The following methods, while not restrictive are acceptable corrosion-protection methods when properly applied:

(a) Hot-dipped galvanized.
(b) Hot phosphate process with rust-inhibiting paint.
(c) Electroplated cadmium followed by dichromate, or hot-phosphate treatment or water-dip lacquer.

3.2.2.2 All bolts, nuts, studs, screws and such other fastenings or fittings as may be used shall be of a corrosion-resisting material, or of a material treated in a manner to render it adequately resistant to corrosion. Self-tapping screws with sheet metal threads shall not be used.

3.3 General design. - The vent fog electrostatic precipitator shall be suitable for operation over an airflow range from zero to 10 cubic feet per minute (c.f.m.). The precipitator shall consist of an integral power supply unit for converting alternating current input voltage to high voltage direct current (d.c.), and ionizing electrode and repelling electrode which shall be located concentrically inside a grounded collector, a flame arrester screen, and a flange for mounting the equipment in a vent piping. Means shall be provided, as an integral part of the precipitator, for securing sway braces and intermediate supports to be used in installation to minimize vibration and shock.

3.3.1 General shipboard design conditions. - General shipboard design characteristics shall be as follows:

(a) Capable of operating for at least 10000 hours without a major overhaul.
(b) Perform in accordance with requirements herein under ambient design temperatures of 40°F. minimum to 122°F. maximum.
(c) Operate satisfactorily and drain without spillage under the following conditions:

1. Up to 30 degrees from normal horizontal position in the fore and aft plane (permanently inclined).
2. With the ship rolling up to 60 degrees from the vertical to either side and pitching 10 degrees up and down from the normal horizontal plane.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

3.4 Shock and vibration. -

3.4.1 Shock. - The precipitator assembly shall be designed such that it is capable of passing the high-impact shock tests specified in MIL-S-901 for grade B, class I equipment.

3.4.2 Vibration. - The precipitator shall be capable of meeting the requirements for type I environmental vibration specified in MIL-STD-167.

3.5 Efficiency. - The efficiency of the precipitator shall not be less than 90 percent over its designed operating range when tested as specified in 4.2.3.

3.6 Pressure loss. - The pressure loss through the precipitator and flame arrester screen shall not exceed 0.80 inch watergage at 10 c.f.m. airflow.

3.7 Ozone and oxides of nitrogen production. - The maximum combined ozone and oxides nitrogen concentration produced by a unit over its operating range shall be no greater than 0.1 parts per million (p.p.m.) of air recorded on the discharge side of the precipitator at approximately 40 percent relative humidity and at the expected operating ionizer (charging) voltage

3.8 Physical dimensions. - The overall dimensions of the precipitator assembly shall not be greater than 30 inches high by 7-3/4 inches wide, by 12 inches deep.

3.8.1 Mounting flange. - The mounting flange shall have an outside diameter (o.d.) of 7-11/16 inches and shall be at least an inch thick. The flange shall be drilled with eight holes, 9/16 inch diameter on 6-9/16 inches bolt circle.

3.9 Radio interference. - The precipitator furnished under this specification shall conform to MIL-I-16910.

3.10 Electrical requirements. - The precipitator shall operate on 115 volts, 60 cycle, single phase, alternating current primary power input.

3.10.1 Ambient temperature. - All components shall be designed for continuous operation in a maximum of 50°C. (122°F.) ambient temperature.

3.10.2 Output power. - Rectification of output power shall be accomplished by semi-conductor components as the preferred method. Semi-conductor components shall be selected from MIL-STD-701. Rectification may be accomplished by electron tubes as an alternate method. Electron tubes shall be selected from MIL-STD-242. The power supply shall contain an input transformer which isolates the input and output circuits.

3.10.3 Power pack. - The power pack shall be designed as an integral part of the precipitator and shall be of dripproof construction. Access to the internal wiring shall be by a lift off cover plate and the access shall be safety interlocked in accordance with 3.12. An indicator shall be provided for ionizer current and to show malfunction.

3.10.4 Ionizing electrode. - The ionizing electrode shall have uniform cross-section which requires no voltage adjustment due to erosion. This should be a tungsten wire 0.010 inch in diameter for maximum ionization and minimum attrition.

3.11 Creepage and clearance distances. - Creepage and clearance distances (between electrical circuits and between any circuit and ground) used in construction of the power supply and connecting devices, between the precipitator and the power supply, shall be sufficient to provide proper insulation characteristics. Data substantiating the distances used shall be provided by the manufacturer.

3.12 Warning and safety devices. - Warning and safety devices shall be incorporated into each unit:

(a) An indicator light to indicate malfunction of the unit.
(b) To protect personnel from injury, and the equipment from damage, due to malfunction of, or damage incurred by the unit, or voltage change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

(c) To prevent injury to personnel or damage to equipment while removing or replacing the ionizer incident to repair.
(d) To minimize any danger of fire due to arc-over.

The safety device shall consist of an electrical-mechanical interlock. The device shall be located such that the removal of the lift off cover plate which, when removed, exposes high-voltage or hazardous electrical connections, shall de-energize the precipitator.

3.13 Welding and brazing. - The surfaces of all parts to be welded or brazed shall be free from rust, scale, paint, grease and other foreign matter.

3.13.1 Welding. - All welding shall be at least equal to that required by MIL-STD-278.

3.13.2 Brazing. - Brazing procedures and qualification of welder (brazer) shall be in accordance with NAVSHIPS 250-637-2, as applicable.

3.14 Painting. - All exterior surfaces of the precipitator, except those surfaces constructed of brass, copper or corrosion resisting steel, shall be thoroughly cleaned and coated as follows:

(a) One coat of pretreatment coating in accordance with MIL-P-15328.
(b) One coat of zinc chromate primer in accordance with TT-P-645, or one coat of red lead primer in accordance with MIL-P-17545.
(c) One final coat of gray enamel in accordance with MIL-E-15090.

3.15 Flame arrester screen. - The flame arrester screen shall be constructed in accordance with figure 1.

3.16 Identification plate. - Each precipitator assembly shall be provided with an identification plate not to exceed 4 by 3 inches. The type of marking for the letters shall be Gothic capitals, and numerals and other characters shall be of similar appearance. The size of the letters, numerals and other characters shall be as necessary for easy readability. The plate shall be etched, engraved or cast, using either monel, brass, corrosion resisting steel or aluminum alloy, or shall be of the anodized aluminum photographic process.

3.16.1 Anodized aluminum photographic process. - Anodized aluminum plates shall have the photosensitive silver compounds imbedded within the oxide layer. After photographic processing the image shall be sealed in the oxide layer by suitable chemical treatment of the layer. Stamping of additional marking information shall not be permitted.

3.16.2 The identification plate shall contain the following information:

(a) Item name.
(b) Federal stock number.
(c) Component identification number (CID).
(d) Contract number.
(e) Manufacturer's name and address.

3.17 Manuals. - Manuals shall be in accordance with type I of MIL-M-15071. The manual shall contain the following information:

(a) General description of an electrostatic precipitator and the principles on which it operates.
(b) Detailed operating instructions.
(c) Detailed installation and maintenance instructions.
(d) Detailed cleaning requirements and instructions.
(e) Trouble shooting guide.
(f) Applicable drawings including wiring diagram and assembly drawings.
(g) Definitive list of onboard repair parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

3.18 Repair parts. - Repair parts shall be furnished in accordance with MIL-P-15137.

3.19 Drawings. - Drawings delineating the equipment shall be furnished in accordance with classes A and B of MIL-D-963 and as specified herein. The drawings shall include detail drawings where necessary to show compliance with specifications, assembly drawings, diagrams and certification data. Approval of these drawings shall be by the Bureau of Ships.

3.19.1 Assembly drawing. - Assembly drawing shall indicate outline, mounting, attachment and connection dimensions including methods and sizes of fastenings and clearances for installation and servicing plus supplemental data as necessary to permit shipyard installation without the supplier's assistance. Drawings shall illustrate design, construction, identity of parts, total weight of assembled parts, indicate center of gravity.

3.19.2 Diagram drawing. - The diagram drawing shall include electrical schematic, electrical connection diagrams with certification data and performance curves, efficiency versus airflow in c.f.m. and pressure loss versus airflow in c.f.m. Performance curves shall cover range from zero air flow to at least an airflow of 14 c.f.m.

3.19.2.1 Each diagram shall show by symbolic representation, electrical wiring, and connections, components, accessories, controls and connections required for installation. The diagrams shall show the size and type of all wiring. All components shall be given a piece number and shall be identified with the certification data. Piece numbers shall be shown in a consecutive order around each diagram where practicable.

3.19.2.2 Certification data shall be shown in columnar form for the assembled equipment. Each item shall be shown with a piece number. In addition to the requirements of MIL-D-963, certification data shall include the following information, as applicable:

(a) Piece number.
(b) Descriptive name.
(c) Quantity required per unit assembly.
(d) Manufacturer.
(e) Manufacturer's serial and identifying number.
(f) Manufacturer's drawing number.
(g) Contractor's identifying number.
(h) Characteristics.

Characteristics may be shown in separate tables and shall include information necessary to specifically qualify or supplement drawings.

3.20 Workmanship. - Workmanship shall be first class in every respect. Sharp edges, burrs and other imperfections shall be removed from all parts subject to contact with personnel to prevent cuts during repair and maintenance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Quality control system. - The supplier shall provide and maintain a quality control system acceptable to the Government. The system of quality control shall be in accordance with MIL-Q-9858 and as specified in 4.1.1.1 to 4.1.1.3, inclusive. The supplier is in no way relieved of the final responsibility to furnish precipitators meeting the requirements of this specification.

4.1.1.1 Description of procedures. - Procedures shall be assembled in manual form and shall indicate organization and responsibility for the control of quality.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

4.1.1.2 Inspection during manufacture. - The supplier shall establish and maintain inspection at appropriately located points in the manufacturing process, beginning with the receipt of raw materials and subcontracted parts through final testing and preparation for shipment of completed units, to assure continuous control of quality of parts, components, assemblies and construction including welding and fabrication.

4.1.1.3 All instruments used in the performance of tests shall be calibrated before and after the tests.

4.2 Preproduction inspection. - Preproduction inspection shall consist of the tests specified in 4.2.1 through 4.2.6 and examination and test specified in 4.4 and 4.5.

4.2.1 High-impact shock test. - The precipitator shall be subjected to high-impact shock test in accordance with type B of MIL-S-901. Evidence of fragmentation or missile effect of parts shall be cause for rejection. The precipitator shall not be required to be operative after this test.

4.2.2 Vibration test. - The precipitator and flame arrester shall be subjected to a vibration test in accordance with the procedure for type I environmental vibration specified in MIL-STD-167.

4.2.3 Efficiency. - The precipitator shall be tested for efficiency, using a dioctylphthalate aerosol, and sensing and indicating components equal to the Naval Research Laboratory (NRL) E-3 smoke penetration meter. The efficiency test shall be conducted over the design airflow range through the unit (see 3.5).

4.2.3.1 Mean aerosol particle size. - The mean aerosol particle size shall not exceed 1.0 micron.

4.2.3.2 Test arrangement. - The test arrangement shall be as shown on figure 2.

4.2.4 Pressure drop. - The pressure drop in the air stream across the precipitator, with the flame arrester screen installed, shall be measured at airflows of 2 c.f.m. and 10 c.f.m.

4.2.5 Radio interference. - The precipitator shall be tested for radio interference in accordance with MIL-I-16910. The test shall be conducted with the precipitator operating at rated voltage (ionizer and collector) and with 10 c.f.m. airflow through the unit.

4.2.6 Ozone and oxides of nitrogen. - The precipitator shall be tested for production of ozone and oxides of nitrogen by a method satisfactory to the Bureau of Ships. The NRL test method described in NRL report C-3457 may be used. (A description of this test method may be obtained from the Naval Research Laboratory, Washington, D.C. by referring to the above report).

4.3 Quality conformance inspection. -

4.3.1 Lot. - All precipitators offered for delivery at one time shall be considered a lot.

4.3.2 Sampling. -

4.3.2.1 Sampling for examination. - Sample precipitators shall be selected at random from each lot in accordance with table I for the examination specified in 4.4.

Table I - Sampling for examination.

Lot size number of units	Sample size number of units	Defective units	
		Acceptance number	Rejection number
1 to 6	All	---	---
7 to 15	7	0	1
16 to 25	10	0	1
26 to 40	13	0	1
41 to 65	17	1	2
66 to 110	22	1	2
111 to 180	28	2	3
181 to 300	35	2	3
301 to 500	45	3	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

4.4 Examination. - The preproduction sample and each of the sample precipitators selected in accordance with 4.3.2.1 shall be examined and measured to verify compliance with the requirements of this specification. The classification of possible defects in table II is the minimum that is to be considered in the examination. Any precipitator in the sample containing one or more defects shall not be offered for delivery and if the number of defective units in any sample exceeds the acceptance number for the sample, the lot represented by the same shall not be offered for delivery.

Table II - Classification of defects.

Categories	Defects
Critical	
1	None defined.
Major:	
101	Incomplete, component parts missing or improperly assembled.
102	Materials defective or not as specified.
103	Limiting dimensions exceeded.
104	Not in accordance with approved drawings.
105	Indicator light missing or broken.
106	Drilling, mounting holes, bolt circle, non-conforming.
107	Welding incomplete, not free of cracks, nonfusion, heavy porosity, heavy undercut, slag inclusions.
108	Bolts, nuts and screws not tight, missing (parts shall be properly fastened and secured).
109	Surfaces not smooth, evidence of sharp edges, or burrs.
110	Painting (as applicable), non-conforming.
111	Marking, identification plate not complete, missing, not permanent, illegible or not as specified.

4.5 Operational test. - Each precipitator furnished under a contract or order shall be energized to demonstrate proper construction. Electrical metering equipment shall be connected in the circuitry to demonstrate that the ionizing and collecting current and voltage is within 10 percent of rated values at the design point. Safety devices shall be checked to insure proper performance, and insulation resistance and dielectric strength measurements shall be made to demonstrate that no personnel hazard exists. Evidence of improper construction, the ionizing and collecting current and voltage exceeding 10 percent of rated values at the design point, unsatisfactory performance of the safety devices, or personnel hazards, shall be cause for rejection.

4.6 Reports. - Certified reports on preproduction inspection shall be forwarded in triplicate to the Bureau of Ships to substantiate the fact that the inspection has been conducted and that the specification requirements are met. Reports shall be assembled in manual form.

5. PREPARATION FOR DELIVERY

5.1 Domestic shipment and early equipment installation and storage of onboard repair parts. -

5.1.1 Electrostatic precipitator. -

5.1.1.1 Preservation and packaging. - Preservation and packaging shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the using activity and until early installation and may conform to the supplier's commercial practice when such meets these requirements.

5.1.1.2 Packing. - Packing shall be accomplished in a manner which will insure acceptance by common carrier at lowest rate, and will afford protection against physical or mechanical damage during direct shipment from the supply source to the using activity for early installation. The shipping containers or method of packing shall conform to the Uniform Freight Classification Rules and Regulations or other carrier regulations as applicable to the mode of transportation and may conform to the supplier's commercial practice

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

when such meets these requirements.

5.1.1.3 Marking. - Shipment marking information shall be provided on interior packages and exterior shipping containers in accordance with the contractor's commercial practice. The information shall include nomenclature, Federal stock number or manufacturer's part number, size, contract or order number, contractor's name and destination.

5.1.2 Onboard repair parts. - Repair parts shall be preserved and packaged level A, packed level C and marked levels A and C respectively in accordance with MIL-E-17555.

5.1.3 Manuals. - Manuals furnished with the basic equipment shall be packaged in sealed, waterproof containers.

5.2 Domestic shipment and storage or overseas shipment. - The requirements and levels of preservation, packaging, packing and marking for shipment shall be specified by the procuring activity (see 6.1).

5.2.1 The following provides various levels of protection during domestic shipment and storage of overseas shipment, which may be required when procurement is made.

5.2.1.1 Preservation and packaging. -

5.2.1.1.1 Electrostatic precipitator. -

5.2.1.1.1.1 Level A. - Each electrostatic precipitator shall be unit protected and packaged in accordance with method II, less desiccant, of MIL-P-116. Contact preservatives shall not be required.

5.2.1.1.1.1.1 Unit containers. - Unit containers, except those specified in MIL-P-116 for the applicable methods of preservation, shall conform to PPP-B-566, PPP-B-636 or PPP-B-676 at the option of the contractor. Container closure and sealing shall be in accordance with the applicable container specification or appendix thereto.

5.2.1.1.1.2 Level C. - Preservation and packaging of each unit shall be sufficient to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supply source to the using activity for early installation. This level may conform to the supplier's commercial practice when such meets the requirements of this level.

5.2.1.2 Packing. - Packing shall be level A, B, or C as specified.

5.2.1.2.1 Level A. - Each precipitator, packaged as specified in the contract or order, shall be packed for overseas shipment in containers conforming to any of the following specifications at the option of the contractor:

Specification	Type or class
PPP-B-591	Class II
PPP-B-601	Overseas type
PPP-B-621	Class 2
PPP-B-636	Class 2

When required, shipping containers shall have caseliners conforming to MIL-L-10547. Caseliners shall be closed and sealed in accordance with the appendix to MIL-L-10547. Caseliners for fiberboard boxes, PPP-B-636, may be omitted provided all centers and edge seams and manufacturer's joints are sealed and waterproofed with pressure sensitive tape in accordance with the applicable fiberboard box specification. Shipping containers shall be closed, strapped or banded in accordance with the applicable box specification or appendix thereto. The gross weight of wood or wood-cleated boxes, shall not exceed 200 pounds; fiberboard boxes shall not exceed the weight limitations of the applicable fiberboard box specification. Fiberboard boxes conforming to class 2 of PPP-B-636 closed, sealed and banded as specified herein may be used as the shipping container.

5.2.1.2.2 Level B. - Each precipitator packaged as specified in the contract or order, shall be packed for domestic shipment and storage in containers conforming to any of the following specifications at the

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

option of the contractor.

Specification	Type or class
PPP-B-591	Class I
PPP-B-601	Domestic
PPP-B-621	Class 1
PPP-B-636	Class 1

Shipping containers shall be closed in accordance with the applicable box specification or appendix thereto. The gross weight of wood or wood-cleated boxes shall not exceed 200 pounds; fiberboard boxes shall not exceed the weight limitations of the applicable fiberboard box specification. Fiberboard boxes conforming to PPP-B-636, closed as specified herein may be used as the shipping container.

5.2.1.2.3 Level C. - Each precipitator packaged as specified in the contract or order, shall be packed in containers, at the lowest rate, in a manner which will insure acceptance by the common carrier and will afford protection against physical or mechanical damage during direct shipment from the supply source to the first receiving activity for immediate use. This level shall conform to the Uniform Freight Classification Rules and Regulations or other carrier regulations as applicable to the mode of transportation and may be the supplier's commercial practice when such meets the requirements of this level.

5.2.1.3 Repair parts. - Repair parts shall be preserved and packaged level A or C; packed level A, B, or C and marked in accordance with MIL-E-17555.

5.2.1.4 Drawings. - Preparation for delivery shall be in accordance with MIL-D-963. Unless otherwise specified, packages and shipping containers shall be marked in accordance with level C requirements of MIL-STD-129.

5.2.1.5 Manuals. - Manuals shall be packaged, packed and marked for shipment in accordance with MIL-M-15071.

5.2.1.6 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked for shipment in accordance with MIL-STD-129).

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Preservation, packaging, packing and marking requirements, if other than required by 5.1 (see 5.2).

6.2 Design guides. -

6.2.1 Shock. - The design information given in MIL-S-901 should be carefully considered in the design of this equipment. This information is also used by the drawing review activity as a factor in the approval of drawings prior to manufacture.

6.3 Preproduction. -

6.3.1 Invitations for bids should provide that the Government reserves the right to waive the requirement for preproduction samples as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

Preparing activity:
Navy - Ships
(Project 4460-N037Sh)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

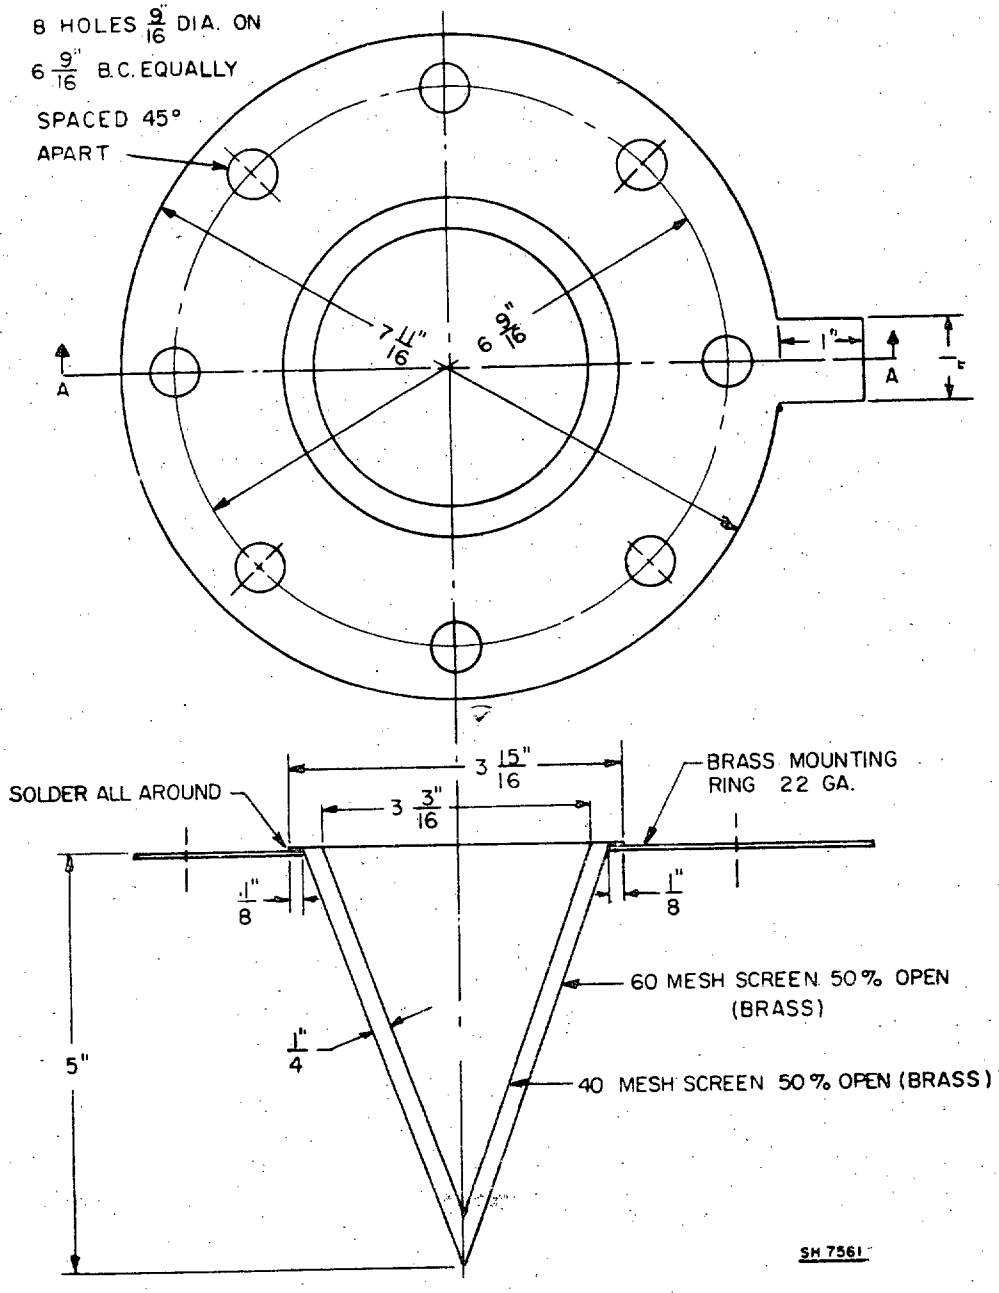


Figure 1. - Flame arrester screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.

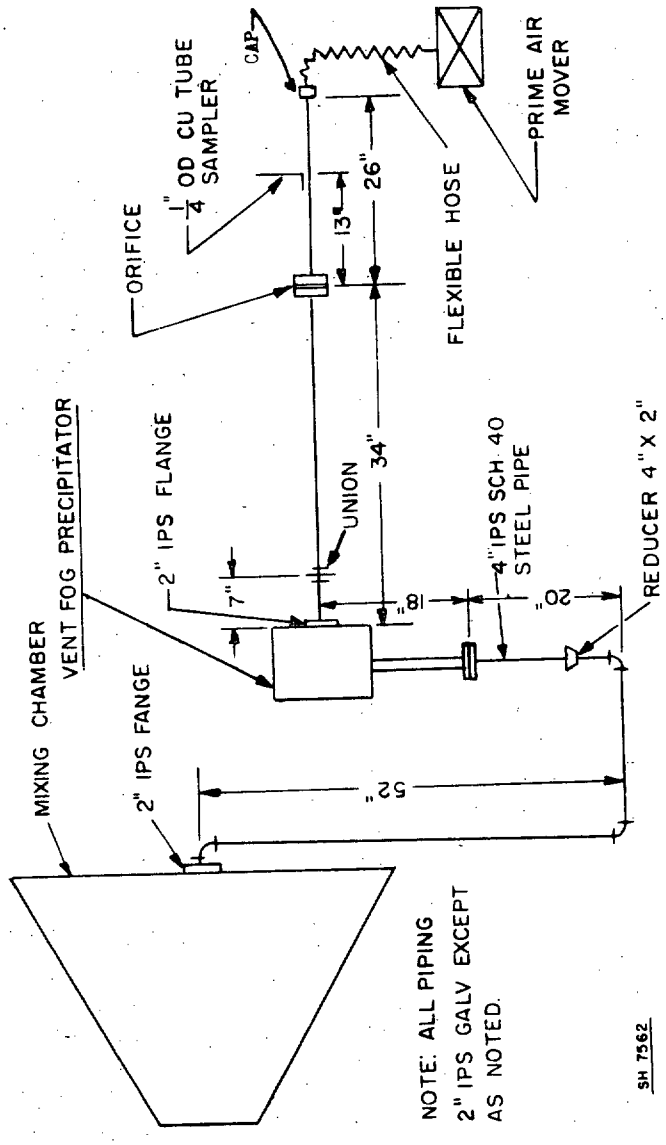


Figure 2. - Efficiency test arrangement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:16Z
Check the source to verify that this is the current version before use.