MIL-HDBK-1010/1
30 SEPTEMBER 1988
SUPERSEDING
SEE FOREWORD

MILITARY HANDBOOK

COST ENGINEERING: POLICY AND PROCEDURES

AMSC N/A

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED

AREA FACR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

ABSTRACT

Current criteria and procedures are presented for use in the preparation and review of the Activities' Project Data Sheet, Facility Study Cost Estimates and the EFD's Cost Certification Estimates for MILCON construction and operational/maintenance projects at all naval shore facilities. General Guidance for other types of cost estimates is also provided.

Projects have four parts of equal importance; requirement, justification, scope, and cost. The preparation of documents and the reviews are usually satisfactory with full attention given to these four parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

FOREWORD

This publication presents the Naval Facilities Engineering Command (NAVFACENGCOM) criteria and procedures related to the preparation and review of the Activity's Facility Study and the Engineering Field Division's (EFD) Cost Certification estimates for the Military Construction Program, including O&M projects. This publication is intended to be a cost estimate preparation and review guide, and should not be used exclusive of full consideration of scope, additional functional features and supporting facilities.

This publication supersedes DM-10, "Cost Engineering Criteria and Cost Data" dated May 1984. It is presented in two volumes, MIL-HDBK-1010/1 and 1010/2.

MIL-HDBK-1010/1 provides guidance, procedure, and examples. The guidance cost given are for two consecutive fiscal years based on an area cost factor of 1.00. MIL-HDBK-1010/2 provides data that has been entered in the NAVFACENGCOM historical cost file. The source of information is the EFD award data. The adjusted unit costs have been escalated to a common date for one fiscal year, and have been adjusted for size and area cost factors. The job descriptions are for use in modifying award cost to suit the scope of a planned project. The entries are self explanatory except the "pricing factor". The cost engineer has selected a position on a scale of 1 to 5 (1 for lowest expected influence) for three factors: competitive climate, job conditions, and complexity. The "pricing factor" is the sum of the three selections, and is useful in adjusting to the expected variation of those factors.

Design cannot remain static any more than can the functions it serves or the technologies it uses. Accordingly, recommendations for improvement are encouraged and should be furnished to Commander, Atlantic Division, Naval Facilities Engineering Command, Code 407, Norfolk, VA 23311-6287; telephone (804) 444-9970.

THIS HANDBOOK SHALL NOT BE USED AS A REFERENCE DOCUMENT FOR PROCUREMENT OF FACILITIES CONSTRUCTION. IT IS TO BE USED IN THE PURCHASE OF FACILITIES ENGINEERING STUDIES AND DESIGN (FINAL PLANS, SPECIFICATIONS, AND COST ESTIMATES). DO NOT REFERENCE IT IN MILITARY OR FEDERAL SPECIFICATIONS OR OTHER PROCUREMENT DOCUMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COST ENGINEERING: POLICY AND PROCEDURES

CONTENTS

		Page
PART 1	PROJECT DATA SHEET (PDS) AND FACILITY STUDY COST GUIDANCE	1
Section 1	INTRODUCTION	2
1.1	Purpose	2
1.2	Background	2
1.3	Importance	2
1.4	Comments or Suggestions	2
Section 2	SCOPE CONSIDERATIONS	3
2.1	Introductory Paragraph	3
2.2	Operation and Maintenance Support Information (OMSI)	3
2.2.1	Types of OMSI	3
2.2.2	OMSI Estimate	3
2.3	Intrusion Detection Systems (IDS)	5
2.3.1	MCON Fundable IDS	5
2.3.2	Technical Support	5
2.3.3	Non-MCON Fundable IDS	5
2.4	Land Acquisition	6
2.5	Hyperbaric Requirements	6
2.6	Shielding Requirements	6
2.6.1	Tempest/HEMP (High Altitude Electromagnetic Pulse)/ EMP (Electromagnetic Pulse) Shielding	6
2.6.2	Coordination Required to Meet Objectives	6
2.7	Uninterruptible Power System (UPS)	6
2.8	Communication Requirements	6
2.8.1	Telephone and Communications Installations	6
2.8.2	Funding Responsibilities	7
2.8.3	Funding Exceptions	7
2.9	Built-in Retrieval Equipment Racks (Warehouses)	7
2.9.1	MCON Funded	7
2.9.2	OPN Funded	7
2.9.3	Warehouse Design	7
2.10	Asbestos Related Work	7
2.11	Computation of Gross Area	8
2.11.1	BEQ Area Requirements	8
2.11.2	BOQ Area Requirements	8
2.12	International Balance of Payments (IBOP)	8
2.12.1	IBOP Implications	11
2.12.2	Normal Procedures	11
2.12.3	Planned Procedures	11
2.12.4	Basis for Choice of Construction Procedure	11
2.12.5	Presentation of IBOP Data on DD Form 1391	11
2.12.6	Requirements Regarding Returns to the United States	11
2.13	Project Data Sheet	12
2.14	Project Data Sheet Flow Chart	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

Section 3		FACILITIES STUDY COST DEVELOPMENT	17
	3.1	Instructions for DD Form 1391	17
	3.2	Instructions for Building SF Cost Development	18
	3.3	Supporting Facilities	18
	3.3.1	Special Foundation Features	18
	3.3.2	Electrical Utilities	19
	3.3.3	Mechanical Utilities	19
	3.3.4	Roads, Parking, and Sidewalks	19
	3.3.5	Site Improvements	19
	3.3.6	Demolition	19
	3.3.7	Contaminated Soil	19
	3.3.8	Asbestos Removal	19
	3.3.9	Supporting Facilities - Cost	19
	3.3.10	Cost Model	19
	3.4	Proposed Site Plan	19
	3.5	Pricing Sources	19
Section 4		AREA COST FACTORS	26
	4.1	Stateside Area Cost Factors	26
	4.2	Overseas Area Cost Information	30
Section 5		GUIDANCE COSTS	31
	5.1	Primary Facility Guidance Costs	31
	5.2	Supporting Facilities Guidance Cost	31
Section 6		FACILITY STUDY SAMPLE ESTIMATE	47
	6.1	DD Form 1391	47
	6.2	Building Square Foot Cost Development	47
	6.3	Supporting Facilities Cost Development	47
Section 7		CES STANDARD SYSTEMS LIST	52
	7.1	Interior	52
	7.2	Exterior	54
Section 8		SUPPLEMENTAL INFORMATION	57
	8.1	Blank Forms and References	57
	8.2	Conversion Factors	57
	8.3	Units of Measure and Their Symbols	57
	8.4	Acronyms and Abbreviations	57
PART 2		COST CERTIFICATION COST GUIDANCE	80
Section 9		INTRODUCTION	81
	9.1	Purpose and Background	81
	9.2	Importance	81
	9.3	Contents	81
	9.4	Comments or Suggestions	81

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

Section 10 SCOPE CONSIDERATIONS....82
10.1 Introductory Paragraph....82
10.2 Operation and Maintenance Support Information (OMSI)....82
10.2.1 Types of OMSI....82
10.2.2 OMSI Estimate....82
10.3 Intrusion Detection Systems (IDS)....84
10.3.1 MCON Fundable IDS....84
10.3.2 Technical Support....84
10.3.3 Non-MCON Fundable IDS....84
10.4 Land Acquisition....85
10.5 Hyperbaric Requirements....85
10.6 Shielding Requirements....85
10.6.1 Tempest/HEMP (High Altitude Electromagnetic Pulse)/ EMP (Electromagnetic Pulse) Shielding....85
10.6.2 Coordination Required to Meet Objectives....85
10.7 Uninterruptible Power System (UPS)....85
10.8 Communication Requirements....85
10.8.1 Telephone and Communications Installations....85
10.8.2 Funding Requirements....86
10.8.3 Funding Exceptions....86
10.9 Built-in Retrieval Equipment Racks (Warehouses)....86
10.9.1 MCON Funded....86
10.9.2 OPN Funded....86
10.9.3 Warehouse Design....86
10.10 Asbestos Related Work....86
10.11 Computation of Gross Area....87
10.11.1 BEQ Requirements....87
10.11.2 BOQ Area Requirements....87
10.12 International Balance of Payments (IBOP)....87
10.12.1 IBOP Implications....90
10.12.2 Normal Procedures....90
10.12.3 Planned Procedures....90
10.12.4 Basis for Choice of Construction Procedure....90
10.12.5 Presentation of IBOP Data on DD Form 1391....90
10.12.6 Requirements Regarding Returns to the United States....90
10.13 Instructions for DD Form 1391....90
10.14 Instructions for Budget Estimate Summary Sheet....93
10.15 Instructions for the Building SF Cost Development Sheet....95

Section 11 PRIMARY AND SUPPORTING FACILITIES DEFINITIONS....99
11.1 Primary Facility....99
11.2 Supporting Facilities....99
11.2.1 Special Foundation Features....99
11.2.2 Electrical Utilities....99
11.2.3 Mechanical Utilities....99
11.2.4 Roads, Parking, and Sidewalks....99
11.2.5 Site Improvements....99
11.2.6 Demolition....99
11.2.7 Contaminated Soil....99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

	11.2.8	Asbestos Removal	99
	11.3	Supporting Facilities - Cost	100
	11.4	Proposed Site Plan	100
	11.5	Pricing Sources	100
Section 12		AREA COST FACTORS	101
	12.1	Stateside Area Cost Factors	101
	12.2	Overseas Area Cost Information	105
Section 13		GUIDANCE COSTS	106
	13.1	Primary Facility Guidance Costs	106
	13.2	Supporting Facilities Guidance Cost	106
Section 14		COST CERTIFICATION SAMPLE ESTIMATE	122
	14.1	DD Form 1391	122
	14.2	Building Budget Estimate Summary Sheet	122
	14.3	Estimate Summary Sheet	122
	14.4	Cost Estimate Backup Sheet (LANTDIV)	122
	14.5	Building Square Foot Cost Development	122
	14.6	Worksheet	122
	14.7	Cost Model Questionnaire	139
Section 15		CES STANDARD SYSTEMS LIST	160
	15.1	Interior	160
	15.2	Exterior	162
Section 16		SUPPLEMENTAL INFORMATION	165
	16.1	Conversion Factors	165
	16.2	Blank Forms and References	165
	16.1	Acronyms and Abbreviations	165
PART 3		CONSTRUCTION COST ESTIMATES	200
Section 17		CONSTRUCTION COST ESTIMATES	201
	17.1	General	201
	17.1.1	Detailed Cost Estimate Required With Each Submittal	201
	17.1.2	Uses of the Cost Estimate	201
	17.2	Preliminary (35%) Estimate	201
	17.2.1	Preliminary Estimate Based on Materials Take-Off	201
	17.2.2	Preliminary Estimate Should Monitor the Estimated Construction Cost	201
	17.3	Prefinal Estimate	201
	17.3.1	Prefinal Requirements	201
	17.3.2	Structure of Estimates and Work Requiring Multiple Estimates	202
	17.3.3	CES Estimates	202
	17.4	Final Estimate	202

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

Section 18	SAMPLE CONSTRUCTION COST ESTIMATE	204
18.1	Summary Report - System	204
18.2	Input Report	207
18.3	Backup Report - System Specification	210
18.4	Summary Report - Specification Section	217
18.5	Detailed Backup Report - Specification Section	224
18.6	Input Listing (Sorted)	231
PART 4	OTHER TYPES OF ESTIMATES	234
Section 19	ESTIMATES FOR CHANGE ORDERS	235
19.1	Estimates for Change Orders	235
19.2	Sample Change Order Estimate	236
19.2.1	Change Order Cost Estimate Backup Sheet (LANTDIV)	239
Section 20	ESTIMATES FOR NEGOTIATED CONSTRUCTION CONTRACTS	244
20.1	Negotiated Construction Contracts	244
Section 21	ESTIMATES FOR SPECIAL PROJECTS	245
21.1	Two-Step Procedures	245
Section 22	SUPPLEMENTAL INFORMATION	246
22.1	Blank Forms	246
PART 5	COST DATA REFERENCES	251
Section 23	CES STANDARD SYSTEMS NARRATIVES	252
23.1	CES Standard Systems Narratives	252
23.2	Award Cost Data	280

APPENDICES

APPENDIX A, Blank Forms and References....58
APPENDIX B, SI Conversion Factors....73
APPENDIX C, Units of Measure and Their Symbols....74
APPENDIX D, Acronyms and Abbreviations....75
APPENDIX E, Air Conditioning Tonnage Guide....79
APPENDIX F, Conversion Factors....166
APPENDIX G, Blank Forms and References....167
APPENDIX H, Acronyms and Abbreviations....196
APPENDIX I, Blank Forms....247
APPENDIX J, Award Cost Data....281

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

FIGURES

1 Sample IBOP Summary....10
2 Project Data Sheet....13
3 Project Submission Routes....15
4 Components of Project Documentation....16
5 DD Form 1391....21
6 Building SF Cost Development....22
7 Supporting Facilities Cost Development....23
8 Size Adjustment Chart....24
9 Projected NAVFAC Cost Index....25
10 DD Form 1391....48
11 Building Square Foot Cost Development....49
12 Supporting Facilities Cost Development....51
13 Sample IBOP Summary....89
14 Sample 1391 for Cost Certification Estimate....92
15 Building Budget Estimate Summary Sheet....94
16 Building SF Cost Development....96
17 Size Adjustment Chart....97
18 Projected NAVFAC Cost Index....98
19 DD Form 1391....123
20 Building Budget Estimate Summary Sheet....125
21 Estimate Summary Sheet....127
22 Cost Estimate Backup Sheet (LANTDIV)....128
23 Building SF Cost Development....138
24 Summary Report - System....205
25 Input Report....208
26 Backup Report - System Specification....211
27 Summary Report - Specification Section....218
28 Detailed Backup Report - Specification Section....225
29 Input Listing (Sorted)....232
30 Change Order Estimate....237
31 Change Order Cost Estimate Backup Sheet....240

TABLES

1 Facilities Usually Requiring Type A OMSI....4
2 Facilities Usually Requiring Type B OMSI....4
3 OMSI Cost for Preliminary Estimates....4
4 Bachelor Enlisted Quarters Area Table....9
5 Primary Facility Guidance Costs....32
6 Supporting Facilities Guidance Costs....36
7 Facilities Usually Requiring Type A OMSI....83
8 Facilities Usually Requiring Type B OMSI....83
9 OMSI Cost for Preliminary Estimates....83
10 Bachelor Enlisted Quarters Area Table....88
11 Primary Facility Guidance Costs....107
12 Supporting Facilities Guidance Costs....111

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

REFERENCES.....338

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PART 1: PROJECT DATA SHEET (PDS) AND FACILITY STUDY COST GUIDANCE

CONTENTS

		Page
PART 1	PROJECT DATA SHEET (PDS) AND FACILITY STUDY COST GUIDANCE	1
Section 1	INTRODUCTION	2
1.1	Purpose	2
1.2	Background	2
1.3	Importance	2
1.4	Comments or Suggestions	2
Section 2	SCOPE CONSIDERATIONS	3
2.1	Introductory Paragraph	3
2.2	Operation and Maintenance Support Information (OMSI)	3
2.2.1	Types of OMSI	3
2.2.2	OMSI Estimate	3
2.3	Intrusion Detection Systems (IDS)	5
2.3.1	MCON Fundable IDS	5
2.3.2	Technical Support	5
2.3.3	Non-MCON Fundable IDS	5
2.4	Land Acquisition	6
2.5	Hyperbaric Requirements	6
2.6	Shielding Requirements	6
2.6.1	Tempest/HEMP (High Altitude Electromagnetic Pulse)/ EMP (Electromagnetic Pulse) Shielding	6
2.6.2	Coordination Required to Meet Objectives	6
2.7	Uninterruptible Power System (UPS)	6
2.8	Communication Requirements	6
2.8.1	Telephone and Communications Installations	6
2.8.2	Funding Responsibilities	7
2.8.3	Funding Exceptions	7
2.9	Built-in Retrieval Equipment Racks (Warehouses)	7
2.9.1	MCON Funded	7
2.9.2	OPN Funded	7
2.9.3	Warehouse Design	7
2.10	Asbestos Related Work	7
2.11	Computation of Gross Area	8
2.11.1	BEQ Area Requirements	8
2.11.2	BOQ Area Requirements	8
2.12	International Balance of Payments (IBOP)	8
2.12.1	IBOP Implications	11
2.12.2	Normal Procedures	11
2.12.3	Planned Procedures	11
2.12.4	Basis for Choice of Construction Procedure	11
2.12.5	Presentation of IBOP Data on DD Form 1391	11
2.12.6	Requirements Regarding Returns to the United States	11
2.13	Project Data Sheet	12
2.14	Project Data Sheet Flow Chart	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

Section 3 FACILITIES STUDY COST DEVELOPMENT.....17
3.1 Instructions for DD Form 1391.....17
3.2 Instructions for Building SF Cost Development.....18
3.3 Supporting Facilities.....18
3.3.1 Special Foundation Features.....18
3.3.2 Electrical Utilities.....19
3.3.3 Mechanical Utilities.....19
3.3.4 Roads, Parking, and Sidewalks.....19
3.3.5 Site Improvements.....19
3.3.6 Demolition.....19
3.3.7 Contaminated Soil.....19
3.3.8 Asbestos Removal.....19
3.3.9 Supporting Facilities - Cost.....19
3.3.10 Cost Model.....19
3.4 Proposed Site Plan.....19
3.5 Pricing Sources.....19

Section 4 AREA COST FACTORS 26
4.1 Stateside Area Cost Factors.....26
4.2 Overseas Area Cost Information 30

Section 5 GUIDANCE COSTS.....31
5.1 Primary Facility Guidance Costs.....31
5.2 Supporting Facilities Guidance Cost.....31

Section 6 FACILITY STUDY SAMPLE ESTIMATE.....47
6.1 DD Form 1391.....47
6.2 Building Square Foot Cost Development.....47
6.3 Supporting Facilities Cost Development.....47

Section 7 CES STANDARD SYSTEMS LIST 52
7.1 Interior.....52
7.2 Exterior.....54

Section 8 SUPPLEMENTAL INFORMATION.....57
8.1 Blank Forms and References.....57
8.2 Conversion Factors.....57
8.3 Units of Measure and Their Symbols.....57
8.4 Acronyms and Abbreviations.....57

APPENDICES

APPENDIX A, Blank Forms and References.....58
APPENDIX B, Conversion Factors.....73
APPENDIX C, Units of Measure and Their Symbols.....74
APPENDIX D, Acronyms and Abbreviations.....75
APPENDIX E, Air Conditioning Tonnage Guide.....79

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

Section 11 PRIMARY AND SUPPORTING FACILITIES DEFINITIONS.....99
11.1 Primary Facility.....99
11.2 Supporting Facilities.....99
11.2.1 Special Foundation Features.....99
11.2.2 Electrical Utilities.....99
11.2.3 Mechanical Utilities.....99
11.2.4 Roads, Parking, and Sidewalks.....99
11.2.5 Site Improvements.....99
11.2.6 Demolition.....99
11.2.7 Contaminated Soil.....99
11.2.8 Asbestos Removal.....99
11.3 Supporting Facilities - Cost.....100
11.4 Proposed Site Plan.....100
11.5 Pricing Sources.....100

Section 12 AREA COST FACTORS 101
12.1 Stateside Area Cost Factors.....101
12.2 Overseas Area Cost Information 105

Section 13 GUIDANCE COSTS.....106
13.1 Primary Facility Guidance Costs.....106
13.2 Supporting Facilities Guidance Cost.....106

Section 14 COST CERTIFICATION SAMPLE ESTIMATE.....122
14.1 DD Form 1391.....122
14.2 Building Budget Estimate Summary Sheet.....122
14.3 Estimate Summary Sheet.....122
14.4 Cost Estimate Backup Sheet (LANTDIV).....122
14.5 Building Square Foot Cost Development.....122
14.6 Worksheet.....122
14.7 Cost Model Questionnaire.....139

Section 15 CES STANDARD SYSTEMS LIST.....160
15.1 Interior.....160
15.2 Exterior.....162

Section 16 SUPPLEMENTAL INFORMATION.....165
16.1 Conversion Factors.....165
16.2 Blank Forms and References.....165
16.1 Acronyms and Abbreviations.....165

APPENDICES

APPENDIX F, Conversion Factors.....166
APPENDIX G, Blank Forms and References.....167
APPENDIX H, Acronyms and Abbreviations.....196

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

FIGURES

13 Sample IBOP Summary....89
14 Sample 1391 for Cost Certification Estimate....92
15 Building Budget Estimate Summary Sheet....94
16 Building SF Cost Development....96
17 Size Adjustment Chart....97
18 Projected NAVFAC Cost Index....98
19 DD Form 1391....123
20 Building Budget Estimate Summary Sheet....125
21 Estimate Summary Sheet....127
22 Cost Estimate Backup Sheet (LANTDIV)....128
23 Building SF Cost Development....138

TABLES

7 Facilities Usually Requiring Type A OMSI....83
8 Facilities Usually Requiring Type B OMSI....83
9 OMSI Cost for Preliminary Estimates....83
10 Bachelor Enlisted Quarters Area Table....88
11 Primary Facility Guidance Costs....107
12 Supporting Facilities Guidance Costs....111

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Page

FIGURES

1 Sample IBOP Summary....10
2 Project Data Sheet....13
3 Project Submission Routes....15
4 Components of Project Documentation....16
5 DD Form 1391....21
6 Building SF Cost Development....22
7 Supporting Facilities Cost Development....23
8 Size Adjustment Chart....24
9 Projected NAVFAC Cost Index....25
10 DD Form 1391....48
11 Building Square Foot Cost Development....49
12 Supporting Facilities Cost Development....51

TABLES

1 Facilities Usually Requiring Type A OMSI....4
2 Facilities Usually Requiring Type B OMSI....4
3 OMSI Cost for Preliminary Estimates....4
4 Bachelor Enlisted Quarters Area Table....9
5 Primary Facility Guidance Costs....32
6 Supporting Facilities Guidance Costs....36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 1: INTRODUCTION

1.1 Purpose. This guide is for the preparation of planning cost estimates in support of the Shore Facilities Planning System. It supplements instructions and direction provided in the instructions listed in paragraph 1.2.

1.2 Background. OPNAVINST 11010.1J establishes the Shore Facilities Planning System. NAVFACINST 11010.44E carries out the system and requires Activity submission of a planning estimate with cost backup and other data, to propose a project for the Military Construction Requirements List.

1.3 Importance. The importance of an accurate planning cost estimate cannot be over emphasized, as it could be the determining factor as to whether or not the project is included in the budget year program. Although requirements and justifications are important parts of project submittals, this publication deals only with scope and cost. Scope is included because an estimate is no better than the definition of scope that has been determined. An incomplete scope will result in an erroneously proposed project cost.

1.4 Comments or Suggestions. You are encouraged to advise the Engineering Field Division (EFD) Planning Division (Code 20) or the Cost Engineering Branch (Code 407) of errors, conflicts, or omissions detected while using this guide, as well as to suggest improvements which will help you produce higher quality planning cost estimates. Advice or comments should be forwarded to the EFD Code 407 by December 1 or June 1 to be considered and included in the updates.

Points of contact are:

DIVISION	407	20
Atlantic Division	(804) 444-9907	(804) 445-2300
Chesapeake Division	(202) 433-3315	(202) 433-3387
Northern Division	(215) 897-6156	(215) 897-6257
Pacific Division	(808) 471-8436	(808) 471-3931
Southern Division	(803) 743-0463	(803) 743-0781
Western Division	(415) 742-7760	(415) 877-7544

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 2: SCOPE CONSIDERATIONS

2.1 Introductory Paragraph. The Building Square Foot Cost Development must include separate entries for specific features of additional cost. Certain features and their cost derivation are discussed below. Other specific features may not be discussed in this section, but should be a separate item to emphasize significant cost.

2.2 Operation and Maintenance Support Information (OMSI). OMSI is a product developed during design and construction of a facility to give the activity clear comprehensive data for use in operating and maintaining new facilities as well as to assure economical, safe life cycle operation and maintenance. The principal OMSI elements requiring consideration are as follows:

a) Operation and Maintenance Technical Documentation
b) Supply Support (repair parts, fuels, lubricants, etc.)
c) Maintenance Planning
d) Maintenance and Test Equipment
e) Operating and Maintenance Indoctrination
f) Staffing and Budgeting
g) Inspection Plan
h) Training
i) Extended Special Warranties
j) Basic Data for Facilities Support Contracts/ Performance Work Statements (FSC/PWS)

2.2.1 Types of OMSI. OMSI is usually needed on any project where operating and maintenance information is called for in the construction specifications. The degree of OMSI will vary with the type of facility. For identification, projects requiring OMSI can be classified as either a Type A, Type B, or Type C. Facilities that usually require a Type A are listed in Table 1, and those requiring a Type B, in Table 2. A User Manual (operating/maintenance information usually provided on a construction project but assembled and indexed in a consolidated manual) will be provided for all three types. Complex facilities requiring operating/maintenance information above and beyond that in the User Manual should be classifed as Type A and be provided an Operation and Maintenance Manual in addition to the User Manual. Facilities requiring operating information above and beyond that in the User Manual should be classified as Type B and be provided an Operating Manual in addition to the User Manual. Rather simple facilities requiring only a User Manual should be classified as Type C.

a. Type A: Operation & Maintenance Manual plus User Manual
b. Type B: Operating Manual plus User Manual
c. Type C: User Manual

2.2.2 OMSI Estimate. In estimating the cost of OMSI for a specific project, use the best available information. If a good basis to make the estimate does not exist, Table 3 should be used for a preliminary estimate based upon a percentage of the total primary facility cost. If OMSI is greater than $50,000, it shall be a separate line item on the DD Form 1391 and Budget Estimate Summary Sheet. If OMSI is less than $50,000, it shall be part of the building cost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 1
Facilities Usually Requiring Type A OMSI

FACILITY TYPE	BASIC CATEGORY CODE
PETROLEUM, OIL & LUBRICANT (POL) FACILITIES	120
COMPUTER OPERATIONS CENTER (LARGE/COMPLEX)	143
TRAINING FACILITIES WITH COMPLEX SYSTEMS	171
AIRCRAFT MAINTENANCE SHOPS	211
MISSILE ASSEMBLY & MAINTENANCE SHOPS	212
SHIP MAINTENANCE SHOPS	213
LABORATORIES	310
CENTRAL REFRIGERATION PLANTS	431, & 826
MEDICAL FACILITIES	500
DINING FACILITIES	722
POWER PLANTS	811
HEATING PLANTS	821
INDUSTRIAL WASTE & SEWAGE TREATMENT PLANTS	831

Table 2
Facilities Usually Requiring Type B OMSI

FACILITY TYPE	BASIC CATEGORY CODE
OPERATIONAL & TRAINING FACILITIES (NOT REQUIRING TYPE A)	100
MAINTENANCE - WEAPONS	215
AMMUNITION, EXPLOSIVES & TOXICS	316
LIQUID FUEL STORAGE - BULK	411
WATER - SUPPLY, TREATMENT & STORAGE - PORTABLE	841
MISCELLANEOUS UTILITIES	890

Table 3
OMSI Cost for Preliminary Estimates
(based upon a percentage of primary facility cost)

TOTAL PRIMARY FACILITY COST	ESTIMATED OMSI COST BY TYPE		
	A	B (1)	C (2)
BELOW $5,000,000	1.00-2.00%	0.50-1.00%	0.25-0.50%
$5,000,000 to 20,000,000	0.75-1.50%	0.40-0.75%	0.20-0.40%
$20,000,000 to $50,000,000	0.50-1.00%	0.25-0.50%	0.15-0.25%
ABOVE $50,000,000	0.40-0.75%	0.20-0.40%	0.10-0.20%

NOTES:
(1) The minimum amount for a Type B should be $11,000.
(2) The minimum amount for a Type C should be $4,000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

2.3 Intrusion Detection Systems (IDS). Enter any MCON-funded requirements for Intrusion Detection Systems (IDS), including additional related costs. Generally IDS projects are based on function or location, thereby determining IDS funding. The following chart illustrates the funding type according to IDS function and location.

New Systems For:	Funding Type
New Building within U.S.	MCON
Building at Nuclear Ordnance, Arms, Ammo, and Explosives sites	NON-MCON
Other IDS including Taut Wire Sensor	NON-MCON
New Buildings Outside U.S.	NON-MCON
Base Perimeter Security System	NON-MCON

2.3.1 MCON Fundable IDS. Any of the following items and their interconnecting circuits may be considered part of an IDS:

a) Annunciation panels and cabinets;
b) Visual and audible annunciators;
c) Balanced magnetic switches (BMS);
d) Proximity (capacitance) sensors;
e) Volumetric sensors (microwave and ultrasonic);
f) Wire grids;
g) Vibration grids;
h) Infrared sensor; and
i) Power supplies integral to above items.

Facility support, such as utilities, conduit runs, equipment space, building, conventional fencing, etc., required to support IDS associated with a MCON project are properly chargeable to MCON funds and should be included in the MCON project scope. A simple system of balanced magnetic switches should be called a security system, with more complex systems called IDS.

2.3.2 Technical Support. Technical support for MCON-funded IDS is available on a reimbursable basis from NAVELEXENGCEN Charleston. This support includes guidance on scope and technical review of compiled IDS designs at appropriate steps in project development and design. NAVFAC will attempt to identify MCON projects with major IDS and request NAVELEXENGCEN Charleston prepare a Base Electronic System Engineering Plan (BESEP) for each.

2.3.3 Non-MCON Fundable IDS. The following items cannot be MCON funded as part of an IDS:

a) Closed circuit television (CCTV) cameras, monitors, and video recorders; and
b) Taut wire sensor systems.

CCTV and taut wire sensor systems, including installation of posts, footings, and integral ductwork/conduit, have been determined to be equipment and are the responsibility of Space and Naval Warfare Systems Command

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(SPAWARSYSCOM). Claimant, user, or SPAWARSYSCOM, depending on current policy, will budget for and fund non-MCON IDS requirements. These Commands must be notified of a project's non-MCON IDS requirements and your need for data on facility support requirements. This should generally result in a BESEP.

2.4 Land Acquisition. Obtain instructions from major claimant and EFD Code 024 (Real Estate).

2.5 Hyperbaric Requirements. CHESNAVFACENGCOM (FPO-1) is responsible for executing the design and procurement phases of shore based hyperbaric facilities. When the project scope includes provisions for hyperbaric facilities, you must contact CHESNAVFACENGCOM (FPO-1) to make appropriate arrangements for the design, procurement, and installation of the required hyperbaric facilities and the associated cost estimate.

2.6 Shielding Requirements.

2.6.1 Tempest/HEMP (High Altitude Electromagnetic Pulse)/EMP (Electromagnetic Pulse) Shielding. NESSEC Washington has been very effective in limiting requirements for shielding in MCON facilities. NAVFAC message 151455Z Jun 84 provides the guidance on determining the extent of RF shielding required on projects involving installation of electronic equipment. For affected projects, ensure NESSEC Washington, DC, has formally reviewed and commented on Tempest shielding requirements. If HEMP/EMP shielding is identified as a user requirement, consult with NAVFAC 04T prior to A/E scoping.

2.6.2 Coordination Required to Meet Objectives. Satisfying shielding objectives is often very difficult; it requires close coordination between the customer, the designer, and the construction contractor to establish this scope requirement. Good information transfer from designers to ROICC personnel is essential. The use of expert consultants during design and construction, and the development of both interim and final testing plans and criteria, should be evaluated and incorporated when appropriate.

2.7 Uninterruptible Power System (UPS). If the UPS is required only to support personal property (electronic equipment) installations, it may not be procured and installed with MCON funds. Instead, its procurement and installation cost must be separately budgeted by the Major Claimant/User as an integral part of the associated electronic equipment package. Please ensure that the Major Claimant/User is aware of this requirement. However, facility items required to support the UPS such as power panels, flooring, battery rooms, etc., are properly chargeable to MCON and should be included in the project scope.

2.8 Communication Requirements.

2.8.1 Telephone and Communications Installations. It is the responsibility of the designer to determine the design requirements, and design the facility's telephone system. Based on NAVCOMPT guidance, the general policy is to include only the cost of the following as required to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

support future installation of telephone and other communication systems wiring internal to a MCON facility:

a) EXTERIOR - All supporting structures (e.g., telephone poles, underground conduits, underground ductbanks, manholes, handholes, etc.).
b) INTERIOR - Empty conduit with pull wire, outlet boxes, conduit bushings, backboards, and cable trays to support future installation of telephone wiring.

2.8.2 Funding Responsibilities. Normally, the wiring, instruments, and equipment are to be funded by other than MCON regardless of whether the system is leased or Government owned. The responsibility of Telephone Management Division East (TMD East) is to assist the user in identifying non-project funds to pay for the following items to be installed as a separate contract (not part of the MCON project):

a) EXTERIOR - All cabling and switchgear
b) INTERIOR - All wiring, instruments, and equipment

2.8.3 Funding Exceptions. In certain situations, such as Medical facilities and Navy owned systems in overseas areas, the entire systems may be MCON funded where practical and justifiable. These exceptions to the general policy should be clearly identified and justified.

2.9 Built-in Retrieval Equipment Racks (Warehouses). Policy on funding specialized equipment in automated warehouses is as follows:

2.9.1 MCON Funded. If the project includes a guide wire or guide rail built into the facility, include the cost of the guide wire or rail system, vehicles which ride on the system (system captive), and the storage racks serviced by the system in the MCON project.

2.9.2 OPN Funded. If the retrieval system does not include a built-in guide wire or rail system, the retrieval vehicles and racks are to be identified as collateral equipment.

2.9.3 Warehouse Design. The design of all warehouses must be coordinated with NAVSUPSYSCOM as the Navy experts in warehouses. NAVSUPSYSCOM must formally approve the design concept prior to your achieving a 35% design. To help with the concept NAVSUPSYSCOM has developed a computer program to determine the least cost alternative for various stacking heights and retrieval systems. As the foot print and stacking height affect the project cost, and some retrieval systems are MCON funded, these decisions must be made prior to starting design. You should coordinate design with NAVSUPSYSCOM. The Headquarters point of contact is Code 04B2, Autovon, 325-0044.

2.10 Asbestos Related Work. A/E firms are finding it difficult, if not impossible, to obtain professional liability insurance for work involving asbestos, hazardous waste, and pollution abatement. The Federal Acquisition Regulation (FAR) does not require A/E firms to carry professional liability

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

insurance. NAVFACENGCOM does not have the authority to provide blanket indemnification for work involving hazardous waste. NAVFACENGCOM policy is that when we know asbestos or other hazardous waste will be encountered, or when there is a good probability of asbestos or other hazardous waste, this fact is to be noted in the Commerce Business Daily (CBD) synopsis for any affected contract. We should NOT include this warning in every CBD synopsis as a matter of routine; it should only be used where the hazards cited are known or probable. During interviews the willingness of each firm to undertake any required asbestos, hazardous waste, or pollution abatement work is to be clearly established and made a matter of record. Please continue to keep us informed of problems in this area. The Headquarters point of contact is Code 04BD, Autovon 325-0043.

2.11 Computation of Gross Area. For all gross and net area calculations use Chapter 4 of MIL-HDBK-1190, Facility Planning and Design Guide. Gross area includes the total area of all floors, including mezzanines, basements, and penthouses as determined by the effective outside dimensions of the building. One-half the area shall be included in the gross area for balconies and porches, covered raised loading platforms, covered ground level or depressed loading facilities (either depressed, ground level, or raised), covered but not enclosed passageways or walks, covered and uncovered but open stairs, and covered ramps. Excluded from the gross area: crawl spaces, exterior uncovered loading facilities (either depressed, ground level, or raised), open courtyards, roof overhangs and soffits, uncovered ramps and stoops, utility tunnels and raceways. Separate central energy plants or utility buildings serving large complexes are not included in the gross module area shown in Table 4. Separate support buildings should be programmed as a line item on DD Form 1391.

2.11.1 BEQ Area Requirements. For Bachelor Enlisted Quarters, the criteria shown in Table 4 is to be used.

2.11.2 BOQ Area Requirements. For Bachelor Officer Quarters the following criteria are to be used: Reference MIL-HDBK-1190. The following requirements shall be used to program BOQ projects:

a) Grades 02 and below: Quarters shall provide a private suite of approximately 330 square feet net area, consisting of combination of living/bedroom, bathroom, and pullman-type kitchen. The gross floor area shall approximate 475 square feet per officer.

b) Grades 03 and above: Quarters shall provide a private suite of approximately 460 square feet consisting of living room, bedroom, bathroom, and kitchen. The gross floor area shall approximate 650 square feet per officer.

2.12 International Balance of Payments (IBOP). The IBOP Summary is only included when preparing the cost estimate for projects in specific foreign areas. Information on the exempt areas is available from the EFD Project Management Office. The IBOP Summary shall be developed on an 8-1/2 by 11-inch size plain bond paper as illustrated in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 4
Bachelor Enlisted Quarters Area Table

MODULES (2 Rooms and Bath)	FLOORS (1)	AREA SF (2)	ELEVATORS (3)	SPRINKLER SYSTEM
60	3	800	---	---
72	3	785	---	---
96	4	800	F	(4)
178	6	840	F & P	YES

(1) Modules per floor must be divisible by 2, with no exceptions.
(2) Total gross module area including its share of the non-module areas.
(3) F (Freight) & P (Passenger)
(4) Provide a fire stand pipe system if sprinkler system is not required.
(5) The data in this table is from specific projects that satisfy the net area requirements of MIL-HDBK-1190. Gross area for combinations not shown must be determined or verified by the EFD, Code 401.

GRADE	ACCOMMODATIONS
E-1 thru E-4	4 Men per Module
E-5 thru E-6	2 Men per Module
E-7 thru E-9	1 Man per Module

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INTERNATIONAL BALANCE OF PAYMENTS (IBOP) IMPLICATIONS

1. Activity (Name and Location) (CAPITAL LETTERS)	Date
2. Project Title (CAPITAL LETTERS)	3. P-No.

	NORMAL PROCEDURES		PLANNED PROCEDURE	
	Construction	*Construction Total Material	Construction	*Construction Total Material
BUDGET COST	1,030,000	-	1,100,000	-
LESS RETURNS TO THE US				
a) US End Products	-	-	100,000	-
b) US Services	5,000	-	5,000	-
c) US Transportation	-	-	20,000	-
TOTAL RETURNS	5,000	0	125,000	0
FOREIGN EXCHANGE COST (FEC)	1,075,000		975,000	

This example makes the following assumptions:

1. Normal procedure; all foreign materials and contractors, only return to US is .5% SIOH.
2. Planned procedure; purchase of a pre-engineered metal building in the US at the same price as in the foreign country, shipping by a US line, .5% SIOH is returned to the US.

Returns to US include escalation and contingencies. Overhead and profit depends upon location of contractor.

SUMMARY OF IBOP DATA

*CWE is the same as total request rounded for selected procedures.

	NORMAL PROCEDURE	PLANNED PROCEDURE	PLANNED PROCEDURE EFFECT
CURRENT WORKING ESTIMATE	1,080	1,100	+ 20
FOREIGN EXCHANGE COST (FEC)	1,075	975	- 100

* Materials, supplies and equipment (including government furnished material procured abroad) acquired by the Navy from construction funds and provided to contractors for incorporation into foreign construction projects.

Figure 1
Sample IBOP Summary

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

2.12.1 IBOP Implications. Current directives require action by cognizant addresses to maintain Foreign Exchange Costs (FEC) at a minimum. IBOP IMPLICATIONS will be prepared to show the effect of construction under both NORMAL and PLANNED IBOP procedures. This effort is to permit analysis and response by NAVFAC to inquiries regarding items contributing to FEC.

2.12.2 Normal Procedures. Those construction procedures which would normally be used at a particular location if no effort were made to suppress FEC.

2.12.3 Planned Procedures. Those procedures utilized at a particular location to minimize FEC with specific support and emphasis on:

a) Adhering to pertinent executive orders, U.S. laws, status of forces agreements, and/or treaties which affect our contractual freedom abroad.

b) Maximum feasible use of U.S. contractors as allowed by paragraph 2.12.3a.

c) Maximum feasible use of U.S. materials, end products, and equipment as allowed by paragraph 2.12.3a.

d) Maximum use of U.S. flag ocean and air carriers.

e) Utilization of competent military labor where available.

f) Designs incorporating portable van-type installations and structures prefabricated in the United States.

2.12.4 Basis for Choice of Construction Procedure. Generally, planned procedures will be recommended where for every dollar increase in Current Working Estimate (CWE) from NORMAL to PLANNED there is a resulting decrease in FEC of at least two dollars, and NORMAL procedures will be recommended otherwise. An explanation for the deviation will be provided if the EFD recommends construction at the NORMAL level and cost estimates justify programming at the planned level.

Exceptions to the above criteria are allowed where country-to-country agreements specifically establish construction procedures, or project urgency is an overwhelming factor.

2.12.5 Presentation of IBOP Data on DD Form 1391. The DD Form 1391 will be prepared to show costs at the recommended level. IBOP data will be shown on the DD Form 1391 with entries asterisked to show the corresponding CWE and FEC amounts for the recommended procedure. Such IBOP entries will be shown as:

IBOP DATA:	NORMAL	PLANNED		NORMAL	PLANNED
CWE	$550,000	$590,000*	FEC	$330,000	$220,000*

*Recommended construction method

2.12.6 Requirements Regarding Returns to the United States. Other information requirements regarding returns to the United States are to be shown at the end of the Cost Estimates. This additional data is required in order that NAVFAC may provide estimates of IBOP expenditures as required by higher authority.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

2.13 Project Data Sheet. The contents of the Project Data Sheet are described in Figure 2.

2.14 Project Data Sheet Flow Chart. Figures 3 and 4 show the procedures and documentation required to enter a project in the RL, for reviewing projects selected for the FYDP, and for submitting Facility Study/DD Form 1391 documentation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMPONENT	ESTIMATE YEAR	DATE
NAVY*	1993	15 March 1988*

INSTALLATION AND LOCATION	PROJECT TITLE
U.S. NAVAL STATION, NORFOLK, VA*	ADMINISTRATIVE OFFICE**

PROGRAM ELEMENT	CATEGORY CODE	PROJECT NUMBER	CURRENT COST ($000)
*	610.10	P-000	3,400

ACF: .90	ESCALATED TO:				
FER: N.A. ITEM	1 APRIL 1993	U/M	QUANTITY	UNIT COST	COST ($000)
PRIMARY FACILITY		SF	30,000	88.80	2,664
SUPPORTING FACILITIES		LS			406***
SUBTOTALS					3,070
CONTINGENCY (5%)					154
TOTAL CONTRACT COST					3,224
SUPERVISION, INSPECTION, & OVERHEAD (5.5%)					177
TOTAL REQUEST					3,401
TOTAL REQUEST ROUNDED					3,400
EQUIPMENT FROM OTHER APPROPRIATIONS (LIST NOT AVAILABLE)					(-)

DESCRIPTION OF PROPOSED CONSTRUCTION: Permanent two-story masonry and structural frame building. A passenger elevator and an exterior uncovered steel stairway are included. Fire protection, grounding, utilities, and air conditioning are included.

REQUIREMENT: REQUIREMENT: 30,000 ADEQUATE: 0 SUBSTANDARD: 40,000
The mission of the Naval Station, Norfolk, Virginia is to maintain and operate facilities and provide services and material to support operations of the Atlantic Fleet.

PROGRAMMING DATA: ACTIVITY UIC:NXXXXX ALTERNATE HOST:NYYYYY SUP UNIT:NZZZZZ
SPEC AREA: __ INVESTMENT PROGRAM: 99 SIR: II RESOURCE SPONSOR: 04
MAJ/SUBCLAIMANT CODE: FA1/ INVESTMENT CATEGORY: 14* MOBILIZATION INDICATOR: N
ACTIVITY PRIORITY: 01 CLAIMANT PRIORITY: 12 FLEP PRIORITY: H READINESS RATING: C4

PROJECT DETAIL DATA:

CATEGORY CODE	DESCRIPTION	SCOPE	U/M	CC/MC	VALIDATION INDICATOR
610-10	ADMINISTRATIVE	30,000	SF	3B	
610-10	ADMINISTRATIVE	22,000	SF	3B	
610-20	DATA PROCESSING	8,000	SF	3B	

REQUIREMENT CERTIFICATION:
ACTIVITY _____ (name) _____ DATE: _____
MAJOR CLAIMANT _____ (name) _____ DATE: _____
NAVFACENGCOMHQ _____ (name) _____ DATE: _____

* COMPUTER GENERATED INFORMATION
** DEFAULTS TO CATEGORY CODE DIRECTORY TITLE IF NO ENTRY IS MADE
*** THE REQUIREMENT FOR FOUNDATION PILING WAS NOT KNOWN AT THIS TIME.

Figure 2
Project Data Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

LOCATION AND SITE PLAN

****

* PREPARATION NOTES:
* PROJECT DATA SHEET (PDS):
* The PDS is the initial activity submittal for a MCON project.[1]
*
* PREPARATION OF COST:
* PRIMARY FACILITY: Cost shall be prepared following the same instructions as for the preparation of the Facility Study primary estimate described in this instruction. Include the Building SF ..... Cost Development Sheets (see Figure 10).
* SUPPORTING FACILITIES: Costs are to be a percentage of the primary facility cost. Use 15% when the project is to be constructed within a developed area. Use 20% for all other locations. Provide backup for higher percentages.

****

SITING RATIONALE: Building sited outside the ammunition pier Explosive Safety Quantity Distance Arc and adjacent to another administrative building, Building 400, implementing the plan for consolidation of station administrative and data processing. All required utilities are immediately available at the site and are adequate to accommodate the additional connected load. Demolition will be required by the project.

EFD REVIEW/ANALYSIS:

REQUIRES FURTHER ACTION?	NO	YES	COMMENTS
Explosives Safety	X		
Airfield Safety	X		
Electromagnetic Radiation	X		
AICUZ Violation	X		
Change to Approved Master Plan, CIP	X		Shown in latest approved MP
Coastal Zone Management	X		
Natural Resources Plan	X		
Dredging/Filling Permits	X		
Wetland/Floodplain	X		
Hazardous Wastes on Site	X		
Cultural Resources Impact	X		
Other Site Problems (List)	X		
Utilities Support	X		
Roads, Parking		X	Minor changes to existing
Preliminary Environmental Assessment		X	Submit when project enters FYDP
Preliminary Hazards Analysis		X	If RAC is a 1 or 2
Other (List)			

EFD Validation:
Site Approved: Yes_____ No_____ Deferred_____
Project Supported by SFPS: Yes_____ No_____

(Name) Date:

1 A detailed discussion of the Project Data Sheet and the Capital Improvement Plan (CIP) is contained in NAVFACINST 11010.44E

Figure 2 (Continued)
Project Data Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

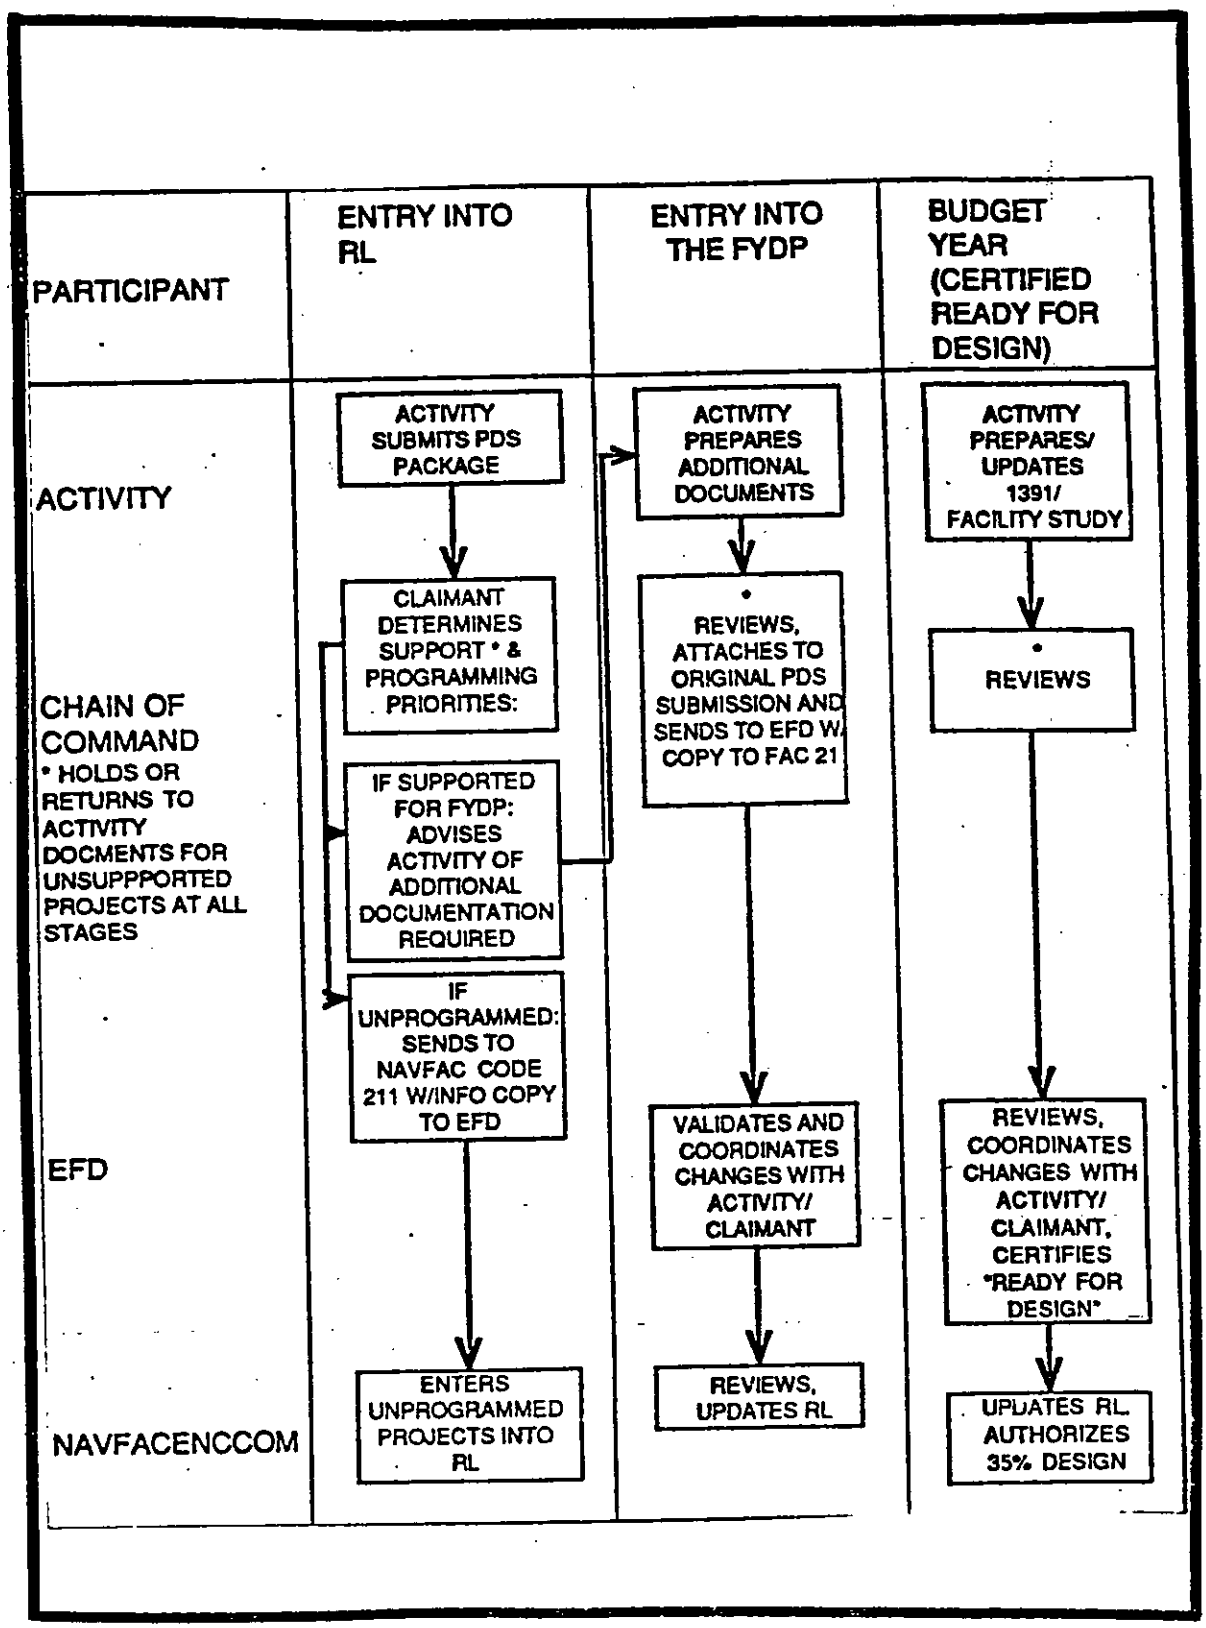


Figure 3
Project Submission Routes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

LEGEND

C: ALREADY COMPLETE: RESUBMIT ONLY IF DATA HAS CHANGED
CSMC: ALREADY COMPLETE: SUBMIT COPY TO MAJOR CLAIMANT W/PDS
E: EFD ACTION
S: SUBMIT TO EFD, COPY TO NAVFAC CODE 211
SMC: SUBMIT TO MAJOR CLAIMANT, COPY TO NAVFAC CODE 211
X: COMPLETED AT PREVIOUS STAGE: NO RESUBMISSION REQUIRED
*: MAY NOT BE REQUIRED FOR ALL PROJECTS
**: SUBMISSION REQUIRED AT THIS TIME FOR PROJECTS REQUIRING WASHINGTON-LEVEL SITE APPROVAL

DOCUMENTATION REQUIRED	ENTRY INTO RL	PDS REVIEW BY EFD FOR PROJECTS IN THE FYDP	BUDGET YEARS (CERTIFIED READY FOR DESIGN)
BFR IN SFPS	C	C	C
CURRENT EE	C	C	C
FPD	CSMC	C	C
PDS	SMC	C	C
PEA		S	C
PRELIMINARY COST ESTIMATE		S	X
RISK ASSESSMENT CODE		S	X
QUICK SIR/PVA		S*	X*
SITE APPROVAL REQUEST		S**	S
LIFE CYCLE COST ANALYSIS SUMMARY		S*	C*
ECIP COST/ENGINEERING DATA		S*	C*
POLLUTION CONTROL REPORT		S*	C*
OSH CONTROL REPORT		S*	C*
EQUIVALENCY STATEMENT		S*	C*
MEDICAL ECONOMIC ANALYSIS		S*	C*
MEDICAL SPACE PROGRAM		S*	C*
NAF SUPPLEMENTAL INFORMATION	SMC*	X*	X*
FACILITY STUDY			S
DETAILED COST ESTIMATE			S
COLLATERAL EQUIPMENT LIST			S
BESEP/EQUIPMENT STUDY			S*
1391			S
1390s (RESERVES)			S
ENVIRONMENTAL ANALYSIS			S*
PRELIMINARY HAZARDS ANALYSIS			S*
TYPE I/II ECONOMIC ANALYSIS			S*
COST CERTIFICATION/ARCHITECTURAL PROGRAMMING/2 STEP PLANNING/DESIGN			E

Figure 4
Components of Project Documentation

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 3: FACILITIES STUDY COST DEVELOPMENT

3.1 Instructions for DD Form 1391. The following instructions correspond to the circled numbers shown in Figure 5.

1. Date shall be the day submitted. Dates must be revised if a resubmittal is made.

2. Enter the five-digit category code number from NAVFAC P-72 to identify the primary facility. In cases of multi-use facilities, enter the category code which represents the largest cost of the project.

3. Block 8 - "Project Cost" shall be the same as the "TOTAL REQUEST ROUNDED" in block 9. This cost shall be escalated to 1 April of the appropriation year, except assigned foreign areas.

4. The Area Cost Factors and Foreign Exchange Rates for common locations are included in this manual.

5. The line items shown are generally suitable for most projects. They should be tailored to suit the individual project - discuss this with the EFD Cost Engineering Branch. The Cost figures in parenthesis should add to equal "PRIMARY FACILITY" cost or "SUPPORTING FACILITIES" cost.

6. Include a list of the major use areas for multi-use facilities under the primary facility. Also, include a line item entitled, "Additional Functional Features." Show the unit cost as applicable to the total size of the primary facility as shown in Figure 6.

7. Contingency will be 5% for all projects.

8. Use 5.5% SIOH for all projects unless directed otherwise.

9. Rounded cost estimate:

less than	$1,000,000	- nearest 10,000
1,000,000 -	5,000,000	- nearest 50,000
Over	5,000,000	- nearest 100,000

10. Must agree with total for all other categories of equipment on collateral equipment list other than built-in equipment as defined in paragraph 7.1. If not available, type "(LIST NOT AVAILABLE)" in place of "(NON-ADD)." Built-in equipment is MCON funded and normal built-in equipment cost is included in guidance SF cost. Enclose cost figures in parentheses.

11. If the project includes more than one structure or location, address each in a separate paragraph in block 10 and separately in block 9.

12. Draw a line between blocks 10 and 11.

13. IBOP entry is required for assigned foreign areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

14. Complete the Supporting Facilities Cost Development, as shown in Figure 7.

3.2 Instructions for Building SF Cost Development. See Figure 6.

a) Guidance Cost Priorities:

1. NAVFAC Guidance Cost, Code 051
2. SF cost obtained from historical data of comparable projects (cost must be obtained from or verified by code 407)

b) The guidance cost must be adjusted to allow for differences in size (see Figure 8), area cost factors, and escalation (see Figure 9). The area cost factors are listed in paragraphs 4.1 and 4.2.

c) The guidance cost represents a typical project, including all normal built-in equipment. Identification of built-in equipment may be obtained from the CES Standard Systems List shown in paragraph 7.1. The guidance cost must be adjusted for additional functional features which are considered to be additional cost. This adjustment is absolutely required to justify cost above guidance. Backup for the additional functional features must be attached. Examples of additional functional features are: hyperbaric requirements; Tempest/HEMP/EMP shielding; UPS support facilities; communications support facilities; retrieval equipment racks for warehouses; OMSI; very high walls; emergency power; raised floor; asbestos removal and compressed air.

d) Gross area calculations (paragraph 2.11) require certain areas to be taken at zero or one half the actual area. These excluded areas must be included in the project cost. This can be done by showing the actual cost as a "functional feature" on the "Building SF Cost Development" sheet.

e) The adjusted unit cost (u/c) for each functional feature is obtained by dividing the total cost of each feature by the total size of the proposed facility. (Include all multi-use areas.)

f) The percent change is obtained by dividing the total cost of each feature by the total adjusted historical cost of the facility. (Include all multi-use areas.)

g) The size adjustment factor is related to Figure 8.

h) The area cost factors are given in Section 4.

i) The escalation factors are given in Figure 9.

3.3 Supporting Facilities. (Refer to Figure 7.) Supporting facilities include all construction items outside the building five-foot line and all special foundation features of significant cost unique to the building. All supporting facility items should be included under one of the following major categories. Each sub-item included under these major categories shall have a separate line item entry on the Supporting Facility Cost Development Sheet. Refer to paragraph 7.2 and Section 22 for identification by system number of supporting facilities.

3.3.1 Special Foundation Features. Include special foundation requirements (e.g., engineered fill, piling, drilled piers, vibrofloatation, dewatering, etc.). (Systems 91X)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

3.3.2 Electrical Utilities. Include electrical distribution, substations, emergency power generators, fire alarms, exterior lighting, telephone distribution, etc., beyond the five-foot line. (Systems 51X, 52X)

3.3.3 Mechanical Utilities. Include those utilities outside the five-foot line covered in Divisions 2 and 15 of the specifications (e.g., gas, steam, water, sanitary, etc.). (Systems 54X through 59X)

3.3.4 Roads, Parking, and Sidewalks. Include subgrade preparation, subbase and surface courses, curb and gutters, and valley gutters. (Systems 7XX)

3.3.5 Site Improvements. Include seeding, sodding, rip-rap, landscaping, irrigation, fencing, storm drainage, and other site enhancements. Do not include normal excavation which is within the five-foot line. (Systems 8XX)

3.3.6 Demolition. Include real property inventory (building or structure), major utility, or paving demolition only. Utility, pavement, or other miscellaneous demolition associated with installation of new construction should be included with the applicable trade category (e.g., electrical demolition with Electrical Utilities, steam line demolition with Mechanical Utilities, paving demolition with Roads, Parking, and Sidewalks, etc.). Provide the total number of buildings to be demolished in paragraph 10 of DD Form 1391. (Systems 84X)

3.3.7 Contaminated Soil. Cost to remove or treat contaminated soil in areas such as old industrial sites.

3.3.8 Asbestos Removal. Discussions with a contractor specialist or Code 407 is encouraged.

3.3.9 Supporting Facilities - Cost. Each supporting facility system must be priced separately.

3.3.10 Cost Model. A completed cost model (Systems 5XX through 9XX) must be included. Refer to Section 8.

3.4 Proposed Site Plan. In order to reasonably estimate the supporting facility requirements, the proposed site should be investigated and station utility maps reviewed. It is suggested that a scaled, single line site plan be developed for the project. For most projects, this site plan can be made on an 8-1/2 by 11-inch sheet and should be attached to the estimate. The site plan should show most, if not all, of the following:

a) Existing elevations
b) Proposed building(s) and/or structure(s)
c) Finish floor elevation
d) Existing mechanical and electrical utility runs
e) New mechanical and electrical services to the facility
f) Paving
g) Demolition

3.5 Pricing Sources. Supporting Facility costs should be estimated using the following pricing sources:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

a) Supporting facility guidance cost reference provides composite in-place cost for typical systems. Refer to Table 6.

b) Systems cost obtained from recently bid local projects. This is considered a reliable source. Coordinate with the EFD Code 407 for these costs.

c) NAVFACENGCOM CES unit price file including assembly, and the composite prices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

1. COMPONENT	FY 19XX MILITARY CONSTRUCTION PROJECT DATA	2. DATE (1)
NAVY		

3. INSTALLATION AND LOCATION	4. PROJECT TITLE
(CAPITAL LETTERS)	(CAPITAL LETTERS)

5. PROGRAM ELEMENT	6. CATEGORY CODE	7. PROJECT NUMBER	8. PROJECT COST ($000)
LEAVE BLANK	(2)	P-NO	(3)

9. COST ESTIMATES

ACF: FER: (4) ITEM	ESCALATED TO: 1 APRIL 19XX	U/M	QUANTITY	UNIT COST	COST ($000)
(5) PRIMARY FACILITY (6)		SF	XXXX	XX.XX	XXXXX
Building		SF	XXXX	XX.XX	(XXXX)
Additional Functional Features		SF	XXXX	XX.XX	(XXXX)
SUPPORTING FACILITIES		LS	-	-	XXXXX
Special Foundation Features		LS	-	-	(XXX)
Electrical Utilities		LS	-	-	(XXX)
Mechanical Utilities		LS	-	-	(XXX)
Roads, Parking and Sidewalks		LS	-	-	(XXX)
Site Improvements		LS	-	-	(XXX)
Demolition		LS	-	-	(XXX)
SUBTOTAL (7)					XXXXX
CONTINGENCY (5%)					XX
TOTAL CONTRACT COST (8)					XXXXX
SUPERVISION, INSPECTION AND OVERHEAD (5.5%)					XX
TOTAL REQUEST					XXXXX
(9) TOTAL REQUEST ROUNDED					XXXXX (3)
EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS			(NON-ADD)		(XXX) (10)

10. DESCRIPTION OF PROPOSED CONSTRUCTION (11)

Summarize the proposed construction describing briefly but accurately the primary facility by functional areas, indicating major construction materials and unusual features that alter the guidance SF cost. Describe the supporting facilities features that are cost significant. In cases of a multi-use facility, enter the category code and SF area for each use. List the number of building to be demolished in this project. The final sentence shall list the air conditioning tonnage - enclose this sentence in parentheses.

11. REQUIREMENT: _____ SF ADEQUATE: _____ SF SUBSTANDARD: _____ SF (12)

PROJECT:

REQUIREMENT:

CURRENT SITUATION:

IMPACT IF NOT PROVIDED:

(Note: continue block 11 on 1391C if more space is required)

IBOP DATA: (13)	CWE	Normal (XXX)	Planned (XXX)	FEC	Normal (XXX)	Planned (XXX)

DD FORM 1 DEC 76 1391 PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED PAGE NO.

S/N 0102 LF 001 3910 ★ U.S. Government Printing Office: 1994—705-612/17914 2-1

Figure 5
DD Form 1391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BUILDING SF COST DEVELOPMENT

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

	CAT CODE	SIZE	ACF	DATE mo / yr
PROPOSED FACILITY				
GUIDANCE FACILITY				

HISTORICAL GUIDANCE SOURCE: _____

HISTORICAL GUIDANCE UNIT COST: _____

HISTORICAL UNIT COST		SIZE FACTOR		AREA COST FACTOR		ESCALATION FACTOR		ADJUSTED UNIT COST
_____	X	_____	X	_____	X	_____	=	_____

ADDITIONAL FUNCTIONAL FEATURES

FUNCTIONAL FEATURES	QTY	UNIT COST	TOTAL COST	ADJUSTED U/C	%CHANGE

ADDITIONAL FUNCTIONAL FEATURES TOTAL : _____ _____

Figure 6
Building SF Cost Development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

FACILITIES STUDY
SUPPORTING FACILITIES COST DEVELOPMENT

TITLE: _____ p#: _____ FY: _____


LOCATION: _____ DATE: _____

CES SYSTEM	PRICE SOURCE	COMPOSITE QUANTITY	COMPOSITE UNIT COST	COMPOSITE ADJUSTMENT FACTOR (1)	TOTAL COST	FORM 1391 ($000)
SPECIAL FOUNDATION FEATURES (91X)						
ELECTRICAL UTILITIES (51X - 52X)						
MECHANICAL UTILITIES (54X - 59X)						
ROADS, PARKING, SIDEWALKS (7XX)						
SITE IMPROVEMENTS (8XX)						
DEMOLITION (84X)						

NOTE: PLACE ADDITIONAL INFORMATION AND EXCESS COMPOSITE ITEMS ON BACK.
(1) COMPOSITE ADJUSTMENT FACTOR = AREA COST FACTOR X ESCALATION FACTOR

Figure 7
Supporting Facilities Cost Development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

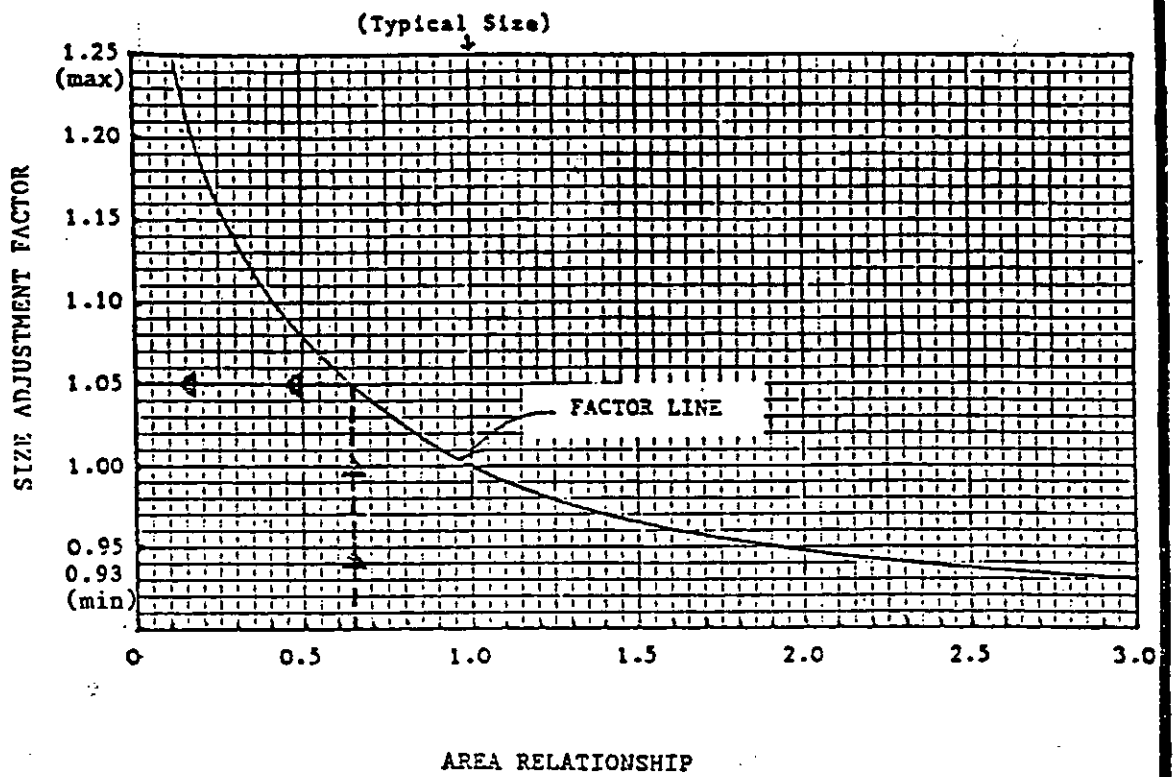

Example: The Size Adjustment factor is desired for a 16,000 SF Academic Facility.

$$\text{AREA RELATIONSHIP} = \frac{\text{PROPOSED FACILITY SIZE}}{\text{TYPICAL FACILITY SIZE}} = \frac{16{,}000}{25{,}000} = 0.64$$

Find 0.64 on the horizontal axis. Trace a vertical line to the factor curve and then trace a horizontal line to the vertical axis's Size Adjustment Factor which is 1.05.

Figure 8
Size Adjustment Chart

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PROJECTED NAVFAC COST INDEX
MONTHLY
JAN 1988

YEAR	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT	OCT.	NOV.	DEC.
1972	1011	1016	1022	1027	1039	1047	1053	1057	1067	1070	1082	1090
1973	1102	1114	1123	1135	1140	1138	1137	1144	1150	1156	1155	1158
1974	1156	1154	1155	1177	1177	1199	1233	1240	1238	1246	1239	1240
1975	1242	1265	1265	1269	1287	1307	1317	1330	1333	1351	1349	1354
1976	1362	1371	1378	1389	1398	1416	1425	1455	1467	1476	1479	1484
1977	1489	1499	1504	1506	1507	1521	1538	1553	1586	1617	1603	1606
1978	1606	1615	1618	1621	1652	1663	1696	1705	1720	1721	1732	1734
1979	1740	1740	1750	1752	1756	1807	1827	1851	1891	1899	1902	1909
1980	1897	1896	1918	1902	1891	1919	1953	1974	1981	1981	2000	2017
1981	2015	2016	2014	2064	2076	2083	2109	2118	2139	2156	2186	2184
1982	2194	2200	2195	2195	2220	2219	2233	2253	2249	2248	2260	2295
1983	2311	2348	2352	2347	2351	2388	2414	2428	2430	2416	2419	2406
1984	2402	2407	2413	2422	2419	2417	2418	2428	2430	2424	2421	2418
1985	2424	2432	2428	2427	2433	2438	2457	2447	2440	2441	2441	2433
1986	2433	2443	2445	2455	2475	2503	2499	2496	2504	2509	2509	2510
1987	2513	2508	2516	2521	2523	2526	2528	2557	2565	2568	2564	2589
1988	2597	2604	2612	2620	2627	2635	2643	2651	2659	2666	2674	2682
1989	2690	2697	2705	2712	2720	2727	2735	2743	2750	2758	2766	2773
1990	2780	2787	2794	2801	2808	2815	2822	2829	2836	2843	2850	2857
1991	2863	2869	2876	2882	2888	2895	2901	2908	2914	2921	2927	2934
1992	2940	2945	2951	2957	2963	2969	2975	2980	2986	2992	2998	3004
1993	3010	3016	3022	3028	3034	3040	3046	3052	3058	3064	3070	3076

ANNUAL MARK-UP FACTORS FOR ESCALATION
(BEYOND FY 93, USE 2.30% ESCALATION COMPOUNDED EACH YEAR)

FISCAL-YEAR	4-87	4-88	4-89	4-90	4-91	4-92	4-93	4-94	4-95
4-83	1.07	1.12	1.15	1.18	1.22	1.25	1.28	1.31	1.34
4-84	1.04	1.08	1.11	1.15	1.18	1.21	1.24	1.27	1.30
4-85	1.04	1.08	1.11	1.15	1.18	1.21	1.23	1.26	1.29
4-86	1.03	1.07	1.10	1.13	1.16	1.19	1.22	1.25	1.28
4-87	1.00	1.04	1.07	1.10	1.13	1.16	1.19	1.22	1.25
4-88	0.96	1.00	1.04	1.07	1.10	1.13	1.16	1.18	1.21
4-89	0.93	0.97	1.00	1.03	1.06	1.09	1.12	1.14	1.17
4-90	0.90	0.94	0.97	1.00	1.03	1.06	1.08	1.11	1.13
4-91	0.87	0.91	0.94	0.97	1.00	1.03	1.05	1.07	1.10
4-92	0.85	0.89	0.92	0.95	0.97	1.00	1.02	1.05	1.07
4-93	0.83	0.87	0.90	0.93	0.95	0.98	1.00	1.02	1.05

NOTE: Escalation rate change to be 2.30% after 1993.

Figure 9
Projected NAVFAC Cost Index

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 4: AREA COST FACTORS (3/88)

4.1 Stateside Area Cost Factors. The following list outlines area cost factors for various areas within the United States.

ALABAMA	.90	BEALE AFB	1.19	ROCK MOUNTAIN ARS	.97
BIRMINGHAM	.92	BRIDGEFORT NWTC	1.24	CONNECTICUT	1.13
MOBILE	1.00	CASTLE AFB	1.08	BRIDGEPORT	1.12
MONTGOMERY	.79	CENTERVILLE BCH	1.18	HARTFORD	1.10
ANNISTON AD	.88	CAMP PENDLETON	1.12	NEW LONDON	1.17
FORT RUCKER	.85	DESERT AREA	1.25	NEW LONDON AREA	1.17
FORT MCCLELLAN	.87	EDWARDS AFB	1.23	STRATFORD ENGR P	1.12
MAXWELL AFB	.79	EL CENTRO	1.19	DELAWARE	.99
MOBILE	.91	FT HUNT LIGGETT	1.34	DOVER	.97
PHOSPHATE DEV WKS	.85	FORT IRWIN	1.36	LEWES	.97
REDSTONE ARS	.82	FORT ORD	1.25	MILFORD	1.02
ALABAMA AAP	.83	GEORGE AFB	1.20	DOVER AFB	.97
ALASKA	2.46	LEMOORE NAS	1.14	LEWES NF	.97
ANCHORAGE	1.79	LOS ANGELES AREA	1.19	FLORIDA	.93
ADAK	3.53	MARCH AFB	1.22	MIAMI	.96
FAIRBANKS	2.06	MATHER AFB	1.15	PANAMA CITY	.87
ADAK (NAVY)	3.53	MCCLELLAN AFB	1.15	TAMPA	.97
ALEUTIAN	3.48	MONTEREY AREA	1.25	CAPE CANAVERAL	.91
CLEAR AFB	2.78	NORTON AFB	1.16	CAPE KENNEDY	.91
EIELSON AFB	2.06	OAKLAND AB	1.29	EGLIN AFB	.82
ELMENDORF AFB	1.79	PORT HUENEME AREA	1.18	HOMESTEAD AFB	.96
FORT GREELY	2.66	PRESIDIO MONTEREY	1.45	HOMESTEAD	.96
FT RICHARDSON	1.79	PRESIDIO SAN FRAN	1.46	JACKSONVILLE AREA	.87
FORT WAINWRIGHT	2.06	RIVER BANK AAF	1.07	KEY WEST, AFB	1.05
GALENA	3.35	SACRAMENTO AD	1.13	MCDILL AFB	.96
KODIAK	2.85	SAN CLEMENTE IS	1.46	ORLANDO	.84
ARIZONA	1.00	SAN DIEGO AREA	1.21	PENSACOLA AREA	.82
FLAGSTAFF	1.03	SAN FRAN AREA	1.21	TYNDALL AREA	.87
PHOENIX	.98	SAN NICOLAS ISL	2.20	GEORGIA	.84
TUCSON	1.00	SHARPE AD	1.05	ALBANY	1.00
FORT HUACHUCA	1.13	SIERRA AD	1.34	ATLANTA	.86
NAVAJO AD	1.03	STOCKTON	1.07	MACON	.81
YUMA PG	1.19	TRAVIS AFB	1.22	ALBANY	.85
YUMA	1.19	VANDENBURG AFB	1.27	ATHENS	.89
ARKANSAS	.91	COLORADO	.97	ATLANTA, MARIETTA	.87
PINEBLUFF	.90	COLORADO SPRINGS	.95	FORT BENNING	.80
LITTLE ROCK	.87	DENVER	.97	FORT GILLEM	.86
FORT SMITH	.96	PUEBLO	1.00	FORT GORDON	.92
FORT CHAFFEE	.96	AIR FORCE ACADEMY	1.01	FORT MCPHERSON	.81
PINEBLUFF ARS	.90	CHEYENNE MOUNTAIN	1.07	FORT STEWART	.82
CALIFORNIA	1.20	FALCON AFB	1.01	KINGS BAY	.98
LOS ANGELES	1.19	FITZSIMMONS AMC	.99	WARNER ROBBIN	.85
SAN DIEGO	1.22	FORT CARSON	1.01	DOVER AFB	.82
SAN FRANCISCO	1.19	PETERSON AFB	1.01	HAWAII	1.32
29 PALMS	1.32	PUEBLO AD	.98	HAWAII	1.33

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(3/88)

HONOLULU	1.39
MAUI	1.25
ALIAMANU	1.39
BARB PT. NAS	1.44
BARKING SAND	1.80
EWA BEACH	1.44
FORD ISLAND	1.53
FORT DERUSSY	1.39
FORT SHAFTER	1.39
HELEMANO	1.49
HICKAM AFB	1.39
KANEOHE MCAS	1.44
LUALUALEI	1.39
MOANALOA	1.39
PEARL CITY	1.39
PEARL HARBOR	1.39
PHAKULOA	1.35
SCHOFIELD BRKS	1.39
TRIPLER AMC	1.39
WHEELER	1.44
IDAHO	1.06
BOISE	1.03
IDAHO FALLS	1.04
MTN HOME	1.11
MTN HOME AFB	1.11
ILLINOIS	1.01
BELLVILLE	1.00
CHICAGO	1.06
ROCK ISLAND	.97
CHANUTE AFB	1.14
CHICAGO AREA	1.06
FORT SHERIDAN	1.07
ROCK ISLAND ARS	1.00
SAVANNAH AD	1.04
SCOTT AFB	1.06
INDIANA	1.02
INDIANAPOLIS	1.02
LOGANSPORT	1.05
MADISON	.98
CRANE AAP	1.12
CRANE	1.12
FT BEN HARRISON	1.09
GRISSOM AFB	1.12
INDIANA AAP	1.00
JEFFERSON PG	.98
NEWPORT AAP	1.03
IOWA	1.01
BURLINGTON	1.04
CEDAR RAPIDS	.99
DES MOINES	.99
IOWA AAP	1.06
KANSAS	.92
MANHATTAN	.94
TOPEKA	.90
WICHITA	.91
FORT LEAVENWORTH	.99
FORT RILEY	.89
KANSAS AAP	.95
SUNFLOWER AAP	.96
MCCONNELL AFB	.91
KENTUCKY	.94
BOWLING GREEN	.93
LEXINGTON	.95
LOUISVILLE	.95
FORT CAMPBELL	.98
FORT KNOX	1.03
LEX/BLUEGRASS AD	1.02
LOUISVILLE NAS	.95
LOUISIANA	.89
ALEXANDRIA	.84
NEW ORLEANS	.94
SHREVEPORT	.88
BARKSDALE AFB	.88
ENGLAND AFB	.84
FORT POLK	.96
LAKE CHARLES	.96
LOUISIANA AAP	.88
GULF OUTPT NEW ORL	.94
NEW ORLEANS AB	.94
NEW ORLEANS AREA	.94
MAINE	.98
BANGOR	.88
CARIBOU	1.12
PORTLAND	.93
BRUNSWICK	1.12
CUTLER	.96
LORING AFB	1.11
PROSPECT HARBOR	.45
WINTER HARBOR	.95
MARYLAND	.94
BALTIMORE	.92
FREDERICK	.95
LEXINGTON PARK	.96
ABERDEEN PG	.91
ANDREWS AFB	1.03
ANNAPOLIS	1.03
FORT DETRICK	.95
FORT HOLABIRD	.92
FORT MEADE	.92
FORT RITCHIE	.95
HARRY DIAMOND LAB	.97
PATUXENT RIV AR	1.03
MASSACHUSETTS	1.10
BOSTON	1.08
FITCHBURG	1.11
SPRINGFIELD	1.11
ARMY MATL & MECH	1.15
BOSTON (NAVY)	1.19
FORT DEVENS	1.18
HANSCOMB AFB	1.15
NATICK	1.18
SOUTH WEYMOUTH	1.24
MICHIGAN	1.05
BAY CITY	1.02
DETROIT	1.07
MARQUETTE	1.06
DETROIT ARS	1.07
DETROIT AREA	1.07
REPUBLIC ELFCOM	1.12
SAWYER AFB	1.06
WURTSMITH AFB	1.03
MINNESOTA	1.13
DULUTH	1.12
MINNEAPOLIS	1.15
ST. CLOUD	1.12
ROSEMONT	1.19
TWIN CITY AAP	1.11
MISSISSIPPI	.82
BILOXI	.85
COLUMBUS	.82
JACKSON	.80
COLUMBUS AFB	.82
GULF PORT AREA	.85
KEESLER	.86
MERIDIAN	.85
MISSISSIPPI AAP	.85
PASCAGOULA	.84
MISSOURI	.93
KANSAS CITY	.94
ST. LOUIS	.98
ROLLA	.87
FT LEONARD WOOD	.92
LAKE CITY AAP	.94
ST. LOUIS AAP	.93
WHITEMAN AFB	1.04
MONTANA	1.15
BILLINGS	1.18
BUTTE	1.21
GREAT FALLS	1.19
MALMSTROM AFB	1.19
NEBRASKA	1.03
GRAND ISLAND	1.01
LINCOLN	1.03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

OMAHA	1.05
CORNHUSKER AAP	.82
OFFUTT AFB	1.05
NEVADA	1.17
HAWTHORNE	1.27
LAS VEGAS	1.09
RENO	1.15
FALLON	1.34
HAWTHORNE AAP	1.20
NELLIS AFB	1.09
NEW HAMPSHIRE	1.06
CONCORD	1.07
NASHUA	1.04
PORTSMOUTH	1.08
PORTSMOUTH AREA	1.10
NEW JERSEY	1.10
NEWARK	1.10
RED BANK	1.11
TRENTON	1.08
BAYONNE MOT	1.12
EARLE	1.11
FORT DIX	1.00
FORT MONMOUTH	1.07
LAKEHURST	1.07
MCGUIRE AFS	1.10
PICATINNY ARS	1.18
TRENTON AREA	1.08
NEW MEXICO	1.01
ALAMAGORDO	1.00
ALBUQUERQUE	1.00
GALLUP	1.02
CANNON AFB	.97
FORT WINGATE	1.02
HOLLOMAN AFB	1.08
KIRTLAND AFB	1.00
WHIT SAND MIL RAN	1.09
NEW YORK	1.14
ALBANY	1.07
NEW YORK CITY	1.27
SYRACUSE	1.08
BROOKLYN	1.27
FORT DRUM	1.16
GARDEN CITY	1.29
GRIFFISS AFB	1.06
PLATTSBURG AFB	1.12
SENECA	1.11
STATEN ISLAND	1.40
USMA	1.14
WATERVLIET ARS	1.07
NORTH CAROLINA	.85
FAYETTEVILLE	.84
GREENSBORO	.88
WILMINGTON	.83
CAMP LEJEUNE AREA	.92
CHERRY POINT	.92
FORT BRAGG	.87
POPE AFB	.87
SEYMOUR AFB	.78
SUNNY POINT MT	.89
NORTH DAKOTA	.98
BISMARCK	.96
GRAND FORKS	.95
MINOT AFB	1.04
OHIO	1.01
COLUMBUS	.97
DAYTON	1.03
YOUNGSTOWN	1.02
CLEVELAND	1.10
RAVENNA AAP	1.05
WRGT PATTERSON AFB	1.03
OKLAHOMA	.89
LAWTON	.92
MCALESTER	.87
OKLAHOMA CITY	.88
ALTUS AFB	.99
FORT SILL	.92
TINKER AFB	.87
OREGON	1.02
PENDLETON	1.09
PORTLAND	.99
SALEM	.97
ASTORIA	1.13
CHARLESTON	1.09
COOS HEAD	1.06
UMATILLA AD	1.15
PENNSYLVANIA	.99
HARRISBURG	.88
PHILADELPHIA	1.08
PITTSBURG	1.01
CARLISLE BRKS	.88
INDIANTOWN GAP MIS	.94
LETTERKENNY AD	1.01
MECHANICSBURG AREA	.88
NEW CUMBERLAND	.88
PHILADELPHIA AR	1.08
SCRANTON AAP	1.02
TOBYHANNA AD	1.09
WARMINSTER AREA	1.02
RHODE ISLAND	1.11
BRISTOL	1.11
NEWPORT	1.16
PROVIDENCE	1.07
DAVISVILLE	1.13
NEWPORT AREA	1.19
SOUTH CAROLINA	.85
CHARLESTON	.89
COLUMBIA	.80
MYRTLE BEACH	.87
BEAUFORT	.93
CHARLESTON AREA	.91
CHARLESTON AFB	.89
FORT JACKSON	.80
SHAW AFB	.78
SOUTH DAKOTA	.99
ABERDEEN	.86
SIOUX FALLS	1.00
RAPID CITY	1.02
ELLSWORTH AFB	1.03
TENNESSEE	.87
CHATTANOOGA	.85
KINGSPORT	.81
MEMPHIS	.94
ARNOLD AFB	.92
HOLSTON AAP	.81
MEMPHIS AREA	.96
MILAN AAP	.96
VOLUNTEER AAP	.90
TEXAS	.86
SAN ANGELO	.79
SAN ANTONIO	.88
FORT WORTH	.91
BERGSTROM AFB	.87
BROOKS AFB	.88
CAMP BULLIS	.73
CARSWELL AFB	.91
CHASE FIELD, BVLE	.93
CORPUS CHRISTI AD	.88
CORPUS CHRISTI	.88
DALLAS	.93
DYESS AFB	.96
FORT BLISS	.96
FORT HOOD	.84
FORT SAM HOUSTON	.88
GALVESTON	.88
GOODFELLOW AFB	.79
INGLESIDE	.89
KELLY AFB	.88
KINGSVILLE	.95
LACKLAND AFB	.88
LAUGHLIN AFB	.90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(3/88)

LAUGHLIN AFB	.90
LONESTAR AAP	.88
LONGHORN AAP	.82
RANDOLPH AFB	.88
RED RIVER AD	.88
REESE AFB	.84
SHEPPARD AFB	.99
UTAH	1.02
OGDEN	.99
SALT LAKE CITY	1.00
TOOELE	1.06
DUGWAY PG	1.15
FORT DOUGLAS	1.00
HILL AFB	1.03
TOOELE AD	1.06
VERMONT	.95
BURLINGTON	.99
MONTPELIER	.90
RUTLAND	.96
VIRGINIA	.92
NORFOLK	.90
RADFORD	.92
RICHMOND	.93
ARLINGTON HS	1.04
ARLINGTON	1.04
CAMERON STA	1.05
DAHLGREN	1.02
FORT BELVOIR	1.05
FORT EUSTIS	.93
FORT HILL	.96
FORT LEE	.90
FORT MONROE	.92
FORT MYER	.97
FORT PICKETT	.97
FORT STORY	.92
NORFOLK AREA	.92
QUANTICO	.96
RADFORD AAP	.96
VINT HILL FARMS	.96
WASHINGTON	1.15
SPOKANE	1.14
TACOMA	1.10
YAKIMA	1.21
EVERETT	1.19
FAIRCHILD AFB	1.19
FORT LEWIS	1.10
INDIAN ISLAND	.99
JIM CREEK	1.20
MCCHORD AFB	1.26
PACIFIC BEACH	1.10
SEATTLE AREA	1.14
WHIDBEY ISLAND	1.16
YAKIMA FC	1.27
WEST VIRGINIA	.95
BLUEFIELD	.89
CLARKSBURG	.99
CHARLESTON	.99
SUGAR GROVE	1.29
WISCONSIN	1.04
LACROSSE	1.06
MADISON	1.00
MILWAUKEE	1.06
BADGER AAP	1.00
CLAM LAKE	1.15
FORT MCCOY	1.17
WYOMING	1.04
CASPER	1.00
CHEYENNE	1.04
LARAMIE	1.08
F.E. WARREN AFB	1.04
WASHINGTON, DC	1.04
FORT MCNAIR	1.05
WALTER REED AMC	1.05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

4.2 Overseas Area Cost Information. (3/88) The following list outlines area cost information for various areas outside of the United States.

LOCATION	ACF/FER	NOTES
ANTIGUA	1.73/2.78	
ARGENTIA	1.10/1.35	
AUSTRALIA	1.46/1.43	
DARWIN	1.80	
PERTH	1.33	
SYDNEY	1.24	
AZORES	1.14/150.50	2
AZORES	1.14	
BAHAMAS	2.51/1.09	2
ANDROS IS	2.51	
BELGIUM	1.31/42.77	
BRUSSELS	1.31	
BELIZE	1.48/3.33	
MIDDLESEX	1.48	
BERMUDA	1.61/1.00	2
CANADA	1.30/1.29	
ST JOHN'S	1.56	
TORONTO	1.02	
VANCOUVER	1.32	
CANAL ZONE	1.15	2
CRETE	1.37/133.30	
CRETE	1.37	
CUBA	1.61	2
GUANTANAMO	1.61	2
DIEGO GARCIA	2.38/	
DIEGO GARCIA	2.38	
EGYPT	1.52/2.50	
CAIRO	1.52	
GREECE	1.03/139.90	
ATHENS	.93	
TRIAKALA	1.12	
GREENLAND	2.52/6.34	
GODTHAAB	2.52	
GUAM	2.03	
AGANA	2.03	
HONDURAS	1.08/2.78	
PUERTO CORTES	1.07	
TEGUCIGALPA	1.08	
ICELAND	4.01/42.25	1
REYKAVIK	4.01	1
ISRAEL	1.32/1.573	
TEL AVIV	1.32	
ITALY	1.15/1423	1
NAPLES	1.15	1
SICILY	1.15	1

LOCATION	ACF/FER	NOTES
JAPAN	1.58/163.10	
MISAWA	1.49	
OKINAWA	1.68	
TOKYO	1.56	
JOHNSTON ATOLL	2.10/	
KENYA	1.08	2
KOREA	.81/870.00	
SEOUL	.81	
KWAJALEIN	2.43	
INNER IS	2.19	
KWAJALEIN	2.43	
OUTER IS	2.67	
MIDWAY ISLAND	2.31	
MOROCCO	1.68/10.53	
CASABLANCA	1.50	
NETHERLANDS	1.29/2.33	
OSS	1.20	
NEW ZEALAND	2.14/1.50	
WELLINGTON	2.14	
OMAN	1.89/.41	
RUWI	1.89	
PANAMA	1.15	
PANAMA CITY	1.15	
PHILLIPINES	1.23/21.10	
MANILA	1.23	
PUERTO RICO	1.16	2
ROOSEVELT ROADS	1.10	2
SAN JUAN	1.10	2
SOMALIA	1.20/140.00	1 2
SPAIN	.80/137.60	
MADRID	.80/	
TURKEY	1.00/743.50	
ERZURUM	1.88	
ISTANBUL	1.55	
UNITED KINGDOM	1.27/.70	1
BIRMINGHAM	1.26	1
LONDON	1.28	1
GLASGOW, SCOT	1.28	1
WEST GERMANY	1.18/2.06	
FRANKFURT	1.18	
GRAFENWOEHR	1.18	
KAISERSLAUTERN	1.18	
MUNICH	1.18	
WEST INDIES	1.46/2.78	
GRENADA	1.46	

NOTES: 1. Escalate project costs to the one-third time point of construction.
2. Allow for Defense Base Act Insurance Costs.
3. International Balance of Payments (IBOP) Summary Sheet is required.
ACF: Area Cost Factor FER: Foreign Exchange Rate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 5: GUIDANCE COSTS

5.1 Primary Facility Guidance Costs. Table 5 gives the current guidance costs for various facilities identified by category code. The costs have been adjusted for an ACF of 1.00, and the time has been adjusted for FY 90 and FY 91.

5.2 Supporting Facilities Guidance Cost. Table 6 gives the current total composite contract cost for various supporting facilities elements. The cost has been adjusted for an ACF of 1.00, and the time has been adjusted for FY 90 and FY 91.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 5

Primary Facility Guidance Costs

CODE 051 FY90 & FY91 GUIDANCE COST (ACF = 1.00) AS OF 13 JULY 1987 051AB/SJA, NAVFACENGCOM

ALL UNIT COSTS INCLUDE BUILT IN EQUIPMENT NORMAL TO THE FACILITY
UNIT COSTS INCLUDE CQM & PCAS EXCEPT HIGH TECH AND HIGH RISK FACILITIES

CONFIDENCE FACTOR
1. BASED ON 4 OR MORE BID RESULTS IN THE LAST 12 MONTHS OR 8 OR MORE BIDS IN THE LAST 24 MONTHS
2. BASED ON 4 TO 7 BID RESULTS IN THE LAST 24 MONTHS
3. BASED ON 3 OR MORE BID RESULTS IN THE LAST 36 MONTHS
4. BASED ON FEWER THAN 3 BIDS IN THE LAST 36 MONTHS

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS
110.10-113	513A	AIRFIELD PAVEMENT	65000 SY	2	37	38	9"-11" PCC, 6" SOIL CEMENT BASE, 6" BASE COURSE COMPACTED SUBGRADE 7 BIDS
131.15	512A	COMMUNICATIONS CENTER	6000 SF	4	235	241	1 BID
131.40	512A	TELEPHONE EXCHANGE	6000 SF	4	146	150	2 BIDS
131.45	512A	TERMINAL EQUIP BLDG	70000 SF	4	99	101	1 BID
133.72	512A	RADAR AIR TRAF CTL CTR	6500 SF	4	141	144	2 BIDS
131.55	512A	ANTENNA ARRAY BLDG	15000 SF	4	122	125	2 BIDS ADDITION WORK
137.10	512A	METEOROLOGICAL BLDG	37000 SF	4	98	100	2 BIDS
141.20/25	512D	ACFT FIRE/RESCUE/STRUC/STATION	8000 SF	4	96	98	2 BIDS
141.70	512D	CONTROL TOWER	3000 SF	4	196	201	1 BID
143.15	512D	RANGE OF CENTER	13000 SF	4	185	190	3 BIDS ADDITION WORK
143.20	512D	ORDNANCE OPERATION BUILDING	13000 SF	4	79	81	4 BIDS
143.25	512D	UDT BLDG	56000 SF	4	85	87	1 BID
143.40	512D	COMPUTER PROGRAMMING OP CTR	21000 SF	4	90	92	2 BIDS
143.45	512D	ARMORY	10000 SF	4	87	89	4 BIDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 5 (Continued)

Primary Facility Guidance Costs (13 July 1987)

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS	
151.20	511A	BERTHING PIER	14500 SY	3	873	900	5 BIDS	NO UTILITIES
151.71	511A	DEGUASSING PIER	3500 SY	4	669	685	1 BID	
163.20	511A	MOORING PLATFORM	4000 SY	4	1575	1614	1 BID	
171.10	512C	ACADEMIC INSTRUCTION BLDG	30000 SF	4	69	71	NO BIDS	
171.20	512C	APPLIED INSTRUCTION BLDG	25000 SF	1	94	96	17 BIDS	
171.35	512C	OP TRAINER FAC (NON AIRCRAFT)	22000 SF	3	95	97	6 BIDS	
171.35	512C	OP TRAINER FAC (AIRCRAFT)	28000 SF	3	93	95	7 BIDS	
171.60	512C	RECRUIT PROCESSING BUILDING	80000 SF	4	85	87	3 BIDS	
211.05	513B	MAINT HANGAR (1 MODULE, TYPE I)	38000 SF	2	79	81	11 BIDS	
211.08	513B	AIR FRAMES SHOP (NON NADEP)	23000 SF	4	131	134	2 BIDS	ADDITION WORK
211.21	513B	ENGINE MAINT SHOP (NON NADEP)	34000 SF	3	62	64	3 BIDS	
211.45	513C	AVIONICS SHOP (NON NADEP)	23000 SF	3	81	83	3 BIDS	
211.54	513C	AVIATION ARMANENT SHOP (NON NADEP)	16000 SF	4	67	69	1 BID	
211.70	513C	MANUFACTURE & REPAIR SHOP (NADEP)	81000 SF	4	62	64	1 BID	
211.73	513C	METAL TREATMENT SHOP (PLATING) (NADEP)	81000 SF	4	61	63	2 BIDS	STRUCTURE ONLY
211.75	513C	PARACHUTE/SURV EQUIP SHOP (NON NADEP)	8000 SF	4	78	80	2 BIDS	
211.93	513C	ENGINEERING LAB (NADEP)	16000 SF	4	136	139	1 BID	
211.94	513C	AIRCRAFT POWER CHECK FAC (NADEP)	9000 SF	4	430	441	1 BID	
213.30	511C	SHORE INTER-MAINT FAC (SIMA)	77000 SF	3	84	86	5 BIDS	
213.55	511C	PIPEFITTING SHOP (ASBESTOS HANDLING)	78000 SF	4	--	--	2 BIDS	
213.60	511C	PAINT & BLASTING SHOP	9000 SF	4	117	120	2 BIDS	
213.70	511C	SHIP SERVICES SUPPORT BLDG.	7000 SF	4	94	96	3 BIDS	
213.75	511C	AMPHIBIAN VEHICLE MAINT. SHOP	55000 SF	4	88	90	1 BID	
214.10	511C	COMBAT VEHICLE MAINT SHOP	20000 SF	-	80	82	1 BID	
214.20	511C	AUTOMOTIVE-VEHICLE MAINT SHOP	30000 SF	4	75	77	3 BIDS	
214.51	511C	AUTOMOTIVE ORGAN. SHOP (MARCORPS)	30000 SF	2	67	69	9 BIDS	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 5 (Continued)

Primary Facility Guidance Costs (13 July 1987)

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS
214.53	511C	FIELD-MAINT SHOP-TANK/AUTO (MARCORPS)	20000 SF	4	89	91	2 BIDS
215.30	511D	HEAVY GUN SHOP	25000 SF	4	108	111	1 BID W/O EQUIP
216.40	511D	TORPEDO SHOP	69000 SF	4	124	127	3 BIDS W/O EQUIP ADDITION WO
217.10	511D	ELEC/COMM MAINT. SHOP	27000 SF	3	84	86	4 BIDS
218.45	511D	INSTRUMENT-CALIB SHOP	12000 SF	4	68	70	1 BID
218.60	511D	AIRCRAFT GROUND SUB EQUIP SHOP	32000 SF	3	76	78	3 BIDS
219.10	511D	PUBLIC-WORKS SHOP	31000 SF	3	58	59	4 BIDS
310.23	512B	COMBINED RESEARCH LAB	60000 SF	4	--	--	1 BID
310.33	512B	COMPUTATION AND ANALYSIS LAB	28000 SF	4	--	--	2 BIDS
311.25	512B	AIRCRAFT SYS INTEGRATION LAB	26500 SF	4	--	--	1 BID
NOTE: Contact EFD for guidance cost for unique category codes or category code with no cost given.							
313.10	512B	SHIP & MARINE LAB	20000 SF	4	--	--	1 BID
315.20	512B	UNDERWATER WEAPON SYS LAB	100000 SF	4	--	--	4 BIDS
315.30	512B	WEAPONS SYS INTEGRATION LAB	51000 SF	4	--	--	2 BIDS
316.10	512B	AMMO, EXPLOSIVES TOXICS LAB	6000 SF	4	--	--	1 BID
317.20	512B	ELECTRICAL/ELECTRONIC SYS LAB	60000 SF	4	--	--	1 BID
317.25	512B	ELEC/COMM SYS INTEGRATION LAB	110000 SF	4	--	--	5 BIDS
318.10	512B	PROPULSION SYSEMS LAB	13000 SF	4	--	--	1 BID
421.22	513D	HIGH EXPLOSIVE MAGAZINE	3000 SF	2	133	136	4 BIDS
421.72	513D	MISSILE MAGAZINE (25' DOORS)	10000 SF	4	152	156	
421.72	513D	MISSILE MAGAZINE (16' DOORS)	10000 SF	4	140	143	2 BIDS
431.10	513D	COLD STORAGE WAREHOUSE (26' & OVER SH)	8000 SF	4	115	118	3 BIDS NO RACK & RET
431.10	513D	COLD STOR. WAREHOUSE (12'-24' SH)	6000 SF	4	76	78	2 BIDS NO RACK & RET
441.10-12	513D	GENERAL WAREHOUSE (12'-24' SH)	40000 SF	2	38	39	2 BIDS NO RACK & RET
441.10-12	513D	GENERAL WAREHOUSE (26' AND OVER)	60000 SF	4	49	50	3 BIDS NO RACK & RET
441.13	513D	SECURITY WAREHOUSE	90000 SF	4	49	50	1 BID (LOW BID)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 5 (Continued)

Primary Facility Guidance Costs (13 July 1987)

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS
441.30	513D	HAZARD/FLAMMABLE STOREHOUSE (12'-24')	18000 SF	3	88	90	5 BIDS NO RACK & RET
441.71	513D	INTEGRATED LOGISTICS OVERHAUL & OUT BLD	10000 SF	4	88	90	3 BIDS
610.10	513A	ADMIN OFFICE (INCL HQS)	25000 SF	1	80	82	9 BIDS
610.10	513A	PASS OFFICE	6000 SF	3	93	95	4 BIDS
610.20	513A	DATA PROCESSING CENTER	21000 SF	2	108	111	6 BIDS
721.11	511B	BEQ	100000 SF	1	70	72	57 BIDS
721.11	511B	BEQ-HIGH RISE	75400 SF	2	72	74	4 BIDS/ INCL FIRE PROT ELEVATOR
721.14	511B	BEQ A SCHOOL	108800 SF	4	90	92	3 BIDS
722.10	511B	ENLISTED DINING FACILITY	16000 SF	2	140	143	5 BIDS
724.11-12	511B	BOQ	44000 SF	2	70	72	5 BIDS
730.10	513E	FIRE STATION (COMMUNITY)	3500 SF	3	97	99	4 BIDS
730.83	513E	CHAPEL CENTER	15000 SF	3	90	92	DIRECT U/C INCL R.E.
740.25	513E	FAMILY SERVICE CENTER	5000 SF	1	79	81	DIRECTED U/C
740.43	513E	GYMNASIUM	20000 SF	3	88	90	5 BIDS
740.74	513E	CHILD CARE CENTERS	8000 SF	1	79	81	DIRECTED U/C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6

Supporting Facilities Guidance Cost (1 July 1987)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
511, 512, & 516 ELECTRICAL DIST.				
VP-A	Note: Normal duct size is 4". 35KV circuit run 5" conduit			
VP-D	Note: For quantities less than 200 LF add 20% less than 100 LF add 50%			
VP-H	4-1/C #2 THW str al. w/1-1/C#8 CU ground secondary w/termination	LF	7.09	7.30
VP-J	4-1/C #1/0 THW str al. w/1-1/C#6 CU ground secondary w/termination	LF	9.25	9.52
VP-K	4-1/C #2/0 THW str al. w/1-1/C#4 CU ground secondary w/termination	LF	11.84	12.21
VP-M	4-1/C #4/0 THW str al. w/1-1/C#2 CU ground secondary w/termination	LF	16.33	16.82
VP-N	4-1/C 250 MCM THW str al. w/1-1/C#2 CU ground secondary w/termination	LF	17.25	17.77
VP-R	4-1/C 500 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination	LF	24.34	25.07
VP-U	4-1/C 750 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination	LF	29.57	30.46
WI-H	4-1/C #2 CU USE wire 600V w/1-1/C#8 CU ground secondary w/termination	LF	11.84	12.19
WI-J	4-1/C #1/0 CU USE wire 600V w/1-1/C#6 CU ground secondary w/termination	LF	16.03	16.51
WI-K	4-1/C #2/0 CU USE wire 600V w/1-1/C#4 CU ground secondary w/termination	LF	19.54	20.12
WI-M	4-1/C #4/0 CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination	LF	28.34	29.19
WI-N	4-1/C 250 MCM CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination	LF	33.89	34.90
WI-R	4-1/C 500 MCM CU USE wire 600V w/1-1/C#1/0 CU grd. secondary w/termination	LF	52.37	53.93
WJ-F	3-1/C #4 AWG CU XLP 5KV shielded cable primary w/o termination	LF	8.62	8.89
WJ-H	3-1/C #2 AWG CU XLP 5KV shielded cable primary w/o termination	LF	10.38	10.69
WJ-J	3-1/C #1/0 AWG CU XLP 5KV shielded cable primary w/o termination	LF	12.94	13.33
WJ-K	3-1/C #2/0 AWG CU XLP 5KV shielded cable primary w/o termination	LF	16.02	16.51
WJ-M	3-1/C #4/0 AWG CU XLP 5KV shielded cable primary w/o termination	LF	20.63	21.66
WJ-N	3-1/C 250 MCM AWG CU XLP 5KV shielded cable primary w/o termination	LF	23.10	23.80
WJ-R	3-1/C 500 MCM AWG CU XLP 5KV shielded cable primary w/o termination	LF	36.96	38.07
WK-H	3-1/C #2 AWG CU XLP 15KV shielded cable primary w/o termination	LF	12.94	13.33
WK-I	3-1/C #1 AWG CU XLP 15KV shielded cable primary w/o termination	LF	14.17	14.60
WK-J	3-1/C #1/0 AWG CU XLP 15KV shielded cable primary w/o termination	LF	16.02	16.51
WK-K	3-1/C #2/0 AWG CU XLP 15KV shielded cable primary w/o termination	LF	17.98	18.54
WK-M	3-1/C #4/0 AWG CU XLP 15KV shielded cable primary w/o termination	LF	23.10	23.80
WK-N	3-1/C 250 MCM AWG CU XLP 15KV shielded cable primary w/o termination	LF	26.50	27.28
WK-R	3-1/C 500 MCM AWG CU XLP 15KV shielded cable primary w/o termination	LF	38.82	39.98
WK-1	Cable termination size no. 2 thru 4/0 0-15KV porcelain	EA	333.00	342.99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
WK-2	Cable termination size 250 MCM thru 500 MCM 0-15KV porcelain	EA	456.21	469.53
WK-3	Cable termination size 500 MCM thru 750 MCM 0-15KV porcelain	EA	652.68	672.66
YI-OCA	Ditto YI-OCB but w/3 ea 36KV sta typ arresters added	EA	96,103.80	98,986.47
YI-OCB	35KV OCB line up compl w/3-750 MCM term-2 SWS 1 OCB 1-6" con stub PED&FWD	EA	87,479.10	90,104.25
YI-OCC	Ditto YI-OCB but w/2-6" conduit stub ups & 6 ea 750 MCM terminators	EA	91,175.40	93,910.44
YI-OCD	Ditto YI-OCB but 2/2-6" cond stub ups 6 ea 750 MCM term & 3 ea 36KV arst	EA	101,032.20	104,063.61
YI-OCE	Ditto YI-OCB but 2/4/0 grd mat 100'2" duct bk all control&power cable	EA	88,711.20	91,372.98
YI-OCF	2000 amp 35KV bus 16' W-2-support pedestals 1 at each end	EA	320.79	329.67
YP-012	Duct bank 1 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	8.01	8.26
YP-013	Duct bank 1 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	13.12	13.52
YP-014	Duct bank 1 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	17.98	18.54
YP-015	Duct bank 1 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	30.80	31.68
YP-016	Duct bank 1 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	41.89	43.16
YP-022	Duct bank 2 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	15.38	15.87
YP-023	Duct bank 2 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	25.26	26.02
YP-024	Duct bank 2 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	34.50	35.54
YP-025	Duct bank 2 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	59.76	61.55
YP-026	Duct bank 2 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	82.06	84.53
YP-032	Duct bank 3 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	21.81	22.47
YP-033	Duct bank 3 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	36.96	38.07
YP-034	Duct bank 3 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	51.75	53.30
YP-035	Duct bank 3 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	88.71	91.38
YP-036	Duct bank 3 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	121.99	125.65
YP-042	Duct bank 4 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	28.34	29.19
YP-043	Duct bank 4 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	42.51	43.79
YP-044	Duct bank 4 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	66.53	68.53
YP-045	Duct bank 4 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	117.05	120.57
YP-046	Duct bank 4 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	160.17	164.98
YT-012	Duct bank 1 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	4.93	5.03
YT-013	Duct bank 1 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	5.85	6.03
YT-014	Duct bank 1 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	6.77	6.98
YT-015	Duct bank 1 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	8.33	8.57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($)	
			FY 90	FY 91
YT-016	Duct bank 1 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	10.17	10.48
YT-022	Duct bank 2 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	8.01	8.26
YT-023	Duct bank 2 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	9.86	10.16
YT-024	Duct bank 2 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	12.32	12.70
YT-025	Duct bank 2 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	14.79	15.23
YT-026	Duct bank 2 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	18.48	19.04
YT-032	Duct bank 3 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	11.71	12.07
YT-033	Duct bank 3 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	14.17	14.60
YT-034	Duct bank 3 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	17.56	18.09
YT-035	Duct bank 3 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	22.18	22.84
YT-036	Duct bank 3 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	27.11	27.93
YT-042	Duct bank 4 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	14.17	14.60
YT-043	Duct bank 4 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	17.25	17.77
YT-044	Duct bank 4 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	21.57	22.20
YT-045	Duct bank 4 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	27.11	29.04
YT-046	Duct bank 4 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	33.27	34.27
YT-062	Duct bank 6 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	20.02	20.60
YT-063	Duct bank 6 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	24.64	25.39
YT-064	Duct bank 6 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	30.80	31.73
YT-065	Duct bank 6 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	38.20	39.35
YT-066	Duct bank 6 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	49.28	50.77
YT-082	Duct bank 8 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	25.87	26.65
YT-083	Duct bank 8 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	29.57	30.46
YT-084	Duct bank 8 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	39.43	40.61
YT-085	Duct bank 8 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	49.33	50.77
YT-086	Duct bank 8 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	62.84	64.72
YT-122	Duct bank 12 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	36.96	38.07
YT-123	Duct bank 12 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	45.59	46.96
YT-124	Duct bank 12 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	57.91	59.65
YT-125	Duct bank 12 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	72.69	74.88
YT-126	Duct bank 12 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	92.41	95.18
YT-15	15KV feeder w/4 way 4" DB, 4/0 CP grd, 3-6'x8'x6'D MHS & 3-250 MCM cab w/spl	LF	56.68	58.39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
YT-162	Duct bank 16 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	49.28	50.77
YT-163	Duct bank 16 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	60.37	62.19
YT-164	Duct bank 16 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	77.62	79.95
YT-165	Duct bank 16 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	94.87	97.72
YT-166	Duct bank 16 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	123.21	126.91
YT-35	35KV feeder w/4 way 6" DB, 4/0 CP grd, 3-9'x12'x6'D MHS &3-500 MCM cab w/spl	LF	96.10	98.99
ZM-15	Pole line complete 15KV 4/0 alum w/1 tap pole & 1 term pole 1000' run	LF	16.02	16.51
ZM-35	Pole line complete 35KV 4/0 alum w/1 tap pole & 1 term pole 1000' run	LF	16.64	17.14
513	ELECTRICAL SUBSTATION			
YJ-C1	15KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	5,994.00	6,216.00
YJ-C10	25KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	6,993.00	7,215.00
YJ-C11	37.5KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	7,215.00	7,437.00
YJ-C12	50KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	7,437.00	8,325.00
YJ-C13	75KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	8,658.00	8,991.00
YJ-C14	100KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	9,213.00	9,435.00
YJ-C15	167KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	9,546.00	9,879.00
YJ-C16	75KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	15,540.00	15,873.00
YJ-C17	112KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	15,948.00	16,428.00
YJ-C18	150KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	17,205.00	17,760.00
YJ-C19	225KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	19,425.00	19,980.00
YJ-C20	300KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	20,091.00	20,757.00
YJ-C21	500KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	24,309.00	24,975.00
YJ-C22	750KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	27,972.00	29,082.00
YJ-C23	1000KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	32,190.00	33,300.00
YJ-C24	1500KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	40,404.00	41,625.00
YX-PF	1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	5,328.00	5,439.00
YX-PG	1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	5,550.00	5,661.00
YX-PH	1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	5,883.00	5,994.00
YX-PI	3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	11,544.00	11,877.00
YX-PJ	3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	11,655.00	11,988.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
YX-PK	3, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	11,988.00	12,321.00
YX-PLF	1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	5,772.00	5,883.00
YX-PLG	1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	5,994.00	6,105.00
YX-PLH	1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	6,327.00	6,438.00
YX-PLI	3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	11,988.00	12,321.00
YX-PLJ	3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	11,988.00	12,321.00
YX-PLK	3, 1PH 25KVA xfmr w/term cutouts arresters 2"rscriser 40' pole w/guy	EA	12,321.00	12,654.00
	541 & 542 HEAT DISTRIBUTION			
QA-1AA	10" steam & 6" condensate heat distribution piping above ground	LF	311.00	320.00
QA-2AA	8" steam & 6" condensate heat distribution piping above ground	LF	304.00	313.00
QA-3AA	8" steam & 4" condensate heat distribution piping above ground	LF	245.00	253.00
QA-4AA	6" steam & 4" condensate heat distribution piping above ground	LF	206.00	213.00
QA-5AA	4" steam & 2.5" condensate heat distribution piping above ground	LF	181.00	186.00
QA-6AA	3" steam & 2.5" condensate heat distribution piping above ground	LF	162.00	167.00
QA-7AA	3" steam & 2" condensate heat distribution piping above ground	LF	153.00	158.00
QA-8AA	2.5" steam & 2.5" condensate heat distribution piping above ground	LF	153.00	158.00
QA-9AA	2.5" steam & 2" condensate heat distribution piping. Above ground	LF	150.00	154.00
QA-91A	2.5" steam & 1.5" condensate heat distribution piping. Above ground	LF	148.00	152.00
QA-92A	2" steam & 2" condensate heat distribution piping above ground	LF	145.00	149.00
QA-93A	2" steam & 1.5" condensate heat distribution piping above ground	LF	140.00	144.00
QA-94A	2" steam & 1" condensate heat distribution piping above ground	LF	138.00	141.00
QA-95A	1.5" steam & 1.5" condensate heat distribution piping above ground	LF	134.00	139.00
QA-96A	1.5" steam & 1" condensate heat distribution piping above ground	LF	132.00	135.00
QA-97A	1" steam & 1" condensate heat distribution piping above ground	LF	130.00	133.00

For areas with unstable soil conditions increase unit prices by 20%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
554 SANITARY SEWERS				
CF-CQ	Precast 48" dia manhole 5' deep w/frame & cover	EA	2,063.00	2,126.00
CF-CT	Precast 48" dia manhole 8' deep w/frame & cover	EA	2,957.00	3,046.00
CJ-BM	Paving patch for trench. flexible 2" surface w/12" base incl removal	SY	35.73	36.81
CK-EZ	Concrete patch for trench 6" conc over 6" base (incl removal)	SY	57.91	59.65
SA-DC	4" exterior sewer cleanout	EA	770.34	794.00
SA-DD	6" exterior sewer cleanout	EA	899.00	927.00
SA-DE	8" exterior sewer cleanout	EA	1,158.00	1,193.00
SA-HB	4" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	7.06	7.28
SA-HD	6" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	7.70	7.94
SA-HF	8" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	9.55	9.83
SA-HG	10" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	12.94	13.33
SA-HH	12" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	15.41	15.87
551, 552, & 553 WATER DISTRIBUTION				
CK-EZ	Concrete patch for trench 6" conc over 6" base (incl removal)	SY	57.91	59.65
RT-AA	Fire hydrant bend CI MJ	EA	3,450.00	3,553.00
RT-AE	4" 90 deg bend CI MJ	EA	246.00	254.00
RT-AI	6" 90 deg bend CI MJ	EA	321.00	330.00
RT-AM	8" 90 deg bend CI MJ	EA	370.00	381.00
RT-AQ	10" 90 deg bend CI MJ	EA	486.00	502.00
RT-AU	12" 90 deg bend CI MJ	EA	616.00	635.00
RT-BA	4" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	12.94	13.32
RT-BB	6" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	16.64	17.14
RT-BC	8" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	22.18	22.84
RT-BD	10" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	28.96	29.83
RT-BE	12" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	35.73	36.81
RT-CA	1" Type K copper pipe w/3' deep trenching, backfill & compaction	LF	4.32	4.45
RT-CB	1-1/2" Type K copper pipe w/3' deep trenching, backfill & compaction	LF	5.85	6.03
RT-CC	2" Type K copper pipe w/3' deep trenching, backfill & compaction	LF	7.39	7.61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
RT-DA	4" tapping saddle tap size to 2"	EA	159.84	165.39
RT-DB	6" tapping saddle tap size to 2"	EA	197.58	225.33
RT-DC	8" tapping saddle tap size to 2"	EA	209.79	215.34
RT-DD	10" tapping saddle tap size to 2"	EA	234.21	240.87
RT-DE	12" tapping saddle tap size to 2"	EA	270.84	279.72
RT-IA	4" x 4" tapping sleeve, 4" tapping valve & 4" tapped hole in pipe	EA	1,940.28	1,998.00
RT-IB	6" x 6" tapping sleeve, 6" tapping valve & 6" tapped hole in pipe	EA	2,833.83	2,919.30
RT-IF	8" x 8" tapping sleeve, 8" tapping valve & 8" tapped hole in pipe	EA	3,265.62	3,363.30
RT-IJ	10" x 10" tapping sleeve, 10" tapping valve & 10" tapped hole in pipe	EA	5,174.82	5,330.22
RT-IO	12" x 12" tapping sleeve, 12" tapping valve & 12" tapped hole in pipe	EA	6,776.55	6,979.68
	Underground tanks for hazardous waste oil storage tanks increase cost by 120%			
	561 & 562 FUEL STORAGE			
TC-CC1	Underground oil storage tank 500 gal fiberglass	GAL	19.71	20.31
TC-CC2	Underground oil storage tank 500 gal fiberglass	GAL	18.48	19.04
TC-CC3	2000 gal underground fiberglass fuel oil tank	GAL	11.10	11.43
TC-CC4	4000 gal underground fiberglass fuel oil tank	GAL	7.39	7.61
TC-CC5	6000 gal underground fiberglass fuel oil tank	GAL	6.16	6.35
TC-CC6	8000 gal underground fiberglass fuel oil tank	GAL	5.55	5.72
TC-CC7	10000 gal underground fiberglass fuel oil tank	GAL	4.93	5.08
TC-CC8	12000 gal underground fiberglass fuel oil tank	GAL	4.62	4.77
TC-CC9	15000 gal fiberglass underground fuel oil tank	GAL	4.62	4.77
CC-CD	18000 gal underground fiberglass fuel oil tank	GAL	4.32	4.45
	71X ROADS			
CI-AM	Stone aggregate base 6" thick	SY	6.90	7.12
CI-AJ	Stone aggregate base 8" thick	SY	9.25	9.52
CI-AO	Stone aggregate base course material North Carolina source	SY	37.88	39.03
CJ-BD	Asphalt paving 1-1/2" overlay	SY	6.78	6.99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
CJ-BE	Asphalt paving 2" overlay	SY	9.11	9.39
CJ-CA	Single bituminous surface treatment	SY	2.46	2.55
CJ-CB	Double bituminous surface treatment	SY	3.09	3.17
CJ-CF	Slurry seal	SY	5.24	5.39
CK-EC	Conc paving non-reinf 5000 psi 6 inch thick	SY	30.80	31.73
CK-EE	Conc paving non-reinf 5000 psi 8 inch thick	SY	38.20	39.35
CK-EG	Conc paving non-reinf 5000 psi 10 inch thick	SY	48.05	49.49
CM-AE	Painting 4" lines on pavement	LF	0.40	0.41
CM-AEA	Inlaid pavement lane line markings 4" wide	LF	1.60	1.67
CM-BA	Concrete curb 6x18 cast-in-place	LF	14.79	15.23
CM-BE	Concrete curb & gutter cast-in-place	LF	19.09	19.68
CM-BI	Concrete valley gutter cast-in-place	SY	55.44	57.11
72X	PARKING			
CI-AH	Stone aggregate base 6" thick	SY	6.90	7.12
CI-AJ	Stone aggregate base 8" thick	SY	9.25	9.44
CI-AO	Stone aggregate base course material North Carolina source	CY	37.88	39.03
CJ-BD	Asphalt paving 1-1/2" overlay	SY	6.78	6.99
CJ-HE	Asphalt paving 2" overlay	SY	9.11	9.39
CJ-CA	Single bituminous surface treatment	SY	2.46	2.54
CJ-CB	Double bituminous surface treatment	SY	3.09	3.17
CJ-CF	Slurry seal	SY	5.24	5.39
CM-AE	Painting 4" lines on pavement	LF	0.40	0.41
CM-AEA	Inlaid pavement lane line markings 4" wide	LF	1.60	1.67
CM-BA	Concrete curb 6x18 cast-in-place	LF	14.79	15.25
CM-BE	Concrete curb & gutter cast-in-place	LF	19.09	19.68
CM-BI	Conc valley gutter cast-in-place	SY	55.44	57.11
CM-BN	Precast concrete parking bumpers 6"x10"x6' incl dowels	EA	44.98	46.32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
74X SIDEWALKS				
CM-CA	Conc sidewalks 4 inch cast-in-place no base	SY	32.03	33.00
75X & 76X AIRCRAFT PAVING				
CI-AH	Stone aggregate base 6" thick	SY	6.90	7.12
CI-AJ	Stone aggregate base 8" thick	SY	9.25	9.52
CI-AO	Stone aggregate base course material North Carolina source	SY	37.86	39.03
CJ-BD	Asphalt paving 1-1/2" overlay	SY	6.78	6.98
CJ-BE	Asphalt paving 2" overlay	SY	9.11	9.39
CJ-CA	Single bituminous surface treatment	SY	2.46	2.54
CJ-CB	Double bituminous surface treatment	SY	3.09	3.17
CJ-CF	Slurry seal	SY	5.24	5.39
CK-EC	Conc paving non-reinf 5000 psi 6 inch thick	SY	30.80	31.72
CK-EE	Conc paving non-reinf 5000 psi 8 inch thick	SY	38.20	39.34
CK-EG	Conc paving non-reinf 5000 psi 10 inch thick	SY	48.05	49.40
CM-AE	Painting 4" lines on pavement	LF	0.40	0.41
CM-AEA	Inlaid pavement lane line markings 4" wide	LF	1.60	1.64
85X STORM DRAINAGE				
CA-BA	12" RCP Class III storm drainage 4 ft deep w/ excav, bkfl & compact	LF	17.99	18.54
CA-BB	15" RCP Class III storm drainage 4 ft deep w/ excav, bkfl & compaction	LF	24.64	25.39
CA-BC	18" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	33.27	34.27
CA-BE	24" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	46.21	47.59
CA-BG	30" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	64.07	65.99
CA-BH	36" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	83.78	86.30
CF-CQ	Precast 48" dia manhole 5' deep w/frame & cover	EA	2,065.00	2,126.00
CF-CT	Precast 48" dia manhole 8' deep w/frame & cover	EA	2,884.00	2,969.00
CF-DC	Standard catch basin 5 ft deep	EA	1,940.00	1,998.00
CF-LB	Curb inlet max depth 8' 4' throat width, 12" to 36 " pipe w/excav & bkfl	EA	3,450.00	3,552.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
CJ-BM	Paving patch for trench. Flexible 2" surface w/ 12" base incl removal	SY	35.73	36.81
CK-EZ	Concrete patch for trench 6" conc over 6" base (incl removal)	SY	55.44	57.11
812 BORROW				
BF-BM	Borrow fill in pace at Sewells Point Area from Willoughby borrow pit	CY	10.67	10.99
BF-BN	Borrow fill in place at Cherry Pt/Camp Lejeune from station borrow pit	CY	11.58	11.93
BF-BO	Borrow fill in place frm commercial Tidewater pit 30 mile round trip	CY	17.25	17.76
BF-CBK	Borrow fill in place frm commercial Tidewater pit 20 miles round trip	CY	16.02	16.49
813 TOPSOIL SEED				
DB-AA	4" topsoil from piles on site w/seed, fertilize lime, & fine grade	SY	1.85	1.90
86X FENCING				
CP-AC	Chain link fence 9 ga galv steel 4' high w/3 strand barbwire	LF	12.32	12.69
CP-AE	Chain link fence 9 ga galv steel 6' high w/3 strand barbwire	LF	15.71	16.18
CP-AF	Chain link fence 9 ga galv steel 7' high w/3 strand barbwire	LF	17.25	17.76
CP-AG	Chain link fence 9 ga galv steel 8' high w/3 strand barbwire	LF	19.09	19.67
CP-BC	Gate chain link 9 ga galv stl 4' high w/gate posts & barbwire	LF	54.52	56.15
CP-BE	Gate chain link 9 ga galv stl 6' high w/gate posts & barbwire	LF	77.01	79.32
CP-BF	Gate chain link 9 ga galv stl 7' high w/gate posts & barbwire	LF	88.71	91.38
CP-BG	Gate chain link 9 ga galv stl 8' high w/gate posts & barbwire	LF	102.26	105.84
84X DEMOLITION				
BB-BB	Clear & grub medium dense areas w/disposal	AC	2,834.00	2,919.00
BC-EA	Demolition of masonry building complete w/disposal	CF	0.24	0.26
BC-EB	Demolition of wood frame building complete w/disposal	CF	0.24	0.26
BC-EE	Demolition of steel building complete w/disposal	CF	0.56	0.58
BD-AA	Removal of bituminous paving up to 3" thick w/disposal	SY	4.44	4.57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 6 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($)	
			FY 90	FY 91
BD-AJ	Removal of concrete pavement w/disposal	SY	14.79	15.23
BD-AL	Removal of conc sidewalk 4" thick w/disposal	SY	3.57	3.69
BD-BA	Removal of concrete curb & gutter	LF	2.59	2.66
911, 912, & 913 LAND PILING				
BB-AB	Piling prestressed conc 10" sq, more than 60 LF long, truck delivery	LF	13.55	13.96
BB-BC	Treated wood piling 40' to 50' long 12" butt 7" tip 12 lb creosote	LF	11.10	11.43
BB-CB	Piling prestressed conc 12" sq, more than 60 LF long, truck delivery	LF	15.10	15.54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 6: FACILITY STUDY SAMPLE ESTIMATE

6.1 DD Form 1391. Figure 10 is a sample of a facility study estimate.

6.2 Building Square Foot Cost Development. Figure 11 is a sample of building square foot cost development.

6.3 Supporting Facilities Cost Development. Figure 12 is a facilities study for supporting facilities cost development.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

1. COMPONENT	FY 19 93 MILITARY CONSTRUCTION PROJECT DATA	2. DATE
NAVY		15 MAR 1988

3. INSTALLATION AND LOCATION	4. PROJECT TITLE
U.S. NAVAL STATION NORFOLK, VIRGINIA	ADMINISTRATIVE OFFICE

5. PROGRAM ELEMENT	6. CATEGORY CODE	7. PROJECT NUMBER	8. PROJECT COST ($000)
	610 - 10	P-000	3,450

9. COST ESTIMATES

ACF: 0.90 PER: NA	ITEM	ESCALATED TO: 1 APRIL 1993	U/M	QUANTITY	UNIT COST	COST ($000)
PRIMARY FACILITY			SF	30,000	88.80	2,664
Administrative Office			SF	22,000	78.26	(1,722)
Data Processing Center			SF	8,000	115.38	(923)
Additional Functional Features			SF	30,000	.64	(19)
SUPPORTING FACILITIES			LS	-	-	462
Special Foundation Features			LS	-	-	(54)
Electrical Utilities			LS	-	-	(14)
Mechanical Utilities			LS	-	-	(131)
Roads, Parking, and Sidewalks			LS	-	-	(146)
Site Improvements			LS	-	-	(67)
Demolition			LS	-	-	(50)
SUB-TOTAL						3,126
CONTINGENCY (5%)						156
TOTAL CONTRACT COST						3,282
SUPERVISION, INSPECTION & OVERHEAD (5.5%)						181
TOTAL REQUEST						3,463
TOTAL REQUEST						?,450
EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS		(LIST NOT AVAILABLE)				

10. DESCRIPTION OF PROPOSED CONSTRUCTION

Construct a permanent three-story masonry and structural frame building on a pile foundation. A passenger elevator and an exterior uncovered steel stairway are included. The facility will provide 22,000 SF of administration space (610-10) and 8,000 SF data processing space (610-20). Supporting facilities consist of the foundation wood piling, utility conections, parking and road construction, and site improvements including storm drainage. Two buildings are to be demolished.
(air conditioning: 140 tons)

11.

****
* NOTE: The sample estimate (Figures 10 and 11) was based on the escalation rate, area cost factor, and the historical unit costs which were in effect as of March 1988. Current estimates must be based on current criteria. *
****

DD FORM 1 DEC 76 1391 — PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED — PAGE NO.

S/N 0102 LF 001 3910

Figure 10
DD Form 1391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BUILDING SF COST DEVELOPMENT

TITLE: ADMINISTRATIVE OFFICE
LOCATION: NAVAL STATION, NORFOLK, VA
PREPARED BY: U. R. ABLE

P#: P-000
DATE: 3/15/88
PH#: 100-0000

	CAT CODE	SIZE	ACF	DATE mo / yr
PROPOSED FACILITY	610-10	22,000 SF	0.90	4/93
GUIDANCE FACILITY	610-10	25,000 SF	1.00	4/91

HISTORICAL GUIDANCE SOURCE: NAVFAC 051 (7/87)

HISTORICAL GUIDANCE UNIT COST: $ 82.00 / SF

HISTORICAL UNIT COST		SIZE FACTOR		AREA COST FACTOR		ESCALATION FACTOR		ADJUSTED UNIT COST
82.00	X	1.01	X	0.90	X	1.05	=	$ 78.26/SF

ADDITIONAL FUNCTIONAL FEATURES

FUNCTIONAL FEATURES	QTY	UNIT COST	TOTAL COST	ADJUSTED U/C	%CHANGE
OMSI (C - .5%)	$2,644,760*	0.005	13,224	0.44	0.5%
UNCOVERED EXTERIOR STAIRS	1 EA	6,000	6,000	0.20	0.2%

ADDITIONAL FUNCTIONAL FEATURES TOTAL : .64 0.7%

* NOTE: This figure is the total primary cost of both elements of the multi-use building (i.e., $78.26/SF X 22,000 SF plus $115.38/SF X 8,000 SF).

Figure 11
Building Square Foot Cost Development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BUILDING SF COST DEVELOPMENT

TITLE: ADMINISTRATIVE OFFICE P#: P-000

LOCATION: NAVAL STATION, NORFOLK, VA DATE: 3/15/88

PREPARED BY: U. R. ABLE PH#: 100-0000

	CAT CODE	SIZE	ACF	DATE mo / yr
PROPOSED FACILITY	610-20	8,000 SF	0.90	4/93
GUIDANCE FACILITY	610-20	21,000 SF	1.00	4/91

HISTORICAL GUIDANCE SOURCE: NAVFAC 051 (7/87)

HISTORICAL GUIDANCE UNIT COST: $ 111.00 /SF

HISTORICAL UNIT COST		SIZE FACTOR		AREA COST FACTOR		ESCALATION FACTOR		ADJUSTED UNIT COST
111.00	X	1.10	X	0.90	X	1.05	=	$ 115.38/SF

ADDITIONAL FUNCTIONAL FEATURES

FUNCTIONAL FEATURES	QTY	UNIT COST	TOTAL COST	ADJUSTED U/C	%CHANGE

ADDITIONAL FUNCTIONAL FEATURES TOTAL :

Figure 11 (Continued)
Building Square Foot Cost Development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

FACILITIES STUDY
SUPPORTING FACILITIES COST DEVELOPMENT

TITLE: ADMINISTRATIVE OFFICE P#: 000 FY: 93

LOCATION: NAVAL STATION, NORFOLK, VA DATE: 15 MARCH 1988

CES SYSTEM	PRICE SOURCE	COMPOSITE QUANTITY	COMPOSITE UNIT COST	COMPOSITE ADJUSTMENT FACTOR (1)	TOTAL COST	FORM 1391 ($000)
SPECIAL FOUNDATION FEATURES (91X)						
911	BB-BC	5000 LF	11.43	0.95	54,293	54
ELECTRICAL UTILITIES (51X - 52X)						
511	WJ-K	300 LF	16.51	0.95	4,705	
512	VP-K	100 LF	12.21	0.95	1,160	
513	YJ-C11	1 EA	7437.00	0.95	7,065	
523	CODE 407	300 LF	5.00	0.98	1,470	
					14,400	14
MECHANICAL UTILITIES (54X - 59X)						
541	QA-2AA	400 LF	313.00	0.95	118,940	
551	RT-BC	400 LF	22.84	0.95	8,679	
554	SA-HD	400 LF	7.94	0.95	3,017	
					130,636	131
ROADS, PARKING, SIDEWALKS (7XX)						
711	CI-AM	3000 SY	7.12	0.95	20,292	
711	CK-EC	3000 SY	31.73	0.95	90,431	
721	CI-AH	3000 SY	7.12	0.95	20,292	
721	CJ-CB	3000 SY	3.17	0.95	9,035	
741	CM-CA	200 SY	33.00	0.95	6,270	
					146,320	146
SITE IMPROVEMENTS (8XX)						
813	DB-AA	10,000 SY	1.90	0.95	18,050	
814	ALLOWANCE	-----	------	------	25,000	
851	CA-BB	500 LF	25.39	0.95	12,060	
851	CF-CQ	2 EA	2126.00	0.95	4,039	
851	CF-DC	4 EA	1998.00	0.95	7,592	
					66,741	67
DEMOLITION (84X)						
843	BC-EE	90,000 CF	0.58	0.95	49,590	50

NOTE: PLACE ADDITIONAL INFORMATION AND EXCESS COMPOSITE ITEMS ON BACK.
(1) COMPOSITE ADJUSTMENT FACTOR = AREA COST FACTOR X ESCALATION FACTOR

Figure 12

Supporting Facilities Cost Development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 7: CES STANDARD SYSTEMS LIST (10/29/87)

7.1 Interior. The interior systems are shown in the following list.

0XX General
000 Building Construction
00X Overhead
001 Field Overhead
002 Home Office OH
01X Additive Bid Items
02X Deductive Bid Items
03X Base Bids
04X Government Cost
041 OMSI
042 PCAS
043 Contingencies
044 SIOH

1XX General Construction
11X Structural
111 Foundation (SF)
112 Slab on Grade (SF)
113 Structural (SF)
114 Supported Floor (SF)
115 Stairs (EA)
116 Roof Structure (SF)
117 Pre-Engd Building (SF)
118 Vault (SF)
119 Write-in
13X Structural Write-in
14X Architectural
141 Roofing (SF)
142 Exterior Walls (SF)
143 Interior Walls (SF)
144 Interior Finishes (SF)
145 Doors (SF)
146 Windows (SF)
147 Specialties (SF)
148 BEQ Wardrobes (EA)
149 Write-in
16X Architectural Write-in
17X Demolition Interior
171 Demo Interior (SF)
172 Asbestos Removal Interior (LS)
173 - 175 Write-in

2XX Interior Mechanical
21X Plumbing Domestic
211 Plumbing, domestic (EA)
212 Domestic Hot Water Solar (MBTU)
213 Roof Drainage (EA)
214 - 216 Write-in
22X Space Conditioning
221 HVAC (MBTU/TNS)
222 Air Conditioning (TNS)
223 Heating, Ventln (MBTU/CFM)
224 Mechanical Ventilation (CFM)
225 Dehumidification (PPH)
226 Heating Solar (SF)
227 Write-in
23X Weight Handling Equipment
231 Bridge Cranes (TNS)(1)
232 Monorails (TNS)(1)
233 Fixed Hoist (TNS)(1)
234 Vehicle Lifts (TNS)(1)
235 Elevators (TNS)(1)
236 Escalators (TNS)(1)
237 Conveyors (TNS)(1)
238 Write-in
24X Special Mechanical Piping System
241 Vacuum (CFM)(1)
242 Oxygen (EA)(1)
243 Nitrogen (EA)(1)
244 Compressed Air (CFM)(1)
245 Interior Steam (PPH)(1)
246 - 247 Write-in
25X Special Mechanical, Other
251 Dust Collection (CFM)(1)
252 Engine Exhaust (CFM)(1)
253 - 255 Write-in
27X Interior Fire Protection
271 Sprinklers (SF)
272 AFFF (SF)
273 Carbon Dioxide (LBS)
274 Halon (LBS)
275 Fire Alarm (SF)
276 - 277 Write-in

(1) Built-in Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

3XX Interior Electrical

31X Power & Lighting
- 311 Power (KW)
- 312 Lighting (SF)
- 313 400HZ (KW)(1)
- 314 Direct Current (KW)(1)

32X Special Equipment Protection
- 321 Grounding (SF)(1)
- 322 Lightning Protection (SF)(1)
- 323 - 326 Write-in

33X Special Electrical Electronics
- 331 Security Detection (SF)(1)
- 332 EMCS (EA)(1)
- 333 Computer Communication(LF)(1)
- 334 - 336 Write-in

34X Communication
- 341 Telephone (SF)
- 342 Intercom (SF)
- 343 Television (SF)
- 344 Public Announcment (SF)
- 345 Master Clock (EA)
- 346 - 347 Write-in

35X Write-in

4XX Special Equipment

41X Medical Equipment
- 411 Hospital Equip (SF)(1)
- 412 Dental Equip (EA)(1)
- 413 - 414 Write-in
- 415 Install Gov't Furnished Medical Equipment
- 416 Gov't Furn Med Equip

42X Food Service Equipment
- 421 Food Service Equip (SF)
- 422 - 424 Write-in
- 425 Install Gov't Furnished Food Service Equip
- 426 Gov't Furnished Food Service Equipment

43X Miscellaneous Equipment
- 431 Chapel Equip (SF)(1)
- 432 Movie Theater Equip (SF)(1)
- 433 Rifle Range Equip (EA)(1)
- 434 Lab Equip (EA)(1)
- 435 Install Government Furn Laboratory Equipment
- 436 Government Furnished Lab Equipment
- 437 Waste Disposal (PPH)(1)
- 438 Write-in

44X Special Warehouse Equipment
- 441 Special Warehouse Equipment (SF)(1)
- 442 - 444 Write-in
- 445 Install Government Furnished Warehouse Equipment
- 446 Government Furnished Warehouse Equip

45X Special Construction
- 451 Hangar Doors (SF)
- 452 Vault Doors (EA)
- 453 Blast Doors (SF)
- 454 Raised Floor (SF)*
- 455 Radio Frequency Shielding (SF)(1)
- 456 Bowling Lanes (EA)
- 457 Paint Spray Booth (SF)(1)
- 458 Write-in

49X Other Equipment
- 491 Other Miscellaneous Equip
- 492 Snow Melting (SF)
- 495 Install Other Government Furnished Equip
- 496 Other Government Furnished Equipment (SF)(1)
- 499 Building Work not included elsewhere (LS)

---

(1) Built-in Equipment

---

* Considered built-in equipment for category code 610-20 (Data Processing Center) only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

7.2 Exterior. The exterior systems are shown in the following list.

5XX Exterior Utilities
- 51X Exterior Electrical
  - 511 Electrical Distribution Primary (LF)
  - 512 Electrical Distribution Secondary (LF)
  - 513 Substation/ Transformer (KVA)
  - 514 Area Lighting (EA)
  - 515 Airfield Lighting (LF)
  - 516 Lightning Protection (EA)
  - 517 - 518 Write-in
- 52X Exterior Communication
  - 521 Fire Alarm (LF)
  - 522 Security Alarm (LF)
  - 523 Communication, Phone (LF)
  - 524 Exterior EMCS (LF)
  - 525 - 526 Write-in
- 54X Exterior Mechanical
  - 541 Heat Distribution Overhead (LF)
  - 542 Heat Distribution Underground (LF)
  - 543 Chilled Water Dist (LF)
  - 544 Condensate Collect (LF)
  - 545 Gas Distribution (LF)
  - 546 Compressed Air Dist (LF)
  - 547 Fuel Distribution (LF)
  - 548 Exterior Foam (LF)
  - 549 Write-in
- 55X Exterior Mechanical
  - 551 Water Distribution (LF)
  - 552 Fire Protection Water Distribution (LF)
  - 553 Salt Water Distribution (LF)
  - 554 Sanitary Sewers (LF)
  - 555 - 556 Write-in
- 56X Bulk Storage
  - 561 Fuel Storage Bulk (BBL)
  - 562 Fuel Storage Ready Issue (GAL)
  - 563 Water Storage (GAL)
  - 564 - 566 Write-in
- 57X Fueling
  - 571 Vehicle Fueling (EA)
  - 572 Aircraft Fueling (EA)
  - 573 Marine Fueling (EA)
  - 574 - 576 Write-in
- 58X Pumping
  - 581 Fuel Pumping Station (GPM)
  - 582 Water Pumping Station (GPM)
  - 583 Fire Booster Pump (GPM)
  - 584 Sewage Pump Station (GPM)
  - 585 Sewage Lift Station (GPM)
  - 586 Write-in
- 59X Treatment Facility
  - 591 Water Treatment (MGD)
  - 592 Domestic Sewage (MGD)
  - 593 Industrial Waste ((MGD)
  - 594 - 596 Write-in

6XX Exterior Structures
- 61X Equipment Building
  - 611 Mechical Equip Building (SF)
  - 612 Electrical Equip Building (SF)
  - 613 - 615 Write-in
- 62X Supporting Structures Miscellaneous
  - 621 Security Gate (LF)
  - 622 Guard House (SF)
  - 623 - 625 Write-in
- 64X Pollution Abatement Structures
  - 641 Oil Water Separators (GAL)
  - 642 Electrostatic Precipitator (SCFM)
  - 643 - 645 Write-in
- 65X Shop Support Structures
  - 651 Vehicle Grease Racks (EA)
  - 652 Vehicle Wash Platforms (EA)
  - 653 - 656 Write-in
- 66X AC Cleaning Facility
  - 661 AC Washing Facility (SY)
  - 662 AC Rinsing Facility (SY)
  - 663 - 666 Write-in

7XX Paving
- 71X Roads
  - 711 Concrete Roads (SY)
  - 712 Flexible Roads (SY)
  - 713 Overlay Roads (SY)
  - 714 Surface Treatment (SY)
  - 715 Slurry Seal (SY)
  - 716 - 717 Write-in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

72X Parking
- 721 Concrete (SY)
- 722 Flexible (SY)
- 723 Overlay (SY)
- 724 Surface Treatment (SF)
- 725 Slurry Seal (SY)
- 726 - 727 Write-in

73X Write-in

74X Walks
- 741 Concrete Walks (SY)
- 742 Bituminous Walks (SY)
- 743 Special Walks (SY)
- 744 - 746 Write-in

75X Aircraft Paving Concrete
- 751 Runways (SY)
- 752 Taxiways (SY)
- 753 Aprons (SY)
- 754 Repairs Paving (SY)
- 755 Crack and Joint Repairs (LF)
- 756 - 757 Write-in

76X Aircraft Paving Flexible
- 761 Flexible Runways (SY)
- 762 Flexible Taxiways (SY)
- 763 Flexible Aprons (SY)
- 764 Repair A/C Flexible Paving (SY)
- 765 AC Paving Overlay (SY)
- 766 AC Paving Slurry Seal (SY)
- 767 - 768 Write-in

77X Incidental Paving Work
- 771 Pavement Milling (SY)
- 772 - 776 Write-in

8XX Site Preparation

81X Earthwork
- 811 Earthwork (CY)
- 812 Borrow (CY)
- 813 Topsoil/Seed/Sod (SY)
- 814 Landscaping (SY)
- 815 Site Irrigation (EA)
- 816 Surcharge (CY)
- 817 Earth Replacement (CY)
- 818 Environmental Protection (AC)

82X Site Improvements
- 821 Site Improvements (SY)
- 822 - 825 Write-in

83X Site Preparation Miscellaneous
- 831 Site Dewatering (Major) (LF)
- 832 - 835 Write-in

84X Demolition
- 841 Remove Utilities (LF)
- 842 Remove Paving and Slabs (SY)
- 843 Remove Structures (CF)
- 844 Remove/Dispose of Asbestos (Exterior) (LS)
- 845 Remove/Dispose of P.C.B. (LS)
- 846 Remove/Dispose of Contaminated Earth (CY)
- 847 Write-in

85X Storm Drainage
- 851 Storm Drainage Piping (LF)
- 852 Box Arch Culvert (LF)
- 853 Drainage Facing Materials (SY)
- 854 - 856 Write-in

86X Fencing
- 861 Fencing (Perimeter) (LF)
- 862 Fencing Alarm (LF)
- 863 - 865 Write-in

87X Recreation Equipment/Fields
- 871 Playground Equip (EA)
- 872 Playing Field Equip (EA)
- 873 Tennis Courts (EA)
- 874 Softball/Baseball (EA)
- 875 Football/Soccer (EA)
- 876 - 877 Write-in

9XX Heavy Construction

91X Special Building Foundations
- 911 Land Piling Drivn (LF)
- 912 Caissons (EA)
- 913 Pressure Injected Footings (EA)
- 914 Vibrofloation (EA)
- 915 Chemical Soil Stabilization (EA)
- 916 Dynamic Consolidation (EA)
- 917 Piling Cast-in-place (LF)

92X Railroad
- 921 Track Work Railroad (LF)
- 819 Write-in
- 922 - 925 Write-in

93X Marine Structures Piers
- 931 Piling-Marine (LF)
- 932 Dolphins (EA)
- 933 Med Mooring (LS)
- 934 Pier Deck (SF)
- 935 Fenders (LF)
- 936 Pile Clusters (EA)
- 937 Marine Specialties (LS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

938 Write-in

94X Marine Structures Special
- 941 Bulkhead/Seawall (SF)
- 942 Erosion Protection-Marine (SY)
- 943 Riprap (Marine) (SY)
- 944 - 946 Write-in

95X Marine Repairs
- 951 Underdeck Repairs (LS)
- 952 Pile Repairs Marine (LF)
- 953 - 957 Write-in

96X Dredging
- 961 Mob/Demob Dredging (LS)
- 962 Hydraulic Dredging (CY)
- 963 Bucket Dredging (CY)
- 964 - 966 Write-in

97X Towers/Antennas
- 971 Towers (LF)
- 972 Antennas (LS)
- 973 - 976 Write-in

98X Tunnel/Pipe Jacking
- 981 Tunneling (LS)
- 982 Pipe Jacking (LF)
- 983 - 986 Write-in

99X Heavy Construction Miscellaneous
- 991 Bridges (SF)
- 992 Overpasses (SF)
- 993 - 996 Write-in
- 999 Supporting Facilities

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 8: SUPPLEMENTAL INFORMATION

8.1 Blank Forms and References. See Appendix A.

8.2 SI Conversion Factors. See Appendix B.

8.3 Units of Measure and Their Symbols. See Appendix C.

8.4 Acronyms and Abbreviations. See Appendix D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX A

BLANK FORMS AND REFERENCES

Project Data Sheet

PROJECT DATA SHEET

COMPONENT NAVY	ESTIMATE YEAR	DATE
INSTALLATION AND LOCATION	PROJECT TITLE	
PROGRAM ELEMENT	CATEGORY CODE	PROJECT NUMBER P- / CURRENT COST ($000)

ACF: FER: ESCALATED TO:

Item	U/M	Quantity	Unit Cost	Cost ($000)
PRIMARY FACILITY				
SUPPORTING FACILITIES				
SUBTOTAL				
CONTINGENCY (5%)				
TOTAL CONTRACT COST				
SUPERVISION, INSPECTION, & OVERHEAD (5.5%)				
TOTAL REQUEST				
TOTAL REQUEST ROUNDED				
EQUIPMENT FROM OTHER APPROPRIATIONS				

DESCRIPTION OF PROPOSED CONSTRUCTION:

REQUIREMENT: REQUIREMENT: _____ ADEQUATE: __ SUBSTANDARD: _____

PROGRAMMING DATA ACTIVITY UIC: N_____ ALTERNATE HOST:_____ SUP UNIT:_____
SPEC AREA:___ INVESTMENT PROGRAM: __ SIR: __ RESOURCE SPONSOR :__
MAJ/SUBCLAIMANT CODE: __ INVESTMENT CATEGORY: __ MOBILIZATION INDICATOR: __
ACTIVITY PRIORITY: __ CLAIMANT PRIORITY:__ FLEP PRIORITY: __ READINESS RATING: __

PROJECT DETAIL DATA:

CATEGORY CODE	DESCRIPTION	SCOPE	U/M	CC/MC	VALIDATION INDICATOR

REQUIREMENT CERTIFICATION:

ACTIVITY _____ DATE:
MAJOR CLAIMANT _____ DATE:
NAVFACENGCOMHQ _____ DATE:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Project Data Sheet (Continued)

LOCATION AND SITE PLAN

SITING RATIONALE:

EFD REVIEW/ANALYSIS:

REQUIRES FURTHER ACTION?	NO	YES	COMMENTS
Explosives Safety			
Airfield Safety			
Electromagnetic Radiation			
AICUZ Violation			
Change to Approved Master Plan/CIP			
Coastal Zone Management			
Natural Resources Plan			
Dredging/Filling Permits			
Wetland/Floodplain			
Hazardous Wastes on Site			
Cultural Resources Impact			
Other Site Problems (List)			
Utilities Support			
Roads, Parking			
Preliminary Environmental Assessment			
Preliminary Hazards Analysis			
Other (List)			

EFD Validation:
Site Approved: Yes____ No____ Deferred
Project Supported By SFPS: Yes____ No_____

Name:_____ Date:_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

DD Form 1391

1. COMPONENT	FY 19___ MILITARY CONSTRUCTION PROJECT DATA	2. DATE
3. INSTALLATION AND LOCATION		4. PROJECT TITLE
5. PROGRAM ELEMENT	6. CATEGORY CODE	7. PROJECT NUMBER	8. PROJECT COST ($000)

9. COST ESTIMATES

ACF: FER: ITEM ESCALATED TO:	U/M	QUANTITY	UNIT COST	COST ($000)

10. DESCRIPTION OF PROPOSED CONSTRUCTION

DD FORM 1 DEC 76 1391 — PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED — PAGE NO.

S/N 0102 LF 001 3910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Building SF Cost Development

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

	CAT CODE	SIZE	ACF	DATE mo / yr
PROPOSED FACILITY				
GUIDANCE FACILITY				

HISTORICAL GUIDANCE SOURCE: _____

HISTORICAL GUIDANCE UNIT COST: _____

HISTORICAL UNIT COST		SIZE FACTOR		AREA COST FACTOR		ESCALATION FACTOR		ADJUSTED UNIT COST
_____	X	_____	X	_____	X	_____	=	_____

ADDITIONAL FUNCTIONAL FEATURES

FUNCTIONAL FEATURES	QTY	UNIT COST	TOTAL COST	ADJUSTED U/C	%CHANGE

ADDITIONAL FUNCTIONAL FEATURES TOTAL : _____ _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities Cost Development

FACILITIES STUDY
SUPPORTING FACILITIES COST DEVELOPMENT

TITLE: _____ P#: _____ FY: _____

LOCATION: _____ DATE: _____

CES SYSTEM	PRICE SOURCE	COMPOSITE QUANTITY	COMPOSITE UNIT COST	COMPOSITE ADJUSTMENT FACTOR (1)	TOTAL COST	FORM 1391 ($000)
SPECIAL FOUNDATION FEATURES (91X)						
ELECTRICAL UTILITIES (51X - 52X)						
MECHANICAL UTILITIES (54X - 59X)						
ROADS, PARKING, SIDEWALKS (7XX)						
SITE IMPROVEMENTS (8XX)						
DEMOLITION (84X)						

NOTE: PLACE ADDITIONAL INFORMATION AND EXCESS COMPOSITE ITEMS ON BACK.
(1) COMPOSITE ADJUSTMENT FACTOR = AREA COST FACTOR X ESCALATION FACTOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Cost Model Explanation

GENERAL:

This questionnaire will establish a measure of the project scope early in the planning stage in a manner which will allow empirical prices to be applied. It is recognized that many design decisions cannot be made at this time; however, if a realistic price is to be developed, the needs of the activity relating to a particular project must be defined. The NAVFACENGCOM method of conceptual estimating requires cost development from guidance cost of comparable construction. Any variation from guidance cost must be supported by a definition and cost of functional features. This support is often necessary to provide adequate project funding.

BUILDING:

Under normal conditions, the building cost model will be completed at the design cost certification stage. Therefore, this portion of the cost model is not required for the facilities study.

System 000 Building Construction

This system describes the total function of the building. As such, it is the most important information shown on the cost model.

SUPPORTING FACILITIES:

The completed cost model (systems 500 through 999) should state what is planned with emphasis upon scope features that generate significant cost. Refer to additional guidance in the cost model questionnaire.

NOTES:

1. This Cost Model Questionnaire serves two purposes:
   At the budget stage it serves as a means of describing and quantifying project requirements in such a manner that empirical prices can be used to generate a project cost.

   At the final estimate stage it serves as a means of collecting subsystem numbers, for storage in NAVFACENGCOM historical files.

2. The cost model questionnaire systems list includes numbered systems that are "write-in". These numbers may be used to identify systems in the project that are not identified in the questionnaire.

3. Systems followed by (1) are considered built-in equipment.

4. Exterior Systems and Special Equipment need more scope definition for accurate pricing. Show narrative description as you best understand the scope when detailed lists are not available.

5. Building system quantities should be the area in which the system occurs.

6. A completed supporting facilities cost model questionnaire must be included in the facility study cost submittal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities

(Systems 500 through 999)

Note:

1. Show the following criteria suitable for the application of historical cost; under each applicable system heading;

   a. Size (assume if unknown) and length of utility runs. Include storm drainage requirement. Indicate valves, fire hydrants, manholes, catch basins and other significant extras. Depth of cut (when over 6 feet) and dewatering requirements must be shown.

   b. Area and assumed section for paved areas. Identify each type and section variation.

   c. Description of work required for grading, cut and borrow. Describe assumed nature of materials to be moved. If rock excavation is required, state assumptions on removal requirements (e.g., rip, blast, etc.).

   d. Indicate approximate quantities of clearing and grubbing in acres, and whether heavy, medium, or light.

   e. Describe any functional features required outside the building 5 foot line such as: sewage lift stations, wash racks and water tanks, and unsuitable soil conditions

   f. If hazardous materials are present, state type, extent and method of disposal.

   g. See System 911 for Land Piling - Driven.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR ELECTRICAL

511 Electrical Distribution, Primary	Length of Run (LF) _____
512 Electrical Distribution, Secondary	Length of Run (LF) _____
513 Substation/Transformer	Capacity (KVA) _____
514 Area Lighting	Number of Fixtures (EA) _____
515 Airfield Lighting	Length of Run (LF) _____
516 Lightning Protection	Points of Protection (EA) _____
517, 518 Write-in Systems	

EXTERIOR COMMUNICATION

521 Fire Alarm	Length of Run (LF) _____
522 Security Alarm	Length of Run (LF) _____
523 Communication, Telephone	Length of Run (LF) _____
524 Exterior EMCS (Energy Monitoring Control System)	Length of Run (LF) _____
525, 526 Write-in Systems	

EXTERIOR MECHANICAL

541 Heat Distribution, Overhead	Length of Run (LF) _____
542 Heat Distribution, Underground	Length of Run (LF) _____
543 Chilled Water Distribution	Length of Run (LF) _____
544 Condensate Collection (only)	Length of Run (LF) _____
545 Gas Distribution	Length of Run (LF) _____
546 Compressed Air Distribution	Length of Run (LF) _____
547 Fuel Distribution	Length of Run (LF) _____
548 Exterior Foam	Length of Run (LF) _____
549 Write-in System	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR WATER DISTRIBUTION

551 Water Distribution	Length of Run (LF) _____
552 Fire Protection Water Distribution	Length of Run (LF) _____
553 Salt Water Distribution	Length of Run (LF) _____
554 Sanitary Sewers	Length of Run (LF) _____
555, 556 Write-in Systems	

BULK STORAGE

561 Fuel Storage, Bulk	Capacity (BBL) _____
562 Fuel Storage, Ready Issue	Capacity (GAL) _____
563 Water Storage	Capacity (GAL) _____
564 - 566 Write-in Systems	

FUELING

571 Vehicle Fueling	Number of Outlets (EA) _____
572 Aircraft Fueling	Number of Hydrants (EA) _____
573 Marine Fueling	Number of Outlets (EA) _____
574 - 576 Write-in Systems	

PUMPING

581 Fuel Pumping Station	Pump Capacity (GPM) _____
582 Water Pumping Station	Pump Capacity (GPM) _____
583 Fire Booster Pump	Pump Capacity (GPM) _____
584 Sewage Pump Station	Pump Capacity (GPM) _____
585 Sewage Lift Station	Pump Capacity (GPM) _____
586 Write-in System	

TREATMENT FACILITY

591 Water Treatment	Capacity (MGD) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

592 Domestic Sewage Treatment — Capacity (MGD) _____

593 Industrial Waste Treatment — Capacity (MGD) _____

594 - 596 Write-in Systems

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross M.E. Bldg Area (SF)_____

Building required to house mechanical equipment when not connected to the main building and not included in gross area shown under the primary facility.

612 Electrical Equipment Building — Gross E.E. Bldg Area (SF)_____

613 - 615 Write-in Systems

SUPPORTING STRUCTURES MISCELLANEOUS

621 Security Gate — Opening Width (LF) _____

622 Guard House — Gross Building Area (SF) _____

623 - 625 Write-in Systems

POLLUTION ABATEMENT STRUCTURES

641 Oil Water Separators — Capacity (GAL) _____

642 Electro-Static Precipitator — Air Flow (SCFM) _____

643 - 645 Write-in Systems

SHOP SUPPORT STRUCTURES

651 Vehicle Grease Racks — Number of Vehicle Racks (EA) ____

652 Vehicle Wash Platforms — Number of Vehicle Bays (EA) _____

653 - 656 Write-in Systems

AIRCRAFT CLEANING FACILITY

661 Aircraft Washing Facility — Paved Area (SY) _____

662 Aircraft Rinsing Facility — Paved Area (SY) _____

663 - 666 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PAVING

711 Concrete Roads	Paved Area (SY) _____
712 Flexible Roads	Paved Area (SY) _____
713 Overlay Roads	Paved Area (SY) _____
714 Surface Treatment Roads	Paved Area (SY) _____
715 Slurry Seal Road	Paved Area (SY) _____
716, 717 Write-in Systems	

PARKING

721 Concrete Parking	Paved Area (SY) _____
722 Flexible Parking	Paved Area (SY) _____
723 Overlay - Parking	Paved Area (SY) _____
724 Surface Treatment - Parking	Paved Area (SY) _____
725 Slurry Seal Parking	Paved Area (SY) _____
726, 727 Write-in Systems	

WALKS

741 Concrete Walks	Paved Area (SY) _____
742 Bituminous Walks	Paved Area (SY) _____
743 Special Walks	Paved Area (SY) _____
744 - 746 Write-in Systems	

AIRCRAFT PARKING CONCRETE

751 Concrete Runways	Paved Area (SY) _____
752 Concrete Taxiways	Paved Area (SY) _____
753 Concrete Aprons	Paved Area (SY) _____
754 Repairs Concrete Paving	Paved Area (SF) _____
755 Crack and Joint Repair	Length of Repair (LF) _____
757, 758 Write-in Systems	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

AIRCRAFT PAVING FLEXIBLE

761 Flexible Runways	Paved Area (SY) _____
762 Flexible Taxiways	Paved Area (SY) _____
763 Flexible Aprons	Paved Area (SY) _____
764 Repair Aircraft Flexible Paving	Paved Area Patched (SY) _____
765 Aircraft Paving Overlays	Paved Area (SY) _____
766 Aircraft Paving Slurry Seal	Paved Area (SY) _____
767, 768 Write-in Systems	

INCIDENTAL PAVING WORK

771 Pavement Milling	Milled Area (SY) _____
772 - 776 Write-in Systems	

EARTHWORK

811 Earthwork	Volume (CY) _____
812 Borrow	Volume in Place (CY) _____
813 Topsoil, Seed, Sod	Area Graded (SY) _____
814 Landscaping	Area Planted (SY) _____
815 Site Irrigation	No. of Sprinkler Heads (EA) _____
816 Surcharge	Fill in Surcharge (CY) _____
817 Earth Replacement	In-Place Measurement (CY) _____
818 Environmental Protection	Area Protected (ACRES) _____
819 Write-in System	

SITE IMPROVEMENTS

821 Site Improvements	Area Developed (SY) _____
822 - 825 Write-in Systems	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SITE PREPARATION MISCELLANEOUS

831 Site Dewatering (Major)	Header Pipe (LF) _____
832 - 835 Write-in Systems	

DEMOLITION

841 Remove Utilities	Length of Run (LF) _____
842 Remove Paving and Slabs	Area Removed (SY) _____
843 Remove Structures	Structure Volume (CF) _____
844 Remove/Dispose of Asbestos (Exterior)	Total Cost (LS) _____
845 Remove/Dispose of P.C.B.	Total Cost (LS) _____
846 Remove/Dispose of Contaminated Earth	Volume of Earth Removed (CY) ____
847 Write-in System	

STORM DRAINAGE

851 Storm Drainage Piping	Length of Run (LF) _____
852 Box and Arch Culvert	Length of Culvert (LF) _____
853 Drainage Facing Materials	Surface Area (SY) _____
854 - 856 Write-in Systems	

FENCING

861 Fencing (Perimeter)	Length of Fence (LF) _____
862 Fencing (Alarm)	Length of Fence (LF) _____
863 - 865 Write-in Systems	

RECREATION EQUIPMENT/FIELDS

871 Playground Equipment	Pieces of Equipment (EA) _____
872 Playing Field Equipment	Pieces of Equipment (EA) _____
873 Tennis Courts	Number of Courts (EA) _____
874 Softball/Baseball Fields	Number of Fields (EA) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

875 Football/Soccer Fields — Number of Fields (EA) _____

876, 877 Write-in Systems

SPECIAL BUILDING FOUNDATIONS

**** For SYSTEM 911 LAND PILING-DRIVEN ****
**** See Under Foundations(System 111) in Building Systems ****

912 Caissons — Number of Caissons (EA) _____

913 Pressure Injected Footing — Number of Footings (EA) _____

914 Vibrofloatation — Number of Locations (EA) _____

915 Chemical Soil Stabilization — Number of Locations (EA) _____

916 Dynamic Consolidation — Number of Locations (EA) _____

917 Piling Cast-In-Place Concrete — Length of Piling (LF) _____

RAILROAD

921 Track Work - Railroad — Length of Track (LF) _____

922 - 925 Write-in Systems

MARINE STRUCTURES PIERS

931 Piling - Marine — Length of Piling (LF) _____

932 Dolphins — Number of Dolphins (EA) _____

933 Med Mooring — Total Cost (LS) _____

934 Pier Deck — Area of Deck (SF) _____

935 Fenders — Length of Fender (LF) _____

936 Pile Clusters — Number of Clusters (EA) _____

937 Marine Specialities — Total Cost (LS) _____

938 Write-in System

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls — Total Face Area (SF) _____

942 Erosion Protection - Marine — Area Covered (SY) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

943 Riprap (Marine) — Area Covered (SY) _____

944 - 946 Write-in Systems

MARINE REPAIRS

951 Underdeck Repairs — Total Cost (LS) _____

952 Pile Repairs Marine — Length Repaired (LF) _____

953 - 957 Write-in Systems

DREDGING

961 Mobilization/Demobilization - Dredging — Total Cost (LS) _____

963 Hydraulic Dredging — Volume (CY) _____

964 Bucket Dredging — Volume (CY) _____

965 - 966 Write-in Systems

TOWERS/ANTENNAS

971 Towers — Length (LF) _____

972 Antennas — Total Cost (LS) _____

973 - 976 Write-in Systems

TUNNEL/PIPE JACKING

981 Tunneling — Volume Removed (CY) _____

982 Pipe Jacking — Length Jacked (LF) _____

983 - 986 Write-in Systems

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges — Deck Area (SF) _____

992 Overpasses — Deck Area (SF) _____

993 - 996 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX B

CONVERSION FACTORS

Quantity	Multiply	By	to Obtain	
Length	inch	25.400	millimeter	mm
	foot	0.304800	meter	m
	yard	0.914400	meter	m
	mile (U.S. Statute)	1.609347	kilometer	km
	millimeter	39.370079×10^{-3}	inch	in
	meter	3.280840	foot	ft
	meter	1.093613	yard	yd
	kilometer	0.621370	mile	mi
Area	square inch	0.645160×10^{3}	square millimeter	mm^2
	square foot	0.092903	square meter	m^2
	square yard	0.836127	square meter	m^2
	square mile (U.S. Statute)	2.589998	square kilometer	km^2
	acre	4.046873×10^{3}	square meter	m^2
	acre	0.404687	hectare	
	square millimeter	1.550003×10^{-3}	square inch	in^2
	square meter	10.763910	square foot	ft^2
	square meter	1.195990	square yard	yd^2
	square kilometer	0.386101	square mile	mi^2
	square meter	0.247104×10^{-3}	acre	
	hectare	2.471044	acre	
Volume	cubic inch	16.38706×10^{3}	cubic millimeter	mm^3
	cubic foot	28.31685×10^{-3}	cubic meter	m^3
	cubic yard	0.764555	cubic meter	m^3
	gallon(U.S.liquid)	3.785412	litre	l
	quart(U.S.liquid)	0.946353	litre	l
	cubic millimeter	61.023759×10^{-6}	cubic inch	in^3
	cubic meter	35.314662	cubic foot	ft^3
	cubic meter	1.307951	cubic yard	yd^3
	litre	0.264172	gallon (U.S.liquid)	gal
	litre	1.056688	quart (U.S.liquid)	qt
Mass	ounce(avoirdupois)	28.34952	gram	g
	pound(avoirdupois)	0.453592	kilogram	kg
	short ton	0.907185×10^{3}	kilogram	kg
	gram	35.273966×10^{-3}	ounce (avoirdupois)	oz av
	kilogram	2.204622	pound (avoirdupois)	lb av
	kilogram	1.102311×10^{-3}	short ton	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX C

UNITS OF MEASURE AND THEIR SYMBOLS

AC	Acres
BD	Hospital Beds, Normal Capacity
BL	Barrels (42 gals each)
BX	Boxes (fire alarm etc)
CF	Cubic Feet
CM	CF/Minute[1]
CP	Candle Power[1]
CY	Cubic Yards
DS	Depth of Water Over Sill @ High Tide[1]
DW	Depth of Water @ Low Tide
EA	Each
FA	Family Units (housing)
FB	Feet of Berthing (ships/boats/ small craft)
FP	Firing Point (firing ranges)[1]
GA	Gallons
GM	Gallons Per Minute
HO	Holes (golf course)[1]
KG	Thousands of Gallons Per Day, Capacity
KV	Kilovolt-Amperes, Capacity (KVA)
KW	Kilowatts[1]
LA	Lanes (bowling)[1]
LC	Light Care (hospital spaces)[1]
LF	Linear Feet
MB	Millions of BTU Per Hr. (capacity)
ME	Meters (length)[1]
MG	Millions of Gallons[1]
MI	Statute Miles
NF	Net Square Feet (housing)[1,2]
NS	Net square Feet (storage)[1,3]
OL	Outlets (number of)
OU	Operating Units
PH	Pounds Per Hour[1]
PH	Persons, Designed Capacity
SE	Seats (number of)
SF	Square Feet
SH	Stacking Height[1,3]
SI	Sites[1]
SP	Service Points[1]
SY	Square Yards
TC	Total Cubic Feet[1,3]
TH	Tons Per Hour (capacity)[1]
TN	Tons (capacity)
VE	Vehicles (number of)

[1]Not listed in DODINST 4165.3 of 24 Oct 1978, as amended
[2]As defined by NAVFACENGCOM for housing purposes
[3]As defined by NAVSUPSYSCOM for supply facilities

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX D

ACRONYMS AND ABBREVIATIONS

A	A&E	Architect and Engineer
	ABSLA	Approved Basic Stock Level of Ammunition
	ADCA	Anticipated Date of Contract Award
	AGI	Activity General Information
	AH	Alternate Host
	AICUZ	Air Installations Compatible Use Zones
	AIS	Annual Inspection Summary
	ASD	Assistant Secretary of Defense
B	BAM	Baseline Assessment Memorandum
	BASE REP	Shore Base Readiness Report
	BEAP	Base Exterior Architecture Plan
	BEQ	Bachelor Enlisted Quarters
	BESEP	Base Electronics Systems Engineering Plan
	BFR	Basic Facility Requirements
	BLS	Base Loading System
	BOQ	Bachelor Officer Quarters
C	CAUSE	Computer Assited Utility Systems Evaluation
	CCD	Category Code Directory (data base)
	CCN	Category Code Number
	CIP	Capital Improvements Plan
	CL3-D	Class 3 (Relocatable); planned for disposition (planning action)
	CL3-I	Class 3 (Relocatable); used on interim basis (planning action)
	CL3-U	Class 3 (Relocatable); temporary use (planning action)
	CMC	Commandant, Marine Corps
	CNET	Chief of Naval Education and Training
	CNO	Chief of Naval Operations
	CO	Commanding Officer
	COMNAVFACENGCOM	Commander, Naval Facilities Engineering Command
	CONSTR	New Construction (planning action)
	CONVFR	Convert From (planning action)
	CONVTO	Convert To (planning action)
	CPS	(Final) Consolidated Personnel Summary
	CPV	Current Plant Value
	CY	Cubic Yards (unit of measure)
D	D	Planning Action Designator
	DASN	Deputy Assistant Secretary of the Navy
	DCNO	Deputy Chief of Naval Operations
	DDESB	Department of Defense Explosives Safety Board
	DEMOL	Demolition (planning action)
	DF	Discount Factor
	DISPOS	Disposable Asset (planning action)
	DPS	Decision Package Sets

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

	DRA	Defense Relocation Account (funds)
	DoD	Department of Defense
E	EA	Economic Analysis
	EA	Each (unit of measure)
	EAF	Environmental Adjustment Factor
	ECIP	Energy Conservation Investment Program
	EE	Engineering Evaluation
	EFD	Engineering Field Division
	EMCS	Energy Monitoring and Control Systems
	EOD	Explosives Ordnance Disposal
F	FACSO	Facilities Systems Office (Port Hueneme, CA)
	FEC	Foreign Exchange Cost
	FEP	Facility Energy Plans
	FHS	Family Housing Plans
	FPD	Facility Planning Document
	FRP	Facilities Requirements Plan
	FUR	Facilities Utilization Report
	FYDP	Five Year Defense Program
G	GEMS	Graphics Engineering and Mapping System
H	H/T	Host/Tenant
	HCA	Hazard Control Assessment
	HVAC	Heating, Ventilation, and Air Conditioning
I	IBOP	International Balance of Payments
	ID	Planning Action Identifiers
	IP	Investment Program
J	JFAI	Joint Formal Acceptance Inspection
L	LS	Lump Sum (unit of measure)
M	MACIC	Master Activity General Information and Control
	MBTU	Million British Thermal Units
	MCNR	Military Construction Naval Reserve
	MCON	Military Construction, Navy
	MCP/MIS	Military Construction Programming Management Information System
	MILCON	Military Construction
	MILPERS	Naval Military Personnel Command
	MODIFY	Modification (planning action)
N	NACIP	Navy Assessments and Control of Installation Pollutants
	NADEP *	Naval Aviation Depot
	NAF	Nonappropriated Funded; Nonappropriated Fund
	NAVAIRSYSCOM	Naval Air Systems Command
	NAVCOMPT	Comptroller of the Navy
	NAVFAC	Naval Facilities Engineering Command (for directives and publications)
	NAVFACENGCOM	Naval Facilities Engineering Command
	NAVFACENGCOMHQ	Naval Facilities Engineering Command, Headquarters
	NAVMEDCOM	Naval Medical Command
	NAVOSH	Navy Occupational Safety and Health
	NAVRESSO	Navy Resale and Services Support Office

* Formerly NARF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

	NAVSEASYSCOM	Naval Sea Systems Command
	NAVSUPSYSCOM	Naval Supply Systems Command
	NCR	National Capital Region
	NESSEC	Naval Electronics Systems Security Engineering Center
	NFADB	Navy Facility Assets Data Base
	NFH	Navy Family Housing
	NMCRC	Navy Marine Corps Reserve Centers
	NPV	Net Present Value
	NS	Net Square Feet (unit of measure)
O	O&M,N	Operations & Maintenance, Navy (funds)
	OCR	Occupational Safety and Health Control Report
	OMB	Office of Management and Budget
	OPNAV	Office of the Chief of Naval Operations
	OSD	Office of the Secretary of Defense
	OUTG-C	Outgrant, continue (planning action)
	OUTG R	Outgrant, retrieve (planning action
P	PART FRP	Partial Facilities Requirements Plan
	PCR	Pollution Control Report
	PCS	Permanent Change of Station
	PEA	Preliminary Environmental Assessment
	PED	Project Engineering Documentation
	PHA	Preliminary Hazard Analysis
	PID	Project Identification Document
	POM	Program Objectives Memorandum
	PVA	Present Value Analysis (economic analysis)
	PWC	Public Works Center
R	RAC	Risk Assessment Code
	RCRA	Resource Conservation and Recovery Act
	RDT&E	Research, Development, Test & Evaluation
	REASFR	Reassignment From (planning action)
	REASTO	Reassignment To (planning action)
	RENOV	Renovation (planning action)
	REPLCE	Replace (planning action)
	RETAIN	Retain For Contingency (planning action)
	RETR	Retrieve (planning action identifier)
	RJE	Remote Job Entry
	RL	Requirements List
S	SA	Special Area
	SCF	Supplemental Category Flag
	SECDEF	Secretary of Defense
	SECNAV	Secretary of the Navy
	SF	Square Feet, Gross (unit of measure)
	SFMR	Supply Facility Management Report
	SFPB	Shore Facilities Programming Board
	SFPS	Shore Facilities Planning System
	SH	Stacking Height (unit of measure)
	SIMA	Shore Intermediate Maintenance Activity
	SIOH	Supervision, Inspection, and Overhead

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

	SIR	Savings to Investment Ratio (economic analysis)
	SNDL	Standard Navy Distribution List
	SPP	Sponsor Program Proposal
	SY	Square Yards (unit of measure)
T	TCF	Total Cubic Feet (unit of measure)
	TDY	Temporary Duty
	TOA	Total Obligation Authority
	TPAA	Total Proposed Adequate Assets
U	UIC	Unit Identification Code
	UM	Unit of Measure
	UPH	Unaccompanied Personnel Housing (now called bachelor housing)
	USA	Utility System Assessments
	USE	Continued Use (planning action)
	UTS	Utility Technical Studies
V	VAC	Vacant (planning action identifier)
	VI	Validation Indicator

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX E

AIR CONDITIONING TONNAGE GUIDE

CATEGORY CODE	TITLE	SQUARE FEET OF FLOOR AREA / TON OF A/C
171-15	Reserve Centers	450 - 600
171-20	Applied Instruction Building	NO STANDARD
171-25	Auditorium	0.04 - 0.06 tons/seat
171-35	Flight Simulator	100 - 300
610-10	Administration Building	350 - 400
721-11	UEPH	1000 - 1200
722-10	Dining Facility	175 - 450
724-11	UOPH	1000 - 1200
730-83	Chapel	300 - 500; or 0.02 - 0.03 tons/seat
740-02	Location Exchange	NO STANDARD
740-20	Temporary Lodging	550 - 750
740-23	Commissary	800 - 900
740-25	Family Service Center	375 - 400
740-40	Bowling Alley	0.8 - 1.4 tons/seat
740-63	Enlisted Men's & Officers Clubs	600 - 650
740-74	Child Care Center	350 - 450
	Classrooms	400 - 500
	Computer Room	50 - 150
	Dispensaries	450 - 550
	Hospital Patient Rooms	450 - 550
	Married Personnel Quarters	900 - 1275
	Recreation Rooms	375 - 450
	Shops (Precision Equipment)	450 - 500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PART 2: COST CERTIFICATION COST GUIDANCE

CONTENTS

		Page
PART 2	COST CERTIFICATION COST GUIDANCE	80
Section 9	INTRODUCTION	81
9.1	Purpose and Background	81
9.2	Importance	81
9.3	Contents	81
9.4	Comments or Suggestions	81
Section 10	SCOPE CONSIDERATIONS	82
10.1	Introductory Paragraph	82
10.2	Operation and Maintenance Support Information (OMSI)	82
10.2.1	Types of OMSI	82
10.2.2	OMSI Estimate	82
10.3	Intrusion Detection Systems (IDS)	84
10.3.1	MCON Fundable IDS	84
10.3.2	Technical Support	84
10.3.3	Non-MCON Fundable IDS	84
10.4	Land Acquisition	85
10.5	Hyperbaric Requirements	85
10.6	Shielding Requirements	85
10.6.1	Tempest/HEMP (High Altitude Electromagnetic Pulse)/ EMP (Electromagnetic Pulse) Shielding	85
10.6.2	Coordination Required to Meet Objectives	85
10.7	Uninterruptible Power System (UPS)	85
10.8	Communication Requirements	85
10.8.1	Telephone and Communications Installations	85
10.8.2	Funding Requirements	86
10.8.3	Funding Exceptions	86
10.9	Built-in Retrieval Equipment Racks (Warehouses)	86
10.9.1	MCON Funded	86
10.9.2	OPN Funded	86
10.9.3	Warehouse Design	86
10.10	Asbestos Related Work	86
10.11	Computation of Gross Area	87
10.11.1	BEQ Requirements	87
10.11.2	BOQ Area Requirements	87
10.12	International Balance of Payments (IBOP)	87
10.12.1	IBOP Implications	90
10.12.2	Normal Procedures	90
10.12.3	Planned Procedures	90
10.12.4	Basis for Choice of Construction Procedure	90
10.12.5	Presentation of IBOP Data on DD Form 1391	90
10.12.6	Requirements Regarding Returns to the United States	90
10.13	Instructions for DD Form 1391	90
10.14	Instructions for Budget Estimate Summary Sheet	93
10.15	Instructions for the Building SF Cost Development Sheet	95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 9: INTRODUCTION

9.1 Purpose and Background. This guide is to assist in the preparation of Cost Certification Estimates for the appropriate fiscal year Military Construction, Navy (MCON) projects; NAVFACENGCOM. NAVFACINST 11010.44E requires a Facility Study to be prepared by the Activity. The Facility Study provides the initial conceptual cost. Many items described herein and required as part of the Cost Certification were also required as part of the Facility Study. It should be recognized that this does not represent inadvertent duplication. Rather, it is an effort to evaluate and refine the Facility Study as the design process evolves.

9.2 Importance. The importance of an accurate planning cost estimate cannot be over emphasized, as it could be the determining factor as to whether or not the project is included in the budget year program. Although requirements and justifications are important parts of project submittals, this publication deals only with scope and cost. Scope is included because an estimate is no better than the definition of scope that has been determined. An incomplete scope will result in an erroneously proposed project cost.

9.3 Contents. The cost certification components which are described in this guide are:

a) DD Form 1391 (Figure 14)
b) Budget Estimate Summary Sheet and backup estimate (Figure 15)
c) Building Square Foot Cost Developement Sheet (Figure 16)
d) Cost Model Questionnaire (paragraph 14.7)

9.4 Comments or Suggestions. You are encouraged to advise the Engineering Field Division (EFD) Cost Engineering Branch (Code 407) of errors, conflicts, or omissions detected while using this guide, as well as to suggest improvements which will help you produce higher quality Cost Certification Estimates. Advice or comments should be forwarded to the EFD Code 407 by December 1 or June 1 to be considered and included in the updates.

Points of contact are:

DIVISION	407
Atlantic Division	(804) 444-9907
Chesapeake Division	(202) 433-3315
Northern Division	(215) 897-6156
Pacific Division	(808) 471-8436
Southern Division	(803) 743-0463
Western Division	(415) 742-7760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 10: SCOPE CONSIDERATIONS

10.1 Introductory Paragraph. The Building Square Foot Cost Development must include separate entries for specific features of additional cost. Certain features and their cost derivation are discussed below. Other specific features may not be discussed in this section, but should be a separate item to emphasize significant cost.

10.2 Operation and Maintenance Support Information (OMSI). OMSI is a product developed during design and construction of a facility to give the activity clear comprehensive data for use in operating and maintaining new facilities as well as to assure economical, safe life cycle operation and maintenance. The principal OMSI elements requiring consideration are as follows:

a) Operation and Maintenance Technical Documentation
b) Supply Support (repair parts, fuels, lubricants, etc.)
c) Maintenance Planning
d) Maintenance and Test Equipment
e) Operating and Maintenance Indoctrination
f) Staffing and Budgeting
g) Inspection Plan
h) Training
i) Extended Special Warranties
j) Basic Data for Facilities Support Contracts/ Performance Work Statements (FSC/PWS)

10.2.1 Types of OMSI. OMSI is usually needed on any project where operating and maintenance information is called for in the construction specifications. The degree of OMSI will vary with the type of facility. For identification, projects requiring OMSI can be classified as either a Type A, Type B, or Type C. Facilities that usually require a Type A are listed in Table 7, and those requiring a Type B, in Table 8. A User Manual (operating/maintenance information usually provided on a construction project but assembled and indexed in a consolidated manual) will be provided for all three types. Complex facilities requiring operating/maintenance information above and beyond that in the User Manual should be classifed as Type A and be provided an Operation and Maintenance Manual in addition to the User Manual. Facilities requiring operating information above and beyond that in the User Manual should be classified as Type B and be provided an Operating Manual in addition to the User Manual. Rather simple facilities requiring only a User Manual should be classified as Type C.

a. Type A: Operation & Maintenance Manual plus User Manual
b. Type B: Operating Manual plus User Manual
c. Type C: User Manual

10.2.2 OMSI Estimate. In estimating the cost of OMSI for a specific project, use the best available information. If a good basis to make the estimate does not exist, Table 9 should be used for a preliminary estimate based upon a percentage of the total primary facility cost. If OMSI is greater than $50,000, it shall be a separate line item on the DD Form 1391 and Budget Estimate Summary Sheet. If OMSI is less than $50,000, it shall be part of the building cost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 7
Facilities Usually Requiring Type A OMSI

FACILITY TYPE	BASIC CATEGORY CODE
PETROLEUM, OIL & LUBRICANT (POL) FACILITIES	120
COMPUTER OPERATIONS CENTER (LARGE/COMPLEX)	143
TRAINING FACILITIES WITH COMPLEX SYSTEMS	171
AIRCRAFT MAINTENANCE SHOPS	211
MISSILE ASSEMBLY & MAINTENANCE SHOPS	212
SHIP MAINTENANCE SHOPS	213
LABORATORIES	310
CENTRAL REFRIGERATION PLANTS	431, & 826
MEDICAL FACILITIES	500
DINING FACILITIES	722
POWER PLANTS	811
HEATING PLANTS	821
INDUSTRIAL WASTE & SEWAGE TREATMENT PLANTS	831

Table 8
Facilities Usually Requiring Type B OMSI

FACILITY TYPE	BASIC CATEGORY CODE
OPERATIONAL & TRAINING FACILITIES (NOT REQUIRING TYPE A)	100
MAINTENANCE - WEAPONS	215
AMMUNITION, EXPLOSIVES & TOXICS	316
LIQUID FUEL STORAGE - BULK	411
WATER - SUPPLY, TREATMENT & STORAGE - PORTABLE	841
MISCELLANEOUS UTILITIES	890

Table 9
OMSI Cost for Preliminary Estimates
(based upon a percentage of primary facility cost)

TOTAL PRIMARY FACILITY COST	ESTIMATED OMSI COST BY TYPE		
	A	B (1)	C (2)
BELOW $5,000,000	1.00-2.00%	0.50-1.00%	0.25-0.50%
$5,000,000 to 20,000,000	0.75-1.50%	0.40-0.75%	0.20-0.40%
$20,000,000 to $50,000,000	0.50-1.00%	0.25-0.50%	0.15-0.25%
ABOVE $50,000,000	0.40-0.75%	0.20-0.40%	0.10-0.20%

NOTES:
(1) The minimum amount for a Type B should be $11,000.
(2) The minimum amount for a Type C should be $4,000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

10.3 Intrusion Detection Systems (IDS). Enter any MCON-funded requirements for Intrusion Detection Systems (IDS), including additional related costs. Generally IDS projects are based on function or location, thereby determining IDS funding. The following chart illustrates the funding type according to IDS function and location.

New Systems For:	Funding Type
New Building within U.S.	MCON
Building at Nuclear Ordnance, Arms, Ammo, and Explosives sites	NON-MCON
Other IDS including Taut Wire Sensor	NON-MCON
New Buildings Outside U.S.	NON-MCON
Base Perimeter Security System	NON-MCON

10.3.1 MCON Fundable IDS. Any of the following items and their interconnecting circuits may be considered part of an IDS:

a) Annunciation panels and cabinets;
b) Visual and audible annunciators;
c) Balanced magnetic switches (BMS);
d) Proximity (capacitance) sensors;
e) Volumetric sensors (microwave and ultrasonic);
f) Wire grids;
g) Vibration grids;
h) Infrared sensor; and
i) Power supplies integral to above items.

Facility support, such as utilities, conduit runs, equipment space, building, conventional fencing, etc., required to support IDS associated with a MCON project are properly chargeable to MCON funds and should be included in the MCON project scope. A simple system of balanced magnetic switches should be called a security system, with more complex systems called IDS.

10.3.2 Technical Support. Technical support for MCON-funded IDS is available on a reimbursable basis from NAVELEXENGCEN Charleston. This support includes guidance on scope and technical review of compiled IDS designs at appropriate steps in project development and design. NAVFAC will attempt to identify MCON projects with major IDS and request NAVELEXENGCEN Charleston prepare a Base Electronic System Engineering Plan (BESEP) for each.

10.3.3 Non-MCON Fundable IDS. The following items cannot be MCON funded as part of an IDS:

a) Closed circuit television (CCTV) cameras, monitors, and video recorders; and
b) Taut wire sensor systems.

CCTV and taut wire sensor systems, including installation of posts, footings, and integral ductwork/conduit, have been determined to be equipment and are the responsibility of Space and Naval Warfare Systems Command

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(SPAWARSYSCOM). Claimant, user, or SPAWARSYSCOM, depending on current policy, will budget for and fund non-MCON IDS requirements. These Commands must be notified of a project's non-MCON IDS requirements and your need for data on facility support requirements. This should generally result in a BESEP.

10.4 Land Acquisition. Obtain instructions from major claimant and EFD Code 024 (Real Estate).

10.5 Hyperbaric Requirements. CHESNAVFACENGCOM (FPO-1) is responsible for executing the design and procurement phases of shore based hyperbaric facilities. When the project scope includes provisions for hyperbaric facilities, you must contact CHESNAVFACENGCOM (FPO-1) to make appropriate arrangements for the design, procurement, and installation of the required hyperbaric facilities and the associated cost estimate.

10.6 Shielding Requirements.

10.6.1 Tempest/HEMP (High Altitude Electromagnetic Pulse)/EMP (Electromagnetic Pulse) Shielding. NESSEC Washington has been very effective in limiting requirements for shielding in MCON facilities. NAVFAC message 151455Z Jun 84 provides the guidance on determining the extent of RF shielding required on projects involving installation of electronic equipment. For affected projects, ensure NESSEC Washington, DC, has formally reviewed and commented on Tempest shielding requirements. If HEMP/EMP shielding is identified as a user requirement, consult with NAVFAC 04T prior to A/E scoping.

10.6.2 Coordination Required to Meet Objectives. Satisfying shielding objectives is often very difficult; it requires close coordination between the customer, the designer, and the construction contractor to establish this scope requirement. Good information transfer from designers to ROICC personnel is essential. The use of expert consultants during design and construction, and the development of both interim and final testing plans and criteria, should be evaluated and incorporated when appropriate.

10.7 Uninterruptible Power System (UPS). If the UPS is required only to support personal property (electronic equipment) installations, it may not be procured and installed with MCON funds. Instead, its procurement and installation cost must be separately budgeted by the Major Claimant/User as an integral part of the associated electronic equipment package. Please ensure that the Major Claimant/User is aware of this requirement. However, facility items required to support the UPS such as power panels, flooring, battery rooms, etc., are properly chargeable to MCON and should be included in the project scope.

10.8 Communication Requirements.

10.8.1 Telephone and Communications Installations. It is the responsibility of the designer to determine the design requirements, and design the facility's telephone system. Based on NAVCOMPT guidance, the general policy is to include only the cost of the following as required to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

support future installation of telephone and other communication systems wiring internal to a MCON facility:

a) EXTERIOR - All supporting structures (e.g., telephone poles, underground conduits, underground ductbanks, manholes, handholes, etc.).
b) INTERIOR - Empty conduit with pull wire, outlet boxes, conduit bushings, backboards, and cable trays to support future installation of telephone wiring.

10.8.2 Funding Requirements. Normally, the wiring, instruments, and equipment are to be funded by other than MCON regardless of whether the system is leased or Government owned. The responsibility of Telephone Management Division East (TMD East) is to assist the user in identifying non-project funds to pay for the following items to be installed as a separate contract (not part of the MCON project):

a) EXTERIOR - All cabling and switchgear.
b) INTERIOR - All wiring, instruments, and equipment.

10.8.3 Funding Exceptions. In certain situations, such as Medical facilities and Navy owned systems in overseas areas, the entire systems may be MCON funded where practical and justifiable. These exceptions to the general policy should be clearly identified and justified.

10.9 Built-in Retrieval Equipment Racks (Warehouses). Policy on funding specialized equipment in automated warehouses is as follows:

10.9.1 MCON Funded. If the project includes a guide wire or guide rail built into the facility, include the cost of the guide wire or rail system, vehicles which ride on the system (system captive), and the storage racks serviced by the system in the MCON project.

10.9.2 OPN Funded. If the retrieval system does not include a built-in guide wire or rail system, the retrieval vehicles and racks are to be identified as collateral equipment.

10.9.3 Warehouse Design. The design of all warehouses must be coordinated with NAVSUPSYSCOM as the Navy experts in warehouses. NAVSUPSYSCOM must formally approve the design concept prior to your achieving a 35% design. To help with the concept NAVSUPSYSCOM has developed a computer program to determine the least cost alternative for various stacking heights and retrieval systems. As the foot print and stacking height affect the project cost, and some retrieval systems are MCON funded, these decisions must be made prior to starting design. You should coordinate design with NAVSUPSYSCOM. The Headquarters point of contact is Code 04B2, Autovon, 325-0044.

10.10 Asbestos Related Work. A/E firms are finding it difficult, if not impossible, to obtain professional liability insurance for work involving asbestos, hazardous waste, and pollution abatement. The Federal Acquisition Regulation (FAR) does not require A/E firms to carry professional liability

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

insurance. NAVFACENGCOM does not have the authority to provide blanket indemnification for work involving hazardous waste. NAVFACENGCOM policy is that when we know asbestos or other hazardous waste will be encountered, or when there is a good probability of asbestos or other hazardous waste, this fact is to be noted in the Commerce Business Daily (CBD) synopsis for any affected contract. We should NOT include this warning in every CBD synopsis as a matter of routine; it should only be used where the hazards cited are known or probable. During interviews the willingness of each firm to undertake any required asbestos, hazardous waste, or pollution abatement work is to be clearly established and made a matter of record. Please continue to keep us informed of problems in this area. The Headquarters point of contact is, Code 04BD, Autovon 325-0043.

10.11 Computation of Gross Area. For all gross and net area calculations use Chapter 4 of MIL-HDBK-1190, Facility Planning and Design Guide. Gross area includes the total area of all floors, including mezzanines, basements, and penthouses as determined by the effective outside dimensions of the building. One-half the area shall be included in the gross area for balconies and porches, covered raised loading platforms, covered ground level or depressed loading facilities, covered but not enclosed passageways or walks, covered and uncovered but open stairs, and covered ramps. Excluded from the gross area: crawl spaces, exterior uncovered loading facilities, open courtyards, roof overhangs and soffits, uncovered ramps and stoops, utility tunnels and raceways. Separate central energy plants or utility buildings serving large complexes are not included in the gross modular area shown in Table 10. Separate support buildings should be programmed as a line item on DD Form 1391.

10.11.1 BEQ Area Requirements. For Bachelor Enlisted Quarters, the criteria shown in Table 10 is to be used.

10.11.2 BOQ Area Requirements. For Bachelor Officer Quarters the following criteria are to be used: Reference MIL-HDBK-1190. The following requirements shall be used to program BOQ projects:

a) Grades 02 and below: Quarters shall provide a private suite of approximately 330 square feet net area, consisting of combination of living/bedroom, bathroom, and pullman-type kitchen. The gross floor area shall approximate 475 square feet per officer.

b) Grades 03 and above: Quarters shall provide a private suite of approximately 460 square feet consisting of living room, bedroom, bathroom, and kitchen. The gross floor area shall approximate 650 square feet per officer.

10.12 International Balance of Payments (IBOP). The IBOP Summary is only included when preparing the cost estimate for projects in specific foreign areas. Information on the exempt areas is available from the EFD Project Management Office. The IBOP Summary shall be developed on an 8-1/2 by 11-inch size plain bond paper as illustrated in Figure 13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 10
Bachelor Enlisted Quarters Area Table

MODULES (2 Rooms and Bath)	FLOORS (1)	AREA SF (2)	ELEVATORS (3)	SPRINKLER SYSTEM
60	3	800	---	---
72	3	785	---	---
96	4	800	F	(4)
178	6	840	F & P	YES

(1) Modules per floor must be divisible by 2, with no exceptions.
(2) Total gross module area including its share of the non-module areas.
(3) F (Freight) & P (Passenger)
(4) Provide a fire stand pipe system if sprinkler sprinkler system is not required.
(5) The data in this table is from specific projects that satisfy the net area requirements of MIL-HDBK-1190. Gross area for combinations not shown must be determined or verified by the EFD, Code 401.

GRADE	ACCOMMODATIONS
E-1 thru E-4	4 Men per Module
E-5 thru E-6	2 Men per Module
E-7 thru E-9	1 Man per Module

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

1. Activity (Name and Location) (CAPITAL LETTERS)			Date	
2. Project Title (CAPITAL LETTERS)			3. P-No.	
	NORMAL PROCEDURES		PLANNED PROCEDURE	
	Construction	*Construction Total Material	Construction	*Construction Total Material
BUDGET COST	1,030,000	-	1,100,000	-
LESS RETURNS TO THE US				
a) US End Products	-	-	100,000	-
b) US Services	5,000	-	5,000	-
c) US Transportation	-	-	20,000	-
TOTAL RETURNS	5,000	0	125,000	0
FOREIGN EXCHANGE COST (FEC)	1,075,000		975,000	

This example makes the following assumptions:

1. Normal procedure; all foreign materials and contractors, only return to US is .5% SIOH.
2. Planned procedure; purchase of a pre-engineered metal building in the US at the same price as in the foreign country, shipping by a US line, .5% SIOH is returned to the US.

Returns to US include escalation and contingencies. Overhead and profit depends upon location of contractor.

SUMMARY OF IBOP DATA

*CWE is the same as total request rounded for selected procedures.

	NORMAL PROCEDURE	PLANNED PROCEDURE	PLANNED PROCEDURE EFFECT
CURRENT WORKING ESTIMATE	1,080	1,100	+ 20
FOREIGN EXCHANGE COST (FEC)	1,075	975	- 100

* Materials, supplies and equipment (including government furnished material procured abroad) acquired by the Navy from construction funds and provided to contractors for incorporation into foreign construction projects.

Figure 13
Sample IBOP Summary

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

10.12.1 IBOP Implications. Current directives require action by cognizant addresses to maintain Foreign Exchange Costs (FEC) at a minimum. IBOP IMPLICATIONS will be prepared to show the effect of construction under both NORMAL and PLANNED (IBOP) procedures. This effort is to permit analysis and response by NAVFAC to inquiries regarding items contributing to FEC.

10.12.2 Normal Procedures. Those construction procedures which would normally be used at a particular location if no effort were made to suppress FEC.

10.12.3 Planned Procedures. Those procedures utilized at a particular location to minimize FEC with specific support and emphasis on:

a) Adhering to pertinent executive orders, U.S. laws, status of forces agreements, and/or treaties which affect our contractual freedom abroad;
b) Maximum feasible use of U.S. contractors as allowed by paragraph 10.12.3a;
c) Maximum feasible use of U.S. materials, end products, and equipment as allowed by paragraph 10.12.3a;
d) Maximum use of U.S. flag ocean and air carriers;
e) Utilization of competent military labor where available;
f) Designs incorporating portable van-type installations and structures prefabricated in the United States.

10.12.4 Basis for Choice of Construction Procedure. Generally, planned procedures will be recommended where for every dollar increase in Current Working Estimate (CWE) from NORMAL to PLANNED there is a resulting decrease in FEC of at least two dollars, and NORMAL procedures will be recommended otherwise. An explanation for the deviation will be provided if the EFD recommends construction at the NORMAL level and cost estimates justify programming at the planned level.

Exceptions to the above criteria are allowed where country-to-country agreements specifically establish construction procedures, or project urgency is an overwhelming factor.

10.12.5 Presentation of IBOP Data on DD Form 1391. The DD Form 1391 will be prepared to show costs at the recommended level. IBOP data will be shown on the DD Form 1391 with entries asterisked to show the corresponding CWE and FEC amounts for the recommended procedure. Such IBOP entries will be shown as:

IBOP DATA:	NORMAL	PLANNED		NORMAL	PLANNED
CWE	$550,000	$590,000*	FEC	$330,000	$220,000*

*Recommended construction method

10.12.6 Requirements Regarding Returns to the United States. Other information requirements regarding returns to the United States are to be shown at the end of the Cost Estimates. This additional data is required in order that NAVFAC may provide estimates of IBOP expenditures as required by higher authority.

10.13 Instructions for DD Form 1391. The following instructions correspond to the circled numbers shown in Figure 14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

1. Date shall be the day submitted. Dates must be revised if a resubmittal is made.

2. Enter the five-digit category code number from NAVFAC P-72 to identify the primary facility. In cases of multi-use facilities, enter the category code which represents the largest cost of the project.

3. Block 8 - "Project Cost" shall be the same as the "TOTAL REQUEST ROUNDED" in block 9. This cost shall be escalated to 1 April of the appropriation year, except for assigned foreign areas.

4. The Area Cost Factors and Foreign Exchange Rates for common locations are included in this manual.

5. The line items shown are generally suitable for most projects. They should be tailored to suit the individual project - discuss this with the EFD Cost Engineering Branch. The Cost figures in parenthesis should add to equal "PRIMARY FACILITY" cost or "SUPPORTING FACILITIES" cost. The building SF cost is carried over from the budget estimate sheet (Figure 15).

6. Built-in Equipment are those systems designated by a (1) on the CES Standard System List (paragraphs 15.1 and 15.2). Equipment which is permanently installed as an integral part of the facility is built-in equipment and is funded as part of the MILCON project cost.

7. Contingency will be 5% for all projects.

8. Use 5.5% SIOH for all projects unless directed otherwise.

9. Rounded cost estimate:
   less than $1,000,000 - nearest 10,000
   1,000,000 - 5,000,000 - nearest 50,000
   Over 5,000,000 - nearest 100,000

10. Must agree with total for all other categories of equipment on collateral equipment list other than built-in equipment. If not available, type "(LIST NOT AVAILABLE)" in place of "(NON-ADD)." Built-in equipment is MCON funded and normal built-in equipment cost is included in guidance SF cost. Enclose cost figures in parentheses.


11. If the project includes more than one structure or location, address each in a separate paragraph in block 10 and separately in block 9.

12. Draw a line between blocks 10 and 11.

13. IBOP entry is required for assigned foreign areas.

NOTE: If the A/E has access to an IBM compatible Personal Computer and Lotus 1,2,3 Version 2.0, then the government will provide an automated template to assist in the development of the 1391's and Budget Estimate Summary Sheets. To obtain a copy of the template the A/E must supply 1,360K, double sided, double density, 5 1/4-inch floppy diskette. Contact the EFD, Code 407, for further information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

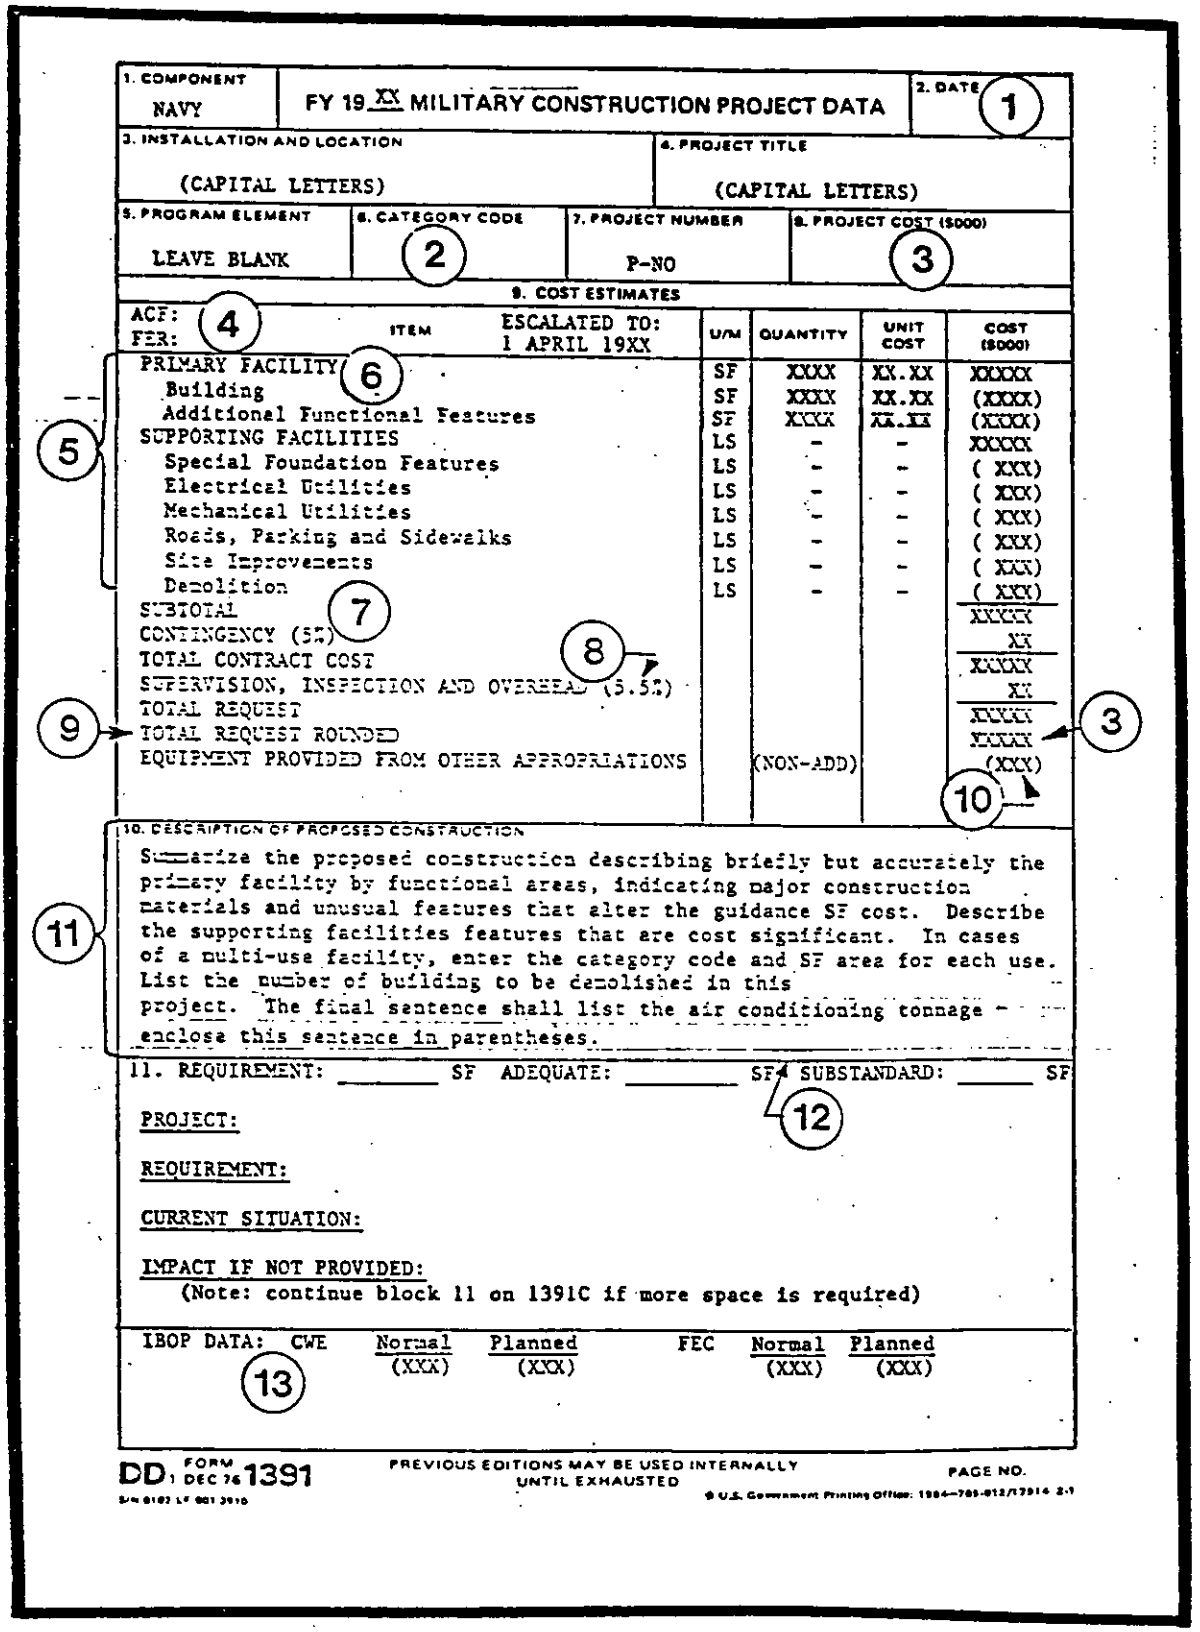

1. COMPONENT: NAVY
FY 19XX MILITARY CONSTRUCTION PROJECT DATA
2. DATE (1)
3. INSTALLATION AND LOCATION: (CAPITAL LETTERS)
4. PROJECT TITLE: (CAPITAL LETTERS)
5. PROGRAM ELEMENT: LEAVE BLANK
6. CATEGORY CODE (2)
7. PROJECT NUMBER: P-NO
8. PROJECT COST ($000) (3)
9. COST ESTIMATES
ACF: FER: (4)

ITEM (ESCALATED TO: 1 APRIL 19XX)	U/M	QUANTITY	UNIT COST	COST ($000)
PRIMARY FACILITY (6)	SF	XXXX	XX.XX	XXXXX
Building	SF	XXXX	XX.XX	(XXXX)
Additional Functional Features	SF	XXXX	XX.XX	(XXXX)
SUPPORTING FACILITIES (5)	LS	-	-	XXXXX
Special Foundation Features	LS	-	-	(XXX)
Electrical Utilities	LS	-	-	(XXX)
Mechanical Utilities	LS	-	-	(XXX)
Roads, Parking and Sidewalks	LS	-	-	(XXX)
Site Improvements	LS	-	-	(XXX)
Demolition	LS	-	-	(XXX)
SUBTOTAL (7)				XXXXX
CONTINGENCY (5%)				XX
TOTAL CONTRACT COST (8)				XXXXX
SUPERVISION, INSPECTION AND OVERHEAD (5.5%)				XX
TOTAL REQUEST (9)				XXXXX
TOTAL REQUEST ROUNDED				XXXXX (3)
EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS		(NON-ADD)		(XXX) (10)

10. DESCRIPTION OF PROPOSED CONSTRUCTION (11)

Summarize the proposed construction describing briefly but accurately the primary facility by functional areas, indicating major construction materials and unusual features that alter the guidance SF cost. Describe the supporting facilities features that are cost significant. In cases of a multi-use facility, enter the category code and SF area for each use. List the number of building to be demolished in this project. The final sentence shall list the air conditioning tonnage - enclose this sentence in parentheses.

11. REQUIREMENT: _____ SF ADEQUATE: _____ SF SUBSTANDARD: _____ SF (12)

PROJECT:

REQUIREMENT:

CURRENT SITUATION:

IMPACT IF NOT PROVIDED:
(Note: continue block 11 on 1391C if more space is required)

IBOP DATA: (13)	CWE	Normal	Planned	FEC	Normal	Planned
		(XXX)	(XXX)		(XXX)	(XXX)

DD FORM 1 DEC 76 1391 — PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED — PAGE NO.

Figure 14
Sample 1391 for Cost Certification Estimate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

10.14 Instructions for Budget Estimate Summary Sheet. The following instructions correspond to the circled numbers shown in Figure 15.

1. Escalate to 1 April of the fiscal year of planned appropriation. See overseas area cost factors for requirement of escalation to one third point of construction. NAVFAC escalation chart will be used for all projects.

2. Show project title. If summary sheet is for one building (or any portion of a project) so indicate. In that case, provide one summary sheet for totals transferred from sub-summary sheets.

3. Enter area cost factor.

4. Contingency will be 5% for all projects.

5. FER - Foreign Exchange Rate - applicable to overseas projects.

6. Show Gross Building Area for facility priced on the summary sheet. Compute the gross area in accordance with paragraph 10.11.

7. System Quantity - Quantities applicable to the building systems. Use the CES Standard System List.

8. Unit cost for all systems shown based upon the building gross area.

9. Unit cost for system shown based upon systems quantity.

10. Round cost to nearest thousand.

11. Cost of built-in equipment. Total for "Built-in Equipment" must match the built-in equipment on DD Form 1391 and on collateral equipment list.

12. Enter 5.5% Supervision, Inspection and Overhead (SIOH).

13. Rounding - See DD Form 1391 Instruction. This figure must agree with block 8 on DD Form 1391.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

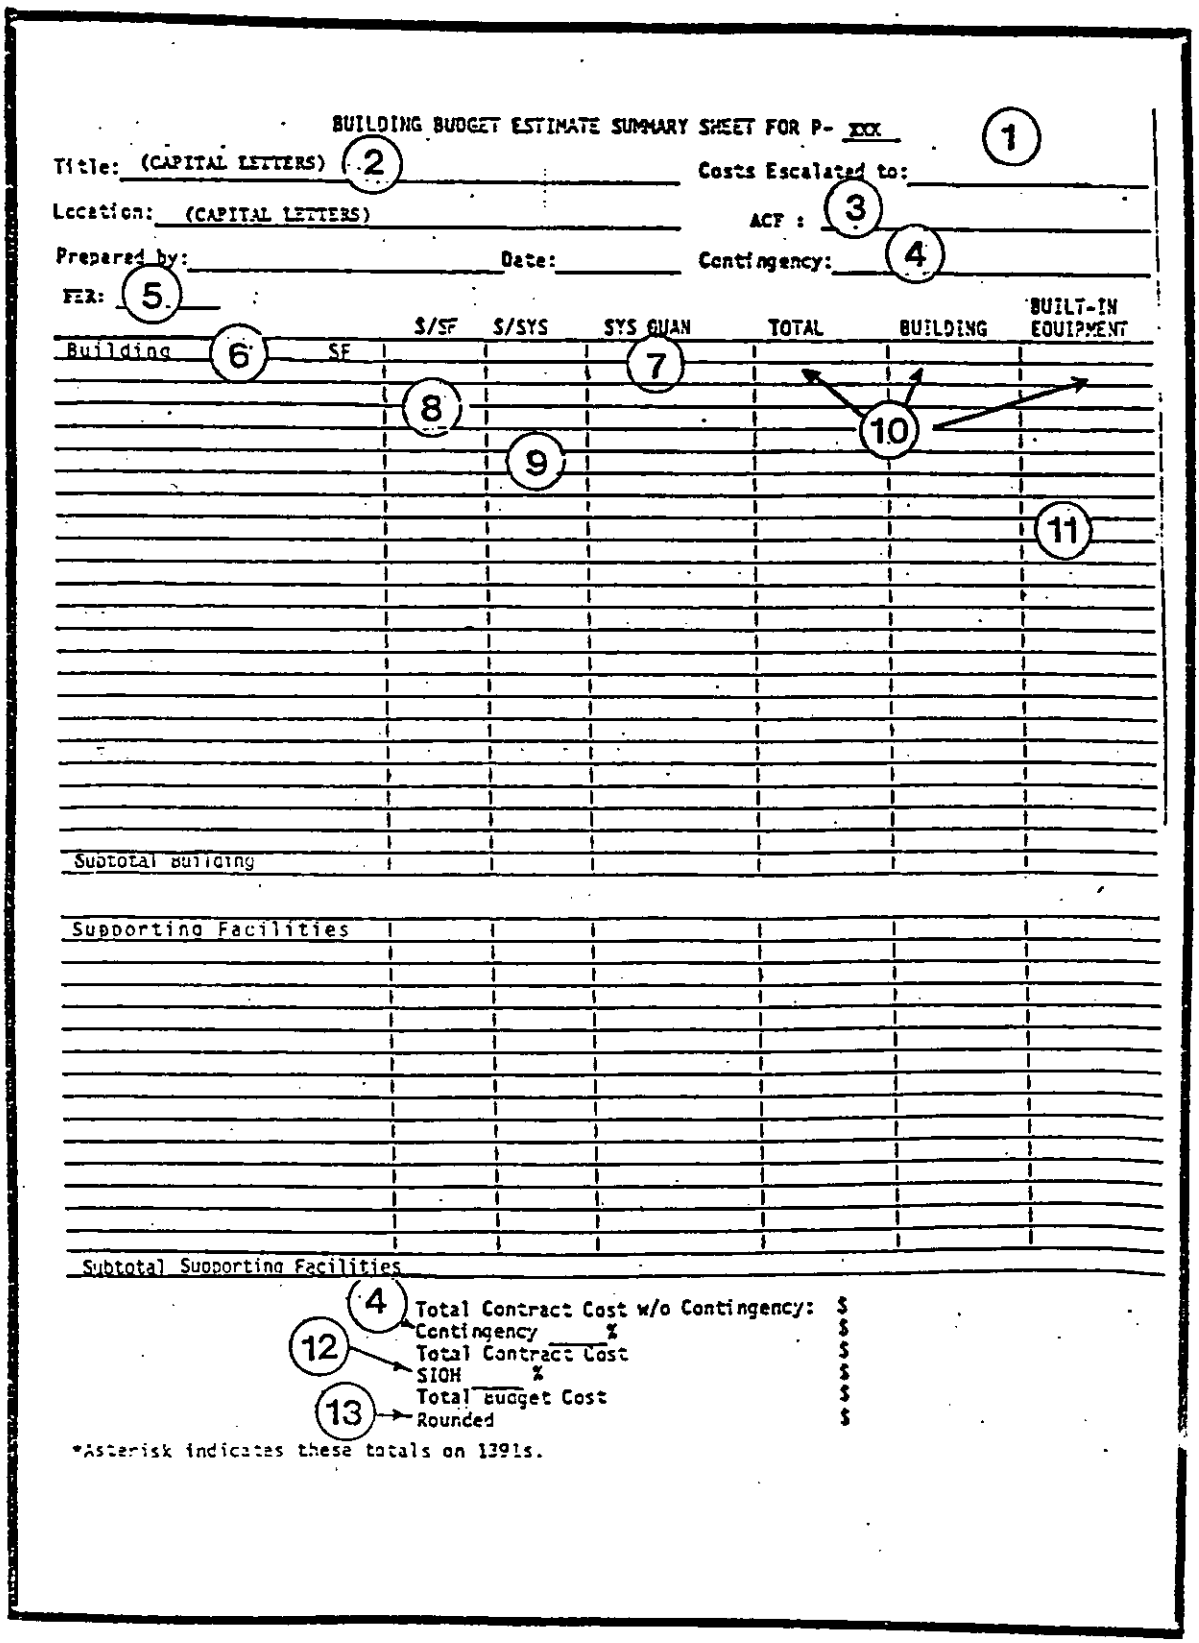


Figure 15
Building Budget Estimate Summary Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

10.15 Instructions for the Building SF Cost Development Sheet. (See Figure 16).

a) Guidance Cost Priorities:

1. NAVFAC Guidance Cost, Code 051
2. SF cost obtained from historical data of comparable projects (cost must be obtained from or verified by code 407)

b) The guidance cost must be adjusted to allow for differences in size (see Figure 17), area cost factors, and escalation (see Figure 18). The area cost factors are listed in paragraphs 12.1 and 12.2.

c) The guidance cost represents a typical project, including all normal built-in equipment. Identification of built-in equipment may be obtained from the CES Standard Systems List shown in paragraphs 15.1 and 15.2. The guidnace cost mut be adjusted for functional features which are considered to be additional cost. This adjustment is absolutely required to justify cost above guidance. Backup for the added functional features must be attached. Examples of added functional features are: hyperbaric requirements; Tempest/HEMP/EMP shielding; UPS support facilities; communications support facilities; retrieval equipment racks for warehouses; OMSI; very high walls; emergency power; raised floor; asbestos removal and compressed air. These features may be or may not be built-in equipment.

d) If the primary facility includes a major use area of a different category code, the differential cost may be entered as a functional feature.

e) Gross area calculations (paragraph 10.11) require certain areas to be taken at zero or one half the actual area. These excluded areas must be included in the project cost. This can be done by showing the actual cost as an "additional functional feature" on the "Building SF Cost Development" sheet.

f) The addition/deletion adjusted unit cost (U/C) is obtained by dividing the total cost of each additional functional feature by the total area of the primary facility. (Include all multi-use areas.)

g) The size adjustment factor is related to Figure 17.

h) The area cost factors are given in Section 12.

i) The escalation factors are given in Figure 18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BUILDING SF COST DEVELOPMENT

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

	CAT CODE	SIZE	ACF	DATE mo / yr
PROPOSED FACILITY				
GUIDANCE FACILITY				

HISTORICAL GUIDANCE SOURCE: _____

HISTORICAL GUIDANCE UNIT COST: _____

HISTORICAL UNIT COST		SIZE FACTOR		AREA COST FACTOR		ESCALATION FACTOR		ADJUSTED UNIT COST
_____	X	_____	X	_____	X	_____	=	_____


ADDITIONAL FUNCTIONAL FEATURES

FUNCTIONAL FEATURES	QTY	UNIT COST	TOTAL COST	ADJUSTED U/C	%CHANGE

ADDITIONAL FUNCTIONAL FEATURES TOTAL : _____ _____

Figure 16
Building SF Cost Development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

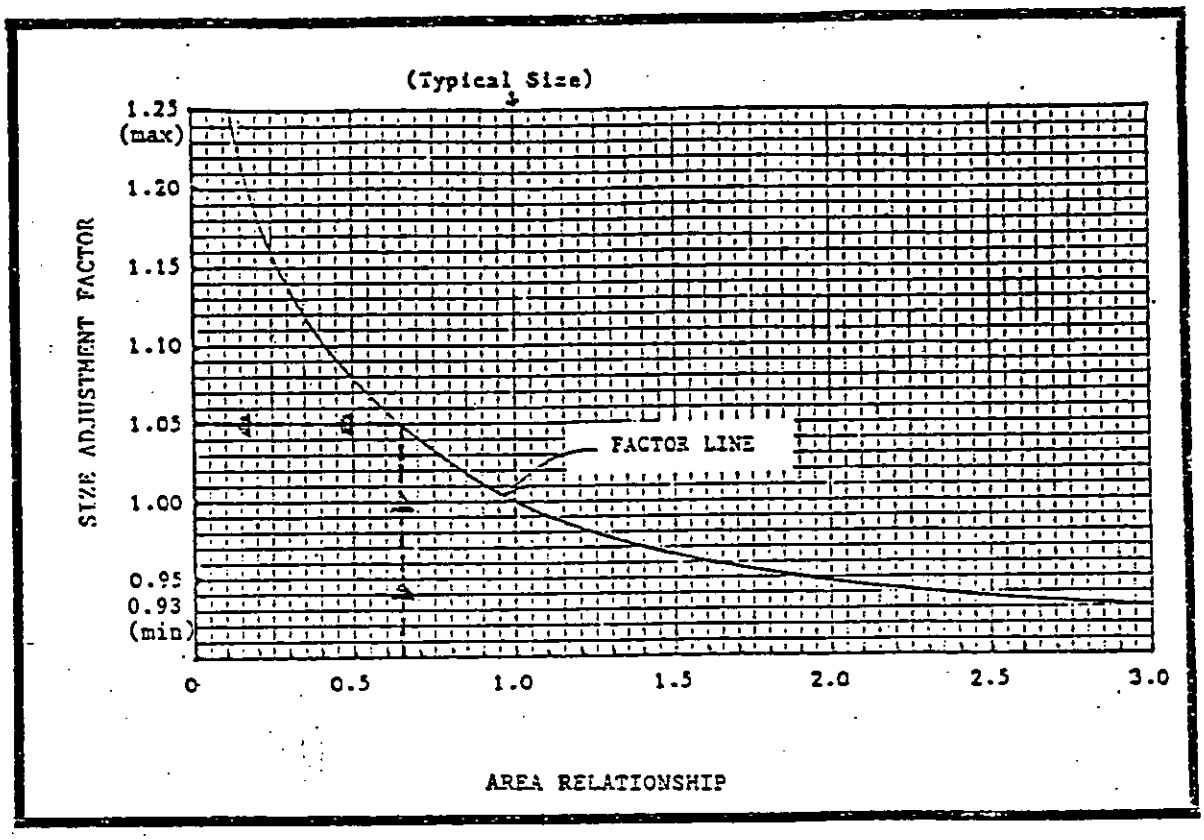

Example: The Size Adjustment factor is desired for a 16,000 SF Academic Facility.

$$\text{AREA RELATIONSHIP} = \frac{\text{PROPOSED FACILITY SIZE}}{\text{TYPICAL FACILITY SIZE}} = \frac{16{,}000}{25{,}000} = 0.64$$

Find 0.64 on the horizontal axis. Trace a vertical line to the factor curve and then trace a horizontal line to the vertical axis's Size Adjustment Factor which is 1.05.

Figure 17
Size Adjustment Chart

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PROJECTED NAVFAC COST INDEX
MONTHLY
JAN 1988

YEAR	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT	OCT.	NOV.	DEC.
1972	1011	1016	1022	1027	1039	1047	1053	1057	1067	1070	1082	1090
1973	1102	1114	1123	1135	1140	1138	1137	1144	1150	1156	1155	1158
1974	1156	1154	1155	1177	1177	1199	1233	1240	1238	1246	1239	1240
1975	1242	1265	1265	1269	1287	1307	1317	1330	1333	1351	1349	1354
1976	1362	1371	1378	1389	1398	1416	1425	1455	1467	1476	1479	1484
1977	1489	1499	1504	1506	1507	1521	1538	1553	1586	1617	1603	1606
1978	1606	1615	1618	1621	1652	1663	1696	1705	1720	1721	1732	1734
1979	1740	1740	1750	1752	1756	1807	1827	1851	1891	1899	1902	1909
1980	1897	1896	1918	1902	1891	1919	1953	1974	1981	1981	2000	2017
1981	2015	2016	2014	2064	2076	2083	2109	2118	2139	2156	2186	2184
1982	2194	2200	2195	2195	2220	2219	2233	2253	2249	2248	2260	2295
1983	2311	2348	2352	2347	2351	2388	2414	2428	2430	2416	2419	2406
1984	2402	2407	2413	2422	2419	2417	2418	2428	2430	2424	2421	2418
1985	2424	2432	2428	2427	2433	2438	2457	2447	2440	2441	2441	2433
1986	2433	2443	2445	2455	2475	2503	2499	2496	2504	2509	2509	2510
1987	2513	2508	2516	2521	2523	2526	2528	2557	2565	2568	2564	2589
1988	2597	2604	2612	2620	2627	2635	2643	2651	2659	2666	2674	2682
1989	2690	2697	2705	2712	2720	2727	2735	2743	2750	2758	2766	2773
1990	2780	2787	2794	2801	2808	2815	2822	2829	2836	2843	2850	2857
1991	2863	2869	2876	2882	2888	2895	2901	2908	2914	2921	2927	2934
1992	2940	2945	2951	2957	2963	2969	2975	2980	2986	2992	2998	3004
1993	3010	3016	3022	3028	3034	3040	3046	3052	3058	3064	3070	3076

ANNUAL MARK-UP FACTORS FOR ESCALATION
(BEYOND FY 93, USE 2.30% ESCALATION COMPOUNDED EACH YEAR)

FISCAL-YEAR	4-87	4-88	4-89	4-90	4-91	4-92	4-93	4-94	4-95
4-83	1.07	1.12	1.15	1.18	1.22	1.25	1.28	1.31	1.34
4-84	1.04	1.08	1.11	1.15	1.18	1.21	1.24	1.27	1.30
4-85	1.04	1.08	1.11	1.15	1.18	1.21	1.23	1.26	1.29
4-86	1.03	1.07	1.10	1.13	1.16	1.19	1.22	1.25	1.28
4-87	1.00	1.04	1.07	1.10	1.13	1.16	1.19	1.22	1.25
4-88	0.96	1.00	1.04	1.07	1.10	1.13	1.16	1.18	1.21
4-89	0.93	0.97	1.00	1.03	1.06	1.09	1.12	1.14	1.17
4-90	0.90	0.94	0.97	1.00	1.03	1.06	1.08	1.11	1.13
4-91	0.87	0.91	0.94	0.97	1.00	1.03	1.05	1.07	1.10
4-92	0.85	0.89	0.92	0.95	0.97	1.00	1.02	1.05	1.07
4-93	0.83	0.87	0.90	0.93	0.95	0.98	1.00	1.02	1.05

NOTE: Escalation rate change to be 2.30% after 1993.

Figure 18
Projected NAVFAC Cost Index

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 11: PRIMARY AND SUPPORTING FACILITIES DEFINITIONS

11.1 Primary Facility. The cost certification shall include a backup estimate to develop a cost for each system. The EFD can provide a print-out of systems costs sorted by category code for guidance. Adjustment must be made for size, location (area cost factor), and escalation. Completion of the cost model is required.

11.2 Supporting Facilities. Supporting Facilities include all construction items outside the building five-foot line and all special foundation features of significant cost unique to the building. All Supporting Facility items should be included under one of the following major categories. Each sub-item included under these major categories shall have a separate line item entry on the Budget Estimate Summary Sheet. Refer to the CES standard systems list and the systems narratives for identification by system number of supporting facilities. Completion of the cost model is required.

11.2.1 Special Foundation Features. Include special foundation requirements (e.g., engineered fill, piling, drilled piers, vibrofloatation, dewatering, etc.). (Systems 91X)

11.2.2 Electrical Utilities. Include electrical distribution, substations, emergency power generators, fire alarms, exterior lighting, telephone distribution, etc., beyond the five-foot line. (Systems 51X, 52X)

11.2.3 Mechanical Utilities. Include those utilities outside the five-foot line covered in Divisions 2 and 15 of the specifications (e.g., gas, steam, water, sanitary, etc.). (Systems 54X through 59X)

11.2.4 Roads, Parking, and Sidewalks. Include subgrade preparation, subbase and surface courses, curb and gutters, and valley gutters. (Systems 7XX)

11.2.5 Site Improvements. Include seeding, sodding, rip-rap, landscaping, irrigation, fencing, storm drainage, and other site enhancements. Do not include normal excavation which is within the five-foot line. (Systems 8XX)

11.2.6 Demolition. Include real property inventory (building or structure), major utility or paving demolition only. Utility, pavement, or other miscellaneous demolition associated with installation of new construction should be included with the applicable trade category (e.g., electrical demolition with Electrical Utilities, steam line demolition with Mechanical Utilities, paving demolition with Roads, Parking and Sidewalks, etc.). Provide the total number of buildings to be demolished in paragraph 10 of DD Form 1391.

11.2.7 Contaminated Soil. Cost to remove or treat contaminated soil in areas such as old industrial sites.

11.2.8 Asbestos Removal. Discussions with a contractor specialist or Code 407 is encouraged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

11.3 Supporting Facilities - Cost. Each supporting facility system must be priced separately and backup work sheets included.

11.4 Proposed Site Plan. In order to reasonably estimate the Supporting Facility requirements, the proposed site should be investigated and station utility maps reviewed. It is suggested that a scaled, single line site plan be developed for the project. For most projects, this site plan can be made on an 8-1/2 x 11-inch sheet and should be attached to the estimate. The site plan should show most, if not all, of the following:

a) Existing elevations
b) Proposed building(s) and/or structure(s)
c) Finish floor elevation
d) Existing mechanical and electrical utility runs
e) New mechanical and electrical services to the facility
f) Paving
g) Demolition

11.5 Pricing Sources. Supporting Facility costs should be estimated using the following pricing sources:

a) Supporting facility guidance cost reference provides composite in-place cost for typical systems. Refer to Table 12.
b) Systems cost obtained from recently bid local projects. This is considered the most reliable source. Coordinate with EFD Code 407 for these costs.
c) NAVFACENGCOM CES unit price file including assembly and composite prices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 12: AREA COST FACTORS (3/88)

12.1 Stateside Area Cost Factors. The following list outlines area cost factors for various areas within the United States.

ALABAMA	.90
BIRMINGHAM	.92
MOBILE	1.00
MONTGOMERY	.79
ANNISTON AD	.88
FORT RUCKER	.85
FORT MCCLELLAN	.87
MAXWELL AFB	.79
MOBILE	.91
PHOSPHATE DEV WKS	.85
REDSTONE ARS	.82
ALABAMA AAP	.83
ALASKA	2.46
ANCHORAGE	1.79
ADAK	3.53
FAIRBANKS	2.06
ADAK (NAVY)	3.53
ALEUTIAN	3.48
CLEAR AFB	2.78
EIELSON AFB	2.06
ELMENDORF AFB	1.79
FORT GREELY	2.66
FT RICHARDSON	1.79
FORT WAINWRIGHT	2.06
GALENA	3.35
KODIAK	2.85
ARIZONA	1.00
FLAGSTAFF	1.03
PHOENIX	.98
TUCSON	1.00
FORT HUACHUCA	1.13
NAVAJO AD	1.03
YUMA PG	1.19
YUMA	1.19
ARKANSAS	.91
PINEBLUFF	.90
LITTLE ROCK	.87
FORT SMITH	.96
FORT CHAFFEE	.96
PINEBLUFF ARS	.90
CALIFORNIA	1.20
LOS ANGELES	1.19
SAN DIEGO	1.22
SAN FRANCISCO	1.19
29 PALMS	1.32
BEALE AFB	1.19
BRIDGEFORT NWTC	1.24
CASTLE AFB	1.08
CENTERVILLE BCH	1.18
CAMP PENDLETON	1.12
DESERT AREA	1.25
EDWARDS AFB	1.23
EL CENTRO	1.19
FT HUNT LIGGETT	1.34
FORT IRWIN	1.36
FORT ORD	1.25
GEORGE AFB	1.20
LEMOORE NAS	1.14
LOS ANGELES AREA	1.19
MARCH AFB	1.22
MATHER AFB	1.15
MCCLELLAN AFB	1.15
MONTEREY AREA	1.25
NORTON AFB	1.16
OAKLAND AB	1.29
PORT HUENEME AREA	1.18
PRESIDIO MONTEREY	1.45
PRESIDIO SAN FRAN	1.46
RIVER BANK AAF	1.07
SACRAMENTO AD	1.13
SAN CLEMENTE IS	1.46
SAN DIEGO AREA	1.21
SAN FRAN AREA	1.21
SAN NICOLAS ISL	2.20
SHARPE AD	1.05
SIERRA AD	1.34
STOCKTON	1.07
TRAVIS AFB	1.22
VANDENBURG AFB	1.27
COLORADO	.97
COLORADO SPRINGS	.95
DENVER	.97
PUEBLO	1.00
AIR FORCE ACADEMY	1.01
CHEYENNE MOUNTAIN	1.07
FALCON AFB	1.01
FITZSIMMONS AMC	.99
FORT CARSON	1.01
PETERSON AFB	1.01
PUEBLO AD	.98
ROCK MOUNTAIN ARS	.97
CONNECTICUT	1.13
BRIDGEPORT	1.12
HARTFORD	1.10
NEW LONDON	1.17
NEW LONDON AREA	1.17
STRATFORD ENGR P	1.12
DELAWARE	.99
DOVER	.97
LEWES	.97
MILFORD	1.02
DOVER AFB	.97
LEWES NF	.97
FLORIDA	.93
MIAMI	.96
PANAMA CITY	.87
TAMPA	.97
CAPE CANAVERAL	.91
CAPE KENNEDY	.91
EGLIN AFB	.82
HOMESTEAD AFB	.96
HOMESTEAD	.96
JACKSONVILLE AREA	.87
KEY WEST, AFB	1.05
MCDILL AFB	.96
ORLANDO	.84
PENSACOLA AREA	.82
TYNDALL AREA	.87
GEORGIA	.84
ALBANY	1.00
ATLANTA	.86
MACON	.81
ALBANY	.85
ATHENS	.89
ATLANTA, MARIETTA	.87
FORT BENNING	.80
FORT GILLEM	.86
FORT GORDON	.92
FORT MCPHERSON	.81
FORT STEWART	.82
KINGS BAY	.98
WARNER ROBBIN	.85
DOVER AFB	.82
HAWAII	1.32
HAWAII	1.33

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(3/88)

HONOLULU	1.39	KANSAS	.92	MASSACHUSETTS	1.10
MAUI	1.25	MANHATTAN	.94	BOSTON	1.08
ALIAMANU	1.39	TOPEKA	.90	FITCHBURG	1.11
BARB PT. NAS	1.44	WICHITA	.91	SPRINGFIELD	1.11
BARKING SAND	1.80	FORT LEAVENWORTH	.99	ARMY MATL & MECH	1.15
EWA BEACH	1.44	FORT RILEY	.89	BOSTON (NAVY)	1.19
FORD ISLAND	1.53	KANSAS AAP	.95	FORT DEVENS	1.18
FORT DERUSSY	1.39	SUNFLOWER AAP	.96	HANSCOMB AFB	1.15
FORT SHAFTER	1.39	MCCONNELL AFB	.91	NATICK	1.18
HELEMANO	1.49	KENTUCKY	.94	SOUTH WEYMOUTH	1.24
HICKAM AFB	1.39	BOWLING GREEN	.93	MICHIGAN	1.05
KANEOHE MCAS	1.44	LEXINGTON	.95	BAY CITY	1.02
LUALUALEI	1.39	LOUISVILLE	.95	DETROIT	1.07
MOANALOA	1.39	FORT CAMPBELL	.98	MARQUETTE	1.06
PEARL CITY	1.39	FORT KNOX	1.03	DETROIT ARS	1.07
PEARL HARBOR	1.39	LEX/BLUEGRASS AD	1.02	DETROIT AREA	1.07
PHAKULOA	1.35	LOUISVILLE NAS	.95	REPUBLIC ELFCOM	1.12
SCHOFIELD BRKS	1.39	LOUISIANA	.89	SAWYER AFB	1.06
TRIPLER AMC	1.39	ALEXANDRIA	.84	WURTSMITH AFB	1.03
WHEELER	1.44	NEW ORLEANS	.94	MINNESOTA	1.13
IDAHO	1.06	SHREVEPORT	.88	DULUTH	1.12
BOISE	1.03	BARKSDALE AFB	.88	MINNEAPOLIS	1.15
IDAHO FALLS	1.04	ENGLAND AFB	.84	ST. CLOUD	1.12
MTN HOME	1.11	FORT POLK	.96	ROSEMONT	1.19
MTN HOME AFB	1.11	LAKE CHARLES	.96	TWIN CITY AAP	1.11
ILLINOIS	1.01	LOUISIANA AAP	.88	MISSISSIPPI	.82
BELLVILLE	1.00	GULF OUTPT NEW ORL	.94	BILOXI	.85
CHICAGO	1.06	NEW ORLEANS AB	.94	COLUMBUS	.82
ROCK ISLAND	.97	NEW ORLEANS AREA	.94	JACKSON	.80
CHANUTE AFB	1.14	MAINE	.98	COLUMBUS AFB	.82
CHICAGO AREA	1.06	BANGOR	.88	GULF PORT AREA	.85
FORT SHERIDAN	1.07	CARIBOU	1.12	KEESLER	.86
ROCK ISLAND ARS	1.00	PORTLAND	.93	MERIDIAN	.85
SAVANNAH AD	1.04	BRUNSWICK	1.12	MISSISSIPPI AAP	.85
SCOTT AFB	1.06	CUTLER	.96	PASCAGOULA	.84
INDIANA	1.02	LORING AFB	1.11	MISSOURI	.93
INDIANAPOLIS	1.02	PROSPECT HARBOR	.45	KANSAS CITY	.94
LOGANSPORT	1.05	WINTER HARBOR	.95	ST. LOUIS	.98
MADISON	.98	MARYLAND	.94	ROLLA	.87
CRANE AAP	1.12	BALTIMORE	.92	FT LEONARD WOOD	.92
CRANE	1.12	FREDERICK	.95	LAKE CITY AAP	.94
FT BEN HARRISON	1.09	LEXINGTON PARK	.96	ST. LOUIS AAP	.93
GRISSOM AFB	1.12	ABERDEEN PG	.91	WHITEMAN AFB	1.04
INDIANA AAP	1.00	ANDREWS AFB	1.03	MONTANA	1.15
JEFFERSON PG	.98	ANNAPOLIS	1.03	BILLINGS	1.18
NEWPORT AAP	1.03	FORT DETRICK	.95	BUTTE	1.21
IOWA	1.01	FORT HOLABIRD	.92	CREAT FALLS	1.19
BURLINGTON	1.04	FORT MEADE	.92	MALMSTROM AFB	1.19
CEDAR RAPIDS	.99	FORT RITCHIE	.95	NEBRASKA	1.03
DES MOINES	.99	HARRY DIAMOND LAB	.97	GRAND ISLAND	1.01
IOWA AAP	1.06	PATUXENT RIV AR	1.03	LINCOLN	1.03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(3/88)

OMAHA	1.05
CORNHUSKER AAP	.82
OFFUTT AFB	1.05
NEVADA	1.17
HAWTHORNE	1.27
LAS VEGAS	1.09
RENO	1.15
FALLON	1.34
HAWTHORNE AAP	1.20
NELLIS AFB	1.09
NEW HAMPSHIRE	1.06
CONCORD	1.07
NASHUA	1.04
PORTSMOUTH	1.08
PORTSMOUTH AREA	1.10
NEW JERSEY	1.10
NEWARK	1.10
RED BANK	1.11
TRENTON	1.08
BAYONNE MOT	1.12
EARLE	1.11
FORT DIX	1.00
FORT MONMOUTH	1.07
LAKEHURST	1.07
MCGUIRE AFS	1.10
PICATINNY ARS	1.18
TRENTON AREA	1.08
NEW MEXICO	1.01
ALAMAGORDO	1.00
ALBUQUERQUE	1.00
GALLUP	1.02
CANNON AFB	.97
FORT WINGATE	1.02
HOLLOMAN AFB	1.08
KIRTLAND AFB	1.00
WHIT SAND MIL RAN	1.09
NEW YORK	1.14
ALBANY	1.07
NEW YORK CITY	1.27
SYRACUSE	1.08
BROOKLYN	1.27
FORT DRUM	1.16
GARDEN CITY	1.29
GRIFFISS AFB	1.06
PLATTSBURG AFB	1.12
SENECA	1.11
STATEN ISLAND	1.40
USMA	1.14
WATERVLIET ARS	1.07
NORTH CAROLINA	.85
FAYETTEVILLE	.84
GREENSBORO	.88
WILMINGTON	.83
CAMP LEJEUNE AREA	.92
CHERRY POINT	.92
FORT BRAGG	.87
POPE AFB	.87
SEYMOUR AFB	.78
SUNNY POINT MT	.89
NORTH DAKOTA	.98
BISMARCK	.96
GRAND FORKS	.95
MINOT AFB	1.04
OHIO	1.01
COLUMBUS	.97
DAYTON	1.03
YOUNGSTOWN	1.02
CLEVELAND	1.10
RAVENNA AAP	1.05
WRGT PATTERSON AFB	1.03
OKLAHOMA	.89
LAWTON	.92
MCALESTER	.87
OKLAHOMA CITY	.88
ALTUS AFB	.99
FORT SILL	.92
TINKER AFB	.87
OREGON	1.02
PENDLETON	1.09
PORTLAND	.99
SALEM	.97
ASTORIA	1.13
CHARLESTON	1.09
COOS HEAD	1.06
UMATILLA AD	1.15
PENNSYLVANIA	.99
HARRISBURG	.88
PHILADELPHIA	1.08
PITTSBURG	1.01
CARLISLE BRKS	.88
INDIANTOWN GAP MIS	.94
LETTERKENNY AD	1.01
MECHANICSBURG AREA	.88
NEW CUMBERLAND	.88
PHILADELPHIA AR	1.08
SCRANTON AAP	1.02
TOBYHANNA AD	1.09
WARMINSTER AREA	1.02
RHODE ISLAND	1.11
BRISTOL	1.11
NEWPORT	1.16
PROVIDENCE	1.07
DAVISVILLE	1.13
NEWPORT AREA	1.19
SOUTH CAROLINA	.85
CHARLESTON	.89
COLUMBIA	.80
MYRTLE BEACH	.87
BEAUFORT	.93
CHARLESTON AREA	.91
CHARLESTON AFB	.89
FORT JACKSON	.80
SHAW AFB	.78
SOUTH DAKOTA	.99
ABERDEEN	.86
SIOUX FALLS	1.00
RAPID CITY	1.02
ELLSWORTH AFB	1.03
TENNESSEE	.87
CHATTANOOGA	.85
KINGSPORT	.81
MEMPHIS	.94
ARNOLD AFB	.92
HOLSTON AAP	.81
MEMPHIS AREA	.96
MILAN AAP	.96
VOLUNTEER AAP	.90
TEXAS	.86
SAN ANGELO	.79
SAN ANTONIO	.88
FORT WORTH	.91
BERGSTROM AFB	.87
BROOKS AFB	.88
CAMP BULLIS	.73
CARSWELL AFB	.91
CHASE FIELD, BVLE	.93
CORPUS CHRISTI AD	.88
CORPUS CHRISTI	.88
DALLAS	.93
DYESS AFB	.96
FORT BLISS	.96
FORT HOOD	.84
FORT SAM HOUSTON	.88
GALVESTON	.88
GOODFELLOW AFB	.79
INGLESIDE	.89
KELLY AFB	.88
KINGSVILLE	.95
LACKLAND AFB	.88
LAUGHLIN AFB	.90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(3/88)

LAUGHLIN AFB	.90
LONESTAR AAP	.88
LONGHORN AAP	.82
RANDOLPH AFB	.88
RED RIVER AD	.88
REESE AFB	.84
SHEPPARD AFB	.99
UTAH	1.02
OGDEN	.99
SALT LAKE CITY	1.00
TOOELE	1.06
DUGWAY PG	1.15
FORT DOUGLAS	1.00
HILL AFB	1.03
TOOELE AD	1.06
VERMONT	.95
BURLINGTON	.99
MONTPELIER	.90
RUTLAND	.96
VIRGINIA	.92
NORFOLK	.90
RADFORD	.92
RICHMOND	.93
ARLINGTON HS	1.04
ARLINGTON	1.04
CAMERON STA	1.05
DAHLGREN	1.02
FORT BELVOIR	1.05
FORT EUSTIS	.93
FORT HILL	.96
FORT LEE	.90
FORT MONROE	.92
FORT MYER	.97
FORT PICKETT	.97
FORT STORY	.92
NORFOLK AREA	.92
QUANTICO	.96
RADFORD AAP	.96
VINT HILL FARMS	.96
WASHINGTON	1.15
SPOKANE	1.14
TACOMA	1.10
YAKIMA	1.21
EVERETT	1.19
FAIRCHILD AFB	1.19
FORT LEWIS	1.10
INDIAN ISLAND	.99
JIM CREEK	1.20
MCCHORD AFB	1.26
PACIFIC BEACH	1.10
SEATTLE AREA	1.14
WHIDBEY ISLAND	1.16
YAKIMA FC	1.27
WEST VIRGINIA	.95
BLUEFIELD	.89
CLARKSBURG	.99
CHARLESTON	.99
SUGAR GROVE	1.29
WISCONSIN	1.04
LACROSSE	1.06
MADISON	1.00
MILWAUKEE	1.06
BADGER AAP	1.00
CLAM LAKE	1.15
FORT MCCOY	1.17
WYOMING	1.04
CASPER	1.00
CHEYENNE	1.04
LARAMIE	1.08
F.E. WARREN AFB	1.04
WASHINGTON, DC	1.04
FORT MCNAIR	1.05
WALTER REED AMC	1.05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

12.2 Overseas Area Cost Information. (3/88) The following list outlines area cost information for various areas outside of the United States.

LOCATION	ACF/FER	NOTES
ANTIGUA	1.73/2.78	
ARGENTIA	1.10/1.35	
AUSTRALIA	1.46/1.43	
DARWIN	1.80	
PERTH	1.33	
SYDNEY	1.24	
AZORES	1.14/150.50	2
AZORES	1.14	
BAHAMAS	2.51/1.09	2
ANDROS IS	2.51	
BELGIUM	1.31/42.77	
BRUSSELS	1.31	
BELIZE	1.48/3.33	
MIDDLESEX	1.48	
BERMUDA	1.61/1.00	2
CANADA	1.30/1.29	
ST JOHN'S	1.56	
TORONTO	1.02	
VANCOUVER	1.32	
CANAL ZONE	1.15	2
CRETE	1.37/133.30	
CRETE	1.37	
CUBA	1.61	2
GUANTANAMO	1.61	2
DIEGO GARCIA	2.38/	
DIEGO GARCIA	2.38	
EGYPT	1.52/2.50	
CAIRO	1.52	
GREECE	1.03/139.90	
ATHENS	.93	
TRIAKALA	1.12	
GREENLAND	2.52/6.34	
GODTHAAB	2.52	
GUAM	2.03	
AGANA	2.03	
HONDURAS	1.08/2.78	
PUERTO CORTES	1.07	
TEGUCIGALPA	1.08	
ICELAND	4.01/42.25	1
REYKAVIK	4.01	1
ISRAEL	1.32/1.573	
TEL AVIV	1.32	
ITALY	1.15/1423	1
NAPLES	1.15	1
SICILY	1.15	1

LOCATION	ACF/FER	NOTES
JAPAN	1.58/163.10	
MISAWA	1.49	
OKINAWA	1.68	
TOKYO	1.56	
JOHNSTON ATOLL	2.10/	
KENYA	1.08	2
KOREA	.81/870.00	
SEOUL	.81	
KWAJALEIN	2.43	
INNER IS	2.19	
KWAJALEIN	2.43	
OUTER IS	2.67	
MIDWAY ISLAND	2.31	
MOROCCO	1.68/10.53	
CASABLANCA	1.50	
NETHERLANDS	1.29/2.33	
OSS	1.20	
NEW ZEALAND	2.14/1.50	
WELLINGTON	2.14	
OMAN	1.89/.41	
RUWI	1.89	
PANAMA	1.15	
PANAMA CITY	1.15	
PHILLIPINES	1.23/21.10	
MANILA	1.23	
PUERTO RICO	1.16	2
ROOSEVELT ROADS	1.10	2
SAN JUAN	1.10	2
SOMALIA	1.20/140.00	1 2
SPAIN	.80/137.60	
MADRID	.80/	
TURKEY	1.00/743.50	
ERZURUM	1.88	
ISTANBUL	1.55	
UNITED KINGDOM	1.27/.70	1
BIRMINGHAM	1.26	1
LONDON	1.28	1
GLASGOW, SCOT	1.28	1
WEST GERMANY	1.18/2.06	
FRANKFURT	1.18	
GRAFENWOEHR	1.18	
KAISERSLAUTERN	1.18	
MUNICH	1.18	
WEST INDIES	1.46/2.78	
GRENADA	1.46	

NOTES: 1. Escalate project costs to the one-third time point of construction.
2. Allow for Defense Base Act Insurance Costs.
3. International Balance of Payments (IBOP) Summary Sheet is required.
ACF: Area Cost Factor FER: Foreign Exchange Rate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 13: GUIDANCE COSTS

13.1 Primary Facility Guidance Costs. Table 11 gives the current guidance costs for various facilities identify by category code. The costs have been adjusted for an ACF of 1.00, and the time has been adjusted for FY 90 and FY 91.

13.2 Supporting Facilities Guidance Cost. Table 12 gives the current total composite contract costs for various supporting facilities elements. The cost has been adjusted for an ACF of 1.00, and the time has been adjusted for FY 90 and FY 91.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 11

Primary Facility Guidance Costs

CODE 051 FY90 & FY91 GUIDANCE COST (ACF = 1.00) AS OF 13 JULY 1987 051AB/SJA, NAVFACENGCOM

ALL UNIT COSTS INCLUDE BUILT IN EQUIPMENT NORMAL TO THE FACILITY
UNIT COSTS INCLUDE CQM & PCAS EXCEPT HIGH TECH AND HIGH RISK FACILITIES

CONFIDENCE FACTOR
1. BASED ON 4 OR MORE BID RESULTS IN THE LAST 12 MONTHS OR 8 OR MORE BIDS IN THE LAST 24 MONTHS
2. BASED ON 4 TO 7 BID RESULTS IN THE LAST 24 MONTHS
3. BASED ON 3 OR MORE BID RESULTS IN THE LAST 36 MONTHS
4. BASED ON FEWER THAN 3 BIDS IN THE LAST 36 MONTHS

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS
110.10-113	513A	AIRFIELD PAVEMENT	65000 SY	2	37	38	9"-11" PCC, 6" SOIL CEMENT BASE, 6" BASE COURSE COMPACTED SUBGRADE 7 BIDS
131.15	512A	COMMUNICATIONS CENTER	6000 SF	4	235	241	1 BID
131.40	512A	TELEPHONE EXCHANGE	6000 SF	4	146	150	2 BIDS
131.45	512A	TERMINAL EQUIP BLDG	70000 SF	4	99	101	1 BID
133.72	512A	RADAR AIR TRAF CTL CTR	6500 SF	4	141	144	2 BIDS
131.55	512A	ANTENNA ARRAY BLDG	15000 SF	4	122	125	2 BIDS ADDITION WORK
137.10	512A	METEOROLOGICAL BLDG	37000 SF	4	98	100	2 BIDS
141.20/25	512D	ACFT FIRE/RESCUE/STRUC/STATION	8000 SF	4	96	98	2 BIDS
141.70	512D	CONTROL TOWER	3000 SF	4	196	201	1 BID
143.15	512D	RANGE OF CENTER	13000 SF	4	185	190	3 BIDS ADDITION WORK
143.20	512D	ORDNANCE OPERATION BUILDING	13000 SF	4	79	81	4 BIDS
143.25	512D	UDT BLDG	56000 SF	4	85	87	1 BID
143.40	512D	COMPUTER PROGRAMMING OP CTR	21000 SF	4	90	92	2 BIDS
143.45	512D	ARMORY	10000 SF	4	87	89	4 BIDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 11 (Continued)

Primary Facility Guidance Costs

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS	
151.20	511A	BERTHING PIER	14500 SY	3	873	900	5 BIDS	NO UTILITIES
151.71	511A	DEGUASSING PIER	3500 SY	4	669	685	1 BID	
163.20	511A	MOORING PLATFORM	4000 SY	4	1575	1614	1 BID	
171.10	512C	ACADEMIC INSTRUCTION BLDG	30000 SF	4	69	71	NO BIDS	
171.20	512C	APPLIED INSTRUCTION BLDG	25000 SF	1	94	96	17 BIDS	
171.35	512C	OP TRAINER FAC (NON AIRCRAFT)	22000 SF	3	95	97	6 BIDS	
171.35	512C	OP TRAINER FAC (AIRCRAFT)	28000 SF	3	93	95	7 BIDS	
171.60	512C	RECRUIT PROCESSING BUILDING	80000 SF	4	85	87	3 BIDS	
211.05	513B	MAINT HANGAR (1 MODULE, TYPE I)	38000 SF	2	79	81	11 BIDS	
211.08	513B	AIR FRAMES SHOP (NON NADEP)	23000 SF	4	131	134	2 BIDS	ADDITION WORK
211.21	513B	ENGINE MAINT SHOP (NON NADEP)	34000 SF	3	62	64	3 BIDS	
211.45	513C	AVIONICS SHOP (NON NADEP)	23000 SF	3	81	83	3 BIDS	
211.54	513C	AVIATION ARMANENT SHOP (NON NADEP)	16000 SF	4	67	69	1 BID	
211.70	513C	MANUFACTURE & REPAIR SHOP (NADEP)	81000 SF	4	62	64	1 BID	
211.73	513C	METAL TREATMENT SHOP (PLATING) (NADEP)	81000 SF	4	61	63	2 BIDS	STRUCTURE ONLY
211.75	513C	PARACHUTE/SURV EQUIP SHOP (NON NADEP)	8000 SF	4	78	80	2 BIDS	
211.93	513C	ENGINEERING LAB (NADEP)	16000 SF	4	136	139	1 BID	
211.94	513C	AIRCRAFT POWER CHECK FAC (NADEP)	9000 SF	4	430	441	1 BID	
213.30	511C	SHORE INTER-MAINT FAC (SIMA)	77000 SF	3	84	86	5 BIDS	
213.55	511C	PIPEFITTING SHOP (ASBESTOS HANDLING)	78000 SF	4	---	---	2 BIDS	
213.60	511C	PAINT & BLASTING SHOP	9000 SF	4	117	120	2 BIDS	
213.70	511C	SHIP SERVICES SUPPORT BLDG.	7000 SF	4	94	96	3 BIDS	
213.75	511C	AMPHIBIAN VEHICLE MAINT. SHOP	55000 SF	4	88	90	1 BID	
214.10	511C	COMBAT VEHICLE MAINT SHOP	20000 SF	-	80	82	1 BID	
214.20	511C	AUTOMOTIVE-VEHICLE MAINT SHOP	30000 SF	4	75	77	3 BIDS	
214.51	511C	AUTOMOTIVE ORGAN. SHOP (MARCORPS)	30000 SF	2	67	69	9 BIDS	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 11 (Continued)

Primary Facility Guidance Costs

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS
214.53	511C	FIELD-MAINT SHOP-TANK/AUTO (MARCORPS)	20000 SF	4	89	91	2 BIDS
215.30	511D	HEAVY GUN SHOP	25000 SF	4	108	111	1 BID W/O EQUIP
216.40	511D	TORPEDO SHOP	69000 SF	4	124	127	3 BIDS W/O EQUIP ADDITION WO
217.10	511D	ELEC/COMM MAINT. SHOP	27000 SF	3	84	86	4 BIDS
218.45	511D	INSTRUMENT-CALIB SHOP	12000 SF	4	68	70	1 BID
218.60	511D	AIRCRAFT GROUND SUB EQUIP SHOP	32000 SF	3	76	78	3 BIDS
219.10	511D	PUBLIC-WORKS SHOP	31000 SF	3	58	59	4 BIDS
310.23	512B	COMBINED RESEARCH LAB	60000 SF	4	--	--	1 BID
310.33	512B	COMPUTATION AND ANALYSIS LAB	28000 SF	4	--	--	2 BIDS
311.25	512B	AIRCRAFT SYS INTEGRATION LAB	26500 SF	4	--	--	1 BID

NOTE: Contact EFD for guidance cost for unique category codes or category code with no cost given.

313.10	512B	SHIP & MARINE LAB	20000 SF	4	--	--	1 BID
315.20	512B	UNDERWATER WEAPON SYS LAB	100000 SF	4	--	--	4 BIDS
315.30	512B	WEAPONS SYS INTEGRATION LAB	51000 SF	4	---	--	2 BIDS
316.10	512B	AMMO, EXPLOSIVES TOXICS LAB	6000 SF	4	--	--	1 BID
317.20	512B	ELECTRICAL/ELECTRONIC SYS LAB	60000 SF	4	--	--	1 BID
317.25	512B	ELEC/COMM SYS INTEGRATION LAB	110000 SF	4	--	--	5 BIDS
318.10	512B	PROPULSION SYSEMS LAB	13000 SF	4	--	--	1 BID
421.22	513D	HIGH EXPLOSIVE MAGAZINE	3000 SF	2	133	136	4 BIDS
421.72	513D	MISSILE MAGAZINE (25' DOORS)	10000 SF	4	152	156	
421.72	513D	MISSILE MAGAZINE (16' DOORS)	10000 SF	4	140	143	2 BIDS
431.10	513D	COLD STORAGE WAREHOUSE (26' & OVER SH)	8000 SF	4	115	118	3 BIDS NO RACK & RET
431.10	513D	COLD STOR. WAREHOUSE (12'-24' SH)	6000 SF	4	76	78	2 BIDS NO RACK & RET
441.10-12	513D	GENERAL WAREHOUSE (12'-24' SH)	40000 SF	2	38	39	2 BIDS NO RACK & RET
441.10-12	513D	GENERAL WAREHOUSE (26' AND OVER)	60000 SF	4	49	50	3 BIDS NO RACK & RET
441.13	513D	SECURITY WAREHOUSE	90000 SF	4	49	50	1 BID (LOW BID)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 11 (Continued)

Primary Facility Guidance Costs

CAT CODE	PM CODE	FACILITY DESCRIPTION	GUIDANCE FAC SIZE	CONF FAC	FY90 051 GUID U/C	FY91 051 GUID U/C	REMARKS
441.30	513D	HAZARD/FLAMMABLE STOREHOUSE (12'-24')	18000 SF	3	88	90	5 BIDS NO RACK & RET
441.71	513D	INTEGRATED LOGISTICS OVERHAUL & OUT BLD	10000 SF	4	88	90	3 BIDS
610.10	513A	ADMIN OFFICE (INCL HQS)	25000 SF	1	80	82	9 BIDS
610.10	513A	PASS OFFICE	6000 SF	3	93	95	4 BIDS
610.20	513A	DATA PROCESSING CENTER	21000 SF	2	108	111	6 BIDS
721.11	511B	BEQ	100000 SF	1	70	72	57 BIDS
721.11	511B	BEQ-HIGH RISE	75400 SF	2	72	74	4 BIDS/ INCL FIRE PROT ELEVATOR
721.14	511B	BEQ A SCHOOL	108800 SF	4	90	92	3 BIDS
722.10	511B	ENLISTED DINING FACILITY	16000 SF	2	140	143	5 BIDS
724.11-12	511B	BOQ	44000 SF	2	70	72	5 BIDS
730.10	513E	FIRE STATION (COMMUNITY)	3500 SF	3	97	99	4 BIDS
730.83	513E	CHAPEL CENTER	15000 SF	3	90	92	DIRECT U/C INCL R.E.
740.25	513E	FAMILY SERVICE CENTER	5000 SF	1	79	81	DIRECTED U/C
740.43	513E	GYMNASIUM	20000 SF	3	88	90	5 BIDS
740.74	513E	CHILD CARE CENTERS	8000 SF	1	79	81	DIRECTED U/C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12

Supporting Facilities Guidance Cost (1 July 1987)

PRICE INCLUDES CONTRACTOR OVERHEAD AND PROFIT ESCALATED TO APRIL 1 / ACF = 1.0

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
511, 512, & 516	ELECTRICAL DIST.			
VP-A	Note: Normal duct size is 4". 35KV circuit run 5" conduit			
VP-D	Note: For quantities less than 200 LF add 20% less than 100 LF add 50%			
VP-H	4-1/C #2 THW str al. w/1-1/C#8 CU ground secondary w/termination	LF	7.09	7.30
VP-J	4-1/C #1/0 THW str al. w/1-1/C#6 CU ground secondary w/termination	LF	9.25	9.52
VP-K	4-1/C #2/0 THW str al. w/1-1/C#4 CU ground secondary w/termination	LF	11.84	12.21
VP-M	4-1/C #4/0 THW str al. w/1-1/C#2 CU ground secondary w/termination	LF	16.33	16.82
VP-N	4-1/C 250 MCM THW str al. w/1-1/C#2 CU ground secondary w/termination	LF	17.25	17.77
VP-R	4-1/C 500 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination	LF	24.34	25.07
VP-U	4-1/C 750 MCM THW str al. w/1-1/C#1/0 CU ground secondary w/termination	LF	29.57	30.46
WI-H	4-1/C #2 CU USE wire 600V w/1-1/C#8 CU ground secondary w/termination	LF	11.84	12.19
WI-J	4-1/C #1/0 CU USE wire 600V w/1-1/C#6 CU ground secondary w/termination	LF	16.03	16.51
WI-K	4-1/C #2/0 CU USE wire 600V w/1-1/C#4 CU ground secondary w/termination	LF	19.54	20.12
WI-M	4-1/C #4/0 CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination	LF	28.34	29.19
WI-N	4-1/C 250 MCM CU USE wire 600V w/1-1/C#2 CU ground secondary w/termination	LF	33.89	34.90
WI-R	4-1/C 500 MCM CU USE wire 600V w/1-1/C#1/0 CU grd. secondary w/termination	LF	52.37	53.93
WJ-F	3-1/C #4 AWG CU XLP 5KV shielded cable primary w/o termination	LF	8.62	8.89
WJ-H	3-1/C #2 AWG CU XLP 5KV shielded cable primary w/o termination	LF	10.38	10.69
WJ-J	3-1/C #1/0 AWG CU XLP 5KV shielded cable primary w/o termination	LF	12.94	13.33
WJ-K	3-1/C #2/0 AWG CU XLP 5KV shielded cable primary w/o termination	LF	16.02	16.51
WJ-M	3-1/C #4/0 AWG CU XLP 5KV shielded cable primary w/o termination	LF	20.63	21.66
WJ-N	3-1/C 250 MCM AWG CU XLP 5KV shielded cable primary w/o termination	LF	23.10	23.80
WJ-R	3-1/C 500 MCM AWG CU XLP 5KV shielded cable primary w/o termination	LF	36.96	38.07
WK-H	3-1/C #2 AWG CU XLP 15KV shielded cable primary w/o termination	LF	12.94	13.33
WK-I	3-1/C #1 AWG CU XLP 15KV shielded cable primary w/o termination	LF	14.17	14.60
WK-J	3-1/C #1/0 AWG CU XLP 15KV shielded cable primary w/o termination	LF	16.02	16.51
WK-K	3-1/C #2/0 AWG CU XLP 15KV shielded cable primary w/o termination	LF	17.98	18.54
WK-M	3-1/C #4/0 AWG CU XLP 15KV shielded cable primary w/o termination	LF	23.10	23.80
WK-N	3-1/C 250 MCM AWG CU XLP 15KV shielded cable primary w/o termination	LF	26.50	27.28
WK-R	3-1/C 500 MCM AWG CU XLP 15KV shielded cable primary w/o termination	LF	38.82	39.98
WK-1	Cable termination size no. 2 thru 4/0 0-15KV porcelain	EA	333.00	342.99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($)	
			FY 90	FY 91
WK-2	Cable termination size 250 MCM thru 500 MCM 0-15KV porcelain	EA	456.21	469.53
WK-3	Cable termination size 500 MCM thru 750 MCM 0-15KV porcelain	EA	652.68	672.66
YI-0CA	Ditto YI-0CB but w/3 ea 36KV sta typ arresters added	EA	96,103.80	98,986.47
YI-0CB	35KV OCB line up compl w/3-750 MCM term-2 SWS 1 OCB 1-6" con stub PED&FWD	EA	87,479.10	90,104.25
YI-0CC	Ditto YI-0CB but w/2-6" conduit stub ups & 6 ea 750 MCM terminators	EA	91,175.40	93,910.44
YI-0CD	Ditto YI-0CB but 2/2-6" cond stub ups 6 ea 750 MCM term & 3 ea 36KV arst	EA	101,032.20	104,063.61
YI-0CE	Ditto YI-0CB but 2/4/0 grd mat 100'2" duct bk all control&power cable	EA	88,711.20	91,372.98
YI-0CF	2000 amp 35KV bus 16' W-2-support pedestals 1 at each end	EA	320.79	329.67
YP-012	Duct bank 1 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	8.01	8.26
YP-013	Duct bank 1 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	13.12	13.52
YP-014	Duct bank 1 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	17.98	18.54
YP-015	Duct bank 1 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	30.80	31.68
YP-016	Duct bank 1 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	41.89	43.16
YP-022	Duct bank 2 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	15.38	15.87
YP-023	Duct bank 2 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	25.26	26.02
YP-024	Duct bank 2 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	34.50	35.54
YP-025	Duct bank 2 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	59.76	61.55
YP-026	Duct bank 2 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	82.06	84.53
YP-032	Duct bank 3 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	21.81	22.47
YP-033	Duct bank 3 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	36.96	38.07
YP-034	Duct bank 3 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	51.75	53.30
YP-035	Duct bank 3 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	88.71	91.38
YP-036	Duct bank 3 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	121.99	125.65
YP-042	Duct bank 4 way 2" grs duct w/exca & backfill does not incl. pave remvl	LF	28.34	29.19
YP-043	Duct bank 4 way 3" grs duct w/exca & backfill does not incl. pave remvl	LF	42.51	43.79
YP-044	Duct bank 4 way 4" grs duct w/exca & backfill does not incl. pave remvl	LF	66.53	68.53
YP-045	Duct bank 4 way 5" grs duct w/exca & backfill does not incl. pave remvl	LF	117.05	120.57
YP-046	Duct bank 4 way 6" grs duct w/exca & backfill does not incl. pave remvl	LF	160.17	164.98
YT-012	Duct bank 1 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	4.93	5.03
YT-013	Duct bank 1 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	5.85	6.03
YT-014	Duct bank 1 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	6.77	6.98
YT-015	Duct bank 1 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	8.33	8.57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($)	
			FY 90	FY 91
YT-016	Duct bank 1 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	10.17	10.48
YT-022	Duct bank 2 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	8.01	8.26
YT-023	Duct bank 2 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	9.86	10.16
YT-024	Duct bank 2 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	12.32	12.70
YT-025	Duct bank 2 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	14.79	15.23
YT-026	Duct bank 2 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	18.48	19.04
YT-032	Duct bank 3 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	11.71	12.07
YT-033	Duct bank 3 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	14.17	14.60
YT-034	Duct bank 3 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	17.56	18.09
YT-035	Duct bank 3 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	22.18	22.84
YT-036	Duct bank 3 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	27.11	27.93
YT-042	Duct bank 4 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	14.17	14.60
YT-043	Duct bank 4 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	17.25	17.77
YT-044	Duct bank 4 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	21.57	22.20
YT-045	Duct bank 4 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	27.11	29.04
YT-046	Duct bank 4 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	33.27	34.27
YT-062	Duct bank 6 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	20.02	20.60
YT-063	Duct bank 6 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	24.64	25.39
YT-064	Duct bank 6 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	30.80	31.73
YT-065	Duct bank 6 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	38.20	39.35
YT-066	Duct bank 6 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	49.28	50.77
YT-082	Duct bank 8 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	25.87	26.65
YT-083	Duct bank 8 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	29.57	30.46
YT-084	Duct bank 8 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	39.43	40.61
YT-085	Duct bank 8 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	49.33	50.77
YT-086	Duct bank 8 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	62.84	64.72
YT-122	Duct bank 12 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	36.96	38.07
YT-123	Duct bank 12 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	45.59	46.96
YT-124	Duct bank 12 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	57.91	59.65
YT-125	Duct bank 12 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	72.69	74.88
YT-126	Duct bank 12 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	92.41	95.18
YT-15	15KV feeder w/4 way 4" DB, 4/0 CP grd, 3-6'x8'x6'D MHS & 3-250 MCM cab w/spl	LF	56.68	58.39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
YT-162	Duct bank 16 way 2" PVC duct w/exca & backfill does not incl. pave remvl	LF	49.28	50.77
YT-163	Duct bank 16 way 3" PVC duct w/exca & backfill does not incl. pave remvl	LF	60.37	62.19
YT-164	Duct bank 16 way 4" PVC duct w/exca & backfill does not incl. pave remvl	LF	77.62	79.95
YT-165	Duct bank 16 way 5" PVC duct w/exca & backfill does not incl. pave remvl	LF	94.87	97.72
YT-166	Duct bank 16 way 6" PVC duct w/exca & backfill does not incl. pave remvl	LF	123.21	126.91
YT-35	35KV feeder w/4 way 6" DB, 4/0 CP grd, 3-9'x12'x6'D MHS &3-500 MCM cab w/spl	LF	96.10	98.99
ZM-15	Pole line complete 15KV 4/0 alum w/1 tap pole & 1 term pole 1000' run	LF	16.02	16.51
ZM-35	Pole line complete 35KV 4/0 alum w/1 tap pole & 1 term pole 1000' run	LF	16.64	17.14
513	ELECTRICAL SUBSTATION			
YJ-C1	15KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	5,994.00	6,216.00
YJ-C10	25KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	6,993.00	7,215.00
YJ-C11	37.5KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	7,215.00	7,437.00
YJ-C12	50KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	7,437.00	8,325.00
YJ-C13	75KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	8,658.00	8,991.00
YJ-C14	100KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	9,213.00	9,435.00
YJ-C15	167KVA 1PH pad mtd xfmr w/conc pad & grd'g	EA	9,546.00	9,879.00
YJ-C16	75KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	15,540.00	15,873.00
YJ-C17	112KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	15,948.00	16,428.00
YJ-C18	150KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	17,205.00	17,760.00
YJ-C19	225KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	19,425.00	19,980.00
YJ-C20	300KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	20,091.00	20,757.00
YJ-C21	500KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	24,309.00	24,975.00
YJ-C22	750KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	27,972.00	29,082.00
YJ-C23	1000KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	32,190.00	33,300.00
YJ-C24	1500KVA 3PH pad mtd xfmr w/conc pad & grd'g	EA	40,404.00	41,625.00
YX-PF	1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	5,328.00	5,439.00
YX-PG	1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	5,550.00	5,661.00
YX-PH	1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	5,883.00	5,994.00
YX-PI	3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	11,544.00	11,877.00
YX-PJ	3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	11,655.00	11,988.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
YX-PK	3, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole	EA	11,988.00	12,321.00
YX-PLF	1, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	5,772.00	5,883.00
YX-PLG	1, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	5,994.00	6,105.00
YX-PLH	1, 1PH 25KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	6,327.00	6,438.00
YX-PLI	3, 1PH 10KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	11,988.00	12,321.00
YX-PLJ	3, 1PH 15KVA xfmr w/term cutouts arresters 2" rscriser 40' pole w/guy	EA	11,988.00	12,321.00
YX-PLK	3, 1PH 25KVA xfmr w/term cutouts arresters 2"rscriser 40' pole w/guy	EA	12,321.00	12,654.00
	541 & 542 HEAT DISTRIBUTION			
QA-1AA	10" steam & 6" condensate heat distribution piping above ground	LF	311.00	320.00
QA-2AA	8" steam & 6" condensate heat distribution piping above ground	LF	304.00	313.00
QA-3AA	8" steam & 4" condensate heat distribution piping above ground	LF	245.00	253.00
QA-4AA	6" steam & 4" condensate heat distribution piping above ground	LF	206.00	213.00
QA-5AA	4" steam & 2.5" condensate heat distribution piping above ground	LF	181.00	186.00
QA-6AA	3" steam & 2.5" condensate heat distribution piping above ground	LF	162.00	167.00
QA-7AA	3" steam & 2" condensate heat distribution piping above ground	LF	153.00	158.00
QA-8AA	2.5" steam & 2.5" condensate heat distribution piping above ground	LF	153.00	158.00
QA-9AA	2.5" steam & 2" condensate heat distribution piping. Above ground	LF	150.00	154.00
QA-91A	2.5" steam & 1.5" condensate heat distribution piping. Above ground	LF	148.00	152.00
QA-92A	2" steam & 2" condensate heat distribution piping above ground	LF	145.00	149.00
QA-93A	2" steam & 1.5" condensate heat distribution piping above ground	LF	140.00	144.00
QA-94A	2" steam & 1" condensate heat distribution piping above ground	LF	138.00	141.00
QA-95A	1.5" steam & 1.5" condensate heat distribution piping above ground	LF	134.00	139.00
QA-96A	1.5" steam & 1" condensate heat distribution piping above ground	LF	132.00	135.00
QA-97A	1" steam & 1" condensate heat distribution piping above ground	LF	130.00	133.00

For areas with unstable soil conditions increase unit prices by 20%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
CF-CQ	Precast 48" dia manhole 5" deep w/frame & cover	EA	2,063.00	2,126.00
CF-CT	Precast 48" dia manhole 8" deep w/frame & cover	EA	2,957.00	3,046.00
CJ-BM	Paving patch for trench. flexible 2" surface w/12" base incl removal	SY	35.73	36.81
CK-EZ	Concrete patch for trench 6" conc over 6" base (incl removal)	SY	57.91	59.65
SA-DC	4" exterior sewer cleanout	EA	770.34	794.00
SA-DD	6" exterior sewer cleanout	EA	899.00	927.00
SA-DE	8" exterior sewer cleanout	EA	1,158.00	1,193.00
SA-HB	4" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	7.06	7.28
SA-HD	6" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	7.70	7.94
SA-HF	8" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	9.55	9.83
SA-HG	10" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	12.94	13.33
SA-HH	12" PVC sewer pipe ASTM 3034, SDR-35 w/excav, bkfill & compaction	LF	15.41	15.87
	551, 552, & 553 WATER DISTRIBUTION			
CK-EZ	Concrete patch for trench 6" conc over 6" base (incl removal)	SY	57.91	59.65
RT-AA	Fire hydrant bend CI MJ	EA	3,450.00	3,553.00
RT-AE	4" 90 deg bend CI MJ	EA	246.00	254.00
RT-AI	6" 90 deg bend CI MJ	EA	321.00	330.00
RT-AM	8" 90 deg bend CI MJ	EA	370.00	381.00
RT-AQ	10" 90 deg bend CI MJ	EA	486.00	502.00
RT-AU	12" 90 deg bend CI MJ	EA	616.00	635.00
RT-BA	4" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	12.94	13.32
RT-BB	6" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	16.64	17.14
RT-BC	8" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	22.18	22.84
RT-BD	10" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	28.96	29.83
RT-BE	12" PVC water pipe AWWA C-900 Class 150 w/excav bkfill & compaction	LF	35.73	36.81
RT-CA	1" Type K copper pipe w/3' deep trenching, backfill & compaction	LF	4.32	4.45
RT-CB	1-1/2" Type K copper pipe w/3' deep trenching, backfill & compaction	LF	5.85	6.03
RT-CC	2" Type K copper pipe w/3' deep trenching, backfill & compaction	LF	7.39	7.61

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
RT-DA	4" tapping saddle tap size to 2"	EA	159.84	165.39
RT-DB	6" tapping saddle tap size to 2"	EA	197.58	225.33
RT-DC	8" tapping saddle tap size to 2"	EA	209.79	215.34
RT-DD	10" tapping saddle tap size to 2"	EA	234.21	240.87
RT-DE	12" tapping saddle tap size to 2"	EA	270.84	279.72
RT-IA	4" x 4" tapping sleeve, 4" tapping valve & 4" tapped hole in pipe	EA	1,940.28	1,998.00
RT-IB	6" x 6" tapping sleeve, 6" tapping valve & 6" tapped hole in pipe	EA	2,833.83	2,919.30
RT-IF	8" x 8" tapping sleeve, 8" tapping valve & 8" tapped hole in pipe	EA	3,265.62	3,363.30
RT-IJ	10" x 10" tapping sleeve, 10" tapping valve & 10" tapped hole in pipe	EA	5,174.82	5,330.22
RT-IO	12" x 12" tapping sleeve, 12" tapping valve & 12" tapped hole in pipe	EA	6,776.55	6,979.68
Underground tanks for hazardous waste oil storage tanks increase cost by 120%				
561 & 562 FUEL STORAGE				
TC-CC1	Underground oil storage tank 500 gal fiberglass	GAL	19.71	20.31
TC-CC2	Underground oil storage tank 500 gal fiberglass	GAL	18.48	19.04
TC-CC3	2000 gal underground fiberglass fuel oil tank	GAL	11.10	11.43
TC-CC4	4000 gal underground fiberglass fuel oil tank	GAL	7.39	7.61
TC-CC5	6000 gal underground fiberglass fuel oil tank	GAL	6.16	6.35
TC-CC6	8000 gal underground fiberglass fuel oil tank	GAL	5.55	5.72
TC-CC7	10000 gal underground fiberglass fuel oil tank	GAL	4.93	5.08
TC-CC8	12000 gal underground fiberglass fuel oil tank	GAL	4.62	4.77
TC-CC9	15000 gal fiberglass underground fuel oil tank	GAL	4.62	4.77
CC-CD	18000 gal underground fiberglass fuel oil tank	GAL	4.32	4.45
71X ROADS				
CI-AM	Stone aggregate base 6" thick	SY	6.90	7.12
CI-AJ	Stone aggregate base 8" thick	SY	9.25	9.52
CI-AO	Stone aggregate base course material North Carolina source	SY	37.88	39.03
CJ-BD	Asphalt paving 1-1/2" overlay	SY	6.78	6.99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($)	
			FY 90	FY 91
CJ-BE	Asphalt paving 2" overlay	SY	9.11	9.39
CJ-CA	Single bituminous surface treatment	SY	2.46	2.55
CJ-CB	Double bituminous surface treatment	SY	3.09	3.17
CJ-CF	Slurry seal	SY	5.24	5.39
CK-EC	Conc paving non-reinf 5000 psi 6 inch thick	SY	30.80	31.73
CK-EE	Conc paving non-reinf 5000 psi 8 inch thick	SY	38.20	39.35
CK-EG	Conc paving non-reinf 5000 psi 10 inch thick	SY	48.05	49.49
CM-AE	Painting 4" lines on pavement	LF	0.40	0.41
CM-AEA	Inlaid pavement lane line markings 4" wide	LF	1.60	1.67
CM-BA	Concrete curb 6x18 cast-in-place	LF	14.79	15.23
CM-BE	Concrete curb & gutter cast-in-place	LF	19.09	19.68
CM-BI	Concrete valley gutter cast-in-place	SY	55.44	57.11
72X	PARKING			
CI-AH	Stone aggregate base 6" thick	SY	6.90	7.12
CI-AJ	Stone aggregate base 8" thick	SY	9.25	9.44
CI-AO	Stone aggregate base course material North Carolina source	CY	37.88	39.03
CJ-BD	Asphalt paving 1-1/2" overlay	SY	6.78	6.99
CJ-HE	Asphalt paving 2" overlay	SY	9.11	9.39
CJ-CA	Single bituminous surface treatment	SY	2.46	2.54
CJ-CB	Double bituminous surface treatment	SY	3.09	3.17
CJ-CF	Slurry seal	SY	5.24	5.39
CM-AE	Painting 4" lines on pavement	LF	0.40	0.41
CM-AEA	Inlaid pavement lane line markings 4" wide	LF	1.60	1.67
CM-BA	Concrete curb 6x18 cast-in-place	LF	14.79	15.25
CM-BE	Concrete curb & gutter cast-in-place	LF	19.09	19.68
CM-BI	Conc valley gutter cast-in-place	SY	55.44	57.11
CM-BN	Precast concrete parking bumpers 6"x10"x6' incl dowels	EA	44.98	46.32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
74X SIDEWALKS				
CM-CA	Conc sidewalks 4 inch cast-in-place no base	SY	32.03	33.00
75X & 76X AIRCRAFT PAVING				
CI-AH	Stone aggregate base 6" thick	SY	6.90	7.12
CI-AJ	Stone aggregate base 8" thick	SY	9.25	9.52
CI-AO	Stone aggregate base course material North Carolina source	SY	37.86	39.03
CJ-BD	Asphalt paving 1-1/2" overlay	SY	6.78	6.98
CJ-BE	Asphalt paving 2" overlay	SY	9.11	9.39
CJ-CA	Single bituminous surface treatment	SY	2.46	2.54
CJ-CB	Double bituminous surface treatment	SY	3.09	3.17
CJ-CF	Slurry seal	SY	5.24	5.39
CK-EC	Conc paving non-reinf 5000 psi 6 inch thick	SY	30.80	31.72
CK-EE	Conc paving non-reinf 5000 psi 8 inch thick	SY	38.20	39.34
CK-EG	Conc paving non-reinf 5000 psi 10 inch thick	SY	48.05	49.40
CM-AE	Painting 4" lines on pavement	LF	0.40	0.41
CM-AEA	Inlaid pavement lane line markings 4" wide	LF	1.60	1.64
85X STORM DRAINAGE				
CA-BA	12" RCP Class III storm drainage 4 ft deep w/ excav, bkfl & compact	LF	17.99	18.54
CA-BB	15" RCP Class III storm drainage 4 ft deep w/ excav, bkfl & compaction	LF	24.64	25.39
CA-BC	18" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	33.27	34.27
CA-BE	24" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	46.21	47.59
CA-BG	30" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	64.07	65.99
CA-BH	36" RCP Class III storm drainage 5 ft deep w/ excav, bkfl & compaction	LF	83.78	86.30
CF-CQ	Precast 48" dia manhole 5' deep w/frame & cover	EA	2,065.00	2,126.00
CF-CT	Precast 48" dia manhole 8' deep w/frame & cover	EA	2,884.00	2,969.00
CF-DC	Standard catch basin 5 ft deep	EA	1,940.00	1,998.00
CF-LB	Curb inlet max depth 8' 4' throat width, 12" to 36 " pipe w/excav & bkfl	EA	3,450.00	3,552.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($) FY 90	FY 91
CJ-BM	Paving patch for trench. Flexible 2" surface w/ 12" base incl removal	SY	35.73	36.81
CK-EZ	Concrete patch for trench 6" conc over 6" base (incl removal)	SY	55.44	57.11
812	BORROW			
BF-BM	Borrow fill in pace at Sewells Point Area from Willoughby borrow pit	CY	10.67	10.99
BF-BN	Borrow fill in place at Cherry Pt/Camp Lejeune from station borrow pit	CY	11.58	11.93
BF-BO	Borrow fill in place frm commercial Tidewater pit 30 mile round trip	CY	17.25	17.76
BF-CBK	Borrow fill in place frm commercial Tidewater pit 20 miles round trip	CY	16.02	16.49
813	TOPSOIL SEED			
DB-AA	4" topsoil from piles on site w/seed, fertilize lime, & fine grade	SY	1.85	1.90
86X	FENCING			
CP-AC	Chain link fence 9 ga galv steel 4' high w/3 strand barbwire	LF	12.32	12.69
CP-AE	Chain link fence 9 ga galv steel 6' high w/3 strand barbwire	LF	15.71	16.18
CP-AF	Chain link fence 9 ga galv steel 7' high w/3 strand barbwire	LF	17.25	17.76
CP-AG	Chain link fence 9 ga galv steel 8' high w/3 strand barbwire	LF	19.09	19.67
CP-BC	Gate chain link 9 ga galv stl 4' high w/gate posts & barbwire	LF	54.52	56.15
CP-BE	Gate chain link 9 ga galv stl 6' high w/gate posts & barbwire	LF	77.01	79.32
CP-BF	Gate chain link 9 ga galv stl 7' high w/gate posts & barbwire	LF	88.71	91.38
CP-BG	Gate chain link 9 ga galv stl 8' high w/gate posts & barbwire	LF	102.26	105.84
84X	DEMOLITION			
BB-BB	Clear & grub medium dense areas w/disposal	AC	2,834.00	2,919.00
BC-EA	Demolition of masonry building complete w/disposal	CF	0.24	0.26
BC-EB	Demolition of wood frame building complete w/disposal	CF	0.24	0.26
BC-EE	Demolition of steel building complete w/disposal	CF	0.56	0.58
BD-AA	Removal of bituminous paving up to 3" thick w/disposal	SY	4.44	4.57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Table 12 (Continued)

Supporting Facilities Guidance Cost (1 July 1987)

CODE	DESCRIPTION	U/M	TOTAL COST ($)	
			FY 90	FY 91
BD-AJ	Removal of concrete pavement w/disposal	SY	14.79	15.23
BD-AL	Removal of conc sidewalk 4" thick w/disposal	SY	3.57	3.69
BD-BA	Removal of concrete curb & gutter	LF	2.59	2.66
911, 912, & 913	LAND PILING			
BB-AB	Piling prestressed conc 10" sq, more than 60 LF long, truck delivery	LF	13.55	13.96
BB-BC	Treated wood piling 40' to 50' long 12" butt 7" tip 12 lb creosote	LF	11.10	11.43
BB-CB	Piling prestressed conc 12" sq, more than 60 LF long, truck delivery	LF	15.10	15.54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 14: COST CERTIFICATION SAMPLE ESTIMATE

14.1 DD Form 1391. Figure 19 shows the DD Form 1391 segment of the cost certification estimate.

14.2 Building Budget Estimate Summary Sheet. Figure 20 shows the budget estimate summaries for the cost certification estimate.

14.3 Estimate Summary Sheet. See Figure 21.

14.4 Cost Estimate Backup Sheet (LANTDIV). See Figure 22.

14.5 Building Square Foot Cost Development. See Figure 23.

14.6 Worksheet. The following information shows the backup development for Figure 23.

P-134

FOUNDATION

	Surtass Support Center Norfolk, VA Fac. No. L-0007 Award Date: 03/83 Size: 45,300 SF (Foundation with pile caps grade beams)	PW Building Camp Lejeune, NC Fac. No. L-0049 Award Date: 01/83 Size: 11,775 (Foundation without pile caps)
Systems Cost	1.89	1.43
Escalation to 04/89	x 1.15	x 1.17
Size Factor to 17,790 SF	x 1.10	x 0.97
Area Cost Factor to Norfolk, VA	x 1.00	x 1.10
Adjusted Unit Cost	= 2.40	= 1.79

UNIT COST DIFFERENCE = 2.40 - 1.79 = 0.61

USE: 0.65

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

1. COMPONENT	FY 19_89	MILITARY CONSTRUCTION	2. DATE
NAVY		PROJECT DATA	Nov. 1986

3. INSTALLATION AND LOCATION	4. PROJECT TITLE
Craney Island, Naval Supply Center, Norfolk, VA	Public Works Building

5. PROGRAM ELEMENT	6. CAT CODE	7. PROJECT NUMBER	8. PROJECT COST ($000)
	219-10	P-134	1,700

9. COST ESTIMATES

ACF: 0.83 FER: N/A ITEM	ESCALATED TO: April 1989	U/M	QUANTITY	UNIT COST	COST ($000)
PRIMARY FACILITY		SF	17,790	62.62	1,114
BUILDING		SF	17,790	56.32	(1,002)
BUILT-IN EQUIP		LS			(112)
					( )
					( )
SUPPORTING FACILITIES		LS			434
SPECIAL FOUNDATION FEATURES (A)		LS			(87)
ELECTRICAL UTILITIES (B)		LS			(104)
MECHANICAL UTILITIES (C)		LS			(43)
ROADS, PARKING, SIDEWALKS (D)		LS			(83)
SITE IMPROVEMENTS (E)		LS			(68)
DEMOLITION (F)		LS			(69)
		LS			( )
SUBTOTAL					1,548
CONTINGENCIES (5%)					77
TOTAL CONTRACT COST					1,625
SUPERVISION, INSPECTION, OVERHEAD (5.5%)					89
TOTAL REQUEST					1,714
TOTAL REQUEST (ROUNDED)					1,700
EQUIPMENT PROVIDED FROM OTHER APPROPRIATIONS (NON ADD)					

10. DESCRIPTION OF PROPOSED CONSTRUCTION

Construct a one-story masonry Public Works facility to include 1600 SF of P.O.L. operations area with foundation wal supported on piling and floor slab supported on fill. Masonry bearing walls willsupport metal roof joists, metal dec and built-up roof. Functions of the building will include administration spaces, P.O.L. operations area, toilet/ locker area, public works shops and storage. The offices and P.O.L. operations area (without sample test area) will be air-conditioned. Shops and storage areas will be heated and ventilated. Sprinkler and fire alarm systems will be provided for the entire building. A monorail hoist will be provided in the pipeshop. Machine shop equipment will be moved from building 54 to new building. Supporting facilities will include surcharge on site,piling for foundations, site improvements, roads,parking, sidewalks, utilities and aere lighting.Seven buildings are to be demolished. Asbestos removal is required in bldg. 54.
(Air Conditioning - 10 tons)

DD FORM 1391

Figure 19
DD Form 1391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

1. COMPONENT	FY 19 89	MILITARY CONSTRUCTION PROJECT DATA	2. DATE
NAVY			Nov. 1986

3. INSTALLATION AND LOCATION
Craney Island, Naval Supply Center, Norfolk, VA

4. PROJECT TITLE	5. PROJECT NUMBER
Public Works Building	P- 134

11. REQUIREMENT: 17,790 SF ADEQUATE: 0 SF SUBSTANDARD: 18,521 SF

PROJECT: This project involves the consolidation of existing structures and facilities into a single building. The consolidated building includes (1) PW shops and storage spaces, (2) administative offices, and (3) lunch/locker rooms. the project also calls for the demolition of seven buildings.

REQUIREMENT: The existing facilities and structures which will be consolidated under this project were identified as inadequate during the POL Modernization Survey of Craney Island conducted November, December 1981. They have also been listed for demolition in the activity's Facilities Planning Document.

CURRENT SITUATION: The existing facilities and structures are widely separated which makes them operationally and functionally inefficient. In addition, many of the facilities are structurally inadequate. Internally the existing facilities and structures have inadequate and poorly arranged space. In addition to the problems associated with the use of existing facilities and structures described above, a number of these structures are located in the 100 Year flood plain. During the period of flooding, due to storms and northeasters, these facilities are inoperable.

IMPACT IF NOT PROVIDED: Continued use of inefficiently located facilities will result in high energy and manpower requirements. Service to the fleet will continue to be seriously hindered during periods of high tide flooding.

DD FORM 1391c

Figure 19 (Continued)
DD Form 1391c

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BUILDING BUDGET ESTIMATE SUMMARY SHEET FOR P-134

TITLE: Public Works Building — COST ESCALATED TO: April 1989

LOCATION: Craney Island, Naval Supply Center, Norfolk, VA — ACF/FER: 0.93/1.00

PREPARED BY: A.O.Noble — DATE: Nov. 1988 — CONTINGENCY: 5%

BUILDING: 17,790 SF		$/SF	$/SYS	SYS QUAN	(UM)	TOTAL	BUILDING	BUILT IN EQUIPMENT
041 OMSI		0.14	2522.00	1	LS	3,000	3,000	
111 FOUNDATION		2.40	2.40	17,790	sf	43,000	43,000	
112 SLAB ON GRADE		3.25	3.25	17,790	sf	58,000	58,000	
113 STRUCTURAL		2.25	2.25	17,790	sf	40,000	40,000	
141 ROOF SYSTEM		8.45	8.45	17,790	sf	150,000	150,000	
142 EXTERIOR WALL SYSTEM		7.96	14.00	10,121	sf	142,000	142,000	
143 INTERIOR WALL SYSTEM		6.20	3.15	35,000	SF	110,000	110,000	
144 INTERIOR FINISHES		1.65	1.65	17,790	sf	29,000	29,000	
145/146 DOORS AND WINDOWS		1.03	6.10	3,000	sf	18,000	18,000	
147 SPECIALTIES		0.25	0.25	17,790	sf	4,000	4,000	
211 PLUMBING		2.47	2000.00	22	EA	44,000	44,000	
213 ROOF DRAINS		0.38	1700.00	4	ea	7,000	7,000	
222 AIR CONDITIONING		3.93	3500.00	20	TN	70,000	70,000	
223 HEATING AND VENTILATING		5.31	270.00	350	MBT	95,000	95,000	
231 CRANES AND HOIST	1.00	0.71	1270.00	10	TN	13,000		13,000
244 COMPRESSED AIR	1.00	1.11	330.00	60	CFM	20,000		20,000
252 EXHAUST SYSTEM	1.00	1.95	4.34	8,000	CFM	35,000		35,000
271 SPRINKLERS	1.00	1.35	1.35	17,790	SF	24,000		24,000
275 FIRE ALARM SYSTEM	1.00	0.30	0.30	17,790	SF	5,000		5,000
311 POWER		6.75	240.00	500	KW	120,000	120,000	
312 LIGHTING		3.50	3.50	17,790	SF	62,000	62,000	
341 TELEPHONE	1.00	0.85	0.85	17,790	SF	15,000		15,000
413 MOVE MACHINE SHOP EQUIPMENT		0.39	7000.00	1	LS	7,000	7,000	
SUBTOTAL BUILDING ONLY		62.58				1,114,000	1,002,000	112,000
CCM								
OMSI								
TOTAL BUILDING COST		62.58				1,114,000	1,002,000	112,000

Figure 20
Building Budget Estimate Summary Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BUILDING BUDGET ESTIMATE SUMMARY SHEET FOR P-134

TITLE: Public Works Building — COST ESCALATED TO: April 1989

LOCATION: Craney Island, Naval Supply Center, Norfolk, VA — ACF/FER: 0.93/1.00


PREPARED BY: A.O.Noble — DATE: Nov. 1986 — CONTINGENCY: 5%

BUILDING: 17,790 SF		$/SF	$/SYS	SYS QUAN	(UM)	TOTAL BUILDING	BUILT IN EQUIPMENT
SUPPORTING FACILITIES							
511 ELECT DISTRIB PRIMARY	B		210.98	250	LF	53,000	
513 ELECTRICAL SUB-STATION	B		34.00	500	kVA	17,000	
514 AREA LIGHTING	B		4014.00	8	EA	32,000	
523 COMMUNICATIONS, TELEPHONE	B		22.75	100	LF	2,000	
551 WATER DISTRIBUTION	C		43.25	400	LF	17,000	
554 SANITARY SEWER	C		33.33	150	LF	5,000	
562 FUEL STORAGE SYSTEM	C		21000.00	1	LS	21,000	
713 ROADS	D		17.40	560	SY	10,000	
723 PARKING	D		16.64	3,740	SY	62,000	
741 SIDEWALKS	D		26.00	425	SY	11,000	
813 TOPSOIL, SEED	E		1.50	2,000	SY	3,000	
816 SURCHARGE,EARTH REPL	E		13.00	4,800	CY	62,000	
819 STRIP TOPSOIL	E		2.75	1,200	CY	3,000	
843 DEMOLITION	F		69000.00	1	LS	69,000	
911 LAND PILING	A		12.25	5,490	LF	67,000	
TOTAL SUPPORTING FACILITIES						434,000	

TOTAL CONTRACT COST W/O CONTINGENCY:	1,548,000
CONTINGENCY (5%)	77,000
TOTAL CONTRACT COST	1,625,000
SIOH (5.5%)	89,000
TOTAL BUDGET COST	1,714,000
ROUNDED	1,700,000

Figure 20 (Continued)
Building Budget Estimate Summary Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

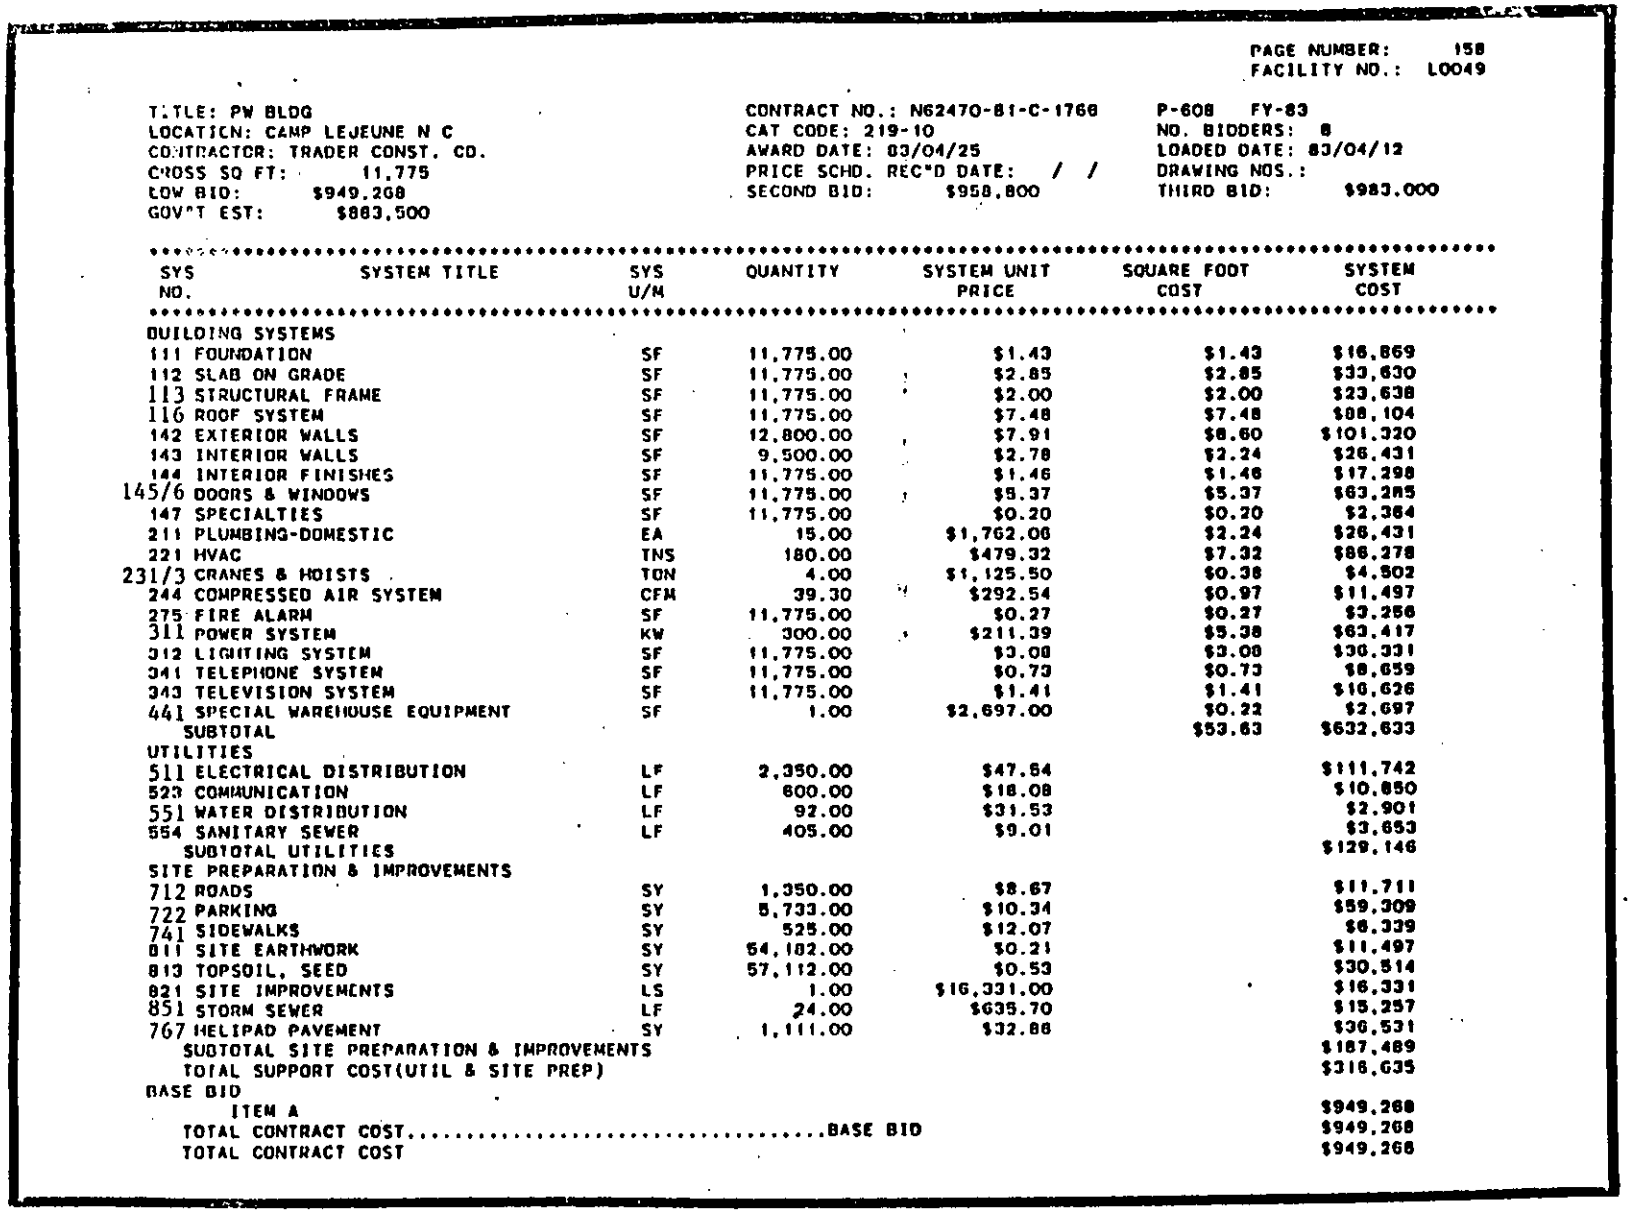

PAGE NUMBER: 158
FACILITY NO.: L0049

TITLE: PW BLDG
LOCATION: CAMP LEJEUNE N C
CONTRACTOR: TRADER CONST. CO.
GROSS SQ FT: 11,775
LOW BID: $949,268
GOV'T EST: $883,500


CONTRACT NO.: N62470-81-C-1768
CAT CODE: 219-10
AWARD DATE: 83/04/25
PRICE SCHD. REC'D DATE: / /
SECOND BID: $958,800

P-608 FY-83
NO. BIDDERS: 8
LOADED DATE: 83/04/12
DRAWING NOS.:
THIRD BID: $983,000

SYS NO.	SYSTEM TITLE	SYS U/M	QUANTITY	SYSTEM UNIT PRICE	SQUARE FOOT COST	SYSTEM COST
BUILDING SYSTEMS						
111	FOUNDATION	SF	11,775.00	$1.43	$1.43	$16,869
112	SLAB ON GRADE	SF	11,775.00	$2.85	$2.85	$33,630
113	STRUCTURAL FRAME	SF	11,775.00	$2.00	$2.00	$23,638
116	ROOF SYSTEM	SF	11,775.00	$7.48	$7.48	$88,104
142	EXTERIOR WALLS	SF	12,800.00	$7.91	$8.60	$101,320
143	INTERIOR WALLS	SF	9,500.00	$2.78	$2.24	$26,431
144	INTERIOR FINISHES	SF	11,775.00	$1.46	$1.46	$17,298
145/6	DOORS & WINDOWS	SF	11,775.00	$5.37	$5.37	$63,285
147	SPECIALTIES	SF	11,775.00	$0.20	$0.20	$2,364
211	PLUMBING-DOMESTIC	EA	15.00	$1,762.06	$2.24	$26,431
221	HVAC	TNS	180.00	$479.32	$7.32	$86,278
231/3	CRANES & HOISTS	TON	4.00	$1,125.50	$0.38	$4,502
244	COMPRESSED AIR SYSTEM	CFM	39.30	$292.54	$0.97	$11,497
275	FIRE ALARM	SF	11,775.00	$0.27	$0.27	$3,256
311	POWER SYSTEM	KW	300.00	$211.39	$5.38	$63,417
312	LIGHTING SYSTEM	SF	11,775.00	$3.08	$3.08	$36,331
341	TELEPHONE SYSTEM	SF	11,775.00	$0.73	$0.73	$8,659
343	TELEVISION SYSTEM	SF	11,775.00	$1.41	$1.41	$16,626
441	SPECIAL WAREHOUSE EQUIPMENT	SF	1.00	$2,697.00	$0.22	$2,697
	SUBTOTAL				$53.63	$632,633
UTILITIES						
511	ELECTRICAL DISTRIBUTION	LF	2,350.00	$47.54		$111,742
523	COMMUNICATION	LF	600.00	$18.08		$10,850
551	WATER DISTRIBUTION	LF	92.00	$31.53		$2,901
554	SANITARY SEWER	LF	405.00	$9.01		$3,653
	SUBTOTAL UTILITIES					$129,146
SITE PREPARATION & IMPROVEMENTS						
712	ROADS	SY	1,350.00	$8.67		$11,711
722	PARKING	SY	5,733.00	$10.34		$59,309
741	SIDEWALKS	SY	525.00	$12.07		$6,339
811	SITE EARTHWORK	SY	54,182.00	$0.21		$11,497
813	TOPSOIL, SEED	SY	57,112.00	$0.53		$30,514
821	SITE IMPROVEMENTS	LS	1.00	$16,331.00		$16,331
851	STORM SEWER	LF	24.00	$635.70		$15,257
767	HELIPAD PAVEMENT	SY	1,111.00	$32.88		$36,531
	SUBTOTAL SITE PREPARATION & IMPROVEMENTS					$187,489
	TOTAL SUPPORT COST(UTIL & SITE PREP)					$316,635
BASE BID						
	ITEM A					$949,268
	TOTAL CONTRACT COST.....BASE BID					$949,268
	TOTAL CONTRACT COST					$949,268

Figure 21
Estimate Summary Sheet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

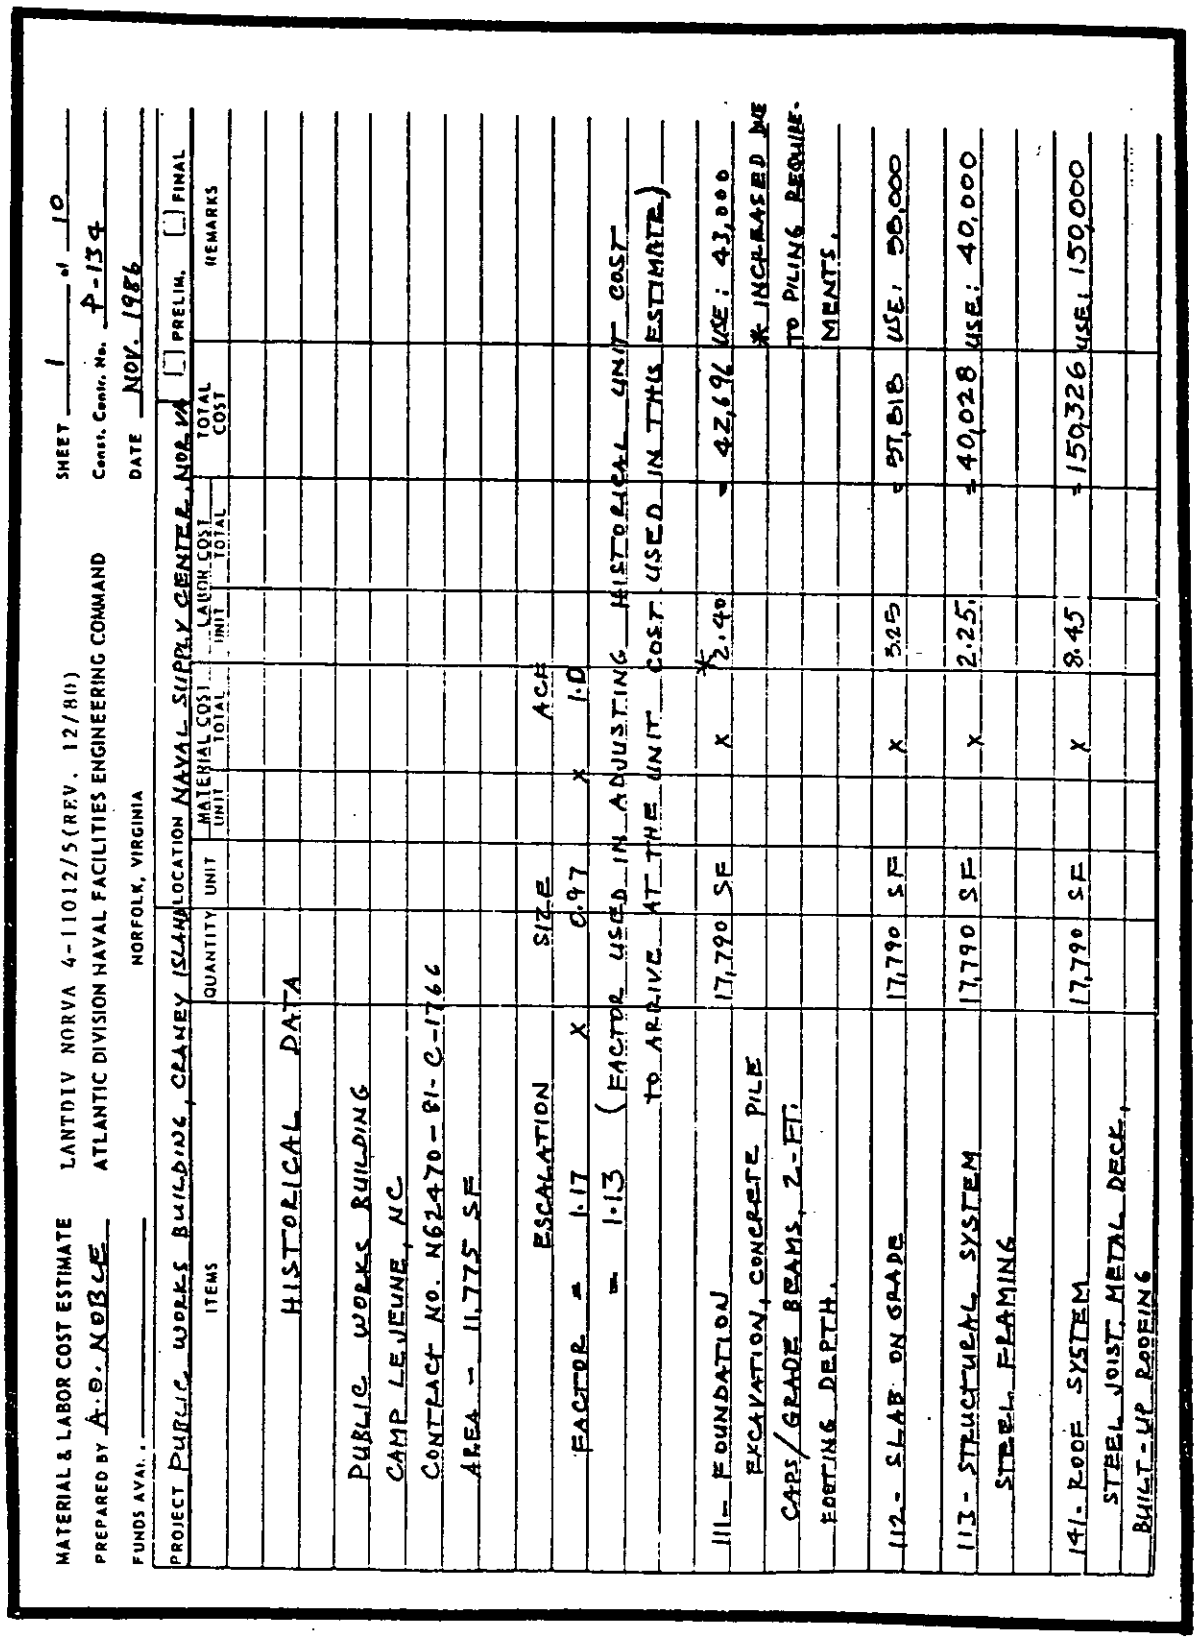

MATERIAL & LABOR COST ESTIMATE LANTDIV NORVA 4-11012/5 (REV. 12/80) SHEET 1 of 10

PREPARED BY A.D. NOBLE ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND Const. Contr. No. P-134

FUNDS AVAIL.: _____ NORFOLK, VIRGINIA DATE NOV. 1986

PROJECT Public Works Buildings, Craney Island LOCATION Naval Supply Center, Norva [ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
HISTORICAL DATA								
PUBLIC WORKS BUILDING								
CAMP LEJEUNE, NC								
CONTRACT NO. N62470-81-C-1766								
AREA - 11,775 SF								
ESCALATION	SIZE		ACH					
FACTOR = 1.17	X 0.97		X 1.0					
= 1.13 (FACTOR USED IN ADJUSTING HISTORICAL UNIT COST								
TO ARRIVE AT THE UNIT COST USED IN THIS ESTIMATE)								
111- FOUNDATION	17,790	SF	X		X 2.40		= 42,696	USE: 43,000
EXCAVATION, CONCRETE PILE								* INCREASED DUE
CAPS/GRADE BEAMS, 2-FT.								TO PILING REQUIRE-
FOOTING DEPTH.								MENTS.
112- SLAB ON GRADE	17,790	SF	X		3.25		= 57,818	USE: 58,000
113- STRUCTURAL SYSTEM	17,790	SF	X		2.25		= 40,028	USE: 40,000
STEEL FRAMING								
141- ROOF SYSTEM	17,790	SF	X		8.45		= 150326	USE: 150,000
STEEL JOIST, METAL DECK,								
BUILT-UP ROOFING								

Figure 22
Cost Estimate Backup Sheet (LANTDIV)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80)

PREPARED BY A.D. NOBLE — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND

FUNDS AVAI. _____ — NORFOLK, VIRGINIA

SHEET 2 of 10

Const. Contr. No. P-134

DATE NOV. 1986

PROJECT PUBLIC WORKS FACILITY — LOCATION CRANEY ISLAND, NORVA — [ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
142. EXTERIOR WALL SYSTEM 10" CMU W/ METAL SIDING ABOVE 8 FT. + 10" CMU W/ BRICK VENEER BELOW 8 FT. WALL HT. IS 16.5.	10,121	SF		X	14.00	* =	141,694	USE: 142,000 * HISTORICAL DATA IS FROM PAC. NO. L0131, DAM NECK, VA, BECAUSE OF ONE UNIT.
143. INTERIOR WALL SYSTEM	35,000	SF		X	3.15	=	110,250	USE: 110,000
144. INTERIOR FINISHES SYSTEM	17,790	SF		X	1.65	=	29,354	USE: 29,000
147. SPECIALTIES	17,790	SF		X	0.25	=	4,448	USE: 4,000
211. PLUMBING STANDARD PIPING + FIXTURES	22	EA		X	2000	=	44,000	USE: 44,000
213. ROOF DRAINS	4	EA		X	1700	=	6,800	USE: 7,000
145. DOORS + WINDOWS HOLLOW METAL DOORS C/ FRAMES, FIXED AL WINDOWS	3,000	SF		X	6.10	=	18,300	USE: 18,000
222. AIR CONDITIONING	20	TN		X	3500*	=	70,000	* ADJUSTED TO REFLECT TYPICAL COST PER TON
223. HEATING + VENTILATING	350	MBT		X	270	=	95,000	

Figure 22 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 3 of 10

PREPARED BY A.O.NOBLE — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAIL. — NORFOLK, VIRGINIA — DATE Nov. 1986

PROJECT PUBLIC WORKS BUILDING, CRANEY ISLAND — LOCATION NSC, NORFOLK, VA — [ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
244. COMPRESSED AIR	60	CFM		X	330	=	19,800	USE: 20,000
10 HP, LOW PRESSURE AIR								
& COMPRESSOR, RECEIVER, PIPING								
& VALVES.								
231. CRANES & HOIST								
2T CAP. HOIST, 50 FPM								
TROLLEY 15-FT. LIFT	1	EA	-	9,000	-	460	9,460	
MONORAIL	90	LF	56	2240	25	1000	3,240	
							12,700	USE: 13,000
271. SPRINKLER SYSTEM	17,790	SF		X	1.35	=	24,017	USE: 24,000
275. FIRE ALARM SYSTEM	17,790	SF		X	0.30	=	5,337	USE: 5,000
311. POWER SYSTEM	500	KW		X	240	=	120,000	USE: 120,000
312. LIGHTING SYSTEM	17,790	SF		X	3.50	=	62,265	USE: 62,000
341. TELEPHONE SYSTEM	17,790	SF		X	0.85	=	15,121	USE: 15,000

Figure 22 (Continued)

Source: Cost Estimate Backup Sheet 6 (LANTDIV)
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE

PREPARED BY A.O. NOBLE

FUNDS AVAL. .

LANTDIV NORVA 4-11012/5(REV. 12/80)
ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND
NORFOLK, VIRGINIA

SHEET 4 of 10

Const. Contr. No. P-134

DATE NOV. 1986

PROJECT PUBLIC WORKS BLDG, CRANEY ISLAND LOCATION NSC, NORFOLK, VA [ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
252. EXHAUST SYSTEM								
DUST COLLECTOR w/2000 CFM BLOWER	2	EA	7560	15120	576	1152	16,272	
DUCTWORK	100	LBS	0.96	96	2.13	213	259	
5% FREIGHT FOR DUST COLLECTOR							814	
							17,345	USE: 17,000
413. MOVE MACHINE SHOP EQUIPMENT								
DISCONNECT, MOVE & REINSTALL SHOP EQUIPMENT (ASSUME 3-MEN CREW AT 2.5 MACHINE PER DAY)	144	HRS		X	15	=	2160	
EQUIPMENT RENTAL w/ CREW	6	DAYS		X	750	=	4500	
				TOTAL			6,660	USE: 7,000

Figure 22 (Continued)

Source: https://assist.daps.dla.mil - Downloaded: 2026-01-26T13:54:47
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80) — SHEET 5 of 10

PREPARED BY A.O. NOBLE — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAIL. _____ — NORFOLK, VIRGINIA — DATE 1 NOV. 1984

PROJECT PUBLIC WORKS BLDG, CRANEY ISLAND — LOCATION NAVAL SUPPLY CENTER, NORVA — [ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
511+ ELECTRICAL DISTRIBUTION								
DUCT BANK 1 WAY 4" PVC W/ EXCAVATION + BKFILL	100	LF		X	5.50		550	
DUCT BANK 4 WAY 4" PVC W/ EXCAVATION + BKFILL	150	LF		X	17.50		2625	
3-1/C #2 AWG CU XLP 15 KV SHIELDED W/ TERMINATION	100	LF		X	14.60		1460	
4-1/C 500 MCM W/ 1/C #1 CU GRD W/ TERMINATION	600	LF		X	42.50		25,500	
15 KV 4-WAY OIL SW	1	EA	-	17000	-	800	17,800	
OIL SW ENCLOSURE	1	EA	-	3000	-	500	3,500	
EQUIPMENT PAD	1	EA	-	200	-	200	400	
TOTAL							51,835	USE: 52,000
513+ ELECTRICAL SUBSTATION 500 KVA PAD MTD XFMR W/ GRADING (1ΦA, 120/208 V)	1	EA		X	17,000		17,000	
514- AREA LIGHTING								
2 HPS FIX. + CONC. POLES W/ 150 FT 2" PVC RSC 2#6 AL + 1#8 CU	8	EA	2006	16,048	1350	10,800	26,848	
CONCRETE POLE FOUNDATION	8	EA	525	4,200	35	280	4,480	
TRENCH EXCAVATION + BKFILL	1200	LF		X	0.65	=	780	
TOTAL							32,108	USE: 32,000

Figure 22 (Continued)

Cost Estimate Backup Sheet (LANTDIV)

MIL-HDBK-1010/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80)

PREPARED BY A.O. NOBLE — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND

NORFOLK, VIRGINIA

SHEET 6 of 10

Const. Contr. No. P-134

DATE NOV. 1986

FUNDS AVAL. —

[ ] PRELIM. [ ] FINAL

PROJECT PUBLIC WORKS BLDG, GRANBY ISLAND — LOCATION NSC, NORFOLK, VA

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
523 - COMMUNICATION								
3" CONDUIT W/ PHIL WIRE	100	LF		X	22.75	=	2275	USE: 2,000
551 - WATER DISTRIBUTION								
6" PVC WATER PIPE W/ EXCAV. + BKFILL	400	LF		X	13.50	=	5400	
EXCAVATE FIRE HYDRANT	2	EA	205	410	465	930	1340	
REINSTALL FIRE HYDRANT	2	EA		X	1580	=	3160	
6" X 6" TEE CI, W/ BOLT ACC.	4	EA		X	245	=	980	
6" GATE VALVES, FLANGED + ADJUSTABLE VALVE BOX	3	EA	465	1395	155	465	1860	
6" X 6" TAPPING SLEEVE, VALVE + TAPPED HOLE INSIDE	2	EA		X	2300	=	4600	
TOTAL							17,340	USE: 17,000
554 - SANITARY SEWER								
8" PVC SEWER PIPE W/ EXCAV., BKFILL + COMPACTION	150	LF		X	7.75	=	1163	
48" DIA. MANHOLE, 8' DEEP W/ FRAME + COVER	1	EA		X	2400	=	2400	
8" EXTERIOR SEWER CLEANOUT	1	EA		X	940	=	940	
TOTAL							5000	

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)

MIL-HDBK-1010/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE

LANTDIV NORVA 4-11012/5 (REV. 12/80)

ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND

NORFOLK, VIRGINIA

PREPARED BY A.O. NOBLE

FUNDS AVAL. .

SHEET 7 of 10

Const. Contr. No. P-134

DATE NOV. 1986

PROJECT PUBLIC WORKS BLDG, CRANEY ISLAND

LOCATION NSC, NORFOLK, VA

[ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
562 - FUEL STORAGE								
OIL STORAGE TANK, FIBERGLASS								
UG, 2000 GAL	1	EA	—	11,230	—	360	11,590	
REMOTE LIQUID LEVEL INDICATOR	1	EA	-	990	-	350	1,340	
FILL CAP FOR OIL STORAGE TANK	1	EA		X	25	=	25	
EXCAVATION, BKFILL + COMPACT.	20	CY	1.50	30	0.40	8	38	
MONITORING WELLS	2	EA		X	1.000	=	8,000	
TOTAL							20,983	USE: 21,000
713 - ROADS								
8" THICK STONE AGGREGATE	560	SY		X	7.50	=	4200	
2" ASPHALT OVERLAY	580	SY		X	7.40	=	4144	
TOTAL							8344	USE: 8,000
714 - SIDEWALKS	425	SY		X	26	=	11,050	USE: 11,000
4" THICK CONCRETE								
813 - TOPSOIL, SEED	2000	SY		X	1.50	=	3,000	
4" TOPSOIL FROM PILES ON								
SITE W/ SEED, FERTILIZE + FINE								
GRADE.								

Figure 22 (Continued)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80)

PREPARED BY A.O. NOBLE — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND

FUNDS AVAIL. — NORFOLK, VIRGINIA

SHEET 8 of 10

Const. Contr. No. P-134

DATE NOV. 1986

PROJECT PUBLIC WORKS BLDG. CRANEY ISLAND — LOCATION NSC, NORFOLK, VA — [ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
72J - PARKING								
6" STONE AGGREGATE	3740	SY		X	5.60	=	20,944	
2" BITUMINOUS SURFACE	3740	SY		X	9.90	=	37,026	
PAINT 4" LINES ON PAVEMENT	7000	LF		X	0.32	=	2,240	
PRECAST CONCRETE BUMPERS W/ DOWELS	55	EA		X	36.50	=	2,008	
TOTAL							62,218	USE: 62,000
819 - SITE WORK	1200	CY	1.50	1800	1.25	1500	3300	USE: 3,000
STRIP TOPSOIL								
816 - SURCHARGE/EARTH REPL								
BORROW FILL IN PLACE FROM								
PIT 20 MILES ROUND TRIP	4800	CY		X	13[illegible]	=	62,400	
PLACE BORROW FILL & COMPACT								
SLOPE GREATER THAN 1 IN 4	4800	CY	1.2	4800	0.45	2160	6960	
TOTAL							69,360	USE: 69,000
911 - LAND PILING								
LOAD TEST	2	EA		X	3000		6000	
45' FOOT CONCRETE PILE, TRUCK								
DELIVERED	5490	LF		X	12.25	=	67,253	
TOTAL							73,253	USE: 73,000

Figure 22 (Continued)
Cost Estimate Backup Sheet (LANTDIV)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 9 of 10

PREPARED BY A.O. NOBLE — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. P-134

FUNDS AVAI. — NORFOLK, VIRGINIA — DATE Nov. 1986

PROJECT — LOCATION — ☐ PRELIM. ☐ FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
843 DEMOLITION								
BLDG 34:								
DEMOLITION OF CONCRETE BLDG								
COMPLETE W/ DISPOSAL	9375	CF	0.10	938	0.16	1500	2438	
DEMOLITION OF FOUNDATION,								
REMOVAL + HAUL	450	CF	1.91	860	0.59	507	1367	
DISCONNECT ELECTRICAL SERVICE	1	LS		X	250	=	250	
BLDG 39:								
DEMOLITION OF MASONRY BLDG								
COMPLETE W/ DISPOSAL	2178	CF		X	0.20	=	436	
DEMOLITION OF FOUNDATION	194	CF	1.91	371	0.59	115	486	
BLDG 67								
DEMOLITION OF CONCRETE BLDG	7700	CF	0.10	770	0.16	1232	2002	
DISCONNECT ELECT. SERVICE	LS			X	250	=	250	
BLDGS. 87A & 87B:							-	
DEMOLITION OF BUILDING	4000	CF		X	0.20	=	800	
BLDG. 167								
DEMOLISH BLDG, CMU	15,960	CF		X	0.20	=	3192	
DISCONNECT WATER SERVICE	1	EA		X	200	=	200	
DISCONNECT ELECT. SVCE.	1	LS		X	250	=	250	
DISCONNECT HEATING LINES	1	EA		X	200	=	200	
SUBTOTAL							11,870	

Figure 22 (Continued)

Source: https://assist.dla.mil — Cost Estimate Backup-Sheet 36 (LANTDIV)
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80)

PREPARED BY A.O. NOBLE — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND

FUNDS AVAI. _____ — NORFOLK, VIRGINIA

SHEET 10 of 10 — Const. Contr. No. P-134 — DATE Nov. 1986

PROJECT — LOCATION — [ ] PRELIM. [ ] FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
843. DEMOLITION (CONT'D)								
DEMOLISH FOUNDATION OF								
BLDGS. 67, 87A, 87B, 167	1900	CF		x	2.50	=	3500	
BLDG. 54:								
DEMOLISH MASONRY BLDG	117,500	CF		x	0.20	=	23,500	
DEMOLISH FOUNDATION	6800	CF		x	2.50		17,000	
DISCONNECT SERVICES	LS				6.50		650	
CHANGE ROOM FOR ASBESTOS REM.	10	DAYS		x	307		3,070	
DISPOSAL SUIT 4/MEN/DAY	10	DAYS		x	336		3,360	
RESPIRATOR MASK	10	DAYS		x	20		200	
AIR MONITOR	10	DAYS		x	555		5,550	
SUBTOTAL							56,830	
SUBTOTAL PAGE	9						11,870	
TOTAL DEMOLITION							68,700	USE: 69,000

Figure 22 (Continued)

Source: https://assets.publishing.service.gov.uk/media/5a8026e5ed915d74e33f8d26/Backup_Sheet_13_LANTDIV.pdf
Check the source to verify that this is the current version before use.

BUILDING SF COST DEVELOPMENT

TITLE: Public Works Bldg, Craney Island P#: 134

LOCATION: NSC, Norfolk, VA DATE: Nov 1986

PREPARED BY: A.O. Noble PH#: 444-9060

	CAT CODE	SIZE	ACF	DATE mo / yr
PROPOSED FACILITY	219-10	17,790 SF	0.92	4/89
GUIDANCE FACILITY	219-10	31,400 SF	1.00	4/89

HISTORICAL GUIDANCE SOURCE: NAVFAC CODE 051

HISTORICAL GUIDANCE UNIT COST: $57.00/SF

HISTORICAL UNIT COST		SIZE FACTOR		AREA COST FACTOR		ESCALATION FACTOR		ADJUSTED UNIT COST
57.00	X	1.08	X	0.92	X	1.00	=	56.64/SF

ADDITIONAL FUNCTIONAL FEATURES

FUNCTIONAL FEATURES	QTY	UNIT COST	TOTAL COST	ADJUSTED U/C	%CHANGE
OMSI (Table C)	$1,114,010	.0025	2,785	0.16	0.28
Grade Beams & Pile Caps	17,790 SF	0.65	11,564	0.65	1.00
Move Machine Shop Equipment	17,990 SF	0.39	7,000	0.39	0.60
POL OPNS (Cat. Code 143-75)	1,600 SF	53.36[1]	85,376	4.80	8.47

ADDITIONAL FUNCTIONAL FEATURES TOTAL : $6.00/SF 10.35%

[1]There is no historical data available for POL/OPNS (Cat. Code 143-75) the closest available is 211-76 (materials lab with $127.84/SF. Use $110/SF for Cat. Code 143-75. POL OPNS feature that is not included in Guidance Cost = 110 - 56.64 = 53.36.

Figure 23

Building SF Cost Development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

14.7 Cost Model Questionnaire.

GENERAL:

This questionnaire will establish a measure of the project scope early in the planning stage in a manner which will allow empirical prices to be applied. It is recognized that many design decisions cannot be made at this time; however, if a realistic price is to be developed, the needs of the activity relating to a particular project must be defined. The NAVFACENGCOM method of conceptual estimating requires cost development from guidance cost of comparable construction. Any variation from guidance cost must be supported by a definition and cost of functional features. This support is often necessary to provide adequate project funding.

BUILDING:

Under normal conditions, the building cost model will be completed at the design cost certification stage.

The completed cost model (systems 111 through 499) must state what is planned, with EMPHASIS UPON SCOPE FEATURES THAT GENERATE SIGNIFICANT COST. Assumptions must be stated. Additional narrative description for functional items is encouraged.

System 000 Building Construction

This system describes the total function of the building. As such, it is the most important information shown on the cost model.

SUPPORTING FACILITIES:

The completed cost model (systems 500 through 999) should state what is planned with emphasis upon scope features that generate significant cost. Refer to additional guidance in the cost model questionnaire.

Notes:

1. This Cost Model Questionnaire serves two purposes:
   At the budget stage it serves as a means of describing and quantifying project requirements in such a manner that empirical prices can be used to generate a project cost.

   At the final estimate stage it serves as a means of collecting subsystem numbers for storage in NAVFACENGCOM historical files.

2. The cost model questionnaire systems list includes numbered systems that are "write-in". These numbers may be used to identify systems in the project that are not identified in the questionnaire.
3. Systems followed by (1) are considered built-in equipment.
4. Exterior Systems and Special Equipment need more scope definition for accurate pricing. Show narrative description as you best understand the scope when detailed lists are not available.
5. Building system quantities should be the area in which the system occurs.
6. A completed cost model questionnair must be included in the cost certification submittal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Project Title Public Works Building

Location Craney Island, NSC, Norfolk, VA

Contract Number

P# P-134 FY 89 Date Nov. 1986

Completed by A. O. Noble

Phone Number (804) 444-9060

COST ENGINEERING SYSTEM (CES)

COST MODEL QUESTIONNAIRE

12/31/86

000 Building Construction Gross Building Area (SF) 17790

Function or Category Code	% or Area
219-10	37%

Where a single building includes areas of significant cost variation as identified by category code or functional area, show a breakdown by function or category code (under sub system 01 through 05). Show area in sq. ft. or by percentage to nearest 5%.

20	Number of Floors	1
21	Floor to Floor Height	LF
22	Length - Nearest foot	196 LF
23	Width - Nearest foot	99 LF
25	Irregular - Yes/No	YES
26	Building Perimeter(when irregular)	LF
40	Describe any known special considerations; scheduling, security, asbestos removal, hazardous materials	Demo of bldg 54 may involve asbestos removal.
50	Finish floor elevation above existing grade - nearest foot.	2 LF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

STRUCTURAL

111 Foundation — Ground Floor Area (SF) 17,790

__ 01 Spread Footings
__ 02 Thickened Slab
X 03 Pile Foundation
__ 04 Caissons
__ 05 Continuous wall footing
X 06 Grade Beams

***** For convenience pilings are described with building foundation. *****
***** Price under the supporting facilities. 911 Land Piling-Driven *****

911 Land Piling-Driven — Length of Piling (LF) 5490

__ 02 Timber
__ 03
__ 04 Concrete 10" Sq
X 05 Concrete 12" Sq
__ 06 Concrete 14" Sq
__ 07
__ 08 Steel

Length of Piling
__ 20 Under 25'
__ 21 26' - 35'
X 22 36' - 45'
__ 23 46' - 55'
__ 24 56' - 65'
__ 25 66' - 75'
__ 26 76' - 85'
__ 27 86' - 95'
__ 28 Over 95'

112 Slab on Grade — Slab on Grade Area (SF) 17,790

X 01 Floating
__ 02 Grade Beam Supported
__ 03 Pile Supported

Thickness
__ 11 Under 6"
__ 12 6"
__ 13 8"
__ 14 Over 8"

Floorload
X 30 Under 100 PSF
X 31 101 - 200 PSF
__ 32 201 - 300 PSF
__ 33 301 - 400 PSF
__ 34 401 - 500 PSF
__ 35 Over 501 PSF

113 Structural — Gross Building Area (SF) 17,790

X 01 Bearing Wall
__ 02 Steel Framing
__ 03 Concrete Cast in Place
__ 04 Wood
__ 05
__ 06 Concrete Precast
__ 07 Air Inflatable

114 Supported Floor — Supported Floor (SF) _____

__ 01 Concrete Cast in Place
__ 02 Concrete on Steel Joists
__ 03 Concrete on Steel Framing
__ 04 Precast Concrete
__ 05 Wood
__ 06

If more than one entry give percentage of each - nearest 10%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

115 Stairs — Risers (EA) _____

116 Roof Structure — Area of Roof (SF) 17,790

Framing

__ 02
__ 03 Precast Hollow Core
__ 04 Precast Concrete
__ 05 Wood
X 06 Steel Joist
__ 07 Steel Framing

If more than one entry, give percentage of each - nearest 10%.

117 Pre Engineered Building — Gross Area of Building (SF) _____

__ 01 Eave height under 12'
__ 02 Eave height 12-20'
__ 03 Eave height over 20

118 Vault — Gross Floor Area (SF) _____

119 Write-in System

ARCHITECTURAL

141 Roofing — Roof Area (SF) _____

Surface

__ 10
X 11 Built-up
__ 12 Shingles
__ 13 Elast.
__ 14 Sprayed
__ 15 Metal Roofing
__ 16

142 Exterior Walls — Exterior Wall Area (SF) 10,121

Ext. Surface		Backup		Height	
X	01 Brick (below 10')	X	21 CMU	__	30 Under 12'
__	02 CMU	__	22 Wood Studs	X	31 12' - 20'
__	03 Drivit	__	23 Steel Studs	__	32 over 20'
X	04 Metal Panels(above 10')	__	24 Conc Cast in Place		
__	05 Stucco	__	25 Precast Concrete		
__	06 Wood	__	26 Furring		
__	07 Conc Cast In Place				
__	08 Precast Concrete				

If more than one height is shown give percentage of each - nearest 10%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

143 Interior Walls — Interior Wall Area (SF) 35,000

			Height	
__	01	Concrete	__ 21	8'
__	02	Steel Studs	__ 22	9'
__	03		__ 23	10'
__	04	Concrete Cast in Place	__ 24	Over 10'
__	05	Wood Studs		
__	06			

If more than one entry under height, give percentage of each - nearest 10%.
Give narrative description of type and size of rooms.

144 Interior Finishes — Gross Building Area (SF) 17,790

			Floor		Ceiling	
__	01	Gypsum Board	__ 11		__ 21	Acoustical
__	02	CMU	__ 12	Ceramic Tile	__ 22	Gypsum Board
__	03	Ceramic Tile	__ 13	Quarry Tile	__ 23	Plaster
__	04	Wood Panels	__ 14	Carpet	__ 24	Concrete
__	05	Plaster	__ 15	Concrete	__ 25	Spray on
__	06	Vinyl Wall Covering	__ 16	Terrazzo		
			__ 17	Special Toppings		
			__ 18	VCT		

145 Doors — Surface Area One Side (SF) 3,000 (includes windows)

__	01	Hollow Metal Exterior
__	02	Alum Entrance Store Front
__	03	Folding
__	04	Roll Up
__	05	Overhead
__	06	
__	07	
__	08	Wood Interior
__	09	Hollow Metal Interior

146 Windows — Surface Area One Side (SF) _____

147 Specialities — Gross Building Area (SF) 17,790

__	01	Wardrobes	__ 08	
__	02	Jail	__ 09	Wire Partitions
__	03	Clean Room	__ 10	Metal Walkways
__	04	Case Work	__ 11	X-Ray
__	05	Dark Rooms		
__	06			
__	07	Loading Dock		

Give estimating quantities for required ITEMS OF SIGNIFICANT COST. List shown is not complete. Detailing of toilet accessories and partitions is not required. Very large items may be more suited to using a write-in system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 148 BEQ Wardrobes — Number of Wardrobes (EA) _____
__ 01 With Chest
__ 02 Without Chest

149 Write-in System

DEMOLITION INTERIOR

171 Demolition Interior — Gross Building Area (SF) _____
__ 01 Complete Interior Partition
__ 02 Complete Interior Finishes
__ 03 Complete Interior Mechanical
__ 04 Complete Interior Electrical
__ 05 Complete Interior of Bldg. 01 thru 04

172 Asbestos Removal Interior — Total Cost (LS) _____
__ 01
__ 02
__ 03

173 - 175 Write-in Systems

PLUMBING

Note: Refer to attachment #2 to determine number of fixtures for systems 211 and 213

211 Plumbing-Domestic — Number of Fixtures (EA) 22

212 Domestic Hot Water Solar — Capacity (MBTH) _____

213 Roof Drainage — Number of Drains (EA) 4

214 - 216 Write-in Systems

SPACE CONDITIONING

221 HVAC — Capacity (MBTU or TNS) _____

__ 20 Bldg. Htng Plant HW, oil
__ 21 Bldg. Htng Plant Steam, oil
__ 22 Bldg. Htng Plant Hot air, oil
__ 23 Bldg. Htng Plant Hot air, gas
__ 24 Bldg. Htng Plant HW, gas
__ 25 Bldg. Htng Plant steam, gas
__ 26 Bldg. Htng Plant Elec.
__ 27 Base Plant Steam
__ 28 Base Plant HW
__ 29 Base Plant HTHW

Give tonnage, refer to attachment 1 if better information is not available. If building contains partial A/C, use systems 222 and 223 for each respective area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

222 Air Conditioning — Capacity (TNS) 20

223 Heating & Ventilation — Capacity (MBTH or CFM) 350 MBT

- __ 20 Bldg. Htng Plant
- __ 21 Bldg. Htng Plant Steam, oil
- X 22 Bldg. Htng Plant Hot Air, oil
- __ 23 Bldg. Htng Plant Hot air, gas
- __ 24 Bldg. Htng Plant HW, gas
- __ 25 Bldg. Htng Plant Steam, gas
- __ 26 Bldg. Htng Plant Elec.
- __ 27 Base Plant Steam
- __ 28 Base Plant HW
- __ 29 Base Plant HTHW

224 Mechanical Ventilation — Fan Capacity (CFM) _____

225 Dehumidification — Capacity(PPH) _____

226 Heating, Solar — Collector Area (SF) _____

227 Write-in System

WEIGHT HANDLING EQUIPMENT

(1) 231 Bridge Cranes — Capacity (TNS) 10

- __ 01 Span under 50'
- __ 02 Span 51-75'
- __ 03 Span over 75'

- __ 10 Capacity under 10 T
- X 11 Capacity 10-20 T
- __ 12 Capacity 20-30 T
- __ 13 Capacity 30-40 T
- __ 14 Capacity over 40 T

- __ 21 Run under 50'
- __ 22 Run 50-100'
- __ 23 Run over 100'

(1) 232 Monorails — Capacity (TNS) 2

- __ 01 Manual
- X 02 Electric
- __ 03 Air Operated

- X 10 Capacity under 5 T
- __ 11 Capacity 5-10 T
- __ 12 Capacity over 10 T

- X 21 Run under 50'
- __ 22 Run 50 to 100'
- __ 23 Run over 100'

(1) 233 Fixed Hoist — Capacity (TNS) _____

- __ 01 Manual
- __ 02 Electric
- __ 03 Air Operated

(1) 234 Vehicle Lifts — Capacity (TNS) _____

- __ 10 Capacity under 5 T
- __ 11 Capacity 5-10 T
- __ 12 Capacity over 10 T

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 235 Elevators — Number of Stops (EA) _____
__ 01 Electric
__ 02 Hydraulic
__ 03
__ 11 Passenger
__ 12 Freight

(1) 236 Escalators — Flights (EA) _____

(1) 237 Conveyors — Capacity (TNS/HR) _____

(1) 238 Write-in System

SPECIAL MECHANICAL PIPING SYSTEM

(1) 241 Vacuum — Capacity (CFM) _____
__ 01 Medical
__ 02 Industrial
__ 03

(1) 242 Oxygen — Outlets (EA) _____

(1) 243 Nitrogen — Outlets (EA) _____

(1) 244 Compressed Air — Capacity (CFM) 60
X 01 Low Pressure 150 below
__ 02
__ 03 High Pressure 151 up

245 Interior Steam — Capacity (PPH) _____
__ 01 High Pressure
__ 02 Medium Pressure
__ 03 Low Pressure
__ 11 Oil Fired
__ 12 Electric Fired
__ 20 Fuel Oil Storage

246, 247 Write-in Systems

SPECIAL MECHANICAL OTHER

251 Dust Collection — Capacity (CFM) _____

252 Engine Exhaust — Fan Capacity (CFM) 8000

253 - 255 Write-in Systems

FIRE PROTECTION

(1) 271 Sprinklers — Gross Area Sprinkled (SF) 17,790
__ 01 Dry
X 02 Wet
__ 03 Preaction
__ 04 Deluge
__ 05
__ 10 Light Hazard
X 11 Ordinary Hazard
__ 12 Extra Hazard
__ 13
__ 14 Includes Booster Pump

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 272 AFFF (Aqueous Film Forming Foam) Capacity (GAL) _____

__ 01 Deluge
__ 02 Pre-action
__ 03
__ 04 Oscillating Monitors

(1) 273 Carbon Dioxide Storage Capacity (LBS) _____

__ 01 Hose Reel
__ 02 Flooding Area
__ 03 Flooding Total
__ 04

(1) 274 Halon Storage Capacity (LBS) _____

__ 01
__ 02

275 Fire Alarm Gross Building Area (SF) 17,790

276, 277 Write-in Systems

POWER & LIGHTING

311 Power Connected Load (KW) 500

312 Lighting Gross Building Area (SF) 17,790

(1) 313 400 HZ Converter Capacity (KW) _____

(1) 314 Direct Current Converter Capacity (KW) _____

(1) 315 Uninterruptable Power Supply Converter Capacity (KVA) _____

(1) 316 Electrical Generators Equipment Capacity (KW) _____

__ 01 Intermittent
__ 02 Continuous
__ 03 Electrical
__ 04 Gas
__ 05 Diesel
__ 06 Turbine
__ 07

__ 40
__ 41 600 RPM
__ 42 720 RPM
__ 43 900 RPM
__ 44 1200 RPM
__ 45 1800 RPM

317, 318 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SPECIAL ELECTRICAL PROTECTION

(1) 321 Grounding Gross Building Area (SF) _____
__ 01 Lightning Grounding
__ 02 Electronic Grounding
__ 03 Protective Grounding

(1) 322 Lightning Protection Gross Building Area (SF) _____

(1) 323 - 326 Write-in Systems

SPECIAL ELECTRICAL, ELECTRONICS

(1) 331 Security Detection Gross Building Area (SF) _____
__ 01 Intrusion Alarm for Access Control
__ 02 Access Control
__ 03 TV Camera & Monitor

If layout is not available describe area covered, where does alarm sound etc. Also describe intended function of system.

(1) 332 EMCS (Energy Monitoring and Controls System) Number of Points (EA) ____
__ 01 Local Control
__ 02 Remote Control

(1) 333 Computer Communication Cable Run (LF) _____

334 - 336 Write-in Systems

COMMUNICATION

341 Telephone Gross Building Area (SF) 17,790

342 Intercom Gross Building Area (SF) _____

343 Television Gross Building Area (SF) _____

344 Public Announcement Gross Building Area (SF) _____

345 Master Clock Number of Outlets (EA) _____

(1) 346, 347 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MEDICAL EQUIPMENT

(1) 411 Hospital Equipment — Gross Building Area (SF) _____

(1) 412 Dental Equipment — Number of Chairs (EA) _____

(1) 413, 414 Write-in Systems

FOOD SERVICE

(1) 421 Food Service Equipment — Pieces of Food Service Equip (EA) _____

(1) 422 - 425 Write-in Systems

MISCELLANEOUS EQUIPMENT

(1) 431 Chapel Equipment — Gross Building Area (SF) _____

(1) 432 Movie Theater Equipment — Gross Building Area (SF) _____

(1) 433 Rifle Range Equipment — Firing Lanes (EA) _____

(1) 434 Laboratory Equipment — Number of Pieces (EA) _____

(1) 437 Waste Disposal Equipment — Equipment Capacity (PPH) _____

(1) 438 Write-in System

SPECIAL WAREHOUSE EQUIPMENT

(1) 441 Special Warehouse Equipment — Gross Building Area (SF) _____

(1) 442 - 444 Write-in Systems

SPECIAL CONSTRUCTION

451 Hanger Doors — Surface Area One Side (SF) _____
__ 01 Sliding
__ 02 Vertical Lift
__ 10 Manual
__ 11 Power Operated

452 Vault Doors — Number (EA) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

453 Blast Doors — Surface Area One Side (SF) _____

Span		Charge Weight (TNT Equivalent)		Distance	
__ 01		__ 11		__ 21	
__ 02	3 feet	__ 12	0 - 10 LBS	__ 22	0 - 20 FT
__ 03	5 feet	__ 13		__ 23	
__ 04	10 feet	__ 14	10 - 500 LBS	__ 24	20 - 100 FT
__ 05	15 feet	__ 15		__ 25	
__ 06	20 feet	__ 16	Over 500 LBS	__ 26	Over 100 FT

454 Raised Floor — Area of Raised Floor (SF) _____

(1) 455 Radio Frequency Shielding — Surface Area Shielded (SF) _____

456 Bowling Lanes — Number of Lanes (EA) _____

__ 01 New
__ 02 Refinished
__ 10 W/O Auto Pin Setter
__ 11 W/ Auto Pin Setters

(1) 457 Paint Spray Booth — Floor Area (SF) _____

458 Write-in System

OTHER EQUIPMENT

491 Other Miiscellaneous Equipment

492 Snow Melting — Area Protected (SF) _____

(1) 496 Government furnished equipment Financed from Construction Funds — Gross Building Area (SF) _____

Describe any equipment not shown elsewhere that is purchased from construction funds. Usually this is either from equipment purchased by the government and furnished to the construction contractor, or it is furnished and installed under a seperate contract. Also show, if not shown elsewhere equipment not from construction funds for which installation costs will be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities

(Systems 500 through 999)

Note:

1. Show the following criteria suitable for the application of historical cost; under each applicable system heading;

   a. Size (assume if unknown) and length of utility runs. Include storm drainage requirement. Indicate valves, fire hydrants, manholes, catch basins and other significant extras. Depth of cut (when over 6 feet) and dewatering requirements must be shown.

   b. Area and assumed section for paved areas. Identify each type and section variation.

   c. Description of work required for grading, cut and borrow. Describe assumed nature of materials to be moved. If rock excavation is required, state assumptions on removal requirements (e.g., rip, blast, etc.).

   d. Indicate approximate quantities of clearing and grubbing in acres, and whether heavy, medium, or light.

   e. Describe any functional features required outside the building 5 foot line such as: sewage lift stations, wash racks and water tanks, and unsuitable soil conditions

   f. If hazardous materials are present, state type, extent and method of disposal.

   g. See System 911 for Land Piling - Driven.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR ELECTRICAL

511 Electrical Distribution, Primary	Length of Run (LF) 250
512 Electrical Distribution, Secondary	Length of Run (LF)
513 Substation/Transformer	Capacity (KVA) 500
514 Area Lighting	Number of Fixtures (EA) 8
515 Airfield Lighting	Length of Run (LF)
516 Lightning Protection	Points of Protection (EA)
517, 518 Write-in Systems	

EXTERIOR COMMUNICATION

521 Fire Alarm	Length of Run (LF)
522 Security Alarm	Length of Run (LF)
523 Communication, Telephone	Length of Run (LF) 100
524 Exterior EMCS (Energy Monitoring Control System)	Length of Run (LF)
525, 526 Write-in Systems	

EXTERIOR MECHANICAL

541 Heat Distribution, Overhead	Length of Run (LF)
542 Heat Distribution, Underground	Length of Run (LF)
543 Chilled Water Distribution	Length of Run (LF)
544 Condensate Collection (only)	Length of Run (LF)
545 Gas Distribution	Length of Run (LF)
546 Compressed Air Distribution	Length of Run (LF)
547 Fuel Distribution	Length of Run (LF)
548 Exterior Foam	Length of Run (LF)
549 Write-in System	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR WATER DISTRIBUTION

551 Water Distribution	Length of Run (LF) 400
552 Fire Protection Water Distribution	Length of Run (LF) _____
553 Salt Water Distribution	Length of Run (LF) _____
554 Sanitary Sewers	Length of Run (LF) 150
555, 556 Write-in Systems	

BULK STORAGE

561 Fuel Storage, Bulk	Capacity (BBL) _____
562 Fuel Storage, Ready Issue	Capacity (GAL) 2000
563 Water Storage	Capacity (GAL) _____
564 - 566 Write-in Systems	

FUELING

571 Vehicle Fueling	Number of Outlets (EA) _____
572 Aircraft Fueling	Number of Hydrants (EA) _____
573 Marine Fueling	Number of Outlets (EA) _____
574 - 576 Write-in Systems	

PUMPING

581 Fuel Pumping Station	Pump Capacity (GPM) _____
582 Water Pumping Station	Pump Capacity (GPM) _____
583 Fire Booster Pump	Pump Capacity (GPM) _____
584 Sewage Pump Station	Pump Capacity (GPM) _____
585 Sewage Lift Station	Pump Capacity (GPM) _____
586 Write-in System	

TREATMENT FACILITY

591 Water Treatment	Capacity (MGD) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

592 Domestic Sewage Treatment — Capacity (MGD) _____

593 Industrial Waste Treatment — Capacity (MGD) _____

594 - 596 Write-in Systems

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross M.E. Bldg Area (SF)_____

Building required to house mechanical equipment when not connected to the main building and not included in gross area shown under the primary facility.

612 Electrical Equipment Building — Gross E.E. Bldg Area (SF)_____

613 - 615 Write-in Systems

SUPPORTING STRUCTURES MISCELLANEOUS

621 Security Gate — Opening Width (LF) _____

622 Guard House — Gross Building Area (SF) _____

623 - 625 Write-in Systems

POLLUTION ABATEMENT STRUCTURES

641 Oil Water Separators — Capacity (GAL) _____

642 Electro-Static Precipitator — Air Flow (SCFM) _____

643 - 645 Write-in Systems

SHOP SUPPORT STRUCTURES

651 Vehicle Grease Racks — Number of Vehicle Racks (EA) ____

652 Vehicle Wash Platforms — Number of Vehicle Bays (EA) _____

653 - 656 Write-in Systems

AIRCRAFT CLEANING FACILITY

661 Aircraft Washing Facility — Paved Area (SY) _____

662 Aircraft Rinsing Facility — Paved Area (SY) _____

663 - 666 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PAVING

711 Concrete Roads	Paved Area (SY)	
712 Flexible Roads	Paved Area (SY)	
713 Overlay Roads	Paved Area (SY)	560
714 Surface Treatment Roads	Paved Area (SY)	
715 Slurry Seal Road	Paved Area (SY)	
716, 717 Write-in Systems		

PARKING

721 Concrete Parking	Paved Area (SY)	
722 Flexible Parking	Paved Area (SY)	
723 Overlay - Parking	Paved Area (SY)	3,740
724 Surface Treatment - Parking	Paved Area (SY)	
725 Slurry Seal Parking	Paved Area (SY)	
726, 727 Write-in Systems		

WALKS

741 Concrete Walks	Paved Area (SY)	425
742 Bituminous Walks	Paved Area (SY)	
743 Special Walks	Paved Area (SY)	
744 - 746 Write-in Systems		

AIRCRAFT PARKING CONCRETE

751 Concrete Runways	Paved Area (SY)	
752 Concrete Taxiways	Paved Area (SY)	
753 Concrete Aprons	Paved Area (SY)	
754 Repairs Concrete Paving	Paved Area (SF)	
755 Crack and Joint Repair	Length of Repair (LF)	
757, 758 Write-in Systems		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

AIRCRAFT PAVING FLEXIBLE

761 Flexible Runways — Paved Area (SY) _____

762 Flexible Taxiways — Paved Area (SY) _____

763 Flexible Aprons — Paved Area (SY) _____

764 Repair Aircraft Flexible Paving — Paved Area Patched (SY) _____

765 Aircraft Paving Overlays — Paved Area (SY) _____

766 Aircraft Paving Slurry Seal — Paved Area (SY) _____

767, 768 Write-in Systems

INCIDENTAL PAVING WORK

771 Pavement Milling — Milled Area (SY) _____

772 - 776 Write-in Systems

EARTHWORK

811 Earthwork — Volume (CY) _____

812 Borrow — Volume in Place (CY) _____

813 Topsoil, Seed, Sod — Area Graded (SY) 2000

814 Landscaping — Area Planted (SY) _____

815 Site Irrigation — Number of Sprinkler Heads (EA) _____

816 Surcharge — Fill in Surcharge (CY) 4800

817 Earth Replacement — In-Place Measurement (CY) _____

818 Environmental Protection — Area Protected (ACRES) _____

819 Write-in System

SITE IMPROVEMENTS

821 Site Improvements — Area Developed (SY) _____

822 - 825 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SITE PREPARATION MISCELLANEOUS

831 Site Dewatering (Major) Header Pipe (LF) _____

832 - 835 Write-in Systems

DEMOLITION

841 Remove Utilities Length of Run (LF) _____

842 Remove Paving and Slabs Area Removed (SY) _____

843 Remove Structures Structure Volume (CF) _____
*** See attached for bldgs to be demolished ***

844 Remove/Dispose of Asbestos (Exterior) Total Cost (LS) _____

845 Remove/Dispose of P.C.B. Total Cost (LS) _____

846 Remove/Dispose of Contaminated Earth Volume of Earth Removed (CY) ____

847 Write-in System

STORM DRAINAGE

851 Storm Drainage Piping Length of Run (LF) _____

852 Box and Arch Culvert Length of Culvert (LF) _____

853 Drainage Facing Materials Surface Area (SY) _____

854 - 856 Write-in Systems

FENCING

861 Fencing (Perimeter) Length of Fence (LF) _____

862 Fencing (Alarm) Length of Fence (LF) _____

863 - 865 Write-in Systems

RECREATION EQUIPMENT/FIELDS

871 Playground Equipment Pieces of Equipment (EA) _____

872 Playing Field Equipment Pieces of Equipment (EA) _____

873 Tennis Courts Number of Courts (EA) _____

874 Softball/Baseball Fields Number of Fileds (EA) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

875 Football/Soccer Fields — Number of Fields (EA) _____

876, 877 Write-in Systems

SPECIAL BUILDING FOUNDATIONS

911 Land Piling-Driven — Ground Floor Area _____

912 Caissons — Number of Caissons (EA) _____

913 Pressure Injected Footing — Number of Footings (EA) _____

914 Vibrofloatation — Number of Locations (EA) _____

915 Chemical Soil Stabilization — Number of Locations (EA) _____

916 Dynamic Consolidation — Number of Locations (EA) _____

917 Piling Cast-In-Place Concrete — Length of Piling (LF) _____

RAILROAD

921 Track Work - Railroad — Length of Track (LF) _____

922 - 925 Write-in Systems

MARINE STRUCTURES PIERS

931 Piling - Marine — Length of Piling (LF) _____

932 Dolphins — Number of Dolphins (EA) _____

933 Med Mooring — Total Cost (LS) _____

934 Pier Deck — Area of Deck (SF) _____

935 Fenders — Length of Fender (LF) _____

936 Pile Clusters — Number of Clusters (EA) _____

937 Marine Specialities — Total Cost (LS) _____

938 Write-in System

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls — Total Face Area (SF) _____

942 Erosion Protection - Marine — Area Covered (SY) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

943 Riprap (Marine) — Area Covered (SY) _____

944 - 946 Write-in Systems

MARINE REPAIRS

951 Underdeck Repairs — Total Cost (LS) _____

952 Pile Repairs Marine — Length Repaired (LF) _____

953 - 957 Write-in Systems

DREDGING

961 Mobilization/Demobilization - Dredging — Total Cost (LS) _____

963 Hydraulic Dredging — Volume (CY) _____

964 Bucket Dredging — Volume (CY) _____

965 - 966 Write-in Systems

TOWERS/ANTENNAS

971 Towers — Length (LF) _____

972 Antennas — Total Cost (LS) _____

973 - 976 Write-in Systems

TUNNEL/PIPE JACKING

981 Tunneling — Volume Removed (CY) _____

982 Pipe Jacking — Length Jacked (LF) _____

983 - 986 Write-in Systems

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges — Deck Area (SF) _____

992 Overpasses — Deck Area (SF) _____

993 - 996 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 15:

15.1 Interior. The interior systems are shown in the following list.

0XX General
000 Building Construction
00X Overhead
001 Field Overhead
002 Home Office OH
01X Additive Bid Items
02X Deductive Bid Items
03X Base Bids
04X Government Cost
041 OMSI
042 PCAS
043 Contingencies
044 SIOH

1XX General Construction
11X Structural
111 Foundation (SF)
112 Slab on Grade (SF)
113 Structural (SF)
114 Supported Floor (SF)
115 Stairs (EA)
116 Roof Structure (SF)
117 Pre-Engd Building (SF)
118 Vault (SF)
119 Write-in
13X Structural Write-in
14X Architectural
141 Roofing (SF)
142 Exterior Walls (SF)
143 Interior Walls (SF)
144 Interior Finishes (SF)
145 Doors (SF)
146 Windows (SF)
147 Specialties (SF)
148 BEQ Wardrobes (EA)
149 Write-in
16X Architectural Write-in
17X Demolition Interior
171 Demo Interior (SF)
172 Asbestos Removal Interior (LS)
173 - 175 Write-in

2XX Interior Mechanical
21X Plumbing Domestic
211 Plumbing, domestic (EA)
212 Domestic Hot Water Solar (MBTU)
213 Roof Drainage (EA)
214 - 216 Write-in
22X Space Conditioning
221 HVAC (MBTU/TNS)
222 Air Conditioning (TNS)
223 Heating, Ventln (MBTU/CFM)
224 Mechanical Ventilation (CFM)
225 Dehumidification (PPH)
226 Heating Solar (SF)
227 Write-in
23X Weight Handling Equipment
231 Bridge Cranes (TNS)(1)
232 Monorails (TNS)(1)
233 Fixed Hoist (TNS)(1)
234 Vehicle Lifts (TNS)(1)
235 Elevators (TNS)(1)
236 Escalators (TNS)(1)
237 Conveyors (TNS)(1)
238 Write-in
24X Special Mechanical Piping System
241 Vacuum (CFM)(1)
242 Oxygen (EA)(1)
243 Nitrogen (EA)(1)
244 Compressed Air (CFM)(1)
245 Interior Steam (PPH)(1)
246 - 247 Write-in
25X Special Mechanical, Other
251 Dust Collection (CFM)(1)
252 Engine Exhaust (CFM)(1)
253 - 255 Write-in
27X Interior Fire Protection
271 Sprinklers (SF)
272 AFFF (SF)
273 Carbon Dioxide (LBS)
274 Halon (LBS)
275 Fire Alarm (SF)
276 - 277 Write-in

(1) Built-in Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

3XX Interior Electrical
- 31X Power & Lighting
  - 311 Power (KW)
  - 312 Lighting (SF)
  - 313 400HZ (KW)(1)
  - 314 Direct Current (KW)(1)
- 32X Special Equipment Protection
  - 321 Grounding (SF)(1)
  - 322 Lightning Protection (SF)(1)
  - 323 - 326 Write-in
- 33X Special Electrical Electronics
  - 331 Security Detection (SF)(1)
  - 332 EMCS (EA)(1)
  - 333 Computer Communication(LF)(1)
  - 334 - 336 Write-in
- 34X Communication
  - 341 Telephone (SF)
  - 342 Intercom (SF)
  - 343 Television (SF)
  - 344 Public Announcment (SF)
  - 345 Master Clock (EA)
  - 346 - 347 Write-in
- 35X Write-in

4XX Special Equipment
- 41X Medical Equipment
  - 411 Hospital Equip (SF)(1)
  - 412 Dental Equip (EA)(1)
  - 413 - 414 Write-in
  - 415 Install Gov't Furnished Medical Equipment
  - 416 Gov't Furn Med Equip
- 42X Food Service Equipment
  - 421 Food Service Equip (SF)
  - 422 - 424 Write-in
  - 425 Install Gov't Furnished Food Service Equip
  - 426 Gov't Furnished Food Service Equipment
- 43X Miscellaneous Equipment
  - 431 Chapel Equip (SF)(1)
  - 432 Movie Theater Equip (SF)(1)
  - 433 Rifle Range Equip (EA)(1)
  - 434 Lab Equip (EA)(1)
  - 435 Install Government Furn Laboratory Equipment
  - 436 Government Furnished Lab Equipment
  - 437 Waste Disposal (PPH)(1)
  - 438 Write-in
- 44X Special Warehouse Equipment
  - 441 Special Warehouse Equipment (SF)(1)
  - 442 - 444 Write-in
  - 445 Install Government Furnished Warehouse Equipment
  - 446 Government Furnished Warehouse Equip
- 45X Special Construction
  - 451 Hangar Doors (SF)
  - 452 Vault Doors (EA)
  - 453 Blast Doors (SF)
  - 454 Raised Floor (SF)*
  - 455 Radio Frequency Shielding (SF)(1)
  - 456 Bowling Lanes (EA)
  - 457 Paint Spray Booth (SF)(1)
  - 458 Write-in
- 49X Other Equipment
  - 491 Other Miscellaneous Equip
  - 492 Snow Melting (SF)
  - 495 Install Other Government Furnished Equip
  - 496 Other Government Furnished Equipment (SF)(1)
  - 499 Building Work not included elsewhere (LS)

---

(1) Built-in Equipment

---

* Considered built-in equipment for category code 610-20 (Data Processing Center) only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

15.2 Exterior. The exterior systems are shown in the following lists.

5XX Exterior Utilities
- 51X Exterior Electrical
  - 511 Electrical Distribution Primary (LF)
  - 512 Electrical Distribution Secondary (LF)
  - 513 Substation/ Transformer (KVA)
  - 514 Area Lighting (EA)
  - 515 Airfield Lighting (LF)
  - 516 Lightning Protection (EA)
  - 517 - 518 Write-in
- 52X Exterior Communication
  - 521 Fire Alarm (LF)
  - 522 Security Alarm (LF)
  - 523 Communication, Phone (LF)
  - 524 Exterior EMCS (LF)
  - 525 - 526 Write-in
- 54X Exterior Mechanical
  - 541 Heat Distribution Overhead (LF)
  - 542 Heat Distribution Underground (LF)
  - 543 Chilled Water Dist (LF)
  - 544 Condensate Collect (LF)
  - 545 Gas Distrib (LF)
  - 546 Compressed Air Dist (LF)
  - 547 Fuel Distribution (LF)
  - 548 Exterior Foam (LF)
  - 549 Write-in
- 55X Exterior Mechanical
  - 551 Water Distribution (LF)
  - 552 Fire Protection Water Distribution (LF)
  - 553 Salt Water Distribution (LF)
  - 554 Sanitary Sewers (LF)
  - 555 - 556 Write-in
- 56X Bulk Storage
  - 561 Fuel Storage Bulk (BBL)
  - 562 Fuel Storage Ready Issue (GAL)
  - 563 Water Storage (GAL)
  - 564 - 566 Write-in
- 57X Fueling
  - 571 Vehicle Fueling (EA)
  - 572 Aircraft Fueling (EA)
  - 573 Marine Fueling (EA)
  - 574 - 576 Write-in
- 58X Pumping
  - 581 Fuel Pumping Station (GPM)
  - 582 Water Pumping Station (GPM)
  - 583 Fire Booster Pump (GPM)
  - 584 Sewage Pump Station (GPM)
  - 585 Sewage Lift Station (GPM)
  - 586 Write-in
- 59X Treatment Facility
  - 591 Water Treatment (MGD)
  - 592 Domestic Sewage (MGD)
  - 593 Industrial Waste ((MGD)
  - 594 - 596 Write-in

6XX Exterior Structures
- 61X Equipment Building
  - 611 Mechical Equip Building (SF)
  - 612 Electrical Equip Building (SF)
  - 613 - 615 Write-in
- 62X Supporting Structures Miscellaneous
  - 621 Security Gate (LF)
  - 622 Guard House (SF)
  - 623 - 625 Write-in
- 64X Pollution Abatement Structures
  - 641 Oil Water Separators (GAL)
  - 642 Electrostatic Precipitator (SCFM)
  - 643 - 645 Write-in
- 65X Shop Support Structures
  - 651 Vehicle Grease Racks (EA)
  - 652 Vehicle Wash Platforms (EA)
  - 653 - 656 Write-in
- 66X AC Cleaning Facility
  - 661 AC Washing Facility (SY)
  - 662 AC Rinsing Facility (SY)
  - 663 - 666 Write-in

7XX Paving
- 71X Roads
  - 711 Concrete Roads (SY)
  - 712 Flexible Roads (SY)
  - 713 Overlay Roads (SY)
  - 714 Surface Treatment (SY)
  - 715 Slurry Seal (SY)
  - 716 - 717 Write-in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

72X Parking
- 721 Concrete (SY)
- 722 Flexible (SY)
- 723 Overlay (SY)
- 724 Surface Treatment (SF)
- 725 Slurry Seal (SY)
- 726 - 727 Write-in

73X Write-in

74X Walks
- 741 Concrete Walks (SY)
- 742 Bituminous Walks (SY)
- 743 Special Walks (SY)
- 744 - 746 Write-in

75X Aircraft Paving Concrete
- 751 Runways (SY)
- 752 Taxiways (SY)
- 753 Aprons (SY)
- 754 Repairs Paving (SY)
- 755 Crack and Joint Repairs (LF)
- 756 - 757 Write-in

76X Aircraft Paving Flexible
- 761 Flexible Runways (SY)
- 762 Flexible Taxiways (SY)
- 763 Flexible Aprons (SY)
- 764 Repair A/C Flexible Paving (SY)
- 765 AC Paving Overlay (SY)
- 766 AC Paving Slurry Seal (SY)
- 767 - 768 Write-in

77X Incidental Paving Work
- 771 Pavement Milling (SY)
- 772 - 776 Write-in

8XX Site Preparation

81X Earthwork
- 811 Earthwork (CY)
- 812 Borrow (CY)
- 813 Topsoil/Seed/Sod (SY)
- 814 Landscaping (SY)
- 815 Site Irrigation (EA)
- 816 Surcharge (CY)
- 817 Earth Replacement (CY)
- 818 Environmental Protection (AC)

82X Site Improvements
- 821 Site Improvements (SY)
- 822 - 825 Write-in

83X Site Preparation Miscellaneous
- 831 Site Dewatering (Major) (LF)
- 832 - 835 Write-in

84X Demolition
- 841 Remove Utilities (LF)
- 842 Remove Paving and Slabs (SY)
- 843 Remove Structures (CF)
- 844 Remove/Dispose of Asbestos (Exterior) (LS)
- 845 Remove/Dispose of P.C.B. (LS)
- 846 Remove/Dispose of Contaminated Earth (CY)
- 847 Write-in

85X Storm Drainage
- 851 Storm Drainage Piping (LF)
- 852 Box Arch Culvert (LF)
- 853 Drainage Facing Materials (SY)
- 854 - 856 Write-in

86X Fencing
- 861 Fencing (Perimeter) (LF)
- 862 Fencing Alarm (LF)
- 863 - 865 Write-in

87X Recreation Equipment/Fields
- 871 Playground Equip (EA)
- 872 Playing Field Equip (EA)
- 873 Tennis Courts (EA)
- 874 Softball/Baseball (EA)
- 875 Football/Soccer (EA)
- 876 - 877 Write-in

9XX Heavy Construction

91X Special Building Foundations
- 911 Land Piling Drivn (LF)
- 912 Caissons (EA)
- 913 Pressure Injected Footings (EA)
- 914 Vibrofloation (EA)
- 915 Chemical Soil Stabilization (EA)
- 916 Dynamic Consolidation (EA)
- 917 Piling Cast-in-place (LF)

92X Railroad
- 921 Track Work Railroad (LF)
- 819 Write-in
- 922 - 925 Write-in

93X Marine Structures Piers
- 931 Piling-Marine (LF)
- 932 Dolphins (EA)
- 933 Med Mooring (LS)
- 934 Pier Deck (SF)
- 935 Fenders (LF)
- 936 Pile Clusters (EA)
- 937 Marine Specialties (LS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

938 Write-in

94X Marine Structures Special

941 Bulkhead/Seawall (SF)
942 Erosion Protection-Marine (SY)
943 Riprap (Marine) (SY)
944 - 946 Write-in

95X Marine Repairs

951 Underdeck Repairs (LS)
952 Pile Repairs Marine (LF)
953 - 957 Write-in

96X Dredging

961 Mob/Demob Dredging (LS)
962 Hydraulic Dredging (CY)
963 Bucket Dredging (CY)
964 - 966 Write-in

97X Towers/Antennas

971 Towers (LF)
972 Antennas (LS)
973 - 976 Write-in

98X Tunnel/Pipe Jacking

981 Tunneling (LS)
982 Pipe Jacking (LF)
983 - 986 Write-in

99X Heavy Construction Miscellaneous

991 Bridges (SF)
992 Overpasses (SF)
993 - 996 Write-in
999 Supporting Facilities

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 16: SUPPLEMENTAL INFORMATION

16.1 Conversion Factors. See Appendix F.

16.2 Blank Forms and References. See Appendix G.

16.3 Acronyms and Abbreviations. See Appendix H.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX F

CONVERSION FACTORS

Quantity	Multiply	By	to Obtain	
Length	inch	25.400	millimeter	mm
	foot	0.304800	meter	m
	yard	0.914400	meter	m
	mile (U.S. Statute)	1.609347	kilometer	km
	millimeter	39.370079×10^{-3}	inch	in
	meter	3.280840	foot	ft
	meter	1.093613	yard	yd
	kilometer	0.621370	mile	mi
Area	square inch	0.645160×10^{3}	square millimeter	mm^2
	square foot	0.092903	square meter	m^2
	square yard	0.836127	square meter	m^2
	square mile (U.S. Statute)	2.589998	square kilometer	km^2
	acre	4.046873×10^{3}	square meter	m^2
	acre	0.404687	hectare	
	square millimeter	1.550003×10^{-3}	square inch	in^2
	square meter	10.763910	square foot	ft^2
	square meter	1.195990	square yard	yd^2
	square kilometer	0.386101	square mile	mi^2
	square meter	0.247104×10^{-3}	acre	
	hectare	2.471044	acre	
Volume	cubic inch	16.38706×10^{3}	cubic millimeter	mm^3
	cubic foot	28.31685×10^{-3}	cubic meter	m^3
	cubic yard	0.764555	cubic meter	m^3
	gallon(U.S.liquid)	3.785412	litre	l
	quart(U.S.liquid)	0.946353	litre	l
	cubic millimeter	61.023759×10^{-6}	cubic inch	in^3
	cubic meter	35.314662	cubic foot	ft^3
	cubic meter	1.307951	cubic yard	yd^3
	litre	0.264172	gallon (U.S.liquid)	gal
	litre	1.056688	quart (U.S.liquid)	qt
Mass	ounce(avoirdupois)	28.34952	gram	g
	pound(avoirdupois)	0.453592	kilogram	kg
	short ton	0.907185×10^{3}	kilogram	kg
	gram	35.273966×10^{-3}	ounce (avoirdupois)	oz av
	kilogram	2.204622	pound (avoirdupois)	lb av
	kilogram	1.102311×10^{-3}	short ton	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX G

BLANK FORMS AND REFERENCES

Building SF Cost Development

TITLE: _____ P#: _____

LOCATION: _____ DATE: _____

PREPARED BY: _____ PH#: _____

	CAT CODE	SIZE	ACF	DATE mo / yr
PROPOSED FACILITY				
GUIDANCE FACILITY				

HISTORICAL GUIDANCE SOURCE: _____

HISTORICAL GUIDANCE UNIT COST: _____

HISTORICAL UNIT COST	SIZE FACTOR	AREA COST FACTOR	ESCALATION FACTOR	ADJUSTED UNIT COST

_____ X _____ X _____ X _____ = _____

ADDITIONAL FUNCTIONAL FEATURES

FUNCTIONAL FEATURES	QTY	UNIT COST	TOTAL COST	ADJUSTED U/C	%CHANGE

ADDITIONAL FUNCTIONAL FEATURES TOTAL : _____ _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

DD Form 1391

1. COMPONENT	FY 19___ MILITARY CONSTRUCTION PROJECT DATA	2. DATE
3. INSTALLATION AND LOCATION	4. PROJECT TITLE	

5. PROGRAM ELEMENT	6. CATEGORY CODE	7. PROJECT NUMBER	8. PROJECT COST ($000)

9. COST ESTIMATES

ACF: FER: ITEM ESCALATED TO:	U/M	QUANTITY	UNIT COST	COST ($000)

10. DESCRIPTION OF PROPOSED CONSTRUCTION

DD FORM 1 DEC 76 1391 PREVIOUS EDITIONS MAY BE USED INTERNALLY UNTIL EXHAUSTED PAGE NO.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Building Budget Estimate Summary Sheet

BUILDING BUDGET ESTIMATE SUMMARY SHEET FOR P- _____

Title: _____ Costs Escalated to: _____


Location: _____ ACF: _____

Prepared by: _____ Date: _____ Contingency: _____

FER: _____


	S/SF	S/SYS	SYS QUAN	TOTAL	BUILDING	BUILT-IN EQUIPMENT
Building						
Subtotal Building						
Supporting Facilities						

Cost Estimate Backup Sheet (NAVFAC)

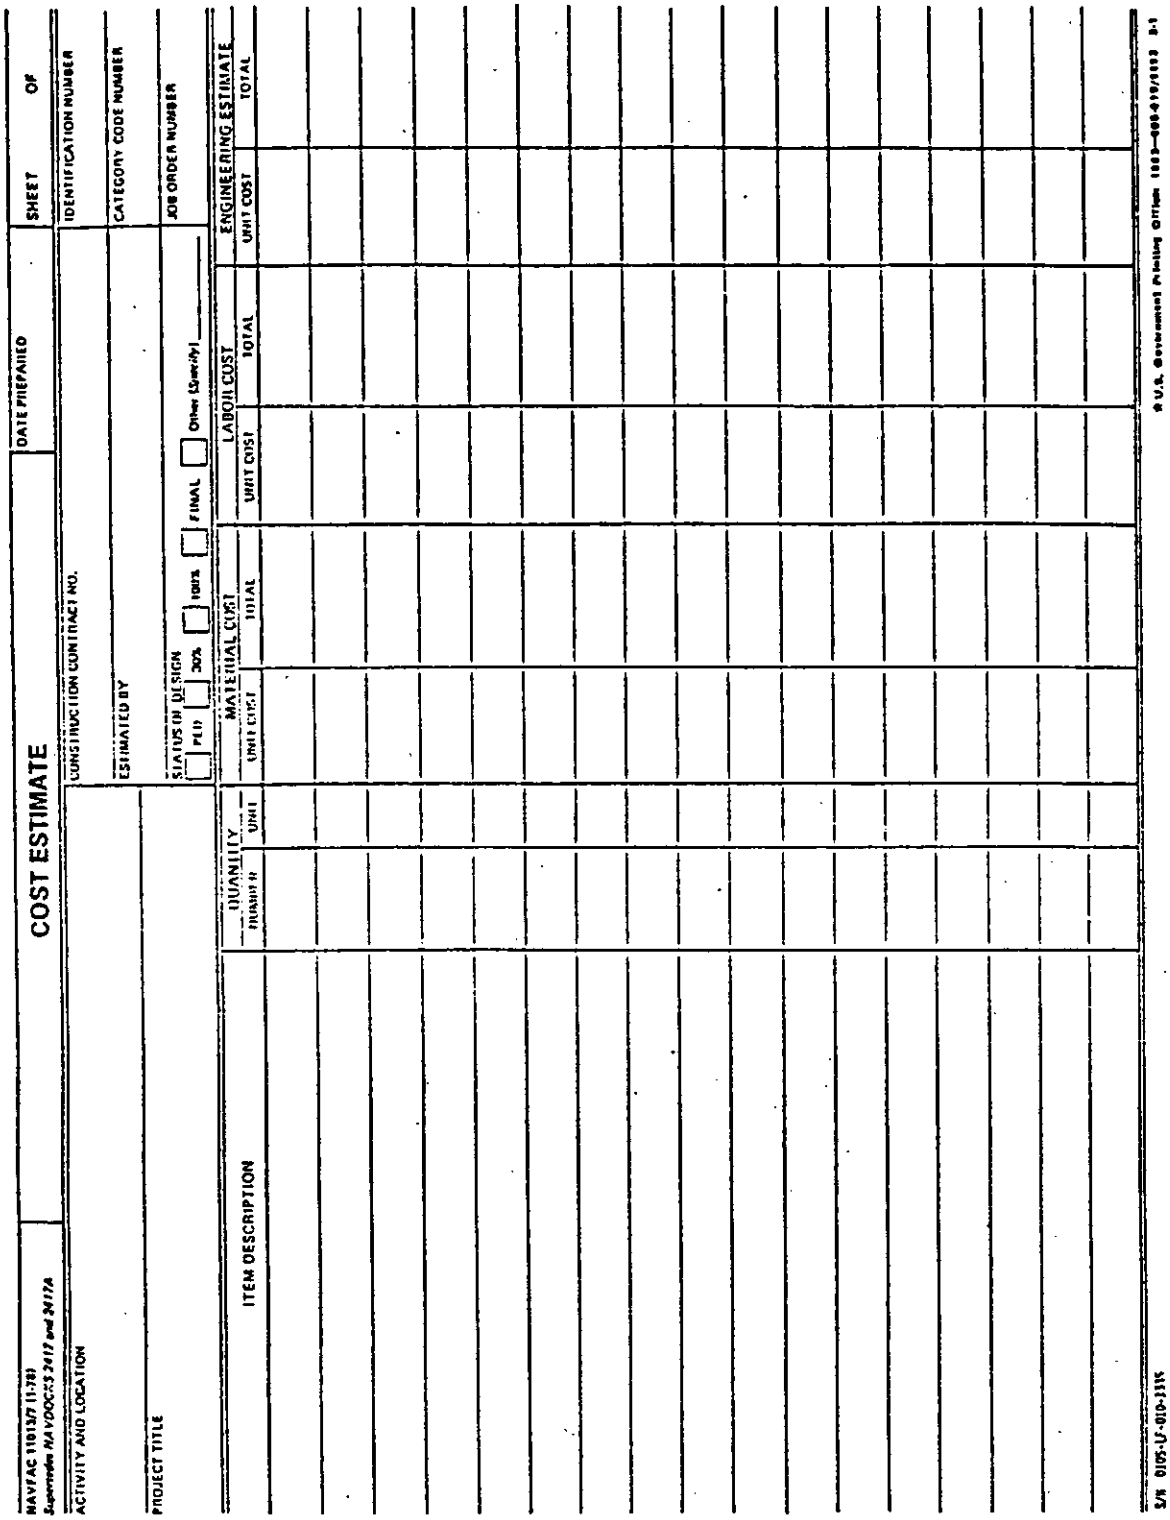

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Cost Estimate Backup Sheet (LANTDIV)

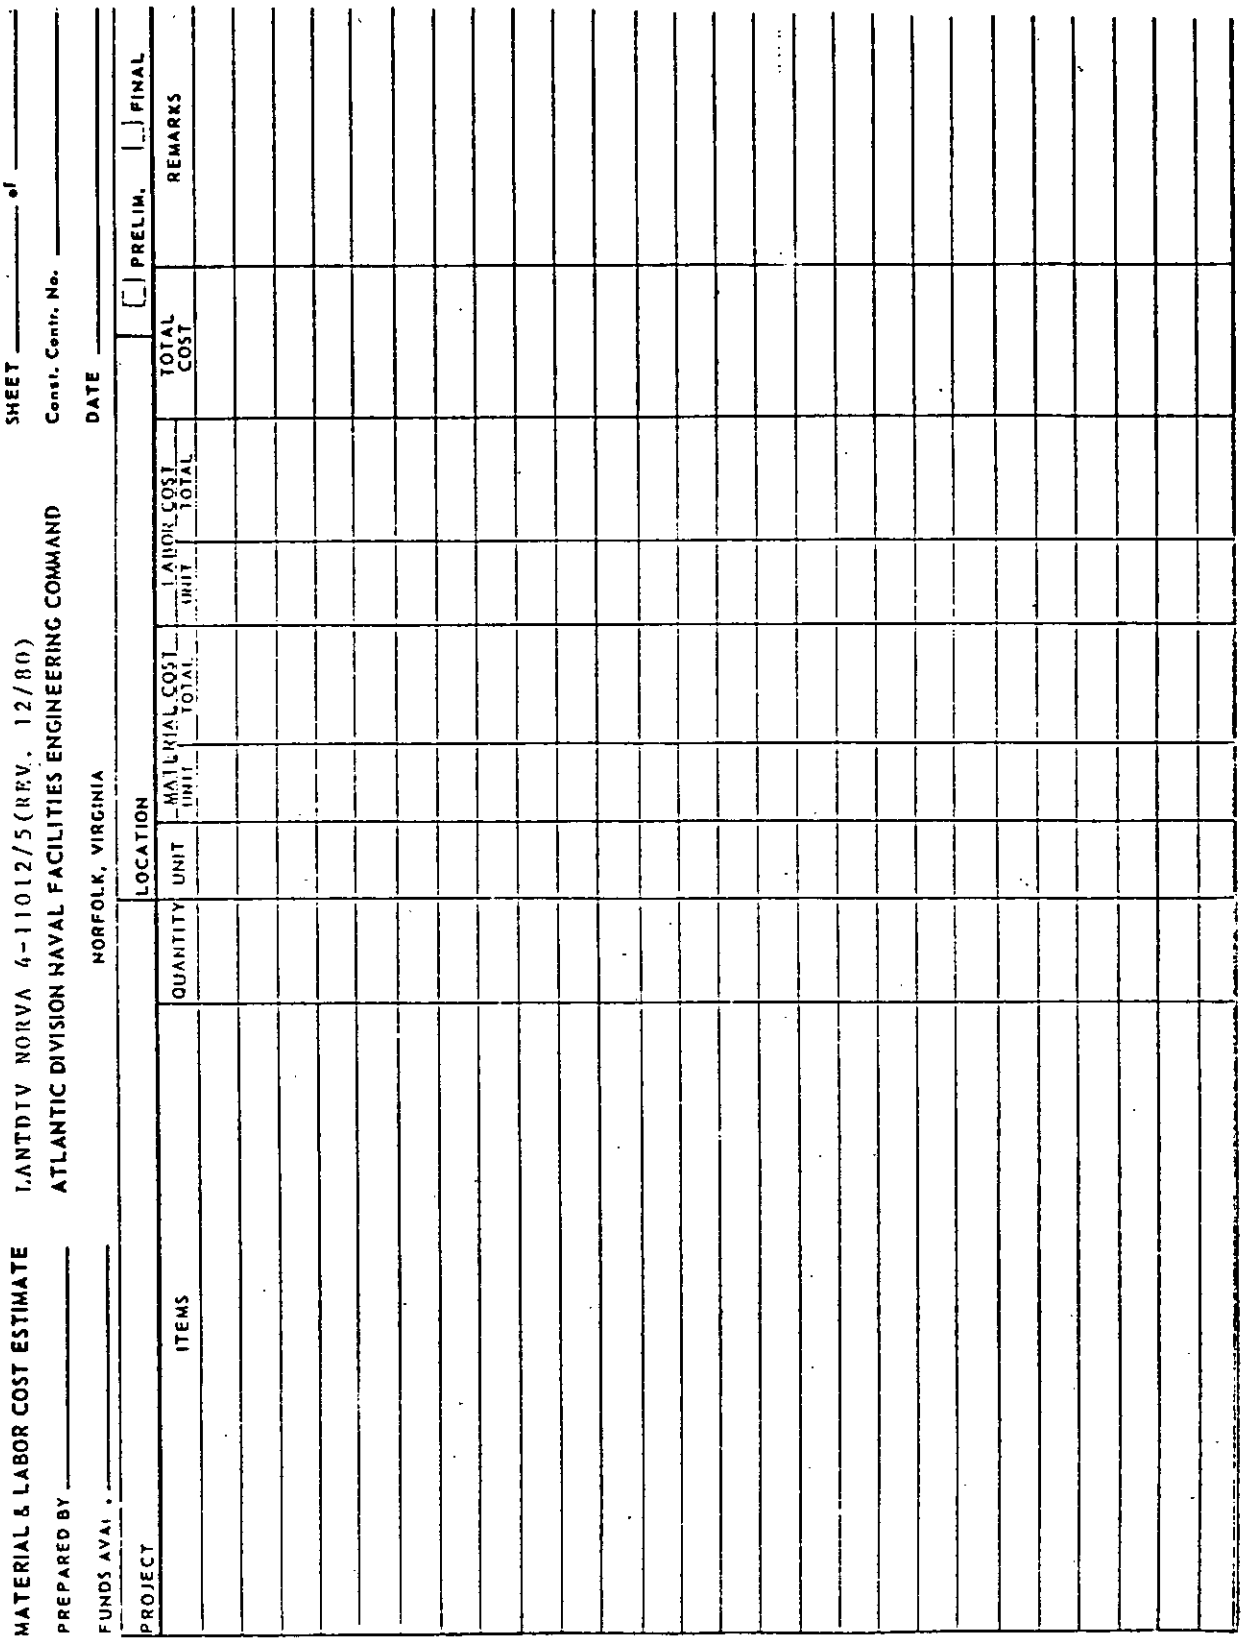

MATERIAL & LABOR COST ESTIMATE LANTDIV NORVA 4-11012/5 (REV. 12/80) SHEET _____ of _____

PREPARED BY _____ ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND Const. Contr. No. _____

FUNDS AVAI • _____ NORFOLK, VIRGINIA DATE _____ [ ] PRELIM. [ ] FINAL

PROJECT _____ LOCATION _____

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

International Balance of Payments (IBOP) Implications

1. Activity (Name and Location)				Date
2. Project Title				3. P-No.
	NORMAL PROCEDURES		PLANNED PROCEDURE	
	Construction	*Construction Total Material	Construction	*Construction Total Material
BUDGET COST				
LESS RETURNS TO THE US				
a) US End Products				
b) US Services				
c) US Transportation				
TOTAL RETURNS				
FOREIGN EXCHANGE COST (FEC)				

SUMMARY OF IBOP DATA

	NORMAL PROCEDURE	PLANNED PROCEDURE	PLANNED PROCEDURE EFFECT
CURRENT WORKING ESTIMATE			
FOREIGN EXCHANGE COST (FEC)			

* Materials, supplies and equipment (including government furnished material procured abroad) acquired by the Navy from construction funds and provided to contractors for incorporation into foreign construction projects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Cost Model Explanation

GENERAL:

This questionnaire will establish a measure of the project scope early in the planning stage in a manner which will allow empirical prices to be applied. It is recognized that many design decisions cannot be made at this time; however, if a realistic price is to be developed, the needs of the activity relating to a particular project must be defined. The NAVFACENGCOM method of conceptual estimating requires cost development from guidance cost of comparable construction. Any variation from guidance cost must be supported by a definition and cost of functional features. This support is often necessary to provide adequate project funding.

BUILDING:

Under normal conditions, the building cost model will be completed at the design cost certification stage. Therefore, this portion of the cost model is not required for the facilities study.

The completed cost model (systems 111 through 499) must state what is planned, with EMPHASIS UPON SCOPE FEATURES THAT GENERATE SIGNIFICANT COST. Assumptions must be stated. Additional narrative description for functional items is encouraged.

System 000 Building Construction

This system describes the total function of the building. As such, it is the most important information shown on the cost model.

SUPPORTING FACILITIES:

The completed cost model (systems 500 through 999) should state what is planned with emphasis upon scope features that generate significant cost. Refer to additional guidance in the cost model questionnaire.

NOTES:

1. This Cost Model Questionnaire serves two purposes:
   At the budget stage it serves as a means of describing and quantifying project requirements in such a manner that empirical prices can be used to generate a project cost.

   At the final estimate stage it serves as a means of collecting subsystem numbers, for storage in NAVFACENGCOM historical files.

2. The cost model questionnaire systems list includes numbered systems that are "write-in". These numbers may be used to identify systems in the project that are not identified in the questionnaire.

3. Systems followed by (1) are considered built-in equipment.

4. Exterior Systems and Special Equipment need more scope definition for accurate pricing. Show narrative description as you best understand the scope when detailed lists are not available.

5. Building system quantities should be the area in which the system occurs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Project Title _____

Location _____

Contract Number _____

P# _____ FY____Date _____

Completed by _____

Phone Number _____

COST ENGINEERING SYSTEM (CES)

COST MODEL QUESTIONNAIRE

12/31/86

000 Building Construction Gross Building Area (SF) _____

Function or Category Code	% or Area
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

Where a single building includes areas of significant cost variation as identified by category code or functional area, show a breakdown by function or category code (under sub system 01 through 05). Show area in sq. ft. or by percentage to nearest 5%.

20	Number of Floors	_____
21	Floor to Floor Height	_____LF
22	Length - Nearest foot	_____LF
23	Width - Nearest foot	_____LF
25	Irregular - Yes/No	_____
26	Building Perimeter(when irregular)	_____LF
40	Describe any known special considerations; scheduling, security, asbestos removal, hazardous materials	
50	Finish floor elevation above existing grade - nearest foot.	_____LF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

STRUCTURAL

111 Foundation

Ground Floor Area (SF) _____

__ 01 Spread Footings
__ 02 Thickened Slab
__ 03 Pile Foundation
__ 04 Caissons
__ 05 Continuous wall footing
__ 06 Grade Beams

***** For convenience pilings are described with building foundation. *****
***** Price under the supporting facilities. 911 Land Piling-Driven *****

911 Land Piling-Driven

Length of Piling (LF) _____

__ 02 Timber
__ 03
__ 04 Concrete 10" Sq
__ 05 Concrete 12" Sq
__ 06 Concrete 14" Sq
__ 07
__ 08 Steel

Length of Piling

__ 20 Under 25'
__ 21 26' - 35'
__ 22 36' - 45'
__ 23 46' - 55'
__ 24 56' - 65'
__ 25 66' - 75'
__ 26 76' - 85'
__ 27 86' - 95'
__ 28 Over 95'

112 Slab on Grade

Slab on Grade Area (SF) _____

__ 01 Floating
__ 02 Grade Beam Supported
__ 03 Pile Supported

Thickness

__ 11 Under 6"
__ 12 6"
__ 13 8"
__ 14 Over 8"

Floorload

__ 30 Under 100 PSF
__ 31 101 - 200 PSF
__ 32 201 - 300 PSF
__ 33 301 - 400 PSF
__ 34 401 - 500 PSF
__ 35 Over 501 PSF

113 Structural

Gross Building Area (SF) _____

__ 01 Bearing Wall
__ 02 Steel Framing
__ 03 Concrete Cast in Place
__ 04 Wood
__ 05
__ 06 Concrete Precast
__ 07 Air Inflatable

114 Supported Floor

Supported Floor (SF) _____

__ 01 Concrete Cast in Place
__ 02 Concrete on Steel Joists
__ 03 Concrete on Steel Framing
__ 04 Precast Concrete
__ 05 Wood
__ 06

If more than one entry give percentage of each - nearest 10%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

115 Stairs — Risers (EA) _____

116 Roof Structure — Area of Roof (SF) _____

Framing

__ 02
__ 03 Precast Hollow Core
__ 04 Precast Concrete
__ 05 Wood
__ 06 Steel Joist
__ 07 Steel Framing

If more than one entry, give percentage of each - nearest 10%.

117 Pre Engineered Building — Gross Area of Building (SF) _____

__ 01 Eave height under 12'
__ 02 Eave height 12-20'
__ 03 Eave height over 20

118 Vault — Gross Floor Area (SF) _____

119 Write-in System

ARCHITECTURAL

141 Roofing — Roof Area (SF) _____

Surface

__ 10
__ 11 Built-up
__ 12 Shingles
__ 13 Elast.
__ 14 Sprayed
__ 15 Metal Roofing
__ 16

142 Exterior Walls — Exterior Wall Area (SF) _____

Ext. Surface		Backup		Height	
__ 01	Brick (below 10')	__ 21	CMU	__ 30	Under 12'
__ 02	CMU	__ 22	Wood Studs	__ 31	12' - 20'
__ 03	Drivit	__ 23	Steel Studs	__ 32	over 20'
__ 04	Metal Panels(above 10')	__ 24	Conc Cast in Place		
__ 05	Stucco	__ 25	Precast Concrete		
__ 06	Wood	__ 26	Furring		
__ 07	Conc Cast In Place				
__ 08	Precast Concrete				

If more than one height is shown give percentage of each - nearest 10%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

143 Interior Walls

Interior Wall Area (SF) _____

__ 01 Concrete
__ 02 Steel Studs
__ 03
__ 04 Concrete Cast in Place
__ 05 Wood Studs
__ 06

Height
__ 21 8'
__ 22 9'
__ 23 10'
__ 24 Over 10'

If more than one entry under height, give percentage of each - nearest 10%. Give narrative description of type and size of rooms.

144 Interior Finishes

Gross Building Area (SF) _____

Floor
__ 01 Gypsum Board
__ 02 CMU
__ 03 Ceramic Tile
__ 04 Wood Panels
__ 05 Plaster
__ 06 Vinyl Wall Covering
__ 11
__ 12 Ceramic Tile
__ 13 Quarry Tile
__ 14 Carpet
__ 15 Concrete
__ 16 Terrazzo
__ 17 Special Toppings
__ 18 VCT

Ceiling
__ 21 Acoustical
__ 22 Gypsum Board
__ 23 Plaster
__ 24 Concrete
__ 25 Spray on

145 Doors

Surface Area One Side (SF) _____

__ 01 Hollow Metal Exterior
__ 02 Alum Entrance Store Front
__ 03 Folding
__ 04 Roll Up
__ 05 Overhead
__ 06
__ 07
__ 08 Wood Interior
__ 09 Hollow Metal Interior

146 Windows

Surface Area One Side (SF) _____

147 Specialities

Gross Building Area (SF) _____

__ 01 Wardrobes
__ 02 Jail
__ 03 Clean Room
__ 04 Case Work
__ 05 Dark Rooms
__ 06
__ 07 Loading Dock
__ 08
__ 09 Wire Partitions
__ 10 Metal Walkways
__ 11 X-Ray

Give estimating quantities for required ITEMS OF SIGNIFICANT COST. List shown is not complete. Detailing of toilet accessories and partitions is not required. Very large items may be more suited to using a write-in system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 148 BEQ Wardrobes — Number of Wardrobes (EA) _____
__ 01 With Chest
__ 02 Without Chest

149 Write-in System

DEMOLITION INTERIOR

171 Demolition Interior — Gross Building Area (SF) _____
__ 01 Complete Interior Partition
__ 02 Complete Interior Finishes
__ 03 Complete Interior Mechanical
__ 04 Complete Interior Electrical
__ 05 Complete Interior of Bldg. 01 thru 04

172 Asbestos Removal Interior — Total Cost (LS) _____
__ 01
__ 02
__ 03

173 - 175 Write-in Systems

PLUMBING

Note: Refer to attachment #2 to determine number of fixtures for systems 211 and 213

211 Plumbing-Domestic — Number of Fixtures (EA) _____

212 Domestic Hot Water Solar — Capacity (MBTH) _____

213 Roof Drainage — Number of Drains (EA) _____

214 - 216 Write-in Systems

SPACE CONDITIONING

221 HVAC — Capacity (MBTU or TNS) _____

__ 20 Bldg. Htng Plant HW, oil
__ 21 Bldg. Htng Plant Steam, oil
__ 22 Bldg. Htng Plant Hot air, oil
__ 23 Bldg. Htng Plant Hot air, gas
__ 24 Bldg. Htng Plant HW, gas
__ 25 Bldg. Htng Plant steam, gas
__ 26 Bldg. Htng Plant Elec.
__ 27 Base Plant Steam
__ 28 Base Plant HW
__ 29 Base Plant HTHW

Give tonnage, refer to attachment 1 if better information is not available. If building contains partial A/C, use systems 222 and 223 for each respective area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

222 Air Conditioning — Capacity (TNS) _____

223 Heating & Ventilation — Capacity (MBTH or CFM) _____

__ 20 Bldg. Htng Plant
__ 21 Bldg. Htng Plant Steam, oil
__ 22 Bldg. Htng Plant Hot Air, oil
__ 23 Bldg. Htng Plant Hot air, gas
__ 24 Bldg. Htng Plant HW, gas
__ 25 Bldg. Htng Plant Steam, gas
__ 26 Bldg. Htng Plant Elec.
__ 27 Base Plant Steam
__ 28 Base Plant HW
__ 29 Base Plant HTHW

224 Mechanical Ventilation — Fan Capacity (CFM) _____

225 Dehumidification — Capacity(PPH) _____

226 Heating, Solar — Collector Area (SF) _____

227 Write-in System

WEIGHT HANDLING EQUIPMENT

(1) 231 Bridge Cranes — Capacity (TNS) _____

__ 01 Span under 50'
__ 02 Span 51-75'
__ 03 Span over 75'
__ 10 Capacity under 10 T
__ 11 Capacity 10-20 T
__ 12 Capacity 20-30 T
__ 13 Capacity 30-40 T
__ 14 Capacity over 40 T
__ 21 Run under 50'
__ 22 Run 50-100'
__ 23 Run over 100'

(1) 232 Monorails — Capacity (TNS) _____

__ 01 Manual
__ 02 Electric
__ 03 Air Operated
__ 10 Capacity under 5 T
__ 11 Capacity 5-10 T
__ 12 Capacity over 10 T
__ 21 Run under 50'
__ 22 Run 50 to 100'
__ 23 Run over 100'

(1) 233 Fixed Hoist — Capacity (TNS) _____

__ 01 Manual
__ 02 Electric
__ 03 Air Operated

(1) 234 Vehicle Lifts — Capacity (TNS) _____

__ 10 Capacity under 5 T
__ 11 Capacity 5-10 T
__ 12 Capacity over 10 T

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 235 Elevators — Number of Stops (EA) _____
__ 01 Electric
__ 02 Hydraulic
__ 03
__ 11 Passenger
__ 12 Freight

(1) 236 Escalators — Flights (EA) _____

(1) 237 Conveyors — Capacity (TNS/HR) _____

(1) 238 Write-in System

SPECIAL MECHANICAL PIPING SYSTEM

(1) 241 Vacuum — Capacity (CFM) _____
__ 01 Medical
__ 02 Industrial
__ 03

(1) 242 Oxygen — Outlets (EA) _____

(1) 243 Nitrogen — Outlets (EA) _____

(1) 244 Compressed Air — Capacity (CFM) _____
__ 01 Low Pressure 150 below
__ 02
__ 03 High Pressure 151 up

245 Interior Steam — Capacity (PPH) _____
__ 01 High Pressure
__ 02 Medium Pressure
__ 03 Low Pressure
__ 11 Oil Fired
__ 12 Electric Fired
__ 20 Fuel Oil Storage

246, 247 Write-in Systems

SPECIAL MECHANICAL OTHER

251 Dust Collection — Capacity (CFM) _____

252 Engine Exhaust — Fan Capacity (CFM) _____

253 - 255 Write-in Systems

FIRE PROTECTION

(1) 271 Sprinklers — Gross Area Sprinkled (SF) _____
__ 01 Dry
__ 02 Wet
__ 03 Preaction
__ 04 Deluge
__ 05
__ 10 Light Hazard
__ 11 Ordinary Hazard
__ 12 Extra Hazard
__ 13
__ 14 Includes Booster Pump

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

(1) 272 AFFF (Aqueous Film Forming Foam) Capacity (GAL) _____
__ 01 Deluge
__ 02 Pre-action
__ 03
__ 04 Oscillating Monitors

(1) 273 Carbon Dioxide Storage Capacity (LBS) _____
__ 01 Hose Reel
__ 02 Flooding Area
__ 03 Flooding Total
__ 04

(1) 274 Halon Storage Capacity (LBS) _____
__ 01
__ 02

275 Fire Alarm Gross Building Area (SF) _____

276, 277 Write-in Systems

POWER & LIGHTING

311 Power Connected Load (KW) _____

312 Lighting Gross Building Area (SF) _____

(1) 313 400 HZ Converter Capacity (KW) _____

(1) 314 Direct Current Converter Capacity (KW) _____

(1) 315 Uninterruptable Power Supply Converter Capacity (KVA) _____

(1) 316 Electrical Generators Equipment Capacity (KW) _____

__	01	Intermittent	__	40
__	02	Continuous	__	41 600 RPM
__	03	Electrical	__	42 720 RPM
__	04	Gas	__	43 900 RPM
__	05	Diesel	__	44 1200 RPM
__	06	Turbine	__	45 1800 RPM
__	07			

317, 318 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SPECIAL ELECTRICAL PROTECTION

(1) 321 Grounding Gross Building Area (SF) _____
__ 01 Lightning Grounding
__ 02 Electronic Grounding
__ 03 Protective Grounding

(1) 322 Lightning Protection Gross Building Area (SF) _____

(1) 323 - 326 Write-in Systems

SPECIAL ELECTRICAL, ELECTRONICS

(1) 331 Security Detection Gross Building Area (SF) _____
__ 01 Intrusion Alarm for Access Control
__ 02 Access Control
__ 03 TV Camera & Monitor

If layout is not available describe area covered, where does alarm sound etc. Also describe intended function of system.

(1) 332 EMCS (Energy Monitoring & Controls System) Number of Points (EA) _____
__ 01 Local Control
__ 02 Remote Control

(1) 333 Computer Communication Cable Run (LF) _____

334 - 336 Write-in Systems

COMMUNICATION

341 Telephone Gross Building Area (SF) _____

342 Intercom Gross Building Area (SF) _____

343 Television Gross Building Area (SF) _____

344 Public Announcement Gross Building Area (SF) _____

345 Master Clock Number of Outlets (EA) _____

(1) 346, 347 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MEDICAL EQUIPMENT

(1) 411 Hospital Equipment — Gross Building Area (SF) _____

(1) 412 Dental Equipment — Number of Chairs (EA) _____

(1) 413, 414 Write-in Systems

FOOD SERVICE

(1) 421 Food Service Equipment — Pieces of Food Service Equip (EA) _____

(1) 422 - 425 Write-in Systems

MISCELLANEOUS EQUIPMENT

(1) 431 Chapel Equipment — Gross Building Area (SF) _____

(1) 432 Movie Theater Equipment — Gross Building Area (SF) _____

(1) 433 Rifle Range Equipment — Firing Lanes (EA) _____

(1) 434 Laboratory Equipment — Number of Pieces (EA) _____

(1) 437 Waste Disposal Equipment — Equipment Capacity (PPH) _____

(1) 438 Write-in System

SPECIAL WAREHOUSE EQUIPMENT

(1) 441 Special Warehouse Equipment — Gross Building Area (SF) _____

(1) 442 - 444 Write-in Systems

SPECIAL CONSTRUCTION

451 Hanger Doors — Surface Area One Side (SF) _____
__ 01 Sliding
__ 02 Vertical Lift
__ 10 Manual
__ 11 Power Operated

452 Vault Doors — Number (EA) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

453 Blast Doors — Surface Area One Side (SF) _____

Span		Charge Weight (TNT Equivalent)		Distance	
__ 01		__ 11		__ 21	
__ 02	3 feet	__ 12	0 - 10 LBS	__ 22	0 - 20 FT
__ 03	5 feet	__ 13		__ 23	
__ 04	10 feet	__ 14	10 - 500 LBS	__ 24	20 - 100 FT
__ 05	15 feet	__ 15		__ 25	
__ 06	20 feet	__ 16	Over 500 LBS	__ 26	Over 100 FT

454 Raised Floor — Area of Raised Floor (SF) _____

(1) 455 Radio Frequency Shielding — Surface Area Shielded (SF) _____

456 Bowling Lanes — Number of Lanes (EA) _____

__ 01 New
__ 02 Refinished
__ 10 W/O Auto Pin Setter
__ 11 W/ Auto Pin Setters

(1) 457 Paint Spray Booth — Floor Area (SF) _____

458 Write-in System

OTHER EQUIPMENT

491 Other Miscellaneous Equipment

492 Snow Melting — Area Protected (SF) _____

(1) 496 Government furnished equipment Financed from Construction Funds — Gross Building Area (SF) _____

Describe any equipment not shown elsewhere that is purchased from construction funds. Usually this is either from equipment purchased by the government and furnished to the construction contractor, or it is furnished and installed under a seperate contract. Also show, if not shown elsewhere equipment not from construction funds for which installation costs will be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Supporting Facilities

(Systems 500 through 999)

Note:

1. Show the following criteria suitable for the application of historical cost; under each applicable system heading;

   a. Size (assume if unknown) and length of utility runs. Include storm drainage requirement. Indicate valves, fire hydrants, manholes, catch basins and other significant extras. Depth of cut (when over 6 feet) and dewatering requirements must be shown.

   b. Area and assumed section for paved areas. Identify each type and section variation.

   c. Description of work required for grading, cut and borrow. Describe assumed nature of materials to be moved. If rock excavation is required, state assumptions on removal requirements (e.g., rip, blast, etc.).

   d. Indicate approximate quantities of clearing and grubbing in acres, and whether heavy, medium, or light.

   e. Describe any functional features required outside the building 5 foot line such as: sewage lift stations, wash racks and water tanks, and unsuitable soil conditions

   f. If hazardous materials are present, state type, extent and method of disposal.

   g. See System 911 for Land Piling - Driven.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR ELECTRICAL

511 Electrical Distribution, Primary	Length of Run (LF) _____
512 Electrical Distribution, Secondary	Length of Run (LF) _____
513 Substation/Transformer	Capacity (KVA) _____
514 Area Lighting	Number of Fixtures (EA) _____
515 Airfield Lighting	Length of Run (LF) _____
516 Lightning Protection	Points of Protection (EA) _____
517, 518 Write-in Systems	

EXTERIOR COMMUNICATION

521 Fire Alarm	Length of Run (LF) _____
522 Security Alarm	Length of Run (LF) _____
523 Communication, Telephone	Length of Run (LF) _____
524 Exterior EMCS (Energy Monitoring Control System)	Length of Run (LF) _____
525, 526 Write-in Systems	

EXTERIOR MECHANICAL

541 Heat Distribution, Overhead	Length of Run (LF) _____
542 Heat Distribution, Underground	Length of Run (LF) _____
543 Chilled Water Distribution	Length of Run (LF) _____
544 Condensate Collection (only)	Length of Run (LF) _____
545 Gas Distribution	Length of Run (LF) _____
546 Compressed Air Distribution	Length of Run (LF) _____
547 Fuel Distribution	Length of Run (LF) _____
548 Exterior Foam	Length of Run (LF) _____
549 Write-in System	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR WATER DISTRIBUTION

551 Water Distribution	Length of Run (LF) _____
552 Fire Protection Water Distribution	Length of Run (LF) _____
553 Salt Water Distribution	Length of Run (LF) _____
554 Sanitary Sewers	Length of Run (LF) _____
555, 556 Write-in Systems	

BULK STORAGE

561 Fuel Storage, Bulk	Capacity (BBL) _____
562 Fuel Storage, Ready Issue	Capacity (GAL) _____
563 Water Storage	Capacity (GAL) _____
564 - 566 Write-in Systems	

FUELING

571 Vehicle Fueling	Number of Outlets (EA) _____
572 Aircraft Fueling	Number of Hydrants (EA) _____
573 Marine Fueling	Number of Outlets (EA) _____
574 - 576 Write-in Systems	

PUMPING

581 Fuel Pumping Station	Pump Capacity (GPM) _____
582 Water Pumping Station	Pump Capacity (GPM) _____
583 Fire Booster Pump	Pump Capacity (GPM) _____
584 Sewage Pump Station	Pump Capacity (GPM) _____
585 Sewage Lift Station	Pump Capacity (GPM) _____
586 Write-in System	

TREATMENT FACILITY

591 Water Treatment	Capacity (MGD) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

592 Domestic Sewage Treatment — Capacity (MGD) _____

593 Industrial Waste Treatment — Capacity (MGD) _____

594 - 596 Write-in Systems

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross M.E. Bldg Area (SF)_____

Building required to house mechanical equipment when not connected to the main building and not included in gross area shown under the primary facility.

612 Electrical Equipment Building — Gross E.E. Bldg Area (SF)_____

613 - 615 Write-in Systems

SUPPORTING STRUCTURES MISCELLANEOUS

621 Security Gate — Opening Width (LF) _____

622 Guard House — Gross Building Area (SF) _____

623 - 625 Write-in Systems

POLLUTION ABATEMENT STRUCTURES

641 Oil Water Separators — Capacity (GAL) _____

642 Electro-Static Precipitator — Air Flow (SCFM) _____

643 - 645 Write-in Systems

SHOP SUPPORT STRUCTURES

651 Vehicle Grease Racks — Number of Vehicle Racks (EA) ____

652 Vehicle Wash Platforms — Number of Vehicle Bays (EA) _____

653 - 656 Write-in Systems

AIRCRAFT CLEANING FACILITY

661 Aircraft Washing Facility — Paved Area (SY) _____

662 Aircraft Rinsing Facility — Paved Area (SY) _____

663 - 666 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PAVING

711 Concrete Roads	Paved Area (SY) _____
712 Flexible Roads	Paved Area (SY) _____
713 Overlay Roads	Paved Area (SY) _____
714 Surface Treatment Roads	Paved Area (SY) _____
715 Slurry Seal Road	Paved Area (SY) _____
716, 717 Write-in Systems	

PARKING

721 Concrete Parking	Paved Area (SY) _____
722 Flexible Parking	Paved Area (SY) _____
723 Overlay - Parking	Paved Area (SY) _____
724 Surface Treatment - Parking	Paved Area (SY) _____
725 Slurry Seal Parking	Paved Area (SY) _____
726, 727 Write-in Systems	

WALKS

741 Concrete Walks	Paved Area (SY) _____
742 Bituminous Walks	Paved Area (SY) _____
743 Special Walks	Paved Area (SY) _____
744 - 746 Write-in Systems	

AIRCRAFT PARKING CONCRETE

751 Concrete Runways	Paved Area (SY) _____
752 Concrete Taxiways	Paved Area (SY) _____
753 Concrete Aprons	Paved Area (SY) _____
754 Repairs Concrete Paving	Paved Area (SF) _____
755 Crack and Joint Repair	Length of Repair (LF) _____
757, 758 Write-in Systems	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

AIRCRAFT PAVING FLEXIBLE

761 Flexible Runways	Paved Area (SY) _____
762 Flexible Taxiways	Paved Area (SY) _____
763 Flexible Aprons	Paved Area (SY) _____
764 Repair Aircraft Flexible Paving	Paved Area Patched (SY) _____
765 Aircraft Paving Overlays	Paved Area (SY) _____
766 Aircraft Paving Slurry Seal	Paved Area (SY) _____
767, 768 Write-in Systems	

INCIDENTAL PAVING WORK

771 Pavement Milling	Milled Area (SY) _____
772 - 776 Write-in Systems	

EARTHWORK

811 Earthwork	Volume (CY) _____
812 Borrow	Volume in Place (CY) _____
813 Topsoil, Seed, Sod	Area Graded (SY) _____
814 Landscaping	Area Planted (SY) _____
815 Site Irrigation	No. of Sprinkler Heads (EA) _____
816 Surcharge	Fill in Surcharge (CY) _____
817 Earth Replacement	In-Place Measurement (CY) _____
818 Environmental Protection	Area Protected (ACRES) _____
819 Write-in System	

SITE IMPROVEMENTS

821 Site Improvements	Area Developed (SY) _____
822 - 825 Write-in Systems	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SITE PREPARATION MISCELLANEOUS

831	Site Dewatering (Major)	Header Pipe (LF) _____
832 - 835	Write-in Systems	

DEMOLITION

841	Remove Utilities	Length of Run (LF) _____
842	Remove Paving and Slabs	Area Removed (SY) _____
843	Remove Structures	Structure Volume (CF) _____
844	Remove/Dispose of Asbestos (Exterior)	Total Cost (LS) _____
845	Remove/Dispose of P.C.B.	Total Cost (LS) _____
846	Remove/Dispose of Contaminated Earth	Volume of Earth Removed (CY) ____
847	Write-in System	

STORM DRAINAGE

851	Storm Drainage Piping	Length of Run (LF) _____
852	Box and Arch Culvert	Length of Culvert (LF) _____
853	Drainage Facing Materials	Surface Area (SY) _____
854 - 856	Write-in Systems	

FENCING

861	Fencing (Perimeter)	Length of Fence (LF) _____
862	Fencing (Alarm)	Length of Fence (LF) _____
863 - 865	Write-in Systems	

RECREATION EQUIPMENT/FIELDS

871	Playground Equipment	Pieces of Equipment (EA) _____
872	Playing Field Equipment	Pieces of Equipment (EA) _____
873	Tennis Courts	Number of Courts (EA) _____
874	Softball/Baseball Fields	Number of Fields (EA) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

875 Football/Soccer Fields — Number of Fields (EA) _____

876, 877 Write-in Systems

SPECIAL BUILDING FOUNDATIONS

**** For SYSTEM 911 LAND PILING-DRIVEN ****
**** See Under Foundations(System 111) in Building Systems ****

912 Caissons — Number of Caissons (EA) _____

913 Pressure Injected Footing — Number of Footings (EA) _____

914 Vibrofloatation — Number of Locations (EA) _____

915 Chemical Soil Stabilization — Number of Locations (EA) _____

916 Dynamic Consolidation — Number of Locations (EA) _____

917 Piling Cast-In-Place Concrete — Length of Piling (LF) _____

RAILROAD

921 Track Work - Railroad — Length of Track (LF) _____

922 - 925 Write-in Systems

MARINE STRUCTURES PIERS

931 Piling - Marine — Length of Piling (LF) _____

932 Dolphins — Number of Dolphins (EA) _____

933 Med Mooring — Total Cost (LS) _____

934 Pier Deck — Area of Deck (SF) _____

935 Fenders — Length of Fender (LF) _____

936 Pile Clusters — Number of Clusters (EA) _____

937 Marine Specialities — Total Cost (LS) _____

938 Write-in System

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls — Total Face Area (SF) _____

942 Erosion Protection - Marine — Area Covered (SY) _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

943 Riprap (Marine) Area Covered (SY) _____

944 - 946 Write-in Systems

MARINE REPAIRS

951 Underdeck Repairs Total Cost (LS) _____

952 Pile Repairs Marine Length Repaired (LF) _____

953 - 957 Write-in Systems

DREDGING

961 Mobilization/Demobilization - Dredging Total Cost (LS) _____

963 Hydraulic Dredging Volume (CY) _____

964 Bucket Dredging Volume (CY) _____

965 - 966 Write-in Systems

TOWERS/ANTENNAS

971 Towers Length (LF) _____

972 Antennas Total Cost (LS) _____

973 - 976 Write-in Systems

TUNNEL/PIPE JACKING

981 Tunneling Volume Removed (CY) _____

982 Pipe Jacking Length Jacked (LF) _____

983 - 986 Write-in Systems

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges Deck Area (SF) _____

992 Overpasses Deck Area (SF) _____

993 - 996 Write-in Systems

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Air Conditioning Tonnage Guide

CATEGORY CODE	TITLE	SQUARE FEET OF FLOOR AREA / TON OF A/C
171-15	Reserve Centers	450 - 600
171-20	Applied Instruction Building	NO STANDARD
171-25	Auditorium	0.04 - 0.06 tons/seat
171-35	Flight Simulator	100 - 300
610-10	Administration Building	350 - 400
721-11	UEPH	1000 - 1200
722-10	Dining Facility	175 - 450
724-11	UOPH	1000 - 1200
730-83	Chapel	300 - 500; or 0.02 - 0.03 tons/seat
740-02	Location Exchange	NO STANDARD
740-20	Temporary Lodging	550 - 750
740-23	Commissary	800 - 900
740-25	Family Service Center	375 - 400
740-40	Bowling Alley	0.8 - 1.4 tons/seat
740-63	Enlisted Men's & Officers Clubs	600 - 650
740-74	Child Care Center	350 - 450
	Classrooms	400 - 500
	Computer Room	50 - 150
	Dispensaries	450 - 550
	Hospital Patient Rooms	450 - 550
	Married Personnel Quarters	900 - 1275
	Recreation Rooms	375 - 450
	Shops (Precision Equipment)	450 - 500

Estimating Electrical Loads for Air Conditioning Systems

It is frequently necessary to estimate the power requirements for air conditioning systems when preparing a MILCON project and in other instances. For years, a rough rule of thumb was to use one (1) kilowatt per ton of cooling for any type system. Use of this rule neglects variation in cooling system efficiencies and the power consumption of auxiliaries such as fans and pumps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Plumbing Fixture Count

Floor Drains (All Sizes)	1/3 Fixture
Roof Drains (All Sizes)	1 Fixture
Floor Sink (All Sizes)	1/3 Fixture
Water Closet	1 Fixture
Lavatories	1 Fixture
Kitchen Sink	1 Fixture
Service Sink	1 Fixture
Bidets	1 Fixture
Electric Water Cooler	1 Fixture
Drinking Fountain	1/2 Fixture
Hand Wash Fountain (180)	3 Fixture
Hand Wash Fountain (360)	4 Fixture
Bathtub	1 Fixture
Water Heater	0 Fixture
Urinal	1 Fixture
Single Shower Fixture	1/2 Fixture
Pre Fab. Shower (incl drain and fix)	1 Fixture
Multi Head Shower (SS)	1 Fixture
Emergency Shower & Eye Wash	1 Fixture
Eye Wash	1/2 Fixture
Emergency Shower	1/2 Fixture
Dishwasher Connection	1/2 Fixture
Washing Machine Connection	1/2 Fixture
Garbage Disposal	1/4 Fixture
Rough-in Piping (HW, CW, Waste)	1/2 Fixture
Mop Sink	1 Fixture

The above table to be used to determine number of fixtures for Standard System Descriptions, Systems 211 and 213 .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX H

ACRONYMS AND ABBREVIATIONS

A	A&E	Architect and Engineer
	ABSLA	Approved Basic Stock Level of Ammunition
	ADCA	Anticipated Date of Contract Award
	AGI	Activity General Information
	AH	Alternate Host
	AICUZ	Air Installations Compatible Use Zones
	AIS	Annual Inspection Summary
	ASD	Assistant Secretary of Defense
B	BAM	Baseline Assessment Memorandum
	BASE REP	Shore Base Readiness Report
	BEAP	Base Exterior Architecture Plan
	BEQ	Bachelor Enlisted Quarters
	BESEP	Base Electronics Systems Engineering Plan
	BFR	Basic Facility Requirements
	BLS	Base Loading System
	BOQ	Bachelor Officer Quarters
C	CAUSE	Computer Assited Utility Systems Evaluation
	CCD	Category Code Directory (data base)
	CCN	Category Code Number
	CIP	Capital Improvements Plan
	CL3-D	Class 3 (Relocatable); planned for disposition (planning action)
	CL3-I	Class 3 (Relocatable); used on interim basis (planning action)
	CL3-U	Class 3 (Relocatable); temporary use (planning action)
	CMC	Commandant, Marine Corps
	CNET	Chief of Naval Education and Training
	CNO	Chief of Naval Operations
	CO	Commanding Officer
	COMNAVFACENGCOM	Commander, Naval Facilities Engineering Command
	CONSTR	New Construction (planning action)
	CONVFR	Convert From (planning action)
	CONVTO	Convert To (planning action)
	CPS	(Final) Consolidated Personnel Summary
	CPV	Current Plant Value
	CY	Cubic Yards (unit of measure)
D	D	Planning Action Designator
	DASN	Deputy Assistant Secretary of the Navy
	DCNO	Deputy Chief of Naval Operations
	DDESB	Department of Defense Explosives Safety Board
	DEMOL	Demolition (planning action)
	DF	Discount Factor
	DISPOS	Disposable Asset (planning action)
	DPS	Decision Package Sets

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

	DRA	Defense Relocation Account (funds)
	DoD	Department of Defense
E	EA	Economic Analysis
	EA	Each (unit of measure)
	EAF	Environmental Adjustment Factor
	ECIP	Energy Conservation Investment Program
	EE	Engineering Evaluation
	EFD	Engineering Field Division
	EMCS	Energy Monitoring and Control Systems
	EOD	Explosives Ordnance Disposal
F	FACSO	Facilities Systems Office (Port Hueneme, CA)
	FEC	Foreign Exchange Cost
	FEP	Facility Energy Plans
	FHS	Family Housing Plans
	FPD	Facility Planning Document
	FRP	Facilities Requirements Plan
	FUR	Facilities Utilization Report
	FYDP	Five Year Defense Program
G	GEMS	Graphics Engineering and Mapping System
H	H/T	Host/Tenant
	HCA	Hazard Control Assessment
	HVAC	Heating, Ventilation, and Air Conditioning
I	IBOP	International Balance of Payments
	ID	Planning Action Identifiers
	IP	Investment Program
J	JFAI	Joint Formal Acceptance Inspection
L	LS	Lump Sum (unit of measure)
M	MACIC	Master Activity General Information and Control
	MBTU	Million British Thermal Units
	MCNR	Military Construction Naval Reserve
	MCON	Military Construction, Navy
	MCP/MIS	Military Construction Programming Management Information System
	MILCON	Military Construction
	MILPERS	Naval Military Personnel Command
	MODIFY	Modification (planning action)
N	NACIP	Navy Assessments and Control of Installation Pollutants
	NADEP *	Naval Aviation Depot
	NAF	Nonappropriated Funded; Nonappropriated Fund
	NAVAIRSYSCOM	Naval Air Systems Command
	NAVCOMPT	Comptroller of the Navy
	NAVFAC	Naval Facilities Engineering Command (for directives and publications)
	NAVFACENGCOM	Naval Facilities Engineering Command
	NAVFACENGCOMHQ	Naval Facilities Engineering Command, Headquarters
	NAVMEDCOM	Naval Medical Command
	NAVOSH	Navy Occupational Safety and Health
	NAVRESSO	Navy Resale and Services Support Office

* Formerly NARF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

	NAVSEASYSCOM	Naval Sea Systems Command
	NAVSUPSYSCOM	Naval Supply Systems Command
	NCR	National Capital Region
	NESSEC	Naval Electronics Systems Security Engineering Center
	NFADB	Navy Facility Assets Data Base
	NFH	Navy Family Housing
	NMCRC	Navy Marine Corps Reserve Centers
	NPV	Net Present Value
	NS	Net Square Feet (unit of measure)
O	O&M,N	Operations & Maintenance, Navy (funds)
	OCR	Occupational Safety and Health Control Report
	OMB	Office of Management and Budget
	OPNAV	Office of the Chief of Naval Operations
	OSD	Office of the Secretary of Defense
	OUTG-C	Outgrant, continue (planning action)
	OUTG R	Outgrant, retrieve (planning action
P	PART FRP	Partial Facilities Requirements Plan
	PCR	Pollution Control Report
	PCS	Permanent Change of Station
	PEA	Preliminary Environmental Assessment
	PED	Project Engineering Documentation
	PHA	Preliminary Hazard Analysis
	PID	Project Identification Document
	POM	Program Objectives Memorandum
	PVA	Present Value Analysis (economic analysis)
	PWC	Public Works Center
R	RAC	Risk Assessment Code
	RCRA	Resource Conservation and Recovery Act
	RDT&E	Research, Development, Test & Evaluation
	REASFR	Reassignment From (planning action)
	REASTO	Reassignment To (planning action)
	RENOV	Renovation (planning action)
	REPLCE	Replace (planning action)
	RETAIN	Retain For Contingency (planning action)
	RETR	Retrieve (planning action identifier)
	RJE	Remote Job Entry
	RL	Requirements List
S	SA	Special Area
	SCF	Supplemental Category Flag
	SECDEF	Secretary of Defense
	SECNAV	Secretary of the Navy
	SF	Square Feet, Gross (unit of measure)
	SFMR	Supply Facility Management Report
	SFPB	Shore Facilities Programming Board
	SFPS	Shore Facilities Planning System
	SH	Stacking Height (unit of measure)
	SIMA	Shore Intermediate Maintenance Activity
	SIOH	Supervision, Inspection, and Overhead

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

	SIR	Savings to Investment Ratio (economic analysis)
	SNDL	Standard Navy Distribution List
	SPP	Sponsor Program Proposal
	SY	Square Yards (unit of measure)
T	TCF	Total Cubic Feet (unit of measure)
	TDY	Temporary Duty
	TOA	Total Obligation Authority
	TPAA	Total Proposed Adequate Assets
U	UIC	Unit Identification Code
	UM	Unit of Measure
	UPH	Unaccompanied Personnel Housing (now called bachelor housing)
	USA	Utility System Assessments
	USE	Continued Use (planning action)
	UTS	Utility Technical Studies
V	VAC	Vacant (planning action identifier)
	VI	Validation Indicator

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PART 3: CONSTRUCTION COST ESTIMATES

		Page
PART 3	CONSTRUCTION COST ESTIMATES	200
Section 17	CONSTRUCTION COST ESTIMATES	201
17.1	General	201
17.1.1	Detailed Cost Estimate Required With Each Submittal	201
17.1.2	Uses of the Cost Estimate	201
17.2	Preliminary (35%) Estimate	201
17.2.1	Preliminary Estimate Based on Materials Take-Off	201
17.2.2	Preliminary Estimate Should Monitor the Estimated Construction Cost	201
17.3	Prefinal Estimate	201
17.3.1	Prefinal Requirements	201
17.3.2	Structure of Estimates and Work Requiring Multiple Estimates	202
17.3.3	CES Estimates	202
17.4	Final Estimate	202
Section 18	SAMPLE CONSTRUCTION COST ESTIMATE	204
18.1	Summary Report - System	204
18.2	Input Report	207
18.3	Backup Report - System Specification	210
18.4	Summary Report - Specification Section	217
18.5	Detailed Backup Report - Specification Section	224
18.6	Input Listing (Sorted)	231

FIGURES

24	Summary Report - System	205
25	Input Report	208
26	Backup Report - System Specification	211
27	Summary Report - Specification Section	218
28	Detailed Backup Report - Specification Section	225
29	Input Listing (Sorted)	232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 17: CONSTRUCTION COST ESTIMATES

17.1 General.

17.1.1 Detailed Cost Estimate Required With Each Submittal. All estimates shall be prepared in the system format whether manually prepared or prepared in the Cost Engineering Systems (CES) format. The estimate detail for each submittal shall be consistent with the level of design required for that submittal. Accurate quantity take-off, inclusion of all elements of construction, and accurate unit prices for the project's geographic location are fundamental to the development of a good cost estimate.

17.1.2 Uses of the Cost Estimate. Properly prepared cost estimates provide a check of plans and specifications for constructability, coordination conflicts, discrepancies, and omissions. They are used by the Government to establish/verify budget cost, develop historical data for future estimating and verification of contract bid prices.

Final Government estimates are to be classified "For Offical Use Only."

17.2 Preliminary (35%) Estimate.

17.2.1 Preliminary Estimate Based on Materials Take-Off. The estimate for this submittal shall reflect cost based on reasonably accurate take-off of materials/systems consistent with the level of design. For those elements of the project where the status of design does not permit a reasonably accurate take-off of quantities or firm pricing of individual items of work, systems unit prices may be used. Lump sum costs are not acceptable. USE OF EMPIRICAL COSTS SHALL BE MINIMIZED.

17.2.2 Preliminary Estimate Should Monitor the Estimated Construction Cost. The 35% estimate may be either in manual (use CES Systems) or CES format. The 35% estimate, through adjustments, should monitor the estimated construction cost until the prefinal estimate is prepared. It is very important that if indications of cost exceeding allotted funds are confirmed, the Project Manager be contacted for instructions.

17.3 Prefinal Estimate.

17.3.1 Prefinal Requirements. The prefinal estimate shall be prepared from complete drawings and specifications. Full and accurate description of each system shall be provided. Quotations must be obtained for all items of substantial quantity or cost. Documentation must be provided for all line items that represent more than one percent of the contract cost or are of such nature that a standard price is not available. Documentation may be in the form of written quotations or may be taken by telephone. In either case the documentation must show company name, person contacted and date of quote. The first data for each system shall be a narrative description followed by applicable sub-system numbers (CES Standard System and Sub-System List).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Instructions for inserting the system descriptions when using the CES micro programs available in the CES Estimates Guide.

17.3.2 Structure of Estimates and Work Requiring Multiple Estimates. Separate estimates will be prepared for each new non-identical building, structure, or addition costing over $50,000 contract cost. Costs of alteration work to existing buildings will not be included with the building addition costs. When one construction contract contains more than one type of work (i.e., new construction, repair, equipment installation), the estimate shall be structured such that each type of work is identified separately.

In addition to an overall or composite summary sheet, each type of work requires a separate summary sheet. Costs from these separate summary sheets must be directly transferable to the composite summary sheet.

17.3.3 CES Estimates. For all projects over $1,000,000, all new buildings or additions over $500,000, a CES estimate is required. The A&E will be required to run the estimate on his own computer equipment using NAVFACENGCOM furnished programs. Hard copies of estimates will be submitted with each submittal. With the 100% estimate, a floppy disk containing the complete estimate will be submitted. To obtain a copy of NAVFACENGCOM's estimating program and price file, the A&E must send 11 blank floppy disks, 5 1/4" double sided double density, to Code 407. These disks will be returned to the A&E with a hard copy of the price file and a User's Guide for micro estimating. The A&E shall be responsible for preparing, loading, printing and checking the estimate prior to prefinal submission. Contact should be made with the Project Manager prior to prefinal submission to reconfirm programmed construction costs for the contract. Where A&E estimate exceeds programmed construction costs, recommendations for cost reduction or proposed bid items should be provided with the prefinal submission.

Minimum computer equipment necessary for running estimates is:

a) Hardware
   1. Microcomputer
   2. 256 K main memory
   3. Standard microcomputer printer
   4. Fixed disk (5 megabytes minimum)
b) Minimum Software Requirements
   1. DOS Version 2.0 (or greater)
c) Workstation (Representative of NAVFACENGCOM Equipment):
   1. Zenith 248 personal computer
   2. 20 megabyte hard disks with 640K main memory
   3. Laser printer

17.4 Final Estimate. Same as prefinal except for correction/inclusion of prefinal comments. When the final estimate varies by more than ±10% of the low bid, A&E review and analysis of the estimate will be required at no additional cost to the Government. This analysis shall compare the complete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

project by specification section tabulating a comparison of the Government estimate and contractor's proposal. Reasons for differences are to be stated. Code 407 is available for a more detailed format.

Examples from a CES estimate are included for illustration in Section 18. The summary sheet and factors sheets are followed by the backup report by systems, summary backup report by specification section, detailed backup report by specification section, and printout of loaded data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 18: SAMPLE CONSTRUCTION COST ESTIMATE

18.1 Summary Report - System. Figure 24 is an example of a CES summary sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT
SYSTEM

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281

PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/88

	COST/ SYS BASED ON 8168.00	SYSTEM UNITS	U/M	COST/SYS UNIT	TOTAL MJ MATL COST	TOTAL MJ LABOR COST	TOTAL MJ EQUIP COST	TOTAL CONTRACT COST
BUILDING SYSTEMS								
111 FOUNDATION	9.39	8020.00	SF	9.56	33560	34138	8996	76694
112 SLAB ON GRADE	7.84	8020.00	SF	7.99	42522	19724	1810	64056
115 STAIRS	1.59	32.00	RI	405.60	9667	3112	201	12979
118 ROOF STRUCTURE	8.96	7673.00	SF	9.54	57164	15505	494	73163
142 EXTERIOR WALLS	11.46	9598.00	SF	9.76	35443	57123	1074	93640
143 INTERIOR WALLS	5.02	5236.00	SF	7.83	14973	25369	658	41000
144 INTERIOR FINISHES	2.39	8168.00	SF	2.39	8919	7772	2809	19501
145 DOORS	4.82	863.00	SF	45.68	32562	6708	134	39404
147 SPECIALITIES	1.23	8168.00	SF	1.23	6671	2734	679	10085
211 PLUMBING - DOMESTIC	1.48	12.00	EA	1009.39	8008	4105	0	12113
223 HEATING AND VENT.	8.04	10144.00	CFM	8.48	38672	27019	0	65690
238 LOADING DOCK,RAMP,CANOPY	1.77	552.00	SF	26.17	8348	5664	436	14448
271 SPRINKLERS	1.06	7636.00		1.13	2772	5883	0	8655
275 FIRE ALARM SYSTEM	0.09	8168.00	SF	0.09	380	361	0	741
311 POWER	1.83	64.85	KW	229.99	8720	6195	0	14915
312 LIGHTING SYSTEM	1.27	8168.00	SF	1.27	5629	4727	0	10357
341 TELEPHONE	0.06	8168.00	SF	0.06	151	336	0	487
SUBTOTAL	68.31				314161	226476	17292	557929
HEAVY CONSTRUCTION								
942 EROSION PROTECTION-MARINE		20.00	SY	264.89	955	4343	0	5298
SUBTOTAL HEAVY CONSTRUCTION					955	4343	0	5298
UTILITIES								
511 ELECTRICAL DISTRIBUTION, PRIMARY		200.00	LF	53.70	4444	3836	2460	10740
513 ELECT SUBSTATION		75.00	KVA	132.00	8450	1011	439	9900
523 COMMUNICATION TELEPHONE		640.00	LF	4.29	1260	1483	0	2743
541 HEAT DISTRIBUTION OVERHEAD		190.00	LF	121.42	15554	7072	443	23069
551 WATER DISTRIBUTION		170.00	LF	52.19	4840	2798	1235	8873
554 SANITARY SEWERS		85.00	LF	18.57	596	729	253	1578
SUBTOTAL UTILITIES					35143	16929	4830	56903
SITE PREPARATION & IMPROVEMENTS								
741 CONCRETE WALKS		556.00	SY	17.29	6844	1698	1071	9611
811 EARTHWORK		333.00	CY	4.00	0	789	542	1331
813 TOPSOIL/SEED/SOD		1672.00	SY	2.45	406	3055	643	4104
814 LANDSCAPING		43.00	SY	54.82	922	1435	0	2357

Figure 24
Summary Report - System

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT M62470-83-B-3281
SYSTEM

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 2

	COST/ SYS BASED ON 8168.00	SYSTEM UNITS	U/M	COST/SYS UNIT	TOTAL MJ MATL COST	TOTAL MJ LABOR COST	TOTAL MJ EQUIP COST	TOTAL CONTRACT COST
842 REMOVE PAVING AND SLABS		1.00	LS	1621.17	168	827	628	1621
SUBTOTAL SITE PREPARATION & IMPROVEMENTS					8338	7801	2885	19025
TOTAL SUPPORT COSTS(UTIL & SITE PREP)					43482	24730	7715	75927
BASE BID								
ITEM A					358598	255549	25007	639154
TOTAL CONTRACT COST.....BASE BID					358598	255549	25007	639154
ADDITIVE								
011 ADDITIVE ITEM		1.00	LS	34539.27	22448	10005	2088	34539
TOTAL ESTIMATE CONTRACT					381048	265554	27093	673693

Figure 24 (Continued)
Summary Report - System

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.2 Input Report. Figure 25 is an example of mark-up factors and modifier factors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INPUT REPORT
MARK-UP

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/86

PRIME MARK-UP

SPECIFICATION SECTIONS
MARKED UP FOR PRIME

03XXX 06XXX
08XXX

TAX ON MATERIAL	4.0%		
TAX & INSURANCE ON LABOR	18.0%		
TAX ON EQUIPMENT	4.0%		
PRIME OVERHEAD	MAT'L	LABOR	EQUIP
	12%	12%	12%
PRIME PROFIT	MAT'L	LABOR	EQUIP
	10%	10%	10%
BOND	1.00%		
MISC. TAXES	0%		
ESCALATION	0%		
BUDGET	0.00%		
MATERIAL COMPOSITE MARK-UP	1.294		
LABOR COMPOSITE MARK-UP	1.468		
EQUIPMENT COMPOSITE MARK-UP	1.294		

SUB MARK-UP A

SPECIFICATION SECTIONS
MARKED UP FOR SUB

XXXXX

TAX ON MATERIAL	4.0%		
TAX & INSURANCE ON LABOR	18.0%		
TAX ON EQUIPMENT	4.0%		
SUB OVERHEAD	MAT'L	LABOR	EQUIP
	12%	12%	12%
SUB PROFIT	MAT'L	LABOR	EQUIP
	10%	10%	10%
PRIME OVERHEAD	MAT'L	LABOR	EQUIP
	5%	5%	5%
PRIME PROFIT	MAT'L	LABOR	EQUIP
	5%	5%	5%
BOND	1.00%		
MISC. TAXES	0%		
ESCALATION	0%		
BUDGET	0.00%		
MATERIAL COMPOSITE MARK-UP	1.427		
LABOR COMPOSITE MARK-UP	1.619		
EQUIPMENT COMPOSITE MARK-UP	1.427		

Figure 25
Input Report

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INPUT REPORT
MODIFIER

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281

PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/86

SPEC	ACT SYS	MATL	LABOR	EQUIP
02XXX		1.000	1.720	1.000
04XXX		1.000	1.200	1.000
07XXX		1.000	1.100	1.000
02680		1.000	1.200	1.000
XXXXX		1.000	1.000	1.000
16XXX		1.050	1.050	1.050

Figure 25 (Continued)
Input Report

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.3 Backup Report - System Specification. Figure 26 is a random example of the backup report by systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT
SYSTEM-SPEC

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/86

	QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
000 BLDG CONSTRUCTION								
SYSDC1 1-STORY CONC MASONRY UNIT STRUC SPREAD FOOTGSW/REINF								
SYSDC2 CONC FLOOR SLAB ON FILL,STL BAR JOISTS AND METALDECK ROOF								
SYSDC3 CONST W/ BALLAST SGL PLYMEMBR ROOF OVER RIGID INSUL								
SYSDC4 PLUMBING,HEATING, VENTILATION AND ELECT WORK								
SUBTOTAL-SUBSPEC SECTION 01000				0		0		0
SUBTOTAL-SPEC SECTION 01000				0		0		0
CONTRACT COST			1.427	0	1.619	0	1.427	0
TOTAL FOR SPEC SECTION 01000								0
SUBTOTAL-SYSTEM 000				0		0		0
CONTRACT COST				0		0		0
TOTAL FOR SYSTEM 000								0
011 ADDITIVE ITEM								
02050 DEMOLITION AND REMOVAL -								
02052 PAVEMENT								
BCAL REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL	37.00	SY	0.00	0	0.52	19	1.05	39
BCAL REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL	1.11	SY	0.00	0	0.52	1	1.05	1
SUBTOTAL-SUBSPEC SECTION 02052				0		20		40
02053 SITE UTILITIES								
BCBF REMOVAL OF PLAIN CONC CURB AND 2FT GUTTER	87.00	LF	0.58	50	1.38	120	0.67	58
BCEB REMOVE AND RESET FIRE HYDRANT	1.00	EA	0.00	0	427.13	427	154.69	155
SUBTOTAL-SUBSPEC SECTION 02053				50		547		213
SUBTOTAL-SPEC SECTION 02050				50		567		253
CONTRACT COST			1.427	72	1.619	917	1.427	381
TOTAL FOR SPEC SECTION 02050								1350
02200 EARTHWORK-								
02221 UTILITIES TRENCH AND BACKFILL								
BIFAP TRENCH EXCAV, BACKFILL, & COMPACTION BY UTILITY TRACTOR W/ 2'	3.33	CY	0.00	0	1.67	6	2.72	9

Figure 26
Backup Report - System Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-B-3281 PRINTING DATE: 09/10/87 14
SYSTEM-SPEC DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 13

	QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
116 ROOF STRUCTURE								
ISUDCU SCUPPER COPPER 16 OZ								
12" X 12"	3.00	EA	117.19*	352	16.88	51	0.00	0
SUBTOTAL-SUBSPEC SECTION 07600				1162		270		0
SUBTOTAL-SPEC SECTION 07800				1162		270		0
CONTRACT COST			1.427	1659	1.619	438	1.427	0
TOTAL FOR SPEC SECTION 07600								2097
07800 SKYLIGHTS								
07800 SKYLIGHTS								
IUSG-D SKYLIGHT PLASTIC DOME								
DSL GLAZED	107.00	SF	20.50	2193	1.39	148	0.00	0
SUBTOTAL-SUBSPEC SECTION 07800				2193		148		0
SUBTOTAL-SPEC SECTION 07800				2193		148		0
CONTRACT COST			1.427	3130	1.619	240	1.427	0
TOTAL FOR SPEC SECTION 07800								3370
07920 SEALANTS								
07920 SEALANTS								
IWFSE CALK EXT CLS B TYPE II								
TT-S-227 TWO COMPONENT								
1/4X1/2	380.00	LF	0.21	80	0.32	121	0.00	0
SUBTOTAL-SUBSPEC SECTION 07920				80		121		0
SUBTOTAL-SPEC SECTION 07920				80		121		0
CONTRACT COST			1.427	114	1.619	196	1.427	0
TOTAL FOR SPEC SECTION 07920								310
SUBTOTAL-SYSTEM 116				40091		9526		354
CONTRACT COST				57164		15505		494
TOTAL FOR SYSTEM 116								73163
142 EXTERIOR WALLS								
SYSDC1 12" CMU REINF CONC FILLED 25 AFF								
SYSDC2 CEMENT BASE WATERPROOF TEXTURE FINISH								
SYSDCS 02								
03300 CAST-IN-PLACE CONCRETE -								
03250 ACCESORIES								
EXE CAST-IN-PLACE SPLASH								
BLOCK 2'X3'	3.00	EA	26.00*	78	10.00*	30	0.00	0
SUBTOTAL-SUBSPEC SECTION 03250				78		30		0
03300 CAST-IN-PLACE CONCRETE -								
EHTT RUBBER CONTROL JOINT	419.00	LF	1.25*	524	0.20*	84	0.00*	0

Figure 26 (Continued)
Backup Report - System Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-8-3281
SYSTEM-SPEC

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 14

		QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
142 EXTERIOR WALLS									
EXTS	PRECAST CONCRETE LINTEL 12" X 8"	19.00	LF	7.50*	142	2.00*	38	0.00*	0
EXTU	PRECAST CONCRETE LINTEL 12" X 16"	38.00	LF	20.00*	760	4.00*	152	0.00*	0
	SUBTOTAL-SUBSPEC SECTION 03300				1426		274		0
04202 REINFORCING FOR MASONRY WALLS									
EFIE	REBAR #5-#6 MASONRY WALL VERT	5.79	TN	520.00	3011	397.29	2300	0.00	0
	SUBTOTAL-SUBSPEC SECTION 04202				3011		2300		0
	SUBTOTAL-SPEC SECTION 03300				4515		2604		0
	CONTRACT COST			1.294	5842	1.468	3823	1.294	0
	TOTAL FOR SPEC SECTION 03300								9665
04200 UNIT MASONRY									
04200 UNIT MASONRY									
FAFK	MORTAR FILLED CMU CELLS 4" WIDE TYPE S	919.00	SF	0.14	129	0.32	298	0.03	28
FAGO	MORTAR FILLED INDIVIDUAL CMU CELLS 12" WIDE TYPE S	3504.00	VLF	0.82	2873	0.48	1682	0.05	175
FCDE	REINF-TRUSS TYPE HEAVY - PLAIN 12" WIDE	6966.00	LF	0.12	836	0.08	585	0.00	0
FFAN	BOND BEAM 12TK 8HGT W/O GROUT OR REINF	1869.00	LF	1.19	2224	2.11	3947	0.03	56
FFJF	CMU HOLLOW 4" RGLR WT LOAD BEARING	919.00	SF	0.81	744	2.15	1974	0.03	28
FFJN	CMU HOLLOW 12" RGLR WT LOAD BEARING	7769.00	SF	1.72	13363	3.10	24053	0.06	466
	SUBTOTAL-SUBSPEC SECTION 04200				20169		32539		753
	SUBTOTAL-SPEC SECTION 04200				20169		32539		753
	CONTRACT COST			1.427	28781	1.619	52681	1.427	1074
	TOTAL FOR SPEC SECTION 04200								82538
09500 ACOUSTICAL TREATMENT									
09500 ACOUSTICAL TREATMENT									
KBATE	TEXTURE COATING EXTERIOR WALLS AND SOFFITS	9568.00	SF	0.06	574	0.04	383	0.00	0
	SUBTOTAL-SUBSPEC SECTION 09500				574		383		0
	SUBTOTAL-SPEC SECTION 09500				574		383		0
	CONTRACT COST			1.427	819	1.619	620	1.427	0
	TOTAL FOR SPEC SECTION 09500								1439
	SUBTOTAL-SYSTEM 142				25258		35526		753
	CONTRACT COST				35443		57123		1074
	TOTAL FOR SYSTEM 142								93640

Figure 26 (Continued)
Backup Report - System Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-B-3281
SYSTEM-SPEC

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 23

		QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
147 SPECIALITIES									
10800 TOILET AND BATH ACCESSORIES									
10800 TOILET AND BATH ACCESSORIES									
LXHMDA	MIRROR 1/4" PLATE GLASS								
	OVER 5 SF	11.13	SF	5.04	56	2.08	23	0.34	4
LXIT	MIRROR 18X32 W/S.S.								
	FRAME	1.00	EA	62.72	63	8.32	8	1.40	1
LXKSJ	TOWEL DISPENSER S.S.								
	SURFACE MOUNTED	2.00	EA	25.44	51	7.04	14	1.17	2
LXSSD	SOAP DISP STAINLESS ST								
	WALL MTD	2.00	EA	36.65	73	9.60	19	1.61	3
LXVSD	TOILET TISSUE DISP S.S.								
	SINGLE ROLL WALL MTD	2.00	EA	23.00	46	3.52	7	0.58	1
LXYSD	WASTE RECEPTACLE								
	STAINLESS ST WALL MTD	2.00	EA	108.15	215	14.40	29	2.33	5
	SUBTOTAL-SUBSPEC SECTION 10800				505		101		17
	SUBTOTAL-SPEC SECTION 10800				505		101		17
	CONTRACT COST		1.427		721	1.619	163	1.427	24
	TOTAL FOR SPEC SECTION 10800								908
11162 FIXED TYPE INDUSTRIAL DOCKBOARD									
11162 FIXED TYPE INDUSTRIAL DOCKBOARD									
MVESRR	DOCK LEVELER 6X8 10 TON								
	CAP. TYPE 1	1.00	EA	2835.00	2835	174.72	175	2.62	3
MVLRME	LAMINATED RUBBER BUMPERS								
	6" TK 10"X36"	3.00	EA	63.00	189	9.84	30	1.51	5
	SUBTOTAL-SUBSPEC SECTION 11162				3024		204		7
	SUBTOTAL-SPEC SECTION 11162				3024		204		7
	CONTRACT COST		1.427		4315	1.619	331	1.427	11
	TOTAL FOR SPEC SECTION 11162								4657
	SUBTOTAL-SYSTEM 147				4675		1689		478
	CONTRACT COST				6672		2734		679
	TOTAL FOR SYSTEM 147								10085

211 PLUMBING - DOMESTIC

SYSDC1 LAV COUNTERTOP URINAL WALL HUNG PRESS RED STA 20 GA ELEC WATER HEATER
SYSDC2 ELEC WATER COOLER DELUGE SHWR AND EYEWASH CI PIPE
SYSDC3 OFFICE TO 68 DEG WHSE TO 50 DEG
SYSDCS 04, 05, 27

15400 PLUMBING									
15060 PIPING									
QA861A	BACKFLOW PREVENTOR COMP.								
	ASSEMBLE QUOTE VIERK								
	SUPPLY CO	1.00	EA	550.00*	550	64.00*	64	0.00*	0

Figure 26 (Continued)
Backup Report - System Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT N62470-83-B-3281
SYSTEM-SPEC

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 32

	QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
275 FIRE ALARM SYSTEM								
SUBTOTAL-SUBSPEC SECTION 16110				109		118		0
16120 CONDUCTORS								
WGAA 14 THHN-THWN SOLID CU	600.00	LF	0.03	19	0.12	69	0.00	0
SUBTOTAL-SUBSPEC SECTION 16120				19		69		0
16130 OUTLET BOXES								
WPHC 6X6X4 JUNC BOX GALV S COV	1.00	EA	3.23	3	5.58	6	0.00	0
SUBTOTAL-SUBSPEC SECTION 16130				3		6		0
SUBTOTAL-SPEC SECTION 16402				131		192		0
CONTRACT COST			1.427	187	1.619	312	1.427	0
TOTAL FOR SPEC SECTION 16402								499
16721 EXTERIOR FIRE ALARM SYSTEM								
16721 EXTERIOR FIRE ALARM SYSTEM								
ZS1A FIRE ALARM PULL STATION WATERPROOF	1.00	EA	78.75	79	6.90	7	0.00	0
SUBTOTAL-SUBSPEC SECTION 16721				79		7		0
16722 INTERIOR FIRE ALARM SYSTEM								
ZSY FA TELEPHONE INTERFACE TERMINAL BOARD & CABINET	1.00	EA	52.50*	52	12.86*	13	0.00*	0
SUBTOTAL-SUBSPEC SECTION 16722				52		13		0
SUBTOTAL-SPEC SECTION 16721				131		20		0
CONTRACT COST			1.427	187	1.619	32	1.427	0
TOTAL FOR SPEC SECTION 16721								219
16722 INTERIOR FIRE ALARM SYSTEM								
16722 INTERIOR FIRE ALARM SYSTEM								
ZSQ CO2 PRESSURE SWITCH CONNECTION	1.00	EA	3.67	4	11.01	11	0.00	0
SUBTOTAL-SUBSPEC SECTION 16722				4		11		0
SUBTOTAL-SPEC SECTION 16722				4		11		0
CONTRACT COST			1.427	5	1.619	18	1.427	0
TOTAL FOR SPEC SECTION 16722								23
SUBTOTAL-SYSTEM 275				265		223		0
CONTRACT COST				320		361		0
TOTAL FOR SYSTEM 275								741

++++++

BACKUP REPORT N62470-83-B-3281
SYSTEM-SPEC

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 35

		QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
311 POWER									
XXG23A	3 POLE 15-60 AMP 240V 10K AIC CIRCUIT BREAKER BOLT-IN	3.00	EA	50.65	152	10.85	33	0.00	0
XXG43B	3 POLE 70-100 AMP 480V 14K AIC CIRCUIT BREAKER	1.00	EA	271.66	272	16.15	16	0.00	0
	SUBTOTAL-SUBSPEC SECTION 16180				1357		344		0
16850	HEATING AND COOLING								
XHCT	ELECTRIC HTR CONNECTION	1.00	EA	4.20	4	11.01	11	0.00	0
XHCW	CONNECT WATER HEATER	1.00	EA	4.20	4	11.01	11	0.00	0
	SUBTOTAL-SUBSPEC SECTION 16850				8		22		0
	SUBTOTAL-SPEC SECTION 16402				5954		3722		0
	CONTRACT COST			1.427	8510	1.619	6026	1.427	0
	TOTAL FOR SPEC SECTION 16402								14536
16852	ELECTRIC SPACE HEATING EQUIPMENT								
16852	ELECTRIC SPACE HEATING EQUIPMENT								
ZXTA	THERMOSTAT-LINE VOLTAGE	7.00	EA	21.00	147	14.90	104	0.00	0
	SUBTOTAL-SUBSPEC SECTION 16852				147		104		0
	SUBTOTAL-SPEC SECTION 16852				147		104		0
	CONTRACT COST			1.427	210	1.619	169	1.427	0
	TOTAL FOR SPEC SECTION 16852								379
	SUBTOTAL-SYSTEM 311				6111		3525		0
	CONTRACT COST				8720		6195		0
	TOTAL FOR SYSTEM 311								14915
312	LIGHTING SYSTEM								
	SYSDC1 SWITCHES AND RECEPTABLE 18W LPS WALL MTD BEJAMINOLW FLOUR LAMP								
	SYSDCS 04								
16402	INTERIOR WIRING SYSTEM -								
16110	CONDUIT								
VB#B	1/2" EMT WITH COUPLING CONNECTOR STRAPS AND FASTENERS	420.00	LF	0.21	88	0.89	375	0.00	0
VEB	1/2 GRS CONDUIT	1510.00	LF	0.55	824	0.59	838	0.00	0
VEMA	1/2" 1H STRAP STAMP RC	200.00	EA	0.09	19	0.59	118	0.00	0
	SUBTOTAL-SUBSPEC SECTION 16110				932		1330		0
16120	CONDUCTORS								
WGBA	12 THHN-THWN SOLID CU	7720.00	LF	0.04	324	0.13	973	0.00	0
	SUBTOTAL-SUBSPEC SECTION 16120				324		973		0

Figure 26 (Continued)
Backup Report - System Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.4 Summary Report - Specification Section. Figure 27 is an example of the summary backup report by specific section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT:
SPEC SECTION

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-B-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/86

	MATERIAL		LABOR		EQUIPMENT		
	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SPEC SECT
02050 DEMOLITION AND REMOVAL -							
02052 PAVEMENT	62		226		188		
02053 SITE UTILITIES	178		1170		427		
SUBTOTAL SPEC SECTION 02050		239		1397		615	2251
02200 EARTHWORK-							
02202 CLEAR AND GRUB	0		296		376		
02210 SITE GRADING	0		3343		804		
02214 BORROW	4593		3155		4888		
02221 UTILITIES TRENCH AND BACKFILL	0		196		282		
02222 STRUCTURE EXCAVATION	0		3843		0		
SUBTOTAL SPEC SECTION 02200		4593		10833		6350	21776
02250 SOIL TREAT. FOR SUBTER. TERMITE CON							
02250 SOIL TREAT. FOR SUBTER. TERMITE CON	229		2457		801		
SUBTOTAL SPEC SECTION 02250		229		2457		801	3487
02270 SLOPE PROTECTION AND EROSION CONTRL							
02270 SLOPE PROTECTION AND EROSION CONTRL	955		4343		0		
SUBTOTAL SPEC SECTION 02270		955		4343		0	5298
02485 TURF							
02485 TURF	406		512		406		
SUBTOTAL SPEC SECTION 02485		406		512		406	1323
02490 TREES, PLANTS AND GROUND COVER							
02490 TREES, PLANTS AND GROUND COVER	922		1435		0		
SUBTOTAL SPEC SECTION 02490		922		1435		0	2357
02672 BITUMINOUS PRIME COAT							
02672 BITUMINOUS PRIME COAT	384		52		66		
SUBTOTAL SPEC SECTION 02672		384		52		66	502
02680 BITUMINOUS CONCRETE PAVEMENT(VA,NC)							
02680 BITUMINOUS CONCRETE PAVEMENT(VA,NC)	4594		709		652		
SUBTOTAL SPEC SECTION 02680		4594		709		652	5955
02686 GRADED AGGREGATE BSE CRS 4 FLEX PAV							
02686 GRADED AGGREGATE BSE CRS 4 FLEX PAV	3086		310		643		
SUBTOTAL SPEC SECTION 02686		3086		310		643	4039
02695 EXTERIOR STEAM DISTRIBUTION							
02694 PIPING (UNDERGROUND)	3660		1836		117		
02695 EXTERIOR STEAM DISTRIBUTION	3941		174		0		
SUBTOTAL SPEC SECTION 02695		7602		2010		117	9728

Figure 27
Summary Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 2

	MATERIAL		LABOR		EQUIPMENT		
	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SPEC SECT
02697 EXT PUMPED CONDENSATE RETURN SYS							
02697 EXT PUMPED CONDENSATE RETURN SYS	2028		969		60		
SUBTOTAL SPEC SECTION 02697		2028		969		60	3057
02713 EXT WATER DISTRIBUTION SYSTEM							
02710 PIPE, WATER DISTRIBUTION	3346		1683		761		
02711 STRUCTURES	5543		5798		1748		
02713 EXT WATER DISTRIBUTION SYSTEM	115		111		27		
SUBTOTAL SPEC SECTION 02713		9004		7592		2536	19133
02722 EXTERIOR SANITARY SEWER SYSTEM							
02723 PIPE	582		616		100		
SUBTOTAL SPEC SECTION 02722		582		616		100	1298
SUBTOTAL SPEC DIVISION 02		34625		33233		12346	80204
03300 CAST-IN-PLACE CONCRETE -							
03100 FORMWORK	8969		13473		377		
03200 REINFORCING	9373		5337		0		
03250 ACCESORIES	657		599		0		
03251 CURB, CURB & GUTTER, & VALLEY GUTTR	1381		1673		0		
03252 SIDEWALKS	54		40		0		
03300 CAST-IN-PLACE CONCRETE -	2848		547		0		
03301 CONCRETE PLACEMENT	43367		15513		3650		
04202 REINFORCING FOR MASONRY WALLS	9132		6783		0		
SUBTOTAL SPEC SECTION 03300		75782		43964		4028	123774
SUBTOTAL SPEC DIVISION 03		75782		43964		4028	123774
04200 UNIT MASONRY							
04200 UNIT MASONRY	46294		87182		1700		
SUBTOTAL SPEC SECTION 04200		46294		87182		1700	135176
04520 MASONRY RESTORATION							
04520 MASONRY RESTORATION	883		1603		2443		
SUBTOTAL SPEC SECTION 04520		883		1603		2443	4930
SUBTOTAL SPEC DIVISION 04		47177		88785		4144	140108
05120 STRUCTURAL STEEL							
05120 STRUCTURAL STEEL	9265		4252		0		
SUBTOTAL SPEC SECTION 05120		9265		4252		0	13517
05210 STEEL JOISTS							
05210 STEEL JOISTS	10106		2539		7		
SUBTOTAL SPEC SECTION 05210		10106		2539		7	12651
05311 STEEL ROOF DECKING							
05311 STEEL ROOF DECKING	7993		1615		0		
SUBTOTAL SPEC SECTION 05311		7993		1615		0	9608

Figure 27 (Continued)
Summary Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 3

	MATERIAL		LABOR		EQUIPMENT		
	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SPEC SECT
05400 COLD-FORMED METAL FRAMING							
05400 COLD-FORMED METAL FRAMING	125		177		3		
SUBTOTAL SPEC SECTION 05400		125		177		3	305
05500 METAL FABRICATIONS							
05500 METAL FABRICATIONS	21288		4802		451		
SUBTOTAL SPEC SECTION 05500		21288		4802		451	26539
SUBTOTAL SPEC DIVISION 05		48775		13384		461	62620
06100 ROUGH CARPENTRY							
06100 ROUGH CARPENTRY	451		791		110		
SUBTOTAL SPEC SECTION 06100		451		791		110	1352
SUBTOTAL SPEC DIVISION 06		451		791		110	1352
07160 BITUMINOUS DAMPPROOFING							
07160 BITUMINOUS DAMPPROOFING	442		661		0		
SUBTOTAL SPEC SECTION 07160		442		661		0	1103
07220 ROOF INSULATION							
07220 ROOF INSULATION	15672		2538		0		
SUBTOTAL SPEC SECTION 07220		15672		2538		0	18210
07230 PERIMETER & UNDER-SLAB INSULATION							
07230 PERIMETER & UNDER-SLAB INSULATION	1295		859		0		
SUBTOTAL SPEC SECTION 07230		1295		859		0	2154
07530 ELASTROMERIC SHT ROOFING SYS(EPDM)							
07530 ELASTROMERIC SHT ROOFING SYS(EPDM)	11140		2516		106		
SUBTOTAL SPEC SECTION 07530		11140		2516		106	13762
07600 FLASHING AND SHEET METAL							
07600 FLASHING AND SHEET METAL	1659		438		0		
SUBTOTAL SPEC SECTION 07600		1659		438		0	2097
07800 SKYLIGHTS							
07800 SKYLIGHTS	3130		240		0		
SUBTOTAL SPEC SECTION 07800		3130		240		0	3370
07920 SEALANTS							
07920 SEALANTS	827		2681		0		
SUBTOTAL SPEC SECTION 07920		827		2681		0	3508
SUBTOTAL SPEC DIVISION 07		34165		9932		106	44204
08110 HOLLOW METAL DOORS AND FRAMES							
08110 HOLLOW METAL DOORS AND FRAMES	3935		718		0		
SUBTOTAL SPEC SECTION 08110		3935		718		0	4653
08331 OVERHEAD COILING DOORS							
08331 OVERHEAD COILING DOORS	17151		2202		0		
SUBTOTAL SPEC SECTION 08331		17151		2202		0	19353

Figure 27 (Continued)
Summary Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 4

	MATERIAL		LABOR		EQUIPMENT		
	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SPEC SECT
08529 ALUMINUM STORM WINDOWS							
08529 ALUMINUM STORM WINDOWS	2148		176		0		
SUBTOTAL SPEC SECTION 08529		2148		176		0	2324
08710 FINISH HARDWARE							
08710 FINISH HARDWARE	5074		816		0		
SUBTOTAL SPEC SECTION 08710		5074		816		0	5890
08730 WEATHERSTRIPPING							
08730 WEATHERSTRIPPING	109		1185		129		
SUBTOTAL SPEC SECTION 08730		109		1185		129	1423
SUBTOTAL SPEC DIVISION 08		28416		5098		129	33843
09250 GYPSUM WALLBOARD							
09250 GYPSUM WALLBOARD	85		150		3		
SUBTOTAL SPEC SECTION 09250		85		150		3	238
09500 ACOUSTICAL TREATMENT							
09500 ACOUSTICAL TREATMENT	1530		1099		72		
SUBTOTAL SPEC SECTION 09500		1530		1099		72	2701
09910 PAINTING OF BUILDING (FIELD PNTNG)							
09910 PAINTING OF BUILDING (FIELD PNTNG)	4758		4704		1555		
SUBTOTAL SPEC SECTION 09910		4758		4704		1555	11016
SUBTOTAL SPEC DIVISION 09		6372		5952		1630	13955
10201 METAL (WALL) (AND) (DOOR) LOUVERS							
10201 METAL (WALL) (AND) (DOOR) LOUVERS	256		29		4		
SUBTOTAL SPEC SECTION 10201		256		29		4	289
10400 BULTN BRDS, DIR,CRD HLDRS,SGNS, LET							
10400 BULTN BRDS, DIR,CRD HLDRS,SGNS, LET	45		27		4		
SUBTOTAL SPEC SECTION 10400		45		27		4	76
10500 LOCKERS							
10500 LOCKERS	1845		203		30		
SUBTOTAL SPEC SECTION 10500		1845		203		30	2078
10800 TOILET AND BATH ACCESSORIES							
10800 TOILET AND BATH ACCESSORIES	721		163		24		
SUBTOTAL SPEC SECTION 10800		721		163		24	908
SUBTOTAL SPEC DIVISION 10		2867		422		62	3351
11162 FIXED TYPE INDUSTRIAL DOCKBOARD							
11162 FIXED TYPE INDUSTRIAL DOCKBOARD	9696		885		53		
SUBTOTAL SPEC SECTION 11162		9696		885		53	10635
SUBTOTAL SPEC DIVISION 11		9696		885		53	10635
12331 PREFABRICATED VANITIES							
12331 PREFABRICATED VANITIES							

Figure 27 (Continued)
Summary Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 5

	MATERIAL		LABOR		EQUIPMENT		
	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SPEC SECT
	250		129		2		
SUBTOTAL SPEC SECTION 12331		250		129		2	381
SUBTOTAL SPEC DIVISION 12		250		129		2	381
13947 ENERGY MONITORING AND CONTROL SYS							
13947 ENERGY MONITORING AND CONTROL SYS	4977		3838		0		
SUBTOTAL SPEC SECTION 13947		4977		3838		0	8815
SUBTOTAL SPEC DIVISION 13		4977		3838		0	8815
15250 INSULATION							
15250 INSULATION	776		1486		0		
SUBTOTAL SPEC SECTION 15250		776		1486		0	2263
15330 FIRE EXTING. SPRNKLR SYS (WET PIPE)							
15330 FIRE EXTING. SPRNKLR SYS (WET PIPE)	2772		5883		0		
SUBTOTAL SPEC SECTION 15330		2772		5883		0	8655
15400 PLUMBING							
15060 PIPING	7182		8038		0		
15440 FIXTURES AND EQUIPMENT	5120		1339		0		
SUBTOTAL SPEC SECTION 15400		12302		9377		0	21679
15801							
15060 PIPING	7159		4629		0		
15850 HVAC EQUIPMENT	16811		3184		0		
15880 AIR SUPPLY, SHEET METAL	6327		10140		0		
15971 CONTROLS	454		82		0		
SUBTOTAL SPEC SECTION 15801		30751		18035		0	48785
15971 CONTROLS							
15971 CONTROLS	602		0		0		
SUBTOTAL SPEC SECTION 15971		602		0		0	602
SUBTOTAL SPEC DIVISION 15		47202		34781		0	81983
16301 UNDERGROUND ELECTRIC WORK							
16110 CONDUIT	230		805		0		
16120 CONDUCTORS	515		0		0		
16411 DUCT BANK	289		199		43		
SUBTOTAL SPEC SECTION 16301		1034		1004		43	2082
16302 OVERHEAD ELECTRIC WORK							
16570 POLE LINE WORK	2729		2873		3539		
SUBTOTAL SPEC SECTION 16302		2729		2873		3539	9140
16402 INTERIOR WIRING SYSTEM -							
16110 CONDUIT	6576		9773		0		
16120 CONDUCTORS	3353		5259		0		

Figure 27 (Continued)
Summary Report - Specification Section

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUMMARY REPORT: N62470-83-8-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 8

	MATERIAL		LABOR		EQUIPMENT		
	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SUB SPEC SECT	SPEC SECT	SPEC SECT
16130 OUTLET BOXES	42		28		0		
16134 PANELBOARDS	1784		440		0		
16140 SWITCHES RECEPTACLES	2069		496		0		
16150 MOTORS	58		314		0		
16160 STARTERS	275		78		0		
16180 OVERCURRENT PROTECTION DEVICE	1951		557		0		
16402 INTERIOR WIRING SYSTEM -	56		81		0		
16850 HEATING AND COOLING	12		36		0		
SUBTOTAL SPEC SECTION 16402		16176		17061		0	33237
16462 PAD MOUNTED TRANSFORMERS							
16462 PAD MOUNTED TRANSFORMERS	8450		1011		439		
SUBTOTAL SPEC SECTION 16462		8450		1011		439	9900
16510 INTERIOR LIGHTING							
16510 INTERIOR LIGHTING	11437		2100		0		
SUBTOTAL SPEC SECTION 16510		11437		2100		0	13537
16700 COMMUNICATIONS							
16120 CONDUCTORS	61		94		0		
SUBTOTAL SPEC SECTION 16700		61		94		0	154
16721 EXTERIOR FIRE ALARM SYSTEM							
16721 EXTERIOR FIRE ALARM SYSTEM	112		11		0		
16722 INTERIOR FIRE ALARM SYSTEM	75		21		0		
SUBTOTAL SPEC SECTION 16721		187		32		0	219
16722 INTERIOR FIRE ALARM SYSTEM							
16722 INTERIOR FIRE ALARM SYSTEM	5		18		0		
SUBTOTAL SPEC SECTION 16722		5		18		0	23
16852 ELECTRIC SPACE HEATING EQUIPMENT							
16852 ELECTRIC SPACE HEATING EQUIPMENT	210		169		0		
SUBTOTAL SPEC SECTION 16852		210		169		0	379
SUBTOTAL SPEC DIVISION 16		40289		24361		4021	68671
TOTAL		381046		265554		27093	673693

Figure 27 (Continued)
Summary Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.5 Detailed Backup Report - Specification Section. Figure 28 is a random example of a detailed backup report by specification section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT:
SPEC SECTION

PRINTING DATE : 09/10/87 14
DATA BASE USED : 09/11/85 01
PAGE NUMBER : 1
DATA SET NAME : E1833281

ENGINEERING ESTIMATE
N62470-83-8-3281
PROJECT :HAZARDOUS/FLAMMABLE STORAGE BUILDING CAT CODE: 441-30
LOCATION :N.A.S. OCEANA, VA.BEACH, VIRGINIA UIC: N60191
ESTIMATORS: CEK FA FRI NEP P-NO.: P-734
PROJECT SIZE: 8168.00 SF
DATE OF ESTIMATE: 09/10/87
BID DATE: 05/22/86

		QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
02050	DEMOLITION AND REMOVAL -								
02052	PAVEMENT								
BCAA	REMOVAL OF BITUMINOUS PAVING UP TO 3 INCHES WITH DISPOSAL	92.00	SY	0.46	42	1.07	98	0.55	51
BCAB	REMOVAL OF BITUMINOUS PAVING FOR PIPE TRENCH	1.11	SY	0.93	1	2.15	2	1.10	1
BCAL	REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL	38.00	SY	0.00	0	0.52	20	1.05	40
BCAL	REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL	37.00	SY	0.00	0	0.52	19	1.05	39
BCAL	REMOVAL OF CONC SIDEWALK 4" THICK W/DISPOSAL	1.11	SY	0.00	0	0.52	1	1.05	1
	SUBTOTAL-SUBSPEC SECTION 02052				43		140		132
02053	SITE UTILITIES								
BCBA	REMOVAL OF PLAIN CONC CURBS	80.00	LF	0.25	20	0.60	48	0.30	24
BCBF	REMOVAL OF PLAIN CONC CURB AND 2FT GUTTER	93.00	LF	0.58	54	1.38	128	0.67	62
BCBF	REMOVAL OF PLAIN CONC CURB AND 2FT GUTTER	87.00	LF	0.58	50	1.38	120	0.67	58
BCEB	REMOVE AND RESET FIRE HYDRANT	1.00	EA	0.00	0	427.13	427	154.69	155
	SUBTOTAL-SUBSPEC SECTION 02053				124		723		299
	SUBTOTAL-SPEC SECTION 02050				168		863		431
	CONTRACT COST	1.427			239	1.619	1397	1.427	615
	TOTAL FOR SPEC SECTION 02050								2251
02200	EARTHWORK-								
02202	CLEAR AND GRUB								
BFBB	CLEAR AND GRUB MEDIUM DENSE AREAS W/DISPOSAL	0.33	ACR	0.00	0	553.10	183	798.52	264
	SUBTOTAL-SUBSPEC SECTION 02202				0		183		264
02210	SITE GRADING								
BGAAK	SITE GRADING BALANCE CUT & FILL SANDY CLAY 200 FT 75HP DOZER	333.33	CY	0.00	0	1.46	487	1.14	380
BGAAN	SPREAD TOPSOIL BY EQUIP FROM PILES ON SITE (LEVEL SITE)	183.00	CY	0.00	0	8.58	1571	0.91	167

Figure 28
Detailed Backup Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 03/11/85 01
PAGE NUMBER: 2

		QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
BGAEAC	BULK EXCAVATION WITH 1CY BACKHOE UNCLASSIFIED EARTH	18.56	CY	0.00	0	0.38	7	0.91	17
	SUBTOTAL-SUBSPEC SECTION 02210				0		2065		563
02214	BORROW								
BGCBF	HAUL BORROW FILL SAND TO SITE UP TO 20 MI ROUND TRIP	75.00	CY	0.00	0	0.74	55	1.55	116
BGCBJ	BORROW FILL SAND COMPACT IN PLACE W/ HAUL TO SITE UP TO 30 MI RO	806.00	CY	2.25	1813	2.17	1747	3.74	3014
BGCBJ	BORROW FILL IN PLACE W/ HAUL TO SITE UP TO 30 MI RO	16.00	CY	2.25	36	2.17	35	3.74	60
BGCBLA	GRAVEL POROUS FILL UNDER FLOOR SLABS 90-100 3/4 SIEVE	89.00	CY	15.38	1369	1.26	112	2.64	235
	SUBTOTAL-SUBSPEC SECTION 02214				3218		1949		3425
02221	UTILITIES TRENCH AND BACKFILL								
BIFAP	TRENCH EXCAV BACKFILL & COMPACTION BY UTILITY TRACTOR W/2' WIDE BKHOE	38.22	CY	0.00	0	1.67	64	2.72	104
BIFAP	TRENCH EXCAV BACKFILL & COMPACTION BY UTILITY TRACTOR W/2' WIDE BKHOE	3.33	CY	0.00	0	1.67	6	2.72	9
BIFAP	TRENCH EXCAV BACKFILL & COMPACTION BY UTILITY TRACTOR W/2' WIDE BKHOE	27.78	CY	0.00	0	1.67	46	2.72	78
BIFAP	TRENCH EXCAV, BACKFILL, & COMPACTION BY UTILITY TRACTOR W/ 2'	3.33	CY	0.00	0	1.67	6	2.72	9
	SUBTOTAL-SUBSPEC SECTION 02221				0		121		198
02222	STRUCTURE EXCAVATION								
BIGDA	STRUCTURAL EXCAVATION HAND TRIMMING & SHAPING UNCLASSIFIED E	144.00	CY	0.00	0	11.99	1726	0.00	0
BIGDA	LOADING DOCK RAMP CANOPY HAND TRIMMING & SHAPING UNCLASSIFIED E	54.00	CY	0.00	0	11.99	647	0.00	0
	SUBTOTAL-SUBSPEC SECTION 02222				0		2374		0
	SUBTOTAL-SPEC SECTION 02200				3218		6691		4450
	CONTRACT COST			1.427	4593	1.619	10833	1.427	6350
	TOTAL FOR SPEC SECTION 02200								21776
02250	SOIL TREAT. FOR SUBTER. TERMITE CON								
02250	SOIL TREAT. FOR SUBTER. TERMITE CON								
BLAAA	SOIL TREATMENT TERMITE CONTROL PRETREATMENT UNDER SLABS SM	8020.00	SF	0.02	160	0.19	1517	0.07	561

Figure 28 (Continued)
Detailed Backup Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 9

		QUAN	U/M	MUP	EXT	LUP	EXT	ELP	EXT
	SUBTOTAL-SUBSPEC SECTION	04202			7057		4621		0
	SUBTOTAL-SPEC SECTION	03300			58564		29948		3113
	CONTRACT COST			1.294	75782	1.468	43964	1.294	4028
	TOTAL FOR SPEC SECTION 03300								123774
	SUBTOTAL SPEC DIVISION	03			75782		43964		4028
									123774
04200 UNIT MASONRY									
04200 UNIT MASONRY									
FAFK	MORTAR FILLED CMU CELLS 4" WIDE TYPE S	919.00	SF	0.14	129	0.32	298	0.03	28
FAGO	MORTAR FILLED INDIVIDUAL CMU CELLS 12" WIDE TYPE S	784.00	VLF	0.82	643	0.48	376	0.05	39
FAGO	MORTAR FILLED INDIVIDUAL CMU CELLS 12" WIDE TYPE S	3504.00	VLF	0.82	2873	0.48	1682	0.05	175
FCOC	REINF-TRUSS TYPE HEAVY PLAIN 8" WIDE	2464.00	LF	0.11	271	0.06	148	0.00	0
FCOE	REINF-TRUSS TYPE HEAVY PLAIN 12" WIDE	6966.00	LF	0.12	836	0.08	585	0.00	0
FCPCA	FLEXIBLE METAL TIES	171.00	EA	0.15*	26	0.18*	31	0.00*	0
FCPE	REINF-TRUSS TYPE HEAVY GALV 12" WIDE	860.00	LF	0.22	189	0.08	72	0.00	0
FFAJ	BOND BEAM 8TK 8HGT W/O GROUT OR REINF	441.00	LF	1.11	490	1.69	748	0.03	13
FFAN	BOND BEAM 12TK 8HGT W/O GROUT OR REINF	387.00	LF	1.19	461	2.11	817	0.03	12
FFAN	BOND BEAM 12TK 8HGT W/O GROUT OR REINF	1869.00	LF	1.19	2224	2.11	3947	0.03	56
FFDJ	PRECAST MASONRY LINTEL 8"WX8"H (6.5LF TO 10LF)	29.00	LF	5.50	159	1.51	44	0.00	0
FFJF	CMU HOLLOW 4" RGLR WT LOAD BEARING	919.00	SF	0.81	744	2.15	1974	0.03	28
FFJF	CMU HOLLOW 4" RGLR WT LOAD BEARING	138.00	SF	0.81	112	2.15	296	0.03	4
FFJJ	CMU HOLLOW 8" RGLR WT LOAD BEARING	4941.00	SF	1.29	6374	2.51	12392	0.05	247
FFJN	CMU HOLLOW 12" RGLR WT LOAD BEARING	2063.00	SF	1.72	3548	3.10	6387	0.06	124
FFJN	CMU HOLLOW 12" RGLR WT LOAD BEARING	7769.00	SF	1.72	13363	3.10	24053	0.06	466
	SUBTOTAL-SUBSPEC SECTION	04200			32441		53849		1192
	SUBTOTAL-SPEC SECTION	04200			32441		53849		1192
	CONTRACT COST			1.427	46294	1.619	87182	1.427	1700
	TOTAL FOR SPEC SECTION 04200								135176

Figure 28 (Continued)
Detailed Backup Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 10

		QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
04520 MASONRY RESTORATION									
04520 MASONRY RESTORATION									
FUX	COATING ON CMU WALLS								
	CUT FACE	2063.00	SF	0.30*	619	0.48*	990	0.83	1712
	SUBTOTAL-SUBSPEC SECTION 04520				619		990		1712
	SUBTOTAL-SPEC SECTION 04520				619		990		1712
	CONTRACT COST			1.427	883	1.619	1603	1.427	2443
	TOTAL FOR SPEC SECTION 04520								4930
	SUBTOTAL SPEC DIVISION 04				47177		88785		4144
									140106
05120 STRUCTURAL STEEL									
05120 STRUCTURAL STEEL									
GB8C	ANGLE CROSS BRIDGING & BRACING A-36	6335.00	LB	0.52	3294	0.19	1204	0.00	0
GBPC	MISC SHAPES (ANGLES,BARS CHANNELS ETC)	20.00	LB	0.52	10	0.23	5	0.00	0
GBPC	MISC SHAPES (ANGLES,BARS CHANNELS ETC)	1010.00	LB	0.52	525	0.23	232	0.00	0
GBPD	MISC STL SHAPES A36	168.00	LB	0.48	81	0.25	42	0.00	0
GBPD	MISC STL SHAPES A36 CANOPY FRAMING	1749.00	LB	0.48	840	0.25	437	0.00	0
GBPD	MISC STL SHAPES A36	256.00	LB	0.48	123	0.25	64	0.00	0
GBPD	MISC STL SHAPES A36	1235.00	LB	0.48	593	0.25	309	0.00	0
GBPE	MISC STL SHAPES A36 2"X2"X1/4" ANGLE FOR TRENCH GRATING FRAME	1334.00	LB	0.77	1027	0.25	333	0.00	0
	SUBTOTAL-SUBSPEC SECTION 05120				6493		2626		0
	SUBTOTAL-SPEC SECTION 05120				6493		2626		0
	CONTRACT COST			1.427	9265	1.619	4252	1.427	0
	TOTAL FOR SPEC SECTION 05120								13517
05210 STEEL JOISTS									
05210 STEEL JOISTS									
GFU	JOIST "H" SERIES	11.10	TN	638.00	7082	141.29	1568	0.42	5
	SUBTOTAL-SUBSPEC SECTION 05210				7082		1568		5
	SUBTOTAL-SPEC SECTION 05210				7082		1568		5
	CONTRACT COST			1.427	10106	1.619	2539	1.427	7
	TOTAL FOR SPEC SECTION 05210								12651
05311 STEEL ROOF DECKING									
05311 STEEL ROOF DECKING									
GHPFGH	ROOF DECK MET 20 GA SHOP PRIMED 1-1/2" DP NON-COMPOSITE & NO	7253.00	SF	0.73	5295	0.13	943	0.00	0
GHPFGH	ROOF DECK MET 20 GA SHOP PRIMED 1-1/2" DP NON-COMPOSITE & NO	420.00	SF	0.73	307	0.13	55	0.00	0

Figure 28 (Continued)
Detailed Backup Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281 PRINTING DATE: 09/10/87 14
SPEC SECTION DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 11

		QUAN	U/M	MUP	EXT	LUP	EXT	ELP	EXT
	SUBTOTAL-SUBSPEC SECTION		05311		5601		997		0
	SUBTOTAL-SPEC SECTION		05311		5601		997		0
	CONTRACT COST			1.427	7993	1.619	1615	1.427	0
	TOTAL FOR SPEC SECTION 05311								9608
05400	COLD-FORMED METAL FRAMING								
05400	COLD-FORMED METAL FRAMING								
GKCDG	SUSP SYS PLAS & GYP BD CEILINGS 1-1/2" GALV ATTACHED TO JO	237.00	SF	0.37	88	0.46	109	0.01	2
	SUBTOTAL-SUBSPEC SECTION		05400		88		109		2
	SUBTOTAL-SPEC SECTION		05400		88		109		2
	CONTRACT COST			1.427	125	1.619	177	1.427	3
	TOTAL FOR SPEC SECTION 05400								305
05500	METAL FABRICATIONS								
05500	METAL FABRICATIONS								
GLBFH	ANCHOR BOLTS 3/8"X10" LG	14.00	EA	1.91	27	1.55	22	0.03	0
GLFHS	EXP SHIELD INCL DRILLING 1/2" 1-UNIT	100.00	EA	1.41	141	11.20	1120	1.91	191
GLFHS	EXP SHIELD INCL DRILLING 1/2" 1-UNIT	14.00	EA	1.41	20	11.20	157	1.91	27
GLJJAC	BOLT HS 3/8"DIA 1" THRU 1-3/4" LG W/POS LOCK NUT ASTM A-325	391.00	EA	0.86	336	0.00	0	0.00	0
GLJJAC	BOLT HS 5/8" DIA 1" THRU 1-3/4" LG W/POS LOCK NUT ASTM A-325	28.00	EA	0.86	24	0.00	0	0.00	0
GLVL-E	5/8" X 14" THRU BOLTS	44.00	EA	4.60*	202	5.00*	220	2.00*	88
GNF	CHANNEL DOOR FR W/ANCHOR	3199.00	LB	0.83	2655	0.15	480	0.00	0
GPEIM	GRATING GALV STL RECT 1-1/2 X 3/16" BEARING BAR	49.00	SF	7.40	363	0.45	22	0.01	0
GPEIM	GRATING GALV STL RECT 2"X3/16" BEARING BAR	560.00	SF	7.40	4144	0.45	252	0.01	6
GPKL	GRATING ADD FOR STRAIGHT BANDING (EDGES)	844.00	LF	2.36	1992	0.00	0	0.00	0
GQUX	STAIR TREAD NOSING EXTRUDED ALUM 4" X1/4"TK	176.00	LF	4.50*	792	2.00*	352	0.00*	0
GSLFJT	CUSTOM STEEL STAIR RAIL 1-1/2" DIA 3-RAIL WELDED STL W/3/4"SQ BALLUSTER	131.00	LF	32.00*	4192	2.50*	327	0.03	4
GSLFRT	RAILING PIPE 1-1/2" DIA WALL MTD WELDED STL	7.00	LF	4.11	29	2.00	14	0.02	0
	SUBTOTAL-SUBSPEC SECTION		05500		14917		2966		316
	SUBTOTAL-SPEC SECTION		05500		14917		2966		316
	CONTRACT COST			1.427	21286	1.619	4802	1.427	451
	TOTAL FOR SPEC SECTION 05500								26539
	SUBTOTAL SPEC DIVISION 05				48775		13384		461
									62620

Figure 28 (Continued)
Detailed Backup Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

BACKUP REPORT: N62470-83-B-3281
SPEC SECTION

PRINTING DATE: 09/10/87 14
DATA BASE DATE: 09/11/85 01
PAGE NUMBER: 12

	QUAN	U/M	MUP	EXT	LUP	EXT	EUP	EXT
06100 ROUGH CARPENTRY								
06100 ROUGH CARPENTRY								
HABVGZ BLOCKING & NAILERS								
SYP NO 2 COMMON TREATED	763.00	BF	0.41	313	0.64	488	0.10	76
HABVGZ BLOCKING & NAILERS								
SYP NO 2 COMMON TREATED	10.00	BF	0.41	4	0.64	6	0.10	1
HAE2R CANT STRIPS 4X4 FIBERBD	110.00	LF	0.29	32	0.40	44	0.07	8
SUBTOTAL-SUBSPEC SECTION 06100				349		539		85
SUBTOTAL-SPEC SECTION 06100				349		539		85
CONTRACT COST			1.294	451	1.468	791	1.294	110
TOTAL FOR SPEC SECTION 06100								1352
SUBTOTAL SPEC DIVISION 06				451		791		110
								1352
07160 BITUMINOUS DAMPPROOFING								
07160 BITUMINOUS DAMPPROOFING								
18EHS BITUM WTRPRFG BRUSH ON								
1 COAT	3094.00	SF	0.10	309	0.13	408	0.00	0
SUBTOTAL-SUBSPEC SECTION 07160				309		408		0
SUBTOTAL-SPEC SECTION 07160				309		408		0
CONTRACT COST			1.427	442	1.619	661	1.427	0
TOTAL FOR SPEC SECTION 07160								1103
07220 ROOF INSULATION								
07220 ROOF INSULATION								
1ENR INSULATION RGD PERLITE ROOF TAPERED 3/16"/LF HH-I-529	136.00	BF	0.39	53	0.10	13	0.00	0
1ENR1 INSULATION RGD PERLITE ROOF 5.25" TK C=.07 R=14.29 HH-I-5	7435.00	SF	1.47	10929	0.21	1554	0.00	0
SUBTOTAL-SUBSPEC SECTION 07220				10982		1567		0
SUBTOTAL-SPEC SECTION 07220				10982		1567		0
CONTRACT COST			1.427	15672	1.619	2538	1.427	0
TOTAL FOR SPEC SECTION 07220								18210
07230 PERIMETER & UNDER-SLAB INSULATION								
07230 PERIMETER & UNDER-SLAB INSULATION								
1EOPD INSULATION RGD URETHANE PERIMETER OR WALL 1" TK R=6.67 C=.15 H	2837.00	SF	0.32	908	0.19	531	0.00	0
SUBTOTAL-SUBSPEC SECTION 07230				908		531		0
SUBTOTAL-SPEC SECTION 07230				908		531		0
CONTRACT COST			1.427	1295	1.619	859	1.427	0
TOTAL FOR SPEC SECTION 07230								2154

Figure 28 (Continued)
Detailed Backup Report - Specification Section

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

18.6 Input Listing (Sorted). Figure 29 is an example of a printout of loaded data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COST ENGINEERING SYSTEM LISTING OF : ESTIMATE INPUT FOR E1933231 DATE: 09/10/87 PAGE: 1

```
00 01 01 14
01 ENGINEERING
02 N52470-83-8-3231 P-734
03 HAZARDOUS/FLAMMABLE STORAGE BUILDING
04 441-30
05 N.A.S. OCEANA, VA.BEACH, VIRGINIA
06 N60191
07 05/22/86
08 CEK FA FRI NEP
09    8168.00
10 SF
11 09/11/85
12 01
13 A 03XXX  4.0 18.0  4.0 12 12 12 10 10 10 1.00  0   0  0.00
13 A 06XXX
13 A 08XXX
14 A XXXXX  4.0 18.0  4.0 12 12 12 10 10 10  5  5  5  5  5  5 1.00  0   0  0.00
17 02XXX      1.000 1.720 1.000
17 04XXX      1.000 1.200 1.000
17 07XXX      1.000 1.100 1.000
17 02680      1.000 1.200 1.000
17 XXXXX      1.000 1.000 1.000
17 16XXX      1.050 1.050 1.050
000 SYSDC1      0.00          0.00  01000 01000          0.00       0.00       0.00 1-STORY CONC MASONRY UNIT STRUC SPRE
                                                                                    AD FOOTG W/REINF
000 SYSDC2      0.00          0.00  01000 01000          0.00       0.00       0.00 CONC FLOOR SLAB ON FILL, STL BAR JOISTS
                                                                                    AND META DECK ROOF
000 SYSDC3      0.00          0.00  01000 01000          0.00       0.00       0.00 CONST W/ BALLAST SGL PLY MEMBR ROOF OVER
                                                                                     RIGID INSUL
000 SYSDC4      0.00          0.00  01000 01000          0.00       0.00       0.00 PLUMBING,HEATING, VENTILATION AND
                                                                                     ELECT WORK
011 AAAAAA      1.00 LS       0.00                       0.00       0.00       0.00 ADDITIVE ITEM
011 BCAL       37.00 SY       0.00  02050 02052          0.00       0.30       1.05 REMOVAL OF CONC SIDEWALK 4" THICK W/DISP
                                                                                    OSAL
011 BCAL        1.11 SY       0.00  02050 02052          0.00       0.30       1.05 REMOVAL OF CONC SIDEWALK 4" THICK W/DISP
                                                                                    OSAL
011 BCBF       87.00 LF       0.00  02050 02053          0.58       0.80       0.67 REMOVAL OF PLAIN CONC CURB AND 2FT GU
                                                                                    TTER
011 BCEB        1.00 EA       0.00  02050 02053          0.00     248.33     154.69 REMOVE AND RESET FIRE HYDRANT
011 BIFAP       3.33 CY       0.00  02200 02221          0.00       0.97       2.72 TRENCH EXCAV, BACKFILL, & COMPACTION BY
                                                                                     UTILITY TRACTOR W/ 2'
011 CIAXX     372.00 SY       0.00                       0.00       0.00       0.00
011 CMBA       65.00 LF       0.00  03300 03251          1.76       2.76       0.00 CONC CURB 6X18 CAST-IN- PLACE VOH CG-2
011 CMBI       39.00 SY       0.00  03300 03251         10.00       9.00       0.00 CONC VALLEY GUTTER CG-10 CAST-IN-PLACE
011 CXAE      372.00 SY       1.50  02672 02672          0.29       0.02       0.05 BITUMINOUS PRIME COAT (RC-70) OR (MC-
                                                                                    70)
011 CXDE      372.00 SY     150.00  02680 02680          2.96       0.31       0.49 ASPHALT WEARING/SURFACE COURSE FOR FLEX
                                                                                    IBLE PVM 2" THK
011 CXDQ      372.00 SY      66.00  02680 02680          0.50       0.08       0.00 POLYPROPYLENE NONWOVEN PAVING FABRIC
011 DQGLX       1.00 EA      84.00  02713 02711        370.01      56.06      17.75 8X6 TAPPING SLEEVE
```

Figure 29
Input Listing (Sorted)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COST ENGINEERING SYSTEM LISTING OF : ESTIMATE INPUT FOR E1833281 DATE: 09/10/87 PAGE: 2

011 DOGLYX	1.00 EA	64.00	02713 02711	332.02	94.63	30.00	6 INCH TAPPING VALVE MJ
011 DOGLYP	1.00 EA	64.00	02713 02711	0.00	100.87	112.22	TAP 6 INCH HOLE IN PIPE
011 LOUEP	16.00 EA	443.00	10500 10500	80.80	7.84	1.31	LOCKER STD 12WX60HX15D BAKED ON ENAMEL 1-TIER
011 MVESRR	1.00 EA	5500.00	11162 11162	2700.00	175.00	2.62	QUOTE FROM MONTGOMERY DOOR INC CAR TY PE 1
011 MVLRME	17.00 EA	31.00	11162 11162	63.00	9.84	1.61	LAMINATED RUBBER BUMPERS 6" TK 10"X35"
011 NCVHHL	4.17 LF	0.00	12331 12331	42.00	19.04	0.40	VANITY WITH BACK SPLASH LAMINATED PLAST IC OVER PLYWOOD W/WALL
011 VMMA	68.00 EA	0.14	16402 16110	1.16	3.36	0.00	1/2" ROD BEAM CLAMP
011 VMME	450.00 LF	1.28	16402 16110	2.54	1.28	0.00	3/8" ALL THREAD ROD
011 VMMHA	450.00 LF	0.00	16402 16110	1.13	1.68	0.00	1-1/2" HANGER CHANNEL HOLES
011 VMNE	68.00 EA	0.00	16402 16110	0.50	1.00	0.00	1/4" BOLT
011 VMNF	240.00 EA	0.00	16402 16110	0.34	1.00	0.00	1" NUT & LOCK WASHER
011 ZA51	4.00 EA	0.00	16510 16510	115.71	25.17	0.00	EMER. SHELF MT. BATT. PACK UNIT W/2 H EADS LEA CAL. LITH ELU-
011 ZA91D	136.00 EA	0.00	16510 16510	1.30	0.00	0.00	LAMP 40W MED. BIPIN BASE F40T12/CW/RS 48 "
011 ZAA9D	34.00 EA	0.00	16510 16510	134.95	21.63	0.00	8' 4F40 LAMPS PLASTIC HOUSING WET LOC . FLUOR. LITH. 85D0240A
011 ZHA	24.00 HR	0.00	16302 16570	0.00	8.88	22.40	POLE LINE / BUCKET TRUCK
011 ZHAB	8.00 HR	0.00	16302 16570	0.00	8.88	25.40	POLE CAT (AUGER) W/TRLR
011 ZLLA	1.00 EA	2857.00	16302 16570	211.20	63.77	0.00	WOOD POLE TRTD/CCA/ACA 40 LF CL 2 TYPE C
011 ZMWZ8	3.00 EA	0.00	16302 16570	68.25	46.17	0.00	POLE PLATE 1930ZL-35, DN GUY C-15KV W /10" ANCHOR, 2.4 M.
011 ZURA1	1.00 JOB	0.00	16402 16120	25.00	588.00	0.00	REM & REL EXIST TEL CABLE
111 AAAAAA	8020.00 SF	0.00		0.00	0.00	0.00	FOUNDATION
111 BGCBJ	806.00 CY	0.00	02200 02214	2.25	1.26	3.74	BORROW FILL SAND COMPACT IN PLACE W/ HAU L TO SIT UP TO 30 MI RO
111 BIGDA	144.00 CY	0.00	02200 02222	0.00	8.97	0.00	STRUCTURAL EXCAVATION HAND TRIMMING & SHAPING UNCLASSIFIED E
111 BLAAA	8020.00 SF	0.05	02250 02250	0.02	0.11	0.07	SOIL TREATMENT TERMITE CONTROL PRETREA TMENT UNDER SLABS SM
111 EBIRC	774.00 SF	3.62	03300 03100	0.63	1.25	0.05	FORM FTG & PILE CAP PLYWD 3-USE
111 EFDE	0.48 TN	2000.00	03300 04202	520.00	379.38	0.00	REBAR #5-#6 BOND BEAMS
111 EFDI	2.12 TN	2000.00	03300 04202	952.00	379.38	0.00	REBAR #5-#6 GALV BOND BEAMS
111 EFFE	0.85 TN	2000.00	03300 03200	520.00	231.68	0.00	REBAR #5-#6 FOUNDATIONS
111 EFIE	1.97 TN	2000.00	03300 04202	520.00	397.29	0.00	REBAR #5-#6 MASONRY WALL VERT
111 EHTT	108.00 LF	0.00	03300 03300	1.25	0.20	0.00	RUBBER CONTROL JOINT
111 EKIMP	164.00 CY	0.00	03300 03301	52.73	5.12	0.79	PLACE CONC 2500 OR 3000# FTG OR PILE CAP BY HAND BUGGY
111 ENEZC	387.00 LF	0.00	03300 03301	0.68	0.31	0.08	CONC FOR BOND BEAM 3000# 8"H X 12"W
111 ENFZC	1869.00 LF	0.00	03300 03301	1.87	1.53	0.39	CONC FOR BOND BEAM 3000# 16"H X 12"W
111 FAGO	784.00 VLF	0.00	04200 04200	0.82	0.40	0.05	MORTAR FILLED INDIVIDUAL CMU CELLS 12" W IDE TYPE S
111 FCPE	850.00 LF	0.74	04200 04200	0.22	0.07	0.00	REINF-TRUSS TYPE HEAVY GALV 12" WIDE
111 FFAN	387.00 LF	10607.00	04200 04200	1.19	1.76	0.03	BOND BEAM 12TK 8HGT W/O GROUT OR RE INF
111 FFJN	2063.00 SF	0.00	04200 04200	1.72	2.58	0.06	CMU HOLLOW 12" RGLR WT LOAD BEARING

Figure 29 (Continued)
Input Listing (Sorted)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PART 4: OTHER TYPES OF ESTIMATES

			PAGE
PART 4		OTHER TYPES OF ESTIMATES	234
Section	19	ESTIMATES FOR CHANGE ORDERS	235
	19.1	Estimates for Change Orders	235
	19.2	Sample Change Order Estimate	236
	19.2.1	Change Order Cost Estimate Backup Sheet (LANTDIV)	239
Section	20	ESTIMATES FOR NEGOTIATED CONSTRUCTION CONTRACTS	244
	20.1	Negotiated Construction Contracts	244
Section	21	ESTIMATES FOR SPECIAL PROJECTS	245
	21.1	Two-Step Procedures	245
Section	22	SUPPLEMENTAL INFORMATION	246
	22.1	Blank Forms	246

APPENDICES

APPENDIX H, Blank Forms 247

FIGURES

30	Change Order Estimate	237
31	Change Order Cost Estimate Backup Sheet	240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 19: ESTIMATES FOR CHANGE ORDERS

19.1 Estimates for Change Orders. Estimates for change orders to the contract plans and specifications shall be accomplished with adequate backup to negotiate. These estimates must use the "Estimate for Change Order" summary sheet (NAVFAC 4330/43). Estimates and summaries must be prepared for both increases and decreases in contract cost. Documentation must also be provided for "no-cost" changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

19.2 Sample Change Order Estimate. Figure 30 is an example of a change order estimate summary.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

ESTIMATE FOR CHANGE ORDER *(Less than $500,000)*

NAVFAC 4330/43 (6/83) S/N 0105-LF-003-3430

CONTRACT no.	CONTRACT TITLE	DATE
81-1762	LEACHATE COLLECTION/TREATMENT SYS., LTCK	15 JULY 1987

CHANGE DESCRIPTION: LAGOONS #1 & #2 MODIFICATION

PRIME CONTRACTOR'S WORK			REVISIONS
1. LABOR			
2. FRINGE BENEFITS			
3. MATERIAL *(incl. sales tax)*			
4. RENTAL EQUIPMENT *(incl. sales tax)*			
5. OPERATING & MINOR MAINT. FOR OWNED EQUIPMENT			
6. SUB-TOTAL *(1 + 2 + 3 + 4 + 5)*			
7. FIELD OVERHEAD *(10% of line 6)*			
8. LIABILITY & COMPENSATION INS. (% of line 1)			
9. SUB-TOTAL *(6 + 7 + 8)*			
10. HOME OFFICE OVERHEAD *(3% of line 9)*			
11. EQUIPMENT OWNERSHIP EXPENSE			
12. SOCIAL SECURITY & UNEMPLOYMENT INS. (% of line 1)			
13. SUB-TOTAL *(9 + 10 + 11 + 12)*			

REMARKS

SUB-CONTRACTOR'S WORK			
14. LABOR	2863		
15. FRINGE BENEFITS			
16. MATERIAL *(incl. sales tax)* 5 %	4988		
17. RENTAL EQUIPMENT *(incl. sales tax)*			
18. OPERATING & MINOR MAINT. FOR OWNED EQUIPMENT			
19. SUB-TOTAL *(14 + 15 + 16 + 17 + 18)*		7851	
20. FIELD OVERHEAD *(10% of line 19)*	785		
21. LIABILITY & COMPENSATION INS. (13 % of line 14)	372		
22. SUB-TOTAL *(19 + 20 + 21)*		9008	
23. HOME OFFICE OVERHEAD *(3% of line 22)*	270		
24. EQUIPMENT OWNERSHIP EXPENSE			
25. SOCIAL SECURITY & UNEMPLOYMENT INS. (8 % of line 14)	229		
26. SUB-TOTAL *(22 + 23 + 24 + 25)*		9507	
27. PROFIT *(6% of line 26)*	570		
28. SUB-TOTAL *(26 + 27)*		10,077	

REMARKS

SUMMARY			
29. PRIME CONTRACTOR'S WORK *(from line 13)*			
30. SUB-CONTRACTOR'S WORK *(from line 28)*	10,077		
31. PRIME CONTRACTOR'S OVERHEAD ON SUB-CONTRACT WORK *(5% of line 30)*	504		
32. SUB-TOTAL *(29 + 30 + 31)*		10581	
33. PRIME CONTRACTOR'S PROFIT *(6% of line 32)*	635		
34. SUB-TOTAL *(32 + 33)*		11,216	
35. PRIME CONTRACT BOND PREMIUM (1 % of line 34, or max)	112		
36. TOTAL COST *(34 + 35)*		11,328	

ESTIMATED TIME EXTENSION AND JUSTIFICATION — CALENDAR DAYS

PRIME CONTRACTOR'S NAME: CODE 407 — SIGNATURE AND OFFICIAL TITLE

Figure 30
Change Order Estimate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS FOR PREPARING CHANGE ORDER ESTIMATE

All Cost Estimates shall be addressed to the Resident Officer in Charge of Construction. Such requests must clearly state the conditions and scope of the change and shall be accompanied by a breakdown of cost as indicated. Lump sum items will not be accepted in either the prime or sub-contractor's breakdown. The total cost for labor, material, and equipment rental for each item shall be transferred to the front of this form. At the contractor's option, the standard overhead rates shown on the front of this form may be used in lieu of detailed itemized estimates of field and home office overhead expenses. Requests for overhead rates in excess of the standard rates must be accompanied by an independently prepared audit report covering at least a current one-year period that substantiates the higher overhead costs claimed. The estimate should also include a request for an extension of time, in calendar days, if any is required in order to complete the work covered by the proposed change. The contractor shall not proceed with any of the work included in the change prior to written approval of the Resident Officer in Charge of Construction.

BREAKDOWN ESTIMATE OF DIRECT COSTS

CONTRACT NO.	NAME OF CONTRACTOR	CONTRACTOR ☐ PRIME ☐ SUBCONTRACTOR

ITEM NO.	ITEM OF WORK	NO. OF UNITS	LABOR		MATERIAL		EQUIPMENT			TOTAL COST
			UNIT COST	TOTAL COST	UNIT COST	TOTAL COST	EQU. DAYS	RATE	TOTAL COST	
				XXX		XXX		XXXXX	XX	

NAVFAC 4330/43 (Rev.)

Figure 30 (Continued)
Change Order Estimate

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

19.2.1 Change Order Cost Estimate Backup Sheet (LANTDIV). Figure 31 is a sample Cost Estimate Backup Sheet (LANTDIV).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5(REV. 12/80) — SHEET 1 of 4

PREPARED BY CCS — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. 81-1762

FUNDS AVAL. C.O. — NORFOLK, VIRGINIA — DATE 7/15/87

PROJECT LEACHATE COLLECTION/TREATMENT SYSTEM — LOCATION NAB, LITTLE CREEK — ☐ PRELIM. ☒ FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
•BALL VALVE ACTUATORS-2" VALVE-ASSUME EXISTING VALVE HAS ACTUATOR CONNECTIONS	2	EA	317.00	634	37.64			JOHNSON CONTROLS MODEL V-5252-618
• 1¼" SCH 40 PIPE	10	LF	90	9-	1.78	18-		CES-QAG7AC
• 1¼" 150# 90° ELBOW	2	EA	1.51	3-	16.36	33-		CES-QAGAJG
• SUMP PUMP-25 GPM @ 20' head, bronze	1	ea	2452	2452-	172.46	472-		CES-GMPGBD
• float switch)-mercury w/MOUNTING	1	ea	93.50	94-	55.98	56-		CES-WLWJ
• 1¼" 150# union)	1	ea	3.20	3-	18.51	19-		CES-QAGIJG
• 1¼" check valve 150#	1	ea	28.47	29-	20.93	21-		CES-RCFAAH
• 1¼" gate valve 150#	1	ea	12.22	12-	14.14	14-		CES-RAFAB
• wall penetration)	1	ea	14.96	15-	30.76	31-		CES-VZD
• caution) signs for control bldg.	1	ea	1.66	47-	5.13	5-		CES-GMVAZ
• Fan covers 12"Ø	2	EA	29.31	59-	LABOR	NORTS		McMASTER-CARR
• ½"Ø EXPANSION BOLTS	4	ea	2-	8-	3.05	12-		CES-BLBFG
• ½" expansion shields)	4	ea	.63	3-	8-	32-		CES-GLFDS

Figure 31

Change: Underscore Backup Sheet 3 (NAVFAC)

Check the source to verify that this is the current version before use.

240

MIL-HDBK-1010/1

LANTDIV NORVA 4-11012/5 (REV. 12/80)
ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND
NORFOLK, VIRGINIA

SHEET 2 of 4
Const. Contr. No. 81-1762
DATE 7/15/87

ESTIMATED BY: CCS
FUNDS AVAIL.: C.O.

PROJECT: LEACHATE COLLECTION/TREATMENT SYSTEM
LOCATION: NAB, LITTLE CREEK
☐ PRELIM. ☒ FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
• NUTS ≈ 3/4" DIA x 2½" W/BOLT	4	EA	2.25	9.-	--			CES-GCTLBD
• STD SIZE RED BRICKS	6	EA	3.-	3.-	--			HECKUKER
• CONCRETE EQUIP. PAD, REINF.	0.40	CY	123.53	49.-	72.-	61.-		CK #50
SUBTOTAL				3429		804.-		
MATERIAL SALES TAX				1.45				
				3583.-				

Figure 31 (Continued)
Change Order Cost Estimate Backup Sheet (LANTDIV)

MIL-HDBK-1010/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80) — SHEET 3 of 4

PREPARED BY _____ — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. _____

FUNDS AVAIL. _____ — NORFOLK, VIRGINIA — DATE 27 JUN 87

PROJECT LEACHATE COLLECTION/TREATMENT SYSTEM — LOCATION NAB LITTLE CREEK VA BEACH — ☐ PRELIM. ☐ FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
3ØA, 24ØV, 4W DISC SW W/NEMA 4 ENCLOSURE	1	EA	388.86	388-	88.52	89-	477-	XUSD
1/2" LT FLEX CONDUIT W/3 #12 WIRES (6FT)	5	EA	9.19	46-	22.44	112-	158-	VD#B
3 #12 WIRES IN 1/2" PVC CONDUIT	145	LF	.37	54-	1.68	244-	298-	VG#CAA
1/2" GRS CONDUIT	9Ø	LF	.62	56-	1.13	101-	157-	VEB
1/2" GRS 90° ELBOW	5	EA	2-	10-	7.02	35-	45-	VEQB
1/2" GRS LB CONDUIT BODY	3	EA	2.96	9-	11.24	34-	43-	VEOQ
1/2" GRS COUPLER	9	EA	1.67	15-	11.24	101-	116-	VEPO
#12 THHN-THWN SOLID CU	27Ø	LF	.08	22-	.26	70-	92-	WGBA
3/4" PLASTIC BUSHING	7	EA	.28	2-	2.24	16-	18-	VGNXA
3/4" GRS NIPPLE	7	EA	.46	3-	2.24	16	19-	VETM
SAW 3/4" PVC COATED GRS	9	EA	Ø	Ø	6.20	56	56-	VEU
3/4" GRS CONNECTOR	9	EA	2.65	24-	10.05	90-	114-	VEV
DISCONNECT EXISTING CIRCUITS	21	EA	Ø	Ø	4.65	90-	90-	VEW
TRENCH & BACKFILL	145	LF	.25	36-	.15	26-	62-	BFFKE
MOBILIZE/DEMOBILIZE FOR TRENCHING	1	EA	147.11	147-	26.11	26-	173-	BFFLEA
SAWCUT BITUMINOUS PAVEMENT	145	LF	.76	110-	.24	107		BDHH
REMOVE BITUMINOUS PAVEMENT	16	SY	2.79	45-	2.80	45-	90-	BDAB
STARTER CONTACTS	4	EA	5.50	22-	2-	8-	30-	VEX
1/2" PVC CONDUIT	6Ø	LF	.13	7-	1.06	64-	71	VGB
16/3 SO FLEXIBLE CORD	13Ø	LF	.29	38-	.98	127-	165-	WDB
1/2" GRS CONDUIT	7Ø	LF	.62	43-	1.73	78-	121-	VEB
1/2" GRS 90° ELBOW	4	EA	2-	8-	7.02	28-	36-	VEQB
1/2" GRS LB CONDUIT BODY	2	EA	2.96	6-	11.24	23-	29-	VEOQ
1/2" GRS COUPLER	7	EA	1.67	12-	11.24	79-	91-	VEAD
4" J-BOX W/NEMA 4 ENCLOSURE	2	EA	11.44	23-	28.10	56-	79-	WPLB
1" Concrete Wall Penetration	1	EA	17.69	18-	53.92	54-	72-	V2D

Figure 31 (Continued)

Change Order Cost Estimate Backup Sheet (LANTDIV)

MIL-HDBK-1010/1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MATERIAL & LABOR COST ESTIMATE — LANTDIV NORVA 4-11012/5 (REV. 12/80) — SHEET 4 of 4

PREPARED BY _____ — ATLANTIC DIVISION NAVAL FACILITIES ENGINEERING COMMAND — Const. Contr. No. _____

FUNDS AVAI. _____ — NORFOLK, VIRGINIA — DATE 27 Jun 87

PROJECT LEACHATE COLLECTION/TREATMENT SYSTEM — LOCATION NAB LITTLE CREEK VA BEACH — ☐ PRELIM. ☐ FINAL

ITEMS	QUANTITY	UNIT	MATERIAL COST UNIT	MATERIAL COST TOTAL	LABOR COST UNIT	LABOR COST TOTAL	TOTAL COST	REMARKS
Bituminous Paving for pipe trench	16	SY	10.67	171	6.57	105	207	CJRT
2" PVC RGS Conduit	1	ea	4.63	5	2.94	3	8	VFG
2" PVC RGS Coupling	1	ea	4.99	5	—	—	5	VFNT
Reconnect Existing Circuits	21	ea	.19	2	3.36	71	73	VEW
Disconnect Low Level Alarm	1	ea			34.96	35	35	LWIT
Patch PVC Coating on PVC RGS	1	ea			34.96	35	35	CWIT
Conduit W/Plasteel Epoxy	1	LB	16.60	17	34.96	35	52	McMaster-Carr
SUBTOTAL				1344		2050		
MATERIAL SALES TAX (4.5%)				1.045				
				1404				
* NOTE: CES MATERIAL INCREASED BY 10% & LABOR DOUBLED FOR SMALL JOB 8A CONDITIONS								

Figure 31 (Continued)

Change Order Cost Estimate Backup Sheet 3.5 (LANTDIV)

MIL-HDBK-1010/1

Check the source to verify that this is the current version before use.

Section 20: ESTIMATES FOR NEGOTIATED CONSTRUCTION CONTRACTS

20.1 Negotiated Construction Contracts. In addition to requirements established for competitively bid construction contracts, estimates for negotiated construction contracts shall:

a) Use a computer run CES estimate unless estimated construction cost is less than $10,000.

b) Final estimate must accurately reflect the final plans and specifications. Direct comparision with the construction contractors estimate will be made in quantity take-offs; quotes for major material/equipment, items; crew size, equipment, and production rates; and area labor rates. Field overhead must be itemized as System 001. Where conflicts exist between A&E estimate and construction contractor estimate, the A&E will provide prompt verification/substantiation for items in question.

c) Should conflicts between plans and specifications occur, the A&E will promptly clarify intent and prepare a draft "as negotiated" amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 21: ESTIMATES FOR SPECIAL PROJECTS

21.1 Two-Step Procedures. OPNAVINST 11010.20E provides detailed definitions, policy, cost limitations, preparation, and submission procedures. Projects will be submitted in two steps. The first step submission will identify the requirement and appropriate cost estimate. The second step submission, made when funding is probable, will include the engineering and detailed cost data necessary to define and justify work to be done. The two-step procedure is used only for projects funded from Operations and Maintenance, Navy (O&M,N) or Research, Development, Test and Evaluation, Navy (RDT&E,N) appropriations.

The major claimant determines funding potential from the step one submittal. If the funding is programmed, the activity is required to submit the step-two form, NAVFAC Form 11014/64.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 22: SUPPLEMENTAL INFORMATION

22.1 **Blank Forms.** See Appendix H.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX H

BLANK FORMS

Change Order Estimate

ESTIMATE FOR CHANGE ORDER *(Less than $500,000)*

NAVFAC 4330/43 (6/83) S/N 0108-LF-003-3430

CONTRACT NO	CONTRACT TITLE	DATE

CHANGE DESCRIPTION

PRIME CONTRACTOR'S WORK			REVISIONS
1. LABOR			
2. FRINGE BENEFITS			
3. MATERIAL *(Incl. sales tax)*			
4. RENTAL EQUIPMENT *(Incl. sales tax)*			
5. OPERATING & MINOR MAINT. FOR OWNED EQUIPMENT			
6. SUB-TOTAL *(1 + 2 + 3 + 4 + 5)*			
7. FIELD OVERHEAD *(10% of line 6)*			
8. LIABILITY & COMPENSATION INS. *(% of line 1)*			
9. SUB-TOTAL *(6 + 7 + 8)*			
10. HOME OFFICE OVERHEAD *(3% of line 9)*			
11. EQUIPMENT OWNERSHIP EXPENSE			
12. SOCIAL SECURITY & UNEMPLOYMENT INS. *(% of line 1)*			
13. SUB-TOTAL *(9 + 10 + 11 + 12)*			

REMARKS

SUB-CONTRACTOR'S WORK			
14. LABOR			
15. FRINGE BENEFITS			
16. MATERIAL *(Incl. sales tax)*			
17. RENTAL EQUIPMENT *(Incl. taxes due)*			
18. OPERATING & MINOR MAINT. FOR OWNED EQUIPMENT			
19. SUB-TOTAL *(14 + 15 + 16 + 17 + 18)*			
20. FIELD OVERHEAD *(10% of line 19)*			
21. LIABILITY & COMPENSATION INS. *(% of line 14)*			
22. SUB-TOTAL *(19 + 20 + 21)*			
23. HOME OFFICE OVERHEAD *(3% of line 22)*			
24. EQUIPMENT OWNERSHIP EXPENSE			
25. SOCIAL SECURITY & UNEMPLOYMENT INS. *(% of line 14)*			
26. SUB-TOTAL *(22 + 23 + 24 + 25)*			
27. PROFIT *(5% of line 26)*			
28. SUB-TOTAL *(26 + 27)*			

REMARKS

SUMMARY			
29. PRIME CONTRACTOR'S WORK *(from line 13)*			
30. SUB-CONTRACTOR'S WORK *(from line 28)*			
31. PRIME CONTRACTOR'S OVERHEAD ON SUB-CONTRACT WORK *(5% of line 30)*			
32. SUB-TOTAL *(29 + 30 + 31)*			
33. PRIME CONTRACTOR'S PROFIT *(5% of line 32)*			
34. SUB-TOTAL *(32 + 33)*			
35. PRIME CONTRACT BOND PREMIUM *(% of line 34, actual)*			
36. TOTAL COST *(34 + 35)*			

ESTIMATED TIME EXTENSION AND JUSTIFICATION — CALENDAR DAYS

PRIME CONTRACTOR'S NAME — SIGNATURE AND OFFICIAL TITLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS FOR PREPARING CHANGE ORDER ESTIMATE

All Cost Estimates shall be addressed to the Resident Officer in Charge of Construction. Such requests must clearly state the conditions and scope of the change and shall be accompanied by a breakdown of cost as indicated. Lump sum items will not be accepted in either the prime or sub-contractor's breakdown. The total cost for labor, material, and equipment rental for each item shall be transferred to the front of this form. At the contractor's option, the standard overhead rates shown on the front of this form may be used in lieu of detailed itemized estimates of field and home office overhead expenses. Requests for overhead rates in excess of the standard rates must be accompanied by an independently prepared audit report covering at least a current one-year period that substantiates the higher overhead costs claimed. The estimate should also include a request for an extension of time, in calendar days, if any is required in order to complete the work covered by the proposed change. The contractor shall not proceed with any of the work included in the change prior to written approval of the Resident Officer in Charge of Construction.

BREAKDOWN ESTIMATE OF DIRECT COSTS

CONTRACT NO.	NAME OF CONTRACTOR	CONTRACTOR ☐ PRIME ☐ SUBCONTRACTOR

ITEM NO.	ITEM OF WORK	NO. OF UNITS	LABOR		MATERIAL		EQUIPMENT			TOTAL COST
			UNIT COST	TOTAL COST	UNIT COST	TOTAL COST	EQU. DAYS	RATE	TOTAL COST	
			XXX		XXX		XXXXX	XX		

NAVFAC 4330/43 (Back)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Special Project Request

SPECIAL PROJECT REQUEST
NAVFAC 11014/64 (11-48)
STEP TWO SUBMISSION
Sheet 1 of 2

1. ACTIVITY SHORE NO. | ACTIVITY NAME AND LOCATION | DATE SUBMITTED

2. PROJECT NO. | TITLE

3. TYPE
a. ☐ MAINT./REPAIR b. ☐ MINOR CONSTRUCTION/ ALTERATION c. ☐ AIR CONDITIONING ☐ EQUIPMENT INSTALLATION

4. DESCRIBE AND STATE FUNCTION OF FACILITY

a. PROPERTY RECORD CARD NO.

b. NAVY CATEGORY CODE

c. BLDG. OR STRUCTURE NO.

5. WHAT IS THE EFFECT OF THIS PROJECT ON THE MISSION OF THE ACTIVITY?

6. THE REQUIREMENT FOR THE FACILITY IS BASED ON:
a. ☐ A CHANGE IN MISSION b. ☐ FULL-TIME CONTINUING NEED c. ☐ 3 TO 5 YEAR NEED d. ☐ LESS THAN 3 YEARS' NEED e. ☐ CURRENTLY REQUIRED LESS THAN 50% OF TIME f. ☐ RESERVED FOR FUTURE REQUIREMENTS

7a. EST. FUNDED COST	b. EST. PROJECT COST	c. EST. PLANNING COST	d. TOTAL FUNDS REQUESTED	e. EST. FACIL. REPL. COST
$	$	$	$	$

8. DATE FACILITY CONSTRUCTED →

9. IS FACILITY ON AN APPROVED BASIC FACILITY REQUIREMENTS LIST? *If "NO," how was need determined?*
☐ YES ☐ NO

10. IS PROJECT LISTED ON ANNUAL INSPECTION SUMMARY? *If answer is "NO," and A/S is applicable, explain reasons.*
☐ YES ☐ NO ☐ N.A.

11. DESCRIBE CONDITION TO BE CORRECTED, OR PROBLEM TO BE SOLVED WITH PROPOSED SOLUTION. *Attach additional description if necessary. ONE PAGE ONLY.*

12. WHY IS THE PROPOSED SOLUTION BEST – AND WHAT ALTERNATIVES WERE CONSIDERED?

13. WERE ANY NON-NAVY EXPERTS INVITED TO REVIEW THIS PROBLEM AND THIS SOLUTION? *Explain effect on solution.*
a. ☐ YES b. ☐ NO

14. HAS EFD DESIGN DIVISION REVIEWED SOLUTION? a. ☐ YES b. ☐ NO

15. CAN ANOTHER FACILITY BE ECONOMICALLY ADAPTED FOR THIS FUNCTION? a. ☐ YES b. ☐ NO

16. CAN PROJECT BE FUNDED IN PHASES? *How? How many?*
a. ☐ YES b. ☐ NO

17. THIS PROJECT IS THE RESULT OF
a. ☐ INADEQUATE MAINTENANCE b. ☐ FACILITY AGE c. ☐ DEFICIENT CONSTR. d. ☐ DEFICIENT DESIGN e. ☐ OTHER: _____

18. HAS THIS SPECIFIC PROBLEM BEEN CORRECTED PREVIOUSLY?
a. ☐ YES b. ☐ NO *When?*
HOW LONG WILL PROPOSED CORRECTIVE ACTION LAST? _____ YEARS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

19. ARE COMPONENTS BEING INCREASED IN SIZE OR CAPACITY? *Explain the differences, including cost.*

a. ☐ YES b. ☐ NO

20. ARE MATERIALS PROPOSED FOR USE THE SAME AS THOSE EXISTING? *If "NO," explain the differences, including cost.*

a. ☐ YES b. ☐ NO

21. PROJECT IS PLANNED TO BE ACCOMPLISHED BY

a. ☐ STATION LABOR b. ☐ CONTRACT

22. HAS A PROJECT EVER BEEN SUBMITTED FOR THE REPLACEMENT OF THIS OR SIMILAR FACILITIES? *Check and explain if "YES."*

a. ☐ YES b. ☐ NO *Maint*

23. ANTICIPATED SAVINGS IF PROJECT IS DONE THIS YEAR AS COMPARED TO A DEFERRAL OF ONE YEAR.

PROBABLE INCREASE IN PROJECT COST FOR ANY JUSTIFIABLE REASON	REDUCTION IN CURRENT MAINT. COST	REDUCTION IN CURRENT OPERATIONS COST
$	$	$

JUSTIFY ANY SAVINGS INDICATED

WHAT IS PAY BACK PERIOD OF PROJECT? *(In years)*

WILL ACCOMPLISHMENT GENERATE REQUIREMENTS FOR ADDITIONAL M&O FUNDS OR PERSONNEL? a. ☐ NO b. ☐ YES *Est. Amt.*

24. WHAT WOULD BE THE EFFECT OF DEFERRING THE PROJECT ONE YEAR?

*25. IF THE PROJECT IS NOT ACCOMPLISHED NOW, IN HOW MANY YEARS WILL THERE BE SERIOUS DAMAGE TO THE FACILITY AND/OR ITS CONTENTS OR IMPAIRMENT TO ESSENTIAL OPERATIONS? *Explain, estimate and relate to factors and/or criteria.*

YEARS BEFORE SERIOUS DAMAGE OCCURS _____.

*26. HAS THE REDUCED UTILIZATION OF THIS SPECIFIC FACILITY AFFECTED A LARGE FACILITY SYSTEM OPERATION? *Explain.*

a. ☐ YES b. ☐ NO

BY HOW MUCH? _____%

27. ARE THERE ANY OTHER FACTORS INVOLVED? *Check and explain.*

a. ☐ MORALE b. ☐ HEALTH c. ☐ PUBLIC RELATIONS d. ☐ SAFETY e. ☐ FIRE PROTECTION f. ☐ SECURITY g. ☐ OTHER

28. CERTIFICATION BY RESPONSIBLE OFFICER AT ACTIVITY: I am personally cognizant of the need for, the necessity of, and the proposed method of accomplishment of this project and certify that the above information is correct, and that this project meets all criteria specified in OPNAVINST 11010.20 and subsequent changes thereto.

SIGNATURE	TITLE	DATE

29. EFD TECHNICAL VALIDATION *(If requested) (see para 7303, OPNAVINST 11010.20C)*

SIGNATURE	TITLE	DATE

ENCLOSURES:

a. ☐ ENGINEERING EST. *(NAVFAC 2417)* b. ☐ LOCATION PLAN(S) c. ☐ DRAWINGS d. ☐ PHOTOGRAPHS

*NOT applicable to Minor Construction, Alterations, or Equipment Installation

NAVFAC 11014/68 (REV. 5-74)
Sheet 2 of 2

*U.S. GOVERNMENT PRINTING OFFICE:

S/N 0108-LF-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

PART 5: COST DATA REFERENCES

PAGE

PART 5 COST DATA REFERENCES.....251
Section 23 CES STANDARD SYSTEMS NARRATIVES.....252
23.1 CES Standard Systems Narratives.....252
23.2 Award Cost Data.....280

APPENDICES

APPENDIX I, Award Cost Data.....281

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

Section 23: CES STANDARD SYSTEMS NARRATIVES
8/05/87

23.1 CES Standard Systems Narratives. The following information describes the systems content.

BUILDING SYSTEMS INTERIOR

000 Building Construction

Includes the total cost of all systems 001 thru 499. Total building cost to the 5-foot line. This system is not to be used for estimate preparation.

OVERHEAD

001 Field Overhead Total Cost Lump Sum

Includes Project Manager, Superintendent, Timekeeper, Field Engineer, Clerical Staff, Field Offices, Utilities, Field Storage, and any other field incurred cost necessary to administer the project in the field. For projects outside the United States includes shipping, transportation of personnel per diem and temporary housing.

002 Home Office Overhead Total Cost Lump Sum

Includes the portion of Home office costs allocated to the project being priced.

003 Contractor Quality Control Total Cost Lump Sum

Includes costs for the Field Contractor Quality Control Staff. Testing requirements are included with other systems as applicable.

*011 Additive 1 Total Cost Lump Sum

Includes all costs associated with Additive item 1 as described in the specifications. When an additive is a separate building or involves substantial work it may be advisable to run a separate estimate to develop the cost and transfer only the total to the master estimate.

*Typical for all Additive and Deductive items.

041 OMSI Total Cost Lump Sum

Includes costs associated with preparation of an Operation and Maintenance Service Instruction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

042 PCAS

Percent Lump Sum

Includes costs associated with Post Contract Award Services.

043 Contingencies

Percent Lump Sum

Includes contingency allowance. The contingency entered is not an estimating contingency but a contingency for change orders.

044 SIOH

Percent Lump Sum

Includes an allowance for government administration of the construction contract. Supervision, Inspection, and Overhead.

GENERAL CONSTRUCTION

111 Foundation

Ground Floor Sq. Ft.

Includes excavation and backfill for foundation and basement construction, pile caps, footings, grade beams, piers, foundation walls, basement walls, fill under floor slabs, and all required construction to the first floor elevation, excluding all structural floor slabs, ground slabs, basement structural framing, piling, special foundations and soil treatment. See 84X for removing unsuitable materials and 816 for surcharging.

112 Slab on Grade

Slab on Grade Sq. Ft.

Includes all ground slabs and vapor barrier, waterproofing, wire mesh, capillary fill, and soil treatment. Includes ground slab, reinforcing steel, waterproofing and soil treatment for structural slab placed on fill where fill is used as form. Borrow fill under slab is included in System 111.

113 Structural

Gross Bldg. Area Sq. Ft.

Includes structural frame consisting of; skeleton frame of building, i.e., columns, girders, cantilevered members extending beyond exterior walls, and fireproofing. Excludes framing in direct support of floor or roof construction.

114 Supported Floor

Supported Floor Sq. Ft.

Includes construction of structurally integrated or independently supported floors, i.e., steel decking, joists, beams, slabs, precast concrete decking with topping steel reinforcing and other related items to provide a complete structural floor. Excludes applied finishes.

115 Stairs

Number of Risers Each

Includes interior and exterior stairs, landings, platforms, and railings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

116 Roof Structure — Roof Area — Sq. Ft.

Includes construction of structurally integrated or independently supported roofs, i.e., precast concrete roof slabs, concrete topping, steel decking, joists, beams. Roofing is included in 141.

117 Pre-Engineered Building — Gross Building Area — Sq. Ft.

Includes steel frame, siding, roofing, insulation, doors, windows, and all other work normally furnished by the pre-engineered building sub contractor. Does not include sliding or roll-up doors.

118 Vault — Gross Floor Area — Sq. Ft.

Includes walls, ceiling construction and floor slab. Only includes work incurred to construct vault. See system 452 for vault door.

ARCHITECTURAL

141 Roofing — Roof Area — Sq. Ft.

Includes roof curbing, roof insulation, roofing, gravel stops, gutters, and downspouts, flashing, skylights, roof-access hatches, and other related roofing items. Roof structure is included in 116.

142 Exterior Walls — Exterior Wall Area — Sq. Ft.

Includes bearing or non bearing walls from inside rough wall to outside finish wall, parapet walls, damp proofing, flashing, insulation waterproofing, balcony walls, and handrails. Includes exterior finishes, caulking, and painting.

143 Interior Walls — Interior Wall — Sq. Ft.

Includes partitions, bearing or non bearing walls, extending from floor-to-floor or floor-to-ceiling excluding finishes. Includes masonry walls, steel or wood stud walls, studs only and excludes painting, gypsum board, or other applied finish.

144 Interior Finishes — Gross Building Area — Sq. Ft.

Includes finishes applied to floors, walls, ceilings, stairs and ramps such as; wall covering, resilient flooring tile, terrazzo, wood, carpeting, acoustical tile, plaster, paint, gypsum board, suspended ceiling systems, caulking, and all related trim work.

145 Doors — Surface Area one Side — Sq. Ft.

Includes all exterior and interior doors, frames, hardware, caulking, and painting, see 45X for 451 Hangar Doors, 452, Vault Doors, and 453 Blast Doors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

146 Windows — Surface Area One-Side — Sq. Ft.

Includes windows, glazed wall systems, glazing, caulking, and painting.

147 Specialities — Gross Bldg. Area — Sq. Ft.

Includes chalk and tack boards, signs and plaques, flag poles, telephone enclosures, ladders, lockers, storage shelving, toilet and bath accessories, fireplaces, compartments and cubicles, movable partitions, identifying devices, protective covers, postal specialities, scales, exterior sun control devices, and wardrobe specialties, excluding special mechanical or electrical equipment.

148 BEQ Wardrobes — Number — Each

Includes furnishing and installing prefabricated wardrobes and chests for BEQs.

DEMOLITION INTERIOR

171 Demolition Interior — Gross Building Area — Sq. Ft.

Includes all interior building demolition connected with new construction or alternatives. Also include any work on, or in, the exterior wall. Do not include complete building demolition, see System 84X.

172 Asbestos Removal Interior — Total Cost — Lump Sum

Includes costs for removal of asbestos from any interior areas of buildings to be rehabilitated. Includes all costs for sealing off areas, asbestos removal, monitoring, testing, disposal, change areas, disposal suits, respirators, and other related costs. (See System 844 for exterior asbestos removal.)

PLUMBING

211 Plumbing-Domestic — Number of Fixtures — Each

Includes water supply and treatment, waste water disposal and treatment, plumbing equipment, fixtures and trim, and insulation, i.e., hot and cold water pipes, waste, soil and vent pipes, hot water heaters, water coolers, and floor drains.

212 Domestic Hot Water Solar — Capacity — MBTH

Includes piping, solar panels, supports and controls necessary for solar heated domestic hot water system. Does not include piping normal to System 211 Plumbing-Domestic. When the solar system heats both the building and domestic hot water use System 226.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

213	Roof Drainage	Number of Drains	Each

Includes roof drains, pipes and fittings.

SPACE CONDITIONING

221	Heating, Ventilation, and Air Conditioning	Capacity	MBTU or Tons

Includes heating, ventilating and air conditioning systems, i.e., heat generating equipment, refrigeration, air distribution, piping, controls and instrumentation, and insulation.

222	Air Conditioning	Capacity	Tons

Includes air conditioning systems, i.e., refrigeration, air distribution, piping, controls and instrumentation, and insulation.

223	Heating and Ventilation	Capacity	MBTH

Includes heating, ventilating systems, i.e., heating generating equipment, air distribution, piping, controls and instrumentation, and insulation. See System 224 for ventilation only.

224	Mechanical Ventilation	Fan Capacity	CFM

Includes fans, supports, duct work and controls for a mechanical ventilation system. See System 223 for combined heating and ventilation.

225	Dehumidification	Capacity	PPH

Includes equipment, duct work and controls for a dehumidification system. Use system 221 or 222 where dehumidification is an integral part of an air conditioning system.

226	Heating, Solar	Collector Area	Sq. Ft.

Includes piping, solar panels, supports, and controls necessary for a solar-heated building heating system. Does not include work normal to the building and included under system 221 or 223. (See note under system 212.)

WEIGHT HANDLING EQUIPMENT

231	Bridge Cranes	Capacity	Tons

Includes—Crane rails, bridge, hoists, trolleys, and electricification. Power supply at hoist area only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

232 Monorails — Capacity — Tons

Includes rail, hoist, trolley and electrification, and air supply. Power supply at hoist area only.

233 Fixed Hoist — Capacity — Tons

Includes hoist, support electrification and air supply. Power supply at hoist area only.

234 Vehicle Lifts — Capacity — Tons

Includes lift, pit, electrification and air supply. Power supply at hoist area only.

235 Elevators — Number of Stops — Each

Passenger of freight elevators including conveyor cab, doors, controls, and rails.

236 Escalators — Flights — Each

Includes equipment and power supply at escalator area.

237 Conveyors — Capacity — Tons/hr

Includes equipment, foundations, controls and power supply at conveyor area only.

SPECIAL MECHANICAL PIPING

241 Vacuum — Capacity — CFM

Includes vacuum pump, piping, connectors, and controls. (Industrial or medical.)

242 Oxygen — Outlets — Each

Includes piping, tanks, and accessories.

243 Nitrogen — Outlets — Each

Includes piping, tanks, and accessories.

244 Compressed Air — Capacity — CFM

Includes air compressors, dryers, after coolers, piping, controls, valves, gauges, and filters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

245 Interior Steam — Capacity — PPH

Includes steam generator, piping, and outlets. Does not include steam source that serves other uses. Do not use this system for steam heating.

SPECIAL MECHANICAL OTHER

251 Dust Collection — Capacity — CFM

Includes equipment supports and duct work associated with an interior dust collection system.

252 Engine Exhaust — Fan Capacity — CFM

Includes door exhaust ports, fans, and exhaust duct (flexible and rigid).

INTERIOR FIRE PROTECTION

271 Sprinklers — Gross Area Sprinkled — Sq. Ft.

Includes sprinkler pipe, fittings, valves, pumping equipment, tanks, sprinkler heads, and controls.

272 AFFF — Area Protected — Sq. Ft.

(Aqueous Film Forming Foam)
Includes equipment, piping, and controls necessary for an AFFF System. Includes storage tanks and foam when only the facility being priced is served.

273 Carbon Dioxide — Storage Capacity — Pounds

Includes storage cylinders, hose reels, piping, nozzles, and controls.

274 Halon — Storage Capacity — Pounds

Includes storage cylinder, controls, piping, and nozzles.

275 Fire Alarm — Gross Bldg. Area — Sq. Ft.

Includes control panels, power supplies, detectors, manual alarm station, alarm devices, conduit, and wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

POWER & LIGHTING

311	Power	Connected Load	KW

Includes all interior distribution for power and special electrical systems, i.e., switch boards, transformers, motor controls, distribution switches, motor starters, feeders, branch-circuit wiring and devices, panels, and lightning protection. Exclude all interior distribution for lighting fixtures and emergency lighting, i.e., light fixtures, panels, branch circuit wiring, and devices for lighting.

312	Lighting	Gross Bldg. Area	Sq. Ft.

Includes all interior lighting fixtures, exit and emergency lighting, branch circuit wiring, conduit, and devices for light fixtures only. Panels are included in System 311.

313	400 HZ	Converter Capacity	KW

Includes frequency changer, control system, wire, conduit, and devices to install a 400 HZ power system.

314	Direct Current	Converter Capacity	KW

Includes rectifier battery charger, battery bank, wire, conduit, and devices to install a direct current power system.

315	Uninterruptable Power Supply	Converter Capacity	KVA

Includes battery bank, rectifier, and static inverter for solid state equipment and flywheel, motor, generator, and battery bank for rotary equipment plus all associated wiring, conduit, switches, panels, and switchgear.

316	Electrical Generators	Equipment Capacity	KW

Includes diesel, gas and gasoline engines, day tanks, valves, piping and fittings, generators, operating and synchronizing controls, transfer switches, and wiring.

SPECIAL ELECTRICAL PROTECTION

321	Grounding	Gross Building Area	Sq. Ft.

Includes cable, ground rods, clamps, and connections for grounding system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

322 Lighting Protection — Gross Building Area — Sq. Ft.

Includes base plate, lighting mast, concrete foundations, ground rods, cables, and connections for a complete building lighting protection system.

SPECIAL ELECTRICAL/ELECTRONICS

331 Security Detection — Gross Bldg. Area — Sq. Ft.

Includes control panels, power supplies, detectors, alarm stations, alarm devices, and wire conduit.

332 Energy Monitoring and Control System — Points of Controls — Each

Includes control panels, devices, wiring, and conduit.

333 Computer Communication — Cable Run — Lin. Ft.

Includes wiring, cable tray, and devices necessary for a complete computer communication system.

COMMUNICATION

341 Telephone — Gross Bldg. Area — Sq. Ft.

Includes control panels, devices, wire, and conduit.

342 Intercom — Gross Bldg. Area — Sq. Ft.

Includes master stations, substations, control panels, speakers, wire, and conduit. Includes System 344 public announcement when it is combined with the intercommunication system.

343 Television — Gross Bldg. Area — Sq. Ft.

Includes antenna, booster amplifiers, circuit wiring, conduit, cameras, control consoles, and monitors.

344 Public Announcement — Gross Bldg. Area — Sq. Ft.

Includes master stations, substations, control panels, speakers, wire, and conduit. See System 342 for combined intercommunication and Public Announcement systems.

345 Master Clock — Number of Outlets — Each

Includes wire, conduit, and devices for a master clock system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

4XX Special Equipment

Note: Equipment may be obtained for various funding sources and by different procurement methods. See Standard System Descriptions 4x5 - 4x6 Use: Install government furnished _____ Equipment to allow for contractor cost of installation for government furnished equipment; use Government furnished _____ Equipment to allow for the cost of procuring equipment when financed from construction funds.

MEDICAL EQUIPMENT

411 Hospital Equipment — Gross Bldg. Area — Sq. Ft.

Includes contractor furnished and installed built-in hospital equipment. Mechanical and electrical work are not included.

412 Dental Equipment — Number of Chairs — Each

Includes contractor furnished and installed built-in dental equipment. Mechanical and electrical work are not included.

415 Install Government Furnished Medical Equipment

416 Government Furnished Medical Equipment

FOOD SERVICE EQUIPMENT

421 Food Service Equipment — Pieces of Food Service Equip — Each

Includes contractor furnished and installed built-in food service equipment.

425 Install Government Furnished Food Service Equipment

426 Government Furnished Food Service Equipment

MISCELLANEOUS EQUIPMENT

431 Chapel Equipment — Gross Bldg. Area — Sq. Ft.

Includes contractor furnished and installed built-in chapel equipment.

432 Movie Theater Equipment — Gross Bldg. Area — Sq. Ft.

Includes contractor furnished and installed built-in equipment for showing films, such as projection booth windows, curtains, and projection screens.

Small rear projection screens should be included under 491 Other Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

433 Rifle Range Equipment — Firing Lanes — Each

Includes targets, guides, baffles, and bullet stops.

434 Laboratory Equipment — Number Pieces — Each

Includes case work, benches, testing equipment apparatus, and other equipment designated as laboratory equipment. Mechanical and electrical work not included.

435 Install Government Furnished Laboratory Equipment

436 Government Furnished Laboratory Equipment

437 Waste Disposal Equipment — Equipment Capacity — PPH

Includes built-in compactors, incinerators, and shredders with installation cost. Enclosures, mechanical, and electrical work not included.

SPECIAL WAREHOUSE EQUIPMENT

441 Special Warehouse Equipment — Gross Bldg. Area — Sq. Ft.

Includes built-in storage racks and conveying systems, in rack special sprinkler system, dock leveler, dock door seals, and rubber bumpers with installation cost. Building mechanical and electrical work not included.

445 Install Government Furnished Warehouse Equipment

446 Government Furnished Warehouse Equipment

SPECIAL CONSTRUCTION

451 Hanger Doors — Surface Area One Side — Sq. Ft.

Includes tracks, guides, operators doors, and controls. Does not include structural steel supports, concrete. Electrical work at door only.

452 Vault Doors — Number — Each

Includes vault door and frame.

453 Blast Doors — Surface Area One Side — Sq. Ft.

Includes doors, frames track, operators, and controls.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

454 Raised Floor — Area of Raised Floor — Sq. Ft.

Includes floor system, panel covering such as carpet, ramps, steps, closure panels, cable cutouts, and air flow panels, with installation cost. Railing to be a speciality item.

455 Radio Frequency Shielding — Surface Area Shielded — Sq. Ft.

Includes wall floors and ceiling panels, doors, filters, filter cabinets, wave guides, and enclosures for telephone cypher locks, and fire alarm pull box with installation cost. Mechanical and electrical services not included.

456 Bowling Lanes — Number of Lanes — Each

Includes lanes and installation with pinsetter, returns, and other associated equipment.

457 Paint Spray Booth — Floor Area - Sq. Ft.

Includes booth and equipment procured with booth. Mechanical and electrical hookup at booth area area included.

OTHER EQUIPMENT

491 Other Miscellaneous Equipment — Total Cost — Lump Sum

Includes special equipment not included above. Also refer to System 147 Specialities.

492 Snow Melting — Area Protected — Sq. Ft.

495 Install Government Furnished Miscellaneous Equipment

496 Government Furnished Miscellaneous Equipment

499 Building work not included elsewhere — Total Cost — Lump Sum

Used when partial data is loaded and it is desirable to combine several systems of no historical value. (Rehabilitation and Alteration projects are the ones for which this system is normally used, very seldom, if ever, is this used for new work.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUPPORTING FACILITIES

UTILITIES

EXTERIOR ELECTRICAL

511 Electrical Distribution, Primary — Length of Run — Lin. Ft.

Includes overhead power distribution, i.e., poles, crossarms, insulators, guying, terminations, lightning protection, wire and cable, and underground distribution, i.e., excavation and backfill, concrete encased duct bank, direct burial duct, manholes, handholes, cable, terminations, stress cones, and grounding. All for primary distribution to transformer or substation.

512 Electrical Distribution, Secondary — Length of Run — Lin. Ft.

Includes overhead power distribution, i.e. poles, crossarms, insulators, guying, terminations, lighting protection, wire and cable and underground distribution, i.e., excavation, backfill concrete encased and direct burial duct bank, manholes, handholes, cable terminations, stress cones, and grounding.

513 Substation/Transformer — Capacity — KVA

Includes overhead transformer, i.e. fuse cutouts, transformers, substation, including concrete fence, steel framing, fencing and enclosure, and pad mounted transformer; i.e. disconnect services, transformers, substation including concrete steel framing, fencing, and enclosure.

514 Area Lighting — Number of Fixtures — Each

Includes poles, fixtures, excavation and backfill, concrete work, wire, duct, and conduit.

515 Airfield Lighting — Length of Run — Lin. Ft.

Includes excavation and backfill, duct, conduit, devices, transformer, relays, and wiring necessary to install the airfield lighting.

516 Lightning Protection — Points of Protection — Each

Includes base plate, lighting mast, concrete foundations, ground rods, cables, and connections for a complete exterior lighting protection system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

EXTERIOR COMMUNICATION

521 Fire Alarm — Length of Run — Lin. Ft.

Includes excavation, backfill, duct, conduit, devices, and wire necessary to install an exterior fire alarm system.

522 Security Alarm — Length of Run — Lin. Ft.

Includes excavation and backfill, duct, conduit, and junction boxes. Wiring cable, devices, and their installation are not MCON funded.

523 Communication, Telephone — Length of Run — Lin. Ft.

Includes excavation and backfill, duct, conduit, devices and wire necessary to install an exterior communication system.

524 Exterior EMCS — Length of Run — Lin. Ft.

Includes cable, duct, conduit necessary for EMCS systems outside the building 5-foot line.

EXTERIOR MECHANICAL

541 Heat Distribution, Overhead — Length of Run — Lin. Ft.

Includes supports, piping, insulation, and valves to install overhead steam and hot water distribution systems outside the 5-foot line.

542 Heat Distribution, Underground — Length of Run — Lin. Ft.

Includes excavation, backfill, manholes, supports, piping insulation, and valves to install underground steam and hot water distribution systems outside the 5-foot line.

543 Chilled Water Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, manholes, supports, piping, insulation, and valves to install chilled water distribution systems outside the 5-foot line.

544 Condensate Collection (only) — Length of Run — Lin. Ft.

Includes excavation, backfill, manholes, supports, piping, and valves to install a condensate collection system.

545 Gas Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, piping, valves, and other miscellaneous work to install a complete gas system outside the 5-foot line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

546 Compressed Air Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, piping, valves, and devices to install a complete compressed air distribution system outside the 5-foot line.

547 Fuel Distribution — Length of Run — Lin. Ft.

Includes excavation, backfill, piping, pipe coatings, valves, and devices to install a complete fuel distribution system outside the 5-foot line.

548 Exterior Foam System — Length of Run — Lin. Ft.

Includes distribution piping, foam storage and proportioning equipment, booster pump, and emergency power.

551 Water Distribution — Length of Run — Lin. Ft.

Includes complete potable water distribution system, i.e., utility service connections, fire hydrants, excavation and backfill, pipe, valves, and fittings. Use when domestic and fire water System 552 are combined in one line.

552 Fire Protection Water Distribution — Length of Run — Lin. Ft.

Includes complete fire water distribution system, i.e., utility service connection fire hydrants, excavation and backfill, pipe, valves, and fittings.

553 Salt Water Distribution — Length of Run — Lin. Ft.

Includes complete salt water distribution system, i.e., utility service connections, fire hydrants, excavation and backfill, pipe, valves, and fittings.

554 Sanitary Sewers — Length of Run — Lin. Ft.

Includes complete sanitary sewer system, i.e., utility service connections, excavation and backfill, sheeting and shoring, dewatering, pipe and fittings, manholes, cleanouts, septic disposal and process, and acid waste system outside the 5-foot line.

BULK STORAGE

561 Fuel Storage, Bulk — Capacity — BBL

Includes tanks, foundation, coatings, fire protection, and level controls. Does not include piping or other special foundation work.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

562 Fuel Storage, Ready Issue — Capacity — Gal

Includes excavation, backfill, gravel fill, concrete, tie downs, tanks, accessories, piping at tank, coatings, and monitoring wells. (Does not include long runs of supply piping.)

563 Water Storage — Capacity — Gal

Includes ground level and elevated storage tanks, foundation, coatings, lighting, valves, and piping required at tanks. Does not include piling or other special foundation work.

FUELING

571 Vehicle Fueling — Number of Outlets — Each

Includes concrete island, pumps, piping to 5-foot of tank and electrical work to panel.

572 Aircraft Fueling — Number of Hydrants — Each

Includes hydrants, filter, supports, loading arms, piping, and canopy. System includes truck loading stand for loading of fueling trucks.

573 Marine Fueling — Number of Outlets — Each

Includes hydrants, filters, supports, loading arms, piping, and canopy.

PUMPING

581 Fuel Pumping Station — Pump Capacity — GPM

Includes all work to install a complete fuel pumping station to the 5-foot line. Includes excavation and backfill, pit, pump, piping, valves, structure and electrical work at pump, and other miscellaneous work.

582 Water Pumping Station — Pump Capacity — GPM

Includes all work to install a complete water pumping station to the 5-foot line. Includes building, pit excavation and backfill, piping, pumps, electrical, and other miscellaneous work.

583 Fire Booster Pump — Pump Capacity — GPM

Includes all work to install a complete water booster pumping station to the 5-foot line, if within a separate building. If pump is contained within building, include in System 271. Includes pump, piping valves, electrical work at pump, and other miscellaneous work to install a complete fire booster pump.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

584 Sewage Pump Station — Pump Capacity — GPM

Includes all work to install a complete sewage pumping station to the 5-foot line. Includes building, wet well, dry well, excavation and backfill, piping, pumps, electrical, and other miscellaneous work.

585 Sewage Lift Station — Pump Capacity — GPM

Includes all work to install a complete sewage lift station to the 5-foot line. Includes building, wet well, excavation, backfill, piping, pumps, electrical, and other miscellaneous work.

TREATMENT FACILITY

591 Water Treatment — Capacity (Million gal/day) — MGD

Includes excavation, backfill, piping, pumps, equipment, controls, and other necessary accessories to install a complete water treatment system.

592 Domestic Sewage Treatment — Capacity (Million gal/day) — MGD

Includes excavation, backfill, piping, pumps, equipment, controls, and other necessary accessories to install a complete domestic sewage treatment system.

593 Industrial Waste Treatment — Capacity (Million gal/day) — MGD

Includes excavation, backfill, piping, pumps, equipment, controls, and other necessary accessories to install a complete industrial waste treatment system.

EQUIPMENT BUILDING

611 Mechanical Equipment Building — Gross Bldg. Area (MEB) — Sq. Ft.

Includes all work to construct a mechanical equipment building as part of a larger building project. Includes building construction, mechanical, and electrical work.

612 Electrical Equipment Building — Gross Bldg. Area (EEB) — Sq. Ft.

Includes all work to construct an electrical equipment building as part of a larger building project. Includes building construction, mechanical, and electrical work.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

SUPPORTING STRUCTURES MISCELLANEOUS

621	Security Gate	Opening Width	Lin. Ft.

Includes mechanically operated gate, foundation, supports, operating mechanism controls, and electrical work at gate.

622	Guard House	Gross Bldg. Area	Sq. Ft.

Includes structure, canopy, apron, curb, lighting, and mechanical and electrical work. Use for entrance gate structure as well as other guard house. This system is not intended for large structures that are a primary facility.

POLLUTION ABATEMENT STRUCTURES

641	Oil Water Separators	Capacity	Gal.

Includes excavation, backfill, concrete structure, miscellaneous metals, thru wall piping, and other work necessary to install a complete oil water separator.

642	Electro-Static Precipitator	Air Flow	SCFM

Includes all work to install precipitator. Includes breeching (inlet and outlet), structural supports, control system, and ash hopper.

SHOP SUPPORT STRUCTURES

651	Vehicle Grease Rack	Number of Vehicles Racks	Each

Includes all work necessary to install an exterior grease rack. Includes excavation, backfill, concrete, miscellaneous metal, and other required items.

652	Vehicle Wash Platform	Number of Vehicles Bays	Each

Includes all work to install a complete vehicle wash platform. Includes excavation, backfill, paving, piping, accessories, and electrical work to edge of platform. Does not include distribution piping.

AIRCRAFT CLEANING FACILITY

661	Aircraft Washing Facility	Paved Area	Sq. Yd.

Includes paving, drainage, water supply, washing equipment controls, and other necessary items to install a complete aircraft washing facility. Do not include access paving or long utility supply runs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

662 Aircraft Rinsing Facility — Paved Area — Sq. Yd.

Includes paving, drainage, water supply rinsing equipment, controls, and other necessary items to install a complete aircraft rinsing facility. Do not include access paving or long utility supply runs.

SITE PREPARATION & IMPROVEMENTS

ROADS

711 Concrete Roads — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, fine grading, compaction, sub-base course, base course, edge forms, concrete reinforcement, finishing, expansion and control joints, rails and barriers, wheels stops, and pavement markings.

712 Flexible Roads — Paved Area — Sq. Yd.

Includes bituminous concrete paving, tack and seal coats, curbs, curbs and gutters, subgrade preparation, fine grading, compaction, sub-base course, base course, wearing course, finish course, rails and barriers, wheels stops, and pavement markings.

713 Overlay Road — Paved Area — Sq. Yd.

Includes flexible paving overlay of existing roads. Includes cleaning, sweeping, leveling courses, minor patching, tack coat, and pavement marking.

714 Surface Treatment - Road — Paved Area — Sq. Yd.

Includes bituminous surface treatment over existing pavement or base course. Includes cleaning, sweeping, minor patching, tack or prime coat, and pavement marking.

715 Slurry Seal Road — Paved Area — Sq. Yd.

Includes slurry seal over existing road. Includes cleaning, sweeping, minor patching, and pavement marking.

PARKING

721 Concrete Parking — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, fine grading, compaction, sub-base course, base course, edge forms, concrete reinforcement, curbing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

722 Flexible Parking — Paved Area — Sq. Yd.

Includes bituminous concrete paving, tack and seal coats, curbs, curbs and gutters, fine grading, compaction, sub-base course, base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings.

723 Overlay Parking — Paved Area — Sq. Yd.

Includes flexible paving overlay of existing parking areas. Includes cleaning, sweeping, leveling course, minor patching, tack coat, and pavement marking.

724 Surface Treatment - Parking — Paved Area — Sq. Yd.

Includes bituminous surface treatment over existing pavement or base course. Includes cleaning, sweeping, leveling courses, minor patching, tack or prime coat, and pavement marking.

725 Slurry Seal Parking — Paved Area — Sq. Yd.

Includes slurry seal over existing parking area. Includes cleaning, sweeping, minor patching, and pavement marking.

WALKS

741 Concrete Walks — Paved Area — Sq. Yd.

Includes concrete paving, base course, edge forms, concrete reinforcement, finishing, edging, and exterior steps.

742 Bituminous Walks — Paved Area — Sq. Yd.

Includes bituminous paving, base course, edging, and exterior steps.

743 Special Walks — Paved Area — Sq. Yd.

Includes brick paving, limestone paving, flagstone paving, other paving materials, base course, and exterior steps.

AIRCRAFT PAVING CONCRETE

751 Concrete Runways — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, edge forms, reinforcing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings when constructed for aircraft runways.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

752 Concrete Taxiways — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, edge forms, reinforcing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings when constructed for aircraft taxiing.

753 Concrete Aprons — Paved Area — Sq. Yd.

Includes concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, edge forms, reinforcing, finishing, expansion and control joints, rails and barriers, wheel stops, and pavement markings when constructed for aircraft parking.

754 Repairs Concrete Paving — Paved Area — Sq. Ft.

Includes removing and replacing individual slabs, partial slab removal and replacement, spall repairs, full depth repairs, and other miscellaneous patching.

755 Crack and Joint Repair — Length of Repair — Lin. Ft.

Includes cleaning and resealing joints and cracks repairs.

AIRCRAFT PAVING FLEXIBLE

761 Flexible Runways — Paved Area — Sq. Yd.

Includes bituminous concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course,wearing course, finish course, rails and barriers, wheel stops, and pavement markings when constructed for aircraft runways.

762 Flexible Taxiways — Paved Area — Sq. Yd.

Includes bituminous concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings when constructed for aircraft taxiing.

763 Flexible Aprons — Paved Area — Sq. Yd.

Includes bituminous concrete paving, curbs, curbs and gutters, subgrade preparation, compaction, base course, sub-base course, wearing course, finish course, rails and barriers, wheel stops, and pavement markings when constructed for aircraft parking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

764 Repairs Aircraft Flexible Paving — Paved Area Patched — Sq. Yd.

Includes removing and replacing small area of flexible paving including sub-base course, base course, tack or prime coat, and surface material.

765 Aircraft Paving Overlay — Paved Area — Sq. Yd.

Includes flexible overlays of aircraft paving. Includes cleaning, sweeping, tack coat, minor patching, leveling courses, and pavement marking.

766 Aircraft Paving Slurry Seal — Paved Area — Sq. Yd.

Includes slurry seal applied over existing aircraft paving. Includes cleaning, sweeping, minor patching, tack coat, and pavement markings.

INCIDENTAL PAVING WORK

771 Pavement Milling — Milled Area — Sq. Yd.

Includes bituminous and concrete milling with removal and/or disposal cost. Savings from recycled materials should be reflected in other systems.

EARTHWORK

811 Earthwork — Volume — Cu. Yd.

Includes site grading, site excavation, soil stabilization, soil treatment, and site clearing.

812 Borrow — Volume in Place — Cu. Yd.

Includes all work to provide off site borrow material compacted in place.

813 Topsoil, Seed, Sod — Area Graded — Sq. Yd.

Includes fine grading and leveling, fertilizer and limestone application, spreading and leveling topsoil, seeding, mulching, and sodding.

814 Landscaping — Area Planted — Sq. Yd.

Includes trees, shrubs, ground covers, and planters.

815 Site Irrigation — Number Sprinkler Heads — Ea.

Includes underground piping, sprinkler heads, and controls to install a site irrigation system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

816 Surcharge — Fill in Surcharge — Cu. Yd.

Includes cost for obtaining, placing, monitoring, and removing to disposal area all required surcharge. If used for site fill does not include cost of compaction.

817 Earth Replacement — Earth Replaced (In place Measurement) — Cu. Yd.

Includes cost of removing and disposal of existing material, obtaining, placing, compacting, and proof rolling new material for improved bearing capacity. (See 846 for contaminated earth removal.)

818 Environmental Protection — Area Protected — Acres

Includes all cost for temporary environmental protection work required due to clearing, grubbing, earthwork, or other related work. (Measure to nearest tenth of acre.)

SITE IMPROVEMENTS

821 Site Improvements — Area Developed — Sq. Yd.

Includes retaining walls, terrace and perimeter walls, signs, site furnishings, fountains, pools and watercourse, flagpoles, and other miscellaneous related items.

SITE PREPARATION

831 Site Dewatering (Major) — Header Pipe — Lin. Ft.

Includes all costs for site dewatering where the dewatering is a major item and is required for several systems. Includes furnishing, installing, operating, and removal of well pointing system.

DEMOLITION

841 Remove Utilities — Length of Run — Lin. Ft.

Includes excavation, utility removal, capping, and backfill as required to remove existing utility lines.

842 Remove Paving and Slabs — Area Removed — Sq. Yd.

Includes removal and disposal of material from both bituminous and portland cement concrete paved areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

843 Remove Structures — Structure Volume — Cu. Ft.

Includes complete cost for removal of structure, foundation, and interior equipment. Removal of hazardous materials is not included. See Systems 844 and 845.

844 Remove/Dispose of Asbestos (Exterior) — Total Cost — Lump Sum

Includes costs for removal of asbestos from any exterior areas including buildings to be demolished. Included are costs for sealing off areas, asbestos removal, monitoring testing disposal, change areas, disposable suits, respirators, and other related costs. (See System 172 for interior asbestos removal.)

845 Remove/Dispose of P.C.B. — Total Cost — Lump Sum

Includes costs for removing and disposing of P.C.B. contaminated areas. Included are costs for sealing off area, removal of contaminated materials, monitoring, testing change area, disposal suits, respirators, disposal, and other related cost.

846 Remove/Dispose of Contaminated Earth — Earth Removed — Cu. Yd.

Includes cost of removing and disposing of existing industrial and hazardous materials.

STORM DRAINAGE

851 Storm Drainage Piping — Length of Run — Lin. Ft.

Includes utility service connections, excavation and backfill, sheeting and shoring, dewatering, pipe and fittings, manholes, catch basins, curb inlets, dry wells, ditches and culverts, retention ponds, and headwalls.

852 Box and Arch Culvert — Length of Culvert — Lin. Ft.

Includes excavation, backfill, forming, concrete, reinforcing steel accessories, steel arch, and bedding materials.

853 Drainage Facing Materials — Surface Area — Sq. Yds.

Includes stone riprap, fabrics, and other materials used as facing materials for outfalls and slope protection from storm water runoff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

FENCING

861 Fencing (Perimeter) Length of Fence Lin. Ft.

Includes footings, posts, fencing materials, gates, and turnstiles for perimeter fencing. Includes station perimeter and individual facility. Does not include fencing for fields in Systems 872, 874, 875. See 621 for mechanically operated security gate.

862 Fencing (Alarm) Length of Fence Lin. Ft.

Includes footing post fencing materials gate and turnstiles. When fence is part of a security alarm system.

RECREATION EQUIPMENT / FIELDS

871 Playground Equipment Pieces of Equipment Each

Includes swings, slides, and other items of recreation-type equipment for childrens' playgrounds.

872 Playing Field Equipment Pieces of Equipment Each

Includes costs for playing field equipment not shown elsewhere.

873 Tennis Courts Number of Courts Each

Includes paving, fencing, lighting, and nets for a complete tennis court.

874 Softball/Baseball Fields Number of Fields Each

Includes grading, topsoil and seeding drainage, infield, dugouts, fencing, and lighting as required for a complete softball or baseball field.

875 Football/Soccer Fields Number of Fields Each

Includes grading, topsoil and seeding, drainage, fencing, goals, benches, and lighting as required for a complete football or soccer field.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

HEAVY CONSTRUCTION

SPECIAL BUILDING FOUNDATIONS

911	Land Piling - Driven	Length of Piling	Lin. Ft.

Piling driven from land based equipment used for building foundations or bulkhead tieback systems. Includes mobilization and demobilization, pile cutoff, and piling. Includes pile tests if not a separate bid item.

912	Caissons	Number of Caissons	Each

Includes excavation, concrete, and reinforcing for foundation caissons.

913	Pressure Injected Footings	Number of Footings	Each

Includes drilling, concrete, and reinforcing a complete pressure injected footing system.

914	Vibrofloation	Number of Locations	Each

Includes specialized vibratory probe for penetration and extraction, and furnishing and placing sand backfill.

915	Chemical Soil Stabilization	Number of Locations	Each

Includes grouting equipment and specialized chemicals for injection into unstable sub-surface materials.

916	Dynamic Consolidation	Number of Locations	Each

Includes equipment, consolidation effort, sand, backfill, and testing.

917	Piling - Cast-in-Place	Length of Piling	Lin. Ft.

Includes drilling, casing concrete, and reinforcing for a complete cast-in-place piling system.

RAILROAD

921	Track Work - Railroad	Length of Track	Lin. Ft.

Includes subgrade preparation, ballast, ties, rail, switches, and other accessories for a complete track system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

MARINE STRUCTURES PIERS

931 Piling - Marine — Length of Piling — Lin. Ft.

Piling driven from floating equipment or land equipment used to support piers or similar waterfront structures. Includes mobilization and demobilization, pile cutoff and piling. Includes pile tests if not a separate bid item.

932 Dolphins — Number of Dolphins — Each

Includes piling, cap and accessories for a complete dolphin.

933 Med Mooring — Total Cost — Lump Sum

Includes chain, anchors, buoys and other accessories for a complete Med mooring.

934 Pier Deck — Area of Deck — Sq. Ft.

Includes mobilization and demobilization, cast-in-place or precast concrete pile caps, trench sections, deck panels, manholes or transformer vaults, embedded conduit, drains, and expansion joints.

935 Fenders — Length of Fender — Lin. Ft.

Includes mobilization and demobilization, wales, chocks, fender piles, rubber fenders, pneumatic fenders, and associated hardware.

936 Pile Clusters — Number of Clusters — Each

Includes piles and accessories required for a complete pile cluster.

937 Marine Specialties — Total Cost — Lump Sum

Includes mobilization and demobilization, bollards, cleats, brows, camels, oil booms, and other marine specialities.

MARINE STRUCTURES SPECIAL

941 Bulkheads/Seawalls — Total Face Area — Sq. Ft.

Includes mobilization and demobilization, sheet piles, concrete cap, relieving platform, and tieback system.

942 Erosion Protection Marine — Area Covered — Sq. Yd.

Includes mobilization and demobilization, filled bags, concrete and asphalt surfaces, ground mats, sand fences, precast structural items (dolos, tetrapads, etc.), and filter cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

943 Riprap (Marine) — Area Covered — Sq. Yd.

Includes bed preparation, all layers of stone, and other required work to place riprap for slope protection from wave action.

MARINE REPAIRS

951 Underdeck Repair — Total Cost — Lump Sum

Includes mobilization and demobilization, repair of cracks, spalls, beam, and cap repairs.

952 Pile Repairs Marine — Length Repaired — Lin. Ft.

Includes costs for removal and replacement of existing concrete including forms and reinforcing and repair for timber piling. All for marine structures.

DREDGING

961 Mobilization/Demobilization Dredging — Total Cost — Lump Sum

Includes outfitting and moving equipment to and from site, dike work, spillways, pipeline laying, and other work not directly associated with actual moving of dredged materials.

962 Hydraulic Dredging — Volume — Cu. Yd.

Includes costs for actual moving of material by hydraulic means from in-place location to disposal area.

963 Bucket Dredging — Volume — Cu. Yd.

Includes pumping of material from scow to disposal area.

TOWERS / ANTENNAS

971 Towers Length — Lin. Ft.

Includes foundations, ground screens, tower lighting, and accessories.

972 Antennas — Total Cost — Lump Sum

Includes cost for installing or repairing antennas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

TUNNEL / PIPE JACKING

981 Tunneling. Total Cost Lump Sum

Includes drilling equipment, excavation, disposal, liners, conduits, and other required work.

982 Pipe Jacking Length Jacked Lin. Ft.

Includes jacking pits, jacking equipment, conduit, and other required items.

HEAVY CONSTRUCTION MISCELLANEOUS

991 Bridges Deck Area Sq. Ft.

Includes foundation, supports, caps, beams, deck, rails, lights, and accessories required for a complete bridge. Foundation piling not included.

992 Overpasses Deck Area Sq. Ft.

Includes foundation, supports, caps, beams, deck, rails, lights, and accessories required for a complete bridge. Foundation piling not included.

999 Supporting Facilities Total Cost Lump Sum

Includes all work outside the building 5-foot line. This system is not used for estimates.

23.2 Award Cost Data. See Appendix I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

APPENDIX J

AWARD COST DATA
(Printed 09 June 1988)

ACF = 1.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

ACF = 1.0

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
116-15	ACFT RINSE FAC	CAMP PENDLETON CALIFORNIA	1.14	2581	88/02/12	3,000	SF	$80.12	$83.97
116-15	AIRCRAFT RINSE FACILITY	CHERRY POINT NC	0.87	2565	87/09/18	1,710	SY	$121.85	$161.60
116-15	AIRCRAFT RINSE FACILITY	MCAS BEAUFORT SC	0.94	2557	87/08/19	910	SY	$95.89	$106.25
		AVERAGE OF ADJUSTED UNIT COST	$117.27						
		AVERAGE FACILITY SIZE	1873 SF						
116-56	COMB ARCRFT ORD LOAD AREA	CHERRY POINT NC	0.90	2438	85/06/07	97,263	SY	$36.92	$51.89
116-56	COMBAT AIRCRAFT ORD	MCAS, KANEOHE BAY, HI	1.34	2418	84/12/28	13,300	SY	$90.75	$70.13
		AVERAGE OF ADJUSTED UNIT COST	$61.01						
		AVERAGE FACILITY SIZE	55281 SY						
116-65	TACTICAL SUPPORT VAN PADS	MCAS KANEOHE BAY, HI	1.34	2510	86/12/31	214,200	SF	$23.09	$21.61
116-65	TACTICAL SUPT VAN PADS	TUSTIN CALIFORNIA	1.20	2579	88/01/29	41,472	SF	$34.74	$29.89
116-65	TACTICAL SUPPORT VAN PADS	EL TORO CALIFORNIA	1.20	2568	87/10/08	1	LS	$943,422.00	$741,330.68
		AVERAGE OF ADJUSTED UNIT COST	$247,127.39						
		AVERAGE FACILITY SIZE	85224 SF						
125-10	FUEL LINE	NORFOLK VIRGINIA	0.95	2581	88/02/04	2,689	LF	$132.01	$164.31
		AVERAGE OF ADJUSTED UNIT COST	$164.31						
		AVERAGE FACILITY SIZE	1863 LF						
131-15	COMMUNICATION BLDG 2 OF 2	MCAS BEAUFORT, SC	0.94	2438	85/06/13	3,523	SF	$91.73	$117.27
		AVERAGE OF ADJUSTED UNIT COST	$117.27						
		AVERAGE FACILITY SIZE	3523 SF						
131-25	SATTELITE COMM GRND TERMI	SIGONELLA ITALY	1.00	2440	85/09/27	2,647	SF	$224.57	$269.66

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$269.66						
		AVERAGE FACILITY SIZE	2647	SF					
131-35	CONTROLLED TEMPEST AREA	NSA NEW ORLEANS, LA	0.94	9999	88/05/13	2,180	SF	$97.61	$30.42
		AVERAGE OF ADJUSTED UNIT COST	$30.42						
		AVERAGE FACILITY SIZE	2180	SF					
131-40	TELEPH XCHNGE BLDG	CAMP PENDLETON CALIFORNIA	1.20	2348	83/02/08	9,116	SF	$93.72	$102.58
131-40	TELEPHONE EXCHANGE BLDG	MCRD PARRIS ISLAND, SC	0.94	2195	82/03/17	5,851	SF	$94.51	$139.79
131-40	TELEPHONE XCHGE BLDG	LEMOORE CALIFORNIA	1.20	2406	83/12/21	2,570	SF	$146.28	$136.18
		AVERAGE OF ADJUSTED UNIT COST	$126.18						
		AVERAGE FACILITY SIZE	4660	SF					
133-72	RADAR OPERATIONAL FAC	MCAS, KANEOHE BAY, HI	1.34	2430	83/09/28	8,700	LF	$135.42	$126.93
133-72	RADAR AIR TRAFFIC CON CEN	NAS CORPUS CHRISTI,TX	0.91	2295	82/12/17	6,866	SF	$101.85	$145.79
133-72	RADAR AIR TRAFFIC CTL CTR	JACKSONVILLE NC	0.90	2406	84/02/27	6,828	SF	$70.40	$97.19
133-72	RADAR AIR TRAFFIC CTL CEN	NAS KEY WEST,FL	0.87	2581	88/02/05	6,447	SF	$106.82	$139.38
		AVERAGE OF ADJUSTED UNIT COST	$127.32						
		AVERAGE FACILITY SIZE	7210	LF					
134-40	RADAR OPERATIONAL FAC	NAS, BARBERS PT, HI	1.34	2417	84/06/12	2,300	SF	$89.51	$80.96
		AVERAGE OF ADJUSTED UNIT COST	$80.96						
		AVERAGE FACILITY SIZE	2300	SF					
135-10	COMMUNICATIONS CONDUIT	EL TORO CA MCAS	1.11	2509	87/02/19	906,082	LS	$0.85	$0.88
		AVERAGE OF ADJUSTED UNIT COST	$0.88						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE FACILITY SIZE	906082	LS					
135-20	TELEPHONE LINES	ALAMEDA CALIFORNIA	1.25	2457	85/07/01	17,000	LF	$72.40	$69.07
		AVERAGE OF ADJUSTED UNIT COST	$69.07						
		AVERAGE FACILITY SIZE	17000	LF					
137-10	METEOROLOGICAL BLDG	MONTEREY CA	1.33	2406	83/12/30	52,780	SF	$98.69	$96.12
137-10	METEOROLOGICAL BUILDING	PEARL HARBOR HAWAII	1.27	2433	86/01/10	20,827	SF	$126.07	$118.35
		AVERAGE OF ADJUSTED UNIT COST	$107.23						
		AVERAGE FACILITY SIZE	24536	SF					
141-12	AIRFIELD FACILITIES	MEMBASA KENYA	1.05	2295	82/12/02	10,463	SF	$27.99	$34.02
		AVERAGE OF ADJUSTED UNIT COST	$34.02						
		AVERAGE FACILITY SIZE	10463	SF					
141-25	COM.STRUT.& FIRE/RESC.STA	NADC WARMINSTER PA	1.07	2414	83/07/25	12,800	SF	$79.19	$89.81
		AVERAGE OF ADJUSTED UNIT COST	$89.81						
		AVERAGE FACILITY SIZE	12800	SF					
141-30	SQUADRON OPS FACILITY	ANDREWS AFB	1.08	2195	82/04/27	15,620	SF	$59.76	$76.13
141-30	AERIAL PORT TRNG FAC	NAS DALLAS, TEXAS	1.02	2014	81/03/30	12,060	SF	$47.76	$68.11
		AVERAGE OF ADJUSTED UNIT COST	$72.12						
		AVERAGE FACILITY SIZE	13840	SF					
141-40	SQUADRON OPERS BLDG	NAS NEW ORLEANS, LA	0.94	2445	86/03/27	14,570	SF	$89.60	$118.98

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
141-40	ACFT OPS BLDG PF #1	CAMP PENDLETON MCAS	1.11	2513	87/01/22	9,880	SF	$91.70	$94.42
	AVERAGE OF ADJUSTED UNIT COST		$106.70						
	AVERAGE FACILITY SIZE		12225	SF					
141-42	SPECIAL OPS FAC	SHAW AFB SUMTER SC	0.80	2493	86/06/06	19,475	SF	$45.70	$67.13
	AVERAGE OF ADJUSTED UNIT COST		$67.13						
	AVERAGE FACILITY SIZE		19475	SF					
141-70	AIRCRAFT CONTROL TOWER	MYRTLE BEACH AFB, SC	0.93	2352	83/03/04	5,834	SF	$134.63	$189.82
141-70	CONTROL TOWER	NAS CHASE FIELD, TEXAS	0.87	2421	84/11/16	2,998	SF	$158.16	$215.68
141-70	LCAC COMPLEX CONTROL TWR	NAB LCREEK NORFOLK VA	0.98	2457	85/07/24	2,196	SF	$116.36	$132.32
	AVERAGE OF ADJUSTED UNIT COST		$179.27						
	AVERAGE FACILITY SIZE		3676	SF					
141-87	LOX FACILITY	KEFLAVIK ICELAND	3.00	2295	82/12/17	5,582	SF	$239.70	$102.00
	AVERAGE OF ADJUSTED UNIT COST		$102.00						
	AVERAGE FACILITY SIZE		5582	SF					
141-90	CREW READINESS FACILITY	LAJES AZORES	1.38	2493	86/06/30	12,765	SF	$113.90	$96.99
	AVERAGE OF ADJUSTED UNIT COST		$96.99						
	AVERAGE FACILITY SIZE		12765	SF					
143-10	OPS VEHICLE GARAGE	SIGONELLA ITALY	1.10	2509	86/11/28	38,950	SF	$18.63	$20.81
143-10	EMERGENCY VEHICLE GARAGE	ADAK ALASKA	3.55	2581	88/02/11	3,066	SF	$180.34	$48.05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$34.43						
		AVERAGE FACILITY SIZE	21008	SF					
143-11	VEHICLE MAIN TRAN FAC 2-2	NMCRC MIAMI, FL	0.95	2440	85/09/04	5,776	SF	$52.54	$66.40
		AVERAGE OF ADJUSTED UNIT COST	$66.40						
		AVERAGE FACILITY SIZE	5776	SF					
143-15	RANGE OPERATIONS CENTER	VIEGUES, PR	1.05	2493	86/06/16	10,662	SF	$200.71	$224.65
		AVERAGE OF ADJUSTED UNIT COST	$224.65						
		AVERAGE FACILITY SIZE	10662	SF					
143-20	EOD COMPLEX OPER/OFFICE	NORFOLK VIRGINIA	0.95	2504	86/09/03	47,375	SF	$48.11	$61.72
143-20	ORDNANCE OPERATIONS BUILD	NAVMAG, LUALUALEI, HI	1.34	2428	85/03/27	23,966	SF	$73.54	$63.06
		AVERAGE OF ADJUSTED UNIT COST	$62.39						
		AVERAGE FACILITY SIZE	35670	SF					
143-25	SEAL TM TRNG & SUPT BLDG	NAVSTA PEARL, HI	1.34	2523	87/05/04	15,500	SF	$124.07	$111.99
143-25	DDS TRAINING FACILITY	NORFOLK VIRGINIA	0.98	2417	84/06/28	12,968	SF	$79.31	$102.19
		AVERAGE OF ADJUSTED UNIT COST	$107.09						
		AVERAGE FACILITY SIZE	10561	SF					
143-40	FLT COMP PROG OPNS BLDG	SAN DIEGO CALIF	1.28	2440	85/09/30	86,627	SF	$97.13	$93.92
143-40	COMPUTER PROG OPS CENTER	NSTL BAY ST LOUIS, MS	0.98	2402	84/01/30	71,400	SF	$71.82	$89.38
		AVERAGE OF ADJUSTED UNIT COST	$91.65						
		AVERAGE FACILITY SIZE	79013	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
143-41	AMPHIB OPS BLDG #3	NORFOLK VIRGINIA	0.93	2528	87/07/31	31,877	SF	$79.91	$103.73
143-41	AMPHIB OPS BLDG #1	NORFOLK VIRGINIA	0.93	2528	87/07/31	30,040	SF	$76.02	$98.67
143-41	AMPHIB OPS BLDG #2	NORFOLK VIRGINIA	0.93	2528	87/07/31	5,928	SF	$108.34	$115.39
		AVERAGE OF ADJUSTED UNIT COST	$105.93						
		AVERAGE FACILITY SIZE	22615 SF						
143-45	ARMORIES	MCAS, KANEOHE BAY, HI	1.34	2428	84/08/12	17,000	SF	$87.33	$82.78
143-45	ARMORY	MCRD PARRIS ISLAND, SC	0.94	2219	82/06/28	9,860	SF	$64.53	$92.48
143-45	ARMORY	MCB/MCAGCC 29 PALMS CA	1.20	2220	82/05/28	8,400	SF	$111.80	$120.53
143-45	ARMORY	TWENTYNINE PALMS CALIF	1.20	2424	85/01/30	8,064	SF	$91.25	$90.11
143-45	ARMORY	EL TORO CALIFORNIA	1.20	2200	82/02/04	7,820	SF	$77.64	$83.65
		AVERAGE OF ADJUSTED UNIT COST	$93.91						
		AVERAGE FACILITY SIZE	10228 SF						
143-47	READY CREW FACILITY	ANDREWS AFB	1.08	2249	82/09/18	22,500	SF	$66.36	$80.04
		AVERAGE OF ADJUSTED UNIT COST	$80.04						
		AVERAGE FACILITY SIZE	22500 SF						
143-55	LOGISTICS SUPPORT FAC	MCAS, KANEOHE BAY, HI	1.34	1740	79/01/19	6,800	SF	$25.28	$31.75
		AVERAGE OF ADJUSTED UNIT COST	$31.75						
		AVERAGE FACILITY SIZE	6800 SF						
143-65	OPERATIONS CONTROL CTR	LONDON ENGLAND	1.50	2433	85/05/16	18,969	SF	$96.38	$79.77
143-65	INTELLIGENCE BLDG NH-139	NORFOLK VA	0.98	2311	83/01/28	17,160	SF	$49.37	$65.83
143-65	OPER CONTROL CENTER	NAVSTA, PEARL HARBOR, HI	1.34	2413	84/03/05	15,200	SF	$99.86	$90.48
		AVERAGE OF ADJUSTED UNIT COST	$78.69						
		AVERAGE FACILITY SIZE	17109 SF						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
143-77	DDS STORAGE FACILITY	NORFOLK VIRGINIA	0.98	2417	84/06/28	4,000	SF	$51.09	$65.14
143-77	OPERATIONS SUPPORT FAC.	DAM NECK V BEACH VA	0.98	2430	84/09/15	2,800	SF	$42.46	$51.20
		AVERAGE OF ADJUSTED UNIT COST	$58.17						
		AVERAGE FACILITY SIZE	3400 SF						
143-78	PETROLEUM OPS FAC	KEESLER AFB, MS	0.86	2565	87/09/24	2,749	SF	$106.97	$142.07
		AVERAGE OF ADJUSTED UNIT COST	$142.07						
		AVERAGE FACILITY SIZE	2749 SF						
143-80	CONST ANTENNA SUPT FAC	ADAK ALASKA	3.55	2513	87/01/29	26,000	SF	$240.88	$79.10
		AVERAGE OF ADJUSTED UNIT COST	$79.10						
		AVERAGE FACILITY SIZE	26000 SF						
151-20	BERTHING PIER #11	NORFOLK VIRGINIA	0.98	2194	82/01/25	215,925	SF	$68.13	$97.71
151-20	BERTHING PIER ZULU 1 OF 3	NS CHARLESTON, SC	0.93	2413	84/03/12	181,800	SF	$62.55	$85.95
151-20	NEW BERTH/RPR PIER 12	SAN DIEGO CALIFORNIA	1.23	2581	88/02/01	174,960	SF	$124.38	$119.57
151-20	BERTHING/REPAIR PIER	SAN FRANCISCO CALIFORNIA	1.35	2432	85/02/28	111,600	SF	$89.69	$82.51
151-20	GEN PURPOSE BERTH PIER 10	NORFOLK VIRGINIA	0.98	2457	85/07/31	71,500	SF	$101.70	$116.74
151-20	PIER X-RAY IMPROVEMENTS	NWS CHARLESTON, SC	0.91	2513	87/01/09	18,630	SF	$86.74	$93.37
151-20	PIER EXTENSION	SAN DIEGO CALIFORNIA	1.23	2581	88/02/16	6,900	SF	$354.15	$270.12
		AVERAGE OF ADJUSTED UNIT COST	$123.71						
		AVERAGE FACILITY SIZE	111616 SF						
152-10	AMMUNITION WHARF	NAVMAG, GUAM, MI	2.15	2424	85/01/06	1,400	FB	$5,230.00	$2,940.33
		AVERAGE OF ADJUSTED UNIT COST	$2,940.33						
		AVERAGE FACILITY SIZE	1400 FB						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
154-10	BULKHEAD--PART 2 OF 2	NS MAYPORT, FL	0.85	2440	85/09/25	1,460	LF	$2,864.65	$4,215.59
154-10	BULKHEAD Q & R - 3 OF 3	NS CHARLESTON, SC	0.93	2413	84/03/12	611	LF	$3,606.00	$4,359.42
	AVERAGE OF ADJUSTED UNIT COST		$4,287.50						
	AVERAGE FACILITY SIZE		1035	LF					
155-21	OPER SUPP FAC-BOAT STOR	DAM NECK V BEACH VA	0.98	2430	84/09/15	13,823	SF	$36.38	$44.75
	AVERAGE OF ADJUSTED UNIT COST		$44.75						
	AVERAGE FACILITY SIZE		13823	SF					
156-10	WATERFRONT TRANSIT SHED	NS MAYPORT, FLORIDA	0.85	2493	86/06/13	5,200	SF	$36.84	$52.51
156-10	WATERFRONT TRANSIT SHED	NORFOLK VIRGINIA	0.91	2581	88/02/04	5,021	SF	$55.88	$71.12
	AVERAGE OF ADJUSTED UNIT COST		$61.81						
	AVERAGE FACILITY SIZE		5110	SF					
159-20	DEGAUSSING BUILDING	NAVSTA, PEARL HARBOR, HI	1.34	2428	85/03/22	1,600	SF	$244.96	$220.59
	AVERAGE OF ADJUSTED UNIT COST		$220.59						
	AVERAGE FACILITY SIZE		1600	SF					
159-64	SPECIAL WARFARE OPNS BLDG	SAN DIEGO CALIFORNIA	1.17	2427	85/04/30	25,816	SF	$77.32	$82.23
159-64	SP WARFR OPS BLDG PF #1	CORONADO NAB	1.23	2496	86/08/20	25,712	SF	$68.04	$66.93
159-64	WATERFRONT SUPPORT FAC	NSYD CHARLESTON, SC	0.93	2016	81/02/09	21,008	SF	$45.29	$70.76
	AVERAGE OF ADJUSTED UNIT COST		$73.30						
	AVERAGE FACILITY SIZE		24178	SF					
159-66	LANDING CRAFT RAMP/PARKIN	NCSC PANAMA CIT, FLORIDA	0.85	2406	83/12/15	5,333	SY	$87.22	$124.95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$124.95						
		AVERAGE FACILITY SIZE	5333	SY					
165-10	FY-87 MAINT DREDGE	NORFOLK VIRGINIA	0.91	2521	87/04/06	770,150	CY	$2.39	$3.13
165-10	DREDGING (MOB/DEMOB)	NORFOLK VIRGINIA	0.98	2351	83/05/09	637,616	CY	$3.61	$4.67
165-10	MAINT DRED'G (MOB/DEMOB)	NORFOLK VIRGINIA	0.98	2421	84/11/02	571,315	CY	$3.71	$4.52
165-10	MAINT DREDGING	YORKTOWN VIRGINIA	0.95	2521	87/04/27	214,610	CY	$5.54	$5.89
165-10	MAINT DRUDGING FY-87	PORTSMOUTH VIRGINIA	0.95	2523	87/05/26	102,220	CY	$4.08	$4.14
		AVERAGE OF ADJUSTED UNIT COST	$4.47						
		AVERAGE FACILITY SIZE	664450	CY					
171-10	COMPUTER TECH TRAIN FAC	KEESLER AFB BILOXI MS	0.98	2433	85/05/22	113,169	SF	$57.69	$77.89
171-10	ACADEMIC INSTRUCTION FAC	NTC ORLANDO, FLORIDA	0.86	2249	82/09/24	31,302	SF	$40.89	$63.85
171-10	ACADEMIC INSTR BLDG	GUANTANAMO BAY CUBA	1.60	2440	85/09/11	31,300	SF	$92.64	$71.67
171-10	ADMIN/TRAINING BLDG	CHESAPEAKE VIRGINIA	0.93	2581	88/02/05	30,241	SF	$67.23	$84.59
171-10	TRAINING FACILITY	NSY, PEARL HARBOR, HI	1.34	2424	84/10/18	25,901	SF	$82.00	$74.71
171-10	CCT ACADEMIC INST BLDG	CBC GULFPORT, MS	0.86	2565	87/09/02	23,657	SF	$46.05	$60.55
171-10	COMM ELECTRNCS TRN COMPLX	NAS MIRAMAR, CA	1.11	2526	87/06/27	17,452	SF	$73.85	$72.11
171-10	COMM-ELEC TRNG FAC	NAS BARBER'S PT.	1.34	2455	86/04/15	16,700	SF	$86.33	$71.85
171-10	ACADEMIC INSTR BLDG	CBC GULFPORT MS	0.87	2443	86/02/03	16,350	SF	$60.91	$77.74
171-10	CE/UT ACADEMIC INST BLDG	CBC GULFPORT, MS	0.86	2565	87/09/30	14,460	SF	$68.11	$82.23
171-10	RECRUIT TRAIN BLDG	MCRD PARRIS ISLAND, SC	0.94	2513	87/01/09	9,500	SF	$66.56	$71.78
171-10	APPL INSTR BLDG (DIESEL)	NORFOLK VIRGINIA	0.98	2418	84/12/03	7,533	SF	$71.77	$75.84
		AVERAGE OF ADJUSTED UNIT COST	$73.73						
		AVERAGE FACILITY SIZE	28130	SF					
171-15	RESERVE TRAIN FAC 1 OF 2	NMCRC MIAMI, FL	0.95	2440	85/09/04	55,212	SF	$49.47	$66.51
171-15	RESERVE TRAINING CENTER	NMCRC GRNVL, SC	0.95	2581	88/02/18	43,398	SF	$54.97	$69.13
171-15	ARMED FORCES RESERVE CENT	NAS CORPUS CHRISTI, TEXAS	0.91	2430	84/09/28	43,100	SF	$53.24	$74.25
171-15	N&MRC TRAINING BLDG	NMCRC HOUSTON, TEXAS	1.02	2233	82/07/20	32,360	SF	$66.19	$88.68
171-15	AVIATION TECH TRN BLDG	NAS DALLAS, TEXAS	1.02	2432	85/02/28	23,961	SF	$66.88	$79.79
171-15	RESERVE FORCES OP TRN FAC	KEESLER AFB, BILOXI, MS	0.98	1918	80/03/03	18,423	SF	$59.78	$89.59
171-15	U. S. ARMY RESERVE CENTER	AMERICAN SAMOA	2.40	2428	85/03/08	11,250	SF	$160.00	$71.82
171-15	ANG MED TRG & ADMIN FAC	MOFFETT FIELD CALIFORNIA	1.25	2430	83/09/30	5,800	SF	$94.43	$77.19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
	AVERAGE OF ADJUSTED UNIT COST		$77.12						
	AVERAGE FACILITY SIZE		25945	SF					
171-20	APPLIED INSTR BLDG	DAM NECK V BEACH VA	0.98	2402	84/01/30	113,400	SF	$51.87	$70.94
171-20	APPLIED INSTRUCTION BLDG	NAS MEMPHIS MILLINGTON,TN	1.00	2311	83/01/13	84,480	SF	$45.20	$62.28
171-20	OS "A" INSTRUCTION BLDG	DAM NECK V BEACH VA	0.98	2504	86/09/30	81,000	SF	$63.79	$82.78
171-20	APPLIED INSTRUCTION BLDG	NTC ORLANDO, FLORIDA	0.86	2422	84/04/20	79,600	SF	$35.14	$53.72
171-20	APPLIED INSTRUCTION BLDG	SAN DIEGO CALIF	1.28	2424	84/10/24	79,253	SF	$76.21	$78.21
171-20	BASIC ENL SUB SCHOOL	NEW LON,GROTON,CT	1.13	2418	84/12/28	73,376	SF	$87.09	$100.41
171-20	APPLIED INSTR BLDG	NAS MEMPHIS,MILLINGTON,TN	0.95	2504	86/09/10	67,768	SF	$63.52	$84.12
171-20	FLEET TRAINING CENTER	SAN DIEGO CALIFORNIA	1.20	2427	85/04/15	60,400	SF	$54.55	$58.37
171-20	APPLIED INSTRUCTION BLDG	NAS CECIL FIELD, FLORIDA	0.90	2195	82/04/14	58,300	SF	$48.88	$77.11
171-20	AVIATION SURV TRAIN FAC	NAS PENSACOLA, FLORIDA	0.85	2195	82/03/02	56,596	SF	$51.37	$85.81
171-20	APPLIED INSTRUCTION BLDG	NAS MEMPHIS, TENNESSEE	1.00	2402	84/01/20	53,812	SF	$51.70	$67.08
171-20	INSTRUMENTMAN TRG FAC 1-2	NTTC PENSACOLA, FL	0.84	2589	87/12/14	52,000	SF	$57.80	$81.96
171-20	APPLIED INSTRUCTION BLDG	SAN DIEGO CALIFORNIA	1.28	2233	82/07/09	51,998	SF	$79.20	$85.45
171-20	APPLIED ENGR INSTR BLDG	NORFOLK VIRGINIA	0.98	2418	84/12/31	48,750	SF	$61.48	$80.01
171-20	APPLIED INSTRUCTION BLDG	PORT HUENEME CA NCTC	1.11	2504	86/09/17	48,038	SF	$61.62	$68.37
171-20	APPLIED INSTRUCTION BLDG	LEMOORE CALIFORNIA	1.20	2406	83/12/23	40,818	SF	$68.76	$72.67
171-20	APPLIED INST BLDG	NORFOLK VIRGINIA	0.98	2430	83/09/29	37,638	SF	$74.47	$95.43
171-20	WEAPONS TRAINING BLDG	NOS INDIAN HEAD MD	1.08	2194	82/01/25	31,094	SF	$45.24	$57.66
171-20	HELICOPTER TRAINING FAC	NORFOLK VIRGINIA	0.91	2581	88/02/09	29,250	SF	$76.20	$97.99
171-20	OPER TRNR FAC PF #1	SAN DIEGO CALIF	1.23	2445	86/03/31	28,686	SF	$73.02	$73.33
171-20	APPLIED INSTRUCTION BLDG	CAMP LEJEUNE N C	0.84	2509	86/11/13	26,961	SF	$53.55	$76.74
171-20	WEAPONS TRAINING FACILITY	SAN DIEGO CALIF	1.23	2581	88/02/11	26,500	SF	$100.53	$95.64
171-20	APPLIED INSTR BLDG	NORFOLK VIRGINIA	0.98	2402	84/01/06	23,715	SF	$58.03	$72.22
171-20	APPLIED INSTRUCTION BLDG	NTTC PENSACOLA, FL	0.85	2195	82/03/05	22,400	SF	$48.47	$75.35
171-20	APPLIED INSTRUCTION BLDG.	NORFOLK VIRGINIA	0.98	2352	83/03/25	22,085	SF	$47.80	$60.15
171-20	WATER SURVUVAL TRNG FAC	NAS JACKSONVILLE, FLORIDA	0.91	2017	80/12/04	18,840	SF	$70.05	$106.49
171-20	SHIP PROPUL TRAIN BLDG	NTC ORLANDO, FLORIDA	0.92	2428	85/03/27	18,490	SF	$56.16	$70.14
171-20	MOBILE MINE ASSEMB GRP AC	NB CHARLESTON, SC	0.91	2526	87/06/04	18,250	SF	$52.42	$63.63
171-20	APPLIED INSTRUCTION BLDG	NTTC PENSACOLA, FLORIDA	0.85	2351	83/05/11	17,800	SF	$66.11	$91.43
171-20	APPLIED INST BLDG--2 OF 2	NS MAYPORT, FLORIDA	0.90	2428	83/08/05	17,200	SF	$55.45	$70.13
171-20	H-2 LAMPS TNG FACILITY	NORFOLK VIRGINIA	0.93	2516	87/03/26	16,690	SF	$70.52	$82.51
171-20	APPLIED INSTRUCTION BLDG	NORFOLK VIRGINIA	0.98	1919	80/06/30	14,637	SF	$51.86	$74.11
171-20	APPLIED INSTR BLDG	CBC GULFPORT MS	0.87	2443	86/02/01	13,480	SF	$52.07	$65.24
171-20	COMBINED ARMS TRAINER FAC	TWENTYNINE PALMS MCAGCC	1.26	2510	86/12/10	12,859	SF	$74.02	$61.77
171-20	FLEET TRAINING FACILITY	CHERRY POINT NC	0.90	2430	83/09/30	12,515	SF	$58.69	$70.82
171-20	FIRE FIGHTING SCHOOL	NORFOLK VIRGINIA	0.98	2413	84/03/30	12,505	SF	$63.09	$70.41
171-20	CONST BATTALION UNIT COMP	NS MAYPORT, FLORIDA	0.90	2418	84/12/14	12,300	SF	$57.82	$70.12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: O4-O1-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: O9JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
171-20	DRILL INSTR TRNG FAC	MCRD PARRIS ISLAND, SC	0.94	2195	82/03/08	11,560	SF	$61.27	$77.67
171-20	COMM/ELEC TRAINING FAC	PMRF BARKING SANDS, HI	1.34	2509	87/02/11	10,680	SF	$102.77	$79.25
171-20	AIR COMBAT TRAIN FAC	MCAS BEAUFORT, SC	0.89	2499	86/07/31	10,417	SF	$80.29	$93.59
171-20	AERIAL PORT TRNG FAC	CHASN AFB, SC	0.91	2581	88/02/22	10,188	SF	$76.28	$84.21
171-20	OPER TRNR FAC PF #2	SAN DIEGO CALIF	1.23	2445	86/03/31	9,250	SF	$76.30	$65.20
171-20	FLEET TRAINING FAC	NS MAYPORT, FL	0.85	2443	86/02/04	8,907	SF	$67.65	$82.99
171-20	AVIATION PHYSIOLOGY TRNG	CHERRY POINT NC	0.86	2440	85/09/14	8,802	SF	$86.72	$105.28
171-20	FLEET TRAINING UNIT FAC	NS CHARLESTON, SC	0.93	2428	84/08/08	8,400	SF	$49.52	$55.87
171-20	TRAINING & ADMIN BLDG	CAMP PENDLETON CALIFORNIA	1.20	2430	84/09/12	6,784	SF	$93.57	$80.35
171-20	AIR COMBAT TRAIN DEBR FAC	NAS KEY WEST, FLORIDA	1.07	2523	87/05/19	6,724	SF	$118.14	$109.58
171-20	VEH MAINT TEA FAC	NORFOLK VIRGINIA	0.95	2496	86/08/26	6,643	SF	$77.39	$81.72
171-20	ACFT MAINT TRNG BLDG	CAMP PENDLETON CALIFORNIA	1.14	2510	86/12/29	6,510	SF	$95.91	$83.93
171-20	TRAIN RANGE DEBRIEF FAC	NAS CECIL FLD, FLORIDA	0.85	2499	86/07/31	6,447	SF	$87.85	$103.56
171-20	APPLIED INSTRUCTION BLDG	TRAVIS AFB, FAIRFIELD CA	1.27	2457	85/07/17	5,984	SF	$118.16	$94.01
171-20	AUXIL APPLIED INSTR BLDG	NAS MEMPHIS MILLINGTON,TN	1.00	2249	82/09/16	5,400	SF	$64.41	$71.10
171-20	UN-IN FRS INSTR BLDG	NAS, PENSACOLA, FLORIDA	0.85	2017	80/12/23	5,230	SF	$45.46	$65.28
171-20	OPERATNL FLIGHT TRNG BLDG	SAN DIEGO CALIFORNIA	1.28	2076	81/05/14	3,800	SF	$86.35	$79.33
171-20	NAVY TACT INTEROP SUP FAC	NS CHARLESTON, SC	0.93	2428	84/08/08	3,600	SF	$61.13	$66.09
171-20	DIESEL/DYND TRAINER FAC	NORFOLK VIRGINIA	0.91	2581	88/02/10	3,343	SF	$99.74	$102.82
171-20	LIGHT ATTACK WPNS SCHOOL	LEMOORE CALIFORNIA	1.14	2421	84/11/05	2,665	SF	$77.68	$68.14
	AVERAGE OF ADJUSTED UNIT COST		$78.25						
	AVERAGE FACILITY SIZE		26725	SF					
171-35	OPR TRAINING FAC	SAN DIEGO CA	1.23	2581	88/02/19	65,000	SF	$105.29	$104.48
171-35	OPERATION TRAIN FAC-1OF2	NS MAYPORT, FLORIDA	0.90	2428	83/08/05	58,000	SF	$58.33	$83.19
171-35	PATROL A/CFT TR BLDGS/MOD	NAS JACKSONVILLE, FL	0.85	2493	86/06/10	51,860	SF	$53.85	$79.20
171-35	OPERATIONAL TRAINER FAC	LEMOORE CALIFORNIA	1.20	2352	83/03/28	41,590	SF	$72.29	$78.99
171-35	OPERATIONAL TRAINER FAC	SAN DIEGO CALIFORNIA	1.28	2200	82/02/24	35,866	SF	$100.96	$109.42
171-35	OPERATIONAL TRAINING FAC	NAS CECIL FIELD, FLORIDA	0.90	2219	82/06/22	35,078	SF	$68.88	$105.26
171-35	OPERATIONAL TRAINER FAC	NAS CECIL FIELD, FLORIDA	0.90	2419	83/11/16	30,582	SF	$82.46	$115.58
171-35	COMPOSITE GROUP TRAINING	BARKSDALE AFB, LA	0.94	2440	85/09/10	30,000	SF	$65.12	$85.75
171-35	OPERATIONAL TRAINER FAC	DAM NECK V BEACH VA	0.98	2406	84/02/17	29,900	SF	$74.83	$95.85
171-35	OPERATIONAL TRAIN FAC	NAS WHITING FIELD, FL	0.96	2428	84/08/10	25,590	SF	$67.25	$87.13
171-35	FLIGHT SIMULATOR BLDG	CHERRY POINT NC	0.90	2430	83/09/09	24,413	SF	$67.12	$91.74
171-35	READINESS TRAINING FACIL.	DAM NECK V BEACH VA	0.98	2295	82/12/29	24,404	SF	$59.16	$78.63
171-35	FLIGHT SIMULATOR BLDG	MCAS EL TORO, SANTA ANA	0.96	2249	82/09/15	23,773	SF	$92.99	$127.46
171-35	OPERATIONS TRAINER FAC.	DAM NECK V BEACH VA	0.98	2220	82/05/19	23,400	SF	$58.98	$80.23
171-35	OP TRN FAC (BLD #2,3,4)	CHERRY POINT NC	0.87	2509	87/02/24	21,177	SF	$80.37	$106.80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
171-35	OPER TRAIN FAC (BLDG 1)	CHERRY POINT NC	0.87	2509	87/02/24	20,056	SF	$68.02	$89.51
171-35	KC-10 FLIGHT SIM TR FAC	BARKSDALE AFB, LOUISIANA	1.01	2200	82/02/10	20,010	SF	$65.75	$84.99
171-35	OPERTNL TRAINER FAC	CAMP PENDLETON CALIFORNIA	1.18	2440	85/09/16	19,574	SF	$89.27	$88.18
171-35	OPERATIONAL TRAIN FAC	NAS NEW ORLEANS, LA	0.95	2441	85/10/22	19,519	SF	$62.42	$76.56
171-35	OPS/LIFE CYCLE SUP BLDG	CHESAPEAKE VIRGINIA	0.93	2581	88/02/05	17,435	SF	$84.62	$98.36
171-35	OPERATIONAL TRAINER FAC	NAVSTA NORFOLK	0.98	2430	84/09/07	12,290	SF	$79.33	$88.71
171-35	OPERATIONAL TRAIN FAC	FBMSTC, NS, CHARLESTON,SC	0.93	2083	81/06/09	11,889	SF	$71.39	$97.26
171-35	DIESEL ENGINE TRN'G BLDG.	N.T.C. GREAT LAKES ILL.	1.06	2428	84/08/28	6,000	SF	$99.29	$96.60
171-35	OPERATIONAL TRAINER FAC	NAS DALLAS, TEXAS	0.93	2440	85/09/13	5,186	SF	$84.99	$92.99
171-35	OPERATIONAL TRAINER FAC	MCAS(H) TUSTIN, CAL.	1.20	2347	83/04/27	3,942	SF	$84.70	$73.41
171-35	FLIGHT SIM TRAIN SUP FAC	BARKSDALE AFB, LOUISIANA	1.01	2419	83/11/01	1,557	SF	$111.16	$110.16
		AVERAGE OF ADJUSTED UNIT COST	$93.32						
		AVERAGE FACILITY SIZE	25311 SF						
171-45	TRAINING EQUIP CTR 1 OF 2	NTEC ORLANDO, FL	0.80	2440	85/09/26	261,160	SF	$61.70	$97.48
171-45	TRAINING D. AID CTR 2-2	NTEC ORLANDO, FLORIDA	0.80	2440	85/09/26	32,120	SF	$62.38	$79.35
		AVERAGE OF ADJUSTED UNIT COST	$88.41						
		AVERAGE FACILITY SIZE	146640 SF						
171-50	INDOOR 25 YRD PISTOL RNG	NS CHARLESTON, SC	0.93	2184	81/12/03	4,708	SF	$41.37	$59.67
		AVERAGE OF ADJUSTED UNIT COST	$59.67						
		AVERAGE FACILITY SIZE	4708 SF						
171-60	RECRUIT PROCESS'G BLDG	SAN DIEGO CALIFORNIA	1.28	2417	84/06/07	113,000	SF	$66.33	$64.75
171-60	RECRUIT PROCESSING FAC.	N.T.C. GREAT LAKES IL	1.04	2428	85/03/30	99,220	SF	$68.55	$81.99
171-60	RECRUIT PROCESSING FAC	MCRC, PARRIS ISLAND, SC	0.94	2348	83/02/28	83,512	SF	$57.52	$75.59
		AVERAGE OF ADJUSTED UNIT COST	$74.11						
		AVERAGE FACILITY SIZE	98577 SF						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
171-77	STORAGE BUILDING	CAMP PENDLETON CALIFORNIA	1.20	2352	83/03/24	10,752	SF	$32.16	$33.38
		AVERAGE OF ADJUSTED UNIT COST	$33.38						
		AVERAGE FACILITY SIZE	10752	SF					
179-10	TACTS SUP BLDG @ MCINTOSH	NAS CECIL FIELD, FLORIDA	0.87	2528	87/07/13	903	SF	$274.22	$301.91
		AVERAGE OF ADJUSTED UNIT COST	$301.91						
		AVERAGE FACILITY SIZE	10610	SF					
179-40	100M PISTL/200M RIFL RNGE	DAM NECK V BEACH VA	0.93	2516	87/03/20	8,152	SF	$74.95	$93.85
		AVERAGE OF ADJUSTED UNIT COST	$93.85						
		AVERAGE FACILITY SIZE	8152	SF					
179-45	TRAINING MOCK UP BLDG	FMWTC, NS, CHARLESTON, SC	0.93	2348	83/02/08	6,240	SF	$32.17	$43.16
		AVERAGE OF ADJUSTED UNIT COST	$43.16						
		AVERAGE FACILITY SIZE	6240	SF					
179-55	COMBAT SWIMMER TRAINER	NORFOLK VIRGINIA	0.93	2526	87/06/24	28,022	SF	$103.47	$134.42
179-55	COMBAT SWIMMER TRNG FAC	SAN DIEGO CALIFORNIA	1.23	2564	87/11/25	22,495	SF	$90.50	$87.58
179-55	CMBT TRNG POOL/TANK	EL TORO CA MCAS	1.20	2510	86/12/31	20,820	SF	$94.47	$94.72
		AVERAGE OF ADJUSTED UNIT COST	$105.57						
		AVERAGE FACILITY SIZE	17834	SF					
211-03	CORROSION CONTROL FAC	CASTLE AFB MERCED, CA	1.15	2441	85/11/21	37,035	SF	$66.54	$72.34
211-03	CORR CONTROL WASHRACK FAC	CHASN AFB, SC	0.91	2509	87/02/25	34,933	SF	$97.92	$130.88

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$101.61						
		AVERAGE FACILITY SIZE	25141	SF					
211-05	AIRCRAFT MAINT HANGAR	NAS CECIL FIELD, FLORIDA	0.90	2195	82/03/30	118,238	SF	$47.88	$74.75
211-05	AIRCRAFT MAINT. HANGAR	VIRGINIA BEACH VIRGINIA	0.95	2504	86/09/30	116,502	SF	$63.07	$81.76
211-05	AIRCRAFT MAINT HANGAR	SAN DIEGO CALIFORNIA	1.28	2348	83/02/01	100,306	SF	$66.24	$67.26
211-05	MAINTENANCE HANGAR	NAF MAYPORT FL	0.85	2432	85/02/03	92,100	SF	$67.18	$99.17
211-05	MAINTENANCE HANGAR	JACKSONVILLE NC	0.80	2565	87/09/10	81,824	SF	$100.21	$149.04
211-05	MAINTENANCE HANGAR	NAS CECIL FIELD, FL	0.90	2402	84/01/27	79,412	SF	$55.84	$78.82
211-05	MAINT HANGAR	CHERRY POINT NC	0.90	2414	83/07/06	75,800	SF	$46.11	$64.09
211-05	MAINTENANCE HANGAR	CAMP PENDLETON MCAF	1.14	2510	86/12/23	74,578	SF	$92.80	$97.96
211-05	HELICOPTER HANGAR	NORFOLK VIRGINIA	0.95	2504	86/09/24	72,749	SF	$64.09	$81.37
211-05	ARCFT MAINT HANGAR	FALLON NEVADA	1.21	2195	82/03/30	71,628	SF	$69.10	$78.58
211-05	MAINTENANCE HANGAR	NS MAYPORT FLORIDA	0.90	2416	83/10/20	68,000	SF	$54.41	$75.57
211-05	ACFT MAINT HANGAR	OAK HARBOR WA	1.16	2581	88/02/01	58,726	SF	$87.91	$86.88
211-05	NARU-AIRCRFT MAINT HANGAR	OAK HARBOR WASHINGTON	1.30	2352	83/03/15	39,380	SF	$90.02	$80.61
211-05	MAINTENANCE HANGAR	OAK HARBOR WA	1.30	2432	85/02/05	38,834	SF	$102.78	$89.00
211-05	AIRCRFT MAINT HANGAR	NAS DALLAS, TEXAS	1.02	2418	84/12/21	36,855	SF	$69.25	$76.17
211-05	MAINTENANCE HANGAR	SAN DIEGO CA	1.18	2428	85/03/29	29,200	SF	$89.49	$82.44
211-05	MAINTENANCE HANGAR	POINT MUGU CALIFORNIA	1.20	2438	85/06/11	29,041	SF	$86.93	$78.42
211-05	LCAC MAINT HANGER	CAMP PENDLETON CALIFORNIA	1.20	2430	84/09/12	24,619	SF	$102.85	$91.44
211-05	AIRCRAFT SUPPORT FACILITY	NAS, BARBERS POINT, HI	1.34	2194	82/01/25	12,735	SF	$109.43	$91.63
		AVERAGE OF ADJUSTED UNIT COST	$85.52						
		AVERAGE FACILITY SIZE	64238	SF					
211-06	MAINT HANGER MODERNIZATN	JACKSONVILLE NC	0.80	2565	87/09/10	245,560	SF	$46.58	$71.50
211-06	LCAC MAINTNCE SHOPS	CAMP PENDLETON CALIFORNIA	1.20	2430	84/09/12	20,525	SF	$82.55	$70.28
		AVERAGE OF ADJUSTED UNIT COST	$70.89						
		AVERAGE FACILITY SIZE	94487	SF					
211-07	SQUADRON SUPPORT FACILITY	KEFLAVIK ICELAND	2.56	2479	86/05/07	7,411	SF	$330.30	$152.49
		AVERAGE OF ADJUSTED UNIT COST	$152.49						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE FACILITY SIZE	7411	SF					
211-08	F18 FUEL MAINT FAC	MCAS BEAUFORT SF	0.94	2557	87/08/17	11,900	SF	$84.15	$102.57
		AVERAGE OF ADJUSTED UNIT COST	$102.57						
		AVERAGE FACILITY SIZE	11900	SF					
211-10	AIRCRAFT INTERMED MAINT F	NS MAYPORT, FLORIDA	0.90	2430	83/09/27	76,547	SF	$43.48	$61.31
211-10	AIRCRAFT MAINTENANCE FAC	NAS CECIL FIELD, FLORIDA	0.90	2311	83/01/19	16,000	SF	$42.72	$52.78
		AVERAGE OF ADJUSTED UNIT COST	$57.04						
		AVERAGE FACILITY SIZE	46273	SF					
211-14	VSTOL AIRCRAFT REWORK FAC	CHERRY POINT NC	0.87	2568	87/10/05	160,800	SF	$77.67	$101.85
		AVERAGE OF ADJUSTED UNIT COST	$101.85						
		AVERAGE FACILITY SIZE	160800	SF					
211-21	MULTI-PURP A/CFT MAINT SH	KEESLER AFB BILOXI, MS	0.98	2427	85/04/30	36,281	SF	$51.01	$66.14
211-21	ENGINE MAINT SHOP	CHERRY POINT NC	0.90	2414	83/07/06	32,175	SF	$37.44	$53.13
211-21	ADAL A/CFT ENGINE I&R SHO	BARKSDALE AFB, LA	0.94	2433	85/05/20	5,600	SF	$77.41	$85.49
211-21	LAMPS MK III FAC	SIGONELLA ITALY	1.10	2433	86/01/29	4,500	SF	$61.01	$56.60
		AVERAGE OF ADJUSTED UNIT COST	$65.34						
		AVERAGE FACILITY SIZE	19639	SF					
211-24	ENGINE BLADE REWORK FACY	CHERRY POINT NC	0.87	2565	87/09/18	67,300	SF	$77.66	$101.96
		AVERAGE OF ADJUSTED UNIT COST	$101.96						
		AVERAGE FACILITY SIZE	67300	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
211-32	A/CFT STRUCT RPR FAC	NARF PNCLA, FLORIDA	0.84	2528	87/07/08	104,000	SF	$68.92	$95.08
	AVERAGE OF ADJUSTED UNIT COST		$95.08						
	AVERAGE FACILITY SIZE		104000	SF					
211-34	GEAR BOX TEST FAC	NARF, PENSACOLA, FL	0.96	2433	85/05/07	2,500	SF	$147.82	$185.42
	AVERAGE OF ADJUSTED UNIT COST		$185.42						
	AVERAGE FACILITY SIZE		2500	SF					
211-37	CONC PAVM'T FOR AVION VNS	CHERRY POINT NC	0.87	2513	87/01/29	207,245	SF	$3.60	$4.81
	AVERAGE OF ADJUSTED UNIT COST		$4.81						
	AVERAGE FACILITY SIZE		207245	SF					
211-45	AVIONICS SHOP	NAS, BARPT, HI	1.34	2432	85/02/04	34,500	SF	$78.84	$74.61
211-45	AVIONICS SHOP	CHERRY POINT NC	0.90	2402	84/01/27	11,502	SF	$57.01	$71.54
	AVERAGE OF ADJUSTED UNIT COST		$73.07						
	AVERAGE FACILITY SIZE		19749	SF					
211-52	GUN TEST FACILITY	ALAMEDA CALIF	1.25	2433	85/05/20	19,480	SF	$132.83	$127.96
	AVERAGE OF ADJUSTED UNIT COST		$127.96						
	AVERAGE FACILITY SIZE		19480	SF					
211-55	V/STOL A/C ACOUST ENCL	CHERRY POINT NC	0.90	2417	84/06/14	6,850	SF	$418.66	$563.90
	AVERAGE OF ADJUSTED UNIT COST		$563.90						
	AVERAGE FACILITY SIZE		6850	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
211-56	A/CFT ACOUSTICAL ENGL	NAS CECIL FLD, FLORIDA	0.87	2516	87/03/26	7,590	SF	$462.06	$657.96
	AVERAGE OF ADJUSTED UNIT COST		$657.96						
	AVERAGE FACILITY SIZE		3796	SF					
211-60	AMF EAST LEAN-TO BLDG 407	SIGONELLA ITALY	1.19	2220	82/05/07	20,612	SF	$60.54	$69.93
211-60	AMF ENGINE MAINT SHOP	SIGONELLA ITALY	1.19	2220	82/05/07	16,291	SF	$80.57	$92.11
211-60	AMF AIR FRAME SHOP	SIGONELLA ITALY	1.19	2220	82/05/07	9,490	SF	$78.01	$80.85
	AVERAGE OF ADJUSTED UNIT COST		$80.96						
	AVERAGE FACILITY SIZE		15464	SF					
211-72	PLATING & CLEANING FAC	NARF JACKSONVILLE, FL	0.91	2249	82/09/28	125,000	SF	$92.81	$138.39
211-72	AIRCRAFT REWORK FAC	NORFOLK VIRGINIA	0.91	2591	88/03/18	96,100	SF	$86.38	$108.42
211-72	PLATING SHOP	NORFOLK VIRGINIA	0.98	2249	82/09/30	84,451	SF	$113.35	$149.18
	AVERAGE OF ADJUSTED UNIT COST		$131.99						
	AVERAGE FACILITY SIZE		101850	SF					
211-75	PARACHUTE SURV EQUIP SHOP	CAMP PENDLETON CA MCB	1.14	2510	86/12/12	20,240	SF	$51.49	$54.91
211-75	PARACHUTE/SURV SHOP	CHERRY POINT NC	0.86	2504	86/09/10	12,350	SF	$52.38	$71.98
211-75	PARACHUTE/SURVIVAL SHOP	YUMA ARIZONA	1.25	2424	85/01/23	7,480	SF	$81.99	$73.40
	AVERAGE OF ADJUSTED UNIT COST		$66.76						
	AVERAGE FACILITY SIZE		13356	SF					
211-76	MATERIALS LABORATORY	NARF JACKSONVILLE FLORIDA	0.91	2417	84/06/21	16,400	SF	$95.62	$127.37
	AVERAGE OF ADJUSTED UNIT COST		$127.37						
	AVERAGE FACILITY SIZE		16400	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
211-81	JET ENGINE TEST CELL	NAS KINGSVILLE, TX	0.96	2568	87/10/14	4,620	SF	$566.83	$673.67
211-81	JET ENGINE TEST CELL	NAS, CUBI PT, RP	0.85	2430	83/09/23	4,000	SF	$207.67	$286.00
	AVERAGE OF ADJUSTED UNIT COST		$479.83						
	AVERAGE FACILITY SIZE		5111	SF					
211-89	AIRCRAFT POWER CHECK FAC	NAS ATLANTA,MARIETTA,GA	0.94	1974	80/08/04	1	EA	$121,964.00	$192,585.79
211-89	POWER CHECK PAD	NAS NEW ORLEANS, LA	1.03	2418	84/07/26	1	EA	$358,168.00	$421,367.34
211-89	POWER CHECK PAD	BARKSDALE AFB, LOUISIANA	1.01	2016	81/02/13	1	EA	$296,399.00	$426,513.16
211-89	POWER CHECK PAD	MCAS KANEOHE BAY, HI	1.34	2510	86/12/31	1	EA	$384,409.00	$334,874.92
	AVERAGE OF ADJUSTED UNIT COST		$343,835.30						
	AVERAGE FACILITY SIZE		1	EA					
211-90	A/CFT ANALYS & PROCESS FA	CCAD CORPUS CHRISTI, TX	0.90	2528	87/07/01	66,578	SF	$79.30	$107.48
211-90	ROTARY WING RPR FAC	CORPUS CH ARMY DPOT,TEXAS	0.91	2445	86/03/04	48,058	SF	$62.52	$84.86
211-90	ADV POWER TRAIN TEST FAC	NAS CORPUS CHRISTI, TEXAS	0.91	2195	82/04/28	11,180	SF	$131.66	$165.05
	AVERAGE OF ADJUSTED UNIT COST		$119.13						
	AVERAGE FACILITY SIZE		41938	SF					
211-96	A/CFT GEN SQAD PARTS STOR	ENGLAND AFB, LOUISIANA	1.01	2427	85/04/15	20,200	SF	$27.21	$33.87
211-96	VARIOUS ACRAFT MAINT FAC	ENGLAND AFB,ALEXANDRIA,LA	1.01	2200	82/02/11	6,100	SF	$33.51	$39.80
	AVERAGE OF ADJUSTED UNIT COST		$36.83						
	AVERAGE FACILITY SIZE		13150	SF					
211-99	HAZARDOUS MATER CON FAC	NARF PENSACOLA, FLORIDA	0.85	2118	81/08/21	9,880	SF	$39.94	$67.01
211-99	HAZARDOUS MATS STOR FAC	NARF JACKSONVILLE, FL	0.91	2428	83/08/23	8,346	SF	$53.35	$71.45
	AVERAGE OF ADJUSTED UNIT COST		$69.23						
	AVERAGE FACILITY SIZE		9113	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: O4-O1-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: O9JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
212-10	ALCM SUPPORT FACS 1-2	BARKSDALE AFB, LOUISIANA	1.01	2417	84/06/08	68,885	SF	$89.45	$115.44
212-10	MISSILE MAINTENANCE FAC	NAVMAG LUALUALEI, HI	1.34	2510	86/12/31	5,230	SF	$289.71	$213.87
212-10	ADD TO TERRIER/TARTAR FAC	YORKTOWN VIRGINIA	0.98	2388	83/06/13	3,390	SF	$111.94	$115.82
		AVERAGE OF ADJUSTED UNIT COST	$148.37						
		AVERAGE FACILITY SIZE	25835 SF						
212-20	MSLE EQPMNT MAINT SHOP	YUMA ARIZONA	1.02	2433	85/05/30	10,462	SF	$77.42	$95.20
212-20	MISSLE MAINTENANCE FAC	SIGONELLA ITALY	1.19	2430	83/09/07	6,203	SF	$51.84	$52.00
212-20	MISSILE MAINT SHOP	MYRTLE BEACH AFB, SC	0.93	2406	83/12/07	5,270	SF	$97.48	$122.72
		AVERAGE OF ADJUSTED UNIT COST	$89.97						
		AVERAGE FACILITY SIZE	7311 SF						
212-30	MOTOR ASSEM BLDG--2 OF 2	NOTU CAPE CANAVERAL, FL	0.96	2406	83/12/27	11,340	SF	$107.48	$142.01
212-30	MISSILE CHECKOUT BLD-1OF2	NOTU CAPE CANAVERAL,FL	0.96	2406	83/12/27	7,606	SF	$121.36	$155.49
		AVERAGE OF ADJUSTED UNIT COST	$148.75						
		AVERAGE FACILITY SIZE	8108 SF						
213-30	MACHINE SHOP (SIMA)	NS MAYPORT, FLORIDA	0.90	1897	80/01/17	172,500	SF	$51.06	$93.21
213-30	S.I.M.A. (SHOPS)	LONG BEACH CALIFORNIA	1.20	2427	85/04/05	89,236	SF	$70.91	$74.30
213-30	SHORE INTER. MAINT. FAC.	LCREEK NORFOLK VA	0.98	2220	82/05/07	82,379	SF	$62.40	$86.63
213-30	S.I.M.A.	NS CHARLESTON, SC	0.93	2118	81/08/31	67,158	SF	$46.39	$69.00
213-30	S.I.M.A.	SAN DIEGO CALIFORNIA	1.28	2352	83/03/31	46,543	SF	$58.89	$53.55
213-30	S.I.M.A.	NAVSTA PEARL HARBOR	1.34	2348	83/02/25	32,976	SF	$111.93	$93.06
213-30	S.I.M.A.	SAN DIEGO CALIFORNIA	1.28	2352	83/03/31	32,249	SF	$60.97	$52.96
		AVERAGE OF ADJUSTED UNIT COST	$74.67						
		AVERAGE FACILITY SIZE	74720 SF						
213-55	PIPE SHOP	NSYD, CHARLESTON, SC	0.93	1896	80/02/20	125,000	SF	$55.21	$95.54
213-55	PIPE SHOP	NSY, PEARL HARBOR, HI	1.34	2017	80/12/24	77,436	SF	$97.84	$102.96

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$99.25						
		AVERAGE FACILITY SIZE	101218	SF					
213-58	LCAC COMPLEX - MAINT BAYS	NAB LCREEK NORFOLK VA	0.98	2438	85/06/24	25,192	SF	$61.62	$80.38
213-58	BOAT SHOP/PARALOFT BLDG	SAN DIEGO CALIFORNIA	1.17	2422	84/04/30	7,267	SF	$103.24	$99.75
213-58	UDT FACILITES	ROOSEVELT ROADS RQ	1.10	2565	87/09/18	4,000	SF	$104.70	$94.53
		AVERAGE OF ADJUSTED UNIT COST	$91.55						
		AVERAGE FACILITY SIZE	12153	SF					
213-59	ABRASIVE BLAST FACILITY	NAVSHIPREPFAC, RP	0.89	2516	87/03/06	6,000	SF	$168.83	$220.90
		AVERAGE OF ADJUSTED UNIT COST	$220.90						
		AVERAGE FACILITY SIZE	6000	SF					
213-60	F/G & PAINT FACILITY	SAN DIEGO CALIFORNIA	1.28	2418	84/12/24	11,329	SF	$107.80	$102.04
		AVERAGE OF ADJUSTED UNIT COST	$102.04						
		AVERAGE FACILITY SIZE	11329	SF					
213-61	SERV. SHOPS CONSOLID. FAC	NSY, PEARL HARBOR	1.34	2455	86/04/15	155,500	SF	$70.82	$66.39
		AVERAGE OF ADJUSTED UNIT COST	$66.39						
		AVERAGE FACILITY SIZE	91500	SF					
213-70	WTRFRT SERV SUP BLDG A;	NSYD CHARLESTON, SC	0.81	2440	85/09/12	12,026	SF	$69.13	$106.75
213-70	WATERFRONT PROD SUPT FAC	ALAMEDA CALIFORNIA	1.21	2509	87/02/13	6,900	SF	$94.95	$88.11
		AVERAGE OF ADJUSTED UNIT COST	$97.43						
		AVERAGE FACILITY SIZE	9463	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
213-75	AMPHIBIOUS VEH MAINT SHOP	CAMP LEJEUNE N C	0.90	2418	84/07/25	52,283	SF	$48.30	$67.73
213-75	LCAC COMPLEX MAINT SHOP	NAB LCREEK NORFOLK VA	0.98	2438	85/06/24	33,312	SF	$59.60	$74.57
213-75	VEHICLE MAINTENANCE FAC	LCREEK NORFOLK VA	0.98	2419	83/11/25	19,650	SF	$78.00	$89.25
		AVERAGE OF ADJUSTED UNIT COST	$77.18						
		AVERAGE FACILITY SIZE	35081 SF						
213-77	PERFORMANCE MONITOR FAC	NS CHARLESTON, SC	0.93	2424	84/10/24	2,800	SF	$87.36	$113.53
		AVERAGE OF ADJUSTED UNIT COST	$113.53						
		AVERAGE FACILITY SIZE	2800 SF						
213-90	SAND STORAGE SILO	NSRF, GUAM	1.66	2499	86/07/12	1,722	SF	$390.27	$275.64
		AVERAGE OF ADJUSTED UNIT COST	$275.64						
		AVERAGE FACILITY SIZE	1722 SF						
213-99	ASBESTOS ELIMINATION FAC	NSYD CHARLESTON, SC	0.93	2200	82/02/25	20,500	SF	$64.51	$96.22
213-99	ASBESTOS DELAGGING FACILI	NSY PEARL HARBOR, HI	1.27	2457	85/07/24	8,400	SF	$132.81	$115.45
		AVERAGE OF ADJUSTED UNIT COST	$105.83						
		AVERAGE FACILITY SIZE	14450 SF						
214-10	LT. ARMORED VEH MAINT FAC	CAMP LEJEUNE N C	0.84	2557	87/08/07	66,690	SF	$53.36	$79.98
214-10	COMBAT VEH MAINT. SHOP	CAMP LEJEUNE N C	0.84	2557	87/08/07	29,302	SF	$69.97	$100.47
214-10	TACT VEH/COMM MAINT FAC	CAMP PENDLETON CALIFORNIA	1.14	2526	87/06/23	29,054	SF	$60.16	$64.42
214-10	COMBAT VEH. MAINT. SHOP	CAMP LEJEUNE N C	0.90	2347	83/04/04	27,562	SF	$40.99	$59.22
214-10	COMBAT VEH. MAINT. SHOP	CAMP LEJEUNE N C	0.90	2195	82/04/14	25,305	SF	$44.95	$69.43
214-10	COMBAT VEHICLE MAINT SHOP	CAMP LEJEUNE N C	0.86	2504	86/09/10	24,150	SF	$65.63	$93.01
214-10	COMBAT VEH MAINT SHOP	CAMP LEJEUNE N C	0.90	2430	84/09/14	21,300	SF	$51.66	$72.09
214-10	MAINTENANCE SHOP	CAMP LEJEUNE N C	0.90	2414	83/07/25	19,000	SF	$51.08	$71.01
214-10	COMBAT VEH MAINT SHOP(2D)	CAMP LEJEUNE N C	0.90	2430	84/09/14	12,180	SF	$50.95	$65.00
214-10	TACTICAL VEH MAINT FAC	CAMP PENDLETON CA MCB	1.14	2445	86/03/24	6,397	SF	$119.11	$109.83

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
214-10	TACT VEHICLE MAINT SHOPS	CAMP PENDLETON CALIFORNIA	1.20	2311	83/01/28	5,371	SF	$47.40	$43.53
214-10	TACTICAL VEH MAINT FAC	CAMP PENDLETON CA MCB	1.14	2445	86/03/24	4,307	SF	$119.61	$107.45
214-10	TACT VEHICLE MAINT SHOPS	CAMP PENDLETON CALIFORNIA	1.20	2311	83/01/28	3,000	SF	$73.44	$65.19
214-10	TACTVEHICLE MAINT SHOPS	CAMP PENDLETON CALIFORNIA	1.20	2311	83/01/28	3,000	SF	$74.39	$66.04
214-10	COMBAT VEHIC MAINT FAC	MCRC TEXARKANA, TX	0.99	2504	86/09/04	2,120	SF	$79.09	$77.25
214-10	NEW VEHICLE MAINT SHOP	NMCRC NEW ORLEANS, LA	1.03	2417	84/06/25	1,653	SF	$113.49	$110.38
	AVERAGE OF ADJUSTED UNIT COST		$78.39						
	AVERAGE FACILITY SIZE		17524	SF					
214-20	TRANSPORTATION SHOPS	OAKLAND CA	1.21	2591	88/03/31	92,243	SF	$91.65	$94.11
214-20	AUTOMOTIVE MAINT FACILITY	MCAS, KANEOHE BAY, HI	1.34	1918	80/03/05	71,191	SF	$42.29	$51.83
214-20	SEAVEE EQUIP MAINT BLDG	CBC GULFPORT, MS	0.87	2504	86/09/14	33,840	SF	$53.45	$74.10
214-20	AUTO MAINT COMPLEX 1 OF 2	ENGLAND AFB ALEXANDRIA LA	1.01	1902	80/04/02	29,432	SF	$54.64	$85.91
214-20	VEHICLE MAINTENANCE FAC	CAMP SMITH, HALAWA HTS,HI	1.34	2194	82/01/22	20,900	SF	$71.37	$68.38
214-20	VEH. MAINT. FAC(WES BLDG)	CHERRY POINT NC	0.90	2311	83/01/28	18,758	SF	$46.55	$61.85
214-20	VEH.MAINT.FAC(MACG BLDG)	CHERRY POINT NC	0.90	2311	83/01/28	16,305	SF	$47.98	$62.58
214-20	AUTO VEH MAINT SHOP	SIGONELLA ITALY	1.00	2440	85/09/27	12,951	SF	$59.15	$63.97
214-20	VEHICLE MAINT BLDG 2 OF 2	NAS CORPUS CHRISTI, TEXAS	0.91	2430	84/09/28	11,734	SF	$65.19	$76.43
214-20	MATERIAL HANDLING EQ MAIN	CHARLESTON AFB, SC	0.91	2565	87/09/14	8,174	SF	$64.56	$69.85
214-20	COMBAT/AUTO VEH MNT SHOP	NAVSTA, PEARL HARBOR, HI	1.34	1981	80/09/19	1,440	SF	$52.05	$47.47
	AVERAGE OF ADJUSTED UNIT COST		$68.77						
	AVERAGE FACILITY SIZE		28815	SF					
214-30	REFUELING VEH MAINT SHOP	LAJES AZORES	1.38	2504	86/09/12	3,600	SF	$83.78	$71.03
	AVERAGE OF ADJUSTED UNIT COST		$71.03						
	AVERAGE FACILITY SIZE		3600	SF					
214-51	MAINTENANCE FACILITY	EL TORO CALIFORNIA	1.20	2428	84/08/08	29,985	SF	$63.95	$66.98
214-51	AUTO ORGANIZATIONAL SHOP	CAMP LEJEUNE N C	0.85	2455	86/04/07	25,800	SF	$56.12	$81.22
214-51	AUTO MAINT FAC	CAMP PENDLETON CALIFORNIA	1.14	2581	88/02/12	12,180	SF	$77.40	$70.70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$72.96						
		AVERAGE FACILITY SIZE	22655	SF					
214-53	FLD MAINT CMPLX SHOP BLDG	CAMP LEJEUNE N C	0.84	2557	87/08/13	53,066	SF	$53.42	$77.51
214-53	FIELD MAINT CMPLX INC II	CAMP LEJEUNE N C	0.84	2596	88/04/27	46,618	SF	$66.17	$93.57
214-53	FIELD MAINT FAC PF #2	CAMP PENDLETON CALIFORNIA	1.14	2581	88/02/01	22,000	SF	$34.56	$34.06
214-53	FIELD MAINT FAC PF #1	CAMP PENDLETON CALIFORNIA	1.14	2581	88/02/01	15,600	SF	$68.85	$63.48
214-53	MAINTENANCE SHOP	CHERRY POINT NC	0.90	2422	84/04/27	13,763	SF	$54.66	$67.39
214-53	FLD MAINT CMPLX INSPC STA	CAMP LEJEUNE N C	0.84	2557	87/08/13	7,502	SF	$68.87	$80.97
		AVERAGE OF ADJUSTED UNIT COST	$69.49						
		AVERAGE FACILITY SIZE	26424	SF					
214-55	WASH & STRIP PADS, PF-4	YUMA ARIZONA	1.25	2076	81/05/20	800	SF	$23.58	$27.43
		AVERAGE OF ADJUSTED UNIT COST	$27.43						
		AVERAGE FACILITY SIZE	715	SF					
215-30	HEAVY GUN SHOP	MCAS, KANEOHE, HI	1.34	2443	86/02/03	28,900	SF	$61.76	$57.56
215-30	SUN SHELTERS	TWENTYNINE PALMS CALIF	1.32	2591	88/03/25	21,400	SF	$15.02	$13.26
215-30	FSSG STORG FAC PF#4	TWENTYNINE PALMS CALIF	1.32	2591	88/03/25	17,960	SF	$46.02	$39.42
215-30	MCCES STORG FAC PF#5	TWENTYNINE PALMS CALIF	1.32	2591	88/03/25	11,999	SF	$50.42	$40.35
		AVERAGE OF ADJUSTED UNIT COST	$37.64						
		AVERAGE FACILITY SIZE	20064	SF					
215-50	WEAPONS SYS SHOP/STORAGE	ANDREWS AFB MD	1.08	2249	82/09/16	12,700	SF	$42.44	$51.18
		AVERAGE OF ADJUSTED UNIT COST	$51.18						
		AVERAGE FACILITY SIZE	12700	SF					
216-10	AMMUNITION OVERHAUL SHOP	NWS CHARLESTON, SC	0.81	2496	86/08/25	14,354	SF	$146.42	$221.02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
216-10	EXPLOS OPS FAC PF#1	KEYPORT WA	1.14	2579	88/01/29	8,896	SF	$116.02	$112.24
	AVERAGE OF ADJUSTED UNIT COST		$166.63						
	AVERAGE FACILITY SIZE		11625	SF					
216-30	MINE ASSEMBLY PLANT	NS CHARLESTON, SC	0.93	2311	83/01/03	16,800	SF	$34.15	$46.55
	AVERAGE OF ADJUSTED UNIT COST		$46.55						
	AVERAGE FACILITY SIZE		16800	SF					
216-40	MK-48 OFF LINE BLDG	SAN DIEGO CALIFORNIA	1.28	2348	83/02/10	3,600	SF	$85.25	$83.10
	AVERAGE OF ADJUSTED UNIT COST		$83.10						
	AVERAGE FACILITY SIZE		3600	SF					
216-50	WPNS/RELEASE SYS SHOP-1-2	BARKSDALE AFB,SHREVEPORT,	1.01	2219	82/06/15	8,520	SF	$50.31	$65.76
	AVERAGE OF ADJUSTED UNIT COST		$65.76						
	AVERAGE FACILITY SIZE		8520	SF					
216-77	AMMUNITION MAINT SHOP	ENGLAND AFB ALEXANDRIA LA	1.01	2295	82/12/16	4,997	SF	$57.57	$72.77
	AVERAGE OF ADJUSTED UNIT COST		$72.77						
	AVERAGE FACILITY SIZE		4997	SF					
217-10	COMM VEH MAINT FAC	CAMP LEJEUNE N C	0.84	2557	87/08/26	58,400	SF	$62.16	$93.17
217-10	COMM/ELEC SPO/STORG PF#2	TWENTYNINE PALMS CALIF	1.32	2591	88/03/25	34,946	SFQ	$42.04	$37.90
217-10	ELECTR/COMM MAINT SHOP	NAVPHIBASE LITTLE CREEK	0.98	2418	84/07/11	33,160	SF	$82.96	$107.96
217-10	ELEC/COMM SP/STRG PF#1	TWENTYNINE PALMS CALIF	1.32	2591	88/03/25	32,522	SF	$42.06	$37.92
217-10	ELEC/COMM MAINT SHOP 1OF3	CAMP LEJEUNE N C	0.86	2496	86/08/12	29,363	SF	$58.58	$84.16
217-10	ELECT. COMM. MAINT. SHOP	CAMP LEJEUNE N C	0.90	2195	82/04/16	24,893	SF	$48.93	$75.59

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
217-10	ELECT/COMM MAINT SHOP	SAN DIEGO CALIFORNIA	1.28	2348	83/02/25	21,850	SF	$88.25	$89.60
217-10	COMM ELECT MAINT FAC	MIRAMAR	1.11	2493	86/06/27	13,666	SF	$78.48	$80.67
217-10	OPERATIONS & MAINT. FAC.	CHERRY POINT NC	0.90	2311	83/01/28	10,400	SF	$64.09	$83.58
217-10	ECM POD SHOP/STORAGE FAC	BARKSDALE SHREVEPORT, LA	1.01	2064	81/04/20	6,800	SF	$58.64	$72.93
217-10	ELECT/COMM MAIN SHOP 2OF3	CAMP LEJEUNE N C	0.86	2496	86/08/12	5,375	SF	$100.52	$118.27
217-10	ELECTRONIC/COMM MAINT SHO	NAS CHASE FIELD, TEXAS	0.95	2447	85/08/27	4,964	SF	$70.71	$76.82
217-10	ELEC/COMM MAIN SHOPS 1OF3	CAMP LEJEUNE N C	0.86	2496	86/08/12	4,750	SF	$102.58	$119.66
217-10	ELECTRONCS COMM MAIN SHOP	CAMP LEJEUNE N C	0.90	2430	84/09/04	3,551	SF	$83.51	$94.01
217-10	ELEC/COMM MAINT SHOP	CAMP PENDLETON CALIFORNIA	1.14	2581	88/02/12	2,000	SF	$114.74	$94.42
	AVERAGE OF ADJUSTED UNIT COST		$84.44						
	AVERAGE FACILITY SIZE		17977	SF					
217-77	ELECTRONIC ASSEM CHECK FA	KEESLER AFB,BILOXI,MS	0.86	2516	87/03/31	15,600	SF	$73.33	$103.43
217-77	TACTICAL CONTROL FLIGHT F	MYRTLE BEACH AFB, SC	0.95	2424	85/01/30	10,255	SF	$89.58	$111.73
	AVERAGE OF ADJUSTED UNIT COST		$107.58						
	AVERAGE FACILITY SIZE		12927	SF					
218-20	WEIGHT HDL/CONS MAIN 1-2	CNSYD, CHARLESTON, SC	0.93	2430	84/09/14	64,739	SF	$62.09	$85.63
218-20	CONST BATL EQUIP MAIN FAC	ROOSEVELT ROADS RQ	1.10	2565	87/09/23	33,930	SF	$61.40	$65.72
218-20	AUTO/MATER HDL MAINT--2/2	CNSYD CHARLESTON, SC	0.93	2430	84/09/14	32,828	SF	$59.01	$78.86
218-20	CNST/WGHT HDL EQ SH 1-2	MCAS BEAUFORT SC	0.94	2438	85/06/13	18,720	SF	$51.79	$61.30
218-20	CED WELDING/METAL SHOP	PORT HUENEME CALIFORNIA	1.20	2579	88/01/29	9,600	SF	$47.22	$38.53
	AVERAGE OF ADJUSTED UNIT COST		$66.00						
	AVERAGE FACILITY SIZE		31963	SF					
218-45	PRECISION MEASURE EQIP LA	KEESLER AFB, BILOXI, MS	0.98	2195	82/04/26	15,517	SF	$60.55	$85.01
218-45	INSTRUMNT CALIBRATN SHOP	SAN DIEGO CA	1.28	2413	84/03/29	11,934	SF	$55.89	$53.01
	AVERAGE OF ADJUSTED UNIT COST		$69.01						
	AVERAGE FACILITY SIZE		13725	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
218-60	GSE MAINT-AIMD SHOP 10F4	NORFOLK VIRGINIA	0.95	2493	86/06/30	28,338	SF	$53.20	$69.27
218-60	GROUND SPRT EQUIP FAC PF1	YUMA ARIZONA	1.25	2076	81/05/20	15,232	SF	$76.30	$88.80
218-60	GROUND SUPPORT EQUIP FAC	JACKSONVILLE NC	0.84	2526	87/06/12	13,018	SF	$69.39	$95.81
218-60	GROUND SUPPORT EQPT SHOP	CHERRY POINT NC	0.90	2430	83/09/16	12,725	SF	$62.12	$82.38
218-60	GROUND SUPPORT EQPT SHOP	CHERRY POINT NC	0.90	2414	83/07/06	12,725	SF	$50.01	$66.76
218-60	GSE MAINT-CNAL SHOP 30F4	NORFOLK VIRGINIA	0.95	2493	86/06/30	12,040	SF	$52.10	$63.18
218-60	GROUND SUPRT EQUIPMNT FAC	MCAS TUSTIN, CA	1.20	2311	83/01/31	9,073	SF	$72.94	$72.01
	AVERAGE OF ADJUSTED UNIT COST		$76.88						
	AVERAGE FACILITY SIZE		14735 SF						
218-61	GSE MAINT-AIMD SHED 20F4	NORFOLK VIRGINIA	0.95	2493	86/06/30	9,038	SF	$18.57	$23.92
218-61	GSE MAINT-CNAL SHED 40F4	NORFOLK VIRGINIA	0.95	2493	86/06/30	7,897	SF	$14.72	$18.76
218-61	GROUND SUPPORT EQUIP SHED	NAS NEW ORLEANS, LA	0.95	2565	87/09/25	7,150	SF	$16.96	$21.01
218-61	GSE COVRD STRGE SHED PF3	YUMA ARIZONA	1.25	2076	81/05/20	5,200	SF	$24.57	$26.67
218-61	GRD SUPPT EQPT HOLDG SHED	KEFLAVIK ICELAND	3.00	2419	84/05/21	4,500	SF	$102.92	$38.83
218-61	GSE COVRD STRGE SHED	YUMA ARIZONA	1.25	2076	81/05/20	2,000	SF	$30.57	$29.75
	AVERAGE OF ADJUSTED UNIT COST		$26.49						
	AVERAGE FACILITY SIZE		7177 SF						
218-62	SUPPORT EQUIPMENT SHOP	CHERRY POINT NC	0.90	2406	83/12/16	57,784	SF	$68.46	$92.62
	AVERAGE OF ADJUSTED UNIT COST		$92.62						
	AVERAGE FACILITY SIZE		57784 SF						
218-80	FIELD MAINTENANCE SHOP	CAMP LEJEUNE N C	0.90	2195	82/04/20	40,993	SF	$40.27	$59.72
	AVERAGE OF ADJUSTED UNIT COST		$59.72						
	AVERAGE FACILITY SIZE		40993 SF						
219-10	BASE CIVIL ENGINEERING FA	SHAW AFB,SC	0.68	2406	83/12/22	76,897	SF	$43.94	$85.52
219-10	PUBLIC WORKS FACILITY	ANNAPOLIS MARYLAND	1.04	2513	87/01/30	29,950	SF	$53.69	$62.05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
219-10	PUBLIC WORKS SHOP	NAS KINGSVILLE, TEXAS	0.91	2432	85/02/07	21,000	SF	$48.06	$62.37
219-10	MAINTENANCE SHOP PF-1	YUMA ARIZONA	1.25	2194	82/01/19	14,130	SF	$52.08	$51.04
219-10	PW BLDG	CAMP LEJEUNE N C	0.90	2347	83/04/25	11,775	SF	$53.72	$67.12
219-10	PUBLIC WORKS SHOP	NTTC PENSACOLA, FLORIDA	0.85	2419	83/11/22	3,543	SF	$46.42	$55.11
		AVERAGE OF ADJUSTED UNIT COST	$63.86						
		AVERAGE FACILITY SIZE	26215 SF						
219-77	ENG COMPLEX-SHOP/STOR 2-2	KEESLER AFB, MISSISSIPPI	0.98	2249	82/09/17	61,527	SF	$29.00	$40.56
219-77	MAINT. STORAGE FACILIY	NORFOLK VIRGINIA	0.95	2526	87/06/01	54,720	SF	$20.47	$26.30
219-77	WAREHOUSE PF-3	YUMA ARIZONA	1.25	2194	82/01/19	14,960	SF	$27.37	$26.33
219-77	PEST CONTROL SHOP	NWS, CHARLESTON, SC	0.93	1981	80/09/30	1,815	SF	$37.84	$49.72
		AVERAGE OF ADJUSTED UNIT COST	$35.72						
		AVERAGE FACILITY SIZE	33255 SF						
310-17	ELECTRO OPTICS LAB	NRL WASHINGTON, DC	1.08	2432	85/02/25	37,912	SF	$217.52	$242.64
		AVERAGE OF ADJUSTED UNIT COST	$242.64						
		AVERAGE FACILITY SIZE	37912 SF						
310-23	APPLIED RESEARCH LAB	NSWC DAHLGREN,VA.	1.08	1750	79/03/05	35,000	SF	$62.92	$97.52
		AVERAGE OF ADJUSTED UNIT COST	$97.52						
		AVERAGE FACILITY SIZE	35000 SF						
310-29	SURVEILLANCE SECURITY LAB	MCAS, KANEOHE BAY, HI	1.34	1554	77/08/09	1,230	SF	$57.38	$80.73
		AVERAGE OF ADJUSTED UNIT COST	$80.73						
		AVERAGE FACILITY SIZE	1230 SF						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
310-37	OCEANOGRAPH RESEARCH LAB	NSTL BAY ST LOUIS, MS	0.98	2233	82/07/16	56,000	SF	$71.98	$101.44
310-37	NAVAL OCEANOGRAPHY PRG BL	NSTL BAY ST LOUIS, MS	0.86	2565	87/09/15	7,475	SF	$82.09	$93.18
	AVERAGE OF ADJUSTED UNIT COST		$97.31						
	AVERAGE FACILITY SIZE		31737 SF						
311-10	AIRCRAFT T & E FACILITY	NATC PATUXENT RIVER,MD	1.05	1756	79/05/11	12,825	SF	$316.61	$503.12
	AVERAGE OF ADJUSTED UNIT COST		$503.12						
	AVERAGE FACILITY SIZE		12825 SF						
312-10	AMRAAM ENVRNMTL TEST CELL	POINT MUGU CALIFORNIA	1.32	2413	84/03/14	1,235	SF	$501.45	$461.27
	AVERAGE OF ADJUSTED UNIT COST		$461.27						
	AVERAGE FACILITY SIZE		1235 SF						
313-25	SHORE COMM SYS LAB (1OF2)	PORTSMOUTH VIRGINIA	0.95	2516	87/03/03	14,685	SF	$74.00	$93.51
313-25	ELEC SYS ENG CTR (2 OF 2)	PORTSMOUTH VIRGINIA	0.95	2516	87/03/03	14,651	SF	$71.26	$90.05
313-25	ELEC WARFARE LAB (ALT)	CHESAPEAKE VIRGINIA	0.93	2565	87/09/30	10,250	SF	$60.44	$72.06
	AVERAGE OF ADJUSTED UNIT COST		$85.20						
	AVERAGE FACILITY SIZE		13195 SF						
315-20	MINE WARFARE SYSTEMS LAB	YORKTOWN VIRGINIA	0.95	2504	86/09/04	47,564	SF	$80.81	$105.88
315-20	MINE ENGINEERING LAB	YORKTOWN VIRGINIA	0.98	2430	83/09/30	35,097	SF	$65.47	$84.78
315-20	LAND BASED TEST FAC	NSCS PANAMA CITY, FL	0.87	2509	86/10/03	11,102	SF	$73.92	$91.02
315-20	SYS TEST/CONTROL LAB1OF2	NCSC PANAMA CITY, FLORIDA	0.92	2418	84/12/14	7,969	SF	$154.82	$180.45
315-20	MAGNETIC ENVIRON FAC	NCSC PANAMA CITY, FL	0.92	2418	84/12/14	3,000	SF	$131.95	$144.81
	AVERAGE OF ADJUSTED UNIT COST		$121.38						
	AVERAGE FACILITY SIZE		20946 SF						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
315-30	WEAPONS SYSTEMS ENGR BLDG	PORT HUENEME CA CBC	1.20	2516	87/03/13	112,184	SF	$51.44	$52.54
315-30	AEGIS COMBAT FACILITY	NSWC DAHLGREN,VA	1.08	2109	81/07/23	10,000	SF	$112.39	$120.47
	AVERAGE OF ADJUSTED UNIT COST		$86.50						
	AVERAGE FACILITY SIZE		61092	SF					
317-15	ECM DETECT SYS LAB	CHINA LAKE CA NWC	1.26	2509	86/11/28	2,050	SF	$242.58	$224.82
	AVERAGE OF ADJUSTED UNIT COST		$224.82						
	AVERAGE FACILITY SIZE		2050	SF					
317-20	ELEC/ELECT TEST LAB	POINT MUGU CALIFORNIA	1.20	2438	85/06/11	79,242	SF	$106.49	$112.26
317-20	COMBAT SYSTEMS FACILITY	NSCW DAHLGREN, VA	1.08	2219	82/06/25	39,353	SF	$73.26	$91.38
317-20	MIDWAY RESEARCH CENTER	MCDEC, QUANTICO, VA.	0.96	2565	87/09/11	5,156	SF	$151.80	$149.27
	AVERAGE OF ADJUSTED UNIT COST		$117.63						
	AVERAGE FACILITY SIZE		41250	SF					
317-25	MISSION OPER. SUPP CENTER	NRL WASHINGTON, DC	1.08	2432	85/02/28	123,000	SF	$114.53	$134.47
317-25	ELECTRONIC SYS EVAL FAC	ST GEORGES PARISH BERMUDA	0.93	2516	87/03/18	7,380	SF	$109.71	$113.53
	AVERAGE OF ADJUSTED UNIT COST		$124.00						
	AVERAGE FACILITY SIZE		65190	SF					
320-10	SPEC WARFARE RDT&E COMP.	NCSC PANAMA CITY, FL	0.87	2581	88/02/29	18,000	SF	$44.22	$60.73
320-10	HYPERBARIC TEST FAC	NCSC PANAMA CTY, FLORIDA	0.87	2565	87/09/30	5,973	SF	$88.46	$108.54
320-10	UNDERWATER EQUIP LAB	NCSC PANAMA CITY, FLORIDA	0.87	2557	87/08/05	5,000	SF	$101.32	$121.31
	AVERAGE OF ADJUSTED UNIT COST		$96.86						
	AVERAGE FACILITY SIZE		9657	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
371-12	TECHNICAL OPS FAC--1 OF 2	NOTU, CAPE CANAVERAL, FL	0.96	2402	84/01/13	34,662	SF	$83.46	$106.03
		AVERAGE OF ADJUSTED UNIT COST	$106.03						
		AVERAGE FACILITY SIZE	34662	SF					
411-50	SOUTH TANK FARM-POL FAC	LAJES AZORES	1.38	2440	85/09/30	1,530,000	BBL	$9.82	$9.18
411-50	CONSTRUCT 600 MBBL TANK	DFSP, ANDERSEN AFB, GUAM	2.15	2430	83/09/02	600,000	BBL	$22.66	$13.09
411-50	FUEL STORAGE-BULK	ROOSEVELT ROADS RQ	1.05	2440	85/09/15	500,000	BBL	$11.15	$12.62
411-50	FUEL STORAGE TANK	NSC, PEARL HARBOR, HI	1.34	2295	82/12/06	150,000	BBL	$10.92	$8.88
		AVERAGE OF ADJUSTED UNIT COST	$10.94						
		AVERAGE FACILITY SIZE	596000	BBL					
421-12	FUSE & DETONATOR MAGAZINE	TWENTYNINE PALMS CALIF	1.22	2427	85/04/26	1,500	SF	$121.41	$120.13
		AVERAGE OF ADJUSTED UNIT COST	$120.13						
		AVERAGE FACILITY SIZE	1500	SF					
421-22	HIGH EXPLOSIVE MAGAZINE	YORKTOWN VIRGINIA	0.98	2418	84/12/13	11,263	SF	$83.53	$108.71
421-22	HIGH EXPLOSIVE MAGAZINE	NWS CHARLESTON, SC	0.94	2581	88/02/03	9,000	SF	$92.77	$116.70
421-22	LCACC MAGAZINE RELOCATION	NORFOLK VIRGINIA	0.98	2424	85/01/31	8,288	SF	$100.93	$129.67
421-22	HIGH EXPLOSIVE MAGAZINE	TWENTYNINE PALMS CALIF	1.22	2427	85/04/26	8,000	SF	$78.19	$80.59
421-22	BOX-TYPE HIGH EXPL MAGZN	EL TORO CALIFORNIA	1.15	2438	85/06/06	6,267	SF	$134.10	$144.46
421-22	SEVEN MAGAZINES	DAM NECK V BEACH VA	0.98	2424	85/01/24	4,784	SF	$104.30	$124.88
421-22	ARCH-TYPE HIGH EXP MAGZNE	EL TORO CALIFORNIA	1.15	2438	85/06/06	3,750	SF	$146.36	$142.94
421-22	HIGH EXPLOSIVE MAGAZINES	JACKSONVILLE NC	0.90	2430	83/09/01	3,384	SF	$125.62	$154.39
		AVERAGE OF ADJUSTED UNIT COST	$125.29						
		AVERAGE FACILITY SIZE	6103	SF					
421-32	INERT STORAGE BLDG	POMFLANT, CHARLESTON, SC	0.93	1974	80/08/20	31,143	SF	$36.50	$60.67
421-32	ROCKET CHKOUT/ASEM STORAG	NAS NEW ORLEANS, LA	1.08	2184	81/12/21	10,055	SF	$54.83	$61.91

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$61.29						
		AVERAGE FACILITY SIZE	20599	SF					
421-35	READY SERVICE MAGAZINE	TWENTYNINE PALMS CALIF	1.22	2427	85/04/26	128	SF	$121.56	$120.27
		AVERAGE OF ADJUSTED UNIT COST	$120.27						
		AVERAGE FACILITY SIZE	128	SF					
421-52	SMOKELESS POWDER MAGAZINE	TWENTYNINE PALMS CALIF	1.22	2427	85/04/26	21,560	SF	$74.88	$74.08
		AVERAGE OF ADJUSTED UNIT COST	$74.08						
		AVERAGE FACILITY SIZE	21560	SF					
421-72	TYPE D MAGAZINE	YORKTOWN VIRGINIA	0.95	2565	87/09/03	16,478	SF	$70.79	$88.66
421-72	MAGAZINES, MISSILE	POMFLANT, CHARLESTON,SC	0.93	2195	82/04/14	15,960	SF	$104.97	$156.93
421-72	MISSILE MAGAZINES	SAN DIEGO CA	1.23	2596	88/04/13	10,827	SF	$122.16	$110.98
421-72	INERT STORAGE FAC	YORKTOWN VIRGINIA	0.95	2565	87/09/03	10,100	SF	$20.84	$24.55
421-72	TYPE C MAGAZINE	YORKTOWN VIRGINIA	0.95	2565	87/09/03	10,077	SF	$65.60	$77.32
		AVERAGE OF ADJUSTED UNIT COST	$91.68						
		AVERAGE FACILITY SIZE	12688	SF					
431-10	COLD STORAGE WAREHOUSE	NSC PEARL HARBOR, HI	1.34	2581	88/02/03	49,260	SF	$100.49	$93.54
431-10	COLD STORAGE WAREHOUSE	TWENTYNINE PALMS CALIF	1.20	2406	83/12/27	9,200	SF	$68.73	$65.17
431-10	COLD STORAGE WAREHOUSE	NAS MEMPHIS MILLINGTON,TN	1.00	2388	83/06/08	8,360	SF	$53.10	$60.31
431-10	COLD STORAGE WAREHOUSE	SIGONELLA ITALY	1.19	2295	82/12/23	4,838	SF	$162.15	$151.26
431-10	COLD STRGE WAREHOUSE	YUMA ARIZONA	1.25	2418	84/12/11	3,755	SF	$124.68	$103.30
431-10	COLD STORAGE WAREHOUSE	NAS CORPUS CH., TX	0.91	2443	86/02/11	3,580	SF	$106.43	$119.88
		AVERAGE OF ADJUSTED UNIT COST	$98.91						
		AVERAGE FACILITY SIZE	14968	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
441-10	WRHSE FIRE PROT	SAN DIEGO CALIFORNIA	1.21	2591	88/03/14	600,000	SF	$2.50	$2.56
441-10	WAREHOUSE ALTER BLD X-134	NORFOLK VIRGINIA	0.91	2589	87/12/21	180,000	SF	$12.53	$16.93
441-10	WAR RESERVES WAREHOUSE	NCBC GULFPORT, MISSISSIPP	0.91	2424	85/01/11	110,640	SF	$20.09	$28.07
441-10	AVIA SUPPORT WAREHOUSE	CHERRY POINT NC	0.97	2528	87/07/10	97,392	SF	$35.56	$44.71
441-10	GENERAL WAREHOUSE	NS MAYPORT,FLORIDA	0.90	2406	84/02/01	62,953	SF	$47.50	$66.25
441-10	GENERAL WAREHOUSE	SAN DIEGO CALIFORNIA	1.28	2295	82/12/23	60,000	SF	$27.46	$27.94
441-10	BASE SUPPLY WAREHOUSE	NAPLES ITALY	1.19	2406	83/12/31	49,713	SF	$18.96	$19.02
441-10	STORAGE FACILITIES DPDO	SELFRIDGE ANGB MT CLM,MI	1.05	1981	80/09/01	42,000	SF	$21.16	$28.38
441-10	WAREHSE FAC-LARGE WAREHSE	CHERRY POINT NC	0.90	2351	83/05/16	41,160	SF	$18.74	$24.71
441-10	GENERAL WAREHOUSE	NAS CECIL FIELD, FLORIDA	0.90	2406	83/12/23	37,848	SF	$41.34	$52.26
441-10	SUPPLY SUPPORT FAC	BANGOR WASHINGTON	1.30	2194	82/01/18	32,813	SF	$55.46	$52.25
441-10	BASE SUPPLY & EQUIP WRHSE	TORREJON A.B. SPAIN	0.92	2433	85/12/26	30,304	SF	$22.21	$26.42
441-10	WAREHOUSE	TUSTIN CALIFORNIA	1.20	2200	82/02/01	23,712	SF	$33.62	$33.01
441-10	STOCKAGE WAREHOUSE	TORREJON AIR BASE SPAIN	0.92	2424	85/01/25	19,993	SF	$17.32	$19.78
441-10	PET OIL LUBE STORAGE FAC	BREMERTON WASHINGTON	1.15	2443	86/02/07	16,750	SF	$58.16	$52.27
441-10	MARINE WAREHOUSE	NAS, WILLOW GROVE,PA	1.01	2295	82/12/27	16,700	SF	$34.78	$37.89
441-10	MAG-41 LOGISTICS BLDG	NAS DALLAS, TEXAS	0.94	2440	85/09/10	10,787	SF	$43.70	$46.90
441-10	VEH STRGE/MAINT WRHSE	ADAK ALASKA	3.19	2428	83/08/08	10,000	SF	$59.95	$18.89
441-10	BASE SUPPLY WAREHOUSE	SIGONELLA ITALY	1.00	2428	85/03/29	9,900	SF	$31.63	$31.79
441-10	GENERAL WAREHOUSE	CAMP PENDLETON CALIFORNIA	1.20	2430	84/09/12	9,002	SF	$56.64	$47.42
441-10	LCAC COMPLEX GEN WRHSE	NAB LCREEK NORFOLK VA	0.98	2438	85/06/24	9,000	SF	$42.13	$43.04
441-10	PUBLIC WORKS WAREHOUSE	ADAK ALASKA	3.19	2413	84/03/01	8,100	SF	$88.01	$27.91
441-10	WAREHSE FAC-SMALL ORD WHS	CHERRY POINT NC	0.90	2351	83/05/16	7,200	SF	$17.15	$19.61
441-10	SUPPLY FACILITY 2 OF 2	CHESAPEAKE VIRGINIA	0.95	2496	86/08/29	7,050	SF	$45.20	$46.15
441-10	ELECT & ANTENNA WAREHSES	ADAK ALASKA	3.19	2413	84/03/01	5,000	SF	$84.37	$26.53
441-10	ELECT & ANTENNA WAREHSES	ADAK ALASKA	3.19	2413	84/03/01	4,000	SF	$88.87	$27.95
441-10	WAREHOUSE	NORFOLK VIRGINIA	0.98	2249	82/09/23	3,527	SF	$17.94	$19.69
	AVERAGE OF ADJUSTED UNIT COST		$32.90						
	AVERAGE FACILITY SIZE		61129	SF					
441-11	AVIA WAREHOUSE, BLDG B	JACKSONVILLE NC	0.84	2581	88/02/04	51,010	SF	$35.51	$49.98
441-11	AVIATION WAREHOUSE,BLDG A	JACKSONVILLE NC	0.84	2581	88/02/04	24,696	SF	$46.35	$59.08
	AVERAGE OF ADJUSTED UNIT COST		$54.53						
	AVERAGE FACILITY SIZE		37853	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
441-12	MEDICAL WAREHOUSE	MCAS KANEOHE, HI	1.34	2443	86/02/26	42,500	SF	$37.95	$35.38
441-12	COMMUNICATION SUPT WHSE	CAMP PENDLETON CALIFORNIA	1.14	2591	88/03/17	39,975	SF	$32.46	$33.54
441-12	AVIATION SUPPLY FACILITY	MCAS KANEOHE BAY, HI	1.34	2493	86/06/30	31,920	SF	$28.02	$25.32
		AVERAGE OF ADJUSTED UNIT COST	$31.41						
		AVERAGE FACILITY SIZE	29198 SF						
441-13	SECURITY WAREHOUSE	BARSTOW CALIFORNIA	1.22	2418	84/12/31	90,617	SF	$51.80	$51.43
		AVERAGE OF ADJUSTED UNIT COST	$51.43						
		AVERAGE FACILITY SIZE	90617 SF						
441-20	CONTROL HUMIDITY WHSE	CBC GULFPORT, MS	0.86	2509	87/02/20	306,000	SF	$38.72	$55.34
441-20	CONTROLLED HUMIDITY WHSE	NTTC PENSACOLA, FL	0.84	2526	87/06/26	29,490	SF	$35.91	$41.66
		AVERAGE OF ADJUSTED UNIT COST	$48.50						
		AVERAGE FACILITY SIZE	167745 SF						
441-30	HAZ/FLAM MAT STORHSE 1-2	NSC, CHARLESTON, SC	0.93	2194	82/01/22	44,000	SF	$56.06	$88.46
441-30	CONFORMING STORAGE FAC	CHASN SC	0.91	2557	87/08/20	36,000	SF	$51.22	$70.87
441-30	HAZ MH STG/HNDLG FACY	NORFOLK VIRGINIA	0.95	2565	87/09/03	13,383	SF	$136.91	$171.48
441-30	CONFORMING STORAGE FAC	BARSTOW CALIFORNIA	1.20	2565	87/09/10	13,060	SF	$47.71	$47.30
441-30	HAZ FLMBL STORHOUSE(4036)	CHERRY POINT NC	0.87	2565	87/09/15	12,057	SF	$138.22	$187.08
441-30	HAZ/FLAMM MAT STOR FAC	PEARL HARBOR NSY	1.34	2479	86/05/28	12,040	SF	$144.70	$131.57
441-30	HAZARDOUS MAT'L STRG FAC	MCAS BEAUFORT, SC	0.94	2513	87/01/21	10,150	SF	$30.24	$37.88
441-30	HAZ/FLAM STORAGE BUILDING	NAS OCEANA, VA BEACH,VA	0.95	2493	86/06/27	8,168	SF	$67.48	$81.04
441-30	HAZ/FLAM STOREHOUSE	NSC PNCLA, FL	0.84	2581	88/02/04	6,500	SF	$119.39	$150.79
441-30	HAZ/FLAM STOR BLDG 1 OF 2	NORFOLK VIRGINIA	0.95	2493	86/06/27	5,425	SF	$56.46	$63.48
441-30	HAZ/FLAM STOR FAC 1 OF 2	PWC PENSACOLA, FL	0.84	2513	87/01/07	3,803	SF	$56.24	$68.47
441-30	HAZ/FLAM STOREHOUSE PF #1	CAMP PENDLETON CALIFORNIA	1.14	2581	88/02/12	3,000	SF	$113.24	$97.20
441-30	HAZ/FLAM STOREHOUSE PF #2	CAMP PENDLETON CALIFORNIA	1.14	2581	88/02/12	3,000	SF	$126.48	$108.57
441-30	LCAC COMPLEX FLAM STORAGE	NAB LCREEK NORFOLK VA	0.98	2438	85/06/24	2,000	SF	$60.84	$62.68
		AVERAGE OF ADJUSTED UNIT COST	$97.63						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE FACILITY SIZE	10799	SF					
441-35	HAZ/FLAMM STOR SHED 2--2	NSC CHARLESTON, SC	0.93	2194	82/01/22	25,620	SF	$20.21	$30.54
441-35	VEHICLE STORAGE SHED	NORFOLK VIRGINIA	0.98	2419	83/11/25	5,040	SF	$25.93	$27.85
		AVERAGE OF ADJUSTED UNIT COST	$29.19						
		AVERAGE FACILITY SIZE	15330	SF					
441-71	SOAP & OUTFITTING BLDG.	SUB BASE NLON CT	1.13	2249	82/09/10	18,400	SF	$80.27	$96.39
441-71	MAINT. MAT'L STOR. BLDG.	NORFOLK VIRGINIA	0.98	2220	82/05/05	9,647	SF	$59.60	$76.44
		AVERAGE OF ADJUSTED UNIT COST	$86.41						
		AVERAGE FACILITY SIZE	14023	SF					
441-72	SERVMART	SAN DIEGO CALIFORNIA	1.18	2433	85/05/15	39,600	SF	$40.97	$41.81
		AVERAGE OF ADJUSTED UNIT COST	$41.81						
		AVERAGE FACILITY SIZE	39600	SF					
510-10	HOSPITAL	TRAVIS AFB, FAIRFIELD, CA	1.27	2438	85/06/27	773,546	SF	$146.36	$152.19
510-10	HOSPITAL REPLACEMENT	ROTA SPAIN	0.92	2457	85/07/15	72,834	SF	$80.39	$96.47
		AVERAGE OF ADJUSTED UNIT COST	$124.33						
		AVERAGE FACILITY SIZE	127308	SF					
510-77	MEDICAL STOR (WRM) FAC	KEESLER AFB, BILOXI, MS	0.86	2516	87/03/05	10,173	SF	$44.53	$60.28
		AVERAGE OF ADJUSTED UNIT COST	$60.28						
		AVERAGE FACILITY SIZE	10173	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
530-50	ENVIRON MEDICINE FAC	BARKSDALE AFB, LA	1.01	2428	85/03/11	3,695	SF	$87.96	$108.34
530-50	MEDICAL FOOD INSP FAC	KEESLER AFB, BILOXI, MS	0.98	2064	81/04/27	3,302	SF	$90.50	$132.40
		AVERAGE OF ADJUSTED UNIT COST	$120.37						
		AVERAGE FACILITY SIZE	3498 SF						
540-10	DENTAL CLINIC	TRAVIS AFB, FAIRFIELD, CA	1.27	2438	85/06/27	23,597	SF	$206.85	$195.73
		AVERAGE OF ADJUSTED UNIT COST	$195.73						
		AVERAGE FACILITY SIZE	23597 SF						
550-10	MEDICAL/DENTAL CLINIC	CHARLESTON AFB, SC	0.93	2433	85/05/31	73,231	SF	$89.37	$121.81
550-10	MEDICAL/DENTAL CLINIC	NAS PENSACOLA, FL	0.85	2504	86/09/12	54,500	SF	$107.85	$154.64
550-10	NAVAL MED BR CLINIC	NAVREGMEDCLIN PEARL, HI	1.34	2528	87/07/10	54,260	SF	$102.20	$92.07
550-10	BRANCH MEDICAL CLINIC	PORT HUENEME CALIFORNIA	1.32	2402	84/01/31	48,428	SF	$95.13	$90.62
550-10	MEDICAL/DENTAL CLINIC	MCAS, KANEOHE BAY, HI	1.34	2428	84/08/17	47,200	SF	$125.57	$116.57
550-10	MEDICAL CLINIC	BREMERTON WASHINGTON	1.30	2432	85/02/28	32,742	SF	$97.05	$87.30
550-10	MEDICAL/DENTAL CLINIC	CAMP LEJEUNE NO CAROLINA	0.84	2557	87/08/27	27,400	SF	$110.36	$142.01
550-10	MEDICAL/DENTAL CLINIC	NSSB KINGS BAY,GEORGIA	0.92	1981	80/10/24	24,400	SF	$103.40	$153.91
550-10	MEDICAL/DENTAL CLINIC	MCDEC QUANTICO,VA	1.08	1899	79/10/22	17,115	SF	$93.17	$117.78
		AVERAGE OF ADJUSTED UNIT COST	$119.63						
		AVERAGE FACILITY SIZE	42141 SF						
610-10	CONSOLIDATED SUPP CTR 2-2	SHAW AFB SUMTER SC	0.80	2479	86/05/23	80,020	SF	$51.93	$84.30
610-10	ADMINISTRATIVE OFFICE	NORFOLK VIRGINIA	0.95	2457	85/07/01	44,800	SF	$55.78	$76.10
610-10	SEABEE BATT HDQTRS 3 OF 4	CBC GULFPORT, MS	0.87	2447	85/08/29	38,848	SF	$61.24	$90.61
610-10	WING HEADQUARTERS BLDG	CHARLESTON AFB, CHASN,SC	0.93	2432	85/02/06	37,600	SF	$62.45	$86.98
610-10	BASE ENG COMPLX-ADMIN 1-2	KEESLER AFB, MISSISSIPPI	0.98	2249	82/09/17	28,214	SF	$53.48	$74.83
610-10	BATTALION HDQRTERS B-500	CAMP LEJEUNE N C	0.83	2557	87/08/12	28,100	SF	$53.99	$78.45
610-10	SEABEE OPER HQ PF #1	PORT HUENEME CALIFORNIA	1.20	2521	87/04/17	27,863	SF	$71.89	$73.29
610-10	SEABEE REG HDQTRS (2-4)	CBC GULFPORT, MS	0.87	2447	85/08/29	26,962	SF	$73.11	$105.90
610-10	S.I.M.A. (ADMIN.)	LONG BEACH CALIFORNIA	1.20	2427	85/04/05	26,228	SF	$55.22	$58.46
610-10	WING HDQTRS 1 OF 2	SHAW AFB SUMTER SC	0.80	2479	86/05/23	25,484	SF	$72.59	$112.88
610-10	SEABEE BATTALION HDQTRS	CBC GULFPORT, MS	0.86	2565	87/09/22	19,424	SF	$67.57	$93.48

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
610-10	BATTALION HEADQUARTERS	TWENTYNINE PALMS CALIF	1.22	2427	85/04/26	17,600	SF	$76.96	$79.32
610-10	SEABEE OPER HQ PF #2	PORT HUENEME CALIFORNIA	1.20	2521	87/04/17	17,234	SF	$71.64	$71.52
610-10	SEABEE OPER HQ PF #3	PORT HUENEME CALIFORNIA	1.20	2521	87/04/17	17,234	SF	$71.64	$71.52
610-10	ADMIN BLDG	NORFOLK VIRGINIA	0.95	2440	85/09/05	16,578	SF	$60.05	$78.24
610-10	A/CRAFT MAINT CONT BLDG	ENGLAND AFB ALEXANDRIA LA	1.01	2195	82/04/20	16,510	SF	$46.66	$63.56
610-10	ADM BLDG SUPER OF SHIPBLD	NS MAYPORT, FLORIDA	0.90	2424	85/01/22	16,400	SF	$65.28	$90.37
610-10	110 ADMIN SUPP/AFRTS	SIGONELLA ITALY	1.10	2433	85/12/30	15,967	SF	$67.98	$76.72
610-10	ADMINISTRATIVE BLDG	NAS ATLANTA MARIETTA, GA	0.94	2064	81/04/30	15,300	SF	$56.52	$87.98
610-10	PASS OFFICE	LITTLE CREEK	0.98	2427	85/04/08	15,097	SF	$50.43	$64.04
610-10	PAY & PERSON SUPP OF 4-4	CBC GULFPORT, MS	0.87	2447	85/08/29	14,500	SF	$56.25	$79.80
610-10	ADMIN OFF BLDG	NAS MEMPHIS,MILLINGTON,TN	0.95	2504	86/09/05	13,900	SF	$76.88	$96.61
610-10	LCAC COMPLEX ADMIN OFFICE	NAB LCREEK NORFOLK VA	0.98	2438	85/06/24	13,415	SF	$58.95	$73.02
610-10	ADMINISTRATION BLDG	MOFFETT FIELD CALIFORNIA	1.25	2295	82/12/29	13,165	SF	$48.58	$49.61
610-10	ORDNANCE ADMIN BLDG	NWS CHARLESTON, SC	0.91	2509	87/02/02	12,865	SF	$66.30	$85.07
610-10	PAY & PERSONNEL SUP OFF	NSA NEW ORLEANS, LA	1.08	2433	85/05/24	11,710	SF	$75.01	$81.99
610-10	PERSONNEL SUPPORT OFFICE	NAS WHITING FLD, FL	0.84	2513	87/01/26	11,500	SF	$47.27	$64.32
610-10	MODIF TO BLDG V-29	NORFOLK VIRGINIA	0.91	2581	88/02/19	9,840	SF	$4.75	$5.64
610-10	PRODUCTION SUPPORT BLDG	CHERRY POINT NC	0.90	2416	83/10/13	9,455	SF	$44.35	$56.36
610-10	ADMINISTRATIVE BLDG PF-2	YUMA ARIZONA	1.25	2194	82/01/19	8,470	SF	$62.64	$61.96
610-10	PASS OFFICE BLDG	NAS KINGSVILLE, TEXAS	0.96	2440	85/09/30	7,470	SF	$68.00	$77.32
610-10	PUBLIC WORKS ADMIN BLDG	NAS KINGSVILLE, TEXAS	0.91	2253	82/08/31	6,653	SF	$43.58	$56.10
610-10	ADMINISTRATION BLDG	MWTC BRIDGEPORT, CA	1.23	2351	83/05/27	6,100	SF	$132.23	$119.61
610-10	ORDNANCE TRAINING FAC	NOS INDIAN HEAD, MD	1.08	2200	82/02/12	5,600	SF	$71.28	$77.77
610-10	PERSONNEL SUPT DET FAC	CHINA LAKE CALIFORNIA	1.26	2568	87/10/02	5,383	SF	$80.92	$64.27
610-10	ADMIN OFFICE BLDG 1206	NSTL BAY ST LOUIS, MS	1.00	2433	85/05/04	5,100	SF	$60.50	$63.91
610-10	CIVIL ENG TRAIN FAC	BARKSDALE AFB,LOUISIANA	1.01	2016	81/02/03	5,012	SF	$45.77	$57.77
610-10	BATTALION H.Q. BLDG 300	CAMP LEJEUNE N C	0.83	2557	87/08/12	4,800	SF	$70.28	$84.37
610-10	TACT DATA SYSTEM SUPPORT	LONG BEACH CA	1.20	2509	87/02/26	4,519	SF	$77.23	$65.34
610-10	ADMIN BLDG-PART 2 OF 2	ENGLAND AFB ALEXANDRIA LA	1.01	1902	80/04/02	4,513	SF	$73.22	$97.09
610-10	ADMIN OFFICE	SAN DIEGO CA	1.23	2433	86/01/31	3,907	SFO	$87.28	$73.02
610-10	ADMINISTRATIVE OFFICE	NORFOLK VIRGINIA	0.95	2496	86/08/20	3,844	SF	$72.76	$76.84
610-10	ADMINISTRATION BLDG	CAMP PENDLETON CALIFORNIA	1.20	2352	83/03/24	3,120	SF	$68.54	$60.29
610-10	FLEET DIGITAL COMM CTR	NORFOLK VIRGINIA	0.95	2440	85/09/14	2,357	SF	$73.85	$77.78
610-10	FLIGHT SIM ADMIN BLDG	NAS NEW ORLEANS, LA	1.03	2414	83/07/20	1,595	SF	$78.30	$76.24
610-10	SUPPORT BLDG PF#2	KEYPORT WA	1.14	2579	88/01/29	816	SF	$85.30	$70.24

AVERAGE OF ADJUSTED UNIT COST $75.45
AVERAGE FACILITY SIZE 14599 SF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
610-20	AUTO-DATA PROCESSING CTR	NSPCC,MECHANICSBURG,PA.	0.95	2418	84/12/28	103,000	SF	$84.39	$118.27
610-20	DATA PROCESSING CENTER	NARDAC JACKSONVILLE,FL	0.87	2565	87/09/24	91,270	SF	$81.72	$116.61
610-20	AUTOMATED DATA SYS. FAC.	MCDEC QUANTICO,VA	1.08	1902	80/04/02	59,671	SF	$64.32	$97.58
610-20	DATA PROCESSING CENTER	CAMP PENDLETON CALIFORNIA	1.20	2419	84/05/30	50,094	SF	$72.75	$77.28
610-20	DATA PROCESSING CENTER	BANGOR WASHINGTON	1.30	2406	83/12/16	8,432	SF	$115.77	$93.48
610-20	AUTOMATED DATE PROC FAC	CHARLESTON AFB, SC	0.93	2352	83/03/10	8,400	SF	$67.81	$78.29
610-20	DATA AUTOMATION FACILITY	ENGLAND AFB ALEXANDRIA LA	1.01	2195	82/04/16	8,007	SF	$73.49	$83.72
610-20	DATA PROCESSING PLANT	SHAW AFB, SUMTER, SC	0.92	2295	82/12/16	7,700	SF	$62.71	$74.36
610-20	ADP FACILITY	KEFLAVIK ICELAND	3.00	2430	83/09/27	7,468	SF	$209.25	$71.87
610-20	DATA PROCESSING CENTER	NWS CHARLESTON, SC	0.93	2194	82/01/27	5,733	SF	$74.31	$89.66
610-20	DATA PROCESSING CENTER	CBC GULFPORT, MS	0.86	2565	87/09/21	5,005	SF	$93.89	$104.79
	AVERAGE OF ADJUSTED UNIT COST		$91.44						
	AVERAGE FACILITY SIZE		29688	SF					
610-72	BATTALION HEADQUARTERS	CAMP PENDLETON CALIFORNIA	1.14	2526	87/06/23	8,400	SF	$66.65	$67.80
	AVERAGE OF ADJUSTED UNIT COST		$67.80						
	AVERAGE FACILITY SIZE		8400	SF					
610-73	COMPANY/BATTERY OPS CTR	MCAS KANEOHE BAY, HI	1.34	2509	87/02/16	81,145	SF	$91.43	$79.67
	AVERAGE OF ADJUSTED UNIT COST		$79.67						
	AVERAGE FACILITY SIZE		81145	SF					
711-00	FBIS HOUSING (TWNHSE) 1-2	NAS KEY WEST, FLORIDA	1.07	2440	85/09/06	9,840	SF	$62.91	$74.30
711-00	FBIS HOUSING (1 UNIT) 2-2	NAS KEY WEST, FL	1.07	2440	85/09/06	1,940	SF	$65.36	$63.77
	AVERAGE OF ADJUSTED UNIT COST		$69.03						
	AVERAGE FACILITY SIZE		5890	SF					
711-04	232 FAMILY HSG UNITS	YORKTOWN VIRGINIA	0.98	2109	81/07/30	259,044	SF	$24.31	$34.45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
	AVERAGE OF ADJUSTED UNIT COST		$34.45						
	AVERAGE FACILITY SIZE		259044	SF					
711-10	FAMILY HOUSING UNITS	NAS CHASE FLD,BEEVILLE,TX	1.02	2249	82/09/30	115,400	SF	$25.50	$33.92
711-10	100 UNITS FAMILY HOUSING	GUANTANAMO BAY CUBA	1.60	2388	83/06/07	99,172	SF	$66.34	$52.99
711-10	FAMILY OFFICER HOUSING	NWS CHARLESTON, SC	0.91	2509	87/02/10	14,890	SF	$70.00	$75.48
	AVERAGE OF ADJUSTED UNIT COST		$54.13						
	AVERAGE FACILITY SIZE		76487	SF					
713-00	MOBILE HOME PARK	CAMP LEJEUNE N C	0.84	2565	87/09/04	75	EA	$10,440.64	$14,198.02
	AVERAGE OF ADJUSTED UNIT COST		$14,198.02						
	AVERAGE FACILITY SIZE		75	EA					
714-32	FAMILY HSG COMMUNITY CT	NAS KINGSVILLE, TEXAS	0.91	2428	83/08/25	2,986	SF	$60.98	$70.93
714-32	COMMUNITY BUILDING	NWS CHARLESTON, SC	0.93	2416	83/10/26	2,750	SF	$97.08	$111.03
714-32	COMMUNITY CENTER ADDN	SUGAR GROVE WEST VIRGINIA	1.20	2568	87/10/26	1,240	SF	$121.04	$95.89
	AVERAGE OF ADJUSTED UNIT COST		$92.61						
	AVERAGE FACILITY SIZE		8017	SF					
721-11	UEPH	CAMP LEJEUNE N C	0.90	2428	85/03/01	305,244	SF	$40.08	$59.04
721-11	BEQ	CHERRY POINT NC	0.84	2509	86/11/24	246,756	SF	$49.84	$75.31
721-11	UEPH	CAMP LEJEUNE N C	0.90	2406	84/02/14	240,480	SF	$36.72	$53.42
721-11	4 TYPE I BEQ BLDGS	CAMP LEJEUNE N C	0.84	2526	87/06/29	211,200	SF	$41.39	$61.45
721-11	U.E.P.H.	SAN DIEGO CALIFORNIA	1.20	2447	85/08/29	211,000	SF	$61.14	$65.59
721-11	CONSTRUCT BEQS	TWENTYNINE PALMS MCAGCC	1.30	2516	87/03/31	206,457	SF	$58.47	$55.71
721-11	BEQ	SAN DIEGO CALIFORNIA	1.23	2516	87/03/31	200,779	SF	$71.53	$72.03
721-11	UEPH -- PART 1 OF 2	NS MAYPORT, FLORIDA	0.90	2422	84/04/11	196,659	SF	$48.64	$69.54
721-11	UEPH	CAMP LEJEUNE N C	0.90	2295	82/12/30	185,104	SF	$34.66	$52.29
721-11	UEPH	CAMP LEJEUNE N C	0.90	2219	82/06/14	185,030	SF	$39.97	$62.37
721-11	UEPH	MCAS CHERRY PT	0.86	2441	85/10/15	180,636	SF	$46.53	$69.07
721-11	UEPH	CAMP LEJEUNE N C	0.86	2499	86/07/31	150,946	SF	$43.34	$62.18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
721-11	UEPH	NORFOLK VIRGINIA	0.98	2438	85/06/10	145,960	SF	$49.77	$64.23
721-11	UEPH	CAMP LEJEUNE N C	0.90	2418	84/07/13	143,523	SF	$36.29	$51.42
721-11	UEPH	MCB CAMP PENDLETON CA	1.20	2195	82/04/05	138,450	SF	$48.74	$56.46
721-11	U.E.P.H.	SAN DIEGO CALIFORNIA	1.18	2428	85/03/20	123,500	SF	$71.37	$76.02
721-11	U.E.P.H.	MCRD SAN DIEGO, CA	1.28	2428	83/08/29	120,357	SF	$59.82	$58.74
721-11	UEPH	VIRGINIA BEACH VIRGINIA	0.98	2194	82/01/25	118,277	SF	$41.50	$58.90
721-11	UEPH	NTC ORLANDO, FLORIDA	0.86	2422	84/04/13	116,630	SF	$54.87	$80.39
721-11	UEPH	NSB, PEARL HARBOR, HI	1.34	2432	85/02/21	115,909	SF	$84.05	$78.70
721-11	UEPH	KEESLER AFB BILOXI, MS	0.98	2418	84/12/07	113,202	SF	$58.44	$75.26
721-11	BEQ	NORFOLK VIRGINIA	0.93	2523	87/05/20	112,345	SF	$49.04	$63.77
721-11	BEQ	NAVAL ST.CHARLESTON,SC	0.91	2568	87/10/05	106,424	SF	$52.76	$68.90
721-11	U.E.P.H.	TWENTYNINE PALMS CALIF	1.20	2413	84/03/02	104,168	SF	$53.06	$55.34
721-11	UEPH	NTC ORLANDO, FLORIDA	0.86	2194	82/01/25	97,000	SF	$42.18	$67.52
721-11	U.E.P.H.	SAN DIEGO CALIFORNIA	1.28	2418	84/12/31	96,755	SF	$55.08	$53.75
721-11	UEPH	NAS CECIL FIELD, FLORIDA	0.90	2311	83/01/05	96,650	SF	$37.78	$54.85
721-11	UEPH NAVAL STATION	NORFOLK VIRGINIA	0.98	2219	82/06/04	93,632	SF	$40.39	$56.09
721-11	UEPH	MCAS (H) TUSTIN, CA	1.20	2200	82/02/25	93,350	SF	$51.22	$58.60
721-11	U.E.P.H. (2)	CAMP PENDLETON CALIFORNIA	1.20	2406	83/12/30	92,956	SF	$46.82	$48.97
721-11	U.E.P.H.	MCB CAMP PENDLETON, CA.	1.20	2351	83/05/31	92,034	SF	$47.44	$50.78
721-11	U.E.P.H.	TWENTYNINE PALMS CALIF	1.20	2118	81/08/12	87,353	SF	$66.45	$78.16
721-11	UEPH	NAS MEMPHIS MILLINGTON,TN	1.00	2219	82/06/15	85,811	SF	$47.66	$64.21
721-11	UEPH	CBC GULFPORT, MS	0.87	2433	85/05/23	85,580	SF	$51.15	$72.24
721-11	BEQ	NAVSTA, GUAM	2.00	2565	87/09/11	84,336	SF	$92.27	$53.76
721-11	UEPH	NAS, CUBI POINT, RP	0.85	2248	82/10/25	82,693	SF	$49.90	$77.27
721-11	UEPH PRIVATE BATHROOM	DAM NECK V BEACH VA	0.98	2430	84/09/15	81,929	SF	$50.62	$62.90
721-11	BEQ	MCAS KANEOHE BAY, HI	1.34	9999	88/06/17	81,416	SF	$80.78	$17.84
721-11	UEPH	NAVSTA, PEARL HARBOR, HI	1.34	2388	83/06/08	78,705	SF	$71.67	$65.61
721-11	UEPH	MCRD PARRIS ISL, SC	0.94	2427	85/04/08	76,920	SF	$56.61	$71.97
721-11	UEPH	NAVSTA, PEARL HARBOR, HI	1.34	2195	82/03/01	75,516	SF	$72.96	$71.94
721-11	U.E.P.H.	SAN DIEGO CALIF	1.18	2457	85/07/23	70,032	SF	$50.29	$49.82
721-11	BEQ	JACKSONVILLE NC	0.84	2526	87/06/22	68,482	SF	$51.25	$68.70
721-11	U.E.P.H.	CASTLE AFB, CA. 95342	1.23	2402	84/01/31	68,094	SF	$70.27	$67.65
721-11	UEPH	PORT HUENEME CBC	1.20	2521	87/04/08	67,350	SF	$66.20	$62.23
721-11	SINGLE ENLISTED QUARTERS	KEFLAVIK ICELAND	3.00	2014	81/03/24	66,928	SF	$117.96	$55.53
721-11	BEQ	LONG BEACH CALIFORNIA	1.20	2557	87/08/31	65,145	SF	$95.05	$87.26
721-11	U.E.P.H.	LEMOORE CALIFORNIA	1.20	2419	83/11/29	63,227	SF	$65.52	$63.59
721-11	UEPH LOS PULGAS PF#2	CAMP PENDLETON CALIFORNIA	1.12	2591	88/03/30	61,824	SF	$62.67	$60.26
721-11	UEPH SAN ONOFRE PF#3	CAMP PENDLETON CALIFORNIA	1.12	2591	88/03/30	61,824	SF	$61.64	$59.26
721-11	U.E.P.H.	SAN DIEGO CALIFORNIA	1.28	2352	83/03/31	60,396	SF	$42.16	$39.06
721-11	UEPH	JACKSONVILLE NC	0.90	2220	82/05/26	58,768	SF	$40.91	$56.59
721-11	UEPH LAS FLORES PF#1	CAMP PENDLETON CALIFORNIA	1.12	2591	88/03/30	58,308	SF	$59.77	$56.92

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
721-11	BEQ	BANGOR WA NSB	1.15	2479	86/05/21	57,596	SF	$72.27	$70.06
721-11	U E P H	MWTC BRIDGEPORT, CA	1.23	2351	83/05/27	55,540	SF	$79.49	$75.26
721-11	BEQ	TUSTIN CA MCAS	1.23	2526	87/06/26	53,240	SF	$67.14	$59.16
721-11	UEPH	NS CHARLESTON, SC	0.93	2194	82/01/13	49,459	SF	$40.27	$53.53
721-11	UNACC.ENLST.PRSNL.HOUSG.N	NAEC LAKEHURST NJ	1.10	2406	83/12/30	47,520	SF	$70.28	$71.37
721-11	UEPH	NSB, PEARL HARBOR, HI	1.34	2195	82/03/01	47,284	SF	$65.77	$60.09
721-11	UEPH	NAS DALLAS, TX	1.02	2406	83/12/02	47,000	SF	$58.49	$64.05
721-11	U.E.P.H.	CAMP PENDLETON CALIFORNIA	1.20	2406	83/12/30	46,478	SF	$45.08	$41.96
721-11	UEPH	SIGONELLA ITALY	1.19	2219	82/06/30	45,639	SF	$46.80	$47.20
721-11	UEPH	NCBC GULFPORT, MS	0.98	2428	84/08/16	42,245	SF	$57.77	$64.07
721-11	UEPH	NAS, CUBI POINT, RP	0.85	2352	83/03/30	40,880	SF	$40.80	$53.86
721-11	BEQ 1 OF 2	NAS CECIL FLD, FLORIDA	0.87	2510	86/12/22	40,807	SF	$56.58	$68.38
721-11	U.E.P.H.	CAMP PENDLETON CALIFORNIA	1.17	2427	85/04/30	38,073	SF	$65.29	$60.14
721-11	UEPH	KEFLAVIK ICELAND	3.00	2438	85/06/13	37,038	SF	$116.39	$41.61
721-11	UEPH	LAJES AZORES	1.10	2457	85/07/03	37,027	SF	$41.75	$40.40
721-11	UEPHS (2 IDENTICAL)	BANGOR WASHINGTON	1.30	2406	83/12/28	35,286	SF	$64.33	$53.32
721-11	U.E.P.H.	MOFFETT FIELD CALIFORNIA	1.25	2295	82/12/29	34,776	SF	$56.30	$50.87
721-11	U.E.P.H.	MOFFETT FIELD CALIFORNIA	1.25	2295	82/12/29	34,776	SF	$56.30	$50.87
721-11	BEQ	NAVSTA, GUAM, MI	2.00	2581	88/02/01	29,200	SF	$103.42	$51.03
721-11	UEPH	NH, ORLANDO, FL	0.80	2440	85/09/30	26,411	SF	$59.44	$76.91
721-11	U.E.P.H.	SAN DIEGO CALIF	1.18	2457	85/07/23	25,264	SF	$55.26	$48.14
721-11	BEQ	CAMP LEJEUNE N C	0.84	2526	87/06/29	22,960	SF	$57.76	$68.16
721-11	UEPH	CAMP H. M. SMITH, HI	1.34	2433	85/05/03	18,180	SF	$68.62	$52.25
721-11	UEPH	LONDON ENGLAND	0.97	2195	82/04/29	17,580	SF	$67.13	$77.62
721-11	DISCIPLINARY BARRACKS	CAMP PENDLETON CALIFORNIA	1.14	2557	87/08/06	13,800	SF	$60.49	$50.65
721-11	BEQ IMPROVEMENTS	SABANA SECA PUERTO RICO	1.10	2565	87/09/23	13,468	SF	$51.12	$44.22
721-11	UEPH	NRTF ANNAPOLIS, MD	1.08	2432	85/02/15	8,618	SF	$77.69	$71.62
	AVERAGE OF ADJUSTED UNIT COST		$60.82						
	AVERAGE FACILITY SIZE		88945 SF						
721-12	UEPH PF #1	POINT MUGU PMTC	1.20	2513	87/01/22	113,049	SF	$60.13	$61.49
721-12	BEQ	PORTSMOUTH VIRGINIA	0.95	2557	87/08/29	75,890	SF	$60.98	$76.61
721-12	BEQ PF #1	CORONADO NAB	1.23	2455	86/04/28	58,370	SF	$64.17	$62.88
721-12	UEPH PF #2	POINT MUGU PMTC	1.20	2513	87/01/22	4,360	SF	$61.12	$49.07
	AVERAGE OF ADJUSTED UNIT COST		$62.51						
	AVERAGE FACILITY SIZE		63533 SF						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
721-13	UEPH OPEN BAY	DAM NECK V BEACH VA	0.98	2430	84/09/15	77,775	SF	$47.01	$60.87
721-13	MARINE BERTHING	BANGOR WASHINGTON	1.30	2406	83/12/28	14,493	SF	$62.62	$51.00
	AVERAGE OF ADJUSTED UNIT COST		$55.93						
	AVERAGE FACILITY SIZE		46134	SF					
721-14	BARRACKS	NTC ORLANDO, FL	0.79	2509	87/02/19	116,630	SF	$60.61	$94.29
721-14	BARRACKS "A" SCHOOL	NAS MEMPHIS, TN	0.95	2591	88/03/08	114,656	SF	$59.49	$74.53
721-14	BARRACKS	SAN DIEGO CALIFORNIA	1.23	2528	87/07/20	44,717	SF	$65.27	$57.47
721-14	TRNSIENT STUDENT BARRACKS	ANTIGUA W I	1.80	2528	87/07/31	8,600	SF	$179.74	$95.64
	AVERAGE OF ADJUSTED UNIT COST		$80.48						
	AVERAGE FACILITY SIZE		71150	SF					
722-10	BEQ	PORT HUENEME CALIFORNIA	1.20	2557	87/08/31	28,934	SF	$74.46	$75.63
722-10	DINING FACILITY	MWTC BRIDGEPORT, CA.	1.23	2418	84/07/31	22,640	SF	$165.65	$171.77
722-10	DINING HALL FACILITY	ANDREWS AFB	1.08	2195	82/04/23	19,830	SF	$103.74	$133.55
722-10	DINING FACILITY	MCRD SAN DIEGO	1.28	2428	83/08/29	17,376	SF	$98.42	$96.64
722-10	O.C.S. COMPLEX DINING FAC	MCDEC QUANTICO,VA	1.08	2014	81/03/10	16,970	SF	$124.37	$174.50
722-10	UEPH & DINING FACILITY	CAMP SMITH, HALAWA HTS,HI	1.34	2418	84/07/02	15,985	SF	$120.93	$113.90
722-10	ENLISTED DINING FACILITY	KEESLER AFB, BILOXI, MS	0.98	2418	84/12/07	14,902	SF	$129.65	$165.25
722-10	ENLISTED DINING FACILITY	NAS DALLAS, TEXAS	1.02	2219	82/06/08	12,975	SF	$135.40	$178.85
722-10	ENLIS MENS DINING FAC	NAS WHITING FLD, FLORIDA	0.96	2194	82/01/13	10,125	SF	$108.76	$146.88
722-10	ENLISTED DINING FACILITY	ROTA SPAIN	0.92	2440	85/09/13	10,108	SF	$78.69	$99.71
722-10	DINING FAC FOR BEQ COMPLX	CONCORD CALIFORNIA	1.25	2417	84/06/13	6,476	SF	$144.17	$127.10
	AVERAGE OF ADJUSTED UNIT COST		$134.88						
	AVERAGE FACILITY SIZE		13152	SF					
723-30	BEQ SUPPORT BUILDING	NORFOLK VIRGINIA	0.93	2523	87/05/20	5,265	SF	$40.36	$50.38
	AVERAGE OF ADJUSTED UNIT COST		$50.38						
	AVERAGE FACILITY SIZE		5265	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: O4-O1-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: O9JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
724-11	BOQ	CORONADO NAB	1.23	2516	87/03/31	90,250	SF	$83.48	$84.97
724-11	BACHELOR OFFICER'S QTRS	PORTSMOUTH VIRGINIA	0.93	2523	87/05/08	54,991	SF	$52.44	$68.92
724-11	UOPH	NS MAYPORT, FLORIDA	0.90	2406	83/12/19	51,200	SF	$48.28	$68.03
724-11	U.O.P.H.	NAS NORTH ISLAND	1.28	2406	83/12/30	32,871	SF	$54.21	$52.62
724-11	B.O.Q.	FALLON NEVADA	1.28	2440	85/09/30	32,871	SF	$69.09	$66.12
724-11	UOPH	SIGONELLA ITALY	1.00	2428	85/03/06	31,200	SF	$41.95	$51.13
724-11	B.O.Q.	FALLON NEVADA	1.28	2440	85/09/30	27,204	SF	$69.25	$63.69
724-11	U.O.P.H	NAS NORTH ISLAND	1.28	2406	83/12/30	27,204	SF	$48.71	$45.42
724-11	U.O.P.H.	NAS NORTH ISLAND	1.28	2406	83/12/30	19,273	SF	$52.52	$46.26
724-11	B.O.Q.	FALLON NEVADA	1.28	2440	85/09/30	19,273	SF	$71.09	$61.74
724-11	U O P H	MWTC BRIDGEPORT, CA	1.23	2351	83/05/27	12,300	SF	$90.32	$80.27
724-11	U.O.P.H.	NAS NORTH ISLAND	1.28	2406	83/12/30	10,957	SF	$57.98	$47.95
	AVERAGE OF ADJUSTED UNIT COST		$61.42						
	AVERAGE FACILITY SIZE		34132 SF						
724-12	BOQ, BEQ, RENOV 525 & 526	GUANTANAMO BAY CUBA	1.60	2504	86/09/12	214,424	SF	$69.31	$52.79
724-12	RPS/ALT BOQ 634,636 & 637	KEFLAVIK ICELAND	3.05	2568	87/10/26	67,320	SF	$3.93	$1.32
	AVERAGE OF ADJUSTED UNIT COST		$27.05						
	AVERAGE FACILITY SIZE		140872 SF						
724-22	BACHELOR CIVILIAN QTRS	ANDROS ISL BAHAMAS	1.50	2568	87/10/06	36,420	SF	$71.18	$54.13
	AVERAGE OF ADJUSTED UNIT COST		$54.13						
	AVERAGE FACILITY SIZE		36420 SF						
730-10	TRANSPORTATION BLDG	ADAK ALASKA	3.55	2581	88/02/11	12,066	SF	$195.44	$66.47
730-10	FIRE STATION FACILITY	NTC ORLANDO, FLORIDA	0.79	2509	87/02/23	9,990	SF	$59.87	$93.15
730-10	MANANA FIRE STATION	NAVSTA, PEARL HARBOR, HI	1.34	1908	79/12/27	5,770	SF	$68.57	$81.00
730-10	FIRE/CRASH STATION	CAMP PENDLETON CALIFORNIA	1.20	2430	84/09/12	4,963	SF	$95.38	$95.83
730-10	FIRE STATION	SAN DIEGO CALIFORNIA	1.18	2418	84/12/31	4,790	SF	$105.57	$107.33
730-10	FIRE STATION	SUGAR GROVE WEST VIRGINIA	0.99	2432	85/02/25	3,700	SF	$107.01	$122.85
730-10	FIRE STATION	SAN FRANCISCO CALIFORNIA	1.25	2438	85/06/14	3,600	SF	$110.14	$99.89

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
	AVERAGE OF ADJUSTED UNIT COST		$95.21						
	AVERAGE FACILITY SIZE		5597	SF					
730-15	CONSOLIDATED BRIG	NWS CHARLESTON, SC	0.91	2528	87/07/13	190,000	SF	$80.70	$110.51
730-15	BRIG	NAS JACKSONVILLE,FLORIDA	0.87	2565	87/09/25	28,968	SF	$86.57	$101.48
730-15	BRIG	NAS MEMPHIS, TENNESSEE	0.95	2565	87/09/15	28,633	SF	$94.93	$101.90
730-15	BRIG SHOP	SAN FRANCISCO CALIFORNIA	1.21	2596	88/04/21	28,000	SF	$131.48	$108.53
	AVERAGE OF ADJUSTED UNIT COST		$105.60						
	AVERAGE FACILITY SIZE		68900	SF					
730-20	SECURITY POLICE OPS BLDG	ENGLAND AFB, LA	0.85	2504	86/09/30	10,560	SF	$78.25	$113.38
730-20	PROV MARSHL/FIRE STN	SAN DIEGO CALIFORNIA	1.28	2194	82/01/18	7,800	SF	$85.02	$91.43
730-20	SECURITY OPERATS BLDG	CBC GULFPORT, MS	0.86	2528	87/07/08	5,245	SF	$84.69	$111.89
730-20	SECURITY BUILDING	DAM NECK V BEACH VA	0.93	2591	88/03/09	2,776	SF	$88.00	$95.53
	AVERAGE OF ADJUSTED UNIT COST		$103.05						
	AVERAGE FACILITY SIZE		6595	SF					
730-25	MAIN GATE RELOCATION	NAS SOUTH WEYMOUTH,MA	0.90	2427	85/04/02	1,500	SF	$126.29	$174.64
730-25	GATEHOUSE,NAV SUB BASE	NEW LONDON,GROTON	1.12	2432	85/02/22	1,200	SF	$127.73	$137.39
	AVERAGE OF ADJUSTED UNIT COST		$156.01						
	AVERAGE FACILITY SIZE		1350	SF					
730-60	ELEMENTARY & HIGH SCHOOL	SIGONELLA ITALY	1.10	2447	85/08/15	117,607	SF	$44.36	$50.29
730-60	DEPENDENT HIGH SCHOOL	CAMP LEJEUNE N C	0.84	2579	88/01/11	116,000	SF	$55.41	$78.06
730-60	GTMO BAY HIGH SCHOOL	GUANTANAMO BAY CUBA	1.60	2249	82/09/30	51,768	SF	$74.05	$56.34
	AVERAGE OF ADJUSTED UNIT COST		$61.56						
	AVERAGE FACILITY SIZE		85834	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
730-75	SANITATION BLDGS	CAMP PENDLETON CALIFORNIA	1.20	2352	83/03/24	2,754	SF	$85.98	$89.25
	AVERAGE OF ADJUSTED UNIT COST		$89.25						
	AVERAGE FACILITY SIZE		2754	SF					
730-77	PERSONNEL SUPPORT FAC	NORFOLK VIRGINIA	0.98	2430	84/09/15	15,795	SF	$63.06	$77.57
	AVERAGE OF ADJUSTED UNIT COST		$77.57						
	AVERAGE FACILITY SIZE		15795	SF					
730-83	CHAPEL/RELIG ED FAC	NAS MEMPHIS, TENNESSEE	1.00	2195	82/03/02	20,780	SF	$65.61	$92.18
730-83	CHAPEL, REL ED/INST CNTR	CAMP PENDLETON CALIFORNIA	1.18	2440	85/09/25	18,400	SF	$83.08	$88.99
730-83	CHAPEL/RELIG EDUCTN BLDG	ADAK ALASKA	2.45	2427	85/04/11	17,345	SF	$198.89	$102.08
730-83	ADAL CHAPEL	LAJES AZORES	1.25	2557	87/08/27	14,000	SF	$57.14	$54.55
730-83	CHAPEL W/RELIG ED WING	NTTC PENSACOLA, FLORIDA	0.85	2413	84/03/14	13,538	SF	$103.68	$154.27
730-83	RECRUIT CHAPEL	MCRD PARRIS ISLAND, SC	0.94	2195	82/04/05	11,220	SF	$75.16	$110.03
730-83	CHAPEL	KEFLAVIK ICELAND	3.00	2347	83/04/28	11,177	SF	$275.42	$118.14
730-83	CHAPEL & RELIG ED BLDG	NSA, NEW ORLEANS, LA	1.03	2406	83/12/12	10,206	SF	$95.34	$113.85
730-83	CHAPEL	DAM NECK V BEACH VA	0.93	2523	87/05/19	10,080	SF	$131.62	$164.34
730-83	CHAPEL	CAMP PENDLETON CALIFORNIA	1.20	2017	80/12/17	9,596	SF	$76.94	$92.21
730-83	CHAPEL	NWS, CHARLESTON, SC	0.93	2139	81/09/15	9,500	SF	$86.48	$126.10
730-83	CHAPEL & EDUCATION WING	NAS DALLAS, TEXAS	1.02	2418	84/07/09	9,496	SF	$137.41	$161.62
730-83	CHAPEL REPLACEMENT	EL TORO CA MCAS	1.21	9999	88/05/01	7,228	SF	$107.69	$24.60
730-83	CHAPEL & RELIGIOUS BLDG.	CHESAPEAKE VIRGINIA	0.98	2347	83/04/13	6,937	SF	$65.75	$78.27
730-83	CHAPEL	NCEP, WAHIAWA, HI	1.34	2348	83/02/10	5,630	SF	$76.92	$65.11
730-83	CHAPEL	SAN JUAN PUERTO RICO	1.10	2509	86/11/26	3,800	SF	$120.00	$111.74
	AVERAGE OF ADJUSTED UNIT COST		$103.63						
	AVERAGE FACILITY SIZE		11183	SF					
730-84	RELIGIOUS ED & ACAD INSTR	NAVCAMS, WESTPAC, GUAM	2.15	2438	85/06/23	7,735	SF	$92.95	$54.11
730-84	RELIGIOUS ED FAC	NAS JACKSONVILLE, FL	0.85	2440	85/09/11	7,000	SF	$84.44	$122.97
730-84	RELIGIOUS ED CENTER	NWS CHARLESTON, SC	0.93	2249	82/09/14	4,100	SF	$71.18	$94.06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
	AVERAGE OF ADJUSTED UNIT COST		$90.38						
	AVERAGE FACILITY SIZE		6278	SF					
730-90	SECURITY BUILDING	CAMP H. M. SMITH, HI	1.34	2513	87/01/23	3,600	SF	$93.10	$80.99
	AVERAGE OF ADJUSTED UNIT COST		$80.99						
	AVERAGE FACILITY SIZE		3600	SF					
740-01	NAVY EXCHANGE - PART A	NAS JACKSONVILLE, FL	0.87	2565	87/09/29	86,887	SF	$49.91	$72.01
740-01	NAVY EXCH 1 OF 2	PORTSMOUTH VIRGINIA	0.93	2565	87/09/29	47,422	SF	$44.57	$58.86
740-01	EXCHANGE RETAIL STORE	NPGS MONTEREY, CA	1.33	2428	83/08/31	32,429	SF	$46.73	$44.62
740-01	MAIN EXCHANGE COMPLEX	NORFOLK VIRGINIA	0.98	2348	83/02/01	22,900	SF	$37.25	$48.89
740-01	NAVY EXCHANGE	NAS WHITING FIELD, FL	0.84	2589	87/12/17	18,135	SF	$61.18	$83.24
740-01	EXCHANGE/COMMISSARY-(1-2)	NAS CHASE FLD,BEEVILLE,TX	0.97	2440	85/09/30	16,000	SF	$57.20	$69.41
740-01	NAVY EXCHANGE	NAS KINGSVILLE, TEXAS	0.96	2504	86/09/29	15,922	SF	$53.77	$64.25
740-01	NAVY EXCHANGE RETAIL STOR	NSCS ATHENS, GEORGIA	0.94	2432	85/02/14	12,057	SF	$47.59	$56.99
740-01	NAVY EXCHANGE	NCSC PANAMA CITY,FL	0.92	2440	85/09/26	12,000	SF	$48.10	$58.67
740-01	PACKAGE STORE	PORTSMOUTH VIRGINIA	0.93	2565	87/09/29	3,200	SF	$49.46	$50.61
	AVERAGE OF ADJUSTED UNIT COST		$60.75						
	AVERAGE FACILITY SIZE		19970	SF					
740-02	EXCHANGE LOCATION STORE	SAN DIEGO CALIFORNIA	1.28	2352	83/03/08	8,587	SF	$52.09	$52.80
740-02	LOCATION EXCHANGE	MCB CP PENDLETON, CA	1.20	2194	82/01/28	7,194	SF	$42.35	$49.09
740-02	CONVENIENCE STORE	NORFOLK VIRGINIA	0.98	2417	84/06/13	5,044	SF	$46.64	$57.69
740-02	LOCATION EXCHANGE	CAMP PENDLETON CALIFORNIA	1.20	2233	82/07/02	4,260	SF	$51.50	$54.13
740-02	LOCATION EXCHANGE	CHERRY POINT NC	0.90	2248	82/10/10	4,062	SF	$37.27	$51.39
	AVERAGE OF ADJUSTED UNIT COST		$53.02						
	AVERAGE FACILITY SIZE		5829	SF					
740-03	EXCHANGE	CAMP LEJEUNE N C	0.90	2419	84/05/31	7,200	SF	$54.33	$73.11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$73.11						
		AVERAGE FACILITY SIZE	7200	SF					
740-04	FAST FOOD FACILITY	NORFOLK VIRGINIA	0.98	2195	82/03/10	3,130	SF	$96.41	$131.30
		AVERAGE OF ADJUSTED UNIT COST	$131.30						
		AVERAGE FACILITY SIZE	3130	SF					
740-07	AUTO TIRE CENTER	NAS PENSACOLA, FLORIDA	0.84	2509	86/10/17	3,220	SF	$88.07	$122.43
		AVERAGE OF ADJUSTED UNIT COST	$122.43						
		AVERAGE FACILITY SIZE	3220	SF					
740-20	TEMPORARY LODGING FAC	CAMP PENDLETON CALIFORNIA	1.20	2417	84/06/18	39,715	SF	$53.85	$56.66
740-20	TEMPORARY LODGING FACILIT	NAS JACKSONVILLE, FL	0.91	2260	82/11/19	27,806	SF	$35.35	$51.91
740-20	TEMPORARY LODGING FAC.	BELLEVUE HOUSING, WASH DC	1.08	2388	83/06/15	27,743	SF	$44.73	$52.37
740-20	TEMPORARY LODGING FAC	MOFFETT FIELD CALIFORNIA	1.25	2417	84/06/29	27,307	SF	$65.78	$65.76
740-20	TEMP LODGING FACILITY	LONG BEACH CALIFORNIA	1.20	2422	84/04/12	27,307	SF	$59.40	$61.73
740-20	TEMP. LODGING FACILITY	GUANTANAMO BAY CUBA	1.60	2219	82/06/24	16,051	SF	$75.62	$58.86
740-20	TEMPORARY LODGING	TWENTYNINE PALMS CALIF	1.20	2413	84/03/19	11,849	SF	$73.09	$66.62
		AVERAGE OF ADJUSTED UNIT COST	$59.13						
		AVERAGE FACILITY SIZE	25396	SF					
740-23	COMMISSARY STORE	SAN DIEGO CA	1.18	2427	85/04/18	76,171	SF	$39.53	$42.12
740-23	COMMISSARY STORE REPLACE	NAS MEMPHIS, TENNESSEE	1.00	2430	83/09/14	66,000	SF	$38.98	$48.44
740-23	COMMISSARY STORE REPLACE	NAS PENSACOLA, FLORIDA	0.85	2194	82/01/11	52,415	SF	$32.70	$51.88
740-23	COMMISSARY STORE	NORFOLK VIRGINIA	0.95	2496	86/08/13	52,226	SF	$75.49	$94.21
740-23	COMMISSARY STORE 2 OF 2	NAS CHASE FLD,BEEVILLE,TX	0.97	2440	85/09/30	13,500	SF	$60.04	$63.52
		AVERAGE OF ADJUSTED UNIT COST	$60.03						
		AVERAGE FACILITY SIZE	57006	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
740-25	FAMILY SERVICE CENTER	BANGOR WASHINGTON	1.30	2406	83/12/23	7,218	SF	$75.07	$73.25
740-25	FAMILY SERVICE CENTER	GUANTANAMO BAY CUBA	1.60	2402	84/01/05	7,129	SF	$96.43	$76.56
740-25	FAMILY SERVICES CENTER	NAS MERIDIAN, MS	0.98	2424	84/10/17	6,300	SF	$74.06	$95.15
740-25	FAMILY SERVICE CENTER	NS MAYPORT, FLORIDA	0.90	2428	84/08/09	6,029	SF	$87.03	$121.54
740-25	FAMILY SERVICE CENTER	NTC ORLANDO, FLORIDA	0.86	2428	83/08/25	5,962	SF	$77.46	$113.21
740-25	FAMILY SERVICE CENTER	NSA NEW ORLEANS, LA	0.94	2504	86/09/10	5,064	SF	$71.59	$91.86
740-25	FAMILY SERVICE CENTER	NAS KINGSVILLE,TX	0.99	2440	85/09/12	4,800	SF	$69.83	$87.31
740-25	FAMILY SERVICES CENTER	NAS CORPUS CHRISTI, TEXAS	1.02	2438	85/06/10	4,500	SF	$76.15	$91.55
740-25	FAMILY SERVICES CENTER	CHASE FIELD,BEEVILLE,TX	1.02	2428	85/03/29	4,211	SF	$77.11	$91.21
740-25	FAMILY SERVICE CENTER	NAS, BARBERS PT, HI	1.34	2406	84/02/17	4,200	SF	$93.40	$84.87
740-25	FAMILY SERVICES CENTER	KEFLAVIK ICELAND	3.00	2347	83/04/20	4,185	SF	$189.85	$78.99
740-25	FAMILY SERVICES CENTER	NAS WHITING FIELD, FL	0.96	2417	84/06/28	4,144	SF	$60.36	$76.21
740-25	FAMILY SERVICES CENTER	NAS CECIL FIELD, FLORIDA	0.90	2430	84/09/13	4,051	SF	$81.85	$108.56
740-25	FAMILY SERVICE CENTER	ST GEORGES PARISH BERMUDA	1.60	2418	84/07/19	4,036	SF	$151.70	$113.74
740-25	FAMILY SERVICE CENTER	MOFFETT FIELD CALIFORNIA	1.25	2352	83/03/07	4,000	SF	$68.53	$67.61
740-25	FAMILY SERVICE CENTER	NAS KEY WEST, FLORIDA	1.07	2406	83/12/21	3,982	SF	$76.02	$85.65
740-25	FAMILY SERVICES CENTER	VIRGINIA BEACH VIRGINIA	0.98	2417	84/06/21	3,834	SF	$74.14	$89.90
740-25	FAMILY SERVICES CENTER	CORPUS CHRISTI TEXAS	1.25	2195	82/03/30	3,700	SF	$60.88	$63.72
740-25	FAMILY SERVICES CENTER	NCBC GULFPORT, MISSISSIPP	0.91	2348	83/02/10	3,600	SF	$50.69	$67.48
740-25	FAMILY SERVICE CENTER	NWS CHARLESTON, SC	0.93	2414	83/07/29	3,286	SF	$87.26	$108.44
		AVERAGE OF ADJUSTED UNIT COST	$89.34						
		AVERAGE FACILITY SIZE	4690	SF					
740-26	INDUST SATELLIT CAFETERIA	NSY, PEARL HARBOR, HI	1.34	1827	79/07/16	7,000	SF	$64.90	$77.66
		AVERAGE OF ADJUSTED UNIT COST	$77.66						
		AVERAGE FACILITY SIZE	7000	SF					
740-30	SERVICE STATION 2 OF 2	NAS CECIL FIELD, FLORIDA	0.87	2510	86/12/22	7,142	SF	$69.00	$95.44
740-30	EXCH SERV CTR/AUTO RPR	TWENTYNINE PALMS CALIF	1.20	2422	84/04/23	5,360	SF	$54.15	$54.03
		AVERAGE OF ADJUSTED UNIT COST	$74.73						
		AVERAGE FACILITY SIZE	6251	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
740-36	CRAFT HOBBY SHOP	NTTC PENSACOLA, FLORIDA	0.85	1918	80/03/25	4,620	SF	$62.09	$111.57
	AVERAGE OF ADJUSTED UNIT COST		$111.57						
	AVERAGE FACILITY SIZE		4620	SF					
740-38	AUTOMOTIVE HOBBY SHOP	DAM NECK V BEACH VA	0.98	2432	85/02/08	6,000	SF	$67.34	$85.33
740-38	AUTO HOBBY SHOP	NAS, BARBERS PT, HI	1.34	1756	79/05/31	5,940	SF	$71.24	$91.43
	AVERAGE OF ADJUSTED UNIT COST		$88.38						
	AVERAGE FACILITY SIZE		5970	SF					
740-40	24 LANE BOWLING FACILITY	ROOSEVELT ROADS RQ	1.50	2249	82/09/30	22,356	SF	$79.90	$72.27
740-40	BOWLING CENTER	CAMP LEJEUNE N C	0.84	2565	87/09/30	18,458	SF	$86.70	$122.80
740-40	BOWLING ALLEY	MADRID SPAIN	1.10	2233	82/07/28	17,691	SF	$42.05	$52.24
740-40	BOWLING ALLEY	LAJES AZORES	1.30	2418	84/07/30	14,347	SF	$64.52	$61.36
740-40	BOWLING ALLEY	LAJES AZORES	1.41	2496	86/08/11	14,347	SF	$93.05	$79.03
740-40	BOWLING CENTER	MADRID SPAIN	1.10	2233	82/07/28	12,270	SF	$49.57	$58.53
740-40	BOWLING/AMUSEMENT CENTER	NAS DALLAS, TEXAS	0.93	2504	86/09/12	10,314	SF	$57.64	$69.06
740-40	BOWLING ALLEY	YORKTOWN VIRGINIA	0.93	2509	86/10/15	7,500	SF	$88.68	$101.22
	AVERAGE OF ADJUSTED UNIT COST		$77.06						
	AVERAGE FACILITY SIZE		14660	SF					
740-43	GYMNASIUM	GULFPORT MISSISSIPPI	0.87	2438	85/06/14	21,608	SF	$64.55	$92.87
740-43	GYMNASIUM	NTC ORLANDO, FLORIDA	0.92	2428	85/03/25	20,944	SF	$62.41	$85.26
740-43	GYMNASIUM	LAJES AZORES	1.38	2457	85/07/31	20,900	SF	$75.23	$67.71
740-43	GYMNASIUM	MCAS, KANEOHE BAY, HI	1.34	2194	82/01/22	20,900	SF	$83.11	$86.27
740-43	GYMNASIUM	GUANTANAMO BAY CUBA	1.60	2457	85/07/15	20,860	SF	$138.35	$107.40
740-43	PHYSICAL FITNESS CENTER	NORFOLK VIRGINIA	0.98	2417	84/06/01	13,800	SF	$71.34	$87.36
	AVERAGE OF ADJUSTED UNIT COST		$87.81						
	AVERAGE FACILITY SIZE		16594	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
740-50	PHYSICAL EDUCATION CENTER	USNA ANNAPOLIS,MD	1.02	1827	79/07/19	97,000	SF	$127.44	$200.36
	AVERAGE OF ADJUSTED UNIT COST		$200.36						
	AVERAGE FACILITY SIZE		97000	SF					
740-53	INDOOR SWIMMING POOL	DAM NECK V BEACH VA	0.98	2195	82/04/22	25,260	SF	$79.80	$108.68
	AVERAGE OF ADJUSTED UNIT COST		$108.68						
	AVERAGE FACILITY SIZE		25260	SF					
740-54	RACQUETBALL/FITNESS CTR	NAS ATLANTA, GA	0.87	2565	87/09/23	5,906	SF	$104.27	$141.13
740-54	RECREATION BLDG	SAN DIEGO CALIFORNIA	1.28	2352	83/03/31	5,130	SF	$58.02	$57.03
	AVERAGE OF ADJUSTED UNIT COST		$99.08						
	AVERAGE FACILITY SIZE		5518	SF					
740-55	YOUTH CENTER	PORT HUENEME CALIFORNIA	1.20	2591	88/03/09	9,095	SF	$96.01	$95.22
740-55	YOUTH CENTER	NAS CHASE FIELD, TEXAS	0.87	1896	80/02/22	5,608	SF	$73.72	$134.98
740-55	YOUTH CENTER	CAMP PENDLETON CA MCB	1.11	2516	87/03/27	5,300	SF	$99.55	$107.66
740-55	YOUTH CENTER	NAS CECIL FIELD, FLORIDA	0.85	2504	86/09/12	4,620	SF	$80.46	$110.75
740-55	YOUTH CENTER	NAS MERIDIAN, MS	0.85	2591	88/03/30	3,481	SF	$81.66	$103.46
740-55	YOUTH CENTER	NCEP, WAHIAWA, HI	1.34	1732	78/11/20	2,915	SF	$88.68	$103.64
	AVERAGE OF ADJUSTED UNIT COST		$109.28						
	AVERAGE FACILITY SIZE		5169	SF					
740-63	E M CLUB	JACKSONVILLE NC	0.90	2220	82/05/12	15,900	SF	$62.76	$93.90
740-63	E M CLUB	CAMP LEJEUNE N C	0.90	2220	82/05/12	15,900	SF	$65.33	$97.75
740-63	ENLISTED MEN'S CLUB	NAVAL STATION ANNAPOLIS	1.02	1752	79/04/13	15,685	SF	$73.97	$123.73
740-63	ENLISTED CLUB	CAMP LEJEUNE N C	0.84	2589	87/12/15	8,276	SF	$115.98	$142.04
740-63	ENLISTED CLUB	CAMP PENDLETON CALIFORNIA	1.20	2219	82/06/25	7,974	SF	$92.44	$92.46
740-63	ENLISTED MEN'S CLUB	ST GEORGES PARISH BERMUDA	1.60	2565	87/09/29	6,538	SF	$189.11	$119.47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$111.55						
		AVERAGE FACILITY SIZE	16210	SF					
740-71	CONSOLIDATED PACKAGE STRE	MCAS, KANEOHE BAY, HI	1.34	2388	83/06/06	12,630	SF	$57.43	$52.57
		AVERAGE OF ADJUSTED UNIT COST	$52.57						
		AVERAGE FACILITY SIZE	12630	SF					
740-74	CHILD CARE CENTER	NORFOLK VIRGINIA	0.98	2195	82/03/05	22,128	SF	$46.24	$67.71
740-74	CHILD CARE CENTER PF-1	CAMP PENDLETON CALIFORNIA	1.18	2440	85/09/25	19,000	SF	$69.81	$75.56
740-74	CHILD CARE CENTER	NAS PENSACOLA, FL	0.84	2433	86/01/24	15,467	SF	$38.40	$57.94
740-74	CHILD CARE CENTER	NS CHARLESTON SC	0.93	2430	83/09/21	13,660	SF	$50.97	$68.83
740-74	CHILD CARE CENTER	NAS MEMPHIS MILLINGTON,TN	1.00	2249	82/09/03	12,960	SF	$56.38	$76.50
740-74	CHILD CARE CENTER	NAS ALAMEDA, CA	1.25	2388	83/06/29	12,430	SF	$62.50	$63.90
740-74	CHILD CARE CENTER	NWS, CHARLESTON, SC	0.93	2422	84/04/17	12,000	SF	$66.19	$89.67
740-74	CHILD CARE CENTER	NAS JACKSONVILLE, FL	0.91	2253	82/08/27	11,600	SF	$47.75	$71.07
740-74	CHILD CARE CENTER	SAN FRANCISCO CALIFORNIA	1.35	2430	83/09/23	10,123	SF	$93.95	$86.50
740-74	CHILD CARE CENTER	NSB BANGOR, WA	1.30	2195	82/03/30	9,730	SF	$99.90	$105.74
740-74	CHILD CARE CENTER	VALLEJO CALIFORNIA	1.25	2195	82/04/16	9,450	SF	$100.34	$110.45
740-74	CHILD CARE CENTER	NAS WHIDBEY ISLAND, WA	1.30	2352	83/03/04	8,270	SF	$72.46	$70.13
740-74	CHILD CARE CENTER	KEFLAVIK ICELAND	3.00	2195	82/03/01	8,175	SF	$204.45	$91.87
740-74	CHILD CARE CENTER	NAS CORPUS CHRISTI, TX	0.90	2565	87/09/29	7,007	SF	$74.46	$91.74
740-74	CHILD CARE CENTER	ADAK ALASKA	3.19	2430	83/09/30	6,700	SF	$203.94	$74.11
740-74	CHILD CARE CENTER	LAJES AZORES	1.41	2509	86/10/31	5,973	SF	$77.10	$60.23
740-74	CHILD CARE CENTER	SUBASE, PEARL HARBOR, HI	1.34	2406	83/12/30	5,720	SF	$98.77	$84.67
740-74	CHILD CARE CENTER	NCBC GULFPORT,MISSISSIPPI	0.91	2233	82/07/20	5,040	SF	$59.73	$79.73
740-74	CHILD CARE CENTER	PORTSMOUTH VIRGINIA	0.98	2430	84/09/14	4,661	SF	$82.31	$92.05
740-74	CHILD CARE CENTER	NAS CHASE FIELD, TX	0.97	2440	85/09/30	4,300	SF	$94.38	$105.25
740-74	CHILD CARE CENTER	NSA NEW ORLEANS, LA	1.03	2253	82/08/27	4,000	SF	$86.35	$97.34
740-74	CHILD CARE CENTER	NAS MERIDIAN, MS	0.98	2249	82/09/03	3,182	SF	$65.70	$76.60
		AVERAGE OF ADJUSTED UNIT COST	$81.70						
		AVERAGE FACILITY SIZE	9004	SF					
740-77	REC SERVICES MAINT FAC	DAM NECK V BEACH VA	0.98	2430	83/09/29	4,538	SF	$35.59	$43.78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$43.78						
		AVERAGE FACILITY SIZE	4538	SF					
740-80	GOLF CLUB HOUSE	NAS MERIDIAN, MS	0.98	2016	81/02/02	5,666	SF	$64.89	$96.22
		AVERAGE OF ADJUSTED UNIT COST	$96.22						
		AVERAGE FACILITY SIZE	5666	SF					
740-81	CONSTRUCT CABINS (THREE)	NS (SHORT STAY) CHARL,SC	0.91	2521	87/04/03	2,550	SF	$54.33	$71.52
740-81	RECREATION LODGE	ARGENTIA NEWFOUNDLAND	1.40	2388	83/06/27	2,000	SF	$44.47	$38.96
		AVERAGE OF ADJUSTED UNIT COST	$55.24						
		AVERAGE FACILITY SIZE	2275	SF					
740-84	INDOOR RACQUETBALL COMPLX	NS, CHARLESTON, SC	0.93	2195	82/04/05	6,700	SF	$58.23	$83.57
		AVERAGE OF ADJUSTED UNIT COST	$83.57						
		AVERAGE FACILITY SIZE	6700	SF					
740-89	BATH HOUSE	CAMP LEJEUNE N C	0.90	2352	83/03/25	3,175	SF	$45.58	$63.08
		AVERAGE OF ADJUSTED UNIT COST	$63.08						
		AVERAGE FACILITY SIZE	3175	SF					
750-30	SWIMMING POOL	CAMP LEJEUNE N C	0.90	2352	83/03/25	8,930	SF	$38.68	$56.34
750-30	SWIMMING POOL	SUGAR GROVE WEST VIRGINIA	1.20	2568	87/10/26	1,250	SF	$16.16	$13.12
		AVERAGE OF ADJUSTED UNIT COST	$34.73						
		AVERAGE FACILITY SIZE	5090	SF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
750-57	BEACH SNACK BAR	DAM NECK V BEACH VA	0.98	2417	84/06/07	842	SF	$104.77	$137.86
	AVERAGE OF ADJUSTED UNIT COST		$137.86						
	AVERAGE FACILITY SIZE		421	SF					
760-10	ARIZONA MEMORIAL SHRE FAC	NAVSTA, PEARL HARBOR, HI	1.34	1705	78/08/21	79,400	SF	$41.82	$56.45
760-10	NAUTILUS MEMORIAL	SUB BASE NLON,CT	1.13	2402	84/01/05	14,275	SF	$209.17	$196.34
	AVERAGE OF ADJUSTED UNIT COST		$126.39						
	AVERAGE FACILITY SIZE		46837	SF					
811-60	STANDBY GENERATOR PLANT	KEFLAVIK ICELAND	3.50	2581	88/02/22	397,585	KW	$1.00	$0.35
811-60	STAND-BY GENERATOR PLANT	NCEP, LUALUALEI, HI	1.34	2195	82/03/08	6,500	KW	$163.32	$134.44
811-60	STAND-BY GENERATOR PLANT	FICPAC, MAKALAPA, HI	1.34	2406	83/12/29	1,000	KW	$294.00	$220.80
	AVERAGE OF ADJUSTED UNIT COST		$118.53						
	AVERAGE FACILITY SIZE		135028	KW					
813-20	UTILITY BLDG	FALLON NEVADA	1.21	2195	82/03/30	2,543	SF	$119.83	$140.62
	AVERAGE OF ADJUSTED UNIT COST		$140.62						
	AVERAGE FACILITY SIZE		1272	SF					
821-50	STEAM PLANT	PORTSMOUTH VIRGINIA	0.98	2430	83/09/29	720,000	PPH	$133.08	$172.35
	AVERAGE OF ADJUSTED UNIT COST		$172.35						
	AVERAGE FACILITY SIZE		369330	PPH					
822-14	FACILITY ENERGY IMPR	PWC, PEARL HARBOR, HI	1.34	2347	83/04/12	120	BHP	$4,331.58	$3,335.10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE O4
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$3,335.10						
		AVERAGE FACILITY SIZE	1588	BHP					
826-25	INSTAL HEAT RECOV CHILLER	BARKSDALE AFB, LOUISIANA	1.01	2388	83/06/28	290	TON	$1,893.91	$2,300.74
		AVERAGE OF ADJUSTED UNIT COST	$2,300.74						
		AVERAGE FACILITY SIZE	290	TON					
831-14	HAZ WASTE STORAGE	PWC PENSACOLA, FL	0.82	2591	88/03/29	9,862	SF	$54.90	$75.70
		AVERAGE OF ADJUSTED UNIT COST	$75.70						
		AVERAGE FACILITY SIZE	9862	SF					
831-39	EXT. DOCKSIDE WORK CENTER	PORTSMOUTH VIRGINIA	1.05	2557	87/08/06	1,984	SF	$279.62	$305.14
		AVERAGE OF ADJUSTED UNIT COST	$305.14						
		AVERAGE FACILITY SIZE	1984	SF					
831-41	HAZARDOUS WASTE FAC	BANGOR WASHINGTON	1.15	2526	87/06/17	7,790	SF	$87.34	$92.72
831-41	HAZARDOUS WASTE ST/TRANS	NSYD CHARLESTON SC	0.81	2441	85/11/01	6,650	SF	$56.19	$86.73
831-41	HAZARDOUS WASTE STOR FAC	NAS CECIL FIELD, FLORIDA	0.90	2421	84/11/01	3,800	SF	$35.12	$46.29
831-41	HAZ WASTE STORG FAC	PORT HUENEME CALIFORNIA	1.18	2510	86/12/09	3,600	SF	$83.32	$80.02
831-41	HAZ WASTE STOR FACILITY	NAS KEY WEST, FLORIDA	1.07	2510	86/12/03	3,500	SF	$55.27	$57.96
831-41	HAZARDOUS WASTE STORG FAC	CAMP PENDLETON CA MCB	1.11	2521	87/04/29	3,350	SF	$71.14	$70.93
		AVERAGE OF ADJUSTED UNIT COST	$72.44						
		AVERAGE FACILITY SIZE	4781	SF					
832-30	SEWAGE SYSTEM	BANGOR WASHINGTON	1.15	2513	87/01/21	4,748	LF	$61.64	$67.19
832-30	OPER TRN FAC(PUMP STA)	CHERRY POINT NC	0.87	2509	87/02/24	354	SF	$20.62	$23.44

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
	AVERAGE OF ADJUSTED UNIT COST		$45.31						
	AVERAGE FACILITY SIZE		1750	LF					
841-10	WATER TREATMENT FACILITY	KATO SOULI GREECE	0.95	2406	83/12/31	60,000	GPD	$6.91	$9.73
841-10	WATER TREATMENT FACILITY	SIGONELLA ITALY	1.19	2220	82/05/26	40,000	GPD	$20.05	$24.16
841-10	SLUDE DEWATERING FACILITY	ARMY DEPOT CORPUS CH, TX	0.90	2591	88/03/03	1	LS	$580,000.00	$602,282.60
	AVERAGE OF ADJUSTED UNIT COST		$200,772.16						
	AVERAGE FACILITY SIZE		14286	GPD					
841-30	ELEV POTAB WATER STOR TK	NAS CHASE FIELD, TEXAS	0.87	2428	84/08/03	500,000	GA	$0.85	$1.17
	AVERAGE OF ADJUSTED UNIT COST		$1.17						
	AVERAGE FACILITY SIZE		500000	GA					
841-40	WATER TANK	NWS CHARLESTON, SC	0.81	2457	85/07/30	750,000	GAL	$1.23	$1.80
	AVERAGE OF ADJUSTED UNIT COST		$1.80						
	AVERAGE FACILITY SIZE		750000	GAL					
842-10	WATER SUPPLY SYSTEM IMPRO	2	1.04	2421	84/11/28	5,650	LF	$81.41	$90.22
	AVERAGE OF ADJUSTED UNIT COST		$90.22						
	AVERAGE FACILITY SIZE		8279	LF					
843-10	FIRE PROTECTION SYSTEM	NS CHARLESTON, SC	0.93	2402	84/01/16	10,458	LF	$237.90	$305.91
843-10	FIRE PROTECTION PIPELINE	NSB, PEARL HARBOR, HI	1.34	2200	82/02/11	7,200	LF	$157.20	$143.33
	AVERAGE OF ADJUSTED UNIT COST		$224.62						
	AVERAGE FACILITY SIZE		13197	LF					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
843-20	FIRE PUMP HOUSE	FALLON NEVADA	1.21	2195	82/03/30	12,500	GPM	$29.78	$34.21
843-20	FIRE PUMP STATION	SAN DIEGO CALIFORNIA	1.28	2348	83/02/01	10,000	GPM	$51.68	$51.93
843-20	PUMPHOUSE(ALCM FAC) 2-2	BARKSDALE AFB, LOUISIANA	1.01	2417	84/06/08	6,000	GPM	$61.91	$70.09
	AVERAGE OF ADJUSTED UNIT COST		$52.07						
	AVERAGE FACILITY SIZE		9500	GPM					
843-30	FIRE WATER STORAGE TANK	POMFLANT CHARLESTON, SC	0.81	2433	86/01/29	750,000	GAL	$1.10	$1.62
	AVERAGE OF ADJUSTED UNIT COST		$1.62						
	AVERAGE FACILITY SIZE		750000	GAL					
844-30	HOT WELL & PUMP HOUSE	GRIFFISS AFB,ROME,NY	1.07	2499	86/07/23	480	SF	$737.81	$668.14
	AVERAGE OF ADJUSTED UNIT COST		$668.14						
	AVERAGE FACILITY SIZE		12740	SF					
851-10	ARTERIAL HIGHWAY	NS MAYPORT, FLORIDA	0.90	2200	82/02/19	22,000	SY	$15.40	$23.73
851-10	ACCESS RD IMPS (2 OF 2)	JACKSONVILLE NC	0.87	2516	87/03/23	20,133	SY	$25.04	$34.91
	AVERAGE OF ADJUSTED UNIT COST		$29.32						
	AVERAGE FACILITY SIZE		15594	SY					
851-20	VEHICULAR BRIDGE	NAS PENSACOLA, FLORIDA	0.85	2249	82/09/30	172,000	SF	$24.38	$40.60
851-20	REPLMT SLOCUM CRK BRIDGE	CHERRY POINT NC	0.90	2249	82/09/30	30,571	SF	$49.17	$65.29
851-20	RPL DORSEY CREEK BRIDGE	USNA ANNAPOLIS, MD	1.02	2311	83/01/20	19,413	SF	$42.65	$46.49
	AVERAGE OF ADJUSTED UNIT COST		$50.79						
	AVERAGE FACILITY SIZE		55926	SF					
852-10	PIER 10 PARKING LOTS	NORFOLK VIRGINIA	0.98	2496	86/08/29	202,136	SY	$14.87	$19.14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

COMNAVFACENGCOM CODE 04
AWARD COST DATA
FOR MILITARY CONSTRUCTION

ESCALATED TO: 04-01-92
ENR BCI PROJECTED: 2930
DATE PRODUCED: 09JUN88

NAVY CAT CODE	DESCRIPTION	LOCATION	ACF	AWARD COST INDEX	DATE	QUANTITY	U/M	PRIMARY AWARD COST/UNIT	PRIMARY ADJUSTED COST/UNIT
		AVERAGE OF ADJUSTED UNIT COST	$19.14						
		AVERAGE FACILITY SIZE	73987	SY					
852-30	PEDESTRIAN BRIDGE	MCDEC QUANTICO,VA	1.08	2200	82/02/10	372	LF	$1,503.53	$1,854.09
		AVERAGE OF ADJUSTED UNIT COST	$1,854.09						
		AVERAGE FACILITY SIZE	372	LF					
860-10	PAVING RAILWAY SPURS	BARSTOW CALIFORNIA	1.33	2591	88/03/04	1	LS	$1,887,900.00	$1,605,194.08
		AVERAGE OF ADJUSTED UNIT COST	$1,605,194.08						
		AVERAGE FACILITY SIZE	1	LS					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

REFERENCES

Command Responsibility for Shore Activity Land and Facilities, OPNAVINST 11000.16A, available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120 28 April 1987.

Department of Defense Manuals and Instructions available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

DODINST 4165.3	DOD Facility Classes and Construction Categories, 24 October 1978

Department of the Navy Facility Category Codes, P-72, available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

Federal Acquisition Regulation (FAR) available from Superintendent of Documents, Government Printing Office, Washington, DC 20402.

Military Handbooks available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MIL-HDBK-1006/3	Policy and Procedures for Engineering and Design Criteria Manual Preparation, 30 June 1987
MIL-HDBK-1010/2	Cost Engineering: Historical Cost Data, March 1988
MIL-HDBK-1190	Facility Planning and Design Guide, 9 September 1987

Naval Facilities Engineering Command Notices and Instructions available from NAVFACENGCOM, 200 Stovall Street, Alexandria, VA 22332-2300.

NAVFACNOTE 11010	Shore Activities Land and Facilities Planning, 6 October 1986
NAVFACINST 11010.44E	Shore Facilities Planning Manual, 15 December 1987

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-HDBK-1010/1	COST ENGINEERING: POLICY AND PROCEDURES

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ EFD/PWO ☐ AE ☐ USER ☐ CONTRACTOR ☐ MANUFACTURER ☐ OICC/ROICC ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

NAVFAC Overprint

PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

REPRODUCED AT GOVERNMENT EXPENSE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:54Z
Check the source to verify that this is the current version before use.