NOT MEASUREMENT SENSITIVE

MIL-STD-2525D
w/CHANGE 1
2 August 2018

SUPERSEDING
MIL-STD-2525D
10 JUN 2014

DEPARTMENT OF DEFENSE INTERFACE STANDARD

JOINT MILITARY SYMBOLOGY



Distribution A: Approved for public release, distribution is unlimited.

AMSC N/A AREA INST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

FOREWORD

1. This standard is approved for use by all departments and agencies of the Department of Defense (DoD) and available for use by non-DoD entities (e.g., first responders, United Nations, and multinational partners).

2. This standard provides a standardized, structured set of graphical symbols for the display of information in command and control (C2) systems and applications. A standard method for symbol construction is provided using common building blocks which shall be used to create current symbol sets as well as for creating sets that may be needed in the future. This includes frame, icon, modifier, and amplifier using color, graphical, and alphanumeric representations. It provides requirements for symbol construction and composition with flexibility for special user's needs.

3. In joint military operations, it is imperative to have a common language clearly understood among all users. Graphical representation of objects of interest (e.g., units, installations, equipment, control measures, activities, and meteorological occurrences) are observed and readily understood faster than merely text alone. This is valid even more for a user population with a widely different background of language, component, knowledge, and experience. A common standard of joint military symbols is therefore an important element to enhance efficiency and to contribute to success in joint operations.

4. This revision has resulted in many changes to the standard, but the most significant ones are as follows:

a. Added implementation guidance to Appendix A.

b. Restructured Control Measure appendix for better readability.

c. Converted many land symbols from a main icon to a modifier for better flexibility.

d. Updated Cyberspace appendix.

5. Comments, suggestions, or questions on this document should be addressed to Defense Information Systems Agency (DISA) Standards Management Branch (BDE4), P.O. Box 549, Ft. Meade, MD 20755-0549, or emailed to disa.meade.EE.mbx.symbology@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST [Acquisition Streamlining and Standardization Information System] online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CONTENTS

PARAGRAPH PAGE

FOREWORD 2
CONTENTS 3
1 SCOPE 1
1.1 Scope 1
2 APPLICABLE DOCUMENTS 1
2.1 General 1
2.2 Government documents 1
2.2.1 Specifications, standards, and handbooks 1
2.2.2 Other Government documents, drawings and publications 2
2.3 Order of precedence. 3
3 DEFINITIONS 3
3.1 Acronyms and abbreviations used in this standard 3
3.2 Definitions used in this standard 3
3.2.1 Amplifier 3
3.2.2 Area 4
3.2.3 Assumed friend 4
3.2.4 Atmospheric environment phenomena 4
3.2.5 Attribute 4
3.2.6 Boundary 4
3.2.7 C2 (Command and Control) 4
3.2.8 Combat effectiveness 4
3.2.9 Commission Internationale de l'Eclairage (CIE) 4
3.2.10 Contact 4
3.2.11 Control measure symbol 4
3.2.12 Defended area 4
3.2.13 Dynamic amplifier 4
3.2.14 Faker 4
3.2.15 Field 4
3.2.16 Frame 5
3.2.17 Friend 5
3.2.18 Frontogenesis 5
3.2.19 Frontolysis 5
3.2.20 Graphic 5
3.2.21 Hostile 5
3.2.22 Icon 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.23 Icon-based symbol 5
3.2.24 Installation 5
3.2.25 Interoperability 5
3.2.26 Joint military symbology 5
3.2.27 Joker 5
3.2.28 Lollipopping 5
3.2.29 Meteorological symbology 5
3.2.30 Modifier 6
3.2.31 Neutral 6
3.2.32 Operational environment 6
3.2.33 Ownship 6
3.2.34 Pending 6
3.2.35 Point 6
3.2.36 Signals intelligence (SIGINT) 6
3.2.37 Staff 6
3.2.37.1 Static amplifier 6
3.2.38 Suspect 6
3.2.39 Symbol 6
3.2.40 Symbol identification code (SIDC) 6
3.2.41 Text 6
3.2.42 Track 6
3.2.43 Unknown 7
4 GENERAL REQUIREMENTS 7
4.1 Command and control symbols 7
4.2 Other symbols 7
4.3 Joint military symbology sets 7
4.4 Monochromatic and hand-drawn symbols 7
4.5 Symbol recognition and legibility 7
4.6 Availability of scalable vector graphics (SVG) format symbol components 8
4.7 Application and implementation of approved symbology change proposals (SCP). ... 8
4.7.1 Requirements and advantages of implementing approved SCPs 8
4.7.2 Obtaining approved SCPs 8
4.7.3 Receipt of unrecognized symbol identification codes 8
5 DETAILED REQUIREMENTS 9
5.1 Objective 9
5.2 Organization 9
5.3 Icon-based symbols 9
5.3.1 Bounding octagon. 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.1.1 Bounding octagon and frames 10
5.3.1.2 The bounding octagon and icons/modifiers. 12
5.3.2 Frame 12
5.3.2.1 Standard identity 16
5.3.2.2 Dimension. 17
5.3.2.3 Status 17
5.3.3 Fill 18
5.3.3.1 Color 18
5.3.4 Icons 19
5.3.4.1 Main icons 19
5.3.4.2 Full octagon icons 20
5.3.4.3 Full frame icons 20
5.3.5 Invalid symbols 20
5.3.6 Modifiers 20
5.3.7 Amplifiers 21
5.3.7.1 Echelon indicator 26
5.3.7.2 Task force indicator 26
5.3.7.3 Feint/decoy/dummy indicator 26
5.3.7.3.1 Construction of the feint, decoy, or dummy indicator 26
5.3.7.3.2 Position of the feint, decoy, or dummy indicator 27
5.3.7.3.3 Feint, decoy, or dummy indicator line style. 27
5.3.7.3.4 Position of the feint, decoy, or dummy indicator for icon-based symbols 27
5.3.7.4 Offset/precise location amplifier 29
5.3.7.5 Altitude/depth modifier 29
5.3.7.5.1 Altitude base reference point 29
5.3.7.5.2 Relative altitude 29
5.3.7.5.3 Flight level 30
5.3.7.5.4 Multiple instances of altitude/depth modifiers 30
5.3.7.6 Speed amplifier 30
5.3.7.7 Date-time group 31
5.3.7.8 Direction of movement amplifier 31
5.3.7.9 Mobility indicator 31
5.3.7.10 Auxiliary equipment indicator 33
5.3.7.11 Text modifiers 33
5.3.7.12 Dynamic graphic amplifiers. 33
5.3.7.12.1 Area of uncertainty amplifier 35
5.3.7.12.2 Dead reckoning trailer amplifier 35
5.3.7.12.3 Speed leader amplifier 35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.12.4 Pairing line amplifier 36
5.3.7.12.5 Dynamic towed sensor array amplifier 36
5.3.7.13 Operational condition amplifier 36
5.3.7.14 Engagement amplifier bar 37
5.3.7.14.1 Engagement designation using the engagement amplifier bar 37
5.3.7.14.2 Target designation using the engagement amplifier bar 38
5.3.7.14.2.1 For hostile targets 39
5.3.7.14.3 Engagement amplifier bar structure 39
5.3.7.14.3.1 Remote and local engagements 39
5.3.7.14.3.2 Engagement stage 39
5.3.7.14.3.3 Weapons assignment or deployment 40
5.3.8 Manually-generated tracks 41
5.3.9 Composition of icon-based symbols 41
5.3.9.1 Symbol display hierarchy 42
5.3.10 Symbol size 44
5.3.11 Line width 44
5.3.12 Plotting 44
5.3.13 Orientation 44
5.4 Compliance criteria 44
5.4.1 Appearance of tactical symbols 44
5.4.2 Appearance of tactical graphics 45
5.4.3 Assembling and parsing of SIDC 45
5.5 Color 45
6 NOTES 48
6.1 Intended use 48
6.2 Subject term (key word) listing 48
6.3 International standardization agreement implementation 48
6.4 Changes from previous issue 48
APPENDIX A - SYMBOL IDENTIFICATION CODES 49
A.1 SCOPE. 49
A.1.1 Scope 49
A.2 APPLICABLE DOCUMENTS 49
A.3 DEFINITIONS 49
A.4 GENERAL REQUIREMENTS 49
A.4.1 Organization 49
A.5 DETAILED REQUIREMENTS 49
A.5.1 Symbol identification codes 49
A.5.2 Elements of the symbol identification codes 49

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.2.1 Set A - First ten digits. 49
A.5.2.2 Set B - Second ten digits. 49
A.5.2.3 Set C - Third ten digits. 50
A.5.3 Version extension flag (VEF) 50
A.5.4 Set A 50
A.5.4.1 Version 51
A.5.4.2 Standard identity 51
A.5.4.2.1 Context implementation guidance 51
A.5.4.2.2 Standard identity implementation guidance 52
A.5.4.3 Symbol set. The symbol set is comprised of two digits. 52
A.5.4.3.1 Symbol set implementation guidance 53
A.5.4.4 Status 54
A.5.4.4.1 Status implementation guidance 54
A.5.4.5 Headquarters/task force/dummy 54
A.5.4.5.1 Headquarters/task force/dummy implementation guidance 54
A.5.4.6 Echelon/mobility/towed array amplifier 55
A.5.4.6.1 Echelon/mobility/towed array amplifier implementation guidance 56
A.5.5 Set B. The second set of ten digits 56
A.5.5.1 Air (01) 59
A.5.5.2 Air missile (02) 62
A.5.5.3 Space (05) 63
A.5.5.4 Space missile (06) 64
A.5.5.5 Land unit (10) 65
A.5.5.6 Land civilian unit/organization (11) 75
A.5.5.7 Land Equipment (15) 76
A.5.5.8 Land installations (20) 83
A.5.5.9 Control measure (25) 88
A.5.5.10 Sea surface (30) 106
A.5.5.11 Sea subsurface (35) 110
A.5.5.12 Mine warfare (36) 112
A.5.5.13 Activities (40) 114
A.5.5.14 Atmospheric (45) 119
A.5.5.15 Oceanographic (46) 125
A.5.5.16 Meteorological space (47) 130
A.5.5.17 Signals intelligence equipment (50, 51, 52, 53, 54) 131
A.5.5.18 Cyberspace (60) 132
A.5.6 Set A. The third set of ten digits 133
APPENDIX B - SPACE SYMBOLS 135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

B.1 SCOPE 135
B.1.1 Scope 135
B.2 APPLICABLE DOCUMENTS 135
B.3 DEFINITIONS 135
B.4 GENERAL REQUIREMENTS 135
B.4.1 Organization 135
B.5 DETAILED REQUIREMENTS 135
B.5.1 Technical specifications 135
B.5.2 Symbol identification coding scheme 135
B.5.3 Composition of space symbols 135
B.5.3.1 Symbol building process 136
B.5.3.2 Icons and modifiers 137
B.5.3.3 Amplifiers 137
B.5.3.3.1 Text amplifiers 137
B.5.3.3.2 Graphic amplifiers 138
B.6 SPACE EQUIPMENT AND PLATFORM SYMBOLS 138
B.6.1 Space equipment and platform symbols 138
B.6.2 Space equipment and platform icons 138
B.6.3 Space equipment and platform sector 1 modifiers 144
B.6.4 Space equipment and platform sector 2 modifiers 145
B.7 SPACE MISSILE SYMBOLS 146
B.7.1 Space missile symbols 146
B.7.2 Space missile icons 146
B.7.3 Space missile sector 1 modifiers 146
B.7.4 Space missile sector 2 modifiers 147
APPENDIX C - AIR SYMBOLS 149
C.1 SCOPE 149
C.1.1 Scope 149
C.2 APPLICABLE DOCUMENTS 149
C.3 DEFINITIONS 149
C.4 GENERAL REQUIREMENTS 149
C.4.1 Organization 149
C.5 DETAILED REQUIREMENTS 149
C.5.1 Technical specifications 149
C.5.2 Symbol identification coding scheme 149
C.5.3 Composition of air symbols 149
C.5.3.1 Symbol building process 150
C.5.3.2 Icons and modifiers 151

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

C.5.3.3 Amplifiers 151
C.5.3.3.1 Heading 151
C.5.3.3.2 Graphic amplifiers 152
C.6 AIR EQUIPMENT AND PLATFORM SYMBOLS 152
C.6.1 Air equipment and platform symbols 152
C.6.2 Air equipment and platform icons 152
C.6.3 Air equipment and platform sector 1 modifiers 160
C.6.4 Air equipment and platform sector 2 modifiers 165
C.7 AIR MISSILE SYMBOLS 166
C.7.1 Air missile symbols 166
C.7.2 Air missile icons 166
C.7.3 Air missile sector 1 modifiers 167
C.7.4 Air missile sector 2 modifiers 168
APPENDIX D - LAND SYMBOLS 171
D.1 SCOPE 171
D.1.1 Scope 171
D.2 APPLICABLE DOCUMENTS 171
D.3 DEFINITIONS 171
D.4 GENERAL REQUIREMENTS 171
D.4.1 Organization 171
D.5 DETAILED REQUIREMENTS 171
D.5.1 Technical specifications 171
D.5.2 Symbol identification coding scheme 171
D.5.3 Composition of land symbols 171
D.5.3.1 Symbol building process 172
D.5.3.2 Icons and modifiers 172
D.5.3.3 Amplifiers 173
D.5.3.3.1 Text amplifiers. 173
D.5.3.3.2 Graphic amplifiers 173
D.5.3.3.2.1 Headquarters staff amplifier 173
D.5.3.3.2.2 Echelon amplifier 173
D.6 LAND UNIT SYMBOLS 174
D.6.1 Land unit symbols 174
D.6.2 Land unit amplifiers. 174
D.6.3 Land unit icons 177
D.6.4 Land unit sector 1 modifiers 208
D.6.5 Land unit sector 2 modifiers 219
D.7 LAND CIVILIAN INDIVIDUALS/ORGANIZATION SYMBOLS 229

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

D.7.1 Land civilian individuals/organization symbols 229
D.7.2 Land civilian individuals/organization icons 229
D.7.3 Land civilian unit/organization sector 1 modifiers 231
D.7.4 Land civilian unit sector 2 modifiers 234
D.8 LAND EQUIPMENT SYMBOLS 235
D.8.1 Land equipment symbols 235
D.8.2 Land equipment icons 238
D.8.3 Land equipment sector 1 modifiers 276
D.8.4 Land equipment sector 2 modifiers 278
D.9 LAND INSTALLATION SYMBOLS 280
D.9.1 Land installation symbols 280
D.9.2 Land installation icons 283
D.9.3 Land installation sector 1 modifiers 304
D.9.4 Land installation sector 2 modifiers 306
APPENDIX E - SEA SURFACE SYMBOLS 308
E.1 SCOPE 308
E.1.1 Scope 308
E.2 APPLICABLE DOCUMENTS 308
E.3 DEFINITIONS 308
E.4 GENERAL REQUIREMENTS 308
E.4.1 Organization 308
E.5 DETAILED REQUIREMENTS 308
E.5.1 Technical specifications 308
E.5.2 Symbol identification coding scheme 308
E.5.3 Composition of sea surface symbols 308
E.5.3.1 Symbol building process 309
E.5.3.2 Icons and modifiers 309
E.5.3.3 Amplifiers. 309
E.5.3.3.1 Text amplifiers 309
E.5.3.3.2 Graphic amplifiers 311
E.6 SEA SURFACE UNIT, EQUIPMENT AND INSTALLATION SYMBOLS 311
E.6.1 Sea surface unit, equipment and installation symbols 311
E.6.2 Sea surface unit, equipment and installation icons 311
E.6.3 Sea surface unit, equipment and installation sector 1 modifiers 327
E.6.4 Sea surface unit, equipment and installation sector 2 modifiers 330
E.6.5 Sea surface local tracks 332
E.6.5.1 Fused tracks 332
APPENDIX F - SEA SUBSURFACE SYMBOLS 334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

F.1 SCOPE 334
F.1.1 Scope 334
F.2 APPLICABLE DOCUMENTS 334
F.3 DEFINITIONS 334
F.4 GENERAL REQUIREMENTS 334
F.4.1 Organization 334
F.5 DETAILED REQUIREMENTS 334
F.5.1 Technical specifications 334
F.5.2 Symbol identification coding scheme 334
F.5.3 Composition of sea subsurface symbols 334
F.5.3.1 Symbol building process 335
F.5.3.2 Icons and modifiers 336
F.5.3.3 Amplifiers. 336
F.6 SEA SUBSURFACE UNIT, EQUIPMENT AND INSTALLATION SYMBOLS 337
F.6.1 Sea subsurface unit, equipment and installation symbols 337
F.6.2 Sea subsurface unit, equipment and installation icons 337
F.6.3 Sea subsurface unit, equipment and installation sector 1 modifiers 340
F.6.4 Sea subsurface unit, equipment and installation sector 2 modifiers 343
F.6.5 Sea subsurface local tracks 345
F.6.5.1 Fused tracks 345
F.7 MINE WARFARE SYMBOLS 346
F.7.1 Mine warfare symbols. 346
F.7.2 Mine warfare icons 346
APPENDIX G - ACTIVITIES SYMBOLS 360
G.1 SCOPE 360
G.1.1 Scope 360
G.2 APPLICABLE DOCUMENTS 360
G.3 DEFINITIONS 360
G.4 GENERAL REQUIREMENTS 360
G.4.1 Organization 360
G.5 DETAILED REQUIREMENTS 360
G.5.1 Technical specifications 360
G.5.2 Symbol identification coding scheme 360
G.5.3 Composition of activities symbols 360
G.5.3.1 Symbol building process 361
G.5.3.2 Icons and modifiers 361
G.5.3.3 Amplifiers. 362
G.5.3.3.1 Text amplifiers 362

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

G.5.3.3.2 Graphic amplifiers 364
G.6 ACTIVITIES SYMBOLS 364
G.6.1 Activities symbols 364
G.6.2 Activities icons 364
G.6.3 Activities sector 1 modifiers 389
G.6.4 Activities sector 2 modifiers 391
APPENDIX H - CONTROL MEASURE SYMBOLS 392
H.1 SCOPE 392
H.1.1 Scope 392
H.2 APPLICABLE DOCUMENTS 392
H.3 DEFINITIONS 392
H.4 GENERAL REQUIREMENTS 392
H.4.1 Organization 392
H.5 DETAILED REQUIREMENTS 392
H.5.1 Control measure symbols 392
H.5.1.1 Composition of control measure symbols 393
H.5.1.1.1 Standard identity (color rules) for control measure symbols 393
H.5.1.1.2 Point control measure height 393
H.5.1.1.3 Status 393
H.5.1.1.4 Amplifiers 394
H.5.1.1.5 Direction of movement indicator 397
H.5.1.1.6 Echelon indicator 397
H.5.1.1.7 Offset location indicator 397
H.5.1.1.8 Text amplifier 397
H.5.1.1.9 Altitude/depth amplifier 397
H.5.1.1.10 Altitude base reference point 397
H.5.1.1.11 Date-time group. Date-time group (DTG) 398
H.5.1.1.12 Location of Control Measure Symbols Sector 1 and 2 Modifiers 398
H.5.1.1.13 Feint/decoy/dummy indicator 399
H.5.2 Construction of control measure symbols 402
H.5.2.1 Point control measure symbols 402
H.5.2.2 Line and area control measure symbols 402
H.5.3 Coloring 403
H.5.4 Labeling 403
H.5.4.1 Fonts 403
H.5.5 Command and Control 403
H.5.5.1 Boundaries. 403
H.5.5.2 Boundary Line Segment Orientation Determination 403

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.6 Points 407
H.5.7 Lines 408
H.5.8 Areas 408
H.5.9 Area of operations 409
H.5.10 Command and control measure symbols 421
H.5.11 Maneuver Control Measure Symbols 428
H.5.12 Defensive maneuver 434
H.5.12.1 Areas 434
H.5.12.2 Observation post 435
H.5.13 Offensive maneuver 438
H.5.14 Axis of advance 438
H.5.14.1 Direction of attack 440
H.5.15 Maneuver control measure symbols. 443
H.5.16 Airspace Control Measures (Means) 446
H.5.17 Maritime control measures 459
H.5.17.1 Maritime control measures 459
H.5.18 Fire Support Coordination Measures. 490
H.5.19 Targets 497
H.5.20 Target acquisition 504
H.5.21 Obstacles. 514
H.5.22 Field fortification control measures. 531
H.5.23 CBRN defense control measure symbols 532
H.5.24 Sustainment control measures 538
H.5.25 Supply points. 544
H.5.26 Mission Tasks. 554
H.5.27 Intelligence control measures 562
H.5.28 Control Measure sector 1 modifiers 562
H.5.29 Abbreviations and Acronyms for Use with Control Measure Symbols 569
H.5.29.1 Boundary abbreviations and acronyms 569
H.5.29.2 Unit functions abbreviation and acronyms 570
APPENDIX I - METEOROLOGICAL AND OCEANOGRAPHIC SYMBOLOGY 571
I.1 SCOPE 571
I.1.1 Scope 571
I.2 APPLICABLE DOCUMENTS 571
I.3 DEFINITIONS 571
I.4 GENERAL REQUIREMENTS 571
I.4.1 Organization 571
I.5 DETAILED REQUIREMENTS 571

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

I.5.1 Technical specifications 571
I.5.2 Symbology identification coding scheme 571
I.5.3 Symbology set 571
APPENDIX J - SIGNALS INTELLIGENCE SYMBOLS 675
J.1 SCOPE 675
J.1.1 Scope 675
J.2 APPLICABLE DOCUMENTS 675
J.3 DEFINITIONS 675
J.4 GENERAL REQUIREMENTS 675
J.4.1 Organization 675
J.5 DETAILED REQUIREMENTS 675
J.5.1 Technical specifications 675
J.5.2 Symbol identification coding scheme 675
J.5.3 Composition of SIGINT symbols 675
J.5.3.1 Symbol building process 676
J.5.3.2 Icons and modifiers 676
J.5.3.3 Amplifiers 676
J.6 SIGINT SYMBOLS 677
J.6.1 SIGINT symbols 677
J.6.2 SIGINT icons 677
J.6.3 SIGINT sector 1 modifiers 678
J.6.4 SIGINT sector 1 modifiers 686
APPENDIX K - USE OF WARFIGHTING SYMBOLS IN PSEUDO-THREE-DIMENSIONAL (2.5D) DISPLAYS 687
K.1 SCOPE 687
K.1.1 Scope 687
K.2 REFERENCES 687
K.3 DEFINITIONS 687
K.3.1 Billboarding 687
K.3.2 Cubing 687
K.3.3 Curve (line) 687
K.3.4 Geospatial 687
K.3.5 Glyph 687
K.3.6 Icon 687
K.3.7 Image 687
K.3.8 Marker post (lollipop) 688
K.3.9 Model 688
K.3.10 Pictograph 688

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.3.11 Point 688
K.3.12 Solid (volume) 688
K.3.13 Surface (area) 688
K.3.14 Symbicon 688
K.3.15 Symbol 688
K.3.16 Terrain draping 688
K.3.17 Three-dimensional 688
K.3.18 Two-dimensional 688
K.4 PSEUDO-THREE-DIMENSIONAL (2.5D) SYMBOLIZATION 688
K.4.1 Introduction 688
K.4.2 When to use 2.5D displays 689
K.4.3 Taxonomy of symbols and displays 690
K.4.3.1 Subject Area. 690
K.4.3.2 Delineation Type. 690
K.4.3.3 Degree of Abstraction. 690
K.4.3.4 Dimensionality. 690
K.4.3.5 Relative to terrain. 691
K.4.4 Geospatial (map) symbols 691
K.4.4.1 Raster data 691
K.4.4.2 Vector data 691
K.4.5 Imagery 691
K.4.6 Optimum display method 691
K.5 GUIDANCE AND PORTRAYAL CONSIDERATIONS IN PSEUDO-THREE-DIMENSIONAL (2.5D) DISPLAYS 692
K.5.1 Use of 2D symbols in 2.5D display 692
K.5.1.1 Visualization of icons 692
K.5.1.2 Visualization of control measure symbols 695
K.5.1.3 Symbicon 696
K.5.2 Pseudo-three-dimensional models 696
K.5.2.1 Modeling and Simulation (M&S) standards 697
K.5.2.2 Model libraries 697
K.5.3 Design considerations for symbology in a 2.5D display. 697
K.5.3.1 Symbol location 697
K.5.3.2 Perspective 698
K.5.3.3 Direction indicators 699
K.5.4 Text amplifiers for symbols 699
K.5.5 Speed vectors and trailing lines 700
K.5.6 Incomplete data 700

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5.7 Vertical exaggeration of terrain and tactical symbols 700
K.5.8 Implications for training and doctrine 701
K.6 NOTES 701
APPENDIX L - CYBERSPACE SYMBOLS 703
L.1 SCOPE 703
L.1.1 Scope 703
L.2 APPLICABLE DOCUMENTS 703
L.3 DEFINITIONS 703
L.4 GENERAL REQUIREMENTS 703
L.4.1 Organization 703
L.5 DETAILED REQUIREMENTS 703
L.5.1 Technical specifications 703
L.5.2 Symbol identification coding scheme 703
L.5.3 Composition of cyberspace symbols 703
L.5.3.1 Symbol building process 704
L.5.3.2 Icons and modifiers 704
L.5.3.3 Amplifiers 704
L.6 CYBERSPACE SYMBOLS 707
L.6.1 Cyberspace symbols 707
L.6.2 Cyberspace icons 707
INDEX ..... **Error! Bookmark not defined.**
CONCLUDING MATERIAL 770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

1 SCOPE

1.1 Scope. This military standard (MIL-STD) establishes the rules and requirements to develop and display joint military symbology within the Department of Defense (DoD) and non-DoD entities.

2 APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this standard. This section does not include documents cited in other sections of this standard or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in this standard, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

INTERNATIONAL STANDARDIZATION AGREEMENTS (STANAG) (NATO)

STANAG 1166	-	Standard Ship Designator System
STANAG 1241	-	Standard Identity Description Structure for Tactical Use
STANAG 2019/APP-6	-	Joint Military Symbology
STANAG 2147		Target Numbering System (Nonnuclear)
STANAG 3680/AAP-6	-	Glossary of Terms and Definitions
STANAG 5522	-	Improved Link Eleven (NILE) - Link 22

DEPARTMENT OF DEFENSE (DOD) STANDARDS

MIL-STD-1472	-	Design Criteria Standard: Human Engineering
MIL-STD-1787	-	Aircraft Display Symbology
MIL-STD-2401	-	World Geodetic System (WGS)
MIL-STD-3011	-	Joint Range Extension Application Protocol (JREAP)
MIL-STD-6016	-	Interoperability Standard: Tactical Data Link (TDL) Link-16 Message Standard
MIL-STD-6017	-	Interoperability Standard: Variable Message Format (VMF) Message Standard
MIL-STD-6018	-	Interface Standard: Integrated Broadcast Service (IBS) Common Message Format (CMF) Standard
MIL-STD-6040	-	Interface Standard: United States Message Text Format (USMTF) Description

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

(Copies of these documents are available online at https://assist.dla.mil, https://quicksearch.dla.mil.)

2.2.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE PUBLICATIONS

Department of Defense Dictionary of Military and Associated Terms

JOINT PUBLICATIONS (JP)

JP 3-0	-	Joint Operations
JP 3-09	-	Joint Fire Support
JP 3-52	-	Joint Airspace Control
JP 3-59	-	Meteorological and Oceanographic Operations

(Copies of these documents are available at https://jdeis.js.mil/jdeis/.)

AIR FORCE HANDBOOK (AFH)

AFH11-203	-	Weather for Aircrews

(Copies of this document are available online at http://www.e-publishing.af.mil/.)

ARMY PUBLICATIONS

ADRP 1-02	-	Terms and Military Symbols
ADP 5-0	-	The Operations Process
FM 3-90-1	-	Offense and Defense Volume 1
ATP 2-01.3/ MCRP 2-10B.1	-	Intelligence Preparation of the Battlefield/Battlespace
ATP 2-33.4	-	Intelligence Analysis
AARTYP-5/ STANAG 2484	-	NATO Fire Support Doctrine

(Copies of these documents are available at http://armypubs.army.mil/.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

NATIONAL GEOSPATIAL-INTELLIGENCE AGENCY (NGA) STANDARD

NGA.STND.0033 - Geopolitical Entities, Names and Codes (GENC) Standard

(Copies of this document are available online at https://nsgreg.nga.mil/genc/registers.jsp.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3 DEFINITIONS

3.1 Acronyms and abbreviations used in this standard. The acronyms used in this standard are defined as follows:

AAP	Allied administrative publication
ADP	Army doctrine publication
ADRP	Army doctrine reference publication
AOU	area of uncertainty
APP	allied procedural publication
ASSIST	Acquisition Streamlining and Standardization Information System
C2	command and control
CBRN	chemical, biological, radiological, and nuclear
CIE	Commission Internationale de l'Eclairage
DISA	Defense Information Systems Agency
DoD	Department of Defense
DR	dead reckoning
HSL	hue, saturation and luminance
ISO	International Organization for Standardization
JP	joint publication
METOC	meteorological and oceanographic
MGRS	Military Grid Reference System
MIL-STD	military standard
NATO	North Atlantic Treaty Organization
RGB	red, green, blue
SIGINT	signals intelligence
STANAG	NATO standardization agreement
USMTF	United States message text format
VMF	variable message format
WGS 84	World Geodetic System 1984

3.2 Definitions used in this standard. Terms used in this document are defined as follows. The source of the definition is cited in parentheses. Unless otherwise annotated, this publication is the proponent for all terms and definitions found in the index.

3.2.1 Amplifier. Optional text or graphics that provide additional information about a symbol and are always located outside the frame area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.2 Area. 1. A flat piece of ground or open space. 2. A distinct space or surface, or one having a special function. (Refer to ADRP 1-02 for the definition of specific types of areas.)

3.2.3 Assumed friend. A track which is assumed to be a friend because of its characteristics, behavior, or origin. (STANAG 1241)

3.2.4 Atmospheric environment phenomena. A term used to describe natural phenomena occurring in the envelope of air surrounding the Earth, including its interfaces and interactions with the Earth's solid or liquid surface.

3.2.5 Attribute. A distinctive feature or characteristic such as line, shape, color, texture (fill), edge, mass and value.

3.2.6 Boundary. A line that delineates surface areas for the purpose of facilitating coordination and deconfliction of operations between adjacent units, formations, or areas. (DOD Dictionary)

3.2.7 C2 (Command and Control). The exercise of authority and direction by a properly designated commander over assigned and attached forces in the accomplishment of the mission. Command and control functions are performed through an arrangement of personnel, equipment, communications, facilities, and procedures employed by a commander in planning, directing, coordinating, and controlling forces and operations in the accomplishment of the mission.

3.2.8 Combat effectiveness. The ability of a unit to perform its mission. Factors such as ammunition, personnel, fuel status, and weapon systems are evaluated and rated. (ADRP 1-02)

3.2.9 Commission Internationale de l'Eclairage (CIE). A color space chart widely used to describe the range of color seen by the human eye.

3.2.10 Contact. In air intercept, a term meaning, "Unit has an unevaluated target."

3.2.11 Control measure symbol. A category of joint military symbology that provides information about objects necessary for battlefield planning and management.

3.2.12 Defended area. An area the Source Track Number (STN) is capable of defending against ballistic missiles, etc., (i.e., the Source TN is operational with ready weapons and has designated the area for defense). (MIL-STD-6016)

3.2.13 Dynamic amplifier. An amplifier whose size and placement are based on the attributes of an object and can change as these attributes and the scale of the background change.

3.2.14 Faker. A friendly track acting as a hostile for exercise purposes. (STANAG 1241)

3.2.15 Field. A defined area in which a limited combination of alphanumeric and other characters, amplifiers and/or abbreviations are grouped/situated in an established way around a symbol/icon, line, area, point, or boundary and used for the purpose of providing additional information about the associated object or operational environment geometry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.16 Frame. The geometric border of a symbol that provides an indication of the standard identity, battle dimension and status of a joint military object.

3.2.17 Friend. A track belonging to a declared, presumed or recognized friendly nation, faction or group. (STANAG 1241)

3.2.18 Frontogenesis. The process where a frontal boundary is developing.

3.2.19 Frontolysis. The process where a frontal system is dissipating/weakening.

3.2.20 Graphic. Any and all products of the cartographic and photogrammetric art. A graphic may be either a map, chart, or mosaic or even a film strip that was produced using cartographic techniques. (AAP-6)

3.2.21 Hostile. A track whose characteristics, behavior or origin indicate that it is a threat to friendly forces. Designation as hostile does not necessarily imply clearance to engage. (STANAG 1241) In identification, the designation given to a track, object or entity whose characteristics, behavior or origin indicate that it is a threat to friendly forces. Designation as hostile does not necessarily imply clearance to engage. (AAP-6)

3.2.22 Icon. The innermost part of a symbol that provides a graphic representation of an object.

3.2.23 Icon-based symbol. A category of joint symbology that provides information about the standard identity, battle dimension, status and mission of an object.

3.2.24 Installation. A grouping of facilities which support particular functions. Installations may be elements of a base.

3.2.25 Interoperability. The condition achieved among communications-electronics systems or items of communications-electronics equipment when information or services can be exchanged directly and satisfactorily between them and/or their users. The degree of interoperability should be defined when referring to specific cases. (DOD Dictionary)

3.2.26 Joint military symbology. Symbology used to plan and execute joint military operations in support of C2 functions. These symbols fall into two basic categories: icon-based symbols and control measure symbols.

3.2.27 Joker. A friendly track acting as a suspect for exercise purposes. (STANAG 1241)

3.2.28 Lollipopping. The placing of a symbol above the ground surface on a map using a marker post. The user can set an arbitrary height above the ground surface and drop down lines connecting the symbol to its ground location without having the symbol actually cover the location on the map.

3.2.29 Meteorological symbology. Symbology used in weather/climatic forecasting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.30 Modifier. A pictorial or alphanumeric component that provides additional information about the icon and is always located inside the frame area.

3.2.31 Neutral. 1. In combat and combat – support operations, an identity applied to a track whose characteristics, behavior, origin, or nationality indicate that it is neither supporting nor opposing friendly forces. (DOD Dictionary). 2. In identification, the designation given to a track, object or entity whose characteristics, behavior, origin or nationality indicate that it is neither supporting nor opposing friendly forces (AAP-6).

3.2.32 Operational environment. A composite of the conditions, circumstances, and influences that affect the employment of capabilities and bear on the decisions of the commander. (DOD Dictionary)

3.2.33 Ownship. The visual representation of the ship that the operator is currently occupying.

3.2.34 Pending. Tracks which have not been subject to the identification process but which are available for reporting may be reported with a status of pending. (STANAG 1241)

3.2.35 Point. A position, place, spot, or locality. (Refer to ADRP 1-02 for the definition of specific types of points.) A symbol that has only one set of coordinates.

3.2.36 Signals intelligence (SIGINT). 1. A category of intelligence comprising either individually or in combination all communications intelligence, electronic intelligence, and foreign instrumentation signals intelligence, however transmitted. 2. Intelligence derived from communications, electronics, and foreign instrumentation signals. (DOD Dictionary)

3.2.37 Staff. A straight line used as a headquarters amplifier in a symbol or used to connect a symbol with its location on a map, chart, or display. The free end of the staff indicates the direction or the intended direction of movement of the track or object.

3.2.37.1 Static amplifier. An amplifier whose size and placement are fixed and remain constant.

3.2.38 Suspect. A track which is potentially hostile because of its characteristics, behavior, origin, or nationality. (STANAG 1241)

3.2.39 Symbol. A graphic object that presents information.

3.2.40 Symbol identification code (SIDC). A numeric code based on a hierarchical structure that provides the elements required to construct the basic symbol.

3.2.41 Text. Words, alphanumeric information and other American Standard Code for Information Interchange (ASCII) characters used to define or further designate the meaning of a symbol.

3.2.42 Track. 1. A series of related contacts displayed on a data display console or other display device. 2. To display or record the successive positions of a moving object. 3. The actual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

path of an aircraft above or a ship on the surface of the earth. (DOD Dictionary) The course is the path that is planned; the track is the path that is actually taken.

3.2.43 Unknown. An evaluated track that has not been identified. (STANAG 1241) An identity applied to an evaluated track that has not been identified. (DOD Dictionary)

4 GENERAL REQUIREMENTS

4.1 Command and control symbols. The symbol sets encompass the graphic representation of units, equipment, installations and other elements and activities relevant to joint military operations. They contain the building blocks for joint symbols from the air, land, maritime (sea surface and sea subsurface) and space physical domains.

4.2 Other symbols. This standard also contains standardized symbols and figures for control measures, meteorological and oceanographic (METOC), signals intelligence (SIGINT) and activities.

4.3 Joint military symbology sets. Figure 1 shows the joint military symbology sets available for planning and conducting joint operations.

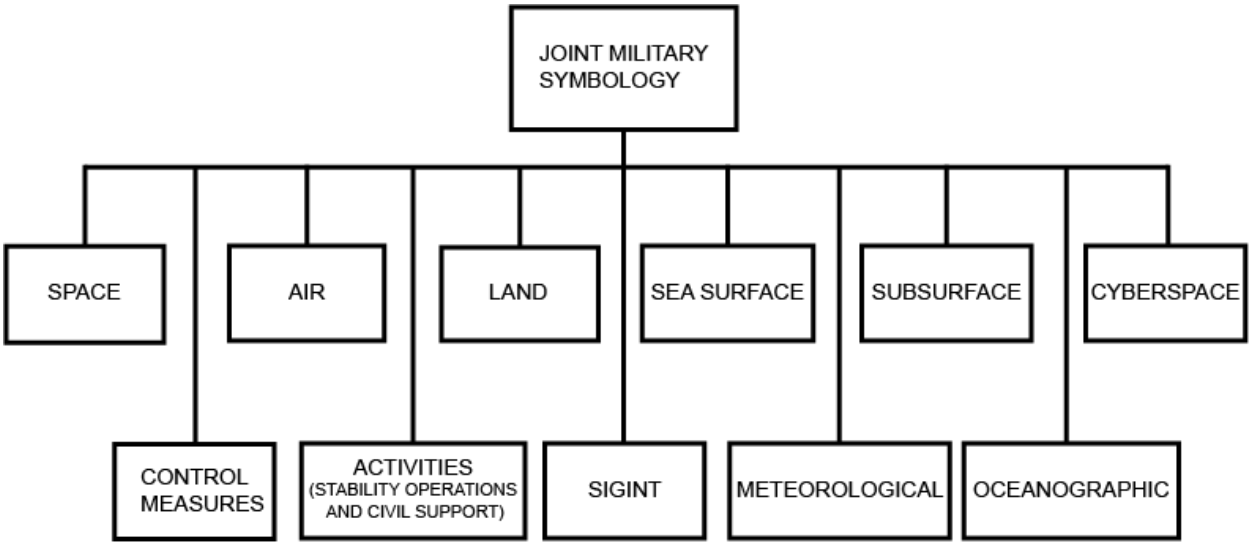


FIGURE 1. Joint military symbology sets.

4.4 Monochromatic and hand-drawn symbols. While the focus of this publication is the display of symbols in modern multi-chromatic electronic systems, all symbols should be usable in monochromatic systems and as hand-drawn symbols.

4.5 Symbol recognition and legibility. When engineering and designing symbols and composing their building blocks, consider human factors; such as, symbol recognition and legibility across a variety of illumination conditions, map backgrounds, symbol sizes, display types and resolutions, and mental and physical fatigue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

4.6 Availability of scalable vector graphics (SVG) format symbol components. The Symbology Standard Management Committee (SSMC) has created symbol building blocks in Scalable Vector Graphics (SVG) format. These symbol components are Scalable Vector Graphics (SVG) 1.1 (Second Edition), 16 August 2011 compliant and can be used as examples of control measure symbols, can be used to assemble and/or parse symbols in all other appendices, and can be used as input in creating MIL-STD-2525 compliant symbols in other formats by implementers of the standard. Requests for these files (please specify MIL-STD-2525 version) should be addressed to Defense Information Systems Agency (DISA) Standards Management Branch (BDE4), P.O. Box 549, Ft. Meade, MD 20755-0549, or emailed to disa.meade.EE.mbx.symbology@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST [Acquisition Streamlining and Standardization Information System] online database at https://assist.dla.mil/.

4.7 Application and implementation of approved symbology change proposals (SCP). Symbology Change Proposals (SCPs) written against the current version of MIL-STD-2525 and approved by the Symbology Standard Management Committee (SSMC), unless specifically stated otherwise in the approved SCP document, can be immediately implemented and fielded upon approval of the SCP by the SSMC on any system or platform prior to that SCP being incorporated into the next formal release of MIL-STD-2525.

4.7.1 Requirements and advantages of implementing approved SCPs. There are many reasons why a Service, system, system of systems or application would immediately implement SSMC SCPs that were approved for implementation vice waiting for an updated version of the standard to be published. Many new symbol requirements have originated with deployed warfighters engaged in combat operations for new symbol to depict things not supported in the (at that time) current version of the standard – things such as Improvised Explosive Devises (IED), IED Suicide Bombers, IED Explosions, Emergency Distress Call Points, Terrorist Organizations, Raids on Houses, etc. Other new symbol requirements originate from a Service when their doctrine changes and new symbols are identified in those documents. As these documents are used in training, it is often imperative to get these new symbols approved and into fielded systems so the warfighter will have all the tools available to them that they were trained to use. Waiting for an updated version of the standard to be published can take years and is often an unacceptable delay to the warfighters we support.

4.7.2 Obtaining approved SCPs. A list of all SSMC SCPs approved for immediate implementation is available upon request from the SSMC Chairman. Copies of SCPs approved for immediate implementation are available upon request from the SSMC Chairman. Requests should be addressed to Defense Information Systems Agency (DISA) Standards Management Branch (BDE4), P.O. Box 549, Ft. Meade, MD 20755-0549, or emailed to disa.meade.EE.mbx.symbology@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST [Acquisition Streamlining and Standardization Information System] online database at https://assist.dla.mil/.

4.7.3 Receipt of unrecognized symbol identification codes. The ability to implement SSMC approved SCPs immediately upon approval could cause fielded systems to receive a symbol identification code (SIDC) that the system does not recognize. If a system receives an unrecognized SIDC, the system should handle exception to the best of its ability and based upon

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

its specific system/user requirements. This could include, for example, discarding the unrecognized SIDC, displaying an Unknown symbol (see table I) at the unrecognized SIDC location, or displaying the portions of the unrecognized SIDC that can be understood; such as, an empty frame (affiliation based/shaped) when SIDC Set A is recognized and understood but Set B is not recognized or understood.

5 DETAILED REQUIREMENTS

5.1 Objective. To promote interoperability at the information level within the area of joint military symbology, it is necessary to define a standard set of rules for symbol construction and generation to be implemented in C2 systems. The rules in this standard are considered to be the minimum necessary to ensure that information about joint military symbology is exchanged successfully across service and organizational boundaries. These rules are not intended to constrain the manner in which the symbology is used.

5.2 Organization. This section provides the detailed requirements concerning the composition, construction, display and transmission of tactical symbols and control measure symbols considered essential to achieve interoperability. Display rules are provided which allow the degree of complexity of the resulting symbology to be tailored to operational requirements and system capabilities. Additional implementation guidance is provided in each appendix as it applies to the particular symbology set.

5.3 Icon-based symbols. Icon-based symbols represent units, individuals, equipment, installations, activities and meteorological occurrences. An icon-based symbol can be composed of a frame, fill, icon, modifiers and amplifiers (see figure 2). These elements are located within and around a virtual bounding octagon. The components of an icon-based symbol provide information about the standard identity, battle dimension, status and mission of an operational object. The placement and display options of the various elements are explained in the following paragraphs. When representing unorthodox platforms, select the most appropriate icon from the standard.

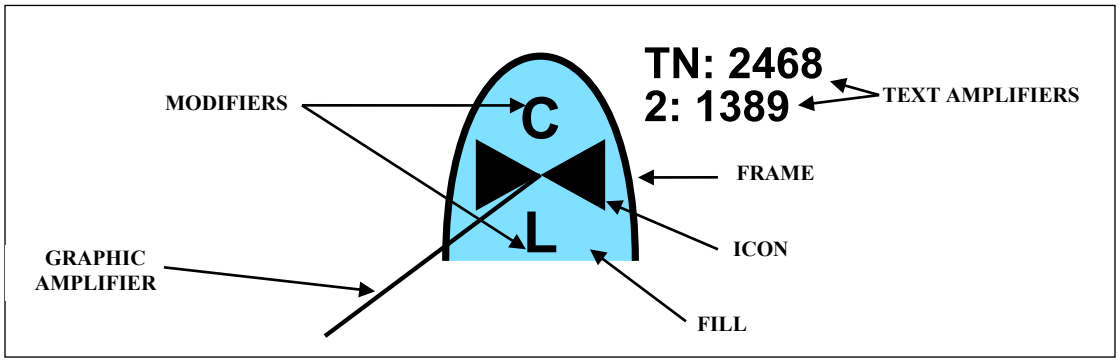


FIGURE 2. Icon-based symbol components.

5.3.1 Bounding octagon. The bounding octagon serves as the spatial reference for the relative sizing and placement of frames, icons and modifiers. The default length and height of the bounding octagon is L (see figure 3). L is measured from point to opposite point in the octagon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

The bounding octagon shall not be displayed in a symbol. The bounding octagon appears in example symbols throughout this document for clarification purposes only.

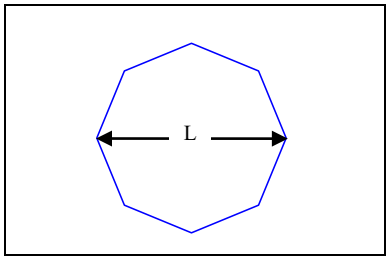


FIGURE 3. The bounding octagon.

5.3.1.1 Bounding octagon and frames. The size and placement of frames shall be determined by the size of the bounding octagon. Frame length and height shall vary from 1L to 1.5L depending on the particular frame. See figure 4 for sizing requirements of the basic frames relative to the bounding octagon. See 5.3.2 for more information on frames.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

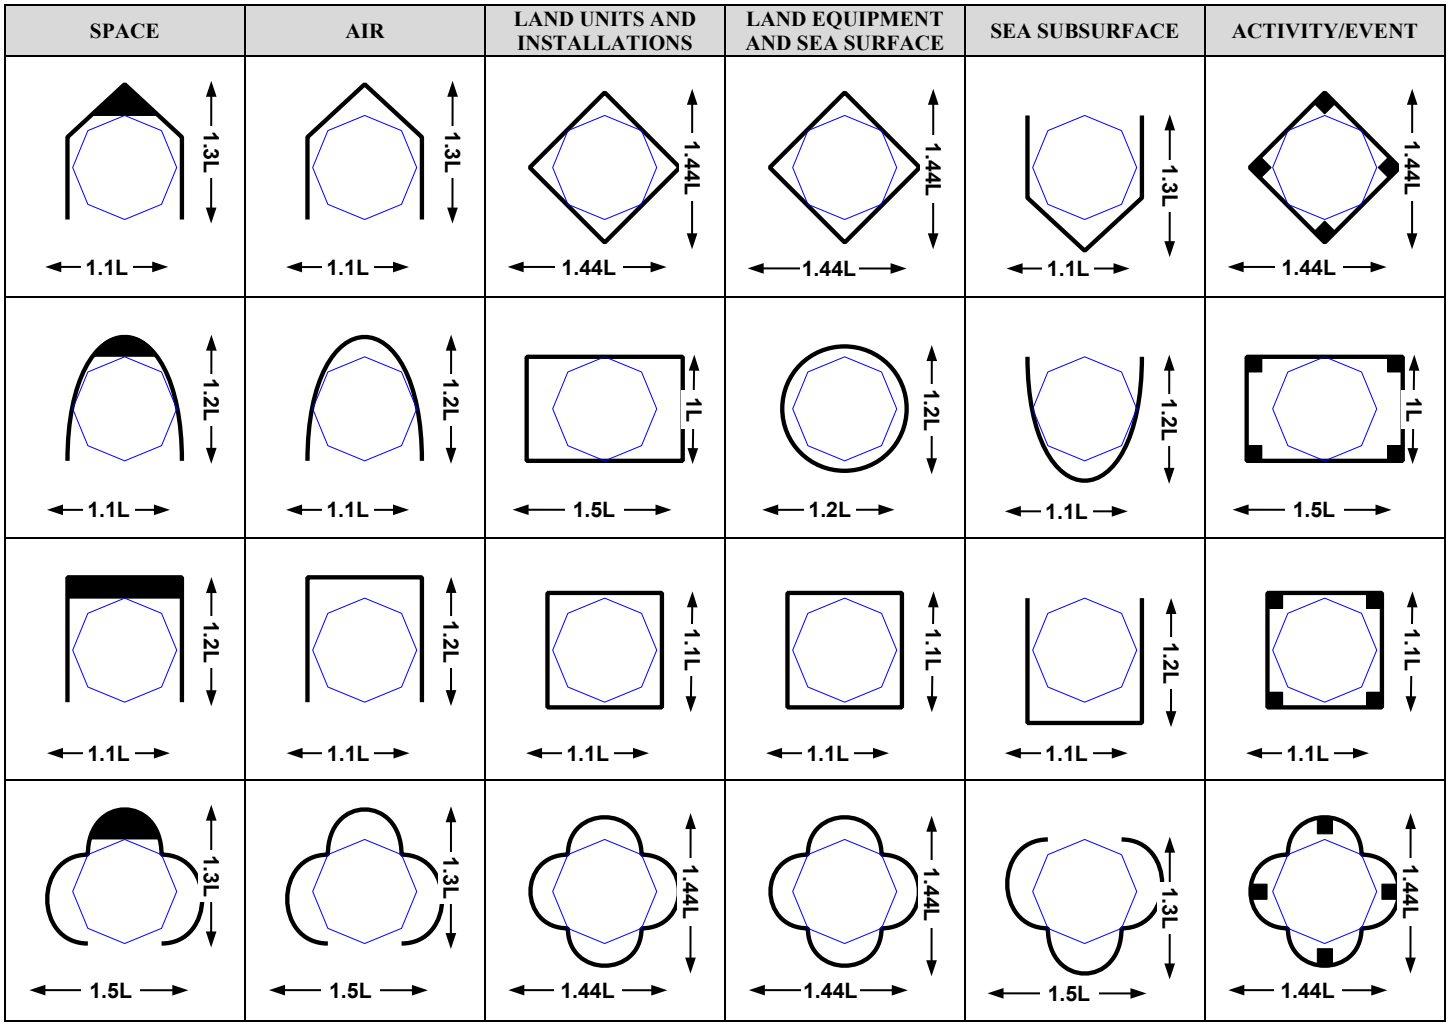


FIGURE 4. The bounding octagon and frame sizes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.1.2 The bounding octagon and icons/modifiers. The bounding octagon is divided into three horizontal sectors (main, 1 and 2) to specify positioning and sizing of icons and modifiers. Icons shall be placed in the main sector while modifiers are placed in sectors 1 and 2. Specific icons/symbols, as identified in the standard, require the sectored bounding octagon to be rotated 90 degrees counterclockwise to create vertical sectors. Figure 5 shows the horizontal and vertical sectored bounding octagons. Icons shall not exceed the dimensions of the main sector of the bounding octagon or touch the interior border of the frame. To optimize legibility, icons may be enlarged within the constraints of the bounding octagon when one or no modifiers are displayed. The dimensions of unframed icons shall be the same as framed icons. See 5.3.4 for more information on icons. Modifiers shall not exceed the dimensions of sectors 1 and 2, unless expressly noted within a specific symbol. See 5.3.6 for more information on modifiers.

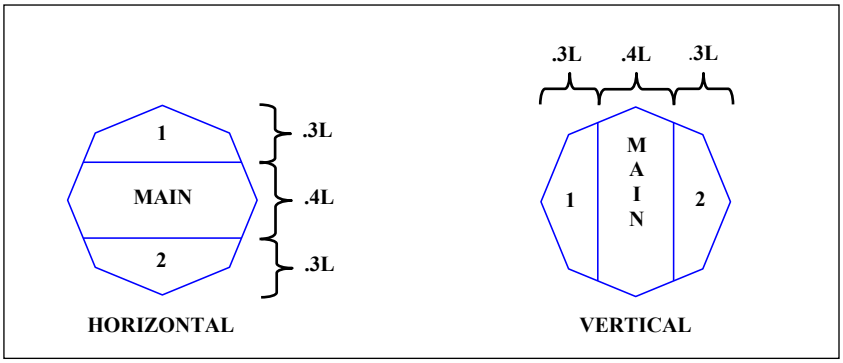























FIGURE 5. The bounding octagon with horizontal and vertical sectors.

5.3.2 Frame. The frame is the border of a symbol. A frame shall be optionally depicted in only two cases: land equipment and sea surface civilian vessels. Natural event symbols are unframed. When a frame is included in a symbol, its shape indicates the standard identity, dimension and status of the object. A frame can be black or white depending on display background. When the symbol is unfilled, the frame should be depicted using the default colors as specified in 5.5 to provide enhanced presentation information about standard identity. Table I provides the frame shapes that shall be used during real-world, non-exercise situations. Table II provides the frame shapes that shall be used during exercises. Table III provides the frame shapes that shall be used during simulations. If training tracks are displayed, they shall be identified by adding "-T" to the "X" in the exercise frame (see figure 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.





































TABLE I. Frames depicting standard identities and dimensions.

DIMENSION / STANDARD IDENTITY	UNKNOWN	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE
PENDING (YELLOW)									
UNKNOWN (YELLOW)									
FRIEND (CYAN)									
NEUTRAL (GREEN)									
HOSTILE (RED)									
ASSUMED FRIEND (CYAN)									
SUSPECT (RED)									

Note: Frames displayed with solid lines or alternating black and white dotted lines, as shown above, indicate status as present, i.e., the object exists at the location identified. See table IV for examples of frames depicting planned or anticipated status.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.




































TABLE II. Exercise frames.

DIMENSION / STANDARD IDENTITY	UNKNOWN	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE
EXERCISE PENDING (YELLOW)									
EXERCISE UNKNOWN (YELLOW)									
EXERCISE FRIEND (CYAN)	N/A								
EXERCISE NEUTRAL (GREEN)	N/A								
EXERCISE ASSUMED FRIEND (CYAN)	N/A								
JOKER (RED)	N/A								
FAKER (RED)	N/A								

Note: Frames displayed with solid lines or alternating black and white dotted lines, as shown above, indicate status as present, i.e., the object exists at the location identified. See table IV for examples of frames depicting planned or anticipated status.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE III. Simulation frames.

DIMENSION / STANDARD IDENTITY	UNKNOWN	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE
SIMULATED PENDING (YELLOW)									
SIMULATED UNKNOWN (YELLOW)									
SIMULATED FRIEND (CYAN)									
SIMULATED NEUTRAL (GREEN)									
SIMULATED HOSTILE (RED)									
SIMULATED ASSUMED FRIEND (CYAN)									
SIMULATED SUSPECT (RED)									

Note: Frames displayed with solid lines or alternating black and white dotted lines, as shown above, indicate status as present, i.e., the object exists at the location identified. See table IV for examples of frames depicting planned or anticipated status.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.




FIGURE 6. Friend and neutral exercise training tracks.

5.3.2.1 Standard identity. In imagery interpretation, identity is the discrimination between objects within a particular type or class. Standard Identity reflects the relationship between the viewer and the operational object being monitored.

a. The Standard Identity categories are Unknown, Assumed Friend, Friend, Neutral, Suspect, and Hostile (see tables I, II, and III). In addition, pending is a valid condition but not considered a standard identity. Figure 7 shows assumed friend and suspect frames on various backgrounds.

b. A closed frame is used to denote the Land and Sea Surface Dimensions, a frame open at the bottom to denote the Air and Space Dimensions, and a frame open at the top to denote the Sea Subsurface Dimension.

c. A solid line is used when the identity of an entity is certain. A solid line can be used with the standard identifies of Friend, Hostile, Neutral and Unknown.

d. A dotted line of alternating black and white dots is used when the identity of an entity is uncertain. A dotted line can be used with the standard identifies of Assumed Friend, Suspect, or the category of Pending. Figure 7 shows assumed friend and suspected frames on various backgrounds.

e. Standard Identity is not applicable to Meteorological Oceanographic (METOC) symbols.

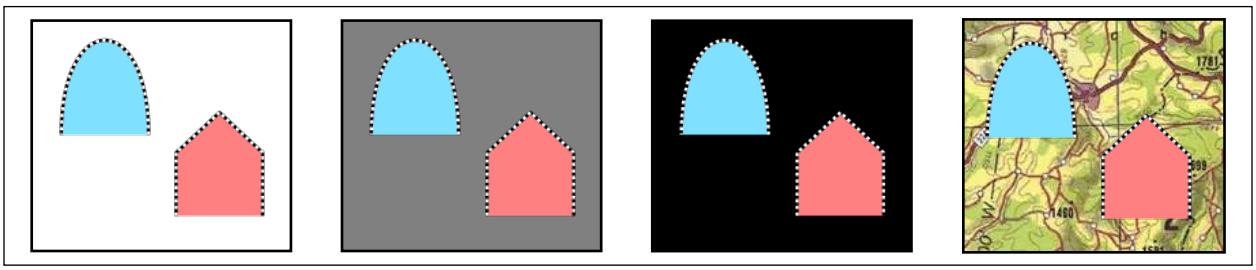


FIGURE 7. Assumed friend and suspect frames on various backgrounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.



5.3.2.2 Dimension. A Dimension commonly reflects the physical environment within which the primary mission of the object is conducted or the entity is located. An object can have a mission area on, above or below the earth's surface (is divided into land or sea) or outside the earth's atmosphere.

- The Land Dimensions (Land Unit, Land Equipment and Land Installation) are those which are physically located on the land surface or close to the surface (e.g., land mines and underground shelters).
- The Sea Surface Dimension includes only those objects which are on the sea surface. However, a landing craft whose primary mission is to fight on land is categorized as Land Equipment.
- The Subsurface Dimension includes those objects which are below the sea surface (e.g., submarines and sea mines).
- Aircraft, regardless of service ownership, shall be depicted in the Air Dimension while air facilities shall be depicted as Land Installations. Air related ground equipment and installations shall be depicted in the Land Equipment or Installation Dimensions.
- Activity/Event and Unknown are categorized as Dimensions despite not having a direct relationship to a specific physical environment.
- The space domain is above the exosphere.
- The cyberspace dimension is characterized by the use of electronics and the electromagnetic spectrum.

5.3.2.3 Status. Status depicts whether an object exists at the location identified (status is “present” or “confirmed”), will in the future reside at that location (status is "planned” or “anticipated"), or is thought to reside at that location (“suspected”). See table IV.

- The symbol frame shall be a solid or black and white dotted line when indicating a present or confirmed status and a dashed line when indicating anticipated, planned, or suspected status.
- When the frame is assumed friend, suspect, or pending, the status shall not be displayed. In these cases, the frame is depicted as a dotted line.
- Status cannot be shown when the symbol is unframed or is displayed as a dot.

TABLE IV. Friend frames shown in present and planned status.

DIMENSION / STATUS	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE
PRESENT OR CONFIRMED POSITION								
ANTICIPATED, PLANNED OR SUSPECTED POSITION								

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.3 Fill. The fill is the interior area within a frame. In framed symbols, color shall provide a redundant indicator with regard to standard identity. If color is not used, the fill is transparent (see figure 8).

5.3.3.1 Color. In unframed symbols, color shall be the sole indicator of standard identity, excluding text amplifiers. The default colors that shall be used to designate standard identity when colored symbols are either hand drawn or displayed electronically are specified in 5.5. Table I depicts the default colors that shall be used to designate standard identity when colored symbols are either hand-drawn or displayed electronically. See 5.5 for additional information on how color is to be displayed in a symbol.

- The color fill of purple (see 5.5) may be used as a rendering option for civilian units, equipment and installations. The standard identity shall determine the frame shape of the civilian track. The purple color fill option may be used for any or all of the domains and across all standard identities with the exception of suspect and hostile, which shall remain red. Table V depicts representative civilian tracks with purple fills.

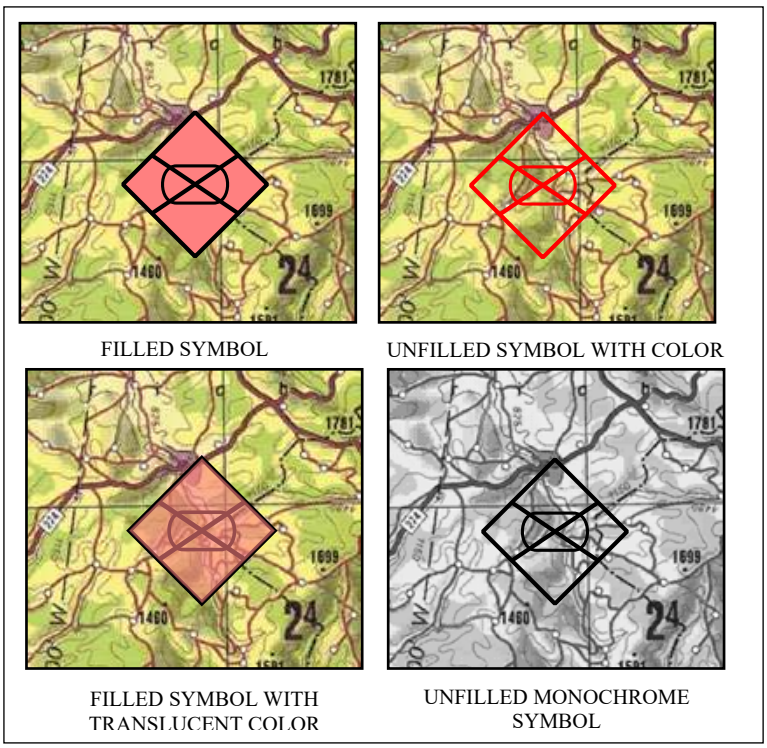






FIGURE 8. Examples of filled and unfilled symbols.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.


TABLE V. Civilian symbols with purple fill option.

STANDARD IDENTITY	AIR[1]	SEA SURFACE[2]	LAND[3]
FRIEND			
NEUTRAL			
UNKNOWN			
HOSTILE			

Notes: 1. Civilian fixed wing symbol shown.
2. Civilian merchant ship shown.
3. Civilian automobile shown.

5.3.4 Icons. The icon is the innermost part of a symbol which provides an abstract pictorial or alphanumeric representation of units, equipment, installations, activities, or operations. This standard distinguishes between icons that must be framed or unframed and icons where framing is optional. See table VI for examples of framed and unframed icons. Text icons shall be no more than four characters.

TABLE VI. Framed and unframed icons shown in present and planned status.

SYMBOL	FRAMED ICON (PRESENT)	UNFRAMED ICON (PRESENT)	FRAMED ICON (PLANNED)	UNFRAMED ICON (PLANNED)
FRIEND MORTAR				
HOSTILE TANK				

5.3.4.1 Main icons. Main icons are icons that are placed in the main sector of the bounding octagon and normally do not exceed the dimensions of the main sector (see figure 9). For better readability, main icons may be “enlarged” to extend into any unused modifier sector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

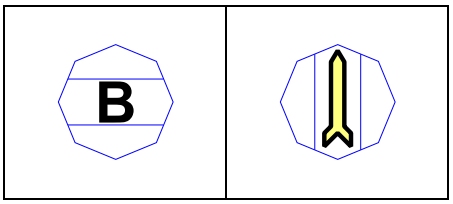


FIGURE 9. Examples of main icons.

5.3.4.2 Full octagon icons. Full octagon icons are icons that do not adhere to the sectors of the bounding octagon and do not exceed the dimensions of the bounding octagon (see figure 10).




FIGURE 10. Example of full octagon icon.

5.3.4.3 Full frame icons. Full frame icons are icons that exceed the dimensions of the bounding octagon and touch the interior border of the frame (see figure 11).

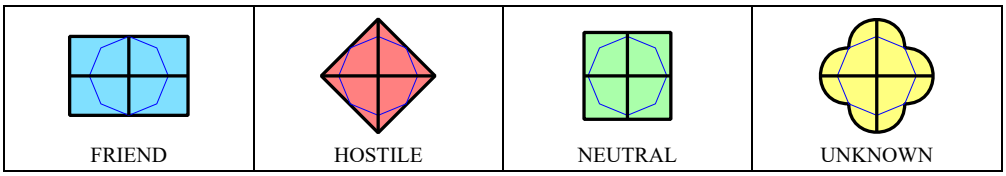


FIGURE 11. Examples of full frame icons (medical unit).

5.3.5 Invalid symbols. When migrating between standards, if a system's software encounters a SIDC and is unable to translate that into a 2525D symbol code because of a disconnect between the two codes, an inverted question mark within a yellow clover frame shape shall be used (see figure 12).




FIGURE 12. Example of invalid symbol.

5.3.6 Modifiers. A modifier provides an abstract pictorial or alphanumeric representation that is displayed in conjunction with an icon inside the symbol frame or frame area when the frame is not shown. The modifier provides additional information about the object, such as unit, equipment, installation, or activity being displayed. Text modifiers shall be no more

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

than four characters. A modifier may not be placed in any sector where the modifier overlaps the main icon.

5.3.7 Amplifiers. An amplifier provides additional information about the symbol and is displayed outside the frame (see table VII). Not all amplifiers are applicable to all symbols. The amplifier field descriptions vary by dimension and are detailed within the respective appendices. The default placement of amplifiers around symbols is shown in each of the dimensions. When an amplifier is displayed, it shall be defined in accordance with the appropriate standard identity or control measure symbol. For the purposes of de-cluttering the display, only essential amplifiers should be used. When multiple text amplifiers are displayed in a single field, only the most critical amplifier should be used. Amplifiers on the left shall be right aligned, amplifiers on the right shall be left aligned and top and bottom amplifiers shall be centered. All text shall be presented in upper case sans serif font. Font size and color should be tested to determine display legibility. Amplifier fields should be used, even if all amplifiers on a particular side of the symbol are not displayed; the order of the amplifier fields shall remain unchanged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VII. Amplifier field definitions and maximum display lengths.

FIELD	FIELD TITLE	DESCRIPTION	U[1]	E[1/2]	I[1]	SI[1]	A[1]	CM[1]	C[1]
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	G	G	G	G	G	-	G
B	Echelon	A graphic amplifier in a unit symbol that identifies command level (see 5.3.7.1 and table D-III).	G	-	-	-	G	G	G
C	Quantity	A text amplifier in an equipment symbol that identifies the number of items present.	-	9[3]	-	-	-	6	-
D	Task Force Indicator	A graphic amplifier that identifies a unit or activities symbol as a task force (see 5.3.7.2 and figure 13).	G	-	-	-	G	-	G
F	Reinforced or Reduced	A text amplifier in a unit symbol that displays (+) for reinforced, (-) for reduced, (±) reinforced and reduced.	3	-	-	-	3	-	3
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	20	20	20	20	20	-	20
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	20	20	20	20	20	20	20
J[4]	Evaluation Rating	A text amplifier for units, equipment and installations that consists of a one-letter reliability rating and a one-number credibility rating: **Reliability Ratings:** A-completely reliable B-usually reliable C-fairly reliable D-not usually reliable E-unreliable F-reliability cannot be judged **Credibility Ratings:** 1-confirmed by other sources 2-probably true 3-possibly true 4-doubtfully true 5-improbable 6-truth cannot be judged	2	2	2	2	2	-	-
K	Combat Effectiveness	A text amplifier for units and installations that indicates unit effectiveness or installation capability.	5	-	5	-	3	-	5
L	Signature Equipment	A text amplifier for hostile equipment; “!” indicates detectable electronic signatures.	-	1	-	1	-	-	1
M	Higher Formation	A text amplifier for units that indicates number or title of higher echelon command (corps are designated by Roman numerals).	21	-	-	21	-	-	21
N	Hostile (Enemy)	A text amplifier for equipment; letters "ENY" denote hostile symbols.	-	3	-	-	-	3	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VII. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	U[1]	E[1/2]	I[1]	SI[1]	A[1]	CM[1]	C[1]
P	IFF/SIF/AIS	A text amplifier displaying IFF/SIF/AIS Identification modes and codes.	15	15	15	-	15	-	-
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13).	G	G	-	-	G	G	-
R	Mobility Indicator	A graphic amplifier for equipment that depicts the mobility of an object (see 5.3.7.9, figure 13 and table VIII).	-	G	-	-	-	-	-
R2	SIGINT Mobility Indicator	M = Mobile, S = Static, or U = Uncertain.	-	-	-	1	-	-	-
S	Headquarters Staff Indicator	A graphic amplifier for units, installations and activities that identifies them as a headquarters (see figure 13 and figure D-3).	G	-	G	-	G	G	G
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	G	G	G	G	G	G	G
T	Unique Designation	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number. Identifies acquisitions number when used with SIGINT symbology.	30	30	30	30	30	30	30
V	Type	A text amplifier for equipment that indicates types of equipment.	-	24	-	24	-	20	20
W[5]	Date/Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or “O/O” for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds.	16	16	16	16	16	16	16
X	Altitude/Depth	A text amplifier for units, equipment and installations, that displays either altitude, flight level, depth for submerged objects; or height of equipment or structures on the ground. See 5.3.7.5 for content.	14	14	14	-	14	14	-
Y[6]	Location	A text amplifier for units, equipment and installations that displays a symbol’s location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	22	22	22	22	22	22	22
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.6).	8	8	-	-	-	-	-
AA	Special C[2] Headquarters	A text modifier for units; indicator is contained inside the frame; contains the name of the special C2 Headquarters.	9	-	-	-	9	-	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VII. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	U[1]	E[1/2]	I[1]	SI[1]	A[1]	CM[1]	C[1]
AD	Platform Type	Electronic intelligence notation (ELNOT) or communications intelligence notation (CENOT)	-	6	-	6	-	-	-
AE	Equipment Teardown Time	Equipment teardown time in minutes.	-	3	-	3	-	-	-
AF	Common Identifier	Example: “Hawk” for Hawk SAM system.	-	12	-	12	-	-	-
AG	Auxiliary Equipment Indicator	Towed sonar array indicator: A graphic modifier for equipment that indicates the presence of a towed sonar array (see 5.3.7.10, figure 13 and table IX).	-	G	-	-	-	-	-
AH	Area of Uncertainty	A graphic modifier for units, equipment and installations that indicates the area where an object is most likely to be, based on the object’s last report and the reporting accuracy of the sensor that detected the object (see 5.3.7.12.1 and table D-III).	G	G	G	-	G	-	-
AI	Dead Reckoning Trailer	A graphic amplifier for units and equipment that identifies where an object should be located at present, given its last reported course and speed (see 5.3.7.12.2).	G	G	G	-	G	-	-
AJ	Speed Leader	A graphic amplifier for units, equipment and installations that depicts the speed and direction of movement of an object (see 5.3.7.12.3 and figure 17).	G	G	G	-	G	-	-
AK	Pairing Line	A graphic amplifier for units, equipment and installations that connects two objects and is updated dynamically as the positions of the two objects change (see 5.3.7.12.4 and figure 17).	G	G	G	-	G	-	-
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	-	G	G	-	G	-	-
AM	Distance	A numeric amplifier that displays a minimum, maximum, or a specific distance (range, radius, width, length, etc.), in meters.	-	-	-	-	-	7	-
AN	Azimuth	A numeric amplifier that displays an angle measured from true north to any other line in degrees.	-	-	-	-	-	3	-
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	G/8	G/8	G/8	-	-	-	G/8
AP	Target Number	A six character text modifier used in Fire Support operations to uniquely designate targets in accordance with STANAG 2147, where characters 1 and 2 are alphabetic, and characters 3-6 are numeric: AANNNN.	-	-	-	-	-	6	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VII. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	U[1]	E[1/2]	I[1]	SI[1]	A[1]	CM[1]	C[1]
AP1	Target Number Extension	A 2-3 character text amplifier. A target number extension is a sequentially assigned number identifying the individual elements in a target (MIL-STD-6017), where character 1 is a dash (-) and characters 2-3 are number, from 1 through 15. It is applicable only to the "Point or Single Target" symbol, is conditional upon the presence of the Target Number amplifier, and is visually displayed appended to the Target Number amplifier.	-	-	-	-	-	3	-
AQ	Guarded Unit	During ballistic missile defense, some tracks are designated as guarded by a particular unit	-	2	-	-	-	-	-
AR	Special Designator	Special track designators such as Non-Real Time (NRT) and Tactically Significant (SIG) tracks are denoted here.	-	3	-	-	-	-	
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC). In stability activities, this field can be used for factions or groups.	3	-	-	-	3	3	3

Notes: 1. Column headings: U = units, E = equipment, I= installations, SI = signals intelligence (SIGINT) and A = activities, CM = control measures, C=Cyberspace.
2. Equipment includes air, space, sea surface, sea subsurface and SOF, as well as land-based equipment as shown in table I.
3. Numeric entry indicates text modifier. "G" indicates graphic modifier. A dash (-) inside boxes indicates non-applicable.
4. Field J: See ATP 2-33.4.
5. Field W: D = day, H = hour, M = minute, S = second, Z = Greenwich or local time, MON= month and Y = year.
6. To support homeland security and homeland defense, the Federal Geographic Data Committee (FGDC) US National Grid (USNG) standard when referenced to North American Datum 1983 (NAD83) is operationally equivalent to and is an accepted substitute for MGRS coordinates referenced to WGS 84. Note that at mapping scales of 1:5000 and smaller, NAD83 and WGS 84 are considered equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.1 Echelon indicator. The echelon indicator provides a graphic representation of command level and is used to show the element echelon on installations, boundary lines, lines and areas. Echelon indicator codes are listed in table D-III of the land appendix. The indicator is represented in field B as defined in table VII.

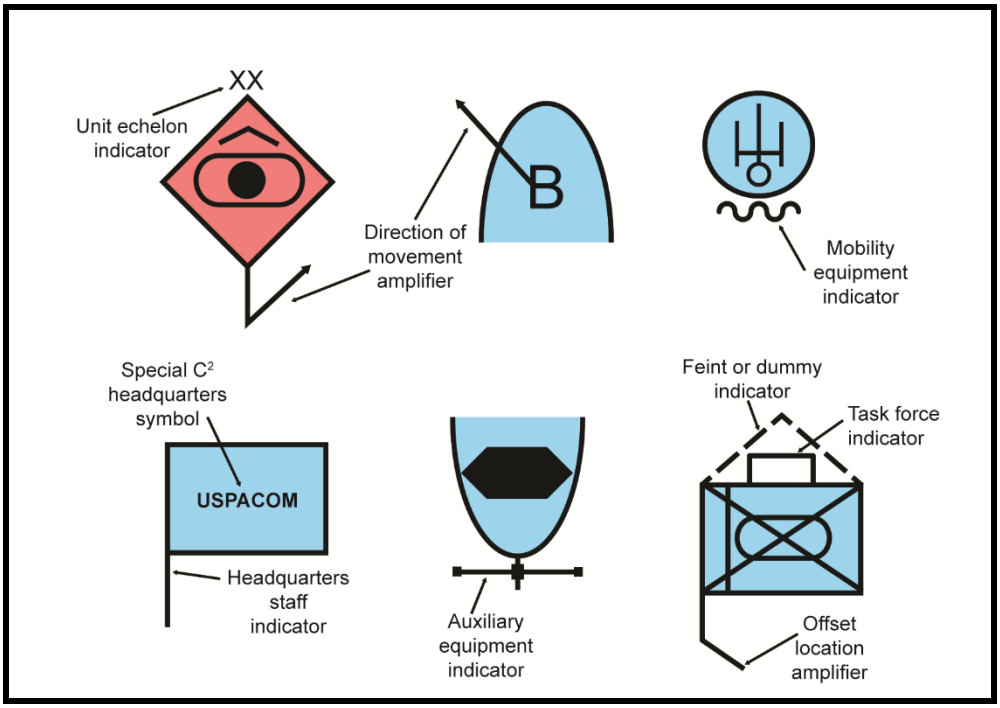


FIGURE 13. Static graphic modifiers for tactical symbols.

5.3.7.2 Task force indicator. The task force indicator is a bracket that identifies a unit or activities symbol as a task force. The indicator is represented in field D as defined in table VII and is positioned as shown in figure 13.

5.3.7.3 Feint/decoy/dummy indicator. The feint, decoy or dummy indicator is a dashed inverted “V” that identifies offensive or defensive units, equipment and installations, signal intelligence, activities and control measures. It is intended to draw the enemy's attention away from the area of the main attack, and/or an imitation of a person, object or phenomenon, which is intended to deceive hostile surveillance or detection systems or mislead the adversary. The indicator is represented in SIDC set A, position 8 "HQ / Task Force / Dummy when populated with “1” to specify the symbols is a “Feint/Decoy/Dummy”. This can apply to the SIDC for any symbol in MIL-STD-2525D as shown in figure 13, and is constructed and positioned as follows.

5.3.7.3.1 Construction of the feint, decoy, or dummy indicator. The feint, decoy, or dummy indicator shall be rendered as an isosceles triangle (two equal length sides and two equal angles), where angles “A” and “C” (the two base angles) = 45°, angle “B” (the top angle) = 90°, and the length of line AB is equal to the length of line BC (see figure 14). Line AC (gray) in figure 14 shall not be rendered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

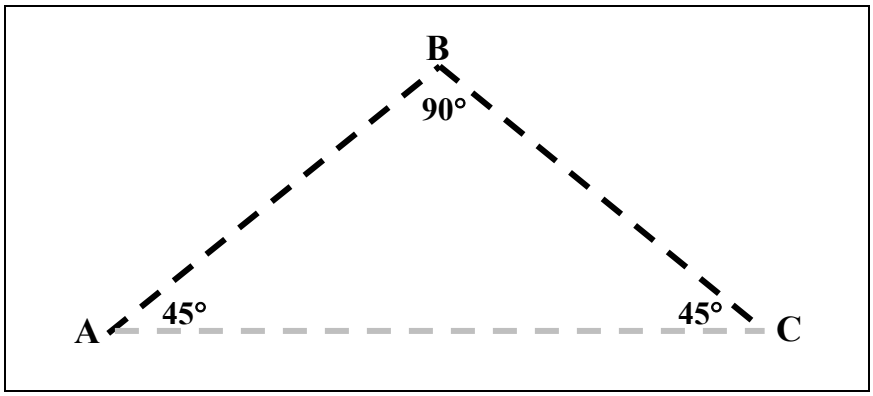


FIGURE 14. Feint, decoy, or dummy indicator Construction

5.3.7.3.2 Position of the feint, decoy, or dummy indicator. On a geographically referenced system display, the feint, decoy, or dummy indicator shall always be rendered on top of the symbol when the display is oriented north up. If the system display has the capability to rotate (i.e., a moving map display inside a vehicle in motion), the feint, decoy, or dummy indicator shall rotate with the base symbol.

5.3.7.3.3 Feint, decoy, or dummy indicator line style. The line style of the feint, decoy, or dummy indicator when used with control measure symbols shall always be rendered as dashed lines, even when the status of the symbols is present and the symbol line style is solid.

5.3.7.3.4 Position of the feint, decoy, or dummy indicator for icon-based symbols. See 5.3.2 that describes which types of icon-based symbols can be rendered unframed.

5.3.7.3.4.1 Position of the feint, decoy, or dummy indicator for unframed icon-based symbols. The feint, decoy, or dummy indicator when used with unframed icon-based symbols shall be positioned as shown below. Point “A” shall be rendered 0.4L above the top edge of the bounding octagon, and aligned with the left edge of the bounding octagon. Point “C” shall be rendered 0.4L above the top edge of the bounding octagon and aligned with the right edge of the bounding octagon. The spacing above the top of the bounding octagon will support any authorized amplifier(s) to be applied to the unframed icon-based symbol without overlapping the indicator. The location of point “B” shall be calculated per the information and illustrations in 5.3.7.3. Line “AC” shall not be rendered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

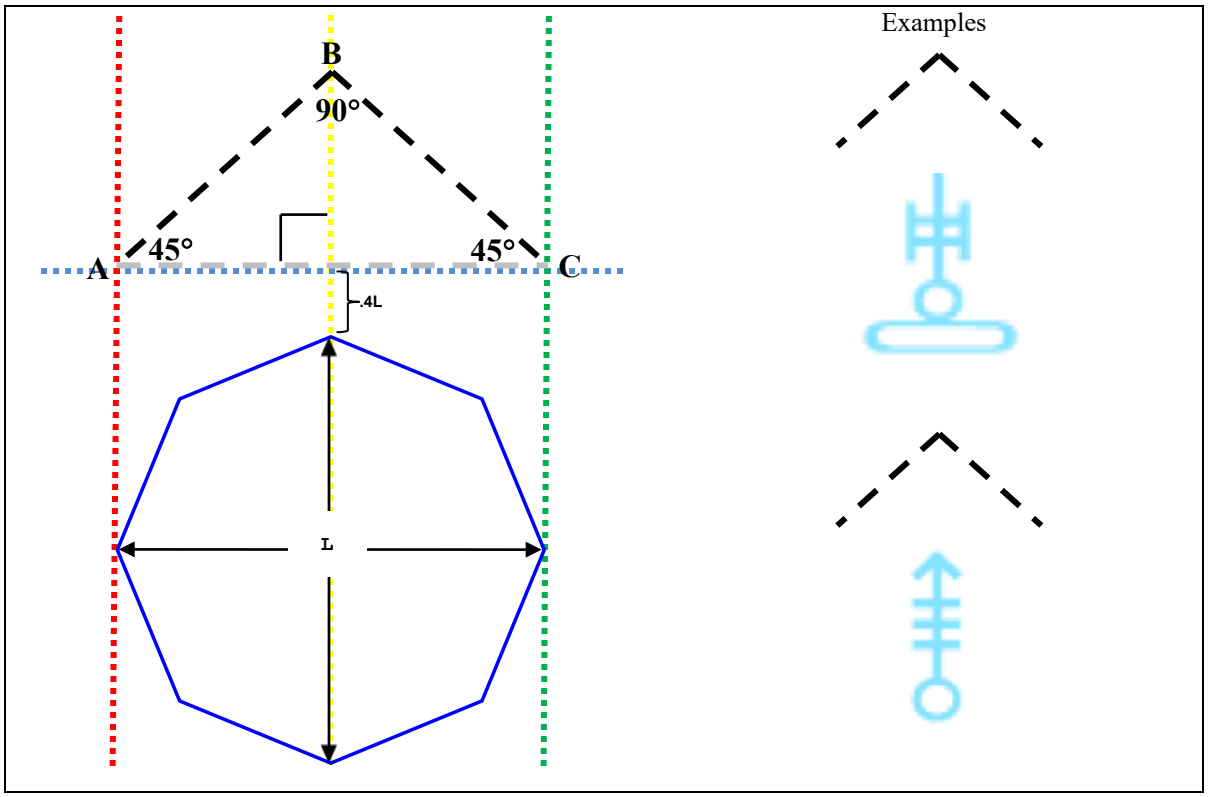


FIGURE 15. Position of the feint, decoy, or dummy indicator for unframed icon-based symbols.

5.3.7.3.4.2 Position of the feint, decoy, or dummy indicator for framed icon-based symbols. The feint, decoy, or dummy indicator when used with framed icon-based symbols shall be positioned as shown below. Point “A” shall be rendered 0.4L above the top edge of the frame and aligned with the left edge of the frame. Point “C” shall be rendered 0.4L above the top edge of the frame and aligned with the right edge of the frame. The spacing above the top of the frame will support any authorized amplifier(s) to be applied to the framed icon-based symbol without overlapping the indicator. The location of point “B” shall be calculated per the information and illustrations in 5.3.7.3. Line “AC” shall not be rendered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

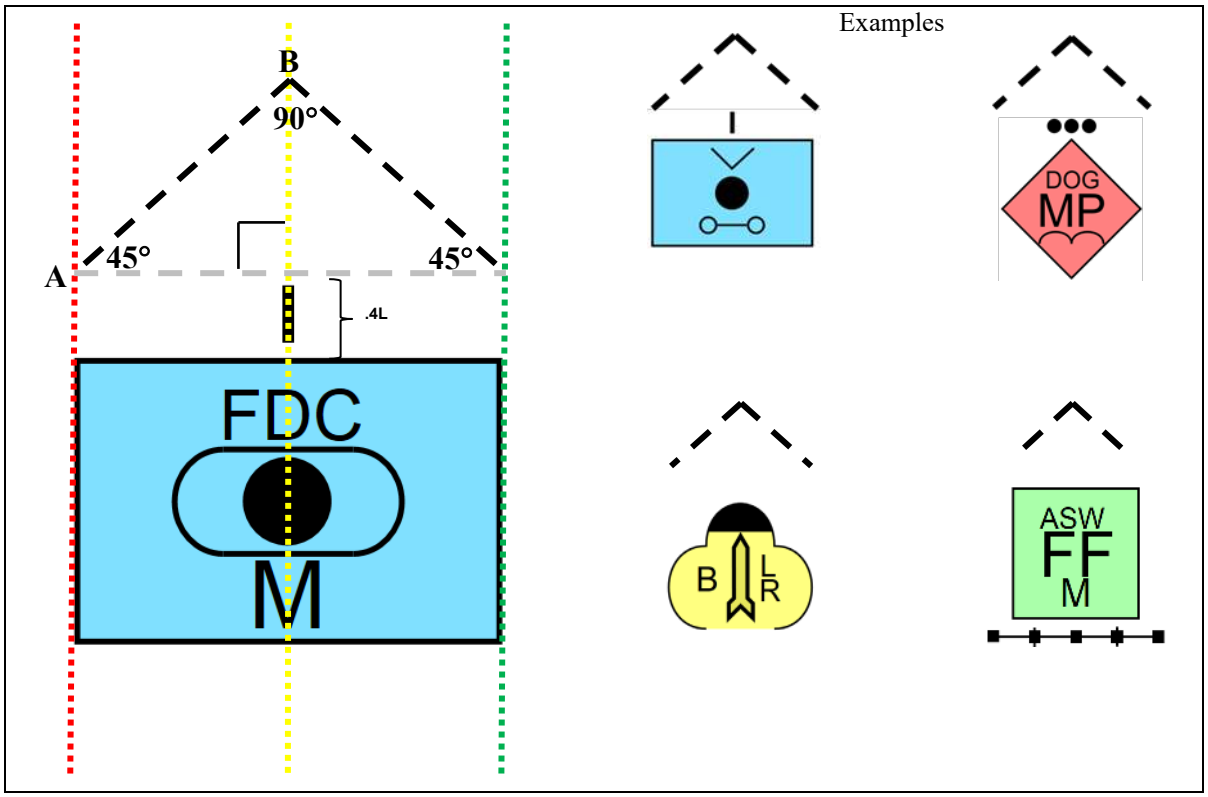


FIGURE 16. Position of the feint, decoy, or dummy indicator for framed icon-based symbols.

5.3.7.4 Offset/precise location amplifier. The offset/precise location indicator is used when placing an object away from its actual location. The offset/precise location indicator is a system display de-cluttering technique (see 5.3.12); it is not exchanged between or shared among systems. The offset/precise location indicator is a three point line extending from the anchor point of the symbol. Point 1 is the anchor point of the offset symbol. Point 3 is the actual geographic location. Point 2 is an elbow between the symbol anchor point and the actual geographic location. See figure 13.

5.3.7.5 Altitude/depth modifier. This field may contain alternate value formats. Enter a description of the altitude/depth (X) using one of the following.

5.3.7.5.1 Altitude base reference point. Legal values are “GL” ground level and “MSL” mean sea level.

5.3.7.5.2 Relative altitude. The relative altitude is a composite field consisting of multiple parts: the numeric altitude, the altitude unit of measurement and the altitude vertical dimension. Legal values for the numeric altitude are (minus) -99999 through 99999 in increments of 1. Legal values for altitude units of measure is feet “FT,” meters “M,” kilometers “KM,” and statute miles “SM.” The legal value for the depth unit of measure is feet “FT and meters “M.” Legal values for the vertical dimension are “AGL” above ground level, “AMSL” above mean sea level, “HAE” height above ellipsoid and “BMSL” below mean sea level. BMSL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

is used only for depth of submerged objects, reported in feet. A space may be added between the values in the field to make it easier to read.

Examples: 1250 FT AGL, 1000 FT AMSL, 1524 M HAE, 35760 FT BMSL.

5.3.7.5.3 Flight level. By definition, flight level (FL) is, “Surfaces of constant atmospheric pressure which are related to a specific pressure datum, 1013.2 mb (29.92 in) and are separated by specific pressure intervals. (Flight levels are expressed in three digits that represent hundreds of feet; e.g., flight level 250 represents a barometric altimeter indication of 25,000 feet and flight level 255 is an indication of 25,500 feet.)” The legal value for flight level indicator is “FL.” A space may be added between the values in the field to make it easier to read. The legal value for context quantity is 000-999, in increments of one.

Example: FL 290.

5.3.7.5.4 Multiple instances of altitude/depth modifiers. When multiple instances of the “X” modifier are present in a single instance of a symbol or graphic (ex., Minimum Altitude “X,” Maximum Altitude “X1”), for display purposes, the fields may be separated by a hyphen “-,” or a space, hyphen and space “ - .”

Examples:
500 FT AGL – 1250 FT AGL

25 FT AMSL –
150 FT AMSL

FL 250 – FL 290

MSL –
35760 FT BMSL

5.3.7.6 Speed amplifier. The speed amplifier is used to display a unit or equipment velocity. The amplifier has a specific format as follows.

The first part of this eight character (maximum length) amplifier shall be a numeric value (quantity) in the range 0 through 99999 or any combination of four or fewer digits and a significant decimal point. There is a 5-character maximum for the numeric portion of this amplifier. The allowable entries for the numeric portion of this amplifier are as follows. The legal entries are a decimal point and numbers. The legal range of values for the numeric portion is zero (0) through 99999. The minimum length of this portion of the amplifier is 1; the maximum is 5. The minimum decimal place is zero (0); the maximum decimal place is four (4).

The second part of this eight character (maximum length) amplifier shall be the speed/velocity unit of measure. Legal entries for this portion of the amplifier shall be “KPH” (kilometers per hour), “MPS” (meters per second), “KTS” (knots per hour), or “MPH” (miles per hour).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.







Examples: 220KPH = 220 kilometers per hour
974.5MPS = 974.5 meters per second
18.75KTS = 18.75 knots per hour
5MPH = 5 miles per hour

5.3.7.7 Date-time group. Date-time group (DTG) is defined as the date and time expressed in an alphanumeric combination. The alphanumeric combination used is day-time-time zone-month-year. The alphanumeric combination can be displayed in a number of ways. In its longest form, sixteen characters, it is composed of eight digits (first pair of digits denotes the date, second pair denotes the hours, third pair denotes the minutes and fourth pair denotes the seconds) followed by the time zone suffix, followed by a three-letter month abbreviation and four digits for the year: DDHHMMSSZMONYYYY. It can also be expressed in shorter forms by removing characters, such as DDHHMMZMONYY. On order (O/O) is a valid substitute for DTG.

5.3.7.8 Direction of movement amplifier. The direction of movement amplifier is an arrow or staff identifying the direction of movement or intended movement of an object. For land symbols, the amplifier is an angled arrow extending downward from the bottom center of the frame or icon and pointing in the direction of movement. For all other symbols, the amplifier is an arrow extending from the center of the frame or icon and pointing in the direction of movement (see figure 13).







5.3.7.9 Mobility indicator. The mobility indicator, which is only used for equipment, depicts the mobility feature of an object, as shown in table VIII. This indicator identifies mobility other than that intrinsic to the equipment itself. For example, the symbol for a self-propelled howitzer moving by train would include a railway mobility indicator, while the symbol for a self-propelled howitzer, a tank or other tracked vehicle would not have a mobility indicator. The indicator is represented in field R as defined in table VII and is positioned as shown in figure 13.

TABLE VIII. Equipment mobility indicators.

DESCRIPTION	MOBILITY SYMBOL	UNFRAMED	UNKNOWN	FRIEND	NEUTRAL	HOSTILE
WHEELED (LIMITED CROSS-COUNTRY)						
WHEELED (CROSS-COUNTRY)						
TRACKED						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VIII. Equipment mobility indicators - Continued.

DESCRIPTION	MOBILITY SYMBOL	UNFRAMED	UNKNOWN	FRIEND	NEUTRAL	HOSTILE
WHEELED AND TRACKED COMBINATION						
TOWED						
RAILWAY						
OVER-SNOW (PRIME MOVER)						
SLED						
PACK ANIMALS						
BARGE						
AMPHIBIOUS						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.10 Auxiliary equipment indicator. The auxiliary equipment indicator, which is only used for towed equipment, depicts the mobility feature of an array, as shown in table IX. The indicator is represented in field AG as defined in table VII and is positioned as shown in figure 13.

TABLE IX. Auxiliary equipment indicators.

DESCRIPTION	MOBILITY SYMBOL	UNFRAMED	UNKNOWN	FRIEND	NEUTRAL	HOSTILE
TOWED SONAR ARRAY (SHORT)						
TOWED SONAR ARRAY (LONG))						

5.3.7.11 Text modifiers. Table VII defines the specific content, length and type of each text modifier. Not all text modifiers are applicable to all symbols. However, when any such modifier is displayed, it shall be defined in accordance with the contents of table VII and positioned in accordance with individual appendices. Air/space and sea track numbers are included in field T. Staff comments and additional information are contained in fields G and H, with the content of these fields being implementation specific so long as the maximum number of characters in each field is not exceeded. Although text modifiers are normally displayed around the symbol, the special C2 headquarters indicator (field AA as defined in table VII) is contained inside the frame, as seen in figure D-3.

5.3.7.12 Dynamic graphic amplifiers. A dynamic amplifier is a line or area graphic whose size and placement are based on the attributes of the object represented by the symbol and can change as these attributes and the scale of the background change. An example of each dynamic graphic amplifier is shown in figure 17. These examples are notional; the size and placement of each amplifier will vary based on the attributes of the object.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

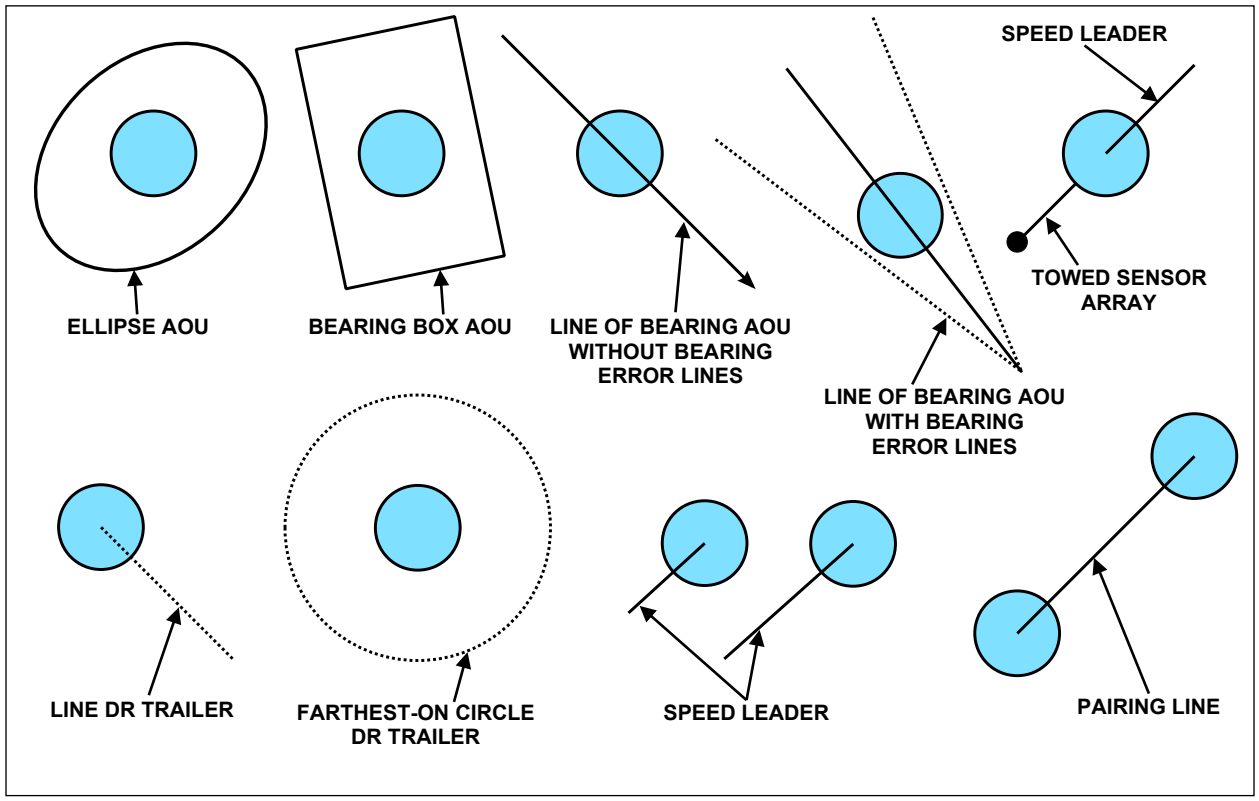


FIGURE 17. Dynamic graphic amplifiers for icon-based symbols.

Dynamic graphic amplifiers may be color-coded based on the attributes of the symbol. In cases such as ballistic missile target status as indicated in the Engagement/Target Bar (field AO), the symbol's track history, projected trajectory (similar to dead reckoning), threat fan and its projected impact ellipse should reflect target status of the ballistic missile. Likewise, if threat is denoted by color via the operational condition/status bar (field AL), associated symbols amplifier graphics should reflect the color status indicated in the operational condition/status field. Figure 18 illustrates an example of dynamic amplifiers being color coded.

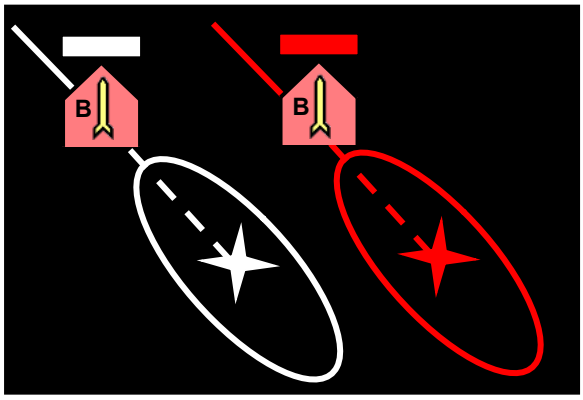


FIGURE 18. Color coded dynamic amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.12.1 Area of uncertainty amplifier. The area of uncertainty (AOU) amplifier displays the area where an object is most likely to be located, based on the object's last report and the reporting accuracy of the sensor that detected the object. The AOU amplifier can be displayed as an ellipse, a bearing box, or a line of bearing, depending on the report received for the object.

5.3.7.12.1.1 Ellipse AOU amplifier. The ellipse AOU amplifier is a rotated ellipse whose center is the last reported position for the object. The ellipse is shown as a solid line whose draw parameters are based on the attributes of the sensor that detected the object. The symbol for the object is displayed at the center of the ellipse.

5.3.7.12.1.2 Bearing box AOU amplifier. The bearing box AOU amplifier is a rotated rectangle whose center is the last reported position for the object. The rectangle is shown as a solid line whose draw parameters are based on the attributes of the sensor that detected the object. The symbol for the object is displayed at the center of the box.

5.3.7.12.1.3 Line of bearing AOU amplifier. The line of bearing AOU amplifier is a solid line whose rotation represents the bearing of the object and whose length is determined by its range estimate. The amplifier has a single bearing "center" line and may include bearing error "V" lines. The bearing error determines the placement of the "V" lines and is the angle from the bearing line to one of the bearing error lines. The bearing error lines are dotted and symmetric on either side of the bearing line. The length of the bearing error lines is equal to the bearing length.

5.3.7.12.2 Dead reckoning trailer amplifier. An object can be displayed at its last reported position, or it can be displayed at its dead reckoned position. Dead reckoning (DR) uses the course and speed of an object from the last report and calculates where the object should be at present. The object is then plotted where it should be at the present time, assuming the course and speed are unchanged. The DR trailer amplifier can be displayed as a line or circle, depending on the report received for the object. Because DR calculates where the object should be at present, the status of the symbol for the object is shown as "present," rather than "planned."

5.3.7.12.2.1 Line DR trailer amplifier. The line DR trailer amplifier is a dotted line that extends from the last reported position for the object to its dead reckoned position. The dotted line is a series of uniformly sized and shaped dots, with the symbol for the object displayed at its dead reckoned position.

5.3.7.12.2.2 Farthest-on circle DR trailer amplifier. The farthest-on circle DR trailer amplifier is a dotted circle indicating the furthest an object could be after a given time traveling at its top speed in any direction. The center of the circle is the last reported position for the object, and the radius is the maximum distance the object could travel based on its last reported position and speed; the symbol for the object is displayed at the center of the circle.

5.3.7.12.3 Speed leader amplifier. The speed leader amplifier is a line extending from the center of the frame or icon and pointing in the direction of movement; the length of the line is based on a combination of actual speed and object type. For example, the length of the speed leader for a submarine might be 1/4 inch if its speed is less than 15 knots, 1/2 inch if its speed is between 15 and 30 knots and 3/4 inch if its speed is more than 30 knots, while the length of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.




speed leader for an aircraft might be 1/4 inch if its speed is less than 300 knots, 1/2 inch if its speed is between 300 and 600 knots and 3/4 inch if its speed is more than 600 knots. The speed leader represents both speed and direction of movement information in a single amplifier; by contrast, the static direction of movement amplifier is a fixed length and identifies only the direction of movement of the object.

5.3.7.12.4 Pairing line amplifier. The pairing line amplifier is a line that connects two objects and is updated dynamically as the positions of the two objects change. For example, a pairing line might connect an active missile to the associated hostile aircraft. A pairing line is drawn from the center of the frame or icon for the first object to the center of the frame or icon for the second object. The color and style (e.g., solid, dotted) of the line can vary based on the specific context in which the amplifier is used.

5.3.7.12.5 Dynamic towed sensor array amplifier. The dynamic towed sensor array amplifier is a line extending from the center of a symbol to the center of towed acoustic array. The length of the line is based upon the distance between the stern of the towing ship and the center of the towed acoustic array. The orientation of the towed sensor array amplifier shall be 180 degrees from the speed leader of the object. A solid circle, representing the center of the acoustic array, shall be at the terminus of the towed sensor array amplifier.

5.3.7.13 Operational condition amplifier. The operational condition amplifier provides a graphic representation of an entity's (equipment or installation) operational condition. Operational condition amplifiers are shown in table X and defined in the appendix for each symbology set. An alternative color representation is shown in table XI.
















TABLE X. Operational condition amplifiers for icon-based symbols.

DIMENSION / OPER. CONDITION	AIR/SPACE	SURFACE				
		LAND			SEA SURFACE	SEA SUBSURFACE
		UNITS	EQUIPMENT	INSTALLATIONS		
FULLY CAPABLE		N/A				
DAMAGED/RENDERED INEFFECTIVE[1]		N/A				
DESTROYED		N/A				

Notes: 1. The "Rendered Ineffective" operational condition amplifier shall be used when equipment capable of inflicting injury and/or death (IEDs or mines) is known to have been defused or rendered inoperable while under the control of friendly forces. The "Damaged" operational condition amplifier shall be used where "Rendered Ineffective" does not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XI. Alternate operational condition amplifiers for icon-based symbols.

DIMENSION / OPER. CONDITION	AIR/SPACE	SURFACE				
		LAND			SEA SURFACE	SEA SUBSURFACE
		UNITS	EQUIPMENT	INSTALLATIONS		
FULLY CAPABLE		N/A				
DAMAGED/RENDERED INEFFECTIVE[1]		N/A				
DESTROYED		N/A				
FULL TO CAPACITY[2]		N/A				

Notes: 1. The "Rendered Ineffective" operational condition amplifier shall be used when equipment capable of inflicting injury and/or death (IEDs or mines) is known to have been defused or rendered inoperable while under the control of friendly forces. The "Damaged" operational condition amplifier shall be used where "Rendered Ineffective" does not apply.

2. Associated with a symbolized object where its capacity can be measured and the status of that capacity is relevant.

5.3.7.14 Engagement amplifier bar. The engagement amplifier bar may be used to designate engagements and/or to indicate targets. Both may be done in conjunction where depicted targets contain engagement information.

5.3.7.14.1 Engagement designation using the engagement amplifier bar. Engagement bars are positioned immediately atop the hostile target and its assigned friendly track. Example depictions of engagement bars are illustrated in figure 19 and figure 20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

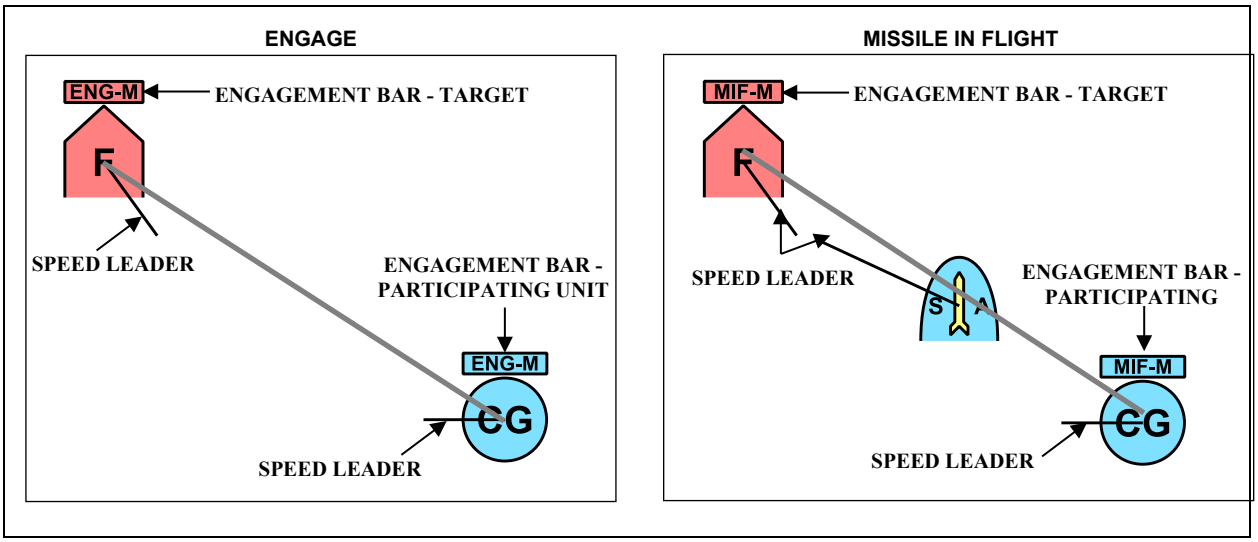


FIGURE 19. Example local engagement scenarios: engage (left), missile in flight (right).

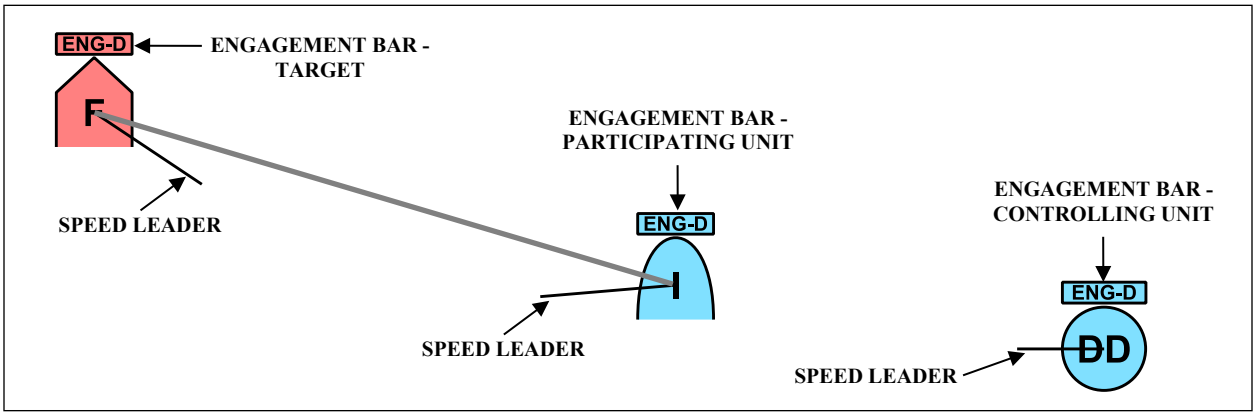


FIGURE 20. Example engagement scenario: participating units.

The engagement bar may contain information on 1) remote/local engagement; 2) stage of the engagement (i.e., assign/cover, engage, hold fire, cease fire, cease engage, break engagement, missile in flight); and 3) type of weapon assignment (i.e., missile, gun, torpedo). The color of the engagement bar should be identical to its symbol's standard identity. Therefore, engagement bars for a hostile target and a friendly participating unit would have red and blue engagement bars, respectively (see figure 21 and figure 22). The colors of the engagement bars should have the same RGB value as its respective symbol. All engagement bars should have a black or white frame based on providing optimal contrast between the colored amplifier bar and the map background.

5.3.7.14.2 Target designation using the engagement amplifier bar. If the engagement amplifier bar is used to designate targets, non-targets or expired targets, a different coloring schema shall be used. Hostile tracks which are deemed targets shall have a red bar (RGB: 255, 0, 0) to indicate target. For hostile tracks deemed to be non-targets, white (RGB: 255, 255, 255) should be used to indicate non-target. Finally hostile tracks which have

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

expired shall be colored orange (RGB: 255, 120, 0). Figure 21 depicts the three target denotations.

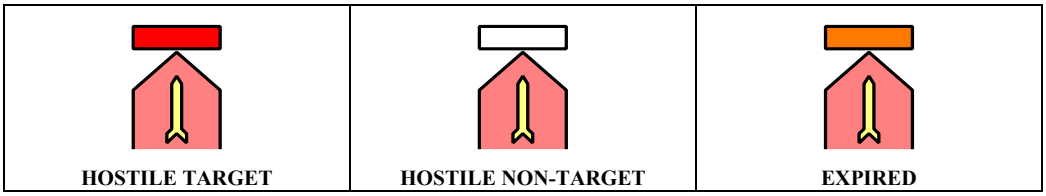


FIGURE 21. Engagement amplifier bar colors for target designation.

5.3.7.14.2.1 For hostile targets. If engagement text is incorporated, either white (RGB: 255, 255, 255) or black (RGB: 0, 0, 0) may be used to denote engagement status. Otherwise, for non-targets and expired tracks, engagement status within the engagement amplifier bars shall remain black (see figure 22).

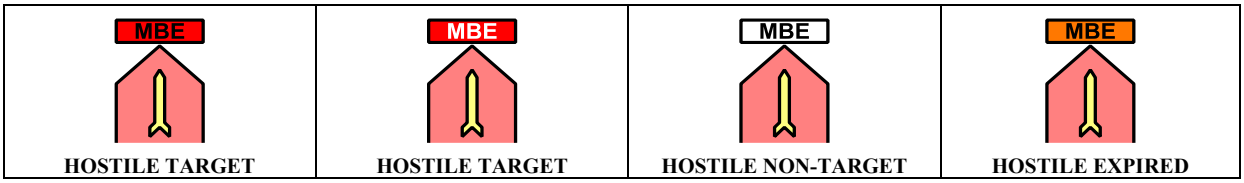


FIGURE 22. Engagement amplifier bar text colors for target designation.

5.3.7.14.3 Engagement amplifier bar structure. The engagement amplifier shall be arranged as follows: A:BBB-CC, where A (1 character) denotes a local versus remote engagement, BBB (up to 3 characters) denotes engagement state and CC (up to 2 characters) denotes weapon deployment/asset control.

5.3.7.14.3.1 Remote and local engagements. Remote and local engagements may be identified in the engagement amplifier (part A of A:BBB-CC). A remote engagement is defined as an engagement assigned outside of ownship control. A local engagement is defined as an engagement assigned to ownship. Local engagements shall have no letter assignment in the A:BBB-CC engagement bar; whereas, remote engagements shall be denoted as “R” in the engagement bar. In the case of multiple engagements, there may be a mixture of both local and remote engagements. In such cases, “B” shall be denoted to indicate both local and remote engagements and shall be used in conjunction with the multiple engagements amplifier (MLT).

5.3.7.14.3.2 Engagement stage. Engagement stage may be identified by up to a three-character code (part BBB of A:BBB-CC). Typical engagement stages to depict include assign/cover, engage and missile(s) in flight. Other engagement events such as hold fire, cease fire, cease engage, break engagement, terminate engagement, management by exception, management by exception less than threshold and others may be depicted in the engagement amplifier. In the case of multiple engagements where no one specific engagement is highlighted, “MLT” may be used to indicate multiple engagements. In conjunction with the MLT designation, the number of engagements shall be listed in the subsequent CC field (see 5.3.7.14.3.3). Table XII depicts engagement stage codes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XII. Engagement[1] stage codes.

ENGAGEMENT STAGE	CODE
ASSIGN/COVER	ASN
ENGAGE	ENG
MISSILE IN FLIGHT	MIF
CEASE FIRE	CF
CEASE ENGAGE	CE
HOLD FIRE	HF
TERMINATE ENGAGEMENT	TE
BREAK ENGAGEMENT	BE
MANAGEMENT BY EXCEPTION (MBE)	MBE
MBE LESS THAN THRESHOLD	M<T
MULTIPLE ENGAGEMENTS[2]	MLT

Notes: 1. The term "Engagement" as used in 5.3.7.14.3.2 denotes both air-to-air and air-to-ground/air-to-surface activities.
2. Number of engagements shall be represented in CC field (see 5.3.7.14.3.3).

5.3.7.14.3.3 Weapons assignment or deployment. Weapons assignment or deployment may also be presented in the engagement amplifier (part CC of A:BBB-CC). Either deployed weapons such as missiles, guns and torpedoes or controlled assets such as unmanned systems, interceptor aircraft and attack aircraft may have representation in the engagement bar. In the case where multiple engagements are represented within a single engagement amplifier bar, the number of engagements starting from "02" shall be used in the CC field. Table XIII depicts weapon and asset codes.

TABLE XIII. Weapon and asset code.

WEAPON/ASSET	CODE
MISSILE	M
BALLISTIC MISSILE	BM
CRUISE MISSILE	CM
GUN	GN
TORPEDO	T
ATTACK AIRCRAFT	A
COMBAT AIR PATROL (DEFENSIVE COUNTER AIR)	C
DEFENSIVE COUNTER AIR (COMBAT AIR PATROL)	D
UNDERSEA WARFARE (USW)/ANTISUBMARINE WARFARE (ASW) ENGAGEMENT	UW
MINE WARFARE (MIW) ENGAGEMENT	MW
SURFACE WARFARE (SUW) ENGAGEMENT	SW
ELECTRONIC ATTACK	EA
ELECTRONIC DEFENSE	ED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XIII. Weapon and asset codes - Continued.

WEAPON/ASSET	CODE
UNMANNED VEHICLE	UV
CLOSE-IN WEAPON SYSTEM	CW
LAMPS	L3
VERTICAL LAUNCH ASROC[1]	VA
NUMBER OF ENGAGEMENTS[2]	## (02-99)

Notes: 1. Some non-US ships still use non-vertical launch ASROC
2. Shall only be used in conjunction with multiple engagements. Valid numbers are 02-99.

5.3.8 Manually-generated tracks. Manually-generated tracks are those symbols which have not been received through messaging systems, such as Link 16, but rather have been created locally for display. Manually-generated (or manual) tracks are denoted by the "MAN" icon placed within the symbol. Manual tracks can be created across all standard identities and dimensions by adding the "MAN" icon to the center of the frame. In addition, manual tracks can be created for tracks with a known standard identity but unknown dimension by adding the "MAN" icon under the "?" icon. See figure 23 for examples of manual tracks. Manual tracks are only local symbols and not transmitted.

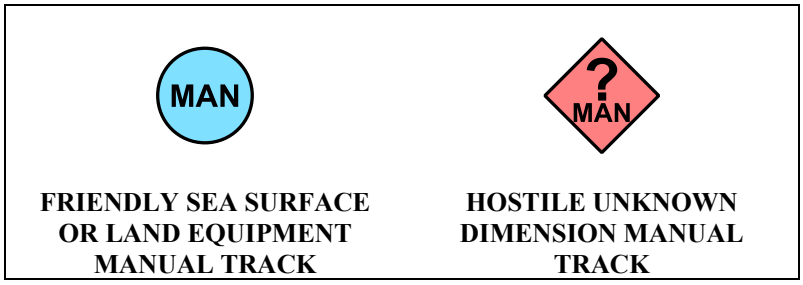


FIGURE 23. Manually-generated tracks.

5.3.9 Composition of icon-based symbols. The purpose of icon, modifier and amplifier placement is to standardize the location of information that graphically describes a unit, equipment, or installation and provides additional information on capability, status and location. Figure 24 shows the composition and placement of a frame, fill, icon, modifiers and amplifiers to form a hostile land unit symbol. The placement of icons, modifiers and amplifiers is the same regardless of frame shape or standard identity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

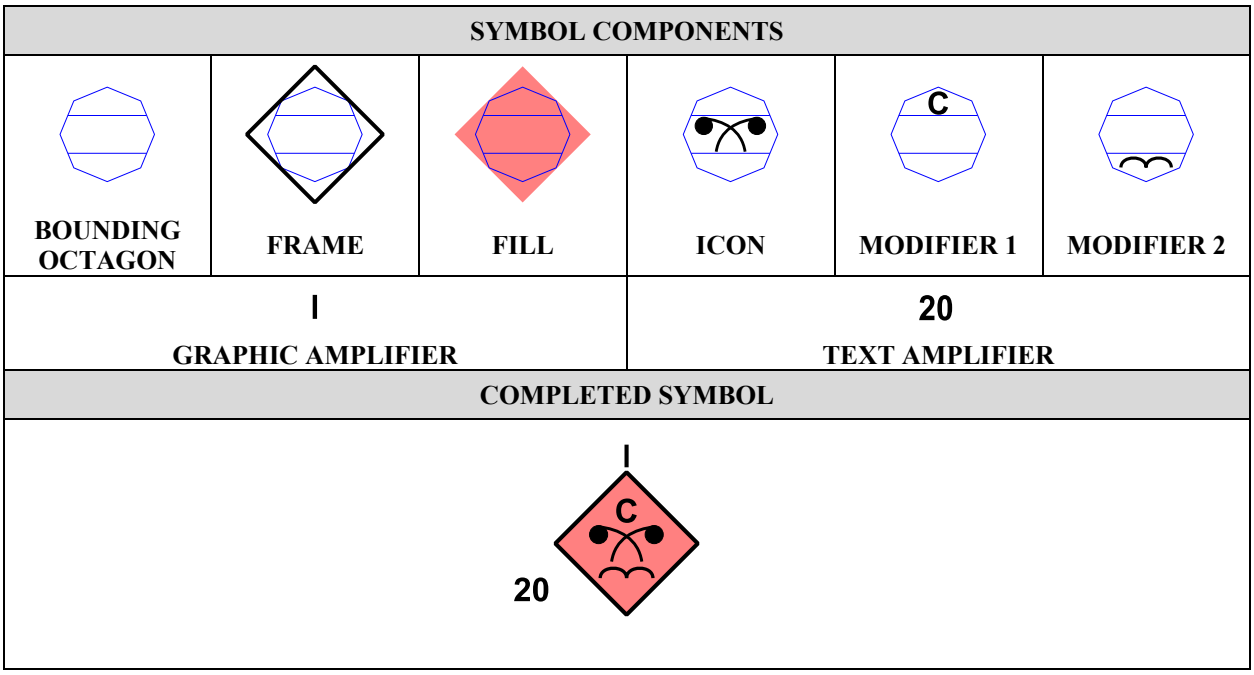



FIGURE 24. Composition of an icon-based symbol.

5.3.9.1 Symbol display hierarchy. C2 systems differ in their operational requirements concerning the amount of information about an object to be displayed. As a result, this document standardizes those symbology elements required to achieve interoperability in information presentation and allows flexibility in the symbol components that are displayed to the warfighter. Display options range from complex, such as a symbol displaying a frame, fill, icon and modifiers, to primitive, such as a symbol rendered as a dot that denotes the presence of an object at a specific location. Table XIV provides examples of display options that can be used in color and monochrome displays and can be either hand-drawn or computer generated. The examples in the table depict some of the display options for the two symbols. Based on operational requirements, systems may be implemented with a fixed set of display options or with the ability to allow warfighters to select one or more display options. If the amplifying information provided by internal icons and modifiers is not required by the warfighter, the symbols may be displayed with frame or frame and fill only, omitting the icons and modifiers. Any display options in table XIV are compliant with this standard. If a system is implemented with multiple display options, the warfighter may be allowed to select a single option for rendering all symbols or to select different options based on the standard identity or battle dimension of the object and the amount of information required. For example, the warfighter may choose to display minimal information about friendly objects (displaying these symbols as dots) and maximal information about potential threats (displaying these symbols with frame, fill, icon and modifiers).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XIV. Symbol display options.

EXAMPLES		DISPLAY OPTION DESCRIPTIONS
CARRIER	FERRY	
		Frame: ON (black or white depending on background) Fill: ON (use default color indicating standard identity) Icon: ON (black or white) Modifiers: ON (civilian sea surface symbols do not permit modifiers) Note: The first column example is a MILITARY COMBATANT, CARRIER with modifiers for HELICOPTER EQUIPPED and NUCLEAR POWERED. The second column example is a CIVILIAN, MERCHANT SHIP and FERRY.
		Frame: ON (black or white depending on background) Fill: OFF Icon: ON (black or white) Modifiers: ON
		Frame: ON (use default color indicating standard identity) Fill: OFF Icon: ON (use default color indicating standard identity) Modifiers: ON
N/A		Frame: OFF Fill: ON Icon: ON (use default color indicating standard identity) Modifiers: N/A (civilian sea surface symbols do not permit modifiers) Note: Normally only land equipment and civilian sea surface symbols can be displayed without a frame. For civilian white-filled icons, the white-fill should be changed to the color indicating its standard identity.
		Frame: ON (black or white depending on background) Fill: ON (use default color indicating standard identity) Icon: OFF Modifiers: OFF Note: The examples show the dimension level display of CARRIER and FERRY. The CARRIER and FERRY icons, including their parent icons, are not displayed.
		Frame: ON Fill: ON Icon: ON Modifiers: OFF Note: The examples show the entity level display of CARRIER (MILITARY COMBATANT) and FERRY (CIVILIAN).
		Frame: ON Fill: ON Icon: ON Modifiers: OFF Note: The examples show the entity type level display of CARRIER and FERRY (MERCHANT SHIP).
		Frame: OFF Fill: ON (use default color indicating standard identity) Icon: OFF Modifiers: OFF
		Frame: OFF Fill: OFF Icon: OFF Modifiers: OFF Note: Use only to indicate the location of a symbol.

Note: This table shows frame and fill color when displayed on a color monitor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.10 Symbol size. The relative size of each symbol and symbol component shall be consistent within a given implementation (see "Alphanumeric character and symbol sizes of MIL-STD-1472 for guidance"). Each of these sizes shall be related to length L as described in 5.1.1. The minimum diameter of a symbol displayed as a dot should be 0.15L.

5.3.11 Line width. Because the symbol frame indicates both the standard identity and dimension of an object, it is critical that line width is sufficient to ensure frame legibility and discriminability at normal viewing distance (see "Symbol line width of MIL-STD-1472 for guidance"). The optimum line width may differ depending on frame size and be affected by whether the frame is filled or unfilled and displayed in color or black/white. Usability testing should be performed to identify the optimum rendering for a given implementation.

5.3.12 Plotting. The plotting of most single point symbols shall be based on the geometric center of the symbol. The geometric center indicates the general vicinity of the center of mass of an object. Single point symbols that do not use their geometric center for plotting shall be positioned based on their anchor point. If an offset/precise location indicator is displayed with a symbol, the endpoint of the indicator shall show the object's location. If a group of symbols are displayed at one location, the group may be enclosed with a bracket and the location of that group identified with an offset/precise location indicator. An offset/precise location indicator is one option for reducing clutter when symbols overlap or are collocated. Other options for reducing visual clutter include (1) repositioning or turning off labels so that they are not obscured by other objects, with a line connecting each label to its object and/or (2) supporting variable coding of objects (e.g., high-interest objects are rendered as symbols and low-interest objects as dots). The choice of display options for addressing clutter is considered to be user specific. The positional accuracy of symbology plotting is also considered user specific.

5.3.13 Orientation. The frame and icon in framed tactical symbols shall be displayed in the orientation shown in the appendices. Equipment in the land battle dimension can be rotated to face the direction of movement only when the symbol is unframed. Control measure symbols shall be displayed in the orientation shown in appendix H. Point graphics that are positioned based on their anchor point can be rotated 90 degrees when necessary to minimize interference with other symbology or terrain features.

5.4 Compliance criteria. If common joint military symbology is implemented to visually display or present symbology, the implementation shall comply with the provisions of this standard. To be considered MIL-STD-2525 compliant, implementations must satisfy criteria related to the appearance of tactical symbols and graphics, the assembling and parsing of SIDC and the interpretation and generation of symbol representations. Each category of compliance criteria is described below:

5.4.1 Appearance of tactical symbols. The following compliance criteria apply to the appearance of tactical symbols:

f. The frame shape in a tactical symbol indicates the standard identity, battle dimension and status as defined in this MIL-STD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

g. If color is used in a tactical symbol, it indicates the standard identity as defined in this MIL-STD.

h. The icon in a tactical symbol is displayed as framed or unframed in accordance with framing requirements defined in this MIL-STD.

i. The icons in this MIL-STD are used to provide role or mission information whenever the objects for which icons are provided are displayed in a tactical symbol.

j. If text and/or graphic modifiers are included in a tactical symbol, they conform to the field definitions and display lengths defined in this MIL-STD.

k. Tactical symbol components and modifiers are sized and positioned as defined in this MIL-STD.

l. The rendering of tactical symbols and modifiers conform to the display options defined in table XIV.

m. Any temporary features added to a tactical symbol conform to the display rules in this MIL-STD.

5.4.2 Appearance of tactical graphics. The following compliance criteria apply to the appearance of control measure symbols:

a. The icons in this MIL-STD are used to provide information for battlefield planning and managing whenever the objects for which icons are provided are displayed in a control measure symbol.

b. The standard identity and status of a control measure symbol are displayed using color and/or text as defined in this MIL-STD.

c. If text and/or graphic modifiers are included in a control measure symbol, they conform to the field definitions and display lengths defined in this MIL-STD.

d. Control measure symbol components and modifiers are sized and positioned as defined in this MIL-STD.

5.4.3 Assembling and parsing of SIDC. The following compliance criteria apply to the assembling and parsing of SIDC:

a. An implementation can assemble the correct tactical symbol or graphic and its modifier(s) from a SIDC.

b. An implementation can generate the SIDC that will produce the correct tactical symbol or graphic when transmitted to another MIL-STD-2525 compliant system.

5.5 Color. It is important that implementations maximize the contrast between symbology and the display background in order to provide optimum discriminability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

a. Implementers should include sufficient usability testing to ensure effective operator performance when selecting colors to render the symbology. Color luminance (or brightness) may need to vary depending on the display option(s) selected for symbols. For example, different shades of red may be needed for both filled and unfilled symbols to heighten its contrast upon its map background or display.

b. For filled symbols, this contrast can be provided by using black (RGB: 0, 0, 0) for the frame, icon, modifiers and amplifiers when filled symbols are displayed on a light background and using white (RGB: 255, 255, 255) for these elements when filled symbols are displayed on a dark background. Implementers should select specific values (e.g., in CIE, RGB, or UV terms) for the default symbol colors based on considerations such as operational requirements, hardware configuration, display background and viewing conditions (e.g., ambient lighting). Table XV lists a range of acceptable symbol colors that have been empirically validated across a variety of viewing backgrounds. Table XV lists the symbol colors in terms of RGB and their corresponding hue, saturation and luminance (HSL) values. Three sample color sets are displayed in table XV. The colors for each standard identity shall vary only in terms of their luminance values (luminance terms are **in bold** in table XV). Implementers may use any of the example color sets or may choose an alternative set whose luminance values fall within the range of the light and dark color sets. Color fill ranges for the optional civilian fill have also been included. Standard identity symbol colors shall always maintain their respective hue (e.g., hostile – red, friend – blue, neutral – green, unknown – yellow). No permutations to the color fills shall be permitted, with the lone exception of having the option of using purple to denote civilian tracks. Filled symbols may be depicted as translucent. In such cases, opacity should be set at 35% (65% transparency).

c. For unfilled symbols, implementers should use the default symbol colors in table XVI unless considerations such as operational requirements, hardware configuration, display background and viewing conditions (e.g., ambient lighting) necessitate an alternate symbol color set. In the case of an alternative symbol color set, implementers should select specific values (e.g., in CIE, RGB, or UV terms) for unfilled symbols based on sufficient usability testing.

d. For control measures, this contrast can be provided by using black (RGB: 0, 0, 0) for the graphic when it is displayed on a light background and using white (RGB: 255, 255, 255) when it is displayed on a dark background. If color is used in a graphic, implementers should select specific values for the default colors in table XVI based on the same considerations as for icon-based symbols.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XV. Color range values for filled symbols.

DESCRIPTION	HAND DRAWN	COMPUTER GENERATED		
		DARK	MEDIUM	LIGHT
HOSTILE, SUSPECT, JOKER, FAKER	RED	RGB (200, 0, 0) HSL (0, 255, **100**)	RGB (255, 48, 49) HSL (0, 255, **152**)	RGB (255, 128, 128) HSL (0, 255, **192**)
FRIEND, ASSUMED FRIEND	BLUE	RGB (0, 107, 140) HSL (138, 255, **70**)	RGB (0, 168, 220) HSL (138, 255, **110**)	RGB (128, 225, 255) HSL (138, 255, **192**)
NEUTRAL	GREEN	RGB (0, 160, 0) HSL (85, 255, **80**)	RGB (0, 226, 0) HSL (85, 255, **113**)	RGB (170, 255, 170) HSL (85, 255, **213**)
UNKNOWN, PENDING	YELLOW	RGB (225, 220, 0) HSL (42, 255, **110**)	RGB (255, 255, 0) HSL (42, 255, **128**)	RGB (255, 255, 128) HSL (42, 255, **192**)
CIVILIAN (OPTIONAL FILL)	PURPLE	RGB (80, 0, 80) HSL (213, 255, **40**)	RGB (128, 0, 128) HSL (213, 255, **64**)	RGB (255, 161, 255) HSL (213, 255, **208**)

TABLE XVI. Default colors for unfilled symbols.

DESCRIPTION	HAND DRAWN	COMPUTER GENERATED	
		ICON (RGB VALUE)	ICON COLOR
HOSTILE, SUSPECT, JOKER, FAKER	RED	RED (255, 0, 0)	
FRIEND, ASSUMED FRIEND	BLUE	CYAN (0, 255, 255)	
NEUTRAL	GREEN	NEON GREEN (0, 255, 0)	
UNKNOWN, PENDING	YELLOW	YELLOW (255, 255, 0)	
CIVILIAN (OPTIONAL)	PURPLE	MAGENTA (255, 0, 255)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

6 NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. MIL-STD-2525 is designed to enhance DoD's joint interoperability by providing sets of C2 symbols, a coding scheme for symbol automation and information transfer, and technical details to support symbology for C2 systems.

6.2 Subject term (key word) listing.

Amplifier
Command and Control
Civil Support
Control Measures
Emergency Management
Graphic
Icon
Interoperability
Meteorological
Modifier
Oceanographic
Operations
Signals Intelligence
Activities
Symbol
Symbol Identification Code
Warfighter

6.3 International standardization agreement implementation. This standard implements NATO STANAG 2019/APP-6, NATO Joint Military Symbology. When changes to, revision, or cancellation of this standard are proposed, the preparing activity must coordinate the action with the US National Point of Contact for the international standardization agreement as identified in the ASSIST database at https://assist.dla.mil/.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SYMBOL IDENTIFICATION CODES

A.1 SCOPE.

A.1.1 Scope. This appendix outlines the procedures for developing symbol identification codes (SIDC) for symbols in MIL–STD–2525D. The use of these codes is optional but highly recommended.

A.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

A.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

A.4 GENERAL REQUIREMENTS

A.4.1 Organization. This appendix contains SIDC and their elements.

A.5 DETAILED REQUIREMENTS

A.5.1 Symbol identification codes. A symbol identification code is a numeric code that uniquely identifies the elements needed to build a MIL–STD–2525D compliant symbol. The SIDC provides the capability to exchange symbol information in a bandwidth efficient manner. It is given to an established symbol by the SSMC/JSP only. SIDC's with the term {Reserved for future use} shall only be assigned by the SSMC/JSP.

A.5.2 Elements of the symbol identification codes**.** The SIDC is composed of twelve elements of information which are presented in three sets of ten digits. See figure A–1.

A.5.2.1 Set A - First ten digits.

Version
Standard identity
Symbol set
Status
HQ/Task Force/Dummy
Amplifier

A.5.2.2 Set B - Second ten digits.

Entity
Entity type
Entity subtype
Sector 1 modifier
Sector 2 modifier

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.2.3 Set C - Third ten digits.

Nationality/country/geopolitical/geographic name or Entity numeric code

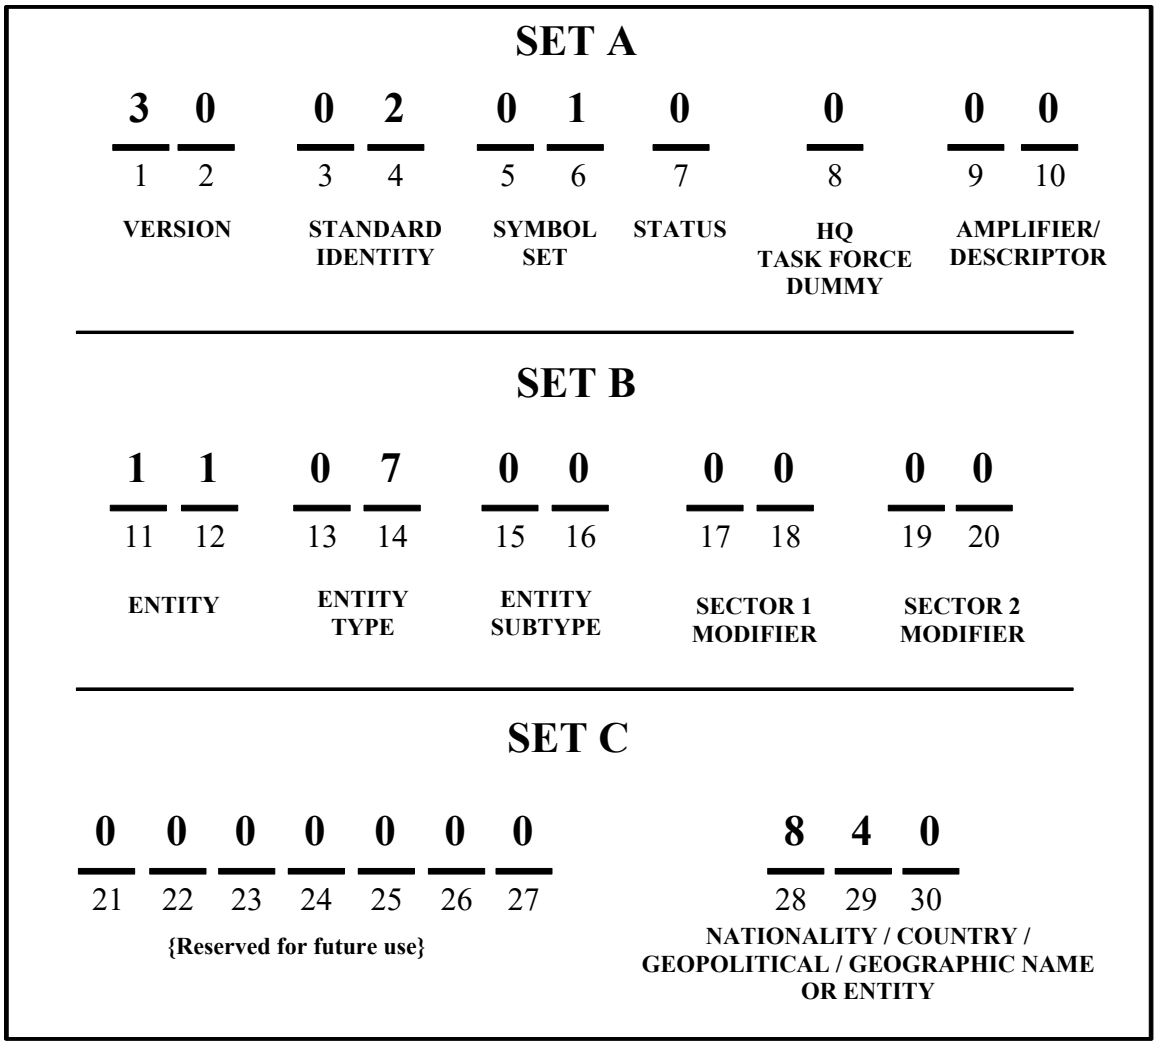


FIGURE A-1. Elements of the symbol identification code.

A.5.3 Version extension flag (VEF). The VEF is currently not used.

A.5.4 Set A. The first set of ten digits:

Digits 1 and 2 is the Version.
Digits 3 and 4 is the Standard Identity.
Digits 5 and 6 is the Symbol Set.
Digit 7 is the Status.
Digit 8 is the Headquarters/Task Force/Dummy.
Digits 9 and 10 is the Amplifier/Descriptor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.1 Version. The version is comprised of two digits and identifies a version change for the SIDC which occurs when there is a change in an established icon, symbol, modifier(s), or drawing rule(s) for a control measure symbol. Subsequent changes will create further version changes for the SIDC. For all symbols in this standard, the version field in the SIDCs shall be populated with code "10".

Note: The first, second, and third sets of SIDC digits can each be represented in a computer system with a single 32 bit unsigned integer. The supported range of values for a 32 bit unsigned integer is 0 to 4,294,967,295. In order to allow nine (9) as the largest value for each digit (for extension flag purposes) and to ensure each of the ten digits is easily parsed, the allowable range of values for each part of the SIDC must be 1,000,000,000 to 3,999,999,999.

TABLE A-I. Version.

Description	Code	
No changes to joint military symbology	10	
Any subsequent changes to joint military symbology	11–39	

A.5.4.2 Standard identity. Standard identity is comprised of two digits. The first digit represents the context of the symbol and the second digit reflects the standard identity. The following are the entries for standard identity:

TABLE A-II. Standard identity.

Description	1st Digit	2d Digit
Context		
Reality	0	
Exercise	1	
Simulation	2	
{Reserved for future use}	3-9	
Standard Identity		
Pending		0
Unknown		1
Assumed Friend		2
Friend		3
Neutral		4
Suspect/Joker		5
Hostile/Faker		6
{Reserved for future use}		7-9

A.5.4.2.1 Context implementation guidance. The three contexts listed here are reality, exercise, and simulation, and these are directly related to frames depicted in each of tables I, II, and III, respectively. The graphic (svg) files provided for frames include complete sets of those that need "X" for exercise or "S" for simulation text amplifiers, however graphic (svg) files for Training are not currently available. These amplifiers are built into the exercise and simulation frame graphic (svg) files themselves, rather than supplied as separate text amplifier graphic (svg) files.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.2.2 Standard identity implementation guidance. The standard identities are documented, and examples of the various frames used for each of the standard identities illustrated, in tables I, II, and III. The standard identities themselves are also listed in 5.3.2.1. The seven standard identities are grouped into four standard identity groups each of which has an associated frame shape for each battle dimension. The standard identity groups are Unknown, Friend, Neutral and Hostile and the mapping between them and the standard identities is as shown in table A-III.

TABLE A-III. Standard Identity Mapping.

Standard Identity Group	Standard Identities
Unknown	Pending and Unknown
Friend	Friend and Assumed Friend
Neutral	Neutral
Hostile	Hostile/Faker and Suspect/Joker

When a symbol component is variable according to frame shape, the standard identity group can be used to determine which of the available graphic (svg) files should be used for symbol construction.

A.5.4.3 Symbol set. The symbol set is comprised of two digits.

TABLE A-IV. Symbol sets.

Description	Code
Unknown	00
Air	01
Air Missile	02
Space	05
Space Missile	06
Land Unit	10
Land Civilian Unit/Organization	11
Land Equipment	15
Land Installation	20
Control Measure	25
Dismounted Individuals (NATO Only)	27
Sea Surface	30
Sea Subsurface	35
Mine Warfare	36
Activities	40
Atmospheric	45
Oceanographic	46
Meteorological Space	47
Signals Intelligence – Space	50
Signals Intelligence – Air	51
Signals Intelligence – Land Equipment	52
Signals Intelligence – Sea Surface	53
Signals Intelligence – Sea Subsurface	54
Cyberspace	60
{Reserved for future use}	03-04, 07-09, 12-14, 16-19, 21-24, 26, 28-29, 31-34, 37-39, 41-44, 48-49, 55-59, and 61-99
Version Extension Flag	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.3.1 Symbol set implementation guidance. A symbol set represents a collection of symbol entities, sector one modifiers, and sector two modifiers. One or more symbol sets is grouped into a given dimension. A dimension is a collection of symbols that all share the same basic frame shape and amplifier placement specifications. The various dimensions are further illustrated as columns in tables I, II, and III. Multiple dimensions may combine to form domains (see 5.3.2.2). For any given symbol's SIDC, its context, standard identity, dimension, and status codes assist in determining which frame and associated fill (see 5.3.2, 5.3.3, and tables I, II, and III) is used to depict that symbol. Typically, given a collection of available filled frame graphic (svg) files, a given "affiliation" or "relationship" between a single context, single standard identity, single dimension, together with status, will permit the identification and selection of a single best choice for frame graphic (svg) file. The optional choice of drawing a frame using the magenta fill for "civilian" provides a further opportunity to choose a particularly appropriate graphic (svg) file for frame depiction.

See table A-V for a mapping of the relationships between dimensions and symbol sets. Domains (5.3.2.2) cut across dimensions. MIL-STD-2525C also referred to the concept of a Battle Dimension (Air, Space, Ground, Sea Surface, Sea Subsurface, SOF, Other, and Unknown), and so, for clarity, table A-V also shows the relationships between the older concept of Battle Dimension and the newer concepts of Dimension, Domain, and Symbol Set.

TABLE A-V. Domain/dimension/symbol set mappings.

Battle Dimension (MIL-STD-2525C)	Dimension (MIL-STD-2525D)	Domain	Symbol Sets	Symbol Set Code
Unknown	Unknown	Unknown	Unknown	00
Air	Air	Air	Air Air Missile Air SIGINT	01 02 51
Space	Space	Space	Space Space Missile Space SIGINT	05 06 50
Ground	Land Unit	Land	Land Unit Land Civilian Unit/Organization	10 11
	Land Equipment		Land Equipment Land SIGINT	15 52
	Land Installation	Land	Land Installation	20
Sea Surface	Sea Surface	Sea	Sea Surface Sea Surface SIGINT	30 53
Sea Subsurface	Sea Subsurface	Sea	Sea Subsurface Mine Warfare Sea Subsurface SIGINT	35 36 54
--	Activities	By Location	Activities	40
--	Control Measure	By Location	Control Measure	25
--	METOC	Air	Atmospheric	45
		Sea	Oceanographic	46
		Space	Meteorological Space	47
--	Cyberspace	Cyberspace	Cyberspace	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.4 Status. The status is comprised of one digit.

TABLE A-VI. Status.

Description	Code
Present	0
Planned/Anticipated/Suspect	1
Present/Fully capable	2
Present/Damaged	3
Present/Destroyed	4
Present/Full to capacity	5
{Reserved for future use}	6 thru 9
Version extension flag	-

A.5.4.4.1 Status implementation guidance. Status is defined under 5.3.2.3. The status code in an SIDC can, alternatively, represent a given symbol's operational condition (5.3.7.14), since operational condition and status (5.3.2.3) are mutually exclusive. Graphic (svg) files are available for each frame shape to enable a location Status of Present (solid frame) or Anticipated/Planned/Suspected (dashed frame) to be indicated for the relevant standard identities. Similarly, graphic (svg) files (differentiated by context, standard identity, dimension, and status) are available to ensure that when the operational condition of an entity is expressed using the colored bar approach shown in table XI, the bars are properly aligned when drawn beneath various frame shapes.

A.5.4.5 Headquarters/task force/dummy. The headquarters/task force/dummy is comprised of one digit.

TABLE A-VII. Headquarters/task force/dummy.

Description	Code
Unknown	0
Feint/Decoy/Dummy	1
Headquarters	2
Feint/Dummy Headquarters	3
Task Force	4
Feint/Dummy Task Force	5
Task Force Headquarters	6
Feint/Dummy Task Force Headquarters	7
{Reserved for future use}	8-9
Version Extension Flag	-

A.5.4.5.1 Headquarters/task force/dummy implementation guidance. Task force and feint/dummy indicators are described in 5.3.7.3 and 5.3.7.4, respectively. The headquarters staff indicator is mentioned in D.5.3.3.1.1 and figure D-3. Code values exist for each of the eight possible combinations of these three graphic amplifiers including the case where none of the amplifiers are used. Graphic (svg) files exist for each combination of standard identity group, dimension, and the aforementioned Headquarters/Task Force/Dummy codes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.6 Echelon/mobility/towed array amplifier. The amplifier is comprised of two digits.

TABLE A-VIII. Descriptor: Echelon/mobility/towed array amplifier.

Description	1st Digit	2d Digit
Unknown	0	0
Echelon at brigade and below	1	
Team/Crew		1
Squad		2
Section		3
Platoon/detachment		4
Company/battery/troop		5
Battalion/squadron		6
Regiment/group		7
Brigade		8
{Reserved for future use}		9
Version extension flag		-
Echelon at division and above	2	
Division		1
Corps/MEF		2
Army		3
Army Group/front		4
Region/Theater		5
Command		6
{Reserved for future use}		7 thru 9
Version extension flag		-
Equipment mobility on land	3	
Wheeled limited cross country		1
Wheeled cross country		2
Tracked		3
Wheeled and tracked combination		4
Towed		5
Rail		6
Pack animals		7
{Reserved for future use}		8-9
Version extension flag		-
Equipment mobility on snow	4	
Over snow (prime mover)		1
Sled		2
{Reserved for future use}		3-9
Version extension flag		-
Equipment mobility on water	5	
Barge		1
Amphibious		2
{Reserved for future use}		3 thru 9
Version extension flag		-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-VIII. Descriptor: Echelon/mobility/towed array amplifier.

Description	1st Digit	2d Digit
Naval towed array	6	
Short towed array		1
Long towed Array		2
{Reserved for future use}		3 thru 9
Version extension flag		-
{Reserved for future use}	7 thru 9	
Version extension flag	-	-

A.5.4.6.1 Echelon/mobility/towed array amplifier implementation guidance. An amplifier can either be textual or graphical. Documented in 5.3.7, with further echelon indicator details in 5.3.7.1, mobility indicator details in 5.3.7.10, and towed array amplifier details in 5.3.7.13.5, these codes allow, within the contents of an SIDC, for the inclusion of three of the most commonly used graphic amplifiers. An individual graphic (svg) file can be identified for use for a given amplifier based on an SIDC's standard identity group and its two amplifier code digits.

A.5.5 Set B. The second set of ten digits:

a. These digits define the icon and modifier contents of each symbol set

Digits 11 and 12 is the entity.
Digits 13 and 14 is the entity type.
Digits 15 and 16 is the entity subtype.
Digits 17 and 18 is the first modifier.
Digits 19 and 20 is the second modifier.

If an entity is "Unspecified", then the remainder of the second set of ten digits shall be set to 0.

The tables in this section are organized by symbol sets.

b. Icons are the innermost part of a symbol. A symbol is, at most, composed of one and only one icon or compound icon. Icons are fully defined in 5.3.4. The SIDC structure is organized using a logical three-tier hierarchy based on first, second and third order military functions; each tier (military function level) is expressed using a pair of digits. A first order military function is expressed as an Entity. Where there are second order military functions associated with a first order military function, these are expressed as Entity Types. Similarly, if a second order military function has related third order military functions; these are expressed as Entity Subtypes. The placement of the digits representing Entity, Entity Type and Entity Subtype can be seen in figure A-1. Some entities and entity types are used purely for hierarchical purposes; these are never associated with an actual physical icon (an individual svg graphic file) and thus are never intended to be displayed. Most entities and entity types, however, and all entity subtypes, are associated with a single physical icon (an individual svg file). The icon used to represent a SIDC should be that associated with the highest level of detail available i.e. the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

one that reflects a non-zero-zero value at the most discriminating (i.e., lowest order) of the Entity, Entity Type and Entity Subtype values. When the icon to be used is a full frame icon (see 5.3.4.3), so by definition it touches the edge of the frame it is drawn within, one of four graphic (svg) files needs to be used, based on the standard identity group of the given SIDC.

c. A symbol set is also comprised of up to two sets of sector modifiers (sector 1 and sector 2). Sector modifiers are defined in 5.3.6, and their placement in 5.3.1.2. The graphic (svg) file for a given sector one modifier can be determined through an SIDC's symbol set and sector one modifier codes. The graphic (svg) file for a given sector two modifier can be determined through an SIDC's symbol set and sector two modifier codes.

d. For example, an SIDC of 1003100216, 1204010051 would be interpreted as:



- 10 = Original version of this symbol (no effect on how this symbol is built/drawn)
- 03 = Reality context, friend standard identity, friend standard identity group
- 10 = Land unit symbol set, which belongs to the land unit dimension
- 0 = Status of present
- 2 = Headquarters/task force/dummy amplifier of headquarters
- 16 = Echelon at brigade and below, specifically a battalion/squadron echelon

- 12 = within the land unit symbol set, the movement and maneuver entity
- 04 = within the movement and maneuver entity, an antitank/antiarmor entity type
- 01 = within the antitank/antiarmor entity type, an armored unit
- 00 = within the land unit symbol set, no sector one modifier
- 51 = within the land unit symbol set, the wheeled sector two modifier

e. The above example would be drawn as:

Codes Used	Graphic (svg)
03 = Reality friend **10** = Land unit symbol set (and dimension) **0** = status of present All of the above values must be noted, in order to select the single best graphic for the filled frame.	
3 = Friend **10** = Land unit **2** = Headquarters All of the above values must be noted, in order to select the single best graphic for the headquarters/task force/dummy amplifier.	
3 = Friend **16** = Echelon at brigade or below, battalion/squadron The friend standard identity belongs to the friend standard identity group, which in turn helps determine which graphic (svg) to use.	
10 = Land unit symbol set **12** = Entity is movement/maneuver	No icon is associated with this entity (hierarchical purposes only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3 = Friend **04** = Entity type within land unit movement/maneuver entity is antitank/antiarmor. Since this is a full frame icon, the standard identity of friend determines the specific graphic (svg) needed. This icon would be used if this were the highest order non-zero-zero military function code in this SIDC. But it is not, in this example, the icon we desire.	
3 = Friend **01** = Entity subtype within land unit movement/maneuver entity and antitank/antiarmor entity type is armored. Since this is a full frame icon, the standard identity of friend determines the specific graphic (svg) needed. Since this is the highest (3rd) order non-zero-zero military function code in this particular SIDC, this icon IS used, NOT the previous icon for antitank/antiarmor.	
00 = Sector one modifier code is zero.	Nothing is drawn in sector one.
51 = Sector two modifier code is land unit, wheeled	
When composed and drawn, the final result is… 1003100216, 1204010051	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.1 Air (01)

TABLE A-IX. Air entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Military			**11**0000
	Fixed Wing		11**01**00
		Medical Evacuation (MEDEVAC)	1101**01**
		Attack/Strike	1101**02**
		Bomber	1101**03**
		Fighter	1101**04**
		Fighter/Bomber	1101**05**
		{Reserved for future use}	1101**06**
		Cargo	1101**07**
		Electronic Combat (EC)/Jammer	1101**08**
		Tanker	1101**09**
		Patrol	1101**10**
		Reconnaissance	1101**11**
		Trainer	1101**12**
		Utility	1101**13**
		Vertical or Short Take-off and Landing (VSTOL)	1101**14**
		Airborne Command Post (ACP)	1101**15**
		Airborne Early Warning (AEW)	1101**16**
		Antisurface Warfare	1101**17**
		Antisubmarine Warfare	1101**18**
		Communications	1101**19**
		Combat Search and Rescue (CSAR)	1101**20**
		Electronic Support (ES)	1101**21**
		Government	1101**22**
		Mine Countermeasures (MCM)	1101**23**
		Personnel Recovery	1101**24**
		Search and Rescue	1101**25**
		Special Operations Forces	1101**26**
		Ultra Light	1101**27**
		Photographic Reconnaissance	1101**28**
		Very Important Person (VIP)	1101**29**
		Suppression of Enemy Air Defense	1101**30**
		Passenger	1101**31**
		Escort	1101**32**
		Electronic Attack (EA)	1101**33**
	Rotary Wing		11**02**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-IX. Air entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Unmanned Aircraft (UA) / Unmanned Aerial Vehicle (UAV) / Unmanned Aircraft System (UAS) / Remotely Piloted Vehicle (RPV)		11**03**00
	Vertical–Takeoff UAV (VT–UAV)		11**04**00
	Lighter Than Air		11**05**00
	Airship		11**06**00
	Tethered Lighter than Air		11**07**00
Civilian			**12**0000
	Fixed Wing		12**01**00
	Rotary Wing		12**02**00
	Unmanned Aircraft (UA) / Unmanned Aerial Vehicle (UAV) / Unmanned Aircraft System (UAS) / Remotely Piloted Vehicle (RPV)		12**03**00
	Lighter Than Air		12**04**00
	Airship		12**05**00
	Tethered Lighter than Air		12**06**00
Weapon			**13**0000
	Bomb		13**01**00
	Decoy		13**02**00
Manual Track			**14**0000

TABLE A-X. Air sector 1 modifie.

First Modifier	Category	Code	Remarks
Not Applicable		00	
Attack/Strike	Military Aircraft Type	01	
Bomber	Military Aircraft Type	02	
Cargo	Aircraft Type	03	
Fighter	Military Aircraft Type	04	
Interceptor	Military Aircraft Type	05	
Tanker	Aircraft Type	06	
Utility	Aircraft Type	07	
Vertical or Short Take-off and Landing (VSTOL)/ Vertical Take-off and Landing (VTOL)	Aircraft Type	08	
Passenger	Aircraft Type	09	
Ultra Light	Aircraft Type	10	
Airborne Command Post (ACP)	Military Aircraft Type	11	
Airborne Early Warning (AEW)	Military Aircraft Type	12	
Government	Aircraft Type	13	
Medical Evacuation (MEDEVAC)	Mission Area	14	
Escort	Military Mission Area	15	
Electronic Combat (EC)/Jammer	Military Mission Area	16	
Patrol	Mission Area	17	
Reconnaissance	Mission Area	18	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-X. Air sector 1 modifier - Continued.

First Modifier	Category	Code	Remarks
Trainer	Mission Area	19	
Photographic (Reconnaissance)	Mission Area	20	
Personnel Recovery	Mission Area	21	
Antisubmarine Warfare	Military Mission Area	22	
Communications	Mission Area	23	
Electronic Support (ES)	Military Mission Area	24	
Mine Countermeasures (MCM)	Military Mission Area	25	
Search and Rescue	Mission Area	26	
Special Operations Forces	Military Mission Area	27	
Surface Warfare	Military Mission Area	28	
Very Important Person (VIP) Transport	Mission Area	29	
Combat Search and Rescue (CSAR)	Military Mission Area	30	
Suppression of Enemy Air Defenses	Military Mission Area	31	
Antisurface Warfare	Military Mission Area	32	
Fighter/Bomber	Military Aircraft Type	33	
Intensive Care	Mission Area	34	
Electronic Attack (EA)	Military Mission Area	35	
Multi-Mission	Mission Area	36	
Hijacking/Hijacked	Crime	37	
ASW Helo- LAMPS	Mission Area	38	
ASW Helo – SH-60R	Mission Area	39	
Hijacker	Crime	40	
Cyberspace	Capability	41	
{Reserved for future use}		42-99	
Version Extension Flag		-	

TABLE A-XI. Air sector 2 modifier.

Second Modifier	Category	Code	Remarks
Not Applicable		00	
Heavy	Cargo/Transport Capacity	01	
Medium	Cargo/Transport Capacity	02	
Light	Cargo/Transport Capacity	03	
Boom–Only	Re-Fueling Capability	04	
Drogue–Only	Re-Fueling Capability	05	
Boom and Drogue	Re-Fueling Capability	06	
Close Range	Range	07	
Short Range	Range	08	
Medium Range	Range	09	
Long Range	Range	10	
Downlinked	Track Link Availability	11	
Cyberspace	Capability	12	
{Reserved for future use}		13-99	
Version Extension Flag		-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.2 Air missile (02).

TABLE A-XII. Air missile entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Missile			**11**0000

TABLE A-XIII. Air missile sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Air	Launch Origin	01	
Surface	Launch Origin	02	
Subsurface	Launch Origin	03	
Space	Launch Origin	04	
Anti–Ballistic	Missile Class	05	
Ballistic	Missile Class	06	
Cruise	Missile Class	07	
Interceptor	Missile Class	08	
{Reserved for future use}		09-99	
Version Extension Flag		-	

TABLE A-XIV. Air missile sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Air	Missile Destination	01	
Surface	Missile Destination	02	
Subsurface	Missile Destination	03	
Space	Missile Destination	04	
Launched	Missile Status	05	
Missile	Missile Status	06	
Patriot	Missile Type-BMD	07	
Standard Missile-2 (SM-2)	Missile Type-AAW	08	
Standard Missile-6 (SM-6)	Missile Type-AAW	09	
Evolved Sea Sparrow Missile (ESSM)	Missile Type-AAW	10	
Rolling Airframe Missile (RAM)	Missile Type-AAW	11	
Short Range	Missile Range	12	
Medium Range	Missile Range	13	
Intermediate Range	Missile Range	14	
Long Range	Missile Range	15	
Intercontinental	Missile Range	16	
{Reserved for future use}		17-99	
Version Extension Flag		-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.3 Space (05).

TABLE A-XV. Space entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Military			**11**0000
	Space Vehicle		11**01**00
	Re–Entry Vehicle		11**02**00
	Planet Lander		11**03**00
	Orbiter Shuttle		11**04**00
	Capsule		11**05**00
	Satellite, General		11**06**00
	Satellite		11**07**00
	Antisatellite Weapon		11**08**00
	Astronomical Satellite		11**09**00
	Biosatellite		11**10**00
	Communications Satellite		11**11**00
	Earth Observation Satellite		11**12**00
	Miniaturized Satellite		11**13**00
	Navigational Satellite		11**14**00
	Reconnaissance Satellite		11**15**00
	Space Station		11**16**00
	Tethered Satellite		11**17**00
	Weather Satellite		11**18**00
	Space Launched Vehicle (SLV)		11**19**00
Civilian			**12**0000
	Orbiter Shuttle		12**01**00
	Capsule		12**02**00
	Satellite		12**03**00
	Astronomical Satellite		12**04**00
	Biosatellite		12**05**00
	Communications Satellite		12**06**00
	Earth Observation Satellite		12**07**00
	Miniaturized Satellite		12**08**00
	Navigational Satellite		12**09**00
	Space Station		12**10**00
	Tethered Satellite		12**11**00
	Weather Satellite		12**12**00
Manual Track			**13**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XVI. Space sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Low Earth Orbit (LEO)	Orbit	01	
Medium Earth Orbit (MEO)	Orbit	02	
High Earth Orbit (HEO)	Orbit	03	
Geosynchronous Orbit (GSO)	Orbit	04	
Geostationary Orbit (GO)	Orbit	05	
Molniya Orbit (MO)	Orbit	06	
Cyberspace	Capability	07	
{Reserved for future use}		08-99	
Version Extension Flag		-	

TABLE A-XVII. Space sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Optical	Sensor	01	
Infrared	Sensor	02	
Radar	Sensor	03	
Signals Intelligence (SIGINT)	Sensor	04	
Cyberspace	Capability	05	
{Reserved for future use}		06-99	
Version Extension Flag		-	

A.5.5.4 Space missile (06).

TABLE A-XVIII. Space missile entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Missile			**11**0000

TABLE A-XIX. Space missile sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Ballistic	Missile Class	01	
Space	Launch Origin	02	
Interceptor	Missile Class	03	
{Reserved for future use}		04-99	
Version Extension Flag		-	

TABLE A-XX. Space missile sector 2 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Short Range	Missile Range	01	
Medium Range	Missile Range	02	
Intermediate Range	Missile Range	03	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XX. Space missile sector 2 modifier.

Long Range	Missile Range	04	
Intercontinental	Missile Range	05	
Arrow	Missile Type-BMD	06	
Ground-Based Interceptor (GBI)	Missile Type-BMD	07	
Patriot	Missile Type-BMD	08	
Standard Missile Terminal Phase (SM-T)	Missile Type-BMD	09	
Standard Missile – 3 (SM-3)	Missile Type-BMD	10	
Terminal High Altitude Area Defense (THAAD)	Missile Type-BMD	11	
Space	Launch Origin	12	
Close Range (CRBM)	Missile Range	13	
Debris	Missile Type-BMD	14	
Unknown	Missile Type-BMD	15	
{Reserved for future use}		16-99	
Version Extension Flag		-	

A.5.5.5 Land unit (10).

TABLE A-XXI. Land unit entity/entity type/entity subtype.

Entity (Digits 1and 2)	**Entity Type** (Digits 3 and 4)	**Entity Subtype** (Digits 5 and 6)	**Code**
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Command and Control			**11**0000
	Broadcast Transmitter Antennae		11**01**00
	Civil Affairs		11**02**00
	Civil–Military Cooperation		11**03**00
	Information Operations		11**04**00
	Liaison		11**05**00
	Military Information Support Operations (MISO)		11**06**00
		Broadcast Transmitter Antennae	110**601**
	Radio		11**07**00
	Radio Relay		11**08**00
	Radio Teletype Center		11**09**00
	Signal		11**10**00
		Radio	111**001**
		Radio Relay	111**002**
		Teletype	111**003**
		Tactical Satellite	111**004**
		Video Imagery (Combat Camera)	111**005**
	Tactical Satellite		11**11**00
	Video Imagery (Combat Camera)		11**12**00
	Space		11**13**00
	Special Troops		11**14**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXI. Land unit entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Movement and Maneuver			**12**0000
	Air Assault with Organic Lift		12**01**00
	Air Traffic Services/Airfield Operations		12**02**00
	{Reserved for future use}		12**03**00
	Antitank/Antiarmor		12**04**00
		Armored	12040**1**
		Motorized	12040**2**
	Armor/Armored/Mechanized/Self–Propelled/ Tracked		12**05**00
		Reconnaissance/Cavalry/Scout	12050**1**
		Amphibious	12050**2**
	Army Aviation/Aviation Rotary Wing		12**06**00
		Reconnaissance	12060**1**
	Aviation Composite		12**07**00
	Aviation Fixed Wing		12**08**00
		Reconnaissance	12080**1**
	Combat		12**09**00
	Combined Arms		12**10**00
	Infantry		12**11**00
		Amphibious	12110**1**
		Armored/Mechanized/Tracked	12110**2**
		Main Gun System	12110**3**
		Motorized	12110**4**
		Infantry Fighting Vehicle	12110**5**
	Observer		12**12**00
	Reconnaissance/Cavalry/Scout		12**13**00
		Reconnaissance and Surveillance	12130**1**
		Marine	12130**2**
		Motorized	12130**3**
	Sea Air Land (SEAL)		12**14**00
	Sniper		12**15**00
	Surveillance		12**16**00
	Special Forces		12**17**00
	Special Operations Forces (SOF)		12**18**00
		Fixed Wing MISO	12180**1**
		Ground	12180**2**
		Special Boat	12180**3**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXI. Land unit entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Special SSNR	121804
		Underwater Demolition Team	121805
	Unmanned Aerial Systems		121900
	Ranger		122000
Fires			130000
	Air Defense		130100
		Main Gun System	130101
		Missile	130102
		Air and Missile Defense	130103
	Air/Land Naval Gunfire Liaison		130200
	Field Artillery		130300
		Self–propelled	130301
		Target Acquisition	130302
	Field Artillery Observer		130400
	Joint Fire Support		130500
	Meteorological		130600
	Missile		130700
	Mortar		130800
		Armored/Mechanized/Tracked	130801
		Self-Propelled Wheeled	130802
		Towed	130803
	Survey		130900
Protection			140000
	Chemical Biological Radiological Nuclear Defense		140100
		Mechanized	140101
		Motorized	140102
		Reconnaissance	140103
		Reconnaissance Armored	140104
		Reconnaissance Equipped	140105
		Chemical, Biological, Radiological, Nuclear, and High-Yield Explosives	140106
	Combat Support (Maneuver Enhancement)		140200
	Criminal Investigation Division		140300
	Diving		140400
	Dog		140500
	Drilling		140600
	Engineer		140700
		Mechanized	140701
		Motorized	140702

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXI. Land unit entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Reconnaissance	140703
	Explosive Ordnance Disposal (EOD)		140800
	Field Camp Construction		140900
	Fire Fighting/Fire Protection		141000
	Geospatial Support/Geospatial Information Support		141100
	Military Police		141200
	Mine		141300
	Mine Clearing		141400
	Mine Launching		141500
	Mine Laying		141600
	Security		141700
		Mechanized	141701
		Motorized	141702
	Search and Rescue		141800
	Security Police (Air)		141900
	Shore Patrol		142000
	Topographic/Geospatial		142100
	Missile Defense		142200
Intelligence			150000
	Analysis		150100
	Counterintelligence		150200
	Direction Finding		150300
	Electronic Ranging		150400
	Electronic Warfare		150500
		Analysis	150501
		Direction Finding	150502
		Intercept	150503
		Jamming	150504
		Search	150505
	Intercept (Search and Recording)		150600
	Interrogation		150700
	Jamming		150800
	Joint Intelligence Center		150900
	Military Intelligence		151000
	Search		151100
	Sensor		151200
	Military History		151300
Sustainment			160000
	Administrative		160100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXI. Land unit entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	All Classes of Supply		16**02**00
	Airport of Debarkation/Airport of Embarkation		16**03**00
	Ammunition		16**04**00
	Band		16**05**00
		Army Music	1605**01**
	Combat Service Support		16**06**00
	Finance		16**07**00
	Judge Advocate General		16**08**00
	Labor		16**09**00
	Laundry/Bath		16**10**00
	Maintenance		16**11**00
	Material		16**12**00
	Medical		16**13**00
	Medical Treatment Facility		16**14**00
	Morale, Welfare and Recreation		16**15**00
	Mortuary Affairs		16**16**00
	Multiple Classes of Supply		16**17**00
	NATO Supply Class I		16**18**00
	{Reserved for future use}		16**19**00
	NATO Supply Class III		16**20**00
	NATO Supply Class IV		16**21**00
	{Reserved for future use}		16**22**00
	Ordnance		16**23**00
	Personnel Services		16**24**00
	Petroleum, Oil and Lubricants		16**25**00
	{Reserved for future use}		16**26**00
	{Reserved for future use}		16**27**00
	Public Affairs/Public Information		16**28**00
	Quartermaster		16**29**00
	Railhead		16**30**00
	Religious Support		16**31**00
	Replacement Holding Unit		16**32**00
	Sea Port of Debarkation/Sea Port of Embarkation		16**33**00
	{Reserved for future use}		16**34**00
	Joint Information Bureau (JIB)		16**35**00
	Transportation		16**36**00
		Floating Craft	1636**01**
	US Supply Class I		16**37**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXI. Land unit entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	{Reserved for future use}		16**38**00
	{Reserved for future use}		16**39**00
	US Supply Class IV		16**40**00
	{Reserved for future use}		16**41**00
	US Supply Class VI		16**42**00
	US Supply Class VII		16**43**00
	US Supply Class VIII		16**44**00
	US Supply Class IX		16**45**00
	US Supply Class X		16**46**00
	{Reserved for future use}		16**47**00
	Water Purification		16**48**00
	Broadcast		16**49**00
	NATO Supply Class - ALL		16**50**00
	Interpreter/Translator		16**51**00
	Support		16**52**00
	Army Field Support		16**53**00
	Contracting Services		16**54**00
	Parachute Rigger		16**55**00
Naval			**17**0000
	Naval		17**01**00
Named Headquarters			**18**0000
	Allied Command Europe Rapid Reaction Corps (ARRC)		18**01**00
	Allied Command Operations		18**02**00
	International Security Assistance Force (ISAF)		18**03**00
	Multinational (MN)		18**04**00
Emergency Operation			**19**0000
Law Enforcement			**20**0000
	Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)		20**01**00
	Border Patrol		20**02**00
	Customs Service		20**03**00
	Drug Enforcement Administration (DEA)		20**04**00
	Department of Justice (DOJ)		20**05**00
	Federal Bureau of Investigation (FBI)		20**06**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXI. Land unit entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Police		20**07**00
	Prison		20**08**00
	United States Secret Service (Treas) (USSS)		20**09**00
	Transportation Security Administration (TSA)		20**10**00
	Coast Guard		20**11**00
	US Marshals Service		20**12**00
	Internal Security Force		20**13**00

TABLE A-XXII. Land unit sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Tactical Satellite Communications	Capability	01	
Area	Capability	02	
Attack	Capability	03	
Biological	Capability	04	
Border	Capability	05	
Bridging	Capability	06	
Chemical	Capability	07	
Close Protection	Capability	08	
Combat	Capability	09	
Command and Control	Capability	10	
Communications Contingency Package	Capability	11	
Construction	Capability	12	
Cross Cultural Communication	Capability	13	
Crowd and Riot Control	Capability	14	
Decontamination	Capability	15	
Detention	Capability	16	
Direct Communications	Capability	17	
Diving	Capability	18	
Division	Capability	19	
Dog	Capability	20	
Drilling	Capability	21	
Electro–Optical	Capability	22	
Enhanced	Capability	23	
Explosive Ordnance Disposal (EOD)	Capability	24	
Fire Direction Center	Capability	25	
Force	Capability	26	
Forward	Capability	27	
Ground Station Module	Capability	28	
Landing Support	Capability	29	
{Reserved for future use}		30	
Maintenance	Capability	31	
Meteorological	Capability	32	
Mine Countermeasure	Capability	33	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXII. Land unit sector 1 modifier.

First Modifier	Category	Code	Remarks
Missile	Capability	34	
Mobile Advisor and Support	Capability	35	
Mobile Subscriber Equipment	Capability	36	
Mobility Support	Capability	37	
{Reserved for future use}		38	
Multinational	Capability	39	
Multinational Specialized Unit	Capability	40	
Multiple Rocket Launcher	Capability	41	
NATO Medical Role 1	Capability	42	
NATO Medical Role 2	Capability	43	
NATO Medical Role 3	Capability	44	
NATO Medical Role 4	Capability	45	
Naval	Capability	46	
Unmanned Aerial Systems (UAS)	Capability	47	
Nuclear	Capability	48	
Operations	Capability	49	
Radar	Capability	50	
Radio Frequency Identification (RFID) Interrogator / Sensor	Capability	51	
Radiological	Capability	52	
Search and Rescue	Capability	53	
Security	Capability	54	
Sensor	Capability	55	
Weapons	Capability	56	
Signals Intelligence	Capability	57	
Armored	Capability	58	
Single Rocket Launcher	Capability	59	
Smoke	Capability	60	
Sniper	Capability	61	
Sound Ranging	Capability	62	
Special Operations Forces (SOF)	Capability	63	
Special Weapons and Tactics	Capability	64	
Survey	Capability	65	
Tactical Exploitation	Capability	66	
Target Acquisition	Capability	67	
Topographic/Geospatial	Capability	68	
Utility	Capability	69	
Video Imagery (Combat Camera)	Capability	70	
Mobility Assault	Capability	71	
Amphibious Warfare Ship	Capability	72	
Load Handling System	Capability	73	
Palletized Load System	Capability	74	
Medevac	Capability	75	
Cyberspace	Capability	76	
Support	Capability	77	
Aviation	Capability	78	
Route, Reconnaissance, and Clearance	Capability	79	
Tilt-Rotor	Capability	80	
Command Post Node	Capability	81	
Joint Network Node	Capability	82	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXII. Land unit sector 1 modifier.

First Modifier	Category	Code	Remarks
Retransmission Site	Capability	83	
Assault	Capability	84	
Weapons	Capability	85	
Criminal Investigation Division	Capability	86	
Digital	Capability	87	
Network or Network Operations	Capability	88	
Airfield, Aerial Port of Debarkation, or Aerial Port of Embarkation	Capability	89	
Pipeline	Capability	90	
Postal	Capability	91	
Water	Capability	92	
Independent Command	Capability	93	
Theater	Capability	94	
Army or Theater Army	Capability	95	
Corps	Capability	96	
Brigade	Capability	97	
Headquarters or headquarters staff element	Capability	98	
{Reserved for future use}		99	
Version Extension Flag		-	

TABLE A-XXIII. Land unit sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Airborne	Mobility	01	
Arctic	Mobility	02	
Battle Damage Repair	Capability	03	
Bicycle Equipped	Mobility	04	
Casualty Staging	Capability	05	
Clearing	Capability	06	
Close Range	Capability	07	
Control	Capability	08	
Decontamination	Capability	09	
Demolition	Capability	10	
Dental	Capability	11	
Digital	Capability	12	
Enhanced Position Location Reporting System (EPLRS)	Capability	13	
Equipment	Capability	14	APP6
Heavy	Capability	15	
High Altitude	Capability	16	
Intermodal	Capability	17	
Intensive Care	Capability	18	
Light	Capability	19	
Laboratory	Capability	20	
Launcher	Capability	21	
Long Range	Capability	22	
Low Altitude	Capability	23	
Medium	Capability	24	
Medium Altitude	Capability	25	
Medium Range	Capability	26	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIII. Land unit sector 2 modifier.

Second Modifier	Category	Code	Remarks
Mountain	Capability	27	
High to Medium Altitude	Capability	28	
Multi–Channel	Capability	29	
Optical (Flash)	Capability	30	
Pack Animal	Capability	31	
Patient Evacuation Coordination	Capability	32	
Preventive Maintenance	Capability	33	
Psychological	Capability	34	
Radio Relay Line of Sight	Capability	35	
Railroad	Mobility	36	
Recovery (Unmanned Systems)	Capability	37	
Recovery (Maintenance)	Capability	38	
Rescue Coordination Center	Capability	39	
Riverine	Mobility	40	
Single Channel	Capability	41	
Ski	Capability	42	
Short Range	Capability	43	
Strategic	Capability	44	
Support	Capability	45	
Tactical	Capability	46	
Towed	Mobility	47	
Troop	Capability	48	
Vertical or Short Take–Off and Landing (VTOL/VSTOL)	Mobility	49	
Veterinary	Capability	50	
Wheeled	Mobility	51	
High to Low Altitude	Capability	52	
Medium to Low Altitude	Capability	53	
Attack	Capability	54	
Refuel	Capability	55	
Utility	Capability	56	
Combat Search and Rescue	Capability	57	
Guerilla	Capability	58	
Air Assault	Mobility	59	
Amphibious	Mobility	60	
Very Heavy	Capability	61	
Supply	Capability	62	
Cyberspace	Capability	63	
Navy Barge, Self-Propelled	Mobility	64	
Navy Barge, Not Self-Propelled	Mobility	65	
Launch	Mobility	66	
Landing Craft	Mobility	67	
Landing Ship	Mobility	68	
Service Craft/Yard	Mobility	69	
Tug Harbor	Mobility	70	
Ocean Going Tug Boat	Mobility	71	
Surface Deployment and Distribution Command	Capability	72	
Noncombatant Generic Vessel	Mobility	73	
Composite	Capability	74	
Shelter	Capability	75	
Light and Medium	Capability	76	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIII. Land unit sector 2 modifier.

Second Modifier	Category	Code	Remarks
Tracked	Mobility	77	
Security Force Assistance	Capability	78	
{Reserved for future use}		79-99	
Version Extension Flag		-	

A.5.5.6 Land civilian unit/organization (11).

TABLE A-XXIV. Land civilian unit/organization entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Civilian			**11**0000
	Environmental Protection		11**01**00
	Governmental Organization		11**02**00
	Individual		11**03**00
	Organization or Group		11**04**00
	Killing Victim		11**05**00
	Killing Victims		11**06**00
	Victim of an Attempted Crime		11**07**00
	Spy		11**08**00
	Composite Loss		11**09**00
	Emergency Medical Operation		11**10**00

TABLE A-XXV. Land civilian unit/organization sector 1 modifie.

First Modifier	Category	Code	Remarks
Unspecified		00	
Assassination	Crime	01	
Execution (Wrongful Killing)	Crime	02	
Murder Victims	Crime	03	
Hijacking/Hijacked	Crime	04	
Kidnapping	Crime	05	
Piracy	Crime	06	
Rape	Crime	07	
Civilian	Organization	08	
Displaced Person(s), Refugee(s) and Evacuee(s)	Organization	09	
Foreign Fighter(s)	Organization	10	
Gang Member or Gang	Organization	11	
Government Organization	Organization	12	
Leader or Leadership	Organization	13	
Nongovernmental Organization Member or Nongovernmental Organization	Organization	14	
Unwilling/Coerced Recruit	Organization	15	
Willing Recruit	Organization	16	
Religious or Religious Organization	Organization	17	
Targeted Individual or Organization	Organization	18	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXV. Land civilian unit/organization sector 1 modifier - Continued.

Terrorist or Terrorist Organization	Organization	19	
Speaker	Organization	20	
Accident	Composite Loss	21	
Combat	Composite Loss	22	
Other	Composite Loss	23	
Loot	Crime	24	
Hijacker	Crime	25	
Cyberspace	Capability	26	
{Reserved for future use}		27-99	
Version Extension Flag		-	

TABLE A-XXVI. Land civilian unit/organization sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Leader or Leadership	Organization	01	
Cyberspace	Capability	02	
{Reserved for future use}		03-99	
Version Extension Flag		-	

A.5.5.7 Land Equipment (15).

TABLE A-XXVII. Land equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Weapon/Weapon System			**11**0000
	Rifle		11**01**00
		Single Shot Rifle	1101**01**
		Semiautomatic Rifle	1101**02**
		Automatic Rifle	1101**03**
	Machine Gun		11**02**00
		Light	1102**01**
		Medium	1102**02**
		Heavy	1102**03**
	Grenade Launcher		11**03**00
		Light	1103**01**
		Medium	1103**02**
		Heavy	1103**03**
	Flame Thrower		11**04**00
	Air Defense Gun		11**05**00
		Light	1105**01**
		Medium	1105**02**
		Heavy	1105**03**
	Antitank Gun		11**06**00
		Light	1106**01**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVII. Land equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Medium	1106**02**
		Heavy	1106**03**
	Direct Fire Gun		11**07**00
		Light	1107**01**
		Medium	1107**02**
		Heavy	1107**03**
	Recoilless Gun		11**08**00
		Light	1108**01**
		Medium	1108**02**
		Heavy	1108**03**
	Howitzer		11**09**00
		Light	1109**01**
		Medium	1109**02**
		Heavy	1109**03**
	Missile Launcher		11**10**00
		Light	1110**01**
		Medium	1110**02**
		Heavy	1110**03**
	Air Defense Missile Launcher		11**11**00
		Light	1111**01**
		Light, Light Transporter-Launcher and Radar (TLAR)	1111**02**
		Light, Light Tactical Landing Approach Radar (TELAR)	1111**03**
		Medium	1111**04**
		Medium, TLAR	1111**05**
		Medium, TELAR	1111**06**
		Heavy	1111**07**
		Heavy, TLAR	1111**08**
		Heavy, TELAR	1111**09**
	Antitank Missile Launcher		11**12**00
		Light	1112**01**
		Medium	1112**02**
		Heavy	1112**03**
	Surface-to-Surface Missile Launcher		11**13**00
		Light	1113**01**
		Medium	1113**02**
		Heavy	1113**03**
	Mortar		11**1400**
		Light	1114**01**
		Medium	1114**02**
		Heavy	1114**03**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVII. Land equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Single Rocket Launcher		11**15**00
		Light	1115**01**
		Medium	1115**02**
		Heavy	1115**03**
	Multiple Rocket Launcher		11**16**00
		Light	1116**01**
		Medium	1116**02**
		Heavy	1116**03**
	Antitank Rocket Launcher		11**17**00
		Light	1117**01**
		Medium	1117**02**
		Heavy	1117**03**
	Nonlethal Weapon		11**18**00
	Taser		11**19**00
	Water Cannon		11**20**00
Vehicle			**12**0000
	Armored		12**01**00
		Armored Fighting Vehicle	1201**01**
		Armored Fighting Vehicle Command and Control	1201**02**
		Armored Personnel Carrier	1201**03**
		Armored Personnel Carrier Ambulance	1201**04**
		Armored Protected Vehicle	1201**05**
		Armored Protected Vehicle Recovery	1201**06**
		Armored Protected Vehicle Medical Evacuation	1201**07**
		Armored Personnel Carrier, Recovery	1201**08**
		Combat Service Support Vehicle	1201**09**
		Light Wheeled Armored Vehicle	1201**10**
		Light Armor Reconnaissance	1201**11**
	Tank		12**02**00
		Light	1202**01**
		Medium	1202**02**
		Heavy	1202**03**
	Tank Recovery Vehicle		12**03**00
		Light	1203**01**
		Medium	1203**02**
		Heavy	1203**03**
Engineer Vehicle and Equipment			**13**0000
	Bridge		13**01**00
	Bridge Mounted on Utility Vehicle		13**02**00
	Fixed Bridge		13**03**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVII. Land equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Floating Bridge		13**04**00
	Folding Girder Bridge		13**05**00
	Hollow Deck Bridge		13**06**00
	Drill		13**07**00
		Drill Mounted on Utility Vehicle	1307**01**
	Earthmover		13**08**00
		Multifunctional Earthmover/Digger	1308**01**
	Mine Clearing Equipment		13**09**00
		Trailer Mounted	1309**01**
		Mine Clearing Equipment on Tank Chassis	1309**02**
		Assault Breacher Vehicle (ABV) with Combat Dozer Blade	1309**03**
		Medium Capability Equipment	1309**04**
		Heavy Capability Equipment	1309**05**
	Mine Laying Equipment		13**10**00
		Mine Laying Equipment on Utility Vehicle	1310**01**
		Armored Carrier with Volcano	1310**02**
		Truck Mounted with Volcano	1310**03**
	Dozer		13**11**00
		Dozer, Armored	1311**01**
	Armored Assault		13**12**00
	Armored Engineer Recon Vehicle (AERV)		13**13**00
	Backhoe		13**14**00
	Construction Vehicle		13**15**00
	Ferry Transporter		13**16**00
Utility Vehicle			**14**0000
	Vehicle (Generic)		14**01**00
	Medical		14**02**00
	Medical Evacuation		14**03**00
	Mobile Emergency Physician		14**04**00
	Bus		14**05**00
	Semi–Trailer and Truck		14**06**00
		Light	1406**01**
		Medium	1406**02**
		Heavy	1406**03**
	Limited Cross Country Truck		14**07**00
	Cross Country Truck		14**08**00
	Petroleum, Oil and Lubricant		14**09**00
	Water		14**10**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVII. Land equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Amphibious Utility Wheeled Vehicle		14**11**00
	Tow Truck		14**12**00
		Light	1412**01**
		Heavy	1412**02**
Train			**15**0000
	Locomotive		15**01**00
	Railcar		15**02**00
Civilian Vehicle			**16**0000
	Automobile		16**01**00
		Compact	1601**01**
		Midsize	1601**02**
		Sedan	1601**03**
	Open-Bed Truck		16**02**00
		Pickup	1602**01**
		Small	1602**02**
		Large	1602**03**
	Multiple Passenger Vehicle		16**03**00
		Van	1603**01**
		Small Bus	1603**02**
		Large Bus	1603**03**
	Utility Vehicle		16**04**00
		Sport Utility Vehicle (SUV)	1604**01**
		Small Box Truck	1604**02**
		Large Box Truck	1604**03**
	Jeep Type Vehicle		16**05**00
		Small/Light	1605**01**
		Medium	1605**02**
		Large/Heavy	1605**03**
	Tractor Trailer Truck with Box		16**06**00
		Small/Light	1606**01**
		Medium	1606**02**
		Large/Heavy	1606**03**
	Tractor Trailer Truck with Flatbed Trailer		16**07**00
		Small/Light	1607**01**
		Medium	1607**02**
		Large/Heavy	1607**03**
	Known Insurgent Vehicle		16**08**00
	Drug Vehicle		16**09**00
Law Enforcement			**17**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVII. Land equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)		17**01**00
	Border Patrol		17**02**00
	Customs Service		17**03**00
	Drug Enforcement Administration (DEA)		17**04**00
	Department of Justice (DOJ)		17**05**00
	Federal Bureau of Investigation (FBI)		17**06**00
	Police		17**07**00
	United States Secret Service (Treas) (USSS)		17**08**00
	Transportation Security Administration (TSA)		17**09**00
	Coast Guard		17**10**00
	US Marshals Service		17**11**00
Pack Animals			**18**0000
Missile Support			**19**0000
	Transloader		19**01**00
	Transporter		19**02**00
	Crane/Loading Device		19**03**00
	Propellant Transporter		19**04**00
	Warhead Transporter		19**05**00
Other Equipment			**20**0000
	Antennae		20**01**00
	Bomb		20**02**00
	Booby Trap		20**03**00
	CBRN Equipment		20**04**00
	Computer System		20**05**00
	Command Launch Equipment (CLE)		20**06**00
	Generator Set		20**07**00
	Ground-based Midcourse Defense (GMD) Fire Control (GFC) Center		20**08**00
	In-Flight Interceptor Communications System (IFICS) Data Terminal (IDT)		20**09**00
	Laser		20**10**00
	Military Information Support Operations (MISO)		20**11**00
	Sustainment Shipments		20**12**00
	Tent		20**13**00
		Civilian	2013**01**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVII. Land equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Military	201302
	Unit Deployment Shipments		201400
	Emergency Medical Operation		201500
		Medical Evacuation Helicopter	201501
Land Mines			210000
	Land Mine		210100
	Antipersonnel Land mine (APL)		210200
	Antitank Mine		210300
	Improvised Explosives Device (IED)		210400
	Less Than Lethal		210500
Sensors			220000
	Sensor		220100
	Sensor Emplaced		220200
	Radar		220300
Emergency Operation			230000
	Ambulance		230100
	Fire Fighting/Fire Protection		230200
Manual Track			240000
Rotary Wing			250000

TABLE A-XXVIII. Land equipment sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Biological	Sensor Type	01	
Chemical	Sensor Type	02	
Early Warning Radar	Sensor Type	03	
Intrusion	Sensor Type	04	
Nuclear	Sensor Type	05	
Radiological	Sensor Type	06	
Upgraded Early Warning Radar	Sensor Type	07	
Hijacking/Hijacked	Crime	08	
Civilian	Organization	09	
Tilt-Rotor	Capability	10	
{Reserved for future use}		11	
Multi-purpose Blade	Capability	12	
Tank-width Mine Plow	Capability	13	
Bridge	Capability	14	
Cyberspace	Capability	15	
Armored	Capability	16	
Attack	Capability	17	
Cargo	Capability	18	
Maintenance	Capability	19	
MedEvac	Capability	20	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVIII. Land equipment sector 1 modifier.

Petroleum, oil, and lubricants (POL)	Capability	21	
Utility	Capability	22	
Water	Capability	23	
Robotic	Capability	24	
{Reserved for future use}		25-99	
Version Extension Flag		-	

TABLE A-XXIX. Land equipment sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Cyberspace	Capability	01	
Light	Capability	02	
Medium	Capability	03	
Railway	Capability	04	
Tracked	Capability	05	
Tractor Trailer	Capability	06	
Wheeled LTD	Capability	07	
Wheeled X	Capability	08	
Robotic	Capability	09	
{Reserved for future use}		10-99	
Version Extension Flag		-	

A.5.5.8 Land installations (20).

TABLE A-XXX. Land installation entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Military/Civilian			**11**0000
	Aircraft Production/Assembly		11**01**00
	Ammunition and Explosives Production		11**02**00
	Ammunition Cache		11**03**00
	Armament Production		11**04**00
	Black List Location		11**05**00
	Chemical, Biological, Radiological and Nuclear (CBRN)		11**06**00
	Engineering Equipment Production		11**07**00
		Bridge	110701
	Equipment Manufacture		11**08**00
	Government Leadership		11**09**00
	Gray List Location		11**10**00
	Mass Grave Site		11**11**00
	Materiel		11**12**00
	Mine		11**13**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXX. Land installation entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Missile and Space System Production		11**14**00
	Nuclear (Non CBRN Defense)		11**15**00
	Printed Media		11**16**00
	Safe House		11**17**00
	White List Location		11**18**00
	Tented Camp		11**19**00
		Displaced Persons/ Refugee/Evacuees Camp	1119**01**
		Training Camp	1119**02**
	Warehouse/Storage Facility		11**20**00
	Law Enforcement		11**21**00
		Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)	1121**01**
		Border Patrol	1121**02**
		Customs Service	1121**03**
		Drug Enforcement Administration (DEA)	1121**04**
		Department of Justice (DOJ)	1121**05**
		Federal Bureau of Investigation (FBI)	1121**06**
		Police	1121**07**
		Prison	1121**08**
		United States Secret Service (Treas) (USSS)	1121**09**
		Transportation Security Administration (TSA)	1121**10**
		Coast Guard	1121**11**
		US Marshals Service	1121**12**
	Emergency Operation		11**22**00
		Fire Station	1122**01**
		Emergency Medical Operation	1122**02**
Infrastructure			**12**0000
	Agriculture and Food Infrastructure		12**01**00
		Agriculture Laboratory	1201**01**
		Animal Feedlot	1201**02**
		Commercial Food Distribution Center	1201**03**
		Farm/Ranch	1201**04**
		Food Distribution	1201**05**
		Food Production Center	1201**06**
		Food Retail	1201**07**
		Grain Storage	1201**08**
	Banking Finance and Insurance Infrastructure		12**02**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXX. Land installation entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		ATM	1202**01**
		Bank	1202**02**
		Bullion Storage	1202**03**
		Economic Infrastructure Asset	1202**04**
		Federal Reserve Bank	1202**05**
		Financial Exchange	1202**06**
		Financial Services, Other	1202**07**
	Commercial Infrastructure		12**03**00
		Chemical Plant	1203**01**
		Firearms Manufacturer	1203**02**
		Firearms Retailer	1203**03**
		Hazardous Material Production	1203**04**
		Hazardous Material Storage	1203**05**
		Industrial Site	1203**06**
		Landfill	1203**07**
		Pharmaceutical Manufacturer	1203**08**
		Contaminated Hazardous Waste Site	1203**09**
		Toxic Release Inventory	1203**10**
	Educational Facilities Infrastructure		12**04**00
		College/University	1204**01**
		School	1204**02**
	Energy Facility Infrastructure		12**05**00
		Electric Power	1205**01**
		Generation Station	1205**02**
		Natural Gas Facility	1205**03**
		Petroleum Facility	1205**04**
		Petroleum/Gas/Oil	1205**05**
		Propane Facility	1205**06**
	Government Site Infrastructure		12**06**00
	Medical Infrastructure		12**07**00
		Medical	1207**01**
		Medical Treatment Facility (Hospital)	1207**02**
	Military Infrastructure		12**08**00
		Military Armory	1208**01**
		Military Base	1208**02**
	Postal Services Infrastructure		12**09**00
		Postal Distribution Center	1209**01**
		Post Office	1209**02**
	Public Venues Infrastructure		12**10**00
		Enclosed Facility (Public Venue)	1210**01**
		Open Facility (Public Venue)	1210**02**
		Recreational Area	1210**03**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXX. Land installation entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Religious Institution	1210**04**
	Special Needs Infrastructure		12**11**00
		Adult Day Care	1211**01**
		Child Day Care	1211**02**
		Elder Care	1211**03**
	Telecommunications Infrastructure		12**12**00
		Broadcast Transmitter Antennae	1212**01**
		Telecommunications	1212**02**
		Telecommunications Tower	1212**03**
	Transportation Infrastructure		12**13**00
		Airport/Air Base	1213**01**
		Air Traffic Control Facility	1213**02**
		Bus Station	1213**03**
		Ferry Terminal	1213**04**
		Helicopter Landing Site	1213**05**
		Maintenance Facility	1213**06**
		Railhead/Railroad Station	1213**07**
		Rest Stop	1213**08**
		Sea Port/Naval Base	1213**09**
		Ship Yard	1213**10**
		Toll Facility	1213**11**
		Traffic Inspection Facility	1213**12**
		Tunnel	1213**13**
	Water Supply Infrastructure		12**14**00
		Control Valve	1214**01**
		Dam	1214**02**
		Discharge Outfall	1214**03**
		Ground Water Well	1214**04**
		Pumping Station	1214**05**
		Reservoir	1214**06**
		Storage Tower	1214**07**
		Surface Water Intake	1214**08**
		Wastewater Treatment Facility	1214**09**
		Water	1214**10**
		Water Treatment	1214**11**

TABLE A-XXXI. Land installation sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Biological	CBRN Type	01	
Chemical	CBRN Type	02	
Nuclear	CBRN Type	03	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXI. Land installation sector 1 modifier.

Radiological	CBRN Type	04	
Decontamination	CBRN Type	05	
Coal	Electric Power Type	06	
Geothermal	Electric Power Type	07	
Hydroelectric	Electric Power Type	08	
Natural Gas	Electric Power Type	09	
Petroleum	Electric Power Type	10	
Civilian	Operation	11	
Civilian Telephone	Telecommunication Type	12	
Civilian Television	Telecommunication Type	13	
Cyberspace	Capability	14	
{Reserved for future use}		15-99	
Version Extension Flag		-	

TABLE A-XXXII. Land installation sector 2 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Biological Warfare Production	Capability	01	
Chemical Warfare Production	Capability	02	
Nuclear Warfare Production	Capability	03	
Radiological Warfare Production	Capability	04	
Atomic Energy Reactor	Capability	05	
Nuclear Material Production	Capability	06	
Nuclear Material Storage	Capability	07	
Weapons Grade Production	Capability	08	
Cyberspace	Capability	09	
{Reserved for future use}		10-99	
Version Extension Flag		-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.9 Control measure (25).

TABLE A-XXXIII. Control measure entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
Command and Control Lines				**11**0000
	Boundary		Line	11**01**00
	Light Line		Line	11**02**00
	Engineer Work Line		Line	11**03**00
Command and Control Areas				**12**0000
	Area of Operations		Area	12**01**00
	Named Area of Interest		Area	12**02**00
	Targeted Area of Interest		Area	12**03**00
	Airfield Zone		Area	12**04**00
	Base Camp		Area	12**05**00
	Guerrilla Base		Area	12**06**00
Command and Control Points				**13**0000
	Action Point (General)		Point	13**01**00
	Amnesty Point		Point	13**02**00
	Checkpoint		Point	13**03**00
	Center of Main Effort		Point	13**04**00
	Contact Point		Point	13**05**00
	Coordinating Point		Point	13**06**00
	Decision Point		Point	13**07**00
	Distress Call		Point	13**08**00
	Entry Control Point		Point	13**09**00
	Fly-To-Point			13**10**00
		Sonobuoy	Point	1310**01**
		Weapon	Point	1310**02**
		Normal	Point	1310**03**
	Linkup Point		Point	13**11**00
	Passage Point		Point	13**12**00
	Point of Interest		Point	13**13**00
		Launch Event	Point	1313**01**
	Rally Point		Point	13**14**00
	Release Point		Point	13**15**00
	Start Point		Point	13**16**00
	Special Point		Point	13**17**00
	Waypoint		Point	13**18**00
	Airfield		Point	13**19**00
	Target Handover		Point	13**20**00
	Key Terrain		Point	13**21**00
Maneuver Lines				**14**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Forward Line of Troops		Line	140100
	{Reserved for future use}			140200
	Phase Line		Line	140300
	Forward Edge of the Battle Area		Line	140400
	Principle Direction of Fire		Line	140500
	Direction of Attack		Line	140600
		Friendly Aviation	Line	140601
		Friendly Main Attack /Decisive	Line	140602
		Friendly Supporting Attack	Line	140603
		Feint	Line	140605
	Final Coordination Line		Line	140700
	Infiltration Lane		Line	140800
	Limit of Advance		Line	140900
	Line of Departure		Line	141000
	Line of Departure/Line of Contact		Line	141100
	Probable Line of Deployment		Line	141200
	Airhead Line		Line	141300
	Bridgehead Line		Line	141400
	Holding Line		Line	141500
	Release Line		Line	141600
	Ambush		Line	141700
Maneuver Areas				150000
	Area			150100
	Assembly Area		Area	150200
	Occupied Assembly Area		Area	150300
	{Reserved for future use}			150400
	Action Area			150500
		Joint Tactical Action Area (JTAA)	Area	150501
		Submarine Action Area (SAA)	Area	150502
		Submarine-Generated Action Area (SGAA)	Area	150503
	Drop Zone		Area	150600
	Extraction Zone		Area	150700
	Landing Zone		Area	150800
	Pick–Up Zone		Area	150900
	Fortified Area		Area	151000
	Limited Access Area		Area	151100
	Battle Position		Area	151200
		Prepared (P) but not Occupied	Area	151202

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Strong Point	Area	1512**03**
		Contain	Area	1512**04**
		Retain	Area	1512**05**
	Engagement Area (EA)		Area	15**13**00
	Axis of Advance			15**14**00
		Friendly Airborne/Aviation	Line	1514**01**
		Attack Helicopter	Line	1514**02**
		Main Attack	Line	1514**03**
		Supporting Attack	Line	1514**04**
	Assault Position		Area	15**15**00
	Attack Position		Area	15**16**00
	Objective		Area	15**17**00
	Encirclement			15**18**00
	Penetration Box		Area	15**19**00
	Attack by Fire Position		Area	15**20**00
	Support by Fire		Area	15**21**00
	Search Area/Reconnaissance Area		Area	15**22**00
Maneuver Points				**16**0000
	Observation Post/Outpost (unspecified)		Point	16**01**00
	Observation Post/Outpost (specified)		Point	16**02**00
		Reconnaissance Outpost	Point	1602**01**
		Forward Observer/Spotter Outpost/Position	Point	1602**02**
		CBRN Observation Outpost	Point	1602**03**
		Sensor Outpost /Listening Post	Point	1602**04**
		Combat Outpost	Point	1602**05**
	Target Reference Point		Point	16**03**00
	Point of Departure		Point	16**04**00
Airspace Control (Corridors) Areas				**17**0000
	Air Corridor		Area	17**01**00
	Low Level Transit Route		Area	17**02**00
	Minimum–Risk Route		Area	17**03**00
	Safe Lane		Area	17**04**00
	Standard Use Army Aircraft Flight Route		Area	17**05**00
	Transit Corridor		Area	17**06**00
	Special Corridor		Area	17**07**00
	Base Defense Zone		Area	17**08**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	High–Density Airspace Control Zone		Area	17**09**00
	Restricted Operations Zone		Area	17**10**00
	Air-to-Air Restricted Operating Zone		Area	17**11**00
	Unmanned Aircraft Restricted Operating Zone		Area	17**12**00
	Weapon Engagement Zone		Area	17**13**00
	Fighter Engagement Zone		Area	17**14**00
	Joint Engagement Zone		Area	17**15**00
	Missile Engagement Zone		Area	17**16**00
	Low Altitude Missile Engagement Zone		Area	17**17**00
	High Altitude Missile Engagement Zone		Area	17**18**00
	Short Range Air Defense Engagement Zone		Area	17**19**00
	Weapons Free Zone		Area	17**20**00
Airspace Control Points				**18**0000
	Air Control Point		Point	18**01**00
	Communications Checkpoint		Point	18**02**00
	Downed Aircraft Pick–up Point		Point	18**03**00
	Pop–up Point		Point	18**04**00
	Air Control Rendezvous		Point	18**05**00
	Tactical Air Navigation (TACAN)		Point	18**06**00
	Combat Air Patrol (CAP)Station		Point	18**07**00
	Airborne Early Warning (AEW) Station		Point	18**08**00
	ASW (Helo and F/W) Station		Point	18**09**00
	Strike Initial Point		Point	18**10**00
	Replenishment Station		Point	18**11**00
	Tanking		Point	18**12**00
	Antisubmarine Warfare, Rotary Wing		Point	18**13**00
	Surface Combat Air Patrol (SUCAP) – Fixed Wing		Point	18**14**00
	SUCAP – Rotary Wing		Point	18**15**00
	MIW – Fixed Wing		Point	18**16**00
	MIW – Rotary Wing		Point	18**17**00
	Tomcat		Point	18**18**00
	Rescue		Point	18**19**00
	Unmanned Aerial System (UAS/UA)		Point	18**20**00
	Vertical Takeoff and Landing (VTOL) Tactical Unmanned Aircraft (VTUA)		Point	18**21**00
	Orbit		Point	18**22**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Orbit – Figure Eight		Point	18**23**00
	Orbit – Race Track		Point	18**24**00
	Orbit – Random Closed		Point	18**25**00
Airspace Control Lines				**19**0000
	Identification Friend or Foe Off Line		Line	19**01**00
	Identification Friend or Foe On Line		Line	19**02**00
Maritime Control Areas				**20**0000
	Launch Area			20**01**00
		Ellipse/Circle	Area	2001**01**
	Defended Area			20**02**00
		Ellipse/Circle	Area	2002**01**
		Rectangle	Area	2002**02**
	No Attack (NOTACK) Zone		Area	20**03**00
	Ship Area of Interest		Point	20**04**00
		Ellipse/Circle	Area	2004**01**
		Rectangle	Area	2004**02**
	Active Maneuver Area		Point	20**05**00
	Cued Acquisition Doctrine		Point	20**06**00
	Radar Search Doctrine		Point	20**07**00
Maritime Control Points				**21**0000
	Plan Ship		Point	21**01**00
	Aim Point		Point	21**02**00
	Defended Asset		Point	21**03**00
	Drop Point		Point	21**04**00
	Entry Point		Point	21**05**00
	Air Detonation		Point	21**06**00
	Ground Zero		Point	21**07**00
	Impact Point		Point	21**08**00
	Predicted Impact Point		Point	21**09**00
	Launched Torpedo		Point	21**10**00
	Missile Detection Point		Point	21**11**00
	Acoustic Countermeasure (Decoy)		Point	21**12**00
	Electronic Countermeasures (ECM) Decoy		Point	21**13**00
	Brief Contact		Point	21**14**00
	Datum Lost Contact		Point	21**15**00
	BT Buoy Drop		Point	21**16**00
	Reported Bottomed Sub		Point	21**17**00
	Moving Haven		Point	21**18**00
	Screen Center		Point	21**19**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Lost Contact		Point	21**20**00
	Sinker		Point	21**21**00
	Trial Track		Point	21**22**00
	Acoustic Fix		Point	21**23**00
	Electromagnetic Fix		Point	21**24**00
	Electromagnetic – Magnetic Anomaly Detection (MAD)		Point	21**25**00
	Optical Fix		Point	21**26**00
	Formation		Point	21**27**00
	Harbor		Point	21**28**00
	Harbor Entrance Point		Point	21**29**00
		A	Point	2129**01**
		Q	Point	2129**02**
		X	Point	2129**03**
		Y	Point	2129**04**
	Dip Position		Point	21**30**00
	Search		Point	21**31**00
	Search Area		Point	21**32**00
	Search Center		Point	21**33**00
	Navigational Reference Point		Point	21**34**00
	Sonobuoy		Point	21**35**00
		Ambient Noise	Point	2135**01**
		Air Transportable Communication	Point	2135**02**
		Barra	Point	2135**03**
		Bathythermograph Transmitting	Point	2135**04**
		Command Active Multi-Beam (CAMBS)	Point	2135**05**
		Command Active Sonobuoy Directional Command Active Sonobuoy System (CASS)	Point	2135**06**
		Directional Frequency Analysis and Recording (DIFAR)	Point	2135**07**
		Directional Command Active Sonobuoy System (DICASS)	Point	2135**08**
		Expendable Reliable Acoustic Path Sonobuoy (ERAPS)	Point	2135**09**
		Expired	Point	2135**10**
		Kingpin	Point	2135**11**
		Low Frequency Analysis and Recording (LOFAR)	Point	2135**12**
		Pattern Center	Point	2135**13**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Range Only	Point	2135**14**
		Vertical Line Array Directional Frequency Analysis and Recording (DIFAR)	Point	2135**15**
	Reference Point		Point	21**36**00
	Special Point		Point	21**37**00
	Navigational Reference Point(Points)		Point	21**38**00
	Data Link Reference Point		Point	21**39**00
	{Reserved for future use}			21**40**00
	Vital Area Center		Point	21**41**00
	Corridor Tab Point		Point	21**42**00
	Enemy Point		Point	21**43**00
	Marshall Point		Point	21**44**00
	Position and Intended Movement (PIM)		Point	21**45**00
	Pre-Landfall Waypoint		Point	21**46**00
	Estimated Position (EP)		Point	21**47**00
	Waypoint		Point	21**48**00
	General Sea Subsurface Station		Point	21**49**00
	Submarine Sea Subsurface Station		Point	21**50**00
	Submarine Antisubmarine Warfare Sea Subsurface Station		Point	21**51**00
	Unmanned Underwater Vehicle Sea Subsurface Station		Point	21**52**00
	Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Subsurface Station		Point	21**53**00
	Mine Warfare Unmanned Underwater Vehicle Sea Subsurface Station		Point	21**54**00
	Sea Surface Warfare Unmanned Underwater Vehicle Subsurface Station		Point	21**55**00
	General Sea Surface Station		Point	21**56**00
	Antisubmarine Warfare (ASW) Sea Surface Station		Point	21**57**00
	Mine Warfare Sea Surface Station		Point	21**58**00
	Non-Combatant Sea Surface Station		Point	21**59**00
	Picket Sea Surface Station		Point	21**60**00
	Rendezvous Sea Surface Station		Point	21**61**00
	Replenishment at Sea Surface Station		Point	21**62**00
	Rescue Sea Surface Station		Point	21**63**00
	Surface Warfare Sea Surface Station		Point	21**64**00
	Unmanned Underwater Vehicle Sea Surface Station		Point	21**65**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Surface Station		Point	21**66**00
	Mine Warfare Unmanned Underwater Vehicle Sea Surface Station		Point	21**67**00
	Remote Multi-Mission Vehicle Mine Warfare Unmanned Underwater Sea Surface Station		Point	21**68**00
	Surface Warfare Mine Warfare Unmanned Underwater Vehicle Sea Surface Station		Point	21**69**00
	Shore Control Station		Point	21**70**00
	General Route		Point	21**71**00
	Diversion Route		Point	21**72**00
	Position and Intended Movement (PIM) Route		Point	21**73**00
	Picket Route		Point	21**74**00
	Point R Route		Point	21**75**00
	Rendezvous Route		Point	21**76**00
	Waypoint Route		Point	21**77**00
	Clutter, Stationary or Cease Reporting		Point	21**78**00
	Tentative or Provisional Track		Point	21**79**00
	Distressed Vessel		Point	21**80**00
	Ditched Aircraft/Downed Aircraft		Point	21**81**00
	Person in Water/Bailout		Point	21**82**00
	Iceberg		Point	21**83**00
	Navigational		Line	21**84**00
	Oil Rig		Point	21**85**00
	Sea Mine–Like		Point	21**86**00
	Bottom Return/Non-Mine, Mine-Like Bottom Object (NOMBO)		Point	21**87**00
	Bottom Return/Non-Mine, Mine-Like Bottom Object (NOMBO)/Installation Manmade		Point	21**88**00
		Marine Life	Point	21**89**00
		Sea Anomaly (Wake, Current, Knuckle)	Point	21**90**00
		Bottom Return/Non-MILCO, Wreck, Dangerous	Point	21**91**00
		Bottom Return/Non-MILCO, Wreck, Non Dangerous	Point	21**92**00
Maritime Control Lines				**22**0000
	Bearing Line		Line	22**01**00
		Electronic	Line	2201**01**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Electronic Warfare (EW)	Line	220102
		Acoustic	Line	220103
		Acoustic (Ambiguous)	Line	220104
		Torpedo	Line	220105
		Electro-Optical Intercept	Line	220106
		Jammer	Line	220107
		Radio Direction Finder (RDF)	Line	220108
{reserved for future use}				230000
Fires Areas				240000
	Airspace Coordination Area			240100
		Irregular	Area	240101
		Rectangular	Area	240102
		Circular	Area	240103
	Free Fire Area			240200
		Irregular	Area	240201
		Rectangular	Area	240202
		Circular	Area	240203
	No Fire Area			240300
		Irregular	Area	240301
		Rectangular	Area	240302
		Circular	Area	240303
	Restricted Fire Area			240400
		Irregular	Area	240401
		Rectangular	Area	240402
		Circular	Area	240403
	Position Area For Artillery (PAA)			240500
		Rectangular	Area	240501
		Circular	Area	240502
	Point Targets			240600
		Point or Single Target	Point	240601
		Nuclear Target	Point	240602
		Target-Recorded	Point	240603
	Linear Targets			240700
		Linear Target	Line	240701
		Linear Smoke Target	Line	240702
		Final Protective Fire (FPF)	Line	240703
	Area Targets			240800
		Area Target	Area	240801
		Rectangular Target	Area	240802
		Circular Target	Area	240803
		Rectangular Target – Single Target	Area	240804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Series or Groups of Targets	Area	2408**05**
		Smoke	Area	2408**06**
		{reserved for future use}		2408**07**
		Bomb Area	Area	2408**08**
	Fire Support Station		Point	24**09**00
	Fire Support Area			24**10**00
		Irregular	Area	2410**01**
		Rectangular	Area	2410**02**
		Circular	Area	2410**03**
	Artillery Target Intelligence Zone			24**11**00
		Irregular	Area	2411**01**
		Rectangular	Area	2411**02**
		Circular	Area	2411**03**
	Call for Fire Area			24**12**00
		Irregular	Area	2412**01**
		Rectangular	Area	2412**02**
		Circular	Area	2412**03**
	Censor Zone			24**13**00
		Irregular	Area	2413**01**
		Rectangular	Area	2413**02**
		Circular	Area	2413**03**
	Critical Friendly Zone			24**14**00
		Irregular	Area	2414**01**
		Rectangular	Area	2414**02**
		Circular	Area	2414**03**
	Dead Space Area			24**15**00
		Irregular	Area	2415**01**
		Rectangular	Area	2415**02**
		Circular	Area	2415**03**
	Sensor Zone			24**16**00
		Irregular	Area	2416**01**
		Rectangular	Area	2416**02**
		Circular	Area	2416**03**
	Target Build–up Area			24**17**00
		Irregular	Area	2417**01**
		Rectangular	Area	2417**02**
		Circular	Area	2417**03**
	Target Value Area			24**18**00
		Irregular	Area	2418**01**
		Rectangular	Area	2418**02**
		Circular	Area	2418**03**
	Zone of Responsibility			24**19**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Irregular	Area	2419**01**
		Rectangular	Area	2419**02**
		Circular	Area	2419**03**
	Terminally Guided Munition Footprint (TGMF)		Area	24**20**00
	Weapon/Sensor Range fan, Circular		Area	24**21**00
	Weapon/Sensor Range fan, Sector		Area	24**22**00
	Kill Box			24**23**00
		Irregular, Blue	Area	2423**01**
		Rectangular, Blue	Area	2423**02**
		Circular, Blue	Area	2423**03**
		Irregular, Purple	Area	2423**04**
		Rectangular, Purple	Area	2423**05**
		Circular, Purple	Area	2423**06**
Fires Points				**25**0000
	Firing Point		Point	25**01**00
	Hide Point		Point	25**02**00
	Launch Point		Point	25**03**00
	Reload Point		Point	25**04**00
	Survey Control Point		Point	25**05**00
	Known Point		Point	25**06**00
Fire Lines				**26**0000
	Fire Support Coordination Line (FSCL)		Line	26**01**00
	Coordinated Fire Line (CFL)		Line	26**02**00
	No Fire Line		Line	26**03**00
	Battlefield Coordination Line		Line	26**04**00
	Restrictive Fire Line		Line	26**05**00
	Munition Flight Path		Line	26**06**00
Protection Areas				**27**0000
	Obstacle Belt		Area	27**01**00
	Obstacle Zone		Area	27**02**00
	Obstacle Free Zone		Area	27**03**00
	Obstacle Restricted Zone		Area	27**04**00
	Obstacle Effects			27**05**00
		Block	Area	2705**01**
		Disrupt	Area	2705**02**
		Fix	Line	2705**03**
		Turn	Line	2705**04**
	Obstacle Bypass			27**06**00
		Easy	Point	2706**01**
		Difficult	Point	2706**02**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Impossible	Point	270**603**
	Minefields			270**700**
		Static Depiction	Point	270**701**
		Dynamic Depiction	Area	270**707**
	Mined Area		Area	270**800**
		Fenced	Area	270**801**
	Unexploded Explosive Ordnance (UXO) Area		Area	271**000**
	Bridge or Gap		Line	271**100**
	Roadblocks, Craters and Blown Bridges			271**200**
		Planned	Line	2712**01**
		Explosives, State of Readiness 1 (Safe)	Line	2712**02**
		Explosives, State of Readiness 2 (armed but passable)	Line	2712**03**
		Roadblock Complete (Executed)	Line	2712**04**
	Assault Crossing		Line	271**300**
	{Reserved for future use}			271**400**
	Ford Easy		Line	271**500**
	Ford Difficult		Line	271**600**
	Biological Contaminated Area		Area	271**700**
	Chemical Contaminated Area		Area	271**800**
	Nuclear Contaminated Area		Area	271**900**
	Radiological Contaminated Area		Area	272**000**
	Minimum Safe Distance Zone		Area	272**100**
	Multiple Strikes – STRIKWARN		Area	2721**01**
	Radiation Dose Rate Contour Lines		Area	272**200**
Protection Points				**28**0000
	Abatis		Point	28**0100**
	Antipersonnel Mine		Point	28**0200**
		Antipersonnel Mine with Directional Effects	Point	2802**01**
	Antitank Mine		Point	28**0300**
	Antitank Mine with Anti-handling Device		Point	28**0400**
	Wide Area Antitank Mine		Point	28**0500**
	Unspecified Mine		Point	28**0600**
	Booby Trap		Point	28**0700**
	Engineer Regulating Point		Point	28**0800**
	Shelter		Point	28**0900**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Shelter Above Ground		Point	28**10**00
	Below Ground Shelter		Point	28**11**00
	Fort		Point	28**12**00
	Chemical Event		Point	28**13**00
	Biological Event		Point	28**14**00
	Nuclear Event		Point	28**15**00
	Nuclear Fallout Producing Event		Point	28**16**00
	Radiological Event		Point	28**17**00
	General Decontamination Point/Site		Point	28**18**00
		Alternate	Point	2818**01**
		Equipment	Point	2818**02**
		Troop	Point	2818**03**
		Equipment/Troop	Point	2818**04**
		Operational	Point	2818**05**
		Thorough	Point	2818**06**
		Main Equipment	Point	2818**07**
		Forward Troop	Point	2818**08**
		Wounded Personnel	Point	2818**09**
	Tetrahedrons, Dragons Teeth, and Other Similar Obstacles			28**19**00
		Fixed and Prefabricated	Point	2819**01**
		Movable	Point	2819**02**
		Movable and Prefabricated	Point	2819**03**
	Vertical Obstructions			28**20**00
		Tower, Low	Point	2820**01**
		Tower, High	Point	2820**02**
		Overhead Wire	Line	2820**03**
Protection Lines				**29**0000
	Obstacle Line		Line	29**01**00
		Mineline	Line	2901**01**
	Antitank Obstacles			29**02**00
		Under Construction	Line	2902**01**
		Completed	Line	2902**02**
		Reinforced, with Antitank Mines	Line	2902**03**
		Antitank Wall	Line	2902**04**
	Wire Obstacles			29**03**00
		Unspecified Wire	Line	2903**01**
		Single Fence Wire	Line	2903**02**
		Double Fence Wire	Line	2903**03**
		Double Apron Fence	Line	2903**04**
		Low Wire Fence	Line	2903**05**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		High Wire Fence	Line	290306
		Single Concertina	Line	290307
		Double Strand Concertina	Line	290308
		Triple Strand Concertina	Line	290309
	Mine Cluster		Area	290400
	Trip Wire		Line	290500
	Lane		Line	290600
	Ferry		Line	290700
	Raft Site		Line	290800
	Fortified Line		Line	290900
	Fighting Position		Line	291000
Intelligence Lines				300000
	Intelligence Coordination Line		Line	300100
Sustainment Areas				310000
	Detainee Holding Area		Area	310100
	Enemy Prisoner or War Holding Area		Area	310200
	Forward Arming and Refueling Point		Area	310300
	Refugee Holding Area		Area	310400
	Regimental Support Area		Area	310500
	Brigade Support Area		Area	310600
	Division Support Area		Area	310700
Sustainment Points				320000
	Ambulance Points		Point	320100
		Ambulance Exchange Point	Point	320101
		Ambulance Control Point	Point	320102
		Ambulance Load Point	Point	320103
		Ambulance Relay Point	Point	320104
	Ammunition Supply Point		Point	320200
	Ammunition Transfer and Holding Point		Point	320300
	Cannibalization Point		Point	320400
	Casualty Collection Point		Point	320500
	Civilian Collection Point		Point	320600
	Detainee Collection Point		Point	320700
	Enemy Prisoner of War Collection Point		Point	320800
	Logistics Release Point		Point	320900
	Maintenance Collection Point (MCP)		Point	321000
	Medical Evacuation Point (MEDEVAC) Pick-Up Point		Point	321100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Rearm, Refuel and Resupply Point (R3P)		Point	32**12**00
	Refuel on the Move (ROM) Point		Point	32**13**00
	Traffic Control Post (TCP)		Point	32**14**00
	Trailer Transfer Point (TTP)		Point	32**15**00
	Unit Maintenance Collection Point (UNCP)		Point	32**16**00
	General Supply Point		Point	32**17**00
		NATO Class I Supply Point	Point	3217**01**
		NATO Class II Supply Point	Point	3217**02**
		NATO Class III Supply Point	Point	3217**03**
		NATO Class IV Supply Point	Point	3217**04**
		NATO Class V Supply Point	Point	3217**05**
		NATO Multiple Class Supply Point	Point	3217**06**
		US Class I Supply Point	Point	3217**07**
		US Class II Supply Point	Point	3217**08**
		US Class III Supply Point	Point	3217**09**
		US Class IV Supply Point	Point	3217**10**
		US Class V Supply Point	Point	3217**11**
		US Class VI Supply Point	Point	3217**12**
		US Class VII Supply Point	Point	3217**13**
		US Class VIII Supply Point	Point	3217**14**
		US Class IX Supply Point	Point	3217**15**
		US Class X Supply Point	Point	3217**16**
	Medical Supply Point		Point	32**18**00
Sustainment Lines				**33**0000
	Moving Convoy		Line	33**01**00
	Halted Convoy		Line	33**02**00
	Main Supply Route		Line	33**03**00
		One Way Traffic	Line	3303**01**
		Two Way Traffic	Line	3303**02**
		Alternating Traffic	Line	3303**03**
	Alternate Supply Route		Line	33**04**00
		One Way Traffic	Line	3304**01**
		Two Way Traffic	Line	3304**02**
		Alternating Traffic	Line	3304**03**
Mission Tasks				**34**0000
	Block		Area	34**01**00
	Breach		Line	34**02**00
	Bypass		Point	34**03**00
	Canalize		Point	34**04**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Clear		Line	340500
	Counterattack		Line	340600
	Counterattack by Fire		Line	340700
	Delay		Line	340800
	Destroy		Point	340900
	Disrupt		Area	341000
	Fix		Line	341100
	Follow and Assume		Line	341200
	Follow and Support		Line	341300
	Interdict		Point	341400
	Isolate		Area	341500
	Neutralize		Point	341600
	Occupy		Area	341700
	Penetrate		Area	341800
	Relief in Place (RIP)		Area	341900
	Retire/Retirement		Line	342000
	Secure		Area	342100
	Security			342200
		Cover	Line	342201
		Guard	Line	342202
		Screen	Line	342203
	Seize		Line	342300
	Withdraw		Line	342400
	Withdraw Under Pressure		Line	342500
	Cordon and Knock		Area	342600
	Cordon and Search		Area	342700
	Suppress		Point	342800
	Advance to Contact		Line	342900
	Capture		Line	343000
	Conduct Exploitation		Line	343100
	Control		Area	343200
	Demonstration		Line	343300
	Deny		Area	343400
	Envelop		Line	343500
	Escort		Line	343600
	Exfiltrate		Line	343700
	Infiltrate		Line	343800
	Locate		Area	343900
	Pursue		Line	344000
Space Debris			Point	350000
	Man Made Space Debris			350100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIII. Control measure entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Man Made Space Debris Small		3501**01**
		Man Made Space Debris Medium		3501**02**
		Man Made Space Debris Big		3501**03**
	Natural Space Debris			35**02**00
		Natural Space Debris Small		3502**01**
		Natural Space Debris Medium		3502**02**
		Natural Space Debris Big		3502**03**

TABLE A-XXXIV. Control Measures sector 1 modifie.

First Modifier	Capability	Code	Remarks
Unspecified		00	
Wheeled limited cross country	Mobility	01	
Wheeled cross country	Mobility	02	
Tracked	Mobility	03	
Wheeled and tracked combination	Mobility	04	
Towed	Mobility	05	
Rail	Mobility	06	
Pack Animals	Mobility	07	
No Vehicles	Mobility	08	
Over snow (prime mover)	Mobility	09	
Sled	Mobility	10	
Barge	Mobility	11	
Amphibious	Mobility	12	
Unspecified Mine	Obstacles	13	
Antipersonnel Mine	Obstacles	14	
Antipersonnel Mine with Directional Effects	Obstacles	15	
Antitank Mine	Obstacles	16	
Antitank Mine with Antihandling Device	Obstacles	17	
Wide Area Antitank Mine	Obstacles	18	
Mine Cluster	Obstacles	19	
Antipersonnel Mine and Antipersonnel Mine with Directional Effects	Obstacles	20	
Antipersonnel Mine and Antitank Mine	Obstacles	21	
Antipersonnel Mine and Antitank Mine with Antihandling Device	Obstacles	22	
Antipersonnel Mine and Wide Area Antitank Mine	Obstacles	23	
Antipersonnel Mine and Mine Cluster	Obstacles	24	
Antipersonnel Mine with Directional Effects and Antitank Mine	Obstacles	25	
Antipersonnel Mine with Directional Effects and Antitank Mine with Antihandling Device	Obstacles	26	
Antipersonnel Mine with Directional Effects and Wide Area Antitank Mine	Obstacles	27	
Antipersonnel Mine with Directional Effects and Mine Cluster	Obstacles	28	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIV. Control Measures sector 1 modifier - Continued.

Antitank Mine and Antitank Mine with Antihandling Device	Obstacles	29	
Antitank Mine and Wide Area Antitank Mine	Obstacles	30	
Antitank Mine and Mine Cluster	Obstacles	31	
Antitank Mine with Antihandling Device and Wide Area Antitank Mine	Obstacles	32	
Antitank Mine with Antihandling Device and Mine Cluster	Obstacles	33	
Wide Area Antitank Mine and Mine Cluster	Obstacles	34	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine	Obstacles	35	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine with Antihandling Device	Obstacles	36	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Wide Area Antitank Mine	Obstacles	37	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Mine Cluster	Obstacles	38	
Antipersonnel Mine, Antitank Mine, and Antitank Mine with Antihandling Device	Obstacles	39	
Antipersonnel Mine, Antitank Mine, and Wide Area Antitank Mine	Obstacles	40	
Antipersonnel Mine, Antitank Mine, and Mine Cluster	Obstacles	41	
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine	Obstacles	42	
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Mine Cluster	Obstacles	43	
Antipersonnel Mine, Wide Area Antitank Mine, and Mine Cluster	Obstacles	44	
Antipersonnel Mine with Directional Effects, Antitank Mine, and Antitank Mine with Antihandling Device	Obstacles	45	
Antipersonnel Mine with Directional Effects, Antitank Mine, and Wide Area Antitank Mine	Obstacles	46	
Antipersonnel Mine with Directional Effects, Antitank Mine, and Mine Cluster	Obstacles	47	
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine	Obstacles	48	
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Mine Cluster	Obstacles	49	
Antipersonnel Mine with Directional Effects, Wide Area Antitank Mine, and Mine Cluster	Obstacles	50	
{Reserved for future use}		51-99	
Version Extension Flag		-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.10 Sea surface (30).

TABLE A-XXXV. Sea surface entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Military			**11**0000
Military Combatant			**12**0000
	Carrier		12**01**00
	Surface Combatant, Line		12**02**00
		Battleship	12020**1**
		Cruiser	12020**2**
		Destroyer	12020**3**
		Frigate	12020**4**
		Corvette	12020**5**
		Littoral Combatant Ship	12020**6**
	Amphibious Warfare Ship		12**03**00
		Amphibious Command Ship	12030**1**
		Amphibious Assault, Non-specified	12030**2**
		Amphibious Assault Ship, General	12030**3**
		Amphibious Assault Ship, Multipurpose	12030**4**
		Amphibious Assault Ship, Helicopter	12030**5**
		Amphibious Transport Dock	12030**6**
		Landing Ship	12030**7**
		Landing Craft	12030**8**
	Mine Warfare Ship		12**04**00
		Mine Layer	12040**1**
		Mine Sweeper	12040**2**
		Mine Sweeper, Drone	12040**3**
		Mine Hunter	12040**4**
		Mine Countermeasures	12040**5**
		Mine Countermeasures, Support Ship	12040**6**
	Patrol Boat		12**05**00
		Patrol Craft, Submarine Chaser/Escort, General	12050**1**
		Patrol Ship, General	12050**2**
	Decoy		12**06**00
	Unmanned Surface Water Vehicle (USV)		12**07**00
	Speedboat		12**08**00
		Rigid–Hull Inflatable Boat (RHIB)	12080**1**
	Jet Ski		12**09**00
	Navy Task Organization		12**10**00
		Navy Task Element	12100**1**
		Navy Task Force	12100**2**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Sea surface entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Navy Task Group	121**03**
		Navy Task Unit	121**04**
		Convoy	121**05**
	Sea-Based X-Band Radar		12**11**00
Military Non Combatant			**13**0000
	Auxiliary Ship		13**01**00
		Ammunition Ship	1301**01**
		Naval Stores Ship	1301**02**
		Auxiliary Flag Ship	1301**03**
		Intelligence Collector	1301**04**
		Oceanographic Research Ship	1301**05**
		Survey Ship	1301**06**
		Hospital Ship	1301**07**
		Naval Cargo Ship	1301**08**
		Combat Support Ship, Fast	1301**09**
		Oiler, Replenishment	1301**10**
		Repair Ship	1301**11**
		Submarine Tender	1301**12**
		Tug, Ocean Going	1301**13**
	Service Craft/Yard		13**02**00
		Barge, not Self–Propelled	1302**01**
		Barge, Self–Propelled	1302**02**
		Tug, Harbor	1302**03**
		Launch	1302**04**
Civilian			**14**0000
	Merchant Ship		14**01**00
		Cargo, General	1401**01**
		Container Ship	1401**02**
		Dredge	1401**03**
		Roll On/Roll Off	1401**04**
		Ferry	1401**05**
		Heavy Lift	1401**06**
		Hovercraft	1401**07**
		Lash Carrier (with Barges)	1401**08**
		Oiler/Tanker	1401**09**
		Passenger	1401**10**
		Tug, Ocean Going	1401**11**
		Tow	1401**12**
		Transport Ship, Hazardous Material	1401**13**
		Junk/Dhow	1401**14**
		Barge, not Self–Propelled	1401**15**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Sea surface entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Hospital Ship	1401**16**
	Fishing Vessel		1**402**00
		Drifter	1402**01**
		Trawler	1402**02**
		Dredger	1402**03**
	Law Enforcement Vessel		1**403**00
	Leisure Craft, Sailing		1**404**00
	Leisure Craft, Motorized		1**405**00
		Rigid–Hull Inflatable Boat (RHIB)	1405**01**
		Speedboat	1405**02**
	Jet Ski		1**406**00
	Unmanned Surface Water Vehicle (USV)		1**407**00
Own Ship			**15**0000
Fused Track			**16**0000
Manual Track			**17**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXVI. Sea surface sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified	Mission Area	00	
Own Ship	Mission Area	01	APP6
Antiair Warfare	Mission Area	02	
Antisubmarine Warfare	Mission Area	03	
Escort	Mission Area	04	
Electronic Warfare	Mission Area	05	
Intelligence, Surveillance, Reconnaissance	Mission Area	06	
Mine Countermeasures	Mission Area	07	
Missile Defense	Mission Area	08	
Medical	Mission Area	09	
Mine Warfare	Mission Area	10	
Remote Mult-imission Vehicle (RMV)	Mission Area	11	USV–only
Special Operations Forces (SOF)	Asset Capability	12	
Surface Warfare	Mission Area	13	
Ballistic Missile	Weapons Capability	14	
Guided Missile	Weapons Capability	15	
Other Guided Missile	Weapons Capability	16	
Torpedo	Weapons Capability	17	
Drone–Equipped	Asset Capability	18	
Helicopter–Equipped/VSTOL	Asset Capability	19	
Ballistic Missile Defense, Shooter	Mission Area	20	
Ballistic Missile Defense, Long-Range Surveillance and Track (LRS&T)	Mission Area	21	
Sea-Base X-Band	Mission Area	22	
Hijacking/Hijacked	Crime	23	
Hijacker	Crime	24	
Cyberspace	Capability	25	
{Reserved for future use}		26-99	
Version Extension Flag		-	

TABLE A-XXXVII. Sea surface sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Nuclear Powered	Ship Propulsion	01	
Heavy	Ship Capacity	02	
Light	Ship Capacity	03	
Medium	Ship Capacity	04	
Dock	Cargo Capacity	05	
Logistics	Cargo Capacity	06	
Tank	Cargo Capacity	07	
Vehicle	Cargo Capacity	08	
Fast	Ship Mobility	09	
Air–Cushioned (US)	Ship Mobility	10	
Air–Cushioned (NATO)	Ship Mobility	11	
Hydrofoil	Ship Mobility	12	
Autonomous Control	USV Control	13	
Remotely Piloted	USV Control	14	
Expendable	USV Control	15	
Cyberspace	Capability	16	
{Reserved for future use}		17-99	
Version Extension Flag		-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.11 Sea subsurface (35).

TABLE A-XXXVIII. Sea subsurface entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Military			**11**0000
	Submarine		11**01**00
		Submarine, Surfaced	1101**01**
		Submarine, Snorkeling	1101**02**
		Submarine, Bottomed	1101**03**
	Other Submersible		11**02**00
	Nonsubmarine		11**03**00
	Autonomous Underwater Vehicle (AUV)/Unmanned Underwater Vehicle (UUV)		11**04**00
	Diver		11**05**00
Civilian			**12**0000
	Submersible		12**01**00
	Autonomous Underwater Vehicle (AUV)/ Unmanned Underwater Vehicle (UUV)		12**02**00
	Diver		12**03**00
Weapon			**13**0000
	Torpedo		13**01**00
	Improvised Explosive Device (IED)		13**02**00
	Decoy		13**03**00
Echo Tracker Classifier (ETC) / Possible Contact (POSCON)			**14**0000
Fused Track			**15**0000
Manual Track			**16**0000

TABLE A-XXXIX. Sea subsurface sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Antisubmarine Warfare	Mission Area	01	
Auxiliary	Mission Area	02	
Command and Control	Mission Area	03	
Intelligence, Surveillance, Reconnaissance	Mission Area	04	
Mine Countermeasures	Mission Area	05	
Mine Warfare	Mission Area	06	
Surface Warfare	Mission Area	07	
Attack	Weapons Capability	08	
Ballistic Missile	Weapons Capability	09	
Guided Missile	Weapons Capability	10	
Other Guided Missile	Weapons Capability	11	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXIX. Sea subsurface sector 1 modifier - Continued.

First Modifier	Category	Code	Remarks
Special Operations Forces (SOF)	Asset Capability	12	
Possible Submarine Low 1	Submarine Confidence	13	
Possible Submarine Low 2	Submarine Confidence	14	
Possible Submarine High 3	Submarine Confidence	15	
Possible Submarine High 4	Submarine Confidence	16	
Probable Submarine	Submarine Confidence	17	
Certain Submarine	Submarine Confidence	18	
Anti-torpedo Torpedo	Weapons Capability	19	
Hijacking/Hijacked	Crime	20	
Hijacker	Crime	21	
Cyberspace	Capability	22	
{Reserved for future use}		23-99	
Version Extension Flag		-	

TABLE A-XL. Sea subsurface sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Air Independent Propulsion	Ship Propulsion	01	
Diesel Electric, General	Ship Propulsion	02	
Diesel – Type 1	Ship Propulsion	03	
Diesel – Type 2	Ship Propulsion	04	
Diesel – Type 3	Ship Propulsion	05	
Nuclear Powered, General	Ship Propulsion	06	
Nuclear – Type 1	Ship Propulsion	07	
Nuclear – Type 2	Ship Propulsion	08	
Nuclear – Type 3	Ship Propulsion	09	
Nuclear – Type 4	Ship Propulsion	10	
Nuclear – Type 5	Ship Propulsion	11	
Nuclear – Type 6	Ship Propulsion	12	
Nuclear – Type 7	Ship Propulsion	13	
Autonomous Control	UUV Control	14	
Remotely Piloted	UUV Control	15	
Expendable	UUV Control	16	
Cyberspace	Capability	17	
{Reserved for future use}		18-99	
Version Extension Flag		-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.12 Mine warfare (36).

TABLE A-XLI. Mine warfare entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Sea Mine, General			**11**0000
	Sea Mine, Bottom		11**01**00
	Sea Mine, Moored		11**02**00
	Sea Mine, Floating		11**03**00
	Sea Mine, Rising		11**04**00
	Sea Mine, Other Position		11**05**00
	Kingfisher		11**06**00
	Small Object, Mine–Like		11**07**00
	Exercise Mine, General		11**08**00
		Exercise Mine, Bottom	1108**01**
		Exercise Mine, Moored	1108**02**
		Exercise Mine, Floating	1108**03**
		Exercise Mine, Rising	1108**04**
	Neutralized Mine, General		11**09**00
		Neutralized Mine, Bottom	1109**01**
		Neutralized Mine, Moored	1109**02**
		Neutralized Mine, Floating	1109**03**
		Neutralized Mine, Rising	1109**04**
		Neutralized Mine, Other Position	1109**05**
Unexploded Ordnance			**12**0000
Sea Mine Decoy			**13**0000
	Sea Mine Decoy, Bottom		13**01**00
	Sea Mine Decoy, Moored		13**02**00
Mine–Like Contact (MILCO)			**14**0000
	MILCO - General		14**01**00
		MILCO - General, Confidence Level 1	1401**01**
		MILCO - General, Confidence Level 2	1401**02**
		MILCO - General, Confidence Level 3	1401**03**
		MILCO - General, Confidence Level 4	1401**04**
		MILCO - General, Confidence Level 5	1401**05**
	MILCO - Bottom		14**02**00
		MILCO - Bottom, Confidence Level 1	1402**01**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLI. Mine warfare entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		MILCO - Bottom, Confidence Level 2	1402**02**
		MILCO - Bottom, Confidence Level 3	1402**03**
		MILCO - Bottom, Confidence Level 4	1402**04**
		MILCO - Bottom, Confidence Level 5	1402**05**
	MILCO - Moored		14**03**00
		MILCO - Moored, Confidence Level 1	1403**01**
		MILCO - Moored, Confidence Level 2	1403**02**
		MILCO - Moored, Confidence Level 3	1403**03**
		MILCO - Moored, Confidence Level 4	1403**04**
		MILCO - Moored, Confidence Level 5	1403**05**
	MILCO - Floating		14**04**00
		MILCO - Floating, Confidence Level 1	1404**01**
		MILCO - Floating, Confidence Level 2	1404**02**
		MILCO - Floating, Confidence Level 3	1404**03**
		MILCO - Floating, Confidence Level 4	1404**04**
		MILCO - Floating, Confidence Level 5	1404**05**
Mine–Like Echo (MILEC), General			**15**0000
	Mine–Like Echo, Bottom		15**01**00
	Mine–Like Echo, Moored		15**02**00
	Mine–Like Echo, Floating		15**03**00
Negative Reacquisition, General			**16**0000
	Negative Reacquisition, Bottom		16**01**00
	Negative Reacquisition, Moored		16**02**00
	Negative Reacquisition, Floating		16**03**00
Obstructor			**17**0000
	Neutralized Obstructor		17**01**00
General Mine Anchor			**18**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLI. Mine warfare entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Non-Mine Mine–Like Object (NMLO), General			**19**0000
	Non-Mine Mine–Like Object, Bottom		19**01**00
	Non-Mine Mine–Like Object, Moored		19**02**00
	Non-Mine Mine–Like Object, Floating		19**03**00
Environmental Report Location			**20**0000
Dive Report Location			**21**0000

A.5.5.13 Activities (40).

TABLE A-XLII. Activities entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Incident			**11**0000
	Criminal Activity Incident		11**01**00
		Arrest	1101**01**
		Arson	1101**02**
		Attempted Criminal Activity	1101**03**
		Drive-by Shooting	1101**04**
		Drug Related	1101**05**
		Extortion	1101**06**
		Graffiti	1101**07**
		Killing	1101**08**
		Poisoning	1101**09**
		Civil Rioting	1101**10**
		Booby Trap	1101**11**
		Home Eviction	1101**12**
		Black Marketing	1101**13**
		Vandalism/Loot/Ransack/Plunder	1101**14**
		Jail Break	1101**15**
		Robbery	1101**16**
		Theft	1101**17**
		Burglary	1101**18**
		Smuggling	1101**19**
		Rock Throwing	1101**20**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLII. Activities entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Dead Body	110121
		Sabotage	110122
		Suspicious Activity	110123
	Bomb/Bombing		110200
		Bomb Threat	110201
	IED Event		110300
		IED Explosion	110301
		Premature IED Explosion	110302
		IED Cache	110303
		IED Suicide Bomber	110304
	Shooting		110400
		Sniping	110401
	Illegal Drug Operation		110500
		Trafficking	110501
		Illegal Drug Lab	110502
	Explosion		110600
		Grenade Explosion	110601
		Incendiary Explosion	110602
		Mine Explosion	110603
		Mortar Fire Explosion	110604
		Rocket Explosion	110605
		Bomb Explosion	110606
Civil Disturbance			120000
	Demonstration		120100
Operation			130000
	Patrolling		130100
	Military Information Support Operation (MISO)		130200
		TV and Radio Propaganda	130201
	Foraging/Searching		130300
	Recruitment		130400
		Willing	130401
		Unwilling/Coerced	130402
	Mine Laying		130500
	Spy		130600
	Warrant Served		130700
	Exfiltration		130800
	Infiltration		130900
	Meeting		131000
		Polling Place/Election	131001
	Raid on House		131100
	Emergency Operation		131200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLII. Activities entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Emergency Collection Evacuation Point	1312**01**
		Emergency Food Distribution	1312**02**
		Emergency Incident Command Center	1312**03**
		Emergency Operations Center	1312**04**
		Emergency Public Information Center	1312**05**
		Emergency Shelter	1312**06**
		Emergency Staging Area	1312**07**
		Emergency Water Distribution Center	1312**08**
	Emergency Medical Operation		13**13**00
		EMT Station Location	1313**01**
		Health Department Facility	1313**02**
		Medical Facilities Outpatient	1313**03**
		Morgue	1313**04**
		Pharmacy	1313**05**
		Triage	1313**06**
	Fire Fighting Operation		13**14**00
		Fire Hydrant	1314**01**
		Fire Station	1314**02**
		Other Water Supply Location	1314**03**
	Law Enforcement Operation		13**15**00
		Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)	1315**01**
		Border Patrol	1315**02**
		Customs Service	1315**03**
		Drug Enforcement Administration (DEA)	1315**04**
		Department of Justice (DOJ)	1315**05**
		Federal Bureau of Investigation (FBI)	1315**06**
		Police	1315**07**
		Prison	1315**08**
		United States Secret Service(Treas) (USSS)	1315**09**
		Transportation Security Administration (TSA)	1315**10**
		Coast Guard	1315**11**
		US Marshals Service	1315**12**
		Internal Security Force	1315**13**
Fire Event			**14**0000
	Fire Origin		14**01**00
	Smoke		14**02**00
	Hot Spot		14**03**00
	Non-Residential Fire		14**04**00
	Residential Fire		14**05**00
	School Fire		14**06**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLII. Activities entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	Special Needs Fire		14**07**00
	Wild Fire		14**08**00
Hazardous Materials			**15**0000
	Hazardous Materials Incident		15**01**00
		Chemical Agent	1501**01**
		Corrosive Material	1501**02**
		Hazardous when Wet	1501**03**
		Explosive Material	1501**04**
		Flammable Gas	1501**05**
		Flammable Liquid	1501**06**
		Flammable Solid	1501**07**
		Non-Flammable Gas	1501**08**
		Organic Peroxide	1501**09**
		Oxidizer	1501**10**
		Radioactive Material	1501**11**
		Spontaneously Combustible Material	1501**12**
		Toxic Gas	1501**13**
		Toxic Infectious Material	1501**14**
		Unexploded Ordnance	1501**15**
Transportation Incident			**16**0000
	Air		16**01**00
	Marine		16**02**00
	Rail		16**03**00
	Vehicle		16**04**00
	Wheeled Vehicle Explosion		16**05**00
Natural Event			**17**0000
	Geologic		17**01**00
		Aftershock	1701**01**
		Avalanche	1701**02**
		Earthquake Epicenter	1701**03**
		Landslide	1701**04**
		Subsidence	1701**05**
		Volcanic Eruption	1701**06**
		Volcanic Threat	1701**07**
		Cave Entrance	1701**08**
	Hydro-Meteorological		17**02**00
		Drought	1702**01**
		Flood	1702**02**
		Tsunami	1702**03**
	Infestation		17**03**00
		Bird	1703**01**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLII. Activities entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
		Insect	1703**02**
		Microbial	1703**03**
		Reptile	1703**04**
		Rodent	1703**05**
Individual			**18**0000
	Religious Leader		18**01**00
	Speaker		18**02**00

TABLE A-XLIII. Activities sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Assassination	Crime	01	
Execution (Wrongful Killing)	Crime	02	
Hijacking/Hijacked	Crime	03	
House–to–House	Military Information Support Operations	04	
Kidnapping	Crime	05	
Murder	Crime	06	
Piracy	Crime	07	
Rape	Crime	08	
Written Military Information Support Operations	Military Information Support Operations	09	
Pirate	Crime	10	
False	IED Category	11	
Find	IED Category	12	
Found and Cleared	IED Category	13	
Hoax (Decoy)	IED Category	14	
Attempted	Incident Qualifier	15	
Accident	Incident Qualifier	16	
Incident	Incident Qualifier	17	
Theft	Crime	18	
Hijacker	Crime	19	
Cyberspace	Capability	20	
{Reserved for future use}		21-99	
Version Extension Flag		-	

TABLE A-XLIV. Activities sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Cyberspace	Capability	01	
Security Force Assistance	Capability	02	
{Reserved for future use}		03-99	
Version Extension Flag		-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.14 Atmospheric (45).

TABLE A-XLV. Atmospheric entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
Pressure Systems				**11**0000
	Low Pressure Center		Point	11**01**00
		Cyclone Center	Point	1101**01**
		Tropopause Low	Point	1101**02**
	High Pressure Center		Point	11**02**00
		Anticyclone Center	Point	1102**01**
		Tropopause High	Point	1102**02**
	Frontal Systems		Point	11**03**00
		Cold Front	Line	1103**01**
		Upper Cold Front	Line	1103**02**
		Cold Frontogenesis	Line	1103**03**
		Cold Frontolysis	Line	1103**04**
		Warm Front	Line	1103**05**
		Upper Warm Front	Line	1103**06**
		Warm Frontogenesis	Line	1103**07**
		Warm Frontolysis	Line	1103**08**
		Occluded Front	Line	1103**09**
		Upper Occluded Front	Line	1103**10**
		Occluded Frontolysis	Line	1103**11**
		Stationary Front	Line	1103**12**
		Upper Stationary Front	Line	1103**13**
		Stationary Frontogenesis	Line	1103**14**
		Stationary Frontolysis	Line	1103**15**
	Lines			11**04**00
		Trough Axis	Line	1104**01**
		Upper Trough Axis	Line	1104**02**
		Ridge Axis	Line	1104**03**
		Severe Squall Line	Line	1104**04**
		Instability Line	Line	1104**05**
		Shear Line	Line	1104**06**
		Inter–Tropical Convergence Zone	Line	1104**07**
		Convergence Line	Line	1104**08**
		Inter–Tropical Discontinuity	Line	1104**09**
	Pressure Tendency			11**05**00
		Rise Then Fall Higher	Point	1105**01**
		Rise Then Steady	Point	1105**02**
		Rise	Point	1105**03**
		Rise Then Rise Higher	Point	1105**04**
		Steady	Point	1105**05**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLV. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Fall Then Rise Lower	Point	110**06**
		Fall Then Steady	Point	110**07**
		Fall	Point	110**08**
		Rise Then Fall Lower	Point	110**09**
Turbulence				**12**0000
	Light		Point	12**01**00
	Moderate		Point	12**02**00
	Severe		Point	12**03**00
	Extreme		Point	12**04**00
	Mountain Waves		Point	12**05**00
Icing				**13**0000
	Clear Icing			13**01**00
		Light	Point	1301**01**
		Moderate	Point	1301**02**
		Severe	Point	1301**03**
	Rime Icing			13**02**00
		Light	Point	1302**01**
		Moderate	Point	1302**02**
		Severe	Point	1302**03**
	Mixed Icing			13**03**00
		Light	Point	1303**01**
		Moderate	Point	1303**02**
		Severe	Point	1303**03**
Winds				**14**0000
	Calm Winds		Point	14**01**00
	Wind Plot		Point	14**02**00
	Jet Stream		Line	14**03**00
	Stream Line		Line	14**04**00
Cloud Cover				**15**0000
	Cloud Coverage Symbols			15**01**00
		Clear Sky	Point	1501**01**
		Few Coverage	Point	1501**02**
		Scattered Coverage	Point	1501**03**
		Broken Coverage	Point	1501**04**
		Overcast Coverage	Point	1501**05**
		Sky Totally or Partially Obscured	Point	1501**06**
Weather Symbols				**16**0000
	Rain			16**01**00
		Intermittent Light	Point	1601**01**
		Continuous Light	Point	1601**02**
		Intermittent Moderate	Point	1601**03**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLV. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Intermittent Moderate/ Continuous Moderate	Point	1601**04**
		Intermittent Heavy	Point	1601**05**
		Intermittent Heavy/ Continuous Heavy	Point	1601**06**
	Freezing Rain			16**02**00
		Light	Point	1602**01**
		Moderate/Heavy	Point	1602**02**
	Rain Showers			16**03**00
		Light	Point	1603**01**
		Moderate/Heavy	Point	1603**02**
		Torrential	Point	1603**03**
	Drizzle			16**04**00
		Intermittent Light	Point	1604**01**
		Intermittent Light/ Continuous Light	Point	1604**02**
		Intermittent Moderate	Point	1604**03**
		Intermittent Moderate/ Continuous Moderate	Point	1604**04**
		Intermittent Heavy	Point	1604**05**
		Intermittent Heavy/ Continuous Heavy	Point	1604**06**
	Freezing Drizzle			16**05**00
		Light	Point	1605**01**
		Moderate/Heavy	Point	1605**02**
	Rain and Snow Mixed			16**06**00
		Rain or Drizzle and Snow – Light	Point	1606**01**
		Rain or Drizzle and Snow – Moderate/Heavy	Point	1606**02**
		Rain and Snow Showers – Light	Point	1606**03**
		Rain and Snow Showers – Moderate/Heavy	Point	1606**04**
	Snow			16**07**00
		Intermittent Light	Point	1607**01**
		Intermittent Light/ Continuous Light	Point	1607**02**
		Intermittent Moderate	Point	1607**03**
		Intermittent Moderate/ Continuous Moderate	Point	1607**04**
		Intermittent Heavy	Point	1607**05**
		Intermittent Heavy/ Continuous Heavy	Point	1607**06**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLV. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Blowing Snow – Light/ Moderate	Point	160**07**
		Blowing Snow – Heavy	Point	160**08**
	Snow Grains		Point	16**08**00
	Snow Showers			16**09**00
		Light	Point	160**901**
		Moderate/Heavy	Point	160**902**
	Hail			16**10**00
		Light not Associated with Thunder	Point	1610**01**
		Moderate/Heavy not Associated with Thunder	Point	1610**02**
	Ice Crystals (Diamond Dust)		Point	16**11**00
	Ice Pellets (Sleet)			16**12**00
		Light	Point	1612**01**
		Moderate	Point	1612**02**
		Heavy	Point	1612**03**
	Inversion		Point	16**13**00
	Storms			16**14**00
		Thunderstorm – No Precipitation	Point	1614**01**
		Thunderstorm Light to Moderate with Rain/Snow – No Hail	Point	1614**02**
		Thunderstorm Heavy with Rain/Snow – No Hail	Point	1614**03**
		Thunderstorm Light to Moderate – With Hail	Point	1614**04**
		Thunderstorm Heavy – With Hail	Point	1614**05**
		Funnel Cloud (Tornado/Waterspout)	Point	1614**06**
		Squall	Point	1614**07**
		Lightning	Point	1614**08**
	Fog			16**15**00
		Shallow Patches	Point	1615**01**
		Shallow Continuous	Point	1615**02**
		Patchy	Point	1615**03**
		Sky Visible	Point	1615**04**
		Sky Obscured	Point	1615**05**
		Freezing, Sky Visible	Point	1615**06**
		Freezing, Sky Obscured	Point	1615**07**
	Mist		Point	16**16**00
	Smoke		Point	16**17**00
	Haze		Point	16**18**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLV. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Dust or Sand			16**19**00
		Light to Moderate	Point	1619**01**
		Severe	Point	1619**02**
		Dust Devil	Point	1619**03**
		Blowing Dust or Sand	Point	1619**04**
	Tropical Storm Systems			16**20**00
		Tropical Depression	Point	1620**01**
		Tropical Storm	Point	1620**02**
		Hurricane/Typhoon	Point	1620**03**
		Tropical Storm Wind Areas and Date/Time Labels	Area	1620**04**
	Volcanic Eruption		Point	16**21**00
		Volcanic Ash	Point	1621**01**
	Tropopause Level		Point	16**22**00
	Freezing Level		Point	16**23**00
	Precipitation of Unknown Type and Intensity		Point	16**24**00
Bounded Areas of Weather				**17**0000
	Instrument Flight Rule (IFR)		Area	17**01**00
	Marginal Visual Flight Rule (MVFR)		Area	17**02**00
	Turbulence		Area	17**03**00
	Icing		Area	17**04**00
	Liquid Precipitation – Non-Convective Continuous or Intermittent		Area	17**05**00
		Liquid Precipitation – Convective	Area	1705**01**
	Freezing /Frozen Precipitation		Area	17**06**00
	Thunderstorm		Area	17**07**00
	Fog		Area	17**08**00
	Dust or Sand		Area	17**09**00
	Operator–Defined Freeform		Area	17**10**00
Isopleths				**18**0000
	Isobar – Surface		Line	18**01**00
	Contour – Upper Air		Line	18**02**00
	Isotherm		Line	18**03**00
	Isotach		Line	18**04**00
	Isodrosotherm		Line	18**05**00
	Thickness		Line	18**06**00
	Operator–Defined Freeform		Line	18**07**00
State of the Ground				**19**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLV. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Without Snow or Measurable Ice Cover			19**01**00
		Surface Dry Without Cracks or Appreciable Dust or Loose Sand	Point	1901**01**
		Surface Moist	Point	1901**02**
		Surface Wet, Standing Water in Small or Large Pools	Point	1901**03**
		Surface Flooded	Point	1901**04**
		Surface Frozen	Point	1901**05**
		Glaze (Thin Ice) on Ground	Point	1901**06**
		Loose Dry Dust or Sand not Covering Ground Completely	Point	1901**07**
		Thin Loose Dry Dust or Sand Covering Ground Completely	Point	1901**08**
		Moderate/Thick Loose Dry Dust or Sand Covering Ground Completely	Point	1901**09**
		Extremely Dry with Cracks	Point	1901**10**
	With Snow or Measurable Ice Cover			19**02**00
		Predominately Ice Covered	Point	1902**01**
		Compact or Wet Snow (with or without Ice) Covering Less Than One–Half of Ground	Point	1902**02**
		Compact or Wet Snow (with or without Ice) Covering at Least One–Half of Ground, but Ground not Completely Covered	Point	1902**03**
		Even Layer of Compact or Wet Snow Covering Ground Completely	Point	1902**04**
		Uneven Layer of Compact or Wet Snow Covering Ground Completely	Point	1902**05**
		Loose Dry Snow Covering Less Than One–Half of Ground	Point	1902**06**
		Loose Dry Snow Covering at Least One–Half of Ground, but Ground not Completely Covered	Point	1902**07**
		Even Layer of Loose Dry Snow Covering Ground Completely	Point	1902**08**
		Uneven Layer of Loose Dry Snow Covering Ground Completely	Point	1902**09**
		Snow Covering Ground Completely, Deep Drifts	Point	1902**10**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.15 Oceanographic (46).

TABLE A-XLVI. Oceanographic entity/entity type/entity subtyp.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
Ice Systems				**11**0000
	Icebergs			11**01**00
		Many Icebergs	Point	1101**01**
		Belts and Strips	Point	1101**02**
		General	Point	1101**03**
		Many Icebergs – General	Point	1101**04**
		Bergy Bit	Point	1101**05**
		Many Bergy Bits	Point	1101**06**
		Growler	Point	1101**07**
		Many Growlers	Point	1101**08**
		Floeberg	Point	1101**09**
		Ice Island	Point	1101**10**
	Ice Concentration			11**02**00
		Bergy Water	Point	1102**01**
		Water with Radar Targets	Point	1102**02**
		Ice Free	Point	1102**03**
	Dynamic Processes			11**03**00
		Convergence	Point	1103**01**
		Divergence	Point	1103**02**
		Shearing or Shear Zone	Point	1103**03**
		Ice Drift (Direction)	Point	1103**04**
	Sea Ice			11**04**00
		Ice Thickness (Observed)	Point	1104**01**
		Ice Thickness (Estimated)	Point	1104**02**
		Melt Puddles or Flooded Ice	Point	1104**03**
	Limits			11**05**00
		Limits of Visual Observation	Line	1105**01**
		Limits of Under Cast	Line	1105**02**
		Limits of Radar Observation	Line	1105**03**
		Observed Ice Edge or Boundary	Line	1105**04**
		Estimated Ice Edge or Boundary	Line	1105**05**
		Ice Edge or Boundary From Radar	Line	1105**06**
	Openings in the Ice			11**06**00
		Cracks	Line	1106**01**
		Cracks at a Specific Location	Line	1106**02**
		Lead	Line	1106**03**
		Frozen Lead	Line	1106**04**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVI. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
	Snow Cover		Point	11**07**00
		Sastrugi (with Orientation)	Point	1107**01**
	Topographical Features			11**08**00
		Ridges or Hummocks	Point	1108**01**
		Rafting	Point	1108**02**
		Jammed Brash Barrier	Point	1108**03**
Hydrography				**12**0000
	Depth			12**01**00
		Soundings	Point	1201**01**
		Depth Curve	Line	1201**02**
		Depth Contour	Line	1201**03**
		Depth Area	Area	1201**04**
	Coastal Hydrography			12**02**00
		Coastline	Line	1202**01**
		Island	Area	1202**02**
		Beach	Area	1202**03**
		Water	Area	1202**04**
		Foreshore – Line	Line	1202**05**
		Foreshore – Area	Area	1202**06**
	Ports and Harbors			12**03**00
		Ports		1203**01**
		Berths (Onshore)	Point	1203**02**
		Berths (Anchor)	Point	1203**03**
		Anchorage – Point	Point	1203**04**
		Anchorage – Line	Line	1203**05**
		Anchorage – Area	Area	1203**06**
		Call in Point	Point	1203**07**
		Pier/Wharf/Quay	Line	1203**08**
		Fishing Harbor – Point	Point	1203**09**
		Fish Weirs – Point	Point	1203**10**
		Fish Stakes – Point	Point	1203**11**
		Fish Traps – Area	Area	1203**12**
		Facilities		1203**13**
		Drydock	Area	1203**14**
		Landing Place	Point	1203**15**
		Offshore Loading Facility – Point	Point	1203**16**
		Offshore Loading Facility – Line	Line	1203**17**
		Offshore Loading Facility – Area	Area	1203**18**
		Ramp – Above Water	Line	1203**19**
		Ramp – Below Water	Line	1203**20**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVI. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Landing Ring	Point	120321
		Ferry Crossing	Point	120322
		Cable Ferry Crossing	Point	120323
		Dolphin	Point	120324
		Shoreline Protection		120325
		Breakwater/Groin/Jetty – Above Water	Line	120326
		Breakwater/Groin/Jetty – Below Water	Line	120327
		Seawall	Line	120328
	Aids to Navigation			120400
		Beacon	Point	120401
		Buoy Default	Point	120402
		Marker	Point	120403
		Perches/Stakes – Point	Point	120404
		Perches/Stakes – Area	Area	120405
		Light	Point	120406
		Leading Line	Line	120407
		Light Vessel/Light Ship	Point	120408
		Lighthouse	Point	120409
	Dangers/Hazards			120500
		Rock Submerged	Point	120501
		Rock Awashed	Point	120502
		Underwater Danger/Hazard	Area	120503
		Foul Ground – Point	Point	120504
		Foul Ground – Area	Area	120505
		Kelp/Seaweed – Point	Point	120506
		Kelp/Seaweed – Area	Area	120507
		Snags/Stumps	Point	120508
		Wreck (Uncovers)	Point	120509
		Wreck (Submerged)	Point	120510
		Breakers	Line	120511
		Reef	Line	120512
		Eddies/Overfalls/Tide Rips	Point	120513
		Discolored Water	Area	120514
	Bottom Features			120600
		Bottom Characteristics - Sand	Point	120601
		Bottom Characteristics - Mud	Point	120602
		Bottom Characteristics - Clay	Point	120603
		Bottom Characteristics - Silt	Point	120604
		Bottom Characteristics - Stones	Point	120605

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVI. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		Bottom Characteristics - Gravel	Point	120**06**
		Bottom Characteristics - Pebbles	Point	120**07**
		Bottom Characteristics - Cobbles	Point	120**08**
		Bottom Characteristics - Rock	Point	120**09**
		Bottom Characteristics - Coral	Point	120**10**
		Bottom Characteristics - Shell	Point	120**11**
		Qualifying Terms - Fine	Point	120**12**
		Qualifying Terms - Medium	Point	120**13**
		Qualifying Terms - Coarse	Point	120**14**
	Tide and Current			12**07**00
		Water Turbulence	Point	1207**01**
		Current Flow – Ebb	Line	1207**02**
		Current Flow – Flood	Line	1207**03**
		Tide Data Point	Point	1207**04**
		Tide Gauge	Point	1207**05**
Oceanography				**13**0000
	Bioluminescence			13**01**00
		Visual Detection Ratio (VDR) Level 1–2	Area	1301**01**
		VDR Level 2–3	Area	1301**02**
		VDR Level 3–4	Area	1301**03**
		VDR Level 4–5	Area	1301**04**
		VDR Level 5–6	Area	1301**05**
		VDR Level 6–7	Area	1301**06**
		VDR Level 7–8	Area	1301**07**
		VDR Level 8–9	Area	1301**08**
		VDR Level 9–10	Area	1301**09**
	Beach Slope			13**02**00
		Flat	Area	1302**01**
		Gentle	Area	1302**02**
		Moderate	Area	1302**03**
		Steep	Area	1302**04**
Geophysics/Acoustics				**14**0000
	Mine Warfare (MIW) Bottom Descriptors			14**01**00
		MIW Bottom Sediments - Solid Rock	Area	1401**01**
		MIW Bottom Sediments - Clay	Area	1401**02**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVI. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		MIW Bottom Sediments - Very Coarse Sand	Area	140103
		MIW Bottom Sediments - Coarse Sand	Area	140104
		MIW Bottom Sediments - Medium Sand	Area	140105
		MIW Bottom Sediments - Fine Sand	Area	140106
		MIW Bottom Sediments - Very Fine Sand	Area	140107
		MIW Bottom Sediments - Very Fine Silt	Area	140108
		MIW Bottom Sediments - Fine Silt	Area	140109
		MIW Bottom Sediments - Medium Silt	Area	140110
		MIW Bottom Sediments - Coarse Silt	Area	140111
		MIW Bottom Sediments - Boulders	Area	140112
		MIW Bottom Sediments - Cobbles, Oyster Shells	Area	140113
		MIW Bottom Sediments - Pebbles, Shells	Area	140114
		MIW Bottom Sediments - Sand and Shells	Area	140115
		MIW Bottom Sediment - Land	Area	140116
		MIW Bottom Sediment - No Data	Area	140117
		Bottom Roughness - Smooth	Area	140118
		Bottom Roughness - Moderate	Area	140119
		Bottom Roughness - Rough	Area	140120
		Clutter (Bottom) - Low	Area	140121
		Clutter (Bottom) - Medium	Area	140122
		Clutter (Bottom) - High	Area	140123
		Impact Burial - 0%	Area	140124
		Impact Burial - 0–10%	Area	140125
		Impact Burial - 10–20%	Area	140126
		Impact Burial - 20–75%	Area	140127
		Impact Burial - >75%	Area	140128
		MIW Bottom Category A	Area	140129
		MIW Bottom Category B	Area	140130
		MIW Bottom Category C	Area	140131
		MIW Bottom Type - A1	Area	140132

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVI. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
		MIW Bottom Type - A2	Area	140133
		MIW Bottom Type - A3	Area	140134
		MIW Bottom Type - B1	Area	140135
		MIW Bottom Type - B2	Area	140136
		MIW Bottom Type - B3	Area	140137
		MIW Bottom Type - C1	Area	140138
		MIW Bottom Type - C2	Area	140139
		MIW Bottom Type - C3	Area	140140
Limits				150000
	Maritime Limit Boundary		Line	150100
	Maritime Area		Area	150200
	Restricted Area		Line	150300
	Swept Area		Area	150400
	Training Area		Area	150500
	Operator–Defined		Area	150600
Man–Made Structures				160000
	Submarine Cable		Line	160100
	Submerged Crib		Area	160200
	Canal		Line	160300
	Ford		Point	160400
	Lock		Point	160500
	Oil/Gas Rig		Point	160600
	Oil/Gas Rig Field		Area	160700
	Pipelines/Pipe		Line	160800
	Pile/Piling/Post		Point	160900

A.5.5.16 Meteorological space (47).

TABLE A-XLVII. Meteorological space equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Geometric Rendering	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.				
Space				110000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.17 Signals intelligence equipment (50, 51, 52, 53, 54).

TABLE A-XLVIII. Signals intelligence equipment entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Signal Intercept			**11**0000
	Communications		11**01**00
	Jammer		11**02**00
	Radar		11**03**00

TABLE A-XLIX. Signals intelligence equipment sector 1 modifier.

First Modifier	Category	Code	Remarks
Unspecified		00	
Anti-Aircraft Fire Control	Radar	01	
Airborne Search and Bombing	Radar	02	
Airborne Intercept	Radar	03	
Altimeter	Radar	04	
Airborne Reconnaissance and Mapping	Radar	05	
Air Traffic Control	Radar	06	
Beacon Transponder (not IFF)	Radar	07	
Battlefield Surveillance	Radar	08	
Controlled Approach	Radar	09	
Controlled Intercept	Radar	10	
Cellular/Mobile	Communications	11	
Coastal Surveillance	Radar	12	
Decoy/Mimic	Radar	13	
Data Transmission	Radar	14	
Earth Surveillance	Radar	15	
Early Warning	Radar	16	
Fire Control	Radar	17	
Ground Mapping	Radar	18	
Height Finding	Radar	19	
Harbor Surveillance	Radar	20	
Identification, Friend or Foe (Interrogator)	Radar	21	
Instrument Landing System	Radar	22	
Ionospheric Sounding	Radar	23	
Identification, Friend or Foe (Transponder)	Radar	24	
Barrage Jammer	Jammer	25	
Click Jammer	Jammer	26	
Deceptive Jammer	Jammer	27	
Frequency Swept Jammer	Jammer	28	
Jammer (general)	Jammer	29	
Noise Jammer	Jammer	30	
Pulsed Jammer	Jammer	31	
Repeater Jammer	Jammer	32	
Spot Noise Jammer	Jammer	33	
Transponder Jammer	Jammer	34	
Missile Acquisition	Radar	35	
Missile Control	Jammer	36	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLIX. Signals intelligence equipment sector 1 modifier - Continued.

First Modifier	Category	Code	Remarks
Missile Downlink	Air Radar	37	
Meteorological	Radar	38	
Multi-Function	Jammer	39	
Missile Guidance	Radar	40	
Missile Homing	Radar	41	
Missile Tracking	Jammer	42	
Navigational/General	Jammer	43	
Navigational/Distance Measuring Equipment	Jammer	44	
Navigation/Terrain Following	Jammer	45	
Navigational/Weather Avoidance	Jammer	46	
Omni-Line of Sight (LOS)	Jammer	47	
Proximity Use	Air Radar	48	
Point-to-Point Line of Sight (LOS)	Communications	49	
Instrumentation	Radar	50	
Range Only	Radar	51	
Sonobuoy	Radar	52	
Satellite Downlink	Communications	53	
Space	Radar	54	
Surface Search	Radar	55	
Shell Tracking	Land Radar	56	
Satellite Uplink	Communications	57	
Target Acquisition	Radar	58	
Target Illumination	Radar	59	
Tropospheric Scatter	Communications	60	
Target Tracking	Radar	61	
Unknown	Radar	62	
Video Remoting	Radar	63	
Experimental	Radar	64	
Cyberspace	Capability	65	
{Reserved for future use}		66-99	
Version Extension Flag		-	

TABLE A-L. Signals intelligence equipment sector 2 modifier.

Second Modifier	Category	Code	Remarks
Unspecified		00	
Cyberspace	Capability	01	
{Reserved for future use}		02-99	
Version Extension Flag		-	

A.5.5.18 Cyberspace (60).

TABLE A-LI. Cyberspace entity/entity type/entity subtype.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
Unspecified			000000
Mission Force			**11**0000
	Combat Mission Team		11**01**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LI. Cyberspace entity/entity type/entity subtype - Continued.

Entity (Digits 1and 2)	Entity Type (Digits 3 and 4)	Entity Subtype (Digits 5 and 6)	Code
Note: The actual code is shown in **bold numbers**. The remaining numbers are used to show placement within the six digits.			
	National Mission Team		11**02**00
	Cyber Protection Team		11**03**00
	Nation State Cyber Threat Actor		11**04**00
	Non Nation State Cyber Threat Actor		11**05**00

A.5.6 Set A. The third set of ten digits:

Digits 21 through 27 are reserved for future use (to be assigned by SSMC/JSP only).
Digits 28 through 30 are the nationality/country/geopolitical/geographic name or Entity numeric code.

A.5.6.1 The nationality/country/geopolitical/geographic name or Entity numeric code is a three digit code. Several lists of codes exist, to include the ISO 3166-1, GENC, and NATO STANAG 1059. US shall use GENC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SPACE SYMBOLS

B.1 SCOPE

B.1.1 Scope. This appendix addresses symbols that support space equipment and weapons in the C2 domain. The tables in this appendix present the icons and modifiers for the space domain. This appendix is divided into two sections (see figure B-1): 1) equipment and platform symbols (see B.6) and 2) missile symbols (see B.7). This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

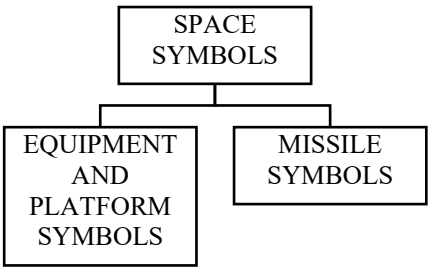


FIGURE B-1. Space appendix sections.

B.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

B.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

B.4 GENERAL REQUIREMENTS

B.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and space symbology.

B.5 DETAILED REQUIREMENTS

B.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

B.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

B.5.3 Composition of space symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Figure B-2 shows an example of a space equipment symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

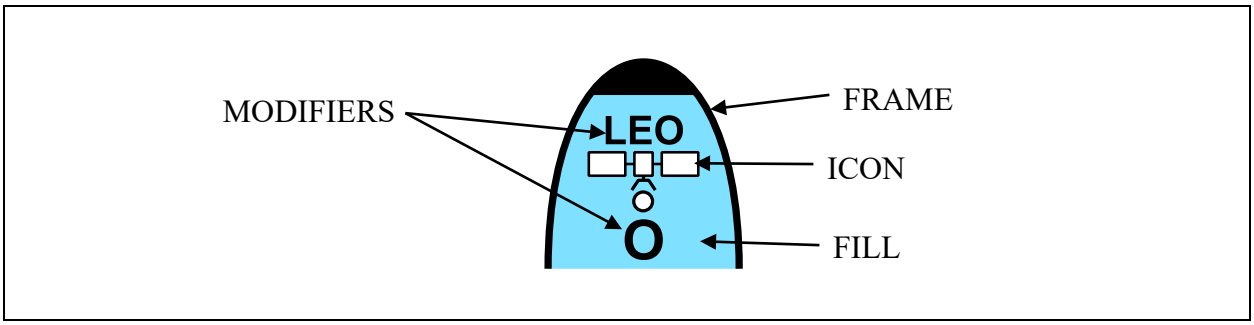







FIGURE B-2. Space symbol components.

B.5.3.1 Symbol building process. Table B-I depicts the symbol building process for space symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE B-I. Space symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity of the object from the space column in tables I, II, or III. In this example, the standard identity is friend. The example depicts a “friendly space track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “civilian earth observation satellite,” a space entity subtype. The example depicts a “friendly civilian earth observation satellite.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “low earth orbit,” a sector 1 modifier. The example depicts a “friendly civilian earth observation satellite on a low earth orbit.”	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is “optical,” a sector 2 modifier. The example depicts a “friendly civilian earth observation satellite on a low earth orbit with optical sensor.”	
5.	The finished symbol will appear as shown in the example.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

B.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table B-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table B-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

B.5.3.3 Amplifiers.

B.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure B-3 shows the placement of space symbol amplifiers around the friend symbol frame. Table B-II provides descriptions and formats of each amplifier.

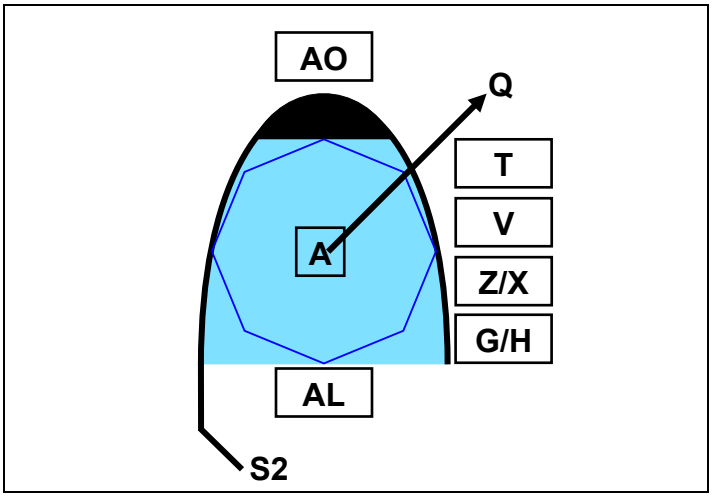


FIGURE B-3. Placement of space symbol amplifiers.

TABLE B-II. Descriptions and formats of space symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Space Vehicle Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-II. Descriptions and formats of space symbol amplifiers – Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
X	Altitude	A text amplifier for units that displays altitude flight level. See 5.3.7.5 for content.	Measurement units shall be displayed within the string Examples: 1500MSL FL150
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.6).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. Ex. Satellite: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBB-CC, where A = remote/local BBB = engagement status CC = weapon asset

B.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.



B.6 SPACE EQUIPMENT AND PLATFORM SYMBOLS

B.6.1 Space equipment and platform symbols. This section includes the lists of icons and modifiers for building space equipment and platform symbols.

B.6.2 Space equipment and platform icons. Table B-III depicts space equipment and platform icons. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-III. Space equipment and platform icons.

DESCRIPTION	ICON	REMARKS
MILITARY Type: Entity Symbol Set Code: 05 Code: **11**0000 Icon Type: Main		Reserved for hierarchical purposes.
SPACE VEHICLE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**01**00 Icon Type: Main		N/A
RE-ENTRY VEHICLE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**02**00 Icon Type: Main		N/A
PLANET LANDER Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**03**00 Icon Type: Main		N/A
ORBITER SHUTTLE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**04**00 Icon Type: Main		N/A
CAPSULE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**05**00 Icon Type: Main		N/A
SATELLITE, GENERAL Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**06**00 Icon Type: Main		APP-6



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-III. Space equipment and platform icons.

DESCRIPTION	ICON	REMARKS
SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**07**00 Icon Type: Main		N/A
ANTISATELLITE WEAPON Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**08**00 Icon Type: Main		N/A
ASTRONOMICAL SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**09**00 Icon Type: Main		N/A
BIOSATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**10**00 Icon Type: Main		N/A
COMMUNICATIONS SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**11**00 Icon Type: Main		N/A
EARTH OBSERVATION SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**12**00 Icon Type: Main		N/A
MINIATURIZED SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**13**00 Icon Type: Main		N/A








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-III. Space equipment and platform icons.

DESCRIPTION	ICON	REMARKS
NAVIGATIONAL SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**14**00 Icon Type: Main		N/A
RECONNAISSANCE SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**15**00 Icon Type: Main		N/A
SPACE STATION Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**16**00 Icon Type: Main		N/A
TETHERED SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**17**00 Icon Type: Main		N/A
WEATHER SATELLITE Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**18**00 Icon Type: Main		N/A
SPACE LAUNCHED VEHICLE (SLV) Type: Entity Type Entity: MILITARY Symbol Set Code: 05 Code: 11**19**00 Icon Type: Main		N/A
CIVILIAN Type: Entity Symbol Set Code: 05 Code: **12**0000 Icon Type: Main		Reserved for hierarchical purposes.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-III. Space equipment and platform icons.

DESCRIPTION	ICON	REMARKS
ORBITER SHUTTLE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**01**00 Icon Type: Main		N/A
CAPSULE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**02**00 Icon Type: Main		N/A
SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**03**00 Icon Type: Main		N/A
ASTRONOMICAL SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**04**00 Icon Type: Main		N/A
BIOSATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**05**00 Icon Type: Main		N/A
COMMUNICATIONS SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**06**00 Icon Type: Main		N/A
EARTH OBSERVATION SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**07**00 Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.








TABLE B-III. Space equipment and platform icons.

DESCRIPTION	ICON	REMARKS
MINIATURIZED SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**08**00 Icon Type: Main		N/A
NAVIGATIONAL SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**09**00 Icon Type: Main		N/A
SPACE STATION Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**10**00 Icon Type: Main		N/A
TETHERED SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**11**00 Icon Type: Main		N/A
WEATHER SATELLITE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 05 Code: 12**12**00 Icon Type: Main		N/A
MANUAL TRACK Type: Entity (Local) Symbol Set Code: 05 Code: **13**0000 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

B.6.3 Space equipment and platform sector 1 modifiers. Space equipment and platform sector 1 modifiers denote orbit category. Table B-IV lists space equipment and platform sector 1 modifiers and illustrates their placement within the bounding octagon.






TABLE B-IV. Space equipment and platform sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
LOW EARTH ORBIT (LEO) Symbol Set Code: 05 Code: 01	ORBIT		N/A
MEDIUM EARTH ORBIT (MEO) Symbol Set Code: 05 Code: 02	ORBIT		N/A
HIGH EARTH ORBIT (HEO) Symbol Set Code: 05 Code: 03	ORBIT		N/A
GEOSYNCHRONOUS ORBIT (GSO) Symbol Set Code: 05 Code: 04	ORBIT		N/A
GEOSTATIONARY ORBIT (GO) Symbol Set Code: 05 Code: 05	ORBIT		N/A
MOLNIYA ORBIT (MO) Symbol Set Code: 05 Code: 06	ORBIT		N/A
CYBERSPACE Symbol Set Code: 05 Code: 07	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

B.6.4 Space equipment and platform sector 2 modifiers. Space equipment and platform sector 2 modifiers denote sensor category. Table B-V lists space equipment and platform sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE B-V. Space equipment and platform sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
OPTICAL Symbol Set Code: 05 Code: 01	SENSOR		Only used with satellite icons.
INFRARED Symbol Set Code: 05 Code: 02	SENSOR		Only used with satellite icons.
RADAR Symbol Set Code: 05 Code: 03	SENSOR		Only used with satellite icons.
SIGNALS INTELLIGENCE (SIGINT) Symbol Set Code: 05 Code: 04	SENSOR		Only used with satellite icons.
CYBERSPACE Symbol Set Code: 05 Code: 05	CAPABILITY		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

B.7 SPACE MISSILE SYMBOLS

B.7.1 Space missile symbols. This section includes the lists of icons and modifiers for building space missile symbols.




B.7.2 Space missile icons. Table B-VI depicts the lone space missile icon. The space missile icon requires the vertical bounding octagon.

TABLE B-VI. Space missile icon.

DESCRIPTION	ICON	REMARKS
MISSILE Type: Entity Symbol Set Code: 06 Code: **11**0000 Icon Type: Main		

B.7.3 Space missile sector 1 modifiers. Space missile sector 1 modifiers denote launch origin or missile class categories. Table B-VII lists missile sector 1 modifiers and illustrates their placement within the bounding octagon.









TABLE B-VII. Space missile sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BALLISTIC Symbol Set Code: 06 Code: 01	MISSILE CLASS		N/A
SPACE Symbol Set Code: 06 Code: 02	LAUNCH ORIGIN		N/A
INTERCEPTOR Symbol Set Code: 06 Code: 03	MISSILE CLASS		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.








B.7.4 Space missile sector 2 modifiers. Space missile sector 2 modifiers denote projected missile destination, missile status, missile type, or missile range categories. Table B-VIII lists the missile sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE B-VIII. Space missile sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
SHORT RANGE Symbol Set Code: 06 Code: 01	MISSILE RANGE		1000km or less.
MEDIUM RANGE Symbol Set Code: 06 Code: 02	MISSILE RANGE		1000km to 3500km.
INTERMEDIATE RANGE Symbol Set Code: 06 Code: 03	MISSILE RANGE		1000km to 3500km.
LONG RANGE Symbol Set Code: 06 Code: 04	MISSILE RANGE		3500km to 5500km.
INTERCONTINENTAL Symbol Set Code: 06 Code: 05	MISSILE RANGE		5500km or greater.
ARROW Symbol Set Code: 06 Code: 06	MISSILE TYPE-BMD		Used with INTERCEPTOR modifier 1 only.
GROUND-BASED INTERCEPTOR (GBI) Symbol Set Code: 06 Code: 07	MISSILE TYPE-BMD		Used with INTERCEPTOR modifier 1 only.
PATRIOT Symbol Set Code: 06 Code: 08	MISSILE TYPE-BMD		Used with INTERCEPTOR modifier 1 only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-VIII. Space missile sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
STANDARD MISSILE - TERMINAL PHASE (SM-T) Symbol Set Code: 06 Code: 09	MISSILE TYPE-BMD		Used with INTERCEPTOR modifier 1 only.
STANDARD MISSILE - 3 (SM-3) Symbol Set Code: 06 Code: 10	MISSILE TYPE-BMD		Used with INTERCEPTOR modifier 1 only.
TERMINAL HIGH-ALTITUDE AREA DEFENSE (THAAD) Symbol Set Code: 06 Code: 11	MISSILE TYPE-BMD		Used with INTERCEPTOR modifier 1 only.
SPACE Symbol Set Code: 06 Code: 12	LAUNCH ORIGIN		N/A
CLOSE RANGE (CRBM) Symbol Set Code: 06 Code: 13	MISSILE RANGE		N/A
DEBRIS Symbol Set Code: 06 Code: 14	MISSILE TYPE-BMD		N/A
UNKNOWN Symbol Set Code: 06 Code: 15	MISSILE TYPE-BMD		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

AIR SYMBOLS

C.1 SCOPE

C.1.1 Scope. This appendix addresses symbols that support air equipment and weapons in the C2 domain. The tables in this appendix present the icons and modifiers for the air domain. This appendix is divided into two sections (see figure C-1): 1) equipment and platform symbols (see C.6) and 2) missile symbols (see C.7). This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

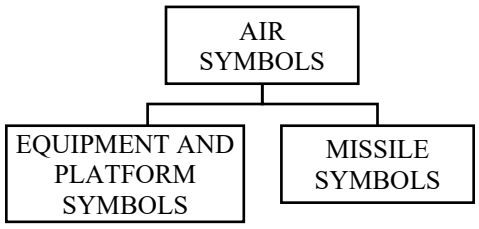


FIGURE C-1. Air appendix sections.

C.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

C.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

C.4 GENERAL REQUIREMENTS

C.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and air symbology.

C.5 DETAILED REQUIREMENTS

C.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

C.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

C.5.3 Composition of air symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Figure C-2 shows an example of an air equipment symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

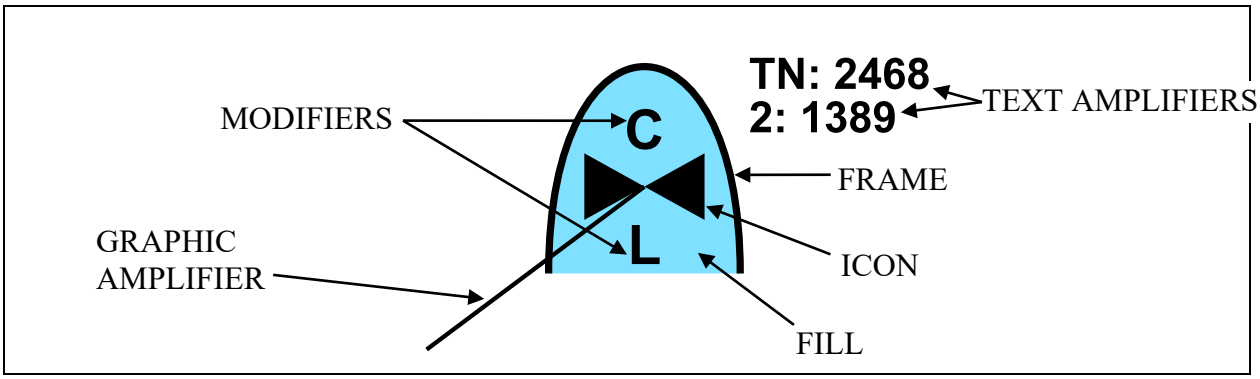







FIGURE C-2. Air symbol components.

C.5.3.1 Symbol building process. Table C-I depicts the symbol building process for air symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE C-I. Air symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity of the object from the air column in tables I, II, or III. In this example, the standard identity is friend. The example depicts a “friendly air track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “military rotary-wing,” an air entity type. The example depicts a “friendly military rotary-wing aircraft.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “cargo,” a sector 1 modifier. The example depicts a “friendly military rotary-wing cargo aircraft.”	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is “light,” a sector 2 modifier. The example depicts a “friendly military rotary-wing cargo aircraft with light cargo capacity.”	
5.	The finished symbol will appear as shown in the example.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

C.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table C-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table C-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

C.5.3.3 Amplifiers.

C.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure C-3 shows the placement of air symbol amplifiers around the friend symbol frame. Table C-II provides descriptions and formats of each amplifier.

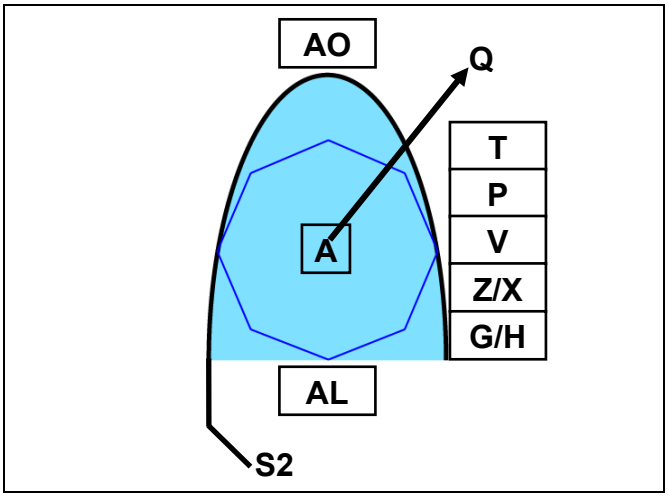


FIGURE C-3. Placement of air symbol amplifiers.

TABLE C-II. Descriptions and formats of air symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Air Vehicle/Air Vehicle Type Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. Display priority: Mode 5, Mode S, Mode 4, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### Example: 2:1234

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-II. Descriptions and formats of air symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
X	Altitude	A text amplifier for units that displays altitude/ flight level. See 5.3.7.5 for content.	Measurement units shall be displayed within the string Example: 1500MSL FL150
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.6).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. Ex. Aircraft: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBB-CC, where A = remote/local BBB = engagement status CC = weapon asset

C.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.






C.6 AIR EQUIPMENT AND PLATFORM SYMBOLS

C.6.1 Air equipment and platform symbols. This section includes the lists of icons and modifiers for building air equipment and platform symbols.

C.6.2 Air equipment and platform icons. Table C-III depicts air equipment and platform icons. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons.








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
MILITARY Type: Entity Symbol Set Code: 01 Code: **11**0000 Icon Type: Main		Reserved for hierarchical purposes.
FIXED-WING Type: Entity Type Entity: MILITARY Symbol Set Code: 01 Code: 11**01**00 Icon Type: Main		N/A
MEDICAL EVACUATION (MEDEVAC) Type: Entity Subtype Entity/Entity Type: MILITARY/FIXED-WING Symbol Set Code: 01 Code: 1101**01** Icon Type: Main		N/A
ATTACK/STRIKE Type: Entity Subtype Entity/Entity Type: MILITARY/FIXED-WING Symbol Set Code: 01 Code: 1101**02** Icon Type: Main		N/A
BOMBER Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**03** Icon Type: Main		N/A
FIGHTER Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**04** Icon Type: Main		N/A
FIGHTER/BOMBER Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**05** Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
CARGO Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**07** Icon Type: Main		N/A
ELECTRONIC/COMBAT (EC)/ JAMMER Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**08** Icon Type: Main		N/A
TANKER Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**09** Icon Type: Main		N/A
PATROL Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**10** Icon Type: Main		N/A
RECONNAISSANCE Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**11** Icon Type: Main		N/A
TRAINER Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**12** Icon Type: Main		N/A
UTILITY Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**13** Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
VSTOL Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**14** Icon Type: Main		N/A
AIRBORNE COMMAND POST (ACP) Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**15** Icon Type: Main		N/A
AIRBORNE EARLY WARNING (AEW) Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**16** Icon Type: Main		N/A
ANTISURFACE WARFARE Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**17** Icon Type: Main		N/A
ANTISUBMARINE WARFARE Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**18** Icon Type: Main		N/A
COMMUNICATIONS Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**19** Icon Type: Main		N/A
COMBAT SEARCH AND RESCUE (CSAR) Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**20** Icon Type: Main		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
ELECTRONIC SUPPORT (ES) Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 110121 Icon Type: Main		N/A
GOVERNMENT Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 110122 Icon Type: Main		N/A
MINE COUNTERMEASURES (MCM) Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 110123 Icon Type: Main		N/A
PERSONNEL RECOVERY Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 110124 Icon Type: Main		N/A
SEARCH AND RESCUE Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 110125 Icon Type: Main		N/A
SPECIAL OPERATIONS FORCES Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 110126 Icon Type: Main		N/A
ULTRA LIGHT Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 110127 Icon Type: Main		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
PHOTOGRAPHIC RECONNAISSANCE Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**28** Icon Type: Main		N/A
VERY IMPORTANT PERSON (VIP) Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**29** Icon Type: Main		N/A
SUPPRESSION OF ENEMY AIR DEFENSE Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**30** Icon Type: Main		N/A
PASSENGER Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**31** Icon Type: Main		N/A
ESCORT Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**32** Icon Type: Main		N/A
ELECTRONIC ATTACK (EA) Type: Entity Subtype Entity/Entity Type: MILITARY/ FIXED-WING Symbol Set Code: 01 Code: 1101**33** Icon Type: Main		N/A
ROTARY-WING Type: Entity Type Entity: MILITARY Symbol Set Code: 01 Code: 11**02**00 Icon Type: Main		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
UNMANNED AIRCRAFT (UA)/ UNMANNED AERIAL VEHICLE (UAV)/ UNMANNED AIRCRAFT SYSTEM (UAS)/ REMOTE PILOTED VEHICLE (RPV) Type: Entity Type Entity: MILITARY Symbol Set Code: 01 Code: 11**03**00 Icon Type: Main		N/A
VERTICAL-TAKEOFF UAV (VT-UAV) Type: Entity Type Entity: MILITARY Symbol Set Code: 01 Code: 11**04**00 Icon Type: Main		N/A
LIGHTER THAN AIR Type: Entity Type Entity: MILITARY Symbol Set Code: 01 Code: 11**05**00 Icon Type: Main		N/A
AIRSHIP Type: Entity Type Entity: MILITARY Symbol Set Code: 01 Code: 11**06**00 Icon Type: Main		N/A
TETHERED LIGHTER THAN AIR Type: Entity Type Entity: MILITARY Symbol Set Code: 01 Code: 11**07**00 Icon Type: Main		N/A
CIVILIAN Type: Entity Symbol Set Code: 01 Code: **12**0000 Icon Type: Main		Reserved for hierarchical purposes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
FIXED-WING Type: Entity Type Entity: CIVILIAN Symbol Set Code: 01 Code: 12**01**00 Icon Type: Main		N/A
ROTARY-WING Type: Entity Type Entity: CIVILIAN Symbol Set Code: 01 Code: 12**02**00 Icon Type: Main		N/A
UNMANNED AIRCRAFT (UA)/ UNMANNED AERIAL VEHICLE (UAV)/ UNMANNED AIRCRAFT SYSTEM (UAS)/ REMOTE PILOTED VEHICLE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 01 Code: 12**03**00 Icon Type: Full Octagon		N/A
LIGHTER THAN AIR Type: Entity Type Entity: CIVILIAN Symbol Set Code: 01 Code: 12**04**00 Icon Type: Main		N/A
AIRSHIP Type: Entity Type Entity: CIVILIAN Symbol Set Code: 01 Code: 12**05**00 Icon Type: Main		N/A
TETHERED LIGHTER THAN AIR Type: Entity Type Entity: CIVILIAN Symbol Set Code: 01 Code: 12**06**00 Icon Type: Main		N/A
WEAPON Type: Entity Symbol Set Code: 01 Code: **13**0000 Icon Type: Main		Reserved for hierarchical purposes.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
BOMB Type: Entity Type Entity: WEAPON Symbol Set Code: 01 Code: 13**01**00 Icon Type: Main		N/A
DECOY Type: Entity Type Entity: WEAPON Symbol Set Code: 01 Code: 13**02**00 Icon Type: Main		N/A
MANUAL TRACK Type: Entity (Local) Symbol Set Code: 10 Code: **14**0000 Icon Type: Full Octagon		N/A










C.6.3 Air equipment and platform sector 1 modifiers. Air equipment and platform sector 1 modifiers denote aircraft type and mission area categories. Table C-IV lists air equipment and platform sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE C-IV. Air equipment and platform sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ATTACK/STRIKE Symbol Set Code: 01 Code: 01	MILITARY AIRCRAFT TYPE		N/A
BOMBER Symbol Set Code: 01 Code: 02	MILITARY AIRCRAFT TYPE		N/A
CARGO Symbol Set Code: 01 Code: 03	AIRCRAFT TYPE		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
FIGHTER Symbol Set Code: 01 Code: 04	MILITARY AIRCRAFT TYPE		N/A
INTERCEPTOR Symbol Set Code: 01 Code: 05	MILITARY AIRCRAFT TYPE		APP-6
TANKER Symbol Set Code: 01 Code: 06	AIRCRAFT TYPE		N/A
UTILITY Symbol Set Code: 01 Code: 07	AIRCRAFT TYPE		N/A
VSTOL/VTOL Symbol Set Code: 01 Code: 08	AIRCRAFT TYPE		N/A
PASSENGER Symbol Set Code: 01 Code: 09	AIRCRAFT TYPE		N/A
ULTRA LIGHT Symbol Set Code: 01 Code: 10	AIRCRAFT TYPE		N/A
AIRBORNE COMMAND POST (ACP) Symbol Set Code: 01 Code: 11	MILITARY AIRCRAFT TYPE		N/A
AIRBORNE EARLY WARNING (AEW) Symbol Set Code: 01 Code: 12	MILITARY AIRCRAFT TYPE		N/A








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
GOVERNMENT Symbol Set Code: 01 Code: 13	AIRCRAFT TYPE		N/A
MEDICAL EVACUATION (MEDEVAC) Symbol Set Code: 01 Code: 14	MISSION AREA		N/A
ESCORT Symbol Set Code: 01 Code: 15	MILITARY MISSION AREA		N/A
ELECTRONIC COMBAT (EC)/JAMMER Symbol Set Code: 01 Code: 16	MILITARY MISSION AREA		N/A
PATROL Symbol Set Code: 01 Code: 17	MISSION AREA		N/A
RECONNAISSANCE Symbol Set Code: 01 Code: 18	MISSION AREA		N/A
TRAINER Symbol Set Code: 01 Code: 19	MISSION AREA		N/A
PHOTOGRAPHIC (RECONNAISSANCE) Symbol Set Code: 01 Code: 20	MISSION AREA		N/A
PERSONNEL RECOVERY Symbol Set Code: 01 Code: 21	MISSION AREA		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTISUBMARINE WARFARE Symbol Set Code: 01 Code: 22	MILITARY MISSION AREA		N/A
COMMUNICATIONS Symbol Set Code: 01 Code: 23	MISSION AREA		N/A
ELECTRONIC SUPPORT (ES) Symbol Set Code: 01 Code: 24	MILITARY MISSION AREA		N/A
MINE COUNTERMEASURES (MCM) Symbol Set Code: 01 Code: 25	MILITARY MISSION AREA		N/A
SEARCH AND RESCUE Symbol Set Code: 01 Code: 26	MISSION AREA		N/A
SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 01 Code: 27	MILITARY MISSION AREA		N/A
SURFACE WARFARE Symbol Set Code: 01 Code: 28	MILITARY MISSION AREA		N/A
VERY IMPORTANT PERSON (VIP) TRANSPORT Symbol Set Code: 01 Code: 29	MISSION AREA		N/A
COMBAT SEARCH AND RESCUE (CSAR) Symbol Set Code: 01 Code: 30	MILITARY MISSION AREA		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
SUPPRESSION OF ENEMY AIR DEFENSE Symbol Set Code: 01 Code: 31	MILITARY MISSION AREA		APP-6
ANTISURFACE WARFARE Symbol Set Code: 01 Code: 32	MILITARY MISSION AREA		N/A
FIGHTER/BOMBER Symbol Set Code: 01 Code: 33	MILITARY AIRCRAFT TYPE		N/A
INTENSIVE CARE Symbol Set Code: 01 Code: 34	MISSION AREA		N/A
ELECTRONIC ATTACK (EA) Symbol Set Code: 01 Code: 35	MILITARY MISSION AREA		N/A
MULTI-MISSION Symbol Set Code: 01 Code: 36	MISSION AREA		N/A
HIJACKING/ HIJACKED Symbol Set Code: 01 Code: 37	CRIME		N/A
ASW HELO- LAMPS Symbol Set Code: 01 Code: 38	MISSION AREA		Must be paired in conjunction with rotary wing icon
ASW HELO – SH-60R Symbol Set Code: 01 Code: 39	MISSION AREA		Must be paired in conjunction with rotary wing icon






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
HIJACKER Symbol Set Code: 01 Code: 40	CRIME		N/A
CYBERSPACE Symbol Set Code: 01 Code: 41	CAPABILITY		N/A








C.6.4 Air equipment and platform sector 2 modifiers. Air equipment and platform sector 2 modifiers denote capacity, re-fueling capability, range and track link availability categories. Table C-V lists air equipment and platform sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE C-V. Air equipment and platform sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
HEAVY Symbol Set Code: 01 Code: 01	CARGO/TRANSPORT CAPACITY		N/A
MEDIUM Symbol Set Code: 01 Code: 02	CARGO/TRANSPORT CAPACITY		N/A
LIGHT Symbol Set Code: 01 Code: 03	CARGO/TRANSPORT CAPACITY		N/A
BOOM-ONLY Symbol Set Code: 01 Code: 04	RE-FUELING CAPABILITY		Used with TANKER only.
DROGUE-ONLY Symbol Set Code: 01 Code: 05	RE-FUELING CAPABILITY		Used with TANKER only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-V. Air equipment and platform sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BOOM AND DROGUE Symbol Set Code: 01 Code: 06	RE-FUELING CAPABILITY		Used with TANKER only.
CLOSE RANGE Symbol Set Code: 01 Code: 07	RANGE		N/A
SHORT RANGE Symbol Set Code: 01 Code: 08	RANGE		N/A
MEDIUM RANGE Symbol Set Code: 01 Code: 09	RANGE		N/A
LONG RANGE Symbol Set Code: 01 Code: 10	RANGE		N/A
DOWNLINKED Symbol Set Code: 01 Code: 11	TRACK LINK AVAILABILITY		N/A
CYBERSPACE Symbol Set Code: 01 Code: 12	CAPABILITY		N/A


C.7 AIR MISSILE SYMBOLS

C.7.1 Air missile symbols. This section includes the lists of icons and modifiers for building air missile symbols.

C.7.2 Air missile icons. Table C-VI depicts the lone air missile icon. The air missile icon requires the vertical bounding octagon.







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-VI. Air missile icon.

DESCRIPTION	ICON	REMARKS
MISSILE Type: Entity Symbol Set Code: 02 Code: **11**0000 Icon Type: Main		



C.7.3 Air missile sector 1 modifiers. Air missile sector 1 modifiers denote launch origin or missile class categories. Table C-VII lists missile sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE C-VII. Air missile sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
AIR Symbol Set Code: 02 Code: 01	LAUNCH ORIGIN		N/A
SURFACE Symbol Set Code: 02 Code: 02	LAUNCH ORIGIN		N/A
SUBSURFACE Symbol Set Code: 02 Code: 03	LAUNCH ORIGIN		N/A
SPACE Symbol Set Code: 02 Code: 04	LAUNCH ORIGIN		N/A
ANTI-BALLISTIC Symbol Set Code: 02 Code: 05	MISSILE CLASS		N/A
BALLISTIC Symbol Set Code: 02 Code: 06	MISSILE CLASS		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-VII. Air missile sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CRUISE Symbol Set Code: 02 Code: 07	MISSILE CLASS		N/A
INTERCEPTOR Symbol Set Code: 02 Code: 08	MISSILE CLASS		N/A










C.7.4 Air missile sector 2 modifiers. Air missile sector 2 modifiers denote projected missile destination, missile status, missile type-BMD, missile type-AAW, or missile range categories. Table C-VIII lists the missile sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE C-VIII. Air missile sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
AIR Symbol Set Code: 02 Code: 01	MISSILE DESTINATION		N/A
SURFACE Symbol Set Code: 02 Code: 02	MISSILE DESTINATION		N/A
SUBSURFACE Symbol Set Code: 02 Code: 03	MISSILE DESTINATION		N/A
SPACE Symbol Set Code: 02 Code: 04	MISSILE DESTINATION		N/A
LAUNCHED Symbol Set Code: 02 Code: 05	MISSILE STATUS		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-VIII. Air missile sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
MISSILE Symbol Set Code: 02 Code: 06	MISSILE STATUS		APP-6
PATRIOT Symbol Set Code: 02 Code: 07	MISSILE TYPE-BMD		Used with INTERCEPTOR modifier 1 only.
STANDARD MISSILE - 2 (SM-2) Symbol Set Code: 02 Code: 08	MISSILE TYPE-AAW		Used with INTERCEPTOR modifier 1 only.
STANDARD MISSILE - 6 (SM-6) Symbol Set Code: 02 Code: 09	MISSILE TYPE-AAW		Used with INTERCEPTOR modifier 1 only.
EVOLVED SEA SPARROW MISSILE (ESSM) Symbol Set Code: 02 Code: 10	MISSILE TYPE-AAW		Used with INTERCEPTOR modifier 1 only.
ROLLING AIRFRAME MISSILE (RAM) Symbol Set Code: 02 Code: 11	MISSILE TYPE-AAW		Used with INTERCEPTOR modifier 1 only.
SHORT RANGE Symbol Set Code: 02 Code: 12	MISSILE RANGE		1000km or less.
MEDIUM RANGE Symbol Set Code: 02 Code: 13	MISSILE RANGE		1000km to 3500km. Typically used in reference to surface-to-air missile
INTERMEDIATE RANGE Symbol Set Code: 02 Code: 14	MISSILE RANGE		1000km to 3500km. Typically used in reference to ballistic missile

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-VIII. Air missile sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
LONG RANGE Symbol Set Code: 02 Code: 15	MISSILE RANGE		3500km to 5500km.
INTERCONTINENTAL Symbol Set Code: 02 Code: 16	MISSILE RANGE		5500km or greater.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

LAND SYMBOLS

D.1 SCOPE

D.1.1 Scope. This appendix addresses symbols that support land units, equipment and installations in the C2 domain. The tables in this appendix present the icons and modifiers for the land domain. This appendix is divided into four sections (see figure D-1): 1) unit symbols (see D.6), 2) civilian unit/organization symbols (see D.7), 3) equipment symbols (see D.8) and 4) installation symbols (see D.9). This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

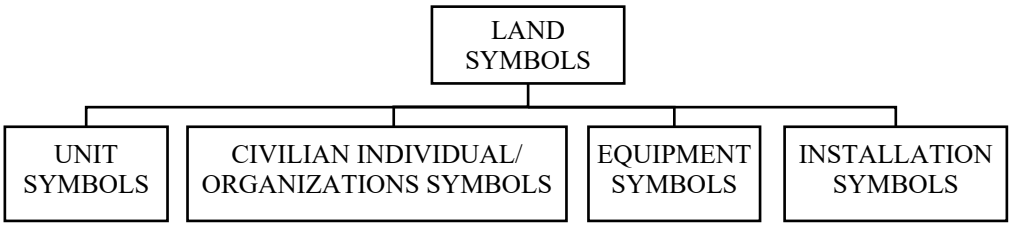


FIGURE D-1. Land appendix sections.

D.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

D.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

D.4 GENERAL REQUIREMENTS

D.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and land symbology.

D.5 DETAILED REQUIREMENTS

D.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

D.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

D.5.3 Composition of land symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Figure D-2 shows an example of a land unit symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

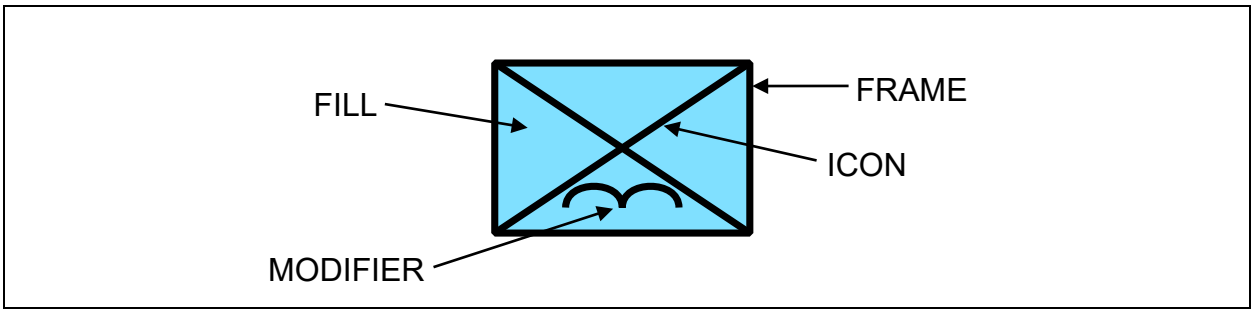






FIGURE D-2. Land symbol components.

D.5.3.1 Symbol building process. Table D-I depicts the symbol building process for land symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE D-I. Land symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity and land symbol type of the object from the land columns in tables I, II, or III. In this example, the standard identity is friend and the land symbol type is unit. The example depicts a “friendly unit.”	
2.	Choose an icon for the symbol. In this example, the icon is “infantry,” a land entity type. The infantry icon is a full frame icon; therefore, the friend version of the infantry icon shall be used with the friend frame. If the frame were hostile, then the hostile version of the infantry icon would be used. The example depicts a “friendly infantry unit.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “airborne,” a sector 2 modifier. The example depicts a “friendly airborne infantry unit.”	
4.	The finished symbol will appear as shown in the example.	

D.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table D-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table D-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

D.5.3.3 Amplifiers. Refer to the appropriate section for the placement and description of the land symbol amplifiers for units, equipment and installations.

D.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers.

D.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

D.5.3.3.2.1 Headquarters staff amplifier. The headquarters staff amplifier is a line extending downward from the left side of the frame that identifies units, equipment and installations as headquarters. The headquarters staff amplifier shall extend a distance of one octagon height below the bottom of the frame. See figure D-3.

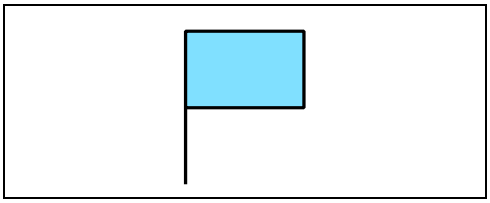


FIGURE D-3. Headquarters staff amplifier.

D.5.3.3.2.2 Echelon amplifier. The echelon amplifier provides a graphic representation of command level and a separate echelon known as Command, as shown in table D-II.

TABLE D-II. Echelon amplifiers.

AMPLIFIER	DESCRIPTION
Ø	TEAM/CREW
•	SQUAD
••	SECTION
•••	PLATOON/DETACHMENT
I	COMPANY/BATTERY/TROOP
I I	BATTALION/SQUADRON
I I I	REGIMENT/GROUP
X	BRIGADE
X X	DIVISION
X X X	CORPS
X X X X	ARMY
X X X X X	ARMY GROUP
X X X X X X	THEATER
+ +	COMMAND[1]

Note: 1. Command is a unit or units, an organization, or an area under the command of one individual. It does not correspond to any of the other echelons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

D.6 LAND UNIT SYMBOLS

D.6.1 Land unit symbols. This section includes the lists of amplifiers, icons, and modifiers for building land unit symbols.

D.6.2 Land unit amplifiers. The purpose of amplifier fields is to standardize the display of additional alphanumerical information that graphically describes a unit, and provides additional information on capabilities, status, location, etc. Figure D-4 shows the placement of land unit symbol amplifiers around the friend symbol frame. Table D-III provides descriptions and formats of each amplifier.

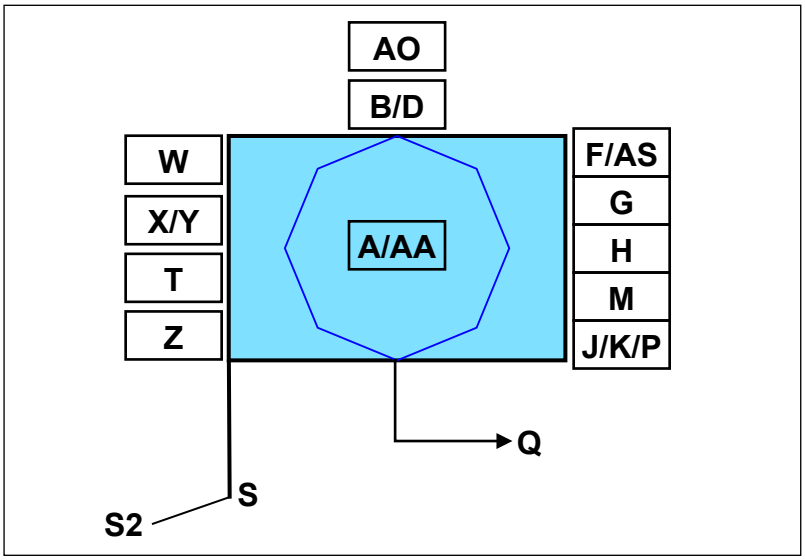


FIGURE D-4. Placement of land unit and civilian organization symbol amplifiers.

TABLE D-III. Descriptions and formats of land unit and civilian organization symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
B	Echelon	A graphic amplifier in a unit symbol that identifies command level (see figure 13).	
D	Task Force Indicator	A graphic amplifier that identifies a unit or an activity symbol as a task force (see 5.3.7.2 and figure 13 in the base document).	
F	Reinforced or Reduced	A text amplifier in a unit symbol that displays (+) for reinforced, (-) for reduced, (±) reinforced and reduced.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Descriptions and formats of land unit and civilian organization symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
J[1]	Evaluation Rating	A text amplifier for units, equipment and installations that consists of a single-letter reliability rating and a single digit credibility rating: **Reliability Ratings:** A-completely reliable B-usually reliable C-fairly reliable D-not usually reliable E-unreliable F-reliability cannot be judged. **Credibility Ratings:** 1-confirmed by other sources 2-probably true 3-possibly true 4-doubtfully true 5-improbable 6-truth cannot be judged.	
K	Combat Effectiveness	A text amplifier for units and installations that indicates effectiveness. **The entries are:** fully operational (FO) substantially operational (SO) marginally operational (MO) not operational (NO) unknown (UNK)	
L	Signature Equipment	A text amplifier for hostile equipment; "**!**" indicates detectable electronic signatures.	
M	Higher Formation	A text amplifier for units that indicates number or title of higher echelon command (Corps is designated by Roman numerals).	
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. **Display priority:** Mode 5, Mode S, Mode 4, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### **Example**: 2:1234
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13 in the base document).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Descriptions and formats of land unit and civilian organization symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
S	Headquarters Staff Indicator	A graphic amplifier for units, installations and activities that identifies them as a headquarters (see figure 4 and figure 13).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W[2]	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or "O/O" for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds.	
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.5 for content.	Measurement units shall be displayed within the string **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.6).	
AA	Special C2 Headquarters	A text modifier for units; indicator is contained inside the frame. A named command such as SHAPE, PACOM, CENTCOM, joint, multinational, or coalition commands such as CJTF, JTF, and MJTF.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.



TABLE D-III. Descriptions and formats of land unit and civilian organization symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBC-CC, where A = remote/local BBB = engagement status CC = weapon asset
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC). In stability activities, this field can be used for factions or groups.	

Notes: 1. Field J: See ATP 2-33.4.
2. Field W: D = day, H = hour, M = minute, S = second, Z = Greenwich or local time, MON= month and Y = year.









D.6.3 Land unit icons. Table D-IV depicts land unit icons. The information in gray is provided for orientation only and is not part of the icon.

TABLE D-IV. Land unit icons.

DESCRIPTION	ICON	REMARKS
COMMAND AND CONTROL Type: Entity Symbol Set Code: 10 Code: **11**0000 Icon Type: Main		Reserved for Amplifier field {AA} only. See table D-III
BROADCAST TRANSMITTER ANTENNAE Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**01**00 Icon Type: Full Octagon		N/A
CIVIL AFFAIRS Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**02**00 Icon Type: Main		N/A
CIVIL-MILITARY COOPERATION Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**03**00 Icon Type: Main		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
INFORMATION OPERATIONS Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**04**00 Icon Type: Main		N/A
LIAISON Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**05**00 Icon Type: Main		N/A
MILITARY INFORMATION SUPPORT OPERATIONS (MISO) Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**06**00 Icon Type: Main		N/A
BROADCAST TRANSMITTER ANTENNAE Type: Entity Subtype Entity/Entity Type: COMMAND AND CONTROL/MILITARY INFORMATION SUPPORT OPERATIONS (MISO) Symbol Set Code: 10 Code: 1106**01** Icon Type: Full Octagon		N/A
RADIO Type: Entity Type Entity/Entity Type: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**07**00 Icon Type: Main		**SIGNAL – RADIO**  Code:111**01**
RADIO RELAY Type: Entity Type Entity/Entity Type: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**08**00 Icon Type: Main		**SIGNAL – RADIO RELAY**  Code:111**02**






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
RADIO TELETYPE CENTER Type: Entity Type Entity/Entity Type: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**09**00 Icon Type: Main		**SIGNAL – TELETYPE**  Code:111**03**
SIGNAL Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**10**00 Icon Type: Full Frame		N/A
TACTICAL SATELLITE Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**11**00 Icon Type: Main		**SIGNAL - TACTICAL SATELLITE**  Code:111**04**
VIDEO IMAGERY (COMBAT CAMERA) Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**12**00 Icon Type: Main		**SIGNAL - VIDEO IMAGERY (COMBAT CAMERA)**  Code:111**05**
SPACE Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**13**00 Icon Type: Main		N/A
SPECIAL TROOPS Type: Entity Type Entity: COMMAND AND CONTROL Symbol Set Code: 10 Code: 11**14**00 Icon Type: Main		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
MOVEMENT AND MANEUVER Type: Entity Symbol Set Code: 10 Code: **12**0000	N/A	Reserved for hierarchical purposes.
AIR ASSAULT WITH ORGANIC LIFT Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**01**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
AIR TRAFFIC SERVICES/AIRFIELD OPERATIONS Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**02**00 Icon Type: Main		N/A
ANTITANK/ANTIARMOR Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**04**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
ARMORED Type: Entity Type Entity: MOVEMENT AND MANEUVER/ AINTITANK/ANTIARMOR Symbol Set Code: 10 Code: 1204**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MOTORIZED Type: Entity Type Entity: MOVEMENT AND MANEUVER/ AINTITANK/ANTIARMOR Symbol Set Code: 10 Code: 1204**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
ARMOR/ARMORED/ MECHANIZED/SELF-PROPELLED/TRACKED Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**05**00 Icon Type: Main		N/A
RECONNAISSANCE/CAVALRY/SCOUT Type: Entity Type Entity: MOVEMENT AND MANEUVER/ARMOR/ARMORED/ MECHANIZED/SELF-PROPELLED/TRACKED Symbol Set Code: 10 Code: 1205**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
AMPHIBIOUS Type: Entity Type Entity: MOVEMENT AND MANEUVER/ARMOR/ARMORED/ MECHANIZED/SELF-PROPELLED/TRACKED Symbol Set Code: 10 Code: 1205**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
ARMY AVIATION/AVIATION ROTARY WING Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**06**00 Icon Type: Main		N/A
RECONNAISSANCE Type: Entity Type Entity: MOVEMENT AND MANEUVER/ ARMY AVIATION/AVIATION ROTARY WING Symbol Set Code: 10 Code: 1206**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
AVIATION COMPOSITE Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**07**00 Icon Type: Main		N/A
AVIATION FIXED WING Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**08**00 Icon Type: Main		N/A
RECONNAISSANCE Type: Entity Type Entity: MOVEMENT AND MANEUVER/ ARMY AVIATION/AVIATION FIXED WING Symbol Set Code: 10 Code: 1208**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
COMBAT Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**09**00 Icon Type: Main		N/A
COMBINED ARMS Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**10**00 Icon Type: Main		N/A
INFANTRY Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**11**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
AMPHIBIOUS Type: Entity Subtype Entity/Entity Type: MOVEMENT AND MANEUVER/INFANTRY Symbol Set Code: 10 Code: 1211**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
ARMORED/MECHANIZED/ TRACKED Type: Entity Subtype Entity/Entity Type: MOVEMENT AND MANEUVER/INFANTRY Symbol Set Code: 10 Code: 1211**02** Icon Type: Main		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MAIN GUN SYSTEM Type: Entity Subtype Entity/Entity Type: MOVEMENT AND MANEUVER/INFANTRY Symbol Set Code: 10 Code: 1211**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MOTORIZED Type: Entity Subtype Entity/Entity Type: MOVEMENT AND MANEUVER/INFANTRY Symbol Set Code: 10 Code: 1211**04** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
INFANTRY FIGHTING VEHICLE Type: Entity Subtype Entity/Entity Type: MOVEMENT AND MANEUVER/INFANTRY Symbol Set Code: 10 Code: 1211**05** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
OBSERVER Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**12**00 Icon Type: Main		N/A
RECONNAISSANCE/CAVALRY/ SCOUT Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**13**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
RECONNAISSANCE AND SURVEILLANCE Type: Entity Type Entity: MOVEMENT AND MANEUVER/RECONNAISSANCE/CAVALRY/SCOUT Symbol Set Code: 10 Code: 1213**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MARINE Type: Entity Type Entity: MOVEMENT AND MANEUVER/RECONNAISSANCE/CAVALRY/SCOUT Symbol Set Code: 10 Code: 1213**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MOTORIZED Type: Entity Type Entity: MOVEMENT AND MANEUVER/RECONNAISSANCE/CAVALRY/SCOUT Symbol Set Code: 10 Code: 1213**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
SEA AIR LAND (SEAL) Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**14**00 Icon Type: Main		N/A
SNIPER Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**15**00 Icon Type: Main		N/A
SURVEILLANCE Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**16**00 Icon Type: Main		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
SPECIAL FORCES Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**1**700 Icon Type: Main		N/A
SPECIAL OPERATIONS FORCES (SOF) Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**18**00 Icon Type: Main		N/A
FIXED WING MISO Type: Entity Subtype Entity: MOVEMENT AND MANEUVER/SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 10 Code: 1218**01** Icon Type: Full Octagon		N/A
GROUND Type: Entity Subtype Entity: MOVEMENT AND MANEUVER/SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 10 Code: 1218**02** Icon Type: Full Frame		N/A
SPECIAL BOAT Type: Entity Subtype Entity: MOVEMENT AND MANEUVER/SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 10 Code: 1218**03** Icon Type: Main +1		N/A
SPECIAL SSNR Type: Entity Subtype Entity: MOVEMENT AND MANEUVER/SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 10 Code: 1218**04** Icon Type: Main +1		N/A








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
UNDERWATER DEMOLITION TEAM Type: Entity Subtype Entity: MOVEMENT AND MANEUVER/SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 10 Code: 1218**05** Icon Type: Main		N/A
UNMANNED AERIAL SYSTEMS Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**19**00 Icon Type: Main		N/A
RANGER Type: Entity Type Entity: MOVEMENT AND MANEUVER Symbol Set Code: 10 Code: 12**20**00 Icon Type: Main		N/A
FIRES Type: Entity Symbol Set Code: 10 Code: **13**0000	N/A	Reserved for hierarchical purposes.
AIR DEFENSE Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**01**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MAIN GUN SYSTEM Type: Entity Subtype Entity: FIRES/AIR DEFENSE Symbol Set Code: 10 Code: 13010**1** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MISSILE Type: Entity Subtype Entity: FIRES/AIR DEFENSE Symbol Set Code: 10 Code: 13010**2** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
AIR AND MISSILE DEFENSE Type: Entity Subtype Entity: FIRES/AIR DEFENSE Symbol Set Code: 10 Code: 1301**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
AIR/LAND NAVAL GUNFIRE LIAISON Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**02**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
FIELD ARTILLERY Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**03**00 Icon Type: Main		N/A
SELF–PROPELLED Type: Entity Subtype Entity: FIRES/FIELD ARTILLERY Symbol Set Code: 10 Code: 1303**01** Icon Type: Main		N/A
TARGET ACQUISITION Type: Entity Subtype Entity: FIRES/FIELD ARTILLERY Symbol Set Code: 10 Code: 1303**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
FIELD ARTILLERY OBSERVER Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**04**00 Icon Type: Main		N/A
JOINT FIRE SUPPORT Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**05**00 Icon Type: Main		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
METEOROLOGICAL Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**06**00 Icon Type: Main		N/A
MISSILE Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**07**00 Icon Type: Main		N/A
MORTAR Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**08**00 Icon Type: Main		N/A
ARMORED/MECHANIZED/ TRACKED Type: Entity Subtype Entity/Entity Type: FIRES/MORTAR Symbol Set Code: 10 Code: 1308**01** Icon Type: Full Octagon		N/A
SELF-PROPELLED WHEELED Type: Entity Subtype Entity/Entity Type: FIRES/MORTAR Symbol Set Code: 10 Code: 1308**02** Icon Type: Full Octagon		N/A
TOWED Type: Entity Subtype Entity/Entity Type: FIRES/MORTAR Symbol Set Code: 10 Code: 1308**03** Icon Type: Full Octagon		N/A
SURVEY Type: Entity Type Entity: FIRES Symbol Set Code: 10 Code: 13**09**00 Icon Type: Main		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
PROTECTION Type: Entity Symbol Set Code: 10 Code: **14**0000	N/A	Reserved for hierarchical purposes.
CHEMICAL BIOLOGICAL RADIOLOGICAL NUCLEAR DEFENSE Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**01**00 Icon Type: Main		N/A
MECHANIZED Type: Entity Subtype Entity: PROTECTION/CHEMICAL BIOLOGICAL RADIOLOGICAL NUCLEAR DEFENSE Symbol Set Code: 10 Code: 1401**01** Icon Type: Main		
MOTORIZED Type: Entity Subtype Entity: PROTECTION/CHEMICAL BIOLOGICAL RADIOLOGICAL NUCLEAR DEFENSE Symbol Set Code: 10 Code: 1401**02** Icon Type: Full Octagon		
RECONNAISSANCE Type: Entity Subtype Entity: PROTECTION/CHEMICAL BIOLOGICAL RADIOLOGICAL NUCLEAR DEFENSE Symbol Set Code: 10 Code: 1401**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
RECONNAISSANCE ARMORED Type: Entity Subtype Entity: PROTECTION/CHEMICAL BIOLOGICAL RADIOLOGICAL NUCLEAR DEFENSE Symbol Set Code: 10 Code: 1401**04** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
RECONNAISSANCE EQUIPPED Type: Entity Subtype Entity: PROTECTION/CHEMICAL BIOLOGICAL RADIOLOGICAL NUCLEAR DEFENSE Symbol Set Code: 10 Code: 1401**05** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
CHEMICAL, BIOLOGICAL, RADIOLOGICAL, NUCLEAR, AND HIGH-YIELD EXPLOSIVES Type: Entity Subtype Entity: PROTECTION/CHEMICAL BIOLOGICAL RADIOLOGICAL NUCLEAR DEFENSE Symbol Set Code: 10 Code: 1401**06** Icon Type: Main		N/A
COMBAT SUPPORT (MANEUVER ENHANCEMENT) Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**02**00 Icon Type: Main		N/A
CRIMINAL INVESTIGATION DIVISION Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**03**00 Icon Type: Main		N/A
DIVING Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**04**00 Icon Type: Main		N/A
DOG Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**05**00 Icon Type: Main		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
DRILLING Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**06**00 Icon Type: Main		N/A
ENGINEER Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**07**00 Icon Type: Main		N/A
MECHANIZED Type: Entity Subtype Entity: PROTECTION/ENGINEER Symbol Set Code: 10 Code: 1407**01** Icon Type: Main		
MOTORIZED Type: Entity Subtype Entity: PROTECTION/ENGINEER Symbol Set Code: 10 Code: 1407**02** Icon Type: Full Octagon		
RECONNAISSANCE Type: Entity Subtype Entity: PROTECTION/ENGINEER Symbol Set Code: 10 Code: 1407**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
EXPLOSIVE ORDNANCE DISPOSAL (EOD) Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**08**00 Icon Type: Main		N/A
FIELD CAMP CONSTRUCTION Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**09**00 Icon Type: Main+1		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
FIRE FIGHTING/FIRE PROTECTION Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 141**0**00 Icon Type: Main		N/A
GEOSPATIAL SUPPORT/GEOSPATIAL INFORMATION SUPPORT Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 141**1**00 Icon Type: Main		N/A
MILITARY POLICE Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 141**2**00 Icon Type: Main		N/A
MINE Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 141**3**00 Icon Type: Main		N/A
MINE CLEARING Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 141**4**00 Icon Type: Full Octagon		N/A
MINE LAUNCHING Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 141**5**00 Icon Type: Full Octagon		N/A
MINE LAYING Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 141**6**00 Icon Type: Full Octagon		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
SECURITY Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**1**700 Icon Type: Main		N/A
MECHANIZED Type: Entity Subtype Entity: PROTECTION/SECURITY Symbol Set Code: 10 Code: 1417**01** Icon Type: Main		N/A
MOTORIZED Type: Entity Subtype Entity: PROTECTION/SECURITY Symbol Set Code: 10 Code: 1417**02** Icon Type: Main		N/A
SEARCH AND RESCUE Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**1**800 Icon Type: Main		N/A
SECURITY POLICE (AIR) Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**1**900 Icon Type: Main+2		N/A
SHORE PATROL Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**2**000 Icon Type: Main		N/A
TOPOGRAPHIC/GEOSPATIAL Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**21**00 Icon Type: Main		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
MISSILE DEFENSE Type: Entity Type Entity: PROTECTION Symbol Set Code: 10 Code: 14**22**00 Icon Type: Main		N/A
INTELLIGENCE Type: Entity Symbol Set Code: 10 Code: **15**0000	N/A	Reserved for hierarchical purposes.
ANALYSIS Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**01**00 Icon Type: Full Octagon		N/A
COUNTERINTELLIGENCE Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**02**00 Icon Type: Main		N/A
DIRECTION FINDING Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**03**00 Icon Type: Full Octagon		N/A
ELECTRONIC RANGING Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**04**00 Icon Type: Main		N/A
ELECTRONIC WARFARE Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**05**00 Icon Type: Main		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
ANALYSIS Type: Entity Subtype Entity/Entity Type: INTELLIGENCE/ELECTRONIC WARFARE Symbol Set Code: 10 Code: 150501 Icon Type: Full Octagon		N/A
DIRECTION FINDING Type: Entity Subtype Entity/Entity Type: INTELLIGENCE/ELECTRONIC WARFARE Symbol Set Code: 10 Code: 150502 Icon Type: Full Octagon		N/A
INTERCEPT Type: Entity Subtype Entity/Entity Type: INTELLIGENCE/ELECTRONIC WARFARE Symbol Set Code: 10 Code: 150503 Icon Type: Full Octagon		N/A
JAMMING Type: Entity Subtype Entity/Entity Type: INTELLIGENCE/ELECTRONIC WARFARE Symbol Set Code: 10 Code: 150504 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
SEARCH Type: Entity Subtype Entity/Entity Type: INTELLIGENCE/ELECTRONIC WARFARE Symbol Set Code: 10 Code: 150505 Icon Type: Full Octagon		N/A
INTERCEPT (SEARCH AND RECORDING) Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 150600 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
INTERROGATION Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**07**00 Icon Type: Main		N/A
JAMMING Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**08**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
JOINT INTELLIGENCE CENTER Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**09**00 Icon Type: Main		N/A
MILITARY INTELLIGENCE Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**10**00 Icon Type: Main		N/A
SEARCH Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**11**00 Icon Type: Full Octagon		N/A
SENSOR Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**12**00 Icon Type: Main		N/A
MILITARY HISTORY Type: Entity Type Entity: INTELLIGENCE Symbol Set Code: 10 Code: 15**13**00 Icon Type: Main		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
SUSTAINMENT Type: Entity Symbol Set Code: 10 Code: **16**0000 Icon Type: Main		N/A
ADMINISTRATIVE Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**01**00 Icon Type: Main		N/A
ALL CLASSES OF SUPPLY Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**02**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
AIRPORT OF DEBARKATION/AIRPORT OF EMBARKATION Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**03**00 Icon Type: Main+1		N/A
AMMUNITION Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**04**00 Icon Type: Main		N/A
BAND Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**05**00 Icon Type: Main		N/A
ARMY MUSIC Type: Entity Subtype Entity: SUSTAINMENT/BAND Symbol Set Code: 10 Code: 160**501** Icon Type: Main		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
COMBAT SERVICE SUPPORT Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**06**00 Icon Type: Main		N/A
FINANCE Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**07**00 Icon Type: Main		N/A
JUDGE ADVOCATE GENERAL Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**08**00 Icon Type: Main		N/A
LABOR Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**09**00 Icon Type: Main		N/A
LAUNDRY/BATH Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**10**00 Icon Type: Main		N/A
MAINTENANCE Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**11**00 Icon Type: Main		N/A
MATERIAL Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**12**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
MEDICAL Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 161300 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MEDICAL TREATMENT FACILITY Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 161400 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MORALE, WELFARE AND RECREATION Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 161500 Icon Type: Main		N/A
MORTUARY AFFAIRS/GRAVES REGISTRATION Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 161600 Icon Type: Main		N/A
MULTIPLE CLASSES OF SUPPLY Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 161700 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
NATO SUPPLY CLASS I Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 161800 Icon Type: Full Frame		These classes are referenced in NATO APP-6. Items of subsistence, e.g. food and forage, which are consumed by personnel or animals at an approximately uniform rate, irrespective of local changes in combat or terrain conditions.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
NATO SUPPLY CLASS II Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**20**00 Icon Type: Full Frame		These classes are referenced in NATO APP-6 Supplies for which allowances are established by tables of organization and equipment, e.g. clothing, weapons, tools, spare parts, vehicles.
NATO SUPPLY CLASS IV Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**21**00 Icon Type: Full Frame		These classes are referenced in NATO APP-6 Supplies for which initial issue allowances are not prescribed by approved issue tables. Normally includes fortification and construction materials, as well as additional quantities of items identical to those authorized for initial issue (Class II) such as additional vehicles.
ORDNANCE Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**23**00 Icon Type: Main		N/A
PERSONNEL SERVICES Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**24**00 Icon Type: Main		N/A
PETROLEUM, OIL AND LUBRICANTS Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**25**00 Icon Type: Main		N/A
PUBLIC AFFAIRS/PUBLIC INFORMATION Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**28**00 Icon Type: Main		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
QUARTERMASTER Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**29**00 Icon Type: Main		N/A
RAILHEAD Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**30**00 Icon Type: Main+1		N/A
RELIGIOUS SUPPORT Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**31**00 Icon Type: Main		N/A
REPLACEMENT HOLDING UNIT Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**32**00 Icon Type: Main		N/A
SEAPORT OF DEBARKATION/ **SEAPORT OF EMBARKATION** Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**33**00 Icon Type: Main+1		N/A
JOINT INFORMATION BUREAU (JIB) Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**35**00 Icon Type: Main		N/A
TRANSPORTATION Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**36**00 Icon Type: Main		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
FLOATING CRAFT Type: Entity Type Entity/Entity Type : SUSTAINMENT/ TRANSPORTATION Symbol Set Code: 10 Code: 1636**01** Icon Type: Main+1		N/A
US SUPPLY CLASS I Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**37**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Subsistence (food), gratuitous (free) health and comfort items.
US SUPPLY CLASS IV Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**40**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Construction materials, including installed equipment and all fortification and barrier materials.
US SUPPLY CLASS VI Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**42**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Personal demand items (such as health and hygiene products, soaps and toothpaste, writing material, snack food, beverages, cigarettes, batteries, alcohol and cameras—nonmilitary sales items).
US SUPPLY CLASS VII Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**43**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Major end items such as launchers, tanks, mobile machine shops and vehicles.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
US SUPPLY CLASS VIII Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**44**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Medical material (equipment and consumables) including repair parts peculiar to medical equipment. (Class VIIIa – Medical consumable supplies not including blood & blood products; Class VIIIb – Blood & blood components (whole blood, platelets, plasma, packed red cells, etc.).
US SUPPLY CLASS IX Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**45**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Repair parts and components to include kits, assemblies and subassemblies (repairable or non-repairable) required for maintenance support of all equipment.
US SUPPLY CLASS X Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**46**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Material to support nonmilitary programs such as agriculture and economic development (not included in Classes I through IX).
WATER PURIFICATION Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**48**00 Icon Type: Main		N/A
BROADCAST Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**49**00 Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
NATO SUPPLY CLASS - ALL Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**50**00 Icon Type: Full Frame		NATO Only
INTERPRETER/TRANSLATOR Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**51**00 Icon Type: Main		N/A
SUPPORT Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**52**00 Icon Type: Main		N/A
ARMY FIELD SUPPORT Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**53**00 Icon Type: Main		N/A
CONTRACTING SERVICES Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**54**00 Icon Type: Main		N/A
PARACHUTE RIGGER Type: Entity Type Entity: SUSTAINMENT Symbol Set Code: 10 Code: 16**55**00 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
NAVAL Type: Entity Symbol Set Code: 10 Code: 17**00**00	N/A	Reserved for hierarchical purposes.
NAVAL Type: Entity Type Entity: NAVAL Symbol Set Code: 10 Code: 17**01**00 Icon Type: Main		N/A
NAMED HEADQUARTERS Type: Entity Symbol Set Code: 10 Code: **18**0000	N/A	Reserved for hierarchical purposes.
ALLIED COMMAND EUROPE RAPID REACTION CORPS (ARRC) Type: Entity Type Entity: NAMED HEADQUARTERS Symbol Set Code: 10 Code: 18**01**00 Icon Type: Main		N/A
ALLIED COMMAND OPERATIONS Type: Entity Type Entity: NAMED HEADQUARTERS Symbol Set Code: 10 Code: 18**02**00 Icon Type: Main		N/A
INTERNATIONAL SECURITY ASSISTANCE FORCE (ISAF) Type: Entity Type Entity: NAMED HEADQUARTERS Symbol Set Code: 10 Code: 18**03**00 Icon Type: Main		N/A
MULTINATIONAL (MN) Type: Entity Type Entity: NAMED HEADQUARTERS Symbol Set Code: 10 Code: 18**04**00 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
EMERGENCY OPERATION Type: Entity Symbol Set Code: 10 Code: **19**0000 Icon Type: Full Octagon		N/A
LAW ENFORCEMENT Type: Entity Symbol Set Code: 10 Code: **20**0000 Icon Type: Full Octagon		N/A
BUREAU OF ALCOHOL, TOBACCO, FIREARMS AND EXPLOSIVES (ATF) (DEPARTMENT OF JUSTICE) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**01**00 Icon Type: Main		N/A
BORDER PATROL Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**02**00 Icon Type: Full Octagon		N/A
CUSTOMS SERVICE Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**03**00 Icon Type: Full Octagon		N/A
DRUG ENFORCEMENT ADMINISTRATION (DEA) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**04**00 Icon Type: Main		N/A
DEPARTMENT OF JUSTICE (DOJ) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**05**00 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
FEDERAL BUREAU OF INVESTIGATION (FBI) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**06**00 Icon Type: Main		N/A
POLICE Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**07**00 Icon Type: Main		N/A
PRISON Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**08**00 Icon Type: Full Octagon		N/A
UNITED STATES SECRET SERVICE(TREAS) (USSS) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**09**00 Icon Type: Main		N/A
TRANSPORTATION SECURITY ADMINISTRATION (TSA) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**10**00 Icon Type: Main		N/A
COAST GUARD Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**11**00 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
US MARSHALS SERVICE Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**12**00 Icon Type: Full Octagon		N/A
INTERNAL SECURITY FORCE Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 10 Code: 20**13**00 Icon Type: Main		N/A










D.6.4 Land unit sector 1 modifiers. Land unit sector 1 modifiers denote mobility, capability and composite loss categories. Table D-V lists land unit sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE D-V. Land unit sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
TACTICAL SATELLITE COMMUNICATIONS Symbol Set Code: 10 Code: 01	CAPABILITY		N/A
AREA Symbol Set Code: 10 Code: 02	CAPABILITY		N/A
ATTACK Symbol Set Code: 10 Code: 03	CAPABILITY		N/A
BIOLOGICAL Symbol Set Code: 10 Code: 04	CAPABILITY		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BORDER Symbol Set Code: 10 Code: 05	CAPABILITY		N/A
BRIDGING Symbol Set Code: 10 Code: 06	CAPABILITY		N/A
CHEMICAL Symbol Set Code: 10 Code: 07	CAPABILITY		N/A
CLOSE PROTECTION Symbol Set Code: 10 Code: 08	CAPABILITY		N/A
COMBAT Symbol Set Code: 10 Code: 09	CAPABILITY		N/A
COMMAND AND CONTROL Symbol Set Code: 10 Code: 10	CAPABILITY		N/A
COMMUNICATIONS CONTINGENCY PACKAGE Symbol Set Code: 10 Code: 11	CAPABILITY		N/A
CONSTRUCTION Symbol Set Code: 10 Code: 12	CAPABILITY		N/A
CROSS CULTURAL COMMUNICATION Symbol Set Code: 10 Code: 13	CAPABILITY		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CROWD AND RIOT CONTROL Symbol Set Code: 10 Code: 14	CAPABILITY		N/A
DECONTAMINATION Symbol Set Code: 10 Code: 15	CAPABILITY		N/A
DETENTION Symbol Set Code: 10 Code: 16	CAPABILITY		N/A
DIRECT COMMUNICATIONS Symbol Set Code: 10 Code: 17	CAPABILITY		N/A
DIVING Symbol Set Code: 10 Code: 18	CAPABILITY		N/A
DIVISION Symbol Set Code: 10 Code: 19	CAPABILITY		N/A
DOG Symbol Set Code: 10 Code: 20	CAPABILITY		N/A
DRILLING Symbol Set Code: 10 Code: 21	CAPABILITY		N/A
ELECTRO-OPTICAL Symbol Set Code: 10 Code: 22	CAPABILITY		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ENHANCED Symbol Set Code: 10 Code: 23	CAPABILITY		N/A
EXPLOSIVE ORDNANCE DISPOSAL (EOD) Symbol Set Code: 10 Code: 24	CAPABILITY		N/A
FIRE DIRECTION CENTER Symbol Set Code: 10 Code: 25	CAPABILITY		N/A
FORCE Symbol Set Code: 10 Code: 26	CAPABILITY		N/A
FORWARD Symbol Set Code: 10 Code: 27	CAPABILITY		N/A
GROUND STATION MODULE Symbol Set Code: 10 Code: 28	CAPABILITY		N/A
LANDING SUPPORT Symbol Set Code: 10 Code: 29	CAPABILITY		N/A
MAINTENANCE Symbol Set Code: 10 Code: 31	CAPABILITY		N/A
METEOROLOGICAL Symbol Set Code: 10 Code: 32	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
MINE COUNTERMEASURE Symbol Set Code: 10 Code: 33	CAPABILITY		N/A
MISSILE Symbol Set Code: 10 Code: 34	CAPABILITY		N/A
MOBILE ADVISOR AND SUPPORT Symbol Set Code: 10 Code: 35	CAPABILITY		N/A
MOBILE SUBSCRIBER EQUIPMENT Symbol Set Code: 10 Code: 36	CAPABILITY		N/A
MOBILITY SUPPORT Symbol Set Code: 10 Code: 37	CAPABILITY		N/A
MULTINATIONAL Symbol Set Code: 10 Code: 39	CAPABILITY		N/A
MULTINATIONAL SPECIALIZED UNIT Symbol Set Code: 10 Code: 40	CAPABILITY		N/A
MULTIPLE ROCKET LAUNCHER Symbol Set Code: 10 Code: 41	CAPABILITY		N/A
NATO MEDICAL ROLE 1 Symbol Set Code: 10 Code: 42	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
NATO MEDICAL ROLE 2 Symbol Set Code: 10 Code: 43	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
NATO MEDICAL ROLE 3 Symbol Set Code: 10 Code: 44	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
NATO MEDICAL ROLE 4 Symbol Set Code: 10 Code: 45	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
NAVAL Symbol Set Code: 10 Code: 46	CAPABILITY		N/A
UNMANNED AERIAL SYSTEMS (UAS) Symbol Set Code: 10 Code: 47	CAPABILITY		N/A
NUCLEAR Symbol Set Code: 10 Code: 48	CAPABILITY		N/A
OPERATIONS Symbol Set Code: 10 Code: 49	CAPABILITY		N/A
RADAR Symbol Set Code: 10 Code: 50	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
RADIO FREQUENCY IDENTIFICATION (RFID) INTERROGATOR/ SENSOR Symbol Set Code: 10 Code: 51	CAPABILITY		N/A
RADIOLOGICAL Symbol Set Code: 10 Code: 52	CAPABILITY		N/A
SEARCH AND RESCUE Symbol Set Code: 10 Code: 53	CAPABILITY		N/A
SECURITY Symbol Set Code: 10 Code: 54	CAPABILITY		N/A
SENSOR Symbol Set Code: 10 Code: 55	CAPABILITY		N/A
WEAPON Symbol Set Code: 10 Code: 56	CAPABILITY		N/A
SIGNALS INTELLIGENCE Symbol Set Code: 10 Code: 57	CAPABILITY		N/A
ARMORED Symbol Set Code: 10 Code: 58	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
SINGLE ROCKET LAUNCHER Symbol Set Code: 10 Code: 59	CAPABILITY		N/A
SMOKE Symbol Set Code: 10 Code: 60	CAPABILITY		N/A
SNIPER Symbol Set Code: 10 Code: 61	CAPABILITY		N/A
SOUND RANGING Symbol Set Code: 10 Code: 62	CAPABILITY		N/A
SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 10 Code: 63	CAPABILITY		N/A
SPECIAL WEAPONS AND TACTICS Symbol Set Code: 10 Code: 64	CAPABILITY		N/A
SURVEY Symbol Set Code: 10 Code: 65	CAPABILITY		N/A
TACTICAL EXPLOITATION Symbol Set Code: 10 Code: 66	CAPABILITY		N/A
TARGET ACQUISITION Symbol Set Code: 10 Code: 67	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
TOPOGRAPHIC/ GEOSPATIAL Symbol Set Code: 10 Code: 68	CAPABILITY		N/A
UTILITY Symbol Set Code: 10 Code: 69	CAPABILITY		N/A
VIDEO IMAGERY (COMBAT CAMERA) Symbol Set Code: 10 Code: 70	CAPABILITY		N/A
MOBILITY ASSAULT Symbol Set Code: 10 Code: 71	CAPABILITY		N/A
AMPHIBIOUS WARFARE SHIP Symbol Set Code: 10 Code: 72	CAPABILITY		N/A
LOAD HANDLING SYSTEM Symbol Set Code: 10 Code: 73	CAPABILITY		N/A
PALLETIZED LOAD SYSTEM Symbol Set Code: 10 Code: 74	CAPABILITY		N/A
MEDEVAC Symbol Set Code: 10 Code: 75	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CYBERSPACE Symbol Set Code: 10 Code: 76	CAPABILITY		N/A
SUPPORT Symbol Set Code: 10 Code: 77	CAPABILITY		N/A
AVIATION Symbol Set Code: 10 Code: 78	CAPABILITY		N/A
ROUTE, RECONNAISSANCE, AND CLEARANCE Symbol Set Code: 10 Code: 79	CAPABILITY		N/A
TILT-ROTOR Symbol Set Code: 10 Code: 80	CAPABILITY		N/A
COMMAND POST NODE Symbol Set Code: 10 Code: 81	CAPABILITY		N/A
JOINT NETWORK NODE Symbol Set Code: 10 Code: 82	CAPABILITY		N/A
RETRANSMISSION SITE Symbol Set Code: 10 Code: 83	CAPABILITY		N/A








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ASSAULT Symbol Set Code: 10 Code: 84	CAPABILITY		N/A
WEAPONS Symbol Set Code: 10 Code: 85	CAPABILITY		N/A
CRIMINAL INVESTIGATION DIVISION Symbol Set Code: 10 Code: 86	CAPABILITY		N/A
DIGITAL Symbol Set Code: 10 Code: 87	CAPABILITY		N/A
NETWORK OR NETWORK OPERATIONS Symbol Set Code: 10 Code: 88	CAPABILITY		N/A
AIRFIELD, AERIAL PORT OF DEBARKATION, OR AERIAL PORT OF EMBARKATION Symbol Set Code: 10 Code: 89	CAPABILITY		N/A
PIPELINE Symbol Set Code: 10 Code: 90	CAPABILITY		N/A
POSTAL Symbol Set Code: 10 Code: 91	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.










TABLE D-V. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
WATER Symbol Set Code: 10 Code: 92	CAPABILITY		N/A
INDEPENDENT COMMAND Symbol Set Code: 10 Code: 93	CAPABILITY		N/A
THEATER Symbol Set Code: 10 Code: 94	CAPABILITY		N/A
ARMY OR THEATER ARMY Symbol Set Code: 10 Code: 95	CAPABILITY		N/A
CORPS Symbol Set Code: 10 Code: 96	CAPABILITY		N/A
BRIGADE Symbol Set Code: 10 Code: 97	CAPABILITY		N/A
HEADQUARTERS OR HEADQUARTERS STAFF ELEMENT Symbol Set Code: 10 Code: 98	CAPABILITY		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.

D.6.5 Land unit sector 2 modifiers. Land unit sector 2 modifiers denote close range and control, mobility and capability categories. Table D-VI lists land unit sector 2 modifiers and illustrates their placement within the bounding octagon.









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
AIRBORNE Symbol Set Code: 10 Code: 01	MOBILITY		N/A
ARCTIC Symbol Set Code: 10 Code: 02	MOBILITY		N/A
BATTLE DAMAGE REPAIR Symbol Set Code: 10 Code: 03	CAPABILITY		N/A
BICYCLE EQUIPPED Symbol Set Code: 10 Code: 04	MOBILITY		N/A
CASUALTY STAGING Symbol Set Code: 10 Code: 05	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
CLEARING Symbol Set Code: 10 Code: 06	CAPABILITY		N/A
CLOSE RANGE Symbol Set Code: 10 Code: 07	CAPABILITY		N/A
CONTROL Symbol Set Code: 10 Code: 08	CAPABILITY		N/A
DECONTAMINATION Symbol Set Code: 10 Code: 09	CAPABILITY		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
DEMOLITION Symbol Set Code: 10 Code: 10	CAPABILITY		N/A
DENTAL Symbol Set Code: 10 Code: 11	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
DIGITAL Symbol Set Code: 10 Code: 12	CAPABILITY		N/A
ENHANCED POSITION LOCATION REPORTING SYSTEM (EPLRS) Symbol Set Code: 10 Code: 13	CAPABILITY		N/A
EQUIPMENT Symbol Set Code: 10 Code: 14	CAPABILITY		APP6
HEAVY Symbol Set Code: 10 Code: 15	CAPABILITY		N/A
HIGH ALTITUDE Symbol Set Code: 10 Code: 16	CAPABILITY		N/A
INTERMODAL Symbol Set Code: 10 Code: 17	CAPABILITY		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
INTENSIVE CARE Symbol Set Code: 10 Code: 18	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
LIGHT Symbol Set Code: 10 Code: 19	CAPABILITY		N/A
LABORATORY Symbol Set Code: 10 Code: 20	CAPABILITY		N/A
LAUNCHER Symbol Set Code: 10 Code: 21	CAPABILITY		N/A
LONG RANGE Symbol Set Code: 10 Code: 22	CAPABILITY		N/A
LOW ALTITUDE Symbol Set Code: 10 Code: 23	CAPABILITY		N/A
MEDIUM Symbol Set Code: 10 Code: 24	CAPABILITY		N/A
MEDIUM ALTITUDE Symbol Set Code: 10 Code: 25	CAPABILITY		N/A
MEDIUM RANGE Symbol Set Code: 10 Code: 26	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
MOUNTAIN Symbol Set Code: 10 Code: 27	CAPABILITY		N/A
HIGH TO MEDIUM ALTITUDE Symbol Set Code: 10 Code: 28	CAPABILITY		N/A
MULTI-CHANNEL Symbol Set Code: 10 Code: 29	CAPABILITY		N/A
OPTICAL (FLASH) Symbol Set Code: 10 Code: 30	CAPABILITY		N/A
PACK ANIMAL Symbol Set Code: 10 Code: 31	CAPABILITY		N/A
PATIENT EVACUATION COORDINATION Symbol Set Code: 10 Code: 32	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
PREVENTIVE MAINTENANCE Symbol Set Code: 10 Code: 33	CAPABILITY		N/A
PSYCHOLOGICAL Symbol Set Code: 10 Code: 34	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
RADIO RELAY LINE OF SIGHT Symbol Set Code: 10 Code: 35	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
RAILROAD Symbol Set Code: 10 Code: 36	MOBILITY		N/A
RECOVERY (UNMANNED SYSTEMS) Symbol Set Code: 10 Code: 37	CAPABILITY		N/A
RECOVERY (MAINTENANCE) Symbol Set Code: 10 Code: 38	CAPABILITY		N/A
RESCUE COORDINATION CENTER Symbol Set Code: 10 Code: 39	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
RIVERINE Symbol Set Code: 10 Code: 40	MOBILITY		N/A
SINGLE CHANNEL Symbol Set Code: 10 Code: 41	CAPABILITY		N/A
SKI Symbol Set Code: 10 Code: 42	MOBILITY		N/A
SHORT RANGE Symbol Set Code: 10 Code: 43	CAPABILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
STRATEGIC Symbol Set Code: 10 Code: 44	CAPABILITY		N/A
SUPPORT Symbol Set Code: 10 Code: 45	CAPABILITY		N/A
TACTICAL Symbol Set Code: 10 Code: 46	CAPABILITY		N/A
TOWED Symbol Set Code: 10 Code: 47	MOBILITY		N/A
TROOP Symbol Set Code: 10 Code: 48	CAPABILITY		N/A
VERTICAL OR SHORT TAKE-OFF AND LANDING (VTOL/VSTOL) Symbol Set Code: 10 Code: 49	MOBILITY		N/A
VETERINARY Symbol Set Code: 10 Code: 50	CAPABILITY		Modifier is offset so that the modifier is not compromised by the main sector icon.
WHEELED Symbol Set Code: 10 Code: 51	MOBILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
HIGH TO LOW ALTITUDE Symbol Set Code: 10 Code: 52	CAPABILITY		N/A
MEDIUM TO LOW ALTITUDE Symbol Set Code: 10 Code: 53	CAPABILITY		N/A
ATTACK Symbol Set Code: 10 Code: 54	CAPABILITY		N/A
REFUEL Symbol Set Code: 10 Code: 55	CAPABILITY		N/A
UTILITY Symbol Set Code: 10 Code: 56	CAPABILITY		N/A
COMBAT SEARCH AND RESCUE Symbol Set Code: 10 Code: 57	CAPABILITY		N/A
GUERILLA Symbol Set Code: 10 Code: 58	CAPABILITY		N/A
AIR ASSAULT Symbol Set Code: 10 Code: 59	MOBILITY		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
AMPHIBIOUS Symbol Set Code: 10 Code: 60	MOBILITY		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
VERY HEAVY Symbol Set Code: 10 Code: 61	CAPABILITY		N/A
SUPPLY Symbol Set Code: 10 Code: 62	CAPABILITY		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
CYBERSPACE Symbol Set Code: 10 Code: 63	CAPABILITY		N/A
NAVY BARGE, SELF-PROPELLED Symbol Set Code: 10 Code: 64	MOBILITY		N/A
NAVY BARGE, NOT SELF-PROPELLED Symbol Set Code: 10 Code: 65	MOBILITY		N/A
LAUNCH Symbol Set Code: 10 Code: 66	MOBILITY		N/A
LANDING CRAFT Symbol Set Code: 10 Code: 67	MOBILITY		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
LANDING SHIP Symbol Set Code: 10 Code: 68	MOBILITY		N/A
SERVICE CRAFT/YARD Symbol Set Code: 10 Code: 69	MOBILITY		N/A
TUG HARBOR Symbol Set Code: 10 Code: 70	MOBILITY		N/A
OCEAN GOING TUG BOAT Symbol Set Code: 10 Code: 71	MOBILITY		N/A
SURFACE DEPLOYMENT AND DISTRIBUTION COMMAND Symbol Set Code: 10 Code: 72	CAPABILITY		N/A
NONCOMBATANT GENERIC VESSEL Symbol Set Code: 10 Code: 73	MOBILITY		N/A
COMPOSITE Symbol Set Code: 10 Code: 74	CAPABILITY		N/A
SHELTER Symbol Set Code: 10 Code: 75	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VI. Land unit sector 2 modifiers.


DESCRIPTION	CATEGORY	MODIFIER	REMARKS
LIGHT AND MEDIUM Symbol Set Code: 10 Code: 76	CAPABILITY		N/A
TRACKED Symbol Set Code: 10 Code: 77	CAPABILITY		N/A
SECURITY FORCE ASSISTANCE Symbol Set Code: 10 Code: 78	CAPABILITY		

D.7 LAND CIVILIAN INDIVIDUALS/ORGANIZATION SYMBOLS

D.7.1 Land civilian individuals/organization symbols. This section includes the lists of icons and modifiers for building land civilian unit symbols.






D.7.2 Land civilian individuals/organization icons. Table D-VII depicts land civilian unit icons.

TABLE D-VII. Land civilian individuals/organization icons.

DESCRIPTION	ICON	REMARKS
CIVILIAN Type: Entity Symbol Set Code: 11 Code: **11**0000 Icon Type: Main		Reserved for hierarchical purposes.
ENVIRONMENTAL PROTECTION Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**01**00 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VII. Land civilian individuals/organization icons - Continued.

DESCRIPTION	ICON	REMARKS
GOVERNMENT ORGANIZATION Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**02**00 Icon Type: Main		N/A
INDIVIDUAL Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**03**00 Icon Type: Main		N/A
ORGANIZATION OR GROUP Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**04**00 Icon Type: Main		N/A
KILLING VICTIM Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**05**00 Icon Type: Main		N/A
KILLING VICTIMS Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**06**00 Icon Type: Main		N/A
VICTIM OF AN ATTEMPTED CRIME Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**07**00 Icon Type: Main		N/A
SPY Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**08**00 Icon Type: Main		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VII. Land civilian individuals/organization icons - Continued.

DESCRIPTION	ICON	REMARKS
COMPOSITE LOSS Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 11**09**00 Icon Type: Main		N/A
EMERGENCY MEDICAL OPERATION Type: Entity Type Entity: CIVILIAN Symbol Set Code: 11 Code: 111000 Icon Type: Full Octagon		N/A








D.7.3 Land civilian unit/organization sector 1 modifiers. Land civilian unit sector 1 modifiers denote crime and organization categories. Table D-VIII lists land civilian unit sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE D-VIII. Land civilian unit/organization sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ASSASSINATION Symbol Set Code: 11 Code: 01	CRIME		N/A
EXECUTION (WRONGFUL KILLING) Symbol Set Code: 11 Code: 02	CRIME		N/A
MURDER VICTIMS Symbol Set Code: 11 Code: 03	CRIME		N/A
HIJACKING/ HIJACKED Symbol Set Code: 11 Code: 04	CRIME		N/A
KIDNAPPING Symbol Set Code: 11 Code: 05	CRIME		N/A








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VIII. Land civilian unit/organization sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
PIRACY Symbol Set Code: 11 Code: 06	CRIME		N/A
RAPE Symbol Set Code: 11 Code: 07	CRIME		N/A
CIVILIAN Symbol Set Code: 11 Code: 08	ORGANIZATION		N/A
DISPLACED PERSON(S), REFUGEE(S) AND EVACUEE(S) Symbol Set Code: 11 Code: 09	ORGANIZATION		N/A
FOREIGN FIGHTER(S) Symbol Set Code: 11 Code: 10	ORGANIZATION		N/A
GANG MEMBER OR GANG Symbol Set Code: 11 Code: 11	ORGANIZATION		N/A
GOVERNMENT ORGANIZATION Symbol Set Code: 11 Code: 12	ORGANIZATION		N/A
LEADER OR LEADERSHIP Symbol Set Code: 11 Code: 13	ORGANIZATION		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VIII. Land civilian unit/organization sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
NONGOVERNMENTAL ORGANIZATION MEMBER OR NONGOVERNMENTAL ORGANIZATION Symbol Set Code: 11 Code: 14	ORGANIZATION		N/A
UNWILLING/COERCED RECRUIT Symbol Set Code: 11 Code: 15	ORGANIZATION		N/A
WILLING RECRUIT Symbol Set Code: 11 Code: 16	ORGANIZATION		N/A
RELIGIOUS OR RELIGIOUS ORGANIZATION Symbol Set Code: 11 Code: 17	ORGANIZATION		N/A
TARGETED INDIVIDUAL OR ORGANIZATION Symbol Set Code: 11 Code: 18	ORGANIZATION		N/A
TERRORIST OR TERRORIST ORGANIZATION Symbol Set Code: 11 Code: 19	ORGANIZATION		N/A
SPEAKER Symbol Set Code: 11 Code: 20	ORGANIZATION		N/A
ACCIDENT Symbol Set Code: 11 Code: 21	COMPOSITE LOSS		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VIII. Land civilian unit/organization sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
COMBAT Symbol Set Code: 11 Code: 22	COMPOSITE LOSS		N/A
OTHER Symbol Set Code: 11 Code: 23	COMPOSITE LOSS		N/A
LOOT Symbol Set Code: 11 Code: 24	CRIME		N/A
HIJACKER Symbol Set Code: 11 Code: 25	CRIME		N/A
CYBERSPACE Symbol Set Code: 11 Code: 26	CAPABILITY		N/A

D.7.4 Land civilian unit sector 2 modifiers. Land civilian unit sector 2 modifiers denote organization category. Table D-IX lists the land civilian unit sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE D-IX. Land civilian unit/organization sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
LEADER OR LEADERSHIP Symbol Set Code: 11 Code: 01	ORGANIZATION		N/A
CYBERSPACE Symbol Set Code: 11 Code: 02	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

D.8 LAND EQUIPMENT SYMBOLS

D.8.1 Land equipment symbols. This section includes the lists of icons and modifiers for building land equipment symbols. Figure D-5 shows the placement of land equipment symbol amplifiers around the friend symbol frame. Table D-X provides descriptions and formats of each amplifier.

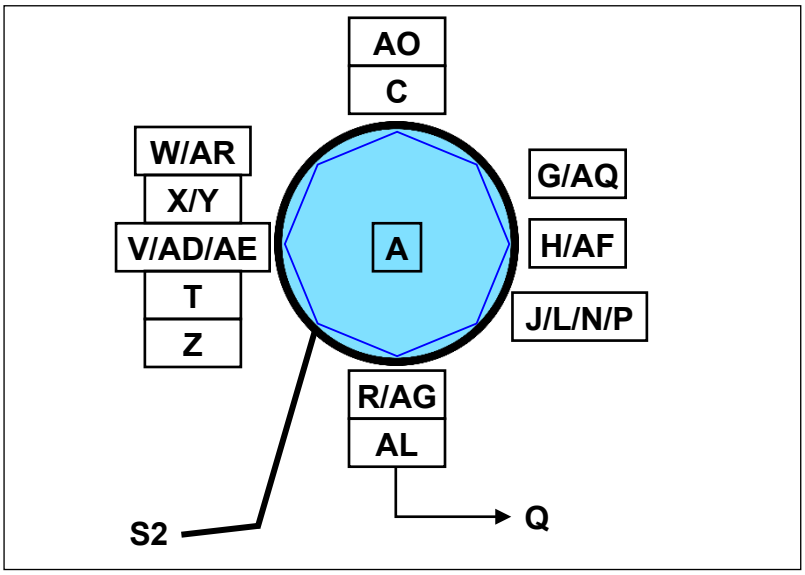


FIGURE D-5. Placement of land equipment symbol amplifiers.

TABLE D-X. Descriptions and formats of land equipment symbol amplifier.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
C	Quantity	A text amplifier in an equipment symbol that identifies the number of items present.	
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-X. Descriptions and formats of land equipment symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
J[1]	Evaluation Rating	A text amplifier for units, equipment and installations that consists of a single-letter reliability rating and a single digit credibility rating: **Reliability Ratings:** A-completely reliable B-usually reliable C-fairly reliable D-not usually reliable E-unreliable F-reliability cannot be judged. **Credibility Ratings:** 1-confirmed by other sources 2-probably true 3-possibly true 4-doubtfully true 5-improbable 6-truth cannot be judged.	
L	Signature Equipment	A text amplifier for hostile equipment; "**!**" indicates detectable electronic signatures.	
N	Hostile (Enemy)	A text amplifier for equipment; letters "ENY" denote hostile symbols.	
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. **Display priority:** Mode 5, Mode S, Mode 4, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### **Example**: 2:1234
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-X. Descriptions and formats of land equipment symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
W[2]	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or "O/O" for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds.	
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.5 for content.	Measurement units shall be displayed within the string **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.6).	
AD	Platform Type	Electronic intelligence notation (ELNOT) or communications intelligence notation (CENOT)	
AE	Equipment Teardown Time	Equipment teardown time in minutes.	
AF	Common Identifier	Example: "Hawk" for Hawk SAM system.	
AG	Auxiliary Equipment Indicator	Towed sonar array indicator: A graphic modifier for equipment that indicates the presence of a towed sonar array (see 5.3.7.10, figure 13 and table IX).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. **Ex. Aircraft**: Red - damaged, Green – fully capable **Ex: Missile**: Red – imminent threat, Green – no threat

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.





TABLE D-X. Descriptions and formats of land equipment symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBC-CC, where A = remote/local BBB = engagement status CC = weapon asset
AQ	Guarded Unit	During ballistic missile defense, some tracks are designated as guarded by a particular unit.	
AR	Special Designator	Special track designators such as Non-Real Time (NRT) and Tactically Significant (SIG) tracks are denoted here	

Notes: 1. Field J: See ATP 2-33.4.
2. Field W: D = day, H = hour, M = minute, S = second, Z = Greenwich or local time, MON= month and Y = year.







D.8.2 Land equipment icons. Table D-XI depicts land equipment icons.

TABLE D-XI. Land equipment icons.

DESCRIPTION	ICON	REMARKS
WEAPON/WEAPON SYSTEM Type: Entity Symbol Set Code: 15 Code: **11**0000 Icon Type: Full Octagon		Reserved for hierarchical purposes.
RIFLE Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**01**00 Icon Type: Full Octagon		N/A
SINGLE SHOT RIFLE Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/RIFLE Symbol Set Code: 15 Code: 110100**1** Icon Type: Full Octagon		N/A
SEMIAUTOMATIC RIFLE Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/RIFLE Symbol Set Code: 15 Code: 110100**2** Icon Type: Full Octagon		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
AUTOMATIC RIFLE Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/RIFLE Symbol Set Code: 15 Code: 1101**03** Icon Type: Full Octagon		N/A
MACHINE GUN Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**02**00 Icon Type: Full Octagon		N/A
MACHINE GUN – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MACHINE GUN Symbol Set Code: 15 Code: 1102**01** Icon Type: Full Octagon		N/A
MACHINE GUN – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MACHINE GUN Symbol Set Code: 15 Code: 1102**02** Icon Type: Full Octagon		N/A
MACHINE GUN – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MACHINE GUN Symbol Set Code: 15 Code: 1102**03** Icon Type: Full Octagon		N/A
GRENADE LAUNCHER Type: Entity Type Entity/Entity Type: WEAPON/WEAPON SYSTEM/GRENADE LAUNCHER Symbol Set Code: 15 Code: 11**03**00 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
GRENADE LAUNCHER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/GRENADE LAUNCHER Symbol Set Code: 15 Code: 1103**01** Icon Type: Full Octagon		N/A
GRENADE LAUNCHER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/GRENADE LAUNCHER Symbol Set Code: 15 Code: 1103**02** Icon Type: Full Octagon		N/A
GRENADE LAUNCHER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/GRENADE LAUNCHER Symbol Set Code: 15 Code: 1103**03** Icon Type: Full Octagon		N/A
FLAME THROWER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**04**00 Icon Type: Full Octagon		N/A
AIR DEFENSE GUN Type: Entity Type Entity/Entity Type: WEAPON/WEAPON SYSTEM/GUN Symbol Set Code: 15 Code: 11**05**00 Icon Type: Full Octagon		N/A
AIR DEFENSE GUN – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/AIR DEFENSE GUN Symbol Set Code: 15 Code: 1105**01** Icon Type: Full Octagon		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
AIR DEFENSE GUN – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/AIR DEFENSE GUN Symbol Set Code: 15 Code: 110502 Icon Type: Full Octagon		N/A
AIR DEFENSE GUN – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/AIR DEFENSE GUN Symbol Set Code: 15 Code: 110503 Icon Type: Full Octagon		N/A
ANTITANK GUN Type: Entity Type Entity/Entity Type: WEAPON/WEAPON SYSTEM/ ANTITANK GUN Symbol Set Code: 15 Code: 110600 Icon Type: Full Octagon		N/A
ANTITANK GUN – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ ANTITANK GUN Symbol Set Code: 15 Code: 110601 Icon Type: Full Octagon		N/A
ANTITANK GUN – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ANTITANK GUN Symbol Set Code: 15 Code: 110602 Icon Type: Full Octagon		N/A
ANTITANK GUN – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ANTITANK GUN Symbol Set Code: 15 Code: 110603 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
DIRECT FIRE GUN Type: Entity Type Entity/Entity Type: WEAPON/WEAPON SYSTEM/DIRECT FIRE GUN Symbol Set Code: 15 Code: 11**07**00 Icon Type: Full Octagon		N/A
DIRECT FIRE GUN – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ DIRECT FIRE GUN Symbol Set Code: 15 Code: 1107**01** Icon Type: Main		N/A
DIRECT FIRE GUN – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/DIRECT FIRE GUN Symbol Set Code: 15 Code: 1107**02** Icon Type: Main		N/A
DIRECT FIRE GUN – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/DIRECT FIRE GUN Symbol Set Code: 15 Code: 1107**03** Icon Type: Main		N/A
RECOILLESS GUN Type: Entity Type Entity/Entity Type: WEAPON/WEAPONSYSTEM/ RECOILLESS GUN Symbol Set Code: 15 Code: 11**08**00 Icon Type: Full Octagon		N/A
RECOILLESS GUN – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ RECOILLESS GUN Symbol Set Code: 15 Code: 1108**01** Icon Type: Full Octagon		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
RECOILLESS GUN – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/RECOILLESS GUN Symbol Set Code: 15 Code: 1108**02** Icon Type: Full Octagon		N/A
RECOILLESS GUN – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ RECOILLESS GUN Symbol Set Code: 15 Code: 1108**03** Icon Type: Full Octagon		N/A
HOWITZER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**09**00 Icon Type: Full Octagon		N/A
HOWITZER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/HOWITZER Symbol Set Code: 15 Code: 1109**01** Icon Type: Full Octagon		N/A
HOWITZER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/HOWITZER Symbol Set Code: 15 Code: 1109**02** Icon Type: Full Octagon		N/A
HOWITZER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/HOWITZER Symbol Set Code: 15 Code: 1109**03** Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
MISSILE LAUNCHER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**10**00 Icon Type: Full Octagon		N/A
MISSILE LAUNCHER – LIGHT Entity/Entity Subtype: WEAPON/WEAPON SYSTEM/MISSILE LAUNCHER Symbol Set Code: 15 Code: 1110**01** Icon Type: Main		N/A
MISSILE LAUNCHER – MEDIUM Entity/Entity Subtype: WEAPON/WEAPON SYSTEM/MISSILE LAUNCHER Symbol Set Code: 15 Code: 1110**02** Icon Type: Main		N/A
MISSILE LAUNCHER – HEAVY Entity/Entity Subtype: WEAPON/WEAPON SYSTEM/MISSILE LAUNCHER Symbol Set Code: 15 Code: 1110**03** Icon Type: Main		N/A
AIR DEFENSE MISSILE LAUNCHER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**11**00 Icon Type: Full Octagon		N/A
AIR DEFENSE MISSILE LAUNCHER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1111**01** Icon Type: Full Octagon		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
AIR DEFENSE MISSILE LAUNCHER – LIGHT, TLAR Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1111**02** Icon Type: Full Octagon		N/A
AIR DEFENSE MISSILE LAUNCHER – LIGHT, TELAR Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1111**03** Icon Type: Full Octagon		N/A
AIR DEFENSE MISSILE LAUNCHER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1111**04** Icon Type: Full Octagon		N/A
AIR DEFENSE MISSILE LAUNCHER – MEDIUM, TLAR Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1111**05** Icon Type: Full Octagon		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
AIR DEFENSE MISSILE LAUNCHER – MEDIUM, TELAR Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1111**06** Icon Type: Full Octagon		N/A
AIR DEFENSE MISSILE LAUNCHER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1111**07** Icon Type: Full Octagon		N/A
AIR DEFENSE MISSILE LAUNCHER – HEAVY, TLAR Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 111108 Icon Type: Full Octagon		N/A
AIR DEFENSE MISSILE LAUNCHER – HEAVY, TELAR Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ AIR DEFENSE MISSILE LAUNCHER Symbol Set Code: 15 Code: 111109 Icon Type: Full Octagon		N/A
ANTITANK MISSILE LAUNCHER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**12**00 Icon Type: Full Octagon		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
ANTITANK MISSILE LAUNCHER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ANTITANK MISSILE LAUNCHER Symbol Set Code: 15 Code: 1112**01** Icon Type: Full Octagon		N/A
ANTITANK MISSILE LAUNCHER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ ANTITANK MISSILE LAUNCHER Symbol Set Code: 15 Code: 1112**02** Icon Type: Full Octagon		N/A
ANTITANK MISSILE LAUNCHER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ ANTITANK MISSILE LAUNCHER Symbol Set Code: 15 Code: 1112**03** Icon Type: Full Octagon		N/A
SURFACE-TO-SURFACE MISSILE LAUNCHER Type: Entity Type Entity/Entity Type: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**13**00 Icon Type: Full Octagon		N/A
SURFACE-TO-SURFACE MISSILE LAUNCHER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/SURFACE TO SURFACE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1113**01** Icon Type: Full Octagon		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
SURFACE-TO-SURFACE MISSILE LAUNCHER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ SURFACE TO SURFACE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1113**02** Icon Type: Full Octagon		N/A
SURFACE-TO-SURFACE MISSILE LAUNCHER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ SURFACE TO SURFACE MISSILE LAUNCHER Symbol Set Code: 15 Code: 1113**03** Icon Type: Full Octagon		N/A
MORTAR Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**14**00 Icon Type: Full Octagon		N/A
MORTAR – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MORTAR Symbol Set Code: 15 Code: 1114**01** Icon Type: Full Octagon		N/A
MORTAR – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MORTAR Symbol Set Code: 15 Code: 1114**02** Icon Type: Full Octagon		N/A
MORTAR – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MORTAR Symbol Set Code: 15 Code: 1114**03** Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
SINGLE ROCKET LAUNCHER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**15**00 Icon Type: Full Octagon		N/A
SINGLE ROCKET LAUNCHER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/SINGLE ROCKET LAUNCHER Symbol Set Code: 15 Code: 1115**01** Icon Type: Full Octagon		N/A
SINGLE ROCKET LAUNCHER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/SINGLE ROCKET LAUNCHER Symbol Set Code: 15 Code: 1115**02** Icon Type: Full Octagon		N/A
SINGLE ROCKET LAUNCHER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/SINGLE ROCKET LAUNCHER Symbol Set Code: 15 Code: 1115**03** Icon Type: Full Octagon		N/A
MULTIPLE ROCKET LAUNCHER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**16**00 Icon Type: Full Octagon		N/A
MULTIPLE ROCKET LAUNCHER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MULTIPLE ROCKET LAUNCHER Symbol Set Code: 15 Code: 1116**01** Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
MULTIPLE ROCKET LAUNCHER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MULTIPLE ROCKET LAUNCHER Symbol Set Code: 15 Code: 1116**02** Icon Type: Full Octagon		N/A
MULTIPLE ROCKET LAUNCHER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/MULTIPLE ROCKET LAUNCHER Symbol Set Code: 15 Code: 1116**03** Icon Type: Full Octagon		N/A
ANTITANK ROCKET LAUNCHER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**17**00 Icon Type: Full Octagon		N/A
ANTITANK ROCKET LAUNCHER – LIGHT Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ANTITANK ROCKET LAUNCHER Symbol Set Code: 15 Code: 1117**01** Icon Type: Full Octagon		N/A
ANTITANK ROCKET LAUNCHER – MEDIUM Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ANTITANK ROCKET LAUNCHER Symbol Set Code: 15 Code: 1117**02** Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
ANTITANK ROCKET LAUNCHER – HEAVY Type: Entity Subtype Entity/Entity Type: WEAPON/WEAPON SYSTEM/ANTITANK ROCKET LAUNCHER Symbol Set Code: 15 Code: 1111**03** Icon Type: Full Octagon		N/A
NONLETHAL WEAPON Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**18**00 Icon Type: Full Octagon		N/A
TASER Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**19**00 Icon Type: Full Octagon		N/A
WATER CANNON Type: Entity Type Entity: WEAPON/WEAPON SYSTEM Symbol Set Code: 15 Code: 11**20**00 Icon Type: Full Octagon		N/A
VEHICLE Type: Entity Symbol Set Code: 15 Code: **12**0000 Icon Type: Full Octagon		Reserved for hierarchical purposes.
ARMORED Type: Entity Type Entity: VEHICLE Symbol Set Code: 15 Code: 12**01**00 Icon Type: Full Octagon		N/A
ARMORED FIGHTING VEHICLE Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 1201**01** Icon Type: Full Octagon		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
ARMORED FIGHTING VEHICLE COMMAND AND CONTROL Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 120102 Icon Type: Full Octagon		N/A
ARMORED PERSONNEL CARRIER Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 120103 Icon Type: Full Octagon		N/A
ARMORED PERSONNEL CARRIER AMBULANCE Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 120104 Icon Type: Full Octagon		N/A
ARMORED PROTECTED VEHICLE Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 120105 Icon Type: Main		N/A
ARMORED PROTECTED VEHICLE RECOVERY Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 120106 Icon Type: Main		N/A
ARMORED PROTECTED VEHICLE MEDICAL EVACUATION Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 120107 Icon Type: Main		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
ARMORED PERSONNEL CARRIER, RECOVERY Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 1201**08** Icon Type: Full Octagon		N/A
COMBAT SERVICE SUPPORT VEHICLE Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 1201**09** Icon Type: Full Octagon		N/A
LIGHT WHEELED ARMORED VEHICLE Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 1201**10** Icon Type: Full Octagon		N/A
LIGHT ARMORED RECONNAISSANCE Type: Entity Subtype Entity/Entity Type: VEHICLE/ARMORED Symbol Set Code: 15 Code: 120111 Icon Type: Full Frame		N/A
TANK Type: Entity Type Entity: VEHICLE Symbol Set Code: 15 Code: 12**02**00 Icon Type: Main		N/A
TANK – LIGHT Type: Entity Subtype Entity/Entity Type: VEHICLE/TANK Symbol Set Code: 15 Code: 1202**01** Icon Type: Full Octagon		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
TANK – MEDIUM Type: Entity Subtype Entity/Entity Type: VEHICLE/TANK Symbol Set Code: 15 Code: 120**02** Icon Type: Full Octagon		N/A
TANK – HEAVY Type: Entity Subtype Entity/Entity Type: VEHICLE/TANK Symbol Set Code: 15 Code: 120**03** Icon Type: Full Octagon		N/A
TANK RECOVERY VEHICLE Type: Entity Type Entity: VEHICLE Symbol Set Code: 15 Code: 12**03**00 Icon Type: Full Octagon		N/A
TANK RECOVERY VEHICLE – LIGHT Type: Entity Subtype Entity/Entity Type: VEHICLE/TANK RECOVERY VEHICLE Symbol Set Code: 15 Code: 1203**01** Icon Type: Full Octagon		N/A
TANK RECOVERY VEHICLE – MEDIUM Type: Entity Subtype Entity/Entity Type: VEHICLE/TANK/ RECOVERY VEHICLE/ Symbol Set Code: 15 Code: 1203**02** Icon Type: Full Octagon		N/A
TANK RECOVERY VEHICLE - HEAVY Type: Entity Subtype Entity/Entity Type: VEHICLE/TANK RECOVERY VEHICLE Symbol Set Code: 15 Code: 1203**03** Icon Type: Full Octagon		N/A
ENGINEER VEHICLE AND EQUIPMENT Type: Entity Symbol Set Code: 15 Code: **13**0000 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
BRIDGE Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**01**00 Icon Type: Main		N/A
BRIDGE MOUNTED ON UTILITY VEHICLE Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**02**00 Icon Type: Full Octagon		N/A
FIXED BRIDGE Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**03**00 Icon Type: Full Octagon		N/A
FLOATING BRIDGE Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**04**00 Icon Type: Full Octagon		N/A
FOLDING GIRDER BRIDGE Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**05**00 Icon Type: Main		N/A
HOLLOW DECK BRIDGE Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**06**00 Icon Type: Main		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
DRILL Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**07**00 Icon Type: Full Octagon		N/A
DRILL MOUNTED ON UTILITY VEHICLE Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/DRILL Symbol Set Code: 15 Code: 1307**01** Icon Type: Full Octagon		N/A
EARTHMOVER Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**08**00 Icon Type: Full Octagon		N/A
MULTIFUNCTIONAL EARTHMOVER/DIGGER Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ EARTHMOVER Symbol Set Code: 15 Code: 1308**01** Icon Type: Full Octagon		N/A
MINE CLEARING EQUIPMENT Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**09**00 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
MINE CLEARING EQUIPMENT, TRAILER MOUNTED Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE CLEARING EQUIPMENT Symbol Set Code: 15 Code: 130901 Icon Type: Full Octagon		N/A
MINE CLEARING EQUIPMENT ON TANK CHASSIS Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE CLEARING EQUIPMENT Symbol Set Code: 15 Code: 130902 Icon Type: Full Octagon		N/A
ASSAULT BREACHER VEHICLE (ABV) WITH COMBAT DOZER BLADE Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE CLEARING EQUIPMENT Symbol Set Code: 15 Code: 130903 Icon Type: Full Octagon		N/A
MEDIUM CAPABILITY EQUIPMENT Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE CLEARING EQUIPMENT Symbol Set Code: 15 Code: 130904 Icon Type: Full Octagon		N/A
HEAVY CAPABILITY EQUIPMENT Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE CLEARING EQUIPMENT Symbol Set Code: 15 Code: 130905 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
MINE LAYING EQUIPMENT Type: Entity Type Entity: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**10**00 Icon Type: Full Octagon		N/A
MINE LAYING EQUIPMENT ON UTILITY VEHICLE Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE LAYING EQUIPMENT Symbol Set Code: 15 Code: 1310**01** Icon Type: Full Octagon		N/A
ARMORED CARRIER WITH VOLCANO Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE LAYING EQUIPMENT Symbol Set Code: 15 Code: 1310**02** Icon Type: Full Octagon		N/A
TRUCK MOUNTED WITH VOLCANO Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/ MINE LAYING EQUIPMENT Symbol Set Code: 15 Code: 1310**03** Icon Type: Full Octagon		N/A
DOZER, TANK CHASSIS Type: Entity Type Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 13**11**00 Icon Type: Full Octagon		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
DOZER, ARMORED Type: Entity Subtype Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT/DOZER Symbol Set Code: 15 Code: 1311**01** Icon Type: Full Octagon		N/A
ARMORED ASSAULT Type: Entity Type Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 131**2**00 Icon Type: Full Octagon		N/A
ARMORED ENGINEER RECON VEHICLE (AERV) Type: Entity Type Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 131**3**00 Icon Type: Full Octagon		N/A
BACKHOE Type: Entity Type Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 131**4**00 Icon Type: Full Octagon		N/A
CONSTRUCTION VEHICLE Type: Entity Type Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 131**5**00 Icon Type: Full Octagon		N/A
FERRY TRANSPORTER Type: Entity Type Entity/Entity Type: ENGINEER VEHICLE AND EQUIPMENT Symbol Set Code: 15 Code: 131**6**00 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
UTILITY VEHICLE Type: Entity Symbol Set Code: 15 Code: **14**0000	N/A	Reserved for hierarchical purposes.
VEHICLE (GENERIC) Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**01**00 Icon Type: Full Octagon		N/A
MEDICAL Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**02**00 Icon Type: Full Octagon		N/A
MEDICAL EVACUATION (MEDEVAC) Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**03**00 Icon Type: Full Octagon		N/A
MOBILE EMERGENCY PHYSICIAN Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**04**00 Icon Type: Full Octagon		N/A
BUS Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**05**00 Icon Type: Full Octagon		N/A
SEMI-TRAILER AND TRUCK Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**06**00 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
SEMI-TRAILER AND TRUCK - LIGHT Type: Entity Subtype Entity/Entity Type: UTILITY VEHICLE/SEMI-TRAILER AND TRUCK Symbol Set Code: 15 Code: 1406**01** Icon Type: Full Octagon		N/A
SEMI-TRAILER AND TRUCK - MEDIUM Type: Entity Subtype Entity/Entity Type: UTILITY VEHICLE/SEMI-TRAILER AND TRUCK Symbol Set Code: 15 Code: 1406**02** Icon Type: Full Octagon		N/A
SEMI-TRAILER AND TRUCK - HEAVY Type: Entity Subtype Entity/Entity Type: UTILITY VEHICLE/SEMI-TRAILER AND TRUCK Symbol Set Code: 15 Code: 1406**03** Icon Type: Full Octagon		N/A
LIMITED CROSS-COUNTRY TRUCK Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**07**00 Icon Type: Full Octagon		N/A
CROSS-COUNTRY TRUCK Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**08**00 Icon Type: Full Octagon		N/A
PETROLEUM, OIL AND LUBRICANT Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**09**00 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
WATER Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**10**00 Icon Type: Full Octagon		N/A
AMPHIBIOUS UTILITY WHEELED VEHICLE Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**11**00 Icon Type: Full Octagon		N/A
TOW TRUCK Type: Entity Type Entity: UTILITY VEHICLE Symbol Set Code: 15 Code: 14**12**00 Icon Type: Full Octagon		N/A
TOW TRUCK, LIGHT Type: Entity Subtype Entity/ Entity Type: UTILITY VEHICLE/TOW TRUCK Symbol Set Code: 15 Code: 1412**01** Icon Type: Full Octagon		N/A
TOW TRUCK, HEAVY Type: Entity Subtype Entity/ Entity Type: UTILITY VEHICLE/TOW TRUCK Symbol Set Code: 15 Code: 1412**02** Icon Type: Full Octagon		N/A
TRAIN Type: Entity Symbol Set Code: 15 Code: **15**0000	N/A	Reserved for hierarchical purposes.
LOCOMOTIVE Type: Entity Type Entity: TRAIN Symbol Set Code: 15 Code: 15**01**00 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
RAILCAR Type: Entity Type Entity: TRAIN Symbol Set Code: 15 Code: 15**02**00 Icon Type: Full Octagon		N/A
CIVILIAN VEHICLE Type: Entity Symbol Set Code: 15 Code: **16**0000	N/A	Reserved for hierarchical purposes.
AUTOMOBILE Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**01**00 Icon Type: Full Octagon		N/A
COMPACT Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/AUTOMOBILE Symbol Set Code: 15 Code: 160**101** Icon Type: Full Octagon		N/A
MIDSIZE Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/AUTOMOBILE Symbol Set Code: 15 Code: 160**102** Icon Type: Full Octagon		N/A
SEDAN Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/AUTOMOBILE Symbol Set Code: 15 Code: 160**103** Icon Type: Full Octagon		N/A
OPEN-BED TRUCK Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**02**00 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
PICKUP Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ OPEN-BED TRUCK Symbol Set Code: 15 Code: 160**01** Icon Type: Full Octagon		N/A
SMALL Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ OPEN-BED TRUCK Symbol Set Code: 15 Code: 160**02** Icon Type: Full Octagon		N/A
LARGE Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/OPEN-BED TRUCK Symbol Set Code: 15 Code: 160**03** Icon Type: Full Octagon		N/A
MULTIPLE PASSENGER VEHICLE Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**03**00 Icon Type: Full Octagon		N/A
VAN Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/MULTIPLE PASSENGER VEHICLE Symbol Set Code: 15 Code: 160**301** Icon Type: Full Octagon		N/A
SMALL BUS Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/MULTIPLE PASSENGER VEHICLE Symbol Set Code: 15 Code: 160**302** Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
LARGE BUS Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/MULTIPLE PASSENGER VEHICLE Symbol Set Code: 15 Code: 160**03** Icon Type: Full Octagon		N/A
UTILITY VEHICLE Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**04**00 Icon Type: Full Octagon		N/A
SPORT UTILITY VEHICLE (SUV) Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ UTILITY VEHICLE Symbol Set Code: 15 Code: 1604**01** Icon Type: Full Octagon		N/A
SMALL BOX TRUCK Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ UTILITY VEHICLE Symbol Set Code: 15 Code: 1604**02** Icon Type: Full Octagon		N/A
LARGE BOX TRUCK Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ UTILITY VEHICLE Symbol Set Code: 15 Code: 1604**03** Icon Type: Full Octagon		N/A
JEEP TYPE VEHICLE Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**05**00 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
SMALL/LIGHT Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ JEEP TYPE VEHICLE Symbol Set Code: 15 Code: 160**501** Icon Type: Full Octagon		N/A
MEDIUM Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ JEEP TYPE VEHICLE Symbol Set Code: 15 Code: 160**502** Icon Type: Full Octagon		N/A
LARGE/HEAVY Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ JEEP TYPE VEHICLE Symbol Set Code: 15 Code: 160**503** Icon Type: Full Octagon		N/A
TRACTOR TRAILER TRUCK WITH BOX Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**06**00 Icon Type: Full Octagon		N/A
SMALL/LIGHT BOX TRAILER Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ TRACTOR TRAILER TRUCK WITH BOX Symbol Set Code: 15 Code: 1606**01** Icon Type: Full Octagon		N/A
MEDIUM BOX TRAILER Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/ TRACTOR TRAILER TRUCK WITH BOX Symbol Set Code: 15 Code: 1606**02** Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
LARGE/HEAVY BOX TRAILER Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/TRACTOR TRAILER TRUCK WITH BOX TRAILER Symbol Set Code: 15 Code: 160**603** Icon Type: Full Octagon		N/A
TRACTOR TRAILER TRUCK WITH FLATBED TRAILER Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**07**00 Icon Type: Full Octagon		N/A
SMALL/LIGHT FLATBED TRAILER Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/TRACTOR TRAILER TRUCK WITH FLATBED TRAILER Symbol Set Code: 15 Code: 160**701** Icon Type: Full Octagon		N/A
MEDIUM FLATBED TRAILER Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/TRACTOR TRAILER TRUCK WITH FLATBED TRAILER Symbol Set Code: 15 Code: 160**702** Icon Type: Full Octagon		N/A
LARGE/HEAVY FLATBED TRAILER Type: Entity Subtype Entity/Entity Type: CIVILIAN VEHICLE/TRACTOR TRAILER TRUCK WITH FLATBED TRAILER Symbol Set Code: 15 Code: 160**703** Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
KNOWN INSURGENT VEHICLE Type: Entity Type Entity: CIVLIAN VEHICLE Symbol Set Code: 15 Code: 16**08**00 Icon Type: Main		N/A
DRUG VEHICLE Type: Entity Type Entity: CIVILIAN VEHICLE Symbol Set Code: 15 Code: 16**09**00 Icon Type: Main		N/A
LAW ENFORCEMENT Type: Entity Symbol Set Code: 15 Code: 170000 Icon Type: Full Octagon		N/A
BUREAU OF ALCOHOL, TOBACCO, FIREARMS AND EXPLOSIVES (ATF) (DEPARTMENT OF JUSTICE) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**01**00 Icon Type: Main		N/A
BORDER PATROL Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**02**00 Icon Type: Full Octagon		N/A
CUSTOMS SERVICE Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**03**00 Icon Type: Full Octagon		N/A
DRUG ENFORCEMENT ADMINISTRATION (DEA) Type: Entity Type Entity: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**04**00 Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
DEPARTMENT OF JUSTICE (DOJ) Type: Entity Type Entity/Entity Type: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**05**00 Icon Type: Full Octagon		N/A
FEDERAL BUREAU OF INVESTIGATION (FBI) Type: Entity Type Entity/Entity Type LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**06**00 Icon Type: Main		N/A
POLICE Type: Entity Type Entity/Entity Type: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**07**00 Icon Type: Main		N/A
UNITED STATES SECRET SERVICE(TREAS) (USSS) Type: Entity Type Entity/Entity Type: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**08**00 Icon Type: Main		N/A
TRANSPORTATION SECURITY ADMINISTRATION (TSA) Type: Entity Type Entity/Entity Type: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**09**00 Icon Type: Main		N/A
COAST GUARD Type: Entity Type Entity/Entity Type: LAW ENFORCEMENT Symbol Set Code: 15 Code: 17**10**00 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
US MARSHALS SERVICE Type: Entity Type Entity/Entity Type: LAW ENFORCEMENT Symbol Set Code: 15 Code: 171**1**00 Icon Type: Full Octagon		N/A
PACK ANIMALS Type: Entity Symbol Set Code: 15 Code: **18**0000 Icon Type: Full Octagon		N/A
MISSILE SUPPORT Type: Entity Symbol Set Code: 15 Code: **19**0000 Icon Type: Full Octagon		N/A
TRANSLOADER Type: Entity Type Entity: MISSILE SUPPORT Symbol Set Code: 15 Code: 19**01**00 Icon Type: Full Octagon		N/A
TRANSPORTER Type: Entity Type Entity: MISSILE SUPPORT Symbol Set Code: 15 Code: 19**02**00 Icon Type: Full Octagon		N/A
CRANE/LOADING DEVICE Type: Entity Type Entity: MISSILE SUPPORT Symbol Set Code: 15 Code: 19**03**00 Icon Type: Full Octagon		N/A
PROPELLANT TRANSPORTER Type: Entity Type Entity: MISSILE SUPPORT Symbol Set Code: 15 Code: 19**04**00 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
WARHEAD TRANSPORTER Type: Entity Type Entity: MISSILE SUPPORT Symbol Set Code: 15 Code: 19**05**00 Icon Type: Full Octagon		N/A
OTHER EQUIPMENT Type: Entity Symbol Set Code: 15 Code: **20**0000	N/A	Reserved for hierarchical purposes.
ANTENNAE Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**01**00 Icon Type: Full Octagon		N/A
BOMB Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**02**00 Icon Type: Full Octagon		N/A
BOOBY TRAP Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**03**00 Icon Type: Full Octagon		N/A
CBRN EQUIPMENT Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**04**00 Icon Type: Full Octagon		N/A
COMPUTER SYSTEM Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**05**00 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
COMMAND LAUNCH EQUIPMENT (CLE) Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**06**00 Icon Type: Main		N/A
GENERATOR SET Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**07**00 Icon Type: Full Octagon		N/A
GROUND-BASED MIDCOURSE DEFENSE (GMD) FIRE CONTROL (GFC) CENTER Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**08**00 Icon Type: Main		N/A
IN-FLIGHT INTERCEPTOR COMMUNICATIONS SYSTEM (IFICS) DATA TERMINAL (IDT) Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**09**00 Icon Type: Main		N/A
LASER Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**10**00 Icon Type: Full Octagon		N/A
MILITARY INFORMATION SUPPORT OPERATIONS (MISO) Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**11**00 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
SUSTAINMENT SHIPMENTS Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**12**00 Icon Type: Main		N/A
TENT Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**13**00 Icon Type: Full Octagon		N/A
CIVILIAN Type: Entity Subtype Entity: OTHER EQUIPMENT/TENT Symbol Set Code: 15 Code: 2013**01** Icon Type: Main		N/A
MILITARY Type: Entity Subtype Entity: OTHER EQUIPMENT/TENT Symbol Set Code: 15 Code: 2013**02** Icon Type: Main		N/A
UNIT DEPLOYMENT SHIPMENTS Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**14**00 Icon Type: Main		N/A
EMERGENCY MEDICAL OPERATION Type: Entity Type Entity: OTHER EQUIPMENT Symbol Set Code: 15 Code: 20**15**00 Icon Type: Full Octagon		N/A
MEDICAL EVACUATION HELICOPTER Type: Entity Subtype Entity: OTHER EQUIPMENT/ EMERGENCY MEDICAL OPERATION Symbol Set Code: 15 Code: 2015**01** Icon Type: Main+1		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
LAND MINES Type: Entity Symbol Set Code: 15 Code: **21**0000	N/A	Reserved for hierarchical purposes.
LAND MINE Type: Entity Type Entity: LAND MINE Symbol Set Code: 15 Code: 21**01**00 Icon Type: Full Octagon		N/A
ANTIPERSONNEL LAND MINE (APL) Type: Entity Type Entity: LAND MINE Symbol Set Code: 15 Code: 21**02**00 Icon Type: Full Octagon		N/A
ANTITANK MINE Type: Entity Type Entity: LAND MINE Symbol Set Code: 15 Code: 21**03**00 Icon Type: Full Octagon		N/A
IMPROVISED EXPLOSIVE DEVICE (IED) Type: Entity Type Entity: LAND MINE Symbol Set Code: 15 Code: 21**04**00 Icon Type: Main		N/A
LESS THAN LETHAL Type: Entity Type Entity: LAND MINE Symbol Set Code: 15 Code: 21**05**00 Icon Type: Full Octagon		N/A
SENSORS Type: Entity Symbol Set Code: 15 Code: **22**0000	N/A	Reserved for hierarchical purposes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
SENSOR Type: Entity Type Symbol Set Code: 15 Code: 22**01**00 Icon Type: Main		N/A
SENSOR EMPLACED Type: Entity Type Entity: SENSOR Symbol Set Code: 15 Code: 22**02**00 Icon Type: Main+1		N/A
RADAR Type: Entity Type Entity: SENSOR Symbol Set Code: 15 Code: 22**03**00 Icon Type: Full Octagon		N/A
EMERGENCY OPERATION Type: Entity Symbol Set Code: 15 Code: **23**0000 Icon Type: Full Octagon		N/A
AMBULANCE Type: Entity Type Entity/Entity Type: EMERGENCY OPERATION Symbol Set Code: 15 Code: 23**01**00 Icon Type: Full Octagon		N/A
FIRE FIGHTING/FIRE PROTECTION Type: Entity Type Entity/Entity Type: EMERGENCY OPERATION Symbol Set Code: 15 Code: 23**02**00 Icon Type: Main		N/A
MANUAL TRACK Type: Entity (Local) Symbol Set Code: 15 Code:**24**0000 Icon Type: Full Octagon		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XI. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
ROTARY WING Type: Entity (Local) Symbol Set Code: 15 Code:**25**0000 Icon Type: Full Octagon		N/A









D.8.3 Land equipment sector 1 modifiers. Land equipment sector 1 modifiers denote sensor type or capability category. Table D-XII lists land equipment sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE D-XII. Land equipment sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BIOLOGICAL Symbol Set Code: 15 Code: 01	SENSOR TYPE		N/A
CHEMICAL Symbol Set Code: 15 Code: 02	SENSOR TYPE		N/A
EARLY WARNING RADAR Symbol Set Code: 15 Code: 03	SENSOR TYPE		N/A
INTRUSION Symbol Set Code: 15 Code: 04	SENSOR TYPE		N/A
NUCLEAR Symbol Set Code: 15 Code: 05	SENSOR TYPE		N/A
RADIOLOGICAL Symbol Set Code: 15 Code: 06	SENSOR TYPE		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XII. Land equipment sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
UPGRADED EARLY WARNING RADAR Symbol Set Code: 15 Code: 07	SENSOR TYPE		N/A
HIJACKING/ HIJACKED Symbol Set Code: 15 Code: 08	CRIME		N/A
CIVILIAN Symbol Set Code: 15 Code: 09	ORGANIZATION		N/A
TILT-ROTOR Symbol Set Code: 15 Code: 10	CAPABILITY		N/A
MULTI-PURPOSE BLADE Symbol Set Code: 15 Code: 12	CAPABILITY		N/A
TANK-WIDTH MINE PLOW Symbol Set Code: 15 Code: 13	CAPABILITY		N/A
BRIDGE Symbol Set Code: 15 Code: 14	CAPABILITY		N/A
CYBERSPACE Symbol Set Code: 15 Code: 15	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.









TABLE D-XII. Land equipment sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ARMORED Symbol Set Code: 15 Code: 16	CAPABILITY		N/A
ATTACK Symbol Set Code: 15 Code: 17	CAPABILITY		N/A
CARGO Symbol Set Code: 15 Code: 18	CAPABILITY		N/A
MAINTENANCE Symbol Set Code: 15 Code: 19	CAPABILITY		N/A
MEDEVAC Symbol Set Code: 15 Code: 20	CAPABILITY		N/A
PETROLEUM, OIL, AND LUBRICANTS (POL) Symbol Set Code: 15 Code: 21	CAPABILITY		N/A
UTILITY Symbol Set Code: 15 Code: 22	CAPABILITY		N/A
WATER Symbol Set Code: 15 Code: 23	CAPABILITY		N/A
ROBOTIC Symbol Set Code: 15 Code: 24	CAPABILITY		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.


D.8.4 Land equipment sector 2 modifiers. Land equipment sector 2 modifiers denote capability category. Table D-XIII lists the land equipment sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE D-XIII. Land equipment sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CYBERSPACE Symbol Set Code: 15 Code: 01	CAPABILITY		N/A
LIGHT Symbol Set Code: 15 Code: 02	CAPABILITY		N/A
MEDIUM Symbol Set Code: 15 Code: 03	CAPABILITY		N/A
RAILWAY Symbol Set Code: 15 Code: 04	CAPABILITY		N/A
TRACKED Symbol Set Code: 15 Code: 05	CAPABILITY		N/A
TRACTOR TRAILER Symbol Set Code: 15 Code: 06	CAPABILITY		N/A
WHEELED LTD Symbol Set Code: 15 Code: 07	CAPABILITY		N/A
WHEELED X Symbol Set Code: 15 Code: 08	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XIII. Land equipment sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ROBOTIC Symbol Set Code: 15 Code: 09	CAPABILITY		

D.9 LAND INSTALLATION SYMBOLS

D.9.1 Land installation symbols. This section includes the lists of icons and modifiers for building land installation symbols. Figure D-6 shows the placement of land installation symbol amplifiers around the friend symbol frame. Table D-XIV provides descriptions and formats of each amplifier.

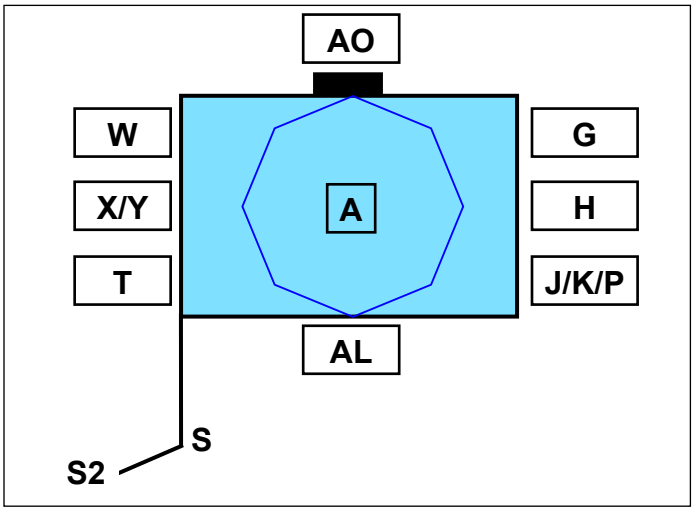


FIGURE D-6. Placement of land installation symbol amplifiers.

TABLE D-XIV. Descriptions and formats of land installation symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XIV. Descriptions and formats of land installation symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
J[1]	Evaluation Rating	A text amplifier for units, equipment and installations that consists of a single-letter reliability rating and a single digit credibility rating: **Reliability Ratings:** A-completely reliable B-usually reliable C-fairly reliable D-not usually reliable E-unreliable F-reliability cannot be judged. **Credibility Ratings:** 1-confirmed by other sources 2-probably true 3-possibly true 4-doubtfully true 5-improbable 6-truth cannot be judged.	
K	Combat Effectiveness	A text amplifier for units and installations that indicates effectiveness. **The entries are:** fully operational (FO) substantially operational (SO) marginally operational (MO) not operational (NO) unknown (UNK)	
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. **Display priority:** Mode 5, Mode S, Mode 4, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### **Example**: 2:1234
S	Headquarters Staff Indicator	A graphic amplifier for units, installations and stability operations that identifies them as a headquarters (see figure 4 and figure 13).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XIV. Descriptions and formats of land installation symbol amplifiers - Continued.





FIELD	FIELD TITLE	DESCRIPTION	FORMAT
W[2]	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or "O/O" for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds.	
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.5 for content.	Measurement units shall be displayed within the string **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. **Ex. Aircraft**: Red - damaged, Green – fully capable **Ex: Missile**: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBC-CC, where A = remote/local BBB = engagement status CC = weapon asset

Notes: 1. Field J: See ATP 2-33.4.
2. Field W: D = day, H = hour, M = minute, S = second, Z = Greenwich or local time, MON= month and Y = year.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.






D.9.2 Land installation icons. Table D-XV depicts land installation icons.

TABLE D-XV. Land installation icons.

DESCRIPTION	ICON	REMARKS
INSTALLATION Type: Entity Symbol Set Code: 20 Code: **11**0000		Reserved for hierarchical purposes.
AIRCRAFT PRODUCTION/ASSEMBLY Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 110100 Icon Type: Main		N/A
AMMUNITION AND EXPLOSIVES PRODUCTION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 110200 Icon Type: Full Octagon		N/A
AMMUNITION CACHE Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**03**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
ARMAMENT PRODUCTION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 110400 Icon Type: Full Octagon		N/A
BLACK LIST LOCATION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**05**00 Icon Type: Main		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
CHEMICAL, BIOLOGICAL, RADIOLOGICAL AND NUCLEAR (CBRN) Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**06**00 Icon Type: Main		N/A
ENGINEER EQUIPMENT PRODUCTION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 110700 Icon Type: Full Octagon		N/A
BRIDGE Type: Entity Type Entity: INSTALLATION/ENGINEER EQUIPMENT PRODUCTION Symbol Set Code: 20 Code: 110701 Icon Type: Main		N/A
EQUIPMENT MANUFACTURE Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 110800 Icon Type: Full Octagon		N/A
GOVERNMENT LEADERSHIP Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 110900 Icon Type: Main		N/A
GRAY LIST LOCATION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**10**00 Icon Type: Main		N/A
MASS GRAVE SITE Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**11**00 Icon Type: Main		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
MATERIEL Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 111200 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MINE Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**13**00 Icon Type: Main		N/A
MISSILE AND SPACE SYSTEM PRODUCTION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 111400 Icon Type: Full Octagon		N/A
NUCLEAR (NON CBRN DEFENSE) Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**15**00 Icon Type: Main		N/A
PRINTED MEDIA Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**16**00 Icon Type: Main		N/A
SAFE HOUSE Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**17**00 Icon Type: Main		N/A
WHITE LIST LOCATION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**18**00 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
TENTED CAMP Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 111**9**00 Icon Type: Full Octagon		N/A
DISPLACED PERSONS/ REFUGEE/EVACUEES CAMP Type: Entity Subtype Entity/Entity Type: INSTALLATION/TENTED CAMP Symbol Set Code: 20 Code: 1119**01** Icon Type: Full Octagon		N/A
TRAINING CAMP Type: Entity Subtype Entity/Entity Type: INSTALLATION/TENTED CAMP Symbol Set Code: 20 Code: 1119**02** Icon Type: Full Octagon		N/A
WAREHOUSE/STORAGE FACILITY Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**20**00 Icon Type: Full Octagon		N/A
LAW ENFORCEMENT Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**21**00 Icon Type: Full Octagon		N/A
BUREAU OF ALCOHOL, TOBACCO, FIREARMS AND EXPLOSIVES (ATF) (DEPARTMENT OF JUSTICE) Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 1121**01** Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
BORDER PATROL Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 112102 Icon Type: Full Octagon		N/A
CUSTOMS SERVICE Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 112103 Icon Type: Full Octagon		N/A
DRUG ENFORCEMENT AGENCY (DEA) Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 112104 Icon Type: Main		N/A
DEPARTMENT OF JUSTICE (DOJ) Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 112105 Icon Type: Full Octagon		N/A
FEDERAL BUREAU OF INVESTIGATION (FBI) Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 112106 Icon Type: Main		N/A
POLICE Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 112107 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
PRISON Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 1121**08** Icon Type: Full Octagon		N/A
UNITED STATES SECRET SERVICE(TREAS) (USSS) Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 1121**09** Icon Type: Main		N/A
TRANSPORTATION SECURITY ADMINISTRATION (TSA) Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 1121**10** Icon Type: Main		N/A
COAST GUARD Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 1121**11** Icon Type: Full Octagon		N/A
US MARSHALS SERVICE Type: Entity Subtype Entity/Entity Type: INSTALLATION/ LAW ENFORCEMENT Symbol Set Code: 20 Code: 1121**12** Icon Type: Full Octagon		N/A
EMERGENCY OPERATION Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 11**22**00 Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
FIRE STATION Type: Entity Subtype Entity/Entity Type: INSTALLATION/ EMERGENCY OPERATION Symbol Set Code: 20 Code: 1122**01** Icon Type: Full Octagon		N/A
EMERGENCY MEDICAL OPERATION Type: Entity Type Entity: INSTALLATION/ EMERGENCY OPERATION Symbol Set Code: 20 Code: 1122**02** Icon Type: Full Octagon		N/A
INFRASTRUCTURE Type: Entity Symbol Set Code: 20 Code: **12**0000	N/A	Reserved for hierarchical purposes.
AGRICULTURE AND FOOD INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**01**00 Icon Type: Full Octagon		N/A
AGRICULTURAL LABORATORY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 1201**01** Icon Type: Full Octagon		N/A
ANIMAL FEEDLOT Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 1201**02** Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
COMMERCIAL FOOD DISTRIBUTION CENTER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 120103 Icon Type: Full Octagon		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
FARM/RANCH Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 120104 Icon Type: Full Octagon		N/A
FOOD DISTRIBUTION Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 120105 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
FOOD PRODUCTION CENTER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 120106 Icon Type: Full Octagon		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
FOOD RETAIL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 120107 Icon Type: Full Octagon		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
GRAIN STORAGE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ AGRICULTURAL LABORATORY Symbol Set Code: 20 Code: 120108 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
BANKING FINANCE AND INSURANCE INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**02**00 Icon Type: Full Octagon		N/A
ATM Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ BANKING FINANCE AND INSURANCE INFRASTRUCTURE Symbol Set Code: 20 Code: 1202**01** Icon Type: Full Octagon		N/A
BANK Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ BANKING FINANCE AND INSURANCE INFRASTRUCTURE Symbol Set Code: 20 Code: 1202**02** Icon Type: Full Octagon		N/A
BULLION STORAGE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ BANKING FINANCE AND INSURANCE INFRASTRUCTURE Symbol Set Code: 20 Code: 1202**03** Icon Type: Full Octagon		N/A
ECONOMIC INFRASTRUCTURE ASSET Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ BANKING FINANCE AND INSURANCE INFRASTRUCTURE Symbol Set Code: 20 Code: 1202**04** Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
FEDERAL RESERVE BANK Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ BANKING FINANCE AND INSURANCE INFRASTRUCTURE Symbol Set Code: 20 Code: 120**05** Icon Type: Full Octagon		N/A
FINANCIAL EXCHANGE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ BANKING FINANCE AND INSURANCE INFRASTRUCTURE Symbol Set Code: 20 Code: 120**06** Icon Type: Full Octagon		N/A
FINANCIAL SERVICES, OTHER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ BANKING FINANCE AND INSURANCE INFRASTRUCTURE Symbol Set Code: 20 Code: 120**07** Icon Type: Full Octagon		N/A
COMMERCIAL INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**03**00 Icon Type: Full Octagon		N/A
CHEMICAL PLANT Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120**01** Icon Type: Full Octagon		N/A
FIREARMS MANUFACTURER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120**02** Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
FIREARMS RETAILER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120303 Icon Type: Full Octagon		N/A
HAZARDOUS MATERIAL PRODUCTION Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120304 Icon Type: Full Octagon		N/A
HAZARDOUS MATERIAL STORAGE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120305 Icon Type: Full Octagon		N/A
INDUSTRIAL SITE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120306 Icon Type: Full Octagon		N/A
LANDFILL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120307 Icon Type: Full Octagon		N/A
PHARMACEUTICAL MANUFACTURER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120308 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
CONTAMINATED HAZARDOUS WASTE SITE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120**309** Icon Type: Full Octagon		N/A
TOXIC RELEASE INVENTORY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ COMMERCIAL INFRASTRUCTURE Symbol Set Code: 20 Code: 120**310** Icon Type: Full Octagon		N/A
EDUCATIONAL FACILITIES INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**04**00 Icon Type: Full Octagon		N/A
COLLEGE/UNIVERSITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/EDUCATIONAL FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 12040**1** Icon Type: Full Octagon		N/A
SCHOOL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/EDUCATIONAL FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 12040**2** Icon Type: Full Octagon		N/A
ENERGY FACITILIES INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**05**00 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
ELECTRIC POWER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ENERGY FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 120501 Icon Type: Main		N/A
GENERATION STATION Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ENERGY FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 120502 Icon Type: Full Octagon		N/A
NATURAL GAS FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ENERGY FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 120503 Icon Type: Full Octagon		N/A
PETROLEUM FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ENERGY FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 120504 Icon Type: Full Octagon		
PETROLEUM/GAS/OIL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ENERGY FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 120505 Icon Type: Main		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
PROPANE FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ENERGY FACILITIES INFRASTRUCTURE Symbol Set Code: 20 Code: 120**506** Icon Type: Full Octagon		N/A
GOVERNMENT SITE INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**06**00 Icon Type: Full Octagon		N/A
MEDICAL INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**07**00	N/A	Reserved for hierarchical purposes.
MEDICAL Type: Entity Subtype Entity/Entity Type: INSTALLATION/ MEDICAL INFRASTRUCTURE Symbol Set Code: 20 Code: 1207**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MEDICAL TREATMENT FACILITY (HOSPITAL) Type: Entity Type Entity: INSTALLATION Symbol Set Code: 20 Code: 1207**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
MILITARY INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**08**00 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
MILITARY ARMORY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/MILITARY INFRASTRUCTURE Symbol Set Code: 20 Code: 120801 Icon Type: Full Octagon		N/A
MILITARY BASE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/MILITARY INFRASTRUCTURE Symbol Set Code: 20 Code: 120802 Icon Type: Full Octagon		N/A
POSTAL SERVICE INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 120900 Icon Type: Full Octagon		N/A
POSTAL DISTRIBUTION CENTER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/POSTAL SERVICE INFRASTRUCTURE Symbol Set Code: 20 Code: 120901 Icon Type: Full Octagon		N/A
POST OFFICE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/POSTAL SERVICE INFRASTRUCTURE Symbol Set Code: 20 Code: 120902 Icon Type: Full Octagon		N/A
PUBLIC VENUES INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 121000 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
ENCLOSED FACITLITY (PUBLIC VENUE) Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/PUBLIC VENUES INFRASTRUCTURE Symbol Set Code: 20 Code: 121000**01** Icon Type: Full Octagon		N/A
OPEN FACILITY (PUBLIC VENUE) Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/PUBLIC VENUES INFRASTRUCTURE Symbol Set Code: 20 Code: 121000**02** Icon Type: Full Octagon		N/A
RECREATIONAL AREA Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/PUBLIC VENUES INFRASTRUCTURE Symbol Set Code: 20 Code: 121000**03** Icon Type: Full Octagon		N/A
RELIGIOUS INSTITUTION Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/PUBLIC VENUES INFRASTRUCTURE Symbol Set Code: 20 Code: 121000**04** Icon Type: Full Octagon		N/A
SPECIAL NEEDS INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**11**00 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
ADULT DAY CARE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/SPECIAL NEEDS INFRASTRUCTURE Symbol Set Code: 20 Code: 1211**01** Icon Type: Full Octagon		N/A
CHILD DAY CARE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/SPECIAL NEEDS INFRASTRUCTURE Symbol Set Code: 20 Code: 1211**02** Icon Type: Full Octagon		N/A
ELDER CARE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/SPECIAL NEEDS INFRASTRUCTURE Symbol Set Code: 20 Code: 1211**03** Icon Type: Full Octagon		N/A
TELECOMMUNICATIONS INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**12**00 Icon Type: Full Octagon		N/A
BROADCAST TRANSMITTER ANTENNAE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TELECOMMUNICATIONS INFRASTRUCTURE Symbol Set Code: 20 Code: 1212**01** Icon Type: Full Octagon		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
TELECOMMUNICATIONS (CIVILIAN) Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TELECOMMUNICATIONS INFRASTRUCTURE Symbol Set Code: 20 Code: 1212**02** Icon Type: Main		N/A
TELECOMMUNICATIONS TOWER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TELECOMMUNICATIONS INFRASTRUCTURE Symbol Set Code: 20 Code: 1212**03** Icon Type: Full Octagon		N/A
TRANSPORTATION INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 12**13**00 Icon Type: Full Octagon		N/A
AIRPORT/AIR BASE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**01** Icon Type: Main+1		N/A
AIR TRAFFIC CONTROL FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**02** Icon Type: Full Octagon		N/A
BUS STATION Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**03** Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
FERRY TERMINAL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**04** Icon Type: Full Octagon		N/A
HELICOPTER LANDING SITE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**05** Icon Type: Full Octagon		N/A
MAINTENANCE FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**06** Icon Type: Full Octagon		N/A
RAILHEAD/RAILROAD STATION Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**07** Icon Type: Main+1		N/A
REST STOP Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**08** Icon Type: Full Octagon		N/A
SEA PORT/NAVAL BASE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 1213**09** Icon Type: Main+1		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
SHIP YARD Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 121310 Icon Type: Main+1		N/A
TOLL FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 121311 Icon Type: Full Octagon		N/A
TRAFFIC INSPECTION FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 121312 Icon Type: Full Octagon		N/A
TUNNEL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ TRANSPORTATION INFRASTRUCTURE Symbol Set Code: 20 Code: 121313 Icon Type: Full Octagon		N/A
WATER SUPPLY INFRASTRUCTURE Type: Entity Type Entity: INFRASTRUCTURE Symbol Set Code: 20 Code: 121400 Icon Type: Full Octagon		N/A
CONTROL VALVE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121401 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
DAM Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121402 Icon Type: Full Octagon		N/A
DISCHARGE OUTFALL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121403 Icon Type: Full Octagon		N/A
GROUND WATER WELL Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121404 Icon Type: Full Octagon		N/A
PUMPING STATION Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121405 Icon Type: Full Octagon		N/A
RESERVOIR Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121406 Icon Type: Full Octagon		N/A
STORAGE TOWER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121407 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
SURFACE WATER INTAKE Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121**08** Icon Type: Full Octagon		N/A
WASTEWATER TREATMENT FACILITY Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121**09** Icon Type: Full Octagon		N/A
WATER Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121**10** Icon Type: Main		N/A
WATER TREATMENT Type: Entity Subtype Entity/Entity Type: INFRASTRUCTURE/ WATER SUPPLY INFRASTRUCTURE Symbol Set Code: 20 Code: 121**11** Icon Type: Main		N/A










D.9.3 Land installation sector 1 modifiers. Land installation sector 1 modifiers denote CBRN type, electric power type and civilian telecommunications type categories. Table D-XVI lists land installation sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE D-XVI. Land installation sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BIOLOGICAL Symbol Set Code: 20 Code: 01	CBRN TYPE		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XVI. Land installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CHEMICAL Symbol Set Code: 20 Code: 02	CBRN TYPE		N/A
NUCLEAR Symbol Set Code: 20 Code: 03	CBRN TYPE		N/A
RADIOLOGICAL Symbol Set Code: 20 Code: 04	CBRN TYPE		N/A
DECONTAMINATION Symbol Set Code: 20 Code: 05	CBRN TYPE		N/A
COAL Symbol Set Code: 20 Code: 06	ELECTRIC POWER TYPE		Used with Electric Power only
GEOTHERMAL Symbol Set Code: 20 Code: 07	ELECTRIC POWER TYPE		Used with Electric Power only
HYDROELECTRIC Symbol Set Code: 20 Code: 08	ELECTRIC POWER TYPE		Used with Electric Power only
NATURAL GAS Symbol Set Code: 20 Code: 09	ELECTRIC POWER TYPE		Used with Electric Power only
PETROLEUM Symbol Set Code: 20 Code: 10	ELECTRIC POWER TYPE		Used with Electric Power only




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XVI. Land installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CIVILIAN Symbol Set Code: 20 Code: 11	OPERATION		N/A
CIVILIAN TELEPHONE Symbol Set Code: 20 Code: 12	CIVILIAN TELECOMMUNICATIONS TYPE		N/A
CIVILIAN TELEVISION Symbol Set Code: 20 Code: 13	CIVILIAN TELECOMMUNICATIONS TYPE		N/A
CYBERSPACE Symbol Set Code: 20 Code: 14	CAPABILITY		N/A







D.9.4 Land installation sector 2 modifiers. Land installation sector 2 modifiers denote capability category. Table D-XVII lists the land installation sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE D-XVII. Land installation sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BIOLOGICAL WARFARE PRODUCTION Symbol Set Code: 20 Code: 01	CAPABILITY		N/A
CHEMICAL WARFARE PRODUCTION Symbol Set Code: 20 Code: 02	CAPABILITY		N/A
NUCLEAR WARFARE PRODUCTION Symbol Set Code: 20 Code: 03	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-XVII. Land installation sector 2 modifiers - Continued.

RADIOLOGICAL WARFARE PRODUCTION Symbol Set Code: 20 Code: 04	CAPABILITY		N/A
ATOMIC ENERGY REACTOR Symbol Set Code: 20 Code: 05	CAPABILITY		N/A
NUCLEAR MATERIAL PRODUCTION Symbol Set Code: 20 Code: 06	CAPABILITY		N/A
NUCLEAR MATERIAL STORAGE Symbol Set Code: 20 Code: 07	CAPABILITY		N/A
WEAPONS GRADE PRODUCTION Symbol Set Code: 20 Code: 08	CAPABILITY		N/A
CYBERSPACE Symbol Set Code: 20 Code: 09	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SEA SURFACE SYMBOLS

E.1 SCOPE

E.1.1 Scope. This appendix addresses symbols that support sea surface units, equipment and installations (UEI) in the C2 domain. The tables in this appendix present the icons and modifiers for the sea surface domain. This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

E.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

E.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

E.4 GENERAL REQUIREMENTS

E.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and sea surface symbology.

E.5 DETAILED REQUIREMENTS

E.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

E.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

E.5.3 Composition of sea surface symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Figure E-1 shows an example of a sea surface equipment symbol.

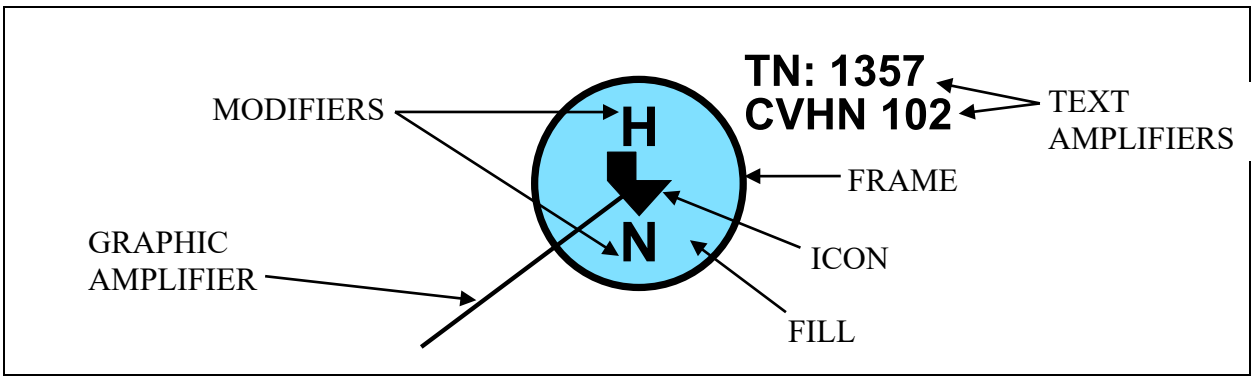



FIGURE E-1. Sea surface symbol components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

E.5.3.1 Symbol building process. Table E-I depicts the symbol building process for sea surface symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE E-I. Sea surface symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity of the object from the sea surface column tables I, II, or III. In this example, the standard identity is friend. The example depicts a "friendly sea surface track."	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is "carrier," a sea surface entity type. The example depicts a "friendly military combatant carrier."	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is "helicopter equipped/VTOL," a sector 1 modifier. The example depicts a "friendly military combatant carrier, helicopter equipped/VTOL."	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is "nuclear powered," a sector 2 modifier. The example depicts a "friendly military combatant carrier, helicopter equipped/VTOL, nuclear powered."	
5.	The finished symbol will appear as shown in the example.	

E.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table E-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table E-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

E.5.3.3 Amplifiers.

E.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure E-2 shows the placement of sea surface symbol amplifiers around the friend symbol frame. Table E-II provides descriptions and formats of each amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

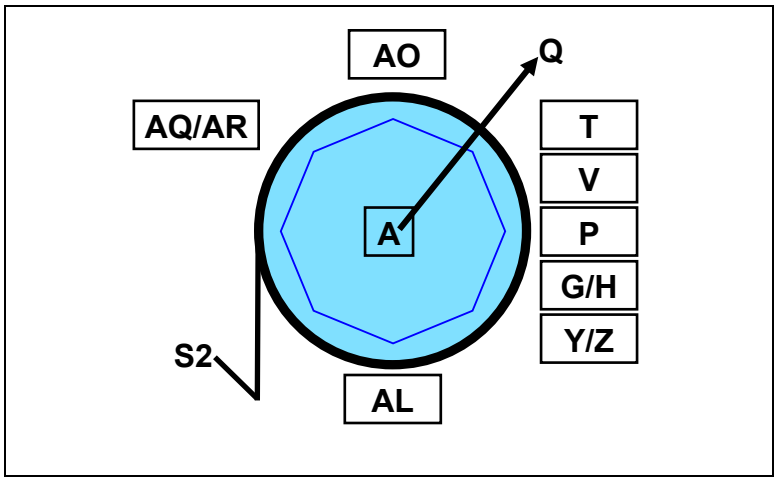


FIGURE E-2. Placement of sea surface symbol amplifiers.

TABLE E-II. Descriptions and formats of sea surface symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Ship/Ship Type Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
P	Automatic Identification System (AIS)	A text amplifier displaying the maritime Automatic Identification System.	
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13 in the base document).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-II. Descriptions and formats of sea surface symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
Z	Speed	A text amplifier for CBRN, units and equipment that displays velocity (see 5.3.7.6).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. Ex. Aircraft: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBB-CC, where A = remote/local BBB = engagement status CC = weapon asset
AQ	Guarded Unit	During ballistic missile defense, some tracks are designated as guarded by a particular unit.	The 2-character string, BG
AR	Special Designator	Special track designators, such as Non-Real Time (NRT) and Tactically Significant (SIG) tracks, are denoted here.	The 3-character strings, NRT or SIG

E.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

E.6 SEA SURFACE UNIT, EQUIPMENT AND INSTALLATION SYMBOLS




E.6.1 Sea surface unit, equipment and installation symbols. This section includes the lists of icons and modifiers for building sea surface unit, equipment and installation symbols.

E.6.2 Sea surface unit, equipment and installation icons. Table E-III depicts sea surface unit, equipment and installation icons.

In accordance with STANAG 1166, Standard Ship Designator System, single letter codes specify the type of merchant ship, while two- and three-letter codes specify the type of military ship. For other types of civilian surface vessels, the letter codes of the icon are without a STANAG reference. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons.

DESCRIPTION	ICON	REMARKS
MILITARY Type: Entity Symbol Set Code: 30 Code: **11**0000 Icon Type: Main		Reserved for hierarchical purposes.
MILITARY COMBATANT Type: Entity Symbol Set Code: 30 Code: **12**0000 Icon Type: Main		Reserved for hierarchical purposes.
CARRIER Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 12**01**00 Icon Type: Main		N/A
SURFACE COMBATANT, LINE Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 12**02**00 Icon Type: Main		N/A
BATTLESHIP Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/SURFACE COMBATANT, LINE Symbol Set Code: 30 Code: 1202**01** Icon Type: Main		N/A
CRUISER Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/SURFACE COMBATANT, LINE Symbol Set Code: 30 Code: 1202**02** Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
DESTROYER Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/SURFACE COMBATANT, LINE Symbol Set Code: 30 Code: 120**03** Icon Type: Main		N/A
FRIGATE Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/SURFACE COMBATANT, LINE Symbol Set Code: 30 Code: 120**04** Icon Type: Main		N/A
CORVETTE Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/SURFACE COMBATANT, LINE Symbol Set Code: 30 Code: 120**05** Icon Type: Main		N/A
LITTORAL COMBATANT SHIP Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/SURFACE COMBATANT, LINE Symbol Set Code: 30 Code: 120**06** Icon Type: Main		N/A
AMPHIBIOUS WARFARE SHIP Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 12**03**00 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
AMPHIBIOUS COMMAND SHIP Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120301 Icon Type: Main		N/A
AMPHIBIOUS ASSAULT, NON-SPECIFIED Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120302 Icon Type: Main		N/A
AMPHIBIOUS ASSAULT SHIP, GENERAL Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120303 Icon Type: Main		N/A
AMPHIBIOUS ASSAULT SHIP, MULTIPURPOSE Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120304 Icon Type: Main		N/A
AMPHIBIOUS ASSAULT SHIP, HELICOPTER Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120305 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
AMPHIBIOUS TRANSPORT DOCK Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120306 Icon Type: Main		N/A
LANDING SHIP Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120307 Icon Type: Main		N/A
LANDING CRAFT Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/AMPHIBIOUS WARFARE SHIP Symbol Set Code: 30 Code: 120308 Icon Type: Main		N/A
MINE WARFARE SHIP Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 120400 Icon Type: Main		N/A
MINE LAYER Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/MINE WARFARE SHIP Symbol Set Code: 30 Code: 120401 Icon Type: Main		N/A
MINE SWEEPER Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/MINE WARFARE SHIP Symbol Set Code: 30 Code: 120402 Icon Type: Main		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
MINE SWEEPER, DRONE Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/MINE WARFARE SHIP Symbol Set Code: 30 Code: 120**403** Icon Type: Main		N/A
MINE HUNTER Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/MINE WARFARE SHIP Symbol Set Code: 30 Code: 120**404** Icon Type: Main		N/A
MINE COUNTERMEASURES Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/MINE WARFARE SHIP Symbol Set Code: 30 Code: 120**405** Icon Type: Main		N/A
MINE COUNTERMEASURES, SUPPORT SHIP Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/MINE WARFARE SHIP Symbol Set Code: 30 Code: 120**406** Icon Type: Main		N/A
PATROL BOAT Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 12**05**00 Icon Type: Main		N/A
PATROL CRAFT, SUBMARINE CHASER/ESCORT, GENERAL Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/PATROL BOAT Symbol Set Code: 30 Code: 120**501** Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
PATROL SHIP, GENERAL Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/PATROL BOAT Symbol Set Code: 30 Code: 120502 Icon Type: Main		N/A
DECOY Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 120600 Icon Type: Main		N/A
UNMANNED SURFACE WATER VEHICLE (USV) Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 120700 Icon Type: Main		N/A
SPEEDBOAT Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 120800 Icon Type: Main		N/A
RIGID-HULL INFLATABLE BOAT (RHIB) Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/SPEEDBOAT Symbol Set Code: 30 Code: 120801 Icon Type: Main		N/A
JET SKI Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 120900 Icon Type: Main		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
NAVY TASK ORGANIZATION Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 12**10**00 Icon Type: Main		N/A
NAVY TASK ELEMENT Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/NAVY TASK ORGANIZATION Symbol Set Code: 30 Code: 1210**01** Icon Type: Main		N/A
NAVY TASK FORCE Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/NAVY TASK ORGANIZATION Symbol Set Code: 30 Code: 1210**02** Icon Type: Main		N/A
NAVY TASK GROUP Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/NAVY TASK ORGANIZATION Symbol Set Code: 30 Code: 1210**03** Icon Type: Main		N/A
NAVY TASK UNIT Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/NAVY TASK ORGANIZATION Symbol Set Code: 30 Code: 1210**04** Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
CONVOY Type: Entity Subtype Entity/Entity Type: MILITARY COMBATANT/NAVY TASK ORGANIZATION Symbol Set Code: 30 Code: 1210**05** Icon Type: Main		N/A
SEA-BASED X-BAND (SBX) RADAR Type: Entity Type Entity: MILITARY COMBATANT Symbol Set Code: 30 Code: 12**11**00 Icon Type: Main		N/A
MILITARY NONCOMBATANT Type: Entity Symbol Set Code: 30 Code: **13**0000 Icon Type: Main		Reserved for hierarchical purposes.
AUXILIARY SHIP Type: Entity Type Entity: MILITARY NONCOMBATANT Symbol Set Code: 30 Code: 13**01**00 Icon Type: Main		N/A
AMMUNITION SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130**01** Icon Type: Main		N/A
NAVAL STORES SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130**02** Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
AUXILIARY FLAG SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130103 Icon Type: Main		N/A
INTELLIGENCE COLLECTOR Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130104 Icon Type: Main		N/A
OCEANOGRAPHIC RESEARCH SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130105 Icon Type: Main		N/A
SURVEY SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130106 Icon Type: Main		N/A
HOSPITAL SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130107 Icon Type: Main		N/A
NAVAL CARGO SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 130108 Icon Type: Main		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
COMBAT SUPPORT SHIP, FAST Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 1301**09** Icon Type: Main		N/A
OILER, REPLENISHMENT Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 1301**10** Icon Type: Main		N/A
REPAIR SHIP Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 1301**11** Icon Type: Main		N/A
SUBMARINE TENDER Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 1301**12** Icon Type: Main		N/A
TUG, OCEAN GOING Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/AUXILIARY SHIP Symbol Set Code: 30 Code: 1301**13** Icon Type: Main		N/A
SERVICE CRAFT/YARD Type: Entity Type Entity: MILITARY NONCOMBATANT Symbol Set Code: 30 Code: 13**02**00 Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
BARGE, NOT SELF-PROPELLED Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/SERVICE CRAFT/YARD Symbol Set Code: 30 Code: 1302**01** Icon Type: Main		N/A
BARGE, SELF-PROPELLED Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/SERVICE CRAFT/YARD Symbol Set Code: 30 Code: 1302**02** Icon Type: Main		N/A
TUG, HARBOR Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/SERVICE CRAFT/YARD Symbol Set Code: 30 Code: 1302**03** Icon Type: Main		N/A
LAUNCH Type: Entity Subtype Entity/Entity Type: MILITARY NONCOMBATANT/SERVICE CRAFT/YARD Symbol Set Code: 30 Code: 1302**04** Icon Type: Main		N/A
CIVILIAN Type: Entity Symbol Set Code: 30 Code: **14**0000 Icon Type: Main		N/A
MERCHANT SHIP Type: Entity Type Entity: CIVILIAN Symbol Set Code: 30 Code: 14**01**00 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
CARGO, GENERAL Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140101 Icon Type: Full Octagon		N/A
CONTAINER SHIP Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140102 Icon Type: Full Octagon		N/A
DREDGE Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140103 Icon Type: Full Octagon		N/A
ROLL ON/ROLL OFF Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140104 Icon Type: Full Octagon		N/A
FERRY Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140105 Icon Type: Full Octagon		N/A
HEAVY LIFT Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140106 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
HOVERCRAFT Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140107 Icon Type: Full Octagon		N/A
LASH CARRIER (WITH BARGES) Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140108 Icon Type: Full Octagon		N/A
OILER/TANKER Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140109 Icon Type: Full Octagon		N/A
PASSENGER Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140110 Icon Type: Full Octagon		N/A
TUG, OCEAN GOING Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140111 Icon Type: Full Octagon		N/A
TOW Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 140112 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
TRANSPORT SHIP, HAZARDOUS MATERIAL Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 1401**13** Icon Type: Full Octagon		N/A
JUNK/DHOW Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 1401**14** Icon Type: Full Octagon		N/A
BARGE, NOT SELF-PROPELLED Type: Entity Subtype Entity/Entity Type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 1401**15** Icon Type: Full Octagon		N/A
HOSPITAL SHIP Type: Entity Subtype Entity/Entity type: CIVILIAN/MERCHANT SHIP Symbol Set Code: 30 Code: 1401**16** Icon Type: Full Octagon		N/A
FISHING VESSEL Type: Entity Type Entity: CIVILIAN Symbol Set Code: 30 Code: 1**402**00 Icon Type: Full Octagon		N/A
DRIFTER Type: Entity Subtype Entity/Entity Type: CIVILIAN/FISHING VESSEL Symbol Set Code: 30 Code: 1402**01** Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
TRAWLER Type: Entity Subtype Entity/Entity Type: CIVILIAN/FISHING VESSEL Symbol Set Code: 30 Code: 1402**02** Icon Type: Full Octagon		N/A
DREDGER Type: Entity Subtype Entity/Entity Type: CIVILIAN/FISHING VESSEL Symbol Set Code: 30 Code: 1402**03** Icon Type: Full Octagon		N/A
LAW ENFORCEMENT VESSEL Type: Entity Type Entity: CIVILIAN Symbol Set Code: 30 Code: 14**03**00 Icon Type: Full Octagon		N/A
LEISURE CRAFT, SAILING Type: Entity Type Entity: CIVILIAN Symbol Set Code: 30 Code: 14**04**00 Icon Type: Full Octagon		N/A
LEISURE CRAFT, MOTORIZED Type: Entity Type Entity: CIVILIAN Symbol Set Code: 30 Code: 14**05**00 Icon Type: Main		N/A
RIGID-HULL INFLATABLE BOAT (RHIB) Type: Entity Subtype Entity/Entity Type: CIVILIAN/LEISURE CRAFT, MOTORIZED Symbol Set Code: 30 Code: 1405**01** Icon Type: Main		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
SPEEDBOAT Type: Entity Subtype Entity/Entity Type: CIVILIAN/LEISURE CRAFT, MOTORIZED Symbol Set Code: 30 Code: 140502 Icon Type: Main		N/A
JET SKI Type: Entity Type Entity: CIVILIAN Symbol Set Code: 30 Code: 140600 Icon Type: Main		N/A
UNMANNED SURFACE WATER VEHICLE (USV) Type: Entity Type Entity: CIVILIAN Symbol Set Code: 30 Code: 140700 Icon Type: Full Octagon		N/A









E.6.3 Sea surface unit, equipment and installation sector 1 modifiers. Sea surface unit, equipment and installation sector 1 modifiers denote mission area, weapons capability and asset capability categories. Modifiers are not permitted with civilian sea surface symbols. Table E-IV lists sea surface unit, equipment and installation sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE E-IV. Sea surface unit, equipment and installation sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
OWN SHIP Symbol Set Code: 30 Code: 01	MISSION AREA		APP-6
ANTIAIR WARFARE Symbol Set Code: 30 Code: 02	MISSION AREA		N/A










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Sea surface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTISUBMARINE WARFARE Symbol Set Code: 30 Code: 03	MISSION AREA		N/A
ESCORT Symbol Set Code: 30 Code: 04	MISSION AREA		N/A
ELECTRONIC WARFARE Symbol Set Code: 30 Code: 05	MISSION AREA		N/A
INTELLIGENCE, SURVEILLANCE, RECONNAISSANCE Symbol Set Code: 30 Code: 06	MISSION AREA		N/A
MINE COUNTERMEASURES Symbol Set Code: 30 Code: 07	MISSION AREA		N/A
MISSILE DEFENSE Symbol Set Code: 30 Code: 08	MISSION AREA		N/A
MEDICAL Symbol Set Code: 30 Code: 09	MISSION AREA		N/A
MINE WARFARE Symbol Set Code: 30 Code: 10	MISSION AREA		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Sea surface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
REMOTE MULTI-MISSION VEHICLE (RMV) Symbol Set Code: 30 Code: 11	MISSION AREA		US only
SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 30 Code: 12	ASSET CAPABILITY		N/A
SURFACE WARFARE Symbol Set Code: 30 Code: 13	MISSION AREA		N/A
BALLISTIC MISSILE Symbol Set Code: 30 Code: 14	WEAPONS CAPABILITY		N/A
GUIDED MISSILE Symbol Set Code: 30 Code: 15	WEAPONS CAPABILITY		N/A
OTHER GUIDED MISSILE Symbol Set Code: 30 Code: 16	WEAPONS CAPABILITY		N/A
TORPEDO Symbol Set Code: 30 Code: 17	WEAPONS CAPABILITY		N/A
DRONE EQUIPPED Symbol Set Code: 30 Code: 18	ASSET CAPABILITY		N/A
HELICOPTER EQUIPPED/VSTOL Symbol Set Code: 30 Code: 19	ASSET CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.










TABLE E-IV. Sea surface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BALLISTIC MISSILE DEFENSE, SHOOTER Symbol Set Code: 30 Code: 20	MISSION AREA		N/A
BALLISTIC MISSILE DEFENSE, LONG-RANGE SURVEILLANCE AND TRACK (LRS&T) Symbol Set Code: 30 Code: 21	MISSION AREA		N/A
SEA-BASE X-BAND Symbol Set Code: 30 Code: 22	MISSION AREA		Used with SBX Radar (Code: 12**1**100) only
HIJACKING/HIJACKED Symbol Set Code: 30 Code: 23	CRIME		N/A
HIJACKER Symbol Set Code: 30 Code: 24	CRIME		N/A
CYBERSPACE Symbol Set Code: 30 Code: 25	CAPABILITY		N/A

E.6.4 Sea surface unit, equipment and installation sector 2 modifiers. Sea surface unit, equipment and installation sector 2 modifiers denote ship propulsion, ship capacity, cargo capacity, ship mobility and USV control categories. Modifiers are not permitted with civilian sea surface symbols. Table E-V lists sea surface unit, equipment and installation sector 2 modifiers and illustrates their placement within the bounding octagon.








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Sea surface unit, equipment and installation sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
NUCLEAR POWERED Symbol Set Code: 30 Code: 01	SHIP PROPULSION		N/A
HEAVY Symbol Set Code: 30 Code: 02	SHIP CAPACITY		N/A
LIGHT Symbol Set Code: 30 Code: 03	SHIP CAPACITY		N/A
MEDIUM Symbol Set Code: 30 Code: 04	SHIP CAPACITY		N/A
DOCK Symbol Set Code: 30 Code: 05	CARGO CAPACITY		N/A
LOGISTICS Symbol Set Code: 30 Code: 06	CARGO CAPACITY		N/A
TANK Symbol Set Code: 30 Code: 07	CARGO CAPACITY		N/A
VEHICLE Symbol Set Code: 30 Code: 08	CARGO CAPACITY		N/A
FAST Symbol Set Code: 30 Code: 09	SHIP MOBILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Sea surface unit, equipment and installation sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
AIR-CUSHIONED (US) Symbol Set Code: 30 Code: 10	SHIP MOBILITY		N/A
AIR-CUSHIONED (NATO) Symbol Set Code: 30 Code: 11	SHIP MOBILITY		N/A
HYDROFOIL Symbol Set Code: 30 Code: 12	SHIP MOBILITY		N/A
AUTONOMOUS CONTROL Symbol Set Code: 30 Code: 13	USV CONTROL		Used with USV only.
REMOTELY PILOTED Symbol Set Code: 30 Code: 14	USV CONTROL		Used with USV only.
EXPENDABLE Symbol Set Code: 30 Code: 15	USV CONTROL		Used with USV only.
CYBERSPACE Symbol Set Code: 30 Code: 16	CAPABILITY		N/A

E.6.5 Sea surface local tracks. Local tracks are tracks internal to a particular Combat Information Center (CIC). These tracks are not intended to be transmitted outside the ship's CIC. Table E-VII depicts local tracks. Modifiers are not permitted with local track symbols.

E.6.5.1 Fused tracks. Fused tracks are tracks in the process of classification. Multiple sources of incoming information need to be adjudicated and combined (fused) into a single track. Fused tracks are denoted by a question mark ("?") encapsulated within an hourglass icon (see table E-VII). All fused tracks have a pending standard identity frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-VI. Own Ship.

DESCRIPTION	ICON	REMARKS
OWN SHIP Type: Entity (Local) Symbol Set Code: 30 Code: **15**0000 Icon Type: Full Octagon		The diameter of the icon shall be 1L. This icon shall be used with a friend standard identity only.

TABLE E-VII. Sea surface local tracks.

DESCRIPTION	ICON	REMARKS
FUSED TRACK Type: Entity (Local) Symbol Set Code: 30 Code: **16**0000 Icon Type: Full Octagon		All fused tracks shall have a pending standard identity frame.
MANUAL TRACK Type: Entity (Local) Symbol Set Code: 30 Code: **17**0000 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SEA SUBSURFACE SYMBOLS

F.1 SCOPE

F.1.1 Scope. This appendix addresses symbols that support sea subsurface units, equipment and installations in the C2 domain. The tables in this appendix present the icons and modifiers for the sea subsurface domain. This appendix is divided into two sections (see figure F-1): 1) unit, equipment and installation symbols (see F.6) and 2) mine warfare symbols (see F.7). This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

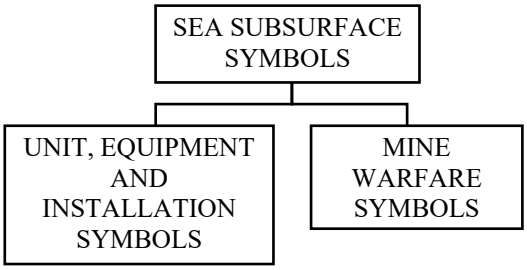


FIGURE F-1. Sea subsurface appendix sections.

F.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

F.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

F.4 GENERAL REQUIREMENTS

F.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and sea subsurface symbology.

F.5 DETAILED REQUIREMENTS

F.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

F.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

F.5.3 Composition of sea subsurface symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Figure F-2 shows an example of a sea subsurface equipment symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

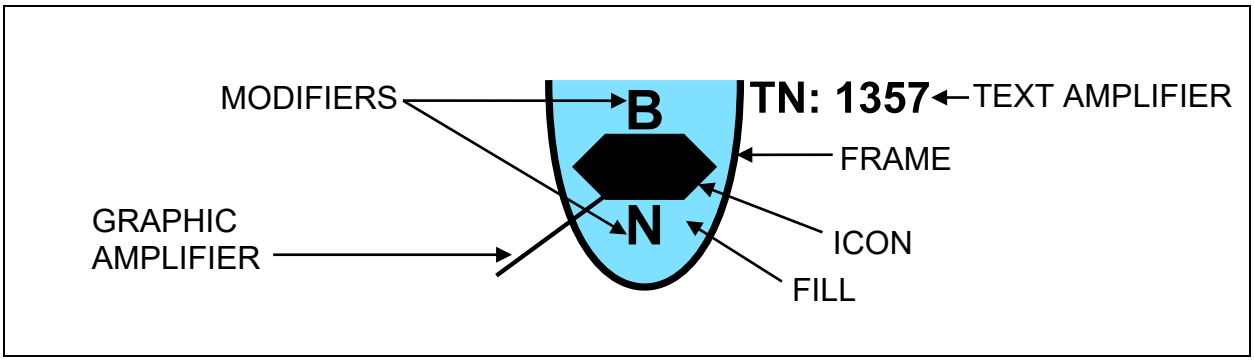







FIGURE F-2. Sea subsurface symbol components.

F.5.3.1 Symbol building process. Table F-I depicts the symbol building process for sea subsurface symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE F-I. Sea subsurface symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity of the object from the sea subsurface column in tables I, II, or III. In this example, the standard identity is friend. The example depicts a “friendly sea subsurface track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “submarine,” a sea subsurface entity type. The example depicts a “friendly submarine.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “ballistic missile,” a sector 1 modifier. The example depicts a “friendly submarine with ballistic missile weapons capability.”	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is “nuclear powered,” a sector 2 modifier. The example depicts a “friendly nuclear powered submarine with ballistic missile weapons capability.”	
5.	The finished symbol will appear as shown in the example.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

F.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon or fill the octagon, as indicated in table F-III. When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table F-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

F.5.3.3 Amplifiers.

F.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure F-3 shows the placement of sea subsurface symbol amplifiers around the friend symbol frame. Table F-II provides descriptions and formats of each amplifier.

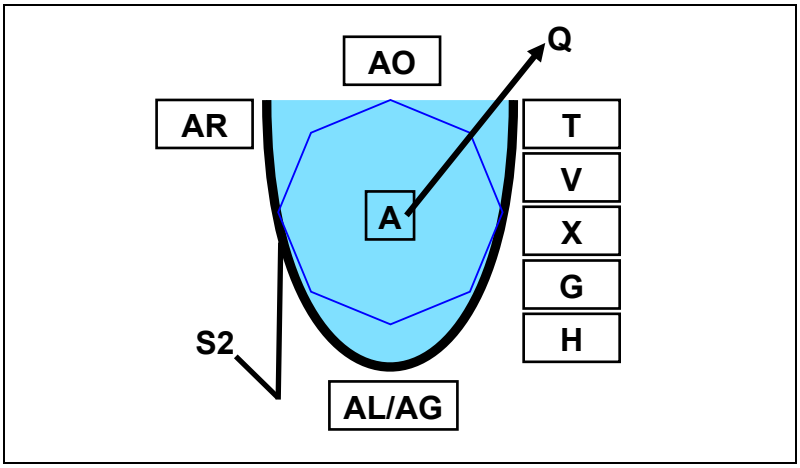


FIGURE F-3. Placement of sea subsurface symbol amplifiers.

TABLE F-II. Descriptions and formats of sea subsurface symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Sub/Sub Type Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13 in the base document).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-II. Descriptions and formats of sea subsurface symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
X	Depth	A text amplifier for equipment that displays depth for submerged objects.	Measurement units (FT, M) shall be displayed within the string. Ex: 105 FT
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. Ex. Aircraft: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBB-CC, where A = remote/local BBB = engagement status CC = weapon asset
AR	Special Designator	Special track designators such as Non-Real Time (NRT) and Tactically Significant (SIG) tracks are denoted here.	The 3-character strings, NRT or SIG

F.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.






F.6 SEA SUBSURFACE UNIT, EQUIPMENT AND INSTALLATION SYMBOLS

F.6.1 Sea subsurface unit, equipment and installation symbols. This section includes the lists of icons and modifiers for building sea subsurface unit, equipment and installation symbols.

F.6.2 Sea subsurface unit, equipment and installation icons. Table F-III depicts sea subsurface unit, equipment and installation icons. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons. Sea mines and sea mine decoys are presented in F.7.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Sea subsurface unit, equipment and installation icons.

DESCRIPTION	ICON	REMARKS
MILITARY Type: Entity Symbol Set Code: 35 Code: **11**0000 Icon Type: Main		N/A
SUBMARINE Type: Entity Type Entity: MILITARY Symbol Set Code: 35 Code: 11**01**00 Icon Type: Main		N/A
SUBMARINE, SURFACED Type: Entity Subtype Entity/Entity Type: MILITARY/SUBMARINE Symbol Set Code: 35 Code: 1101**01** Icon Type: Main		N/A
SUBMARINE, SNORKELING Type: Entity Subtype Entity/Entity Type: MILITARY/SUBMARINE Symbol Set Code: 35 Code: 1101**02** Icon Type: Main		N/A
SUBMARINE, BOTTOMED Type: Entity Subtype Entity/Entity Type: MILITARY/SUBMARINE Symbol Set Code: 35 Code: 1101**03** Icon Type: Main		N/A
OTHER SUBMERSIBLE Type: Entity Type Entity: MILITARY Symbol Set Code: 35 Code: 11**02**00 Icon Type: Main		N/A
NONSUBMARINE Type: Entity Type Entity: MILITARY Symbol Set Code: 35 Code: 11**03**00 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Sea subsurface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
AUTONOMOUS UNDERWATER VEHICLE (AUV)/UNMANNED UNDERWATER VEHICLE (UUV) Type: Entity Type Entity: MILITARY Symbol Set Code: 35 Code: 11**04**00 Icon Type: Main		N/A
DIVER Type: Entity Type Entity: MILITARY Symbol Set Code: 35 Code: 11**05**00 Icon Type: Main		N/A
CIVILIAN Type: Entity Symbol Set Code: 35 Code: **12**0000 Icon Type: Main		N/A
SUBMERSIBLE Type: Entity Type Entity: CIVILIAN Symbol Set Code: 35 Code: 12**01**00 Icon Type: Main		N/A
AUTONOMOUS UNDERWATER VEHICLE (AUV)/UNMANNED UNDERWATER VEHICLE (UUV) Type: Entity Type Entity: CIVILIAN Symbol Set Code: 35 Code: 12**02**00 Icon Type: Main		N/A
DIVER Type: Entity Type Entity: CIVILIAN Symbol Set Code: 35 Code: 12**03**00 Icon Type: Main		N/A
WEAPON Type: Entity Symbol Set Code: 35 Code: **13**0000 Icon Type: Main		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Sea subsurface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
TORPEDO Type: Entity Type Entity: WEAPON Symbol Set Code: 35 Code: 13**01**00 Icon Type: Main		N/A
IMPROVISED EXPLOSIVE DEVICE (IED) Type: Entity Type Entity: WEAPON Symbol Set Code: 35 Code: 13**02**00 Icon Type: Main		Used with hostile standard identity only.
DECOY Type: Entity Type Entity: WEAPON Symbol Set Code: 35 Code: 13**03**00 Icon Type: Main		N/A










F.6.3 Sea subsurface unit, equipment and installation sector 1 modifiers. Sea subsurface unit, equipment and installation sector 1 modifiers denote mission area, weapons capability, asset capability and submarine confidence categories. Table F-IV lists sea subsurface unit, equipment and installation sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE F-IV. Sea subsurface unit, equipment and installation sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTISUBMARINE WARFARE Symbol Set Code: 35 Code: 01	MISSION AREA		N/A
AUXILIARY Symbol Set Code: 35 Code: 02	MISSION AREA		Used with SUBMARINE entity type only.
COMMAND AND CONTROL Symbol Set Code: 35 Code: 03	MISSION AREA		Used with SUBMARINE entity type only.










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-IV. Sea subsurface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
INTELLIGENCE, SURVEILLANCE, RECONNAISSANCE Symbol Set Code: 35 Code: 04	MISSION AREA		N/A
MINE COUNTERMEASURES Symbol Set Code: 35 Code: 05	MISSION AREA		N/A
MINE WARFARE Symbol Set Code: 35 Code: 06	MISSION AREA		N/A
SURFACE WARFARE Symbol Set Code: 35 Code: 07	MISSION AREA		N/A
ATTACK Symbol Set Code: 35 Code: 08	WEAPONS CAPABILITY		Used with SUBMARINE entity type only.
BALLISTIC MISSILE Symbol Set Code: 35 Code: 09	WEAPONS CAPABILITY		Used with SUBMARINE entity type only.
GUIDED MISSILE Symbol Set Code: 35 Code: 10	WEAPONS CAPABILITY		Used with SUBMARINE entity type only.
OTHER GUIDED MISSILE Symbol Set Code: 35 Code: 11	WEAPONS CAPABILITY		Used with SUBMARINE entity type only.
SPECIAL OPERATIONS FORCES (SOF) Symbol Set Code: 35 Code: 12	ASSET CAPABILITY		Used with SUBMARINE entity type only.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-IV. Sea subsurface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
POSSIBLE SUBMARINE - LOW 1 Symbol Set Code: 35 Code: 13	SUBMARINE CONFIDENCE		Used with SUBMARINE entity type only.
POSSIBLE SUBMARINE - LOW 2 Symbol Set Code: 35 Code: 14	SUBMARINE CONFIDENCE		Used with SUBMARINE entity type only.
POSSIBLE SUBMARINE - HIGH 3 Symbol Set Code: 35 Code: 15	SUBMARINE CONFIDENCE		Used with SUBMARINE entity type only.
POSSIBLE SUBMARINE - HIGH 4 Symbol Set Code: 35 Code: 16	SUBMARINE CONFIDENCE		Used with SUBMARINE entity type only.
PROBABLE SUBMARINE Symbol Set Code: 35 Code: 17	SUBMARINE CONFIDENCE		Used with SUBMARINE entity type only.
CERTAIN SUBMARINE Symbol Set Code: 35 Code: 18	SUBMARINE CONFIDENCE		Used with SUBMARINE entity type only.
ANTI-TORPEDO TORPEDO Symbol Set Code: 35 Code: 19	WEAPONS CAPABILITY		Used with TORPEDO entity type only.
HIJACKING/HIJACKED Symbol Set Code: 35 Code: 20	CRIME		N/A
HIJACKER Symbol Set Code: 35 Code: 21	CRIME		N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-IV. Sea subsurface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CYBERSPACE Symbol Set Code: 35 Code: 22	CAPABILITY		N/A









F.6.4 Sea subsurface unit, equipment and installation sector 2 modifiers. Sea subsurface unit, equipment and installation sector 2 modifiers denote ship propulsion and UUV control categories. Table F-V lists sea subsurface unit, equipment and installation sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE F-V. Sea subsurface unit, equipment and installation sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
AIR INDEPENDENT PROPULSION Symbol Set Code: 35 Code: 01	SHIP PROPULSION		Used with SUBMARINE entity type only.
DIESEL ELECTRIC, GENERAL Symbol Set Code: 35 Code: 02	SHIP PROPULSION		Used with SUBMARINE entity type only.
DIESEL - TYPE 1 Symbol Set Code: 35 Code: 03	SHIP PROPULSION		Used with SUBMARINE entity type only.
DIESEL - TYPE 2 Symbol Set Code: 35 Code: 04	SHIP PROPULSION		Used with SUBMARINE entity type only.
DIESEL - TYPE 3 Symbol Set Code: 35 Code: 05	SHIP PROPULSION		Used with SUBMARINE entity type only.
NUCLEAR POWERED, GENERAL Symbol Set Code: 35 Code: 06	SHIP PROPULSION		Used with SUBMARINE entity type only.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-V. Sea subsurface unit, equipment and installation sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
NUCLEAR - TYPE 1 Symbol Set Code: 35 Code: 07	SHIP PROPULSION		Used with SUBMARINE entity type only.
NUCLEAR - TYPE 2 Symbol Set Code: 35 Code: 08	SHIP PROPULSION		Used with SUBMARINE entity type only.
NUCLEAR - TYPE 3 Symbol Set Code: 35 Code: 09	SHIP PROPULSION		Used with SUBMARINE entity type only.
NUCLEAR - TYPE 4 Symbol Set Code: 35 Code: 10	SHIP PROPULSION		Used with SUBMARINE entity type only.
NUCLEAR - TYPE 5 Symbol Set Code: 35 Code: 11	SHIP PROPULSION		Used with SUBMARINE entity type only.
NUCLEAR - TYPE 6 Symbol Set Code: 35 Code: 12	SHIP PROPULSION		Used with SUBMARINE entity type only.
NUCLEAR - TYPE 7 Symbol Set Code: 35 Code: 13	SHIP PROPULSION		Used with SUBMARINE entity type only.
AUTONOMOUS CONTROL Symbol Set Code: 35 Code: 14	UUV CONTROL		Used with AUV/UUV entity type only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-V. Sea subsurface unit, equipment and installation sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
REMOTELY PILOTED Symbol Set Code: 35 Code: 15	UUV CONTROL		Used with AUV/UUV entity type only.
EXPENDABLE Symbol Set Code: 35 Code: 16	UUV CONTROL		Used with AUV/UUV entity type only.
CYBERSPACE Symbol Set Code: 35 Code: 17	CAPABILITY		N/A

F.6.5 Sea subsurface local tracks. Local tracks are tracks internal to a particular Combat Information Center (CIC). These tracks are not intended to be transmitted outside the ship's CIC. Table F-VI depicts local tracks. Modifiers are not permitted with local track symbols.

F.6.5.1 Fused tracks. Fused tracks are tracks in the process of classification. Multiple sources of incoming information need to be adjudicated and combined (fused) into a single track. Fused tracks are denoted by a question mark (?) encapsulated within an hourglass icon (see table F-VI). All fused tracks have a pending standard identity frame.

TABLE F-VI. Sea subsurface local tracks.

DESCRIPTION	ICON	REMARKS
ECHO TRACKER CLASSIFIER (ETC)/POSSIBLE CONTACT (POSCON) Type: Entity (Local) Symbol Set Code: 35 Code: **14**0000 Icon Type: Full Octagon		All ETC/POSCON tracks shall have a pending standard identity frame.
FUSED TRACK Type: Entity (Local) Symbol Set Code: 35 Code: **15**0000 Icon Type: Full Octagon		All fused tracks shall have a pending standard identity frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VI. Sea subsurface local tracks.

DESCRIPTION	ICON	REMARKS
MANUAL TRACK Type: Entity (Local) Symbol Set Code: 35 Code: **16**0000 Icon Type: Full Octagon		N/A

F.7 MINE WARFARE SYMBOLS

F.7.1 Mine warfare symbols. This section includes the lists of icons for building mine warfare (MIW) symbols. There are no modifiers in MIW symbols.

F.7.2 Mine warfare icons. MIW symbols are represented using Mine Warfare Environmental Decision Aids Library (MEDAL) icons embedded within MIL-STD-2525 standard identity frames. The color in MEDAL icons represents the threat level of that contact. Red denotes mine, orange denotes mine-like contact (MILCO), yellow denotes mine-like echo (MILEC), dark green denotes non-mine mine-like object (or non-mine) and bright green denotes neutralized mine. An alternative icon set directly corresponding to MEDAL icons may also be used. The alternative set depicts the same MEDAL icons, but depicts them as black icons eliminating the color threat coding scheme. The MEDAL icons shall be used with unfilled sea subsurface frames. The alternative icons shall be used with the normal sea subsurface frames (see tables F-I, F-II and F-III). Figure F-4 shows examples of framed MEDAL and alternative icons. Table F-VII depicts mine warfare icons.

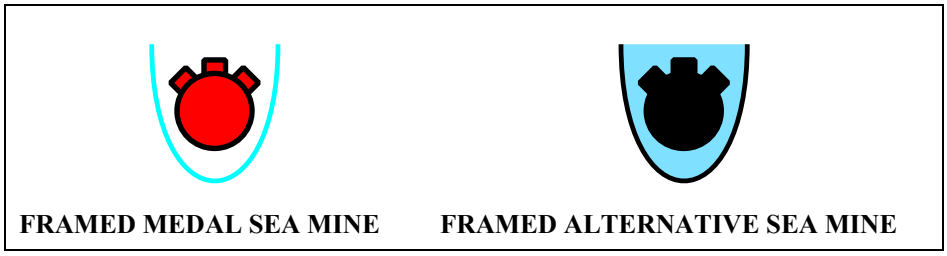











FIGURE F-4. Framing examples of MEDAL and alternative mine warfare icons.

TABLE F-VII. Mine warfare icons.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
SEA MINE, GENERAL Type: Entity Symbol Set Code: 36 Code: **11**0000 Icon Type: Full Octagon			N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
SEA MINE, BOTTOM Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**01**00 Icon Type: Full Octagon			N/A
SEA MINE, MOORED Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**02**00 Icon Type: Full Octagon			N/A
SEA MINE, FLOATING Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**03**00 Icon Type: Full Octagon			N/A
SEA MINE, RISING Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**04**00 Icon Type: Full Octagon			N/A
SEA MINE, OTHER POSITION Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**05**00 Icon Type: Full Octagon			N/A
KINGFISHER Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**06**00 Icon Type: Full Octagon	N/A		There is no MEDAL icon associated with this symbol.
SMALL OBJECT, MINE-LIKE Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**07**00 Icon Type: Full Octagon	N/A		There is no MEDAL icon associated with this symbol.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
EXERCISE MINE, GENERAL Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**08**00 Icon Type: Full Octagon			Used with exercise frame only.
EXERCISE MINE, BOTTOM Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/EXERCISE MINE, GENERAL Symbol Set Code: 36 Code: 1108**01** Icon Type: Full Octagon			Used with exercise frame only.
EXERCISE MINE, MOORED Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/EXERCISE MINE, GENERAL Symbol Set Code: 36 Code: 1108**02** Icon Type: Full Octagon			Used with exercise frame only.
EXERCISE MINE, FLOATING Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/EXERCISE MINE, GENERAL Symbol Set Code: 36 Code: 1108**03** Icon Type: Full Octagon			Used with exercise frame only.
EXERCISE MINE, RISING Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/EXERCISE MINE, GENERAL Symbol Set Code: 36 Code: 1108**04** Icon Type: Full Octagon			Used with exercise frame only.
NEUTRALIZED MINE, GENERAL Type: Entity Type Entity: SEA MINE, GENERAL Symbol Set Code: 36 Code: 11**09**00 Icon Type: Full Octagon			N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
NEUTRALIZED MINE, BOTTOM Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/NEUTRALIZED MINE, GENERAL Symbol Set Code: 36 Code: 110901 Icon Type: Full Octagon			N/A
NEUTRALIZED MINE, MOORED Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/NEUTRALIZED MINE, GENERAL Symbol Set Code: 36 Code: 110902			N/A
NEUTRALIZED MINE, FLOATING Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/NEUTRALIZED MINE, GENERAL Symbol Set Code: 36 Code: 110903 Icon Type: Full Octagon			N/A
NEUTRALIZED MINE, RISING Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/NEUTRALIZED MINE, GENERAL Symbol Set Code: 36 Code: 110904 Icon Type: Full Octagon			N/A
NEUTRALIZED MINE, OTHER POSITION Type: Entity Subtype Entity/Entity Type: SEA MINE, GENERAL/NEUTRALIZED MINE, GENERAL Symbol Set Code: 36 Code: 110905 Icon Type: Full Octagon			N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
UNEXPLODED ORDNANCE Type: Entity Symbol Set Code: 36 Code: **12**0000 Icon Type: Full Octagon			N/A
SEA MINE DECOY Type: Entity Symbol Set Code: 36 Code: **13**0000 Icon Type: Full Octagon			N/A
SEA MINE DECOY, BOTTOM Type: Entity Type Entity: SEA MINE DECOY Symbol Set Code: 36 Code: 13**01**00 Icon Type: Full Octagon			N/A
SEA MINE DECOY, MOORED Icon Type: Full Octagon Type: Entity Type Entity: SEA MINE DECOY Symbol Set Code: 36 Code: 13**02**00 Icon Type: Full Octagon			N/A
MINE-LIKE CONTACT (MILCO) Type: Entity Symbol Set Code: 36 Code: **14**0000	N/A	N/A	N/A
MILCO - GENERAL Type: Entity Type Entity: MILCO Symbol Set Code: 36 Code: 14**01**00 Icon Type: Full Octagon			N/A
MILCO - GENERAL, CONFIDENCE LEVEL 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-GENERAL Symbol Set Code: 36 Code: 1401**01** Icon Type: Full Octagon			N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
MILCO - GENERAL, CONFIDENCE LEVEL 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-GENERAL Symbol Set Code: 36 Code: 1401**02** Icon Type: Full Octagon			N/A
MILCO - GENERAL, CONFIDENCE LEVEL 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-GENERAL Symbol Set Code: 36 Code: 1401**03** Icon Type: Full Octagon			N/A
MILCO - GENERAL, CONFIDENCE LEVEL 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-GENERAL Symbol Set Code: 36 Code: 1401**04** Icon Type: Full Octagon			N/A
MILCO - GENERAL, CONFIDENCE LEVEL 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-GENERAL Symbol Set Code: 36 Code: 1401**05** Icon Type: Full Octagon			N/A
MILCO - BOTTOM Type: Entity Type Entity: MILCO Symbol Set Code: 36 Code: 14**02**00 Icon Type: Full Octagon			N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
MILCO - BOTTOM, CONFIDENCE LEVEL 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-BOTTOM Symbol Set Code: 36 Code: 140**201** Icon Type: Full Octagon			N/A
MILCO - BOTTOM, CONFIDENCE LEVEL 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-BOTTOM Symbol Set Code: 36 Code: 140**202** Icon Type: Full Octagon			N/A
MILCO - BOTTOM, CONFIDENCE LEVEL 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-BOTTOM Symbol Set Code: 36 Code: 140**203** Icon Type: Full Octagon			N/A
MILCO - BOTTOM, CONFIDENCE LEVEL 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-BOTTOM Symbol Set Code: 36 Code: 140**204** Icon Type: Full Octagon			N/A
MILCO - BOTTOM, CONFIDENCE LEVEL 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-BOTTOM Symbol Set Code: 36 Code: 140**205** Icon Type: Full Octagon			N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
MILCO - MOORED Type: Entity Type Entity: MILCO Symbol Set Code: 36 Code: 14**03**00 Icon Type: Full Octagon			N/A
MILCO - MOORED, CONFIDENCE LEVEL 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-MOORED Symbol Set Code: 36 Code: 1403**01** Icon Type: Full Octagon			N/A
MILCO - MOORED, CONFIDENCE LEVEL 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-MOORED Symbol Set Code: 36 Code: 1403**02** Icon Type: Full Octagon			N/A
MILCO - MOORED, CONFIDENCE LEVEL 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-MOORED Symbol Set Code: 36 Code: 1403**03** Icon Type: Full Octagon			N/A
MILCO - MOORED, CONFIDENCE LEVEL 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-MOORED Symbol Set Code: 36 Code: 1403**04** Icon Type: Full Octagon			N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
MILCO - MOORED, CONFIDENCE LEVEL 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-MOORED Symbol Set Code: 36 Code: 1403**05** Icon Type: Full Octagon			N/A
MILCO - FLOATING Type: Entity Type Entity: MILCO Symbol Set Code: 36 Code: 1**404**00 Icon Type: Full Octagon			N/A
MILCO - FLOATING, CONFIDENCE LEVEL 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-FLOATING Symbol Set Code: 36 Code: 1404**01** Icon Type: Full Octagon			N/A
MILCO - FLOATING, CONFIDENCE LEVEL 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-FLOATING Symbol Set Code: 36 Code: 1404**02** Icon Type: Full Octagon			N/A
MILCO - FLOATING, CONFIDENCE LEVEL 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-FLOATING Symbol Set Code: 36 Code: 1404**03** Icon Type: Full Octagon			N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
MILCO - FLOATING, CONFIDENCE LEVEL 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-FLOATING Symbol Set Code: 36 Code: 1404**04** Icon Type: Full Octagon			N/A
MILCO - FLOATING, CONFIDENCE LEVEL 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-FLOATING Symbol Set Code: 36 Code: 1404**05** Icon Type: Full Octagon			N/A
MINE-LIKE ECHO (MILEC), GENERAL Type: Entity Symbol Set Code: 36 Code: **15**0000 Icon Type: Full Octagon			N/A
MINE-LIKE ECHO, BOTTOM Type: Entity Type Entity: MINE-LIKE ECHO (MILEC), GENERAL Symbol Set Code: 36 Code: 15**01**00 Icon Type: Full Octagon			N/A
MINE-LIKE ECHO, MOORED Type: Entity Type Entity: MINE-LIKE ECHO (MILEC), GENERAL Symbol Set Code: 36 Code: 15**02**00 Icon Type: Full Octagon			N/A
MINE-LIKE ECHO, FLOATING Type: Entity Type Entity: MINE-LIKE ECHO (MILEC), GENERAL Symbol Set Code: 36 Code: 15**03**00 Icon Type: Full Octagon			N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
NEGATIVE REACQUISITION, GENERAL Type: Entity Symbol Set Code: 36 Code: **16**0000 Icon Type: Full Octagon			N/A
NEGATIVE REACQUISITION, BOTTOM Type: Entity Type Entity: NEGATIVE REACQUISITION, GENERAL Symbol Set Code: 36 Code: 16**01**00 Icon Type: Full Octagon			N/A
NEGATIVE REACQUISITION, MOORED Type: Entity Type Entity: NEGATIVE REACQUISITION, GENERAL Symbol Set Code: 36 Code: 16**02**00 Icon Type: Full Octagon			N/A
NEGATIVE REACQUISITION, FLOATING Type: Entity Type Entity: NEGATIVE REACQUISITION, GENERAL Symbol Set Code: 36 Code: 16**03**00 Icon Type: Full Octagon			N/A
OBSTRUCTOR Type: Entity Symbol Set Code: 36 Code: **17**0000 Icon Type: Full Octagon			N/A
NEUTRALIZED OBSTRUCTOR Type: Entity Type Entity: OBSTRUCTOR Symbol Set Code: 36 Code: 17**01**00 Icon Type: Full Octagon			N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
GENERAL MINE ANCHOR Type: Entity Symbol Set Code: 36 Code: **18**0000 Icon Type: Full Octagon			N/A
NON-MINE MINE-LIKE OBJECT (NMLO), GENERAL Type: Entity Symbol Set Code: 36 Code: **19**0000 Icon Type: Full Octagon			N/A
NON-MINE MINE-LIKE OBJECT, BOTTOM Type: Entity Type Entity: NON-MINE MINE-LIKE OBJECT (NMLO), GENERAL Symbol Set Code: 36 Code: 19**01**00 Icon Type: Full Octagon			N/A
NON-MINE MINE-LIKE OBJECT, MOORED Type: Entity Type Entity: NON-MINE MINE-LIKE OBJECT (NMLO), GENERAL Symbol Set Code: 36 Code: 19**02**00 Icon Type: Full Octagon			N/A
NON-MINE MINE-LIKE OBJECT, FLOATING Type: Entity Type Entity: NON-MINE MINE-LIKE OBJECT (NMLO), GENERAL Symbol Set Code: 36 Code: 19**03**00 Icon Type: Full Octagon			N/A
ENVIRONMENTAL REPORT LOCATION Type: Entity Symbol Set Code: 36 Code: **20**0000 Icon Type: Full Octagon			N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
DIVE REPORT LOCATION Type: Entity Symbol Set Code: 36 Code: **21**0000 Icon Type: Full Octagon			N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

ACTIVITIES SYMBOLS

G.1 SCOPE

G.1.1 Scope. In this appendix, activities across the range of military operations use various symbols to predominately show support. Activities include stability operations, defense support to civil authorities, foreign humanitarian assistance, incidents, natural events, and operations. Among the types of activities represented are acts of terrorism, sabotage, crime, natural disasters, relief operations, and the uncontrolled movement of large numbers of people. The tables in this appendix present the icons and modifiers used for support stability operations, defense support to civil authorities, and foreign humanitarian assistance. Many of these icons represent emergency first response events used in a civilian community. This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

G.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

G.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

G.4 GENERAL REQUIREMENTS

G.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and supports activities symbology.

G.5 DETAILED REQUIREMENTS

G.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

G.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

G.5.3 Composition of activities symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Table G-I shows an example of an activities symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

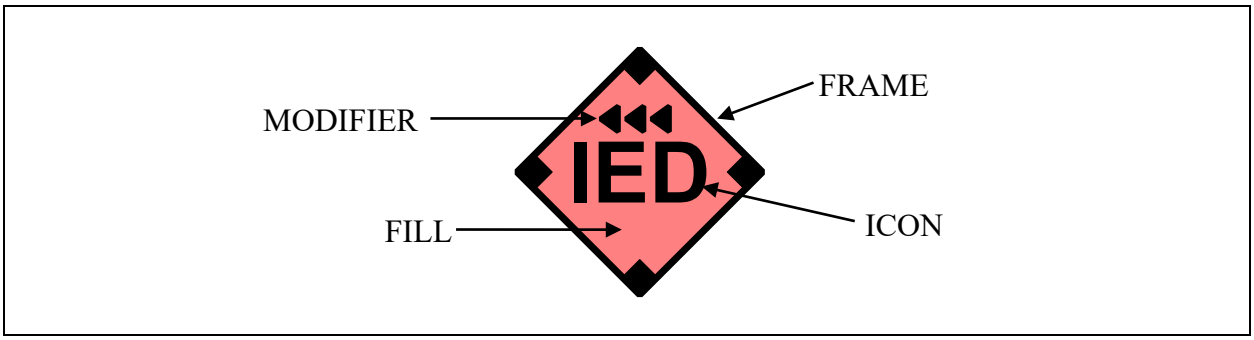



FIGURE G-1. Activities components.

G.5.3.1 Symbol building process. Table G-I depicts the symbol building process for activities symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon. Activities symbols use the land frames for units, equipment and installations, as well as the activity/event frames for incidents.

TABLE G-I. Activities symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity of the object from the activity/event column in tables I, II, or III. In this example, the standard identity is hostile. The example depicts a “hostile incident.”	
2.	Choose an icon for the symbol. In this example, the icon is “IED,” an equipment entity subtype. The example depicts a “hostile IED incident.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “hoax,” a sector 1 modifier. The example depicts “hostile IED hoax incident.” Note: There are no sector 2 modifiers in activities symbols.	
4.	The finished symbol will appear as shown in the example.	

G.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table G-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table G-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

G.5.3.3 Amplifiers.

G.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure G-2 shows the placement of activities symbol amplifiers around the friend symbol frame. Table G-II provides descriptions and formats of each amplifier.

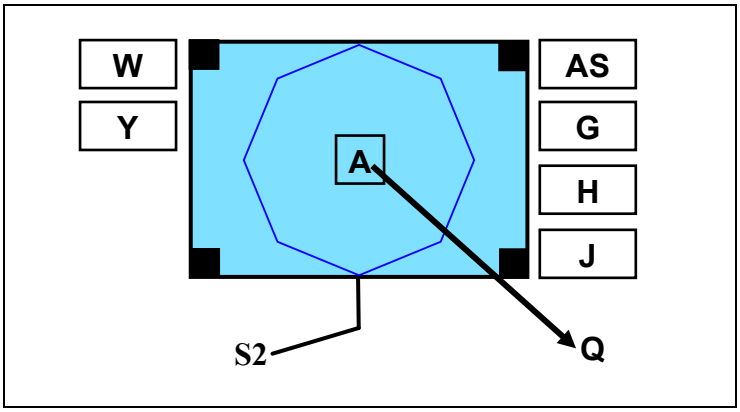


FIGURE G-2. Placement of activities symbol amplifiers.

TABLE G-II. Description and formats of activities symbol amplifiers.

Field	Field Title	Description	Text/Graphic
A	Symbol	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	Either
G	Staff Comments	Free text. Can be used by staff for information required by commander.	Text
H	Additional Information	Free text.	Text

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-II. Description and formats of activities symbol amplifiers - Continued.

Field	Field Title	Description	Text/Graphic
J	Evaluation Rating	Degree of confidence that may be placed on the information represented by the symbol. It is shown as one letter and one number made up of Reliability of Source and Credibility of Information. (STANAG 2511). Reliability of Source: A. Completely reliable B. Usually reliable C. Fairly reliable D. Not usually reliable E. Unreliable F. Reliability cannot be judged. Credibility of Information: 1. Confirmed by other sources 2. Probably true 3. Possibly true 4. Doubtful 5. Improbable 6. Truth cannot be judged.	Text
Q	Direction of Movement Indicator	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.8 and figure 13 in the base document).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	Graphic
W	Date-Time Group	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYY) or “O/O” for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by two digits. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. The last two digits of the year are after the month. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds.	Text
Y	Location	A text amplifier for units, equipment and installations that displays a symbol’s location in degrees, minutes, and decimal minutes (or in MGRS, GARS, or other applicable display formats).	Text
AS	Country Indicator	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC). In stability activities, this field can be used for factions or groups.	Text

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.


G.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

G.5.3.3.3 ACTIVITIES SYMBOLS

G.5.4 Activities symbols. This section includes the lists of icons and modifiers for building activities symbols.




G.5.5 Activities icons. Table G-III depicts activities icons.

TABLE G-III. Activities icons.

DESCRIPTION	ICON	REMARKS
INCIDENT Type: Entity Symbol Set Code: 40 Code: **11**0000	N/A	Reserved for hierarchical purposes.
CRIMINAL ACTIVITY INCIDENT Type: Entity Type Entity: INCIDENT Symbol Set Code: 40 Code: 11**01**00 Icon Type: Full Octagon		N/A
ARREST Type: Entity Subtype Entity: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**01** Icon Type: Full Octagon		N/A
ARSON Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**02** Icon Type: Full Octagon		N/A
ATTEMPTED CRIMINAL ACTIVITY Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**03** Icon Type: Main		APP-6C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
DRIVE-BY SHOOTING Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**04** Icon Type: Full Octagon		N/A
DRUG RELATED Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**05** Icon Type: Main		APP-6C
EXTORTION Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**06** Icon Type: Full Octagon		N/A
GRAFFITI Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**07** Icon Type: Full Octagon		N/A
KILLING Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**08** Icon Type: Main		N/A
POISONING Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 1101**09** Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
CIVIL RIOTING Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110110 Icon Type: Main		N/A
BOOBY TRAP Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110111 Icon Type: Full Octagon		N/A
HOME EVICTION Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110112 Icon Type: Full Octagon		N/A
BLACK MARKETING Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110113 Icon Type: Full Octagon		N/A
VANDALISM / LOOT / RANSACK / PLUNDER Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110114 Icon Type: Full Octagon		N/A
JAIL BREAK Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110115 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
ROBBERY Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110116 Icon Type: Main		N/A
THEFT Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110117 Icon Type: Main		N/A
BURGLARY Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110118 Icon Type: Main		N/A
SMUGGLING Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110119 Icon Type: Main		N/A
ROCK THROWING Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110120 Icon Type: Full Octagon		N/A
DEAD BODY Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110121 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
SABOTAGE Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Code: 110122 Icon Type: Main		N/A
SUSPICIOUS ACTIVITY Type: Entity Subtype Entity/Entity Type: INCIDENT/ CRIMINAL ACTIVITY INCIDENT Symbol Set Code: 40 Code: 110123 Icon Type: Full Octagon		N/A
BOMB/BOMBING Type: Entity Type Entity: INCIDENT Symbol Set Code: 40 Code: 110200 Icon Type: Main		N/A
BOMB THREAT Type: Entity Subtype Entity/Entity Type: INCIDENT/BOMB/BOMBING Symbol Set Code: 40 Code: 110201 Icon Type: Full Octagon		N/A
IED EVENT Type: Entity Type Entity: INCIDENT Symbol Set Code: 40 Code: 110300 Icon Type: Main		N/A
IED EXPLOSION Type: Entity Subtype Entity/Entity Type: INCIDENT/IED EVENT Symbol Set Code: 40 Code: 110301 Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
PREMATURE IED EXPLOSION Type: Entity Subtype Entity/Entity Type: INCIDENT/IED EVENT Symbol Set Code: 40 Code: 1103**02** Icon Type: Full Octagon		N/A
IED CACHE Type: Entity Subtype Entity/Entity Type: INCIDENT/IED EVENT Symbol Set Code: 40 Code: 1103**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
IED SUICIDE BOMBER Type: Entity Subtype Entity/Entity Type: INCIDENT/IED EVENT Symbol Set Code: 40 Code: 1103**04** Icon Type: Full Octagon		N/A
SHOOTING Type: Entity Type Entity: INCIDENT Symbol Set Code: 40 Code: 11**04**00 Icon Type: Full Octagon		N/A
SNIPING Type: Entity Subtype Entity/Entity Type: INCIDENT/SHOOTING Symbol Set Code: 40 Code: 1104**01** Icon Type: Full Octagon		N/A
ILLEGAL DRUG OPERATION Type: Entity Type Entity: INCIDENT Symbol Set Code: 40 Code: 11**05**00 Icon Type: Main		N/A
TRAFFICKING Type: Entity Subtype Entity/Entity Type: INCIDENT/ILLEGAL DRUG OPERATION Symbol Set Code: 40 Code: 1105**01** Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
ILLEGAL DRUG LAB Type: Entity Subtype Entity/Entity Type: INCIDENT/ILLEGAL DRUG OPERATION Symbol Set Code: 40 Code: 1105**02** Icon Type: Full Octagon		N/A
EXPLOSION Type: Entity Type Entity: INCIDENT Symbol Set Code: 40 Code: 11**06**00 Icon Type: Full Octagon		N/A
GRENADE EXPLOSION Type: Entity Subtype Entity: INCIDENT/EXPLOSION Symbol Set Code: 40 Code: 1106**01** Icon Type: Full Octagon		N/A
INCENDIARY EXPLOSION Type: Entity Subtype Entity: INCIDENT/EXPLOSION Symbol Set Code: 40 Code: 1106**02** Icon Type: Full Octagon		N/A
MINE EXPLOSION Type: Entity Subtype Entity: INCIDENT/EXPLOSION Symbol Set Code: 40 Code: 1106**03** Icon Type: Full Octagon		N/A
MORTAR FIRE EXPLOSION Type: Entity Subtype Entity: INCIDENT/EXPLOSION Symbol Set Code: 40 Code: 1106**04** Icon Type: Full Octagon		N/A
ROCKET EXPLOSION Type: Entity Subtype Entity: INCIDENT/EXPLOSION Symbol Set Code: 40 Code: 1106**05** Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
BOMB EXPLOSION Type: Entity Subtype Entity: INCIDENT/EXPLOSION Symbol Set Code: 40 Code: 110**06** Icon Type: Full Octagon		N/A
CIVIL DISTURBANCE Type: Entity Symbol Set Code: 40 Code: **12**0000 Icon Type: Full Octagon		
DEMONSTRATION Type: Entity Type Entity/Entity Type: CIVIL DISTURBANCE Symbol Set Code: 40 Code: 12**01**00 Icon Type: Main		N/A
OPERATION Type: Entity Symbol Set Code: 40 Code: **13**0000	N/A	Reserved for hierarchical purposes.
PATROLLING Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**01**00 Icon Type: Full Octagon		N/A
MILITARY INFORMATION SUPPORT OPERATION (MISO) Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**02**00 Icon Type: Full Octagon		N/A
TV AND RADIO PROPAGANDA Type: Entity Subtype Entity/Entity Type: OPERATION/MISO OPERATION Symbol Set Code: 40 Code: 1302**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
FORAGING/SEARCHING Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**03**00 Icon Type: Full Octagon		N/A
RECRUITMENT Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**04**00	N/A	Reserved for hierarchical purposes.
WILLING Type: Entity Subtype Entity/Entity Type: OPERATION/RECRUITMENT Symbol Set Code: 40 Code: 1304**01** Icon Type: Full Octagon		N/A
UNWILLING/COERCED Type: Entity Subtype Entity/Entity Type: OPERATION/RECRUITMENT Symbol Set Code: 40 Code: 1304**02** Icon Type: Full Octagon		N/A
MINE LAYING Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**05**00 Icon Type: Main		N/A
SPY Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**06**00 Icon Type: Main		N/A
WARRANT SERVED Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**07**00 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
EXFILTRATION Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**08**00 Icon Type: Full Octagon		N/A
INFILTRATION Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**09**00 Icon Type: Full Octagon		N/A
MEETING Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**10**00 Icon Type: Full Octagon		N/A
POLLING PLACE/ELECTION Type: Entity Type Entity: OPERATION/MEETING Symbol Set Code: 40 Code: 1310**01** Icon Type: Main		N/A
RAID ON HOUSE Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**11**00 Icon Type: Full Octagon		N/A
EMERGENCY OPERATION Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**12**00 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
EMERGENCY COLLECTION EVACUATION POINT Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY OPERATION Symbol Set Code: 40 Code: 131**201** Icon Type: Full Octagon		N/A
EMERGENCY FOOD DISTRIBUTION Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 131**202** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
EMERGENCY INCIDENT COMMAND CENTER Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY OPERATION Symbol Set Code: 40 Code: 131**203** Icon Type: Full Octagon		N/A
EMERGENCY OPERATIONS CENTER Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY OPERATION Symbol Set Code: 40 Code: 131**204** Icon Type: Full Octagon		N/A
EMERGENCY PUBLIC INFORMATION CENTER Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY OPERATION Symbol Set Code: 40 Code: 131**205** Icon Type: Full Octagon		N/A
EMERGENCY SHELTER Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY OPERATION Symbol Set Code: 40 Code: 131**206** Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
EMERGENCY STAGING AREA Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY OPERATION Symbol Set Code: 40 Code: 1312**07** Icon Type: Full Octagon		N/A
EMERGENCY WATER DISTRIBUTION CENTER Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY OPERATION Symbol Set Code: 40 Code: 1312**08** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
EMERGENCY MEDICAL OPERATIONS Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**13**00 Icon Type: Full Octagon		N/A
EMT STATION LOCATION Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY MEDICAL OPERATION Symbol Set Code: 40 Code: 1313**01** Icon Type: Full Octagon		N/A
HEALTH DEPARTMENT FACILITY Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY MEDICAL OPERATION Symbol Set Code: 40 Code: 1313**02** Icon Type: Full Octagon		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
MEDICAL FACILITIES OUTPATIENT Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY MEDICAL OPERATION Symbol Set Code: 40 Code: 1313**03** Icon Type: Full Octagon		N/A
MORGUE Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY MEDICAL OPERATION Symbol Set Code: 40 Code: 1313**04** Icon Type: Full Octagon		N/A
PHARMACY Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY MEDICAL OPERATION Symbol Set Code: 40 Code: 1313**05** Icon Type: Full Octagon		N/A
TRIAGE Type: Entity Subtype Entity/Entity Type: OPERATION/EMERGENCY MEDICAL OPERATION Symbol Set Code: 40 Code: 1313**06** Icon Type: Full Octagon		N/A
FIRE FIGHTING OPERATION Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**14**00 Icon Type: Main		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
FIRE HYDRANT Type: Entity Subtype Entity/Entity Type: OPERATION/ FIRE FIGHTING OPERATION Symbol Set Code: 40 Code: 1314**01** Icon Type: Full Octagon		N/A
FIRE STATION Type: Entity Subtype Entity/Entity Type: OPERATION/ FIRE FIGHTING OPERATION Symbol Set Code: 40 Code: 1314**02** Icon Type: Full Octagon		N/A
OTHER WATER SUPPLY LOCATION Type: Entity Type Entity/Entity Type: OPERATION/ FIRE FIGHTING OPERATION Symbol Set Code: 40 Code: 1314**03** Icon Type: Full Octagon		N/A
LAW ENFORCEMENT OPERATION Type: Entity Type Entity: OPERATION Symbol Set Code: 40 Code: 13**15**00 Icon Type: Full Octagon		N/A
BUREAU OF ALCOHOL, TOBACCO, FIREARMS AND EXPLOSIVES (ATF) (DEPARTMENT OF JUSTICE) Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 1315**01** Icon Type: Main		N/A
BORDER PATROL Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 1315**02** Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
CUSTOMS SERVICE Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131503 Icon Type: Full Octagon		N/A
DRUG ENFORCEMENT ADMINISTRATION (DEA) Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131504 Icon Type: Main		N/A
DEPARTMENT OF JUSTICE (DOJ) Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131505 Icon Type: Full Octagon		N/A
FEDERAL BUREAU OF INVETIGATION (FBI) Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131506 Icon Type: Main		N/A
POLICE Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131507 Icon Type: Main		N/A
PRISON Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131508 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
UNITED STATES SECRET SERVICE(TREAS) (USSS) Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131**509** Icon Type: Main		N/A
TRANSPORATION SECURITY ADMINISTRATION (TSA) Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131**510** Icon Type: Main		N/A
COAST GUARD Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131**511** Icon Type: Full Octagon		N/A
US MARSHALS SERVICE Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131**512** Icon Type: Full Octagon		N/A
INTERNAL SECURITY FORCE Type: Entity Subtype Entity/Entity Type: OPERATION/LAW ENFORCEMENT OPERATION Symbol Set Code: 40 Code: 131**513** Icon Type: Main		N/A
FIRE EVENT Type: Entity Symbol Set Code: 40 Code: **140**000 Icon Type: Full Octagon		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
FIRE ORIGIN Type: Entity Type Entity/Entity Type: FIRE EVENT Symbol Set Code: 40 Code: 14**01**00 Icon Type: Full Octagon		N/A
SMOKE Type: Entity Type Entity/Entity Type: FIRE EVENT Symbol Set Code: 40 Code: 14**02**00 Icon Type: Full Octagon		N/A
HOT SPOT Type: Entity Type Entity/Entity Type: FIRE EVENT Symbol Set Code: 40 Code: 14**03**00 Icon Type: Full Octagon		N/A
NON-RESIDENTIAL FIRE Type: Entity Type Entity/Entity Type: FIRE EVENT Symbol Set Code: 40 Code: 14**04**00 Icon Type: Full Octagon		N/A
RESIDENTIAL FIRE Type: Entity Type Entity/Entity Type: FIRE EVENT Symbol Set Code: 40 Code: 14**05**00 Icon Type: Full Octagon		N/A
SCHOOL FIRE Type: Entity Type Entity/Entity Type: FIRE EVENT Symbol Set Code: 40 Code: 14**06**00 Icon Type: Full Octagon		N/A
SPECIAL NEEDS FIRE Type: Entity Type Entity/Entity Type: FIRE EVENT Symbol Set Code: 40 Code: 14**07**00 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
WILD FIRE Type: Entity Subtype Entity/Entity Type: INCIDENT/FIRE EVENT Symbol Set Code: 40 Code: 14**08**00 Icon Type: Full Octagon		N/A
HAZARDOUS MATERIALS Type: Entity Symbol Set Code: 40 Code: **15**0000	N/A	Reserved for hierarchical purposes.
HAZARDOUS MATERIALS INCIDENT Type: Entity Type Entity: INCIDENT Symbol Set Code: 40 Code: 15**01**00 Icon Type: Full Octagon		N/A
CHEMICAL AGENT Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150101 Icon Type: Full Octagon		N/A
CORROSIVE MATERIAL Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150102 Icon Type: Full Octagon		N/A
HAZARDOUS WHEN WET Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150103 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
EXPLOSIVE MATERIAL Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150104 Icon Type: Full Octagon		N/A
FLAMMABLE GAS Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150105 Icon Type: Full Octagon		N/A
FLAMMABLE LIQUID Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150106 Icon Type: Full Octagon		N/A
FLAMMABLE SOLID Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150107 Icon Type: Full Octagon		N/A
NON-FLAMMABLE GAS Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150108 Icon Type: Full Octagon		N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
ORGANIC PEROXIDE Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150109 Icon Type: Full Octagon		N/A
OXIDIZER Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150110 Icon Type: Full Octagon		N/A
RADIOACTIVE MATERIAL Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150111 Icon Type: Full Octagon		N/A
SPONTANEOUSLY COMBUSTIBLE MATERIAL Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150112 Icon Type: Full Octagon		N/A
TOXIC GAS Type: Entity Subtype Entity/Entity Type: HAZARDOUS MATERIALS /HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150113 Icon Type: Full Octagon		N/A




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
TOXIC INFECTIOUS MATERIAL Type: Entity Subtype Entity/Entity Type: INCIDENT/HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150114 Icon Type: Full Octagon		N/A
UNEXPLODED ORDNANCE Type: Entity Subtype Entity/Entity Type: INCIDENT/HAZARDOUS MATERIALS INCIDENT Symbol Set Code: 40 Code: 150115 Icon Type: Full Octagon		N/A
TRANSPORTATION INCIDENT Type: Entity Symbol Set Code: 40 Code: 160000 Icon Type: Full Octagon		Reserved for hierarchical purposes.
AIR Type: Entity Type Entity: TRANSPORTATION INCIDENT Symbol Set Code: 40 Code: 160100 Icon Type: Main		N/A
MARINE Type: Entity Type Entity: TRANSPORTATION INCIDENT Symbol Set Code: 40 Code: 160200 Icon Type: Main		N/A
RAIL Type: Entity Type Entity: TRANSPORTATION INCIDENT Symbol Set Code: 40 Code: 160300 Icon Type: Main		N/A
VEHICLE Type: Entity Type Entity: TRANSPORTATION INCIDENT Symbol Set Code: 40 Code: 160400 Icon Type: Main		N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
WHEELED VEHICLE EXPLOSION Type: Entity Type Entity: TRANSPORTATION INCIDENT Symbol Set Code: 40 Code: 16**05**00 Icon Type: Full Octagon		N/A
NATURAL EVENT Type: Entity Symbol Set Code: 40 Code: **17**0000 Icon Type: Main		Reserved for hierarchical purposes.
GEOLOGIC Type: Entity Type Entity: NATURAL EVENT Symbol Set Code: 40 Code: 17**01**00 Icon Type: Main		Reserved for hierarchical purposes.
AFTERSHOCK Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170101 Icon Type: Full Octagon		N/A
AVALANCHE Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170102 Icon Type: Full Octagon		N/A
EARTHQUAKE EPICENTER Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170103 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
LANDSLIDE Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170104 Icon Type: Full Octagon		N/A
SUBSIDENCE Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170105 Icon Type: Full Octagon		N/A
VOLCANIC ERUPTION Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170106 Icon Type: Full Octagon		N/A
VOLCANIC THREAT Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170107 Icon Type: Full Octagon		N/A
CAVE ENTRANCE Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/GEOLOGIC Symbol Set Code: 40 Code: 170108 Icon Type: Full Octagon		N/A
HYDRO-METEOROLOGICAL Type: Entity Type Entity: NATURAL EVENT Symbol Set Code: 40 Code: 170200 Icon Type: Main		Reserved for hierarchical purposes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
DROUGHT Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/HYDRO-METEOROLOGICAL Symbol Set Code: 40 Code: 170201 Icon Type: Full Octagon		N/A
FLOOD Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/HYDRO-METEOROLOGICAL Symbol Set Code: 40 Code: 170202 Icon Type: Full Octagon		N/A
TSUNAMI Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/HYDRO-METEOROLOGICAL Symbol Set Code: 40 Code: 170203 Icon Type: Full Octagon		N/A
INFESTATION Type: Entity Type Entity: NATURAL EVENT Symbol Set Code: 40 Code: 170300 Icon Type: Main		Reserved for hierarchical purposes.
BIRD Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/INFESTATION Symbol Set Code: 40 Code: 170301 Icon Type: Full Octagon		N/A
INSECT Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/INFESTATION Symbol Set Code: 40 Code: 170302 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.









TABLE G-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
MICROBIAL Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/INFESTATION Symbol Set Code: 40 Code: 170**03** Icon Type: Full Octagon		N/A
REPTILE Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/INFESTATION Symbol Set Code: 40 Code: 170**04** Icon Type: Full Octagon		N/A
RODENT Type: Entity Subtype Entity/Entity Type: NATURAL EVENT/INFESTATION Symbol Set Code: 40 Code: 170**05** Icon Type: Full Octagon		N/A
INDIVIDUAL Type: Entity Symbol Set Code: 40 Code: **18**0000	N/A	Reserved for hierarchical purposes.
RELIGIOUS LEADER Type: Entity Type Entity: INDIVIDUAL Symbol Set Code: 40 Code: 18**01**00 Icon Type: Full Octagon		N/A
SPEAKER Type: Entity Type Entity: INDIVIDUAL Symbol Set Code: 40 Code: 18**02**00 Icon Type: Full Octagon		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.









G.5.6 Activities sector 1 modifiers. Activities sector 1 modifiers denote crime, military information support operations, IED and incident qualifier categories. Table G-IV lists activities sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE G-IV. Activities sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ASSASSINATION Symbol Set Code: 40 Code: 01	CRIME		N/A
EXECUTION (WRONGFUL KILLING) Symbol Set Code: 40 Code: 02	CRIME		N/A
HIJACKING/HIJACKED Symbol Set Code: 40 Code: 03	CRIME		N/A
HOUSE-TO-HOUSE Symbol Set Code: 40 Code: 04	MILITARY INFORMATION SUPPORT OPERATIONS		N/A
KIDNAPPING Symbol Set Code: 40 Code: 05	CRIME		N/A
MURDER Symbol Set Code: 40 Code: 06	CRIME		N/A
PIRACY Symbol Set Code: 40 Code: 07	CRIME		N/A
RAPE Symbol Set Code: 40 Code: 08	CRIME		N/A





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-IV. Activities sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
WRITTEN MILITARY INFORMATION SUPPORT OPERATIONS Symbol Set Code: 40 Code: 09	MILITARY INFORMATION SUPPORT OPERATIONS		N/A
PIRATE Symbol Set Code: 40 Code: 10	CRIME		N/A
FALSE Symbol Set Code: 40 Code: 11	IED CATEGORY		N/A
FIND Symbol Set Code: 40 Code: 12	IED CATEGORY		N/A
FOUND AND CLEARED Symbol Set Code: 40 Code: 13	IED CATEGORY		N/A
HOAX (DECOY) Symbol Set Code: 40 Code: 14	IED CATEGORY		N/A
ATTEMPTED Symbol Set Code: 40 Code: 15	INCIDENT QUALIFIER		N/A
ACCIDENT Symbol Set Code: 40 Code: 16	INCIDENT QUALIFIER		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-IV. Activities sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
INCIDENT Symbol Set Code: 40 Code: 17	INCIDENT QUALIFIER		N/A
THEFT Symbol Set Code: 40 Code: 18	CRIME		N/A
HIJACKER Symbol Set Code: 40 Code: 19	CRIME		N/A
CYBERSPACE Symbol Set Code: 40 Code: 20	CAPABILITY		N/A

G.5.7 Activities sector 2 modifiers. Activities sector 2 modifiers denote capability category. Table G-V lists the activities sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE G-V. Activities sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CYBERSPACE Symbol Set Code: 40 Code: 01	CAPABILITY		N/A
SECURITY FORCE ASSISTANCE Symbol Set Code: 40 Code: 02	CAPABILITY		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CONTROL MEASURE SYMBOLS

H.1 SCOPE

H.1.1 Scope. This appendix addresses symbols that support control measures as well as symbols for chemical, biological, radiological and nuclear (CBRN) incidents in the C2 domain. The tables in this appendix present the icons and amplifiers for control measures and CBRN. This appendix is a mandatory part of the standard. The information contained herein is intended for compliance. Ultimately, the joint force commander and his forces must be capable of accomplishing their mission, either directly or indirectly, by the employment of capabilities to create physical or psychological effects and be able to sustain such operations for as long as is necessary to achieve operational objectives. The principal method by which this capability is delivered is through the combination of joint operational capabilities and a range of mechanisms and control measures. This appendix establishes a standard system for the development and use of control measures symbols. Within this standard system there are series of control measure symbols that follow standard formats and there are control measure symbols that follow stand-alone formats. This appendix provides rules for automated and hand-drawn symbols and examples for all control measure symbols. These control measure symbols are the standard for all command and control systems and simulations, including those used in live, virtual and planning. For many control measure symbols, there is a corresponding definition provided in this section. These definitions are provided to help add clarity in using these symbols. For ease of understanding and use the control measure symbols have been broken down into groups that correspond to the joint functions of command and control to include joint targeting, maneuver and fires, intelligence, force protection, sustainment and deception under information operations.

H.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

H.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

H.4 GENERAL REQUIREMENTS

H.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and control measures symbology.

H.5 DETAILED REQUIREMENTS

H.5.1 Control measure symbols. Control measures are directives given to assign responsibilities, coordinate fires and maneuvers and control operations. They may be boundaries, special area designations and other unique markings related to operational environment geometry and necessary for planning and management of operations. Control measure symbols provide operational information that cannot be displayed via icon-based symbols alone. Control measures can be displayed as points, lines, areas, or tactical mission tasks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.1.1 Composition of control measure symbols. Control measure symbols can be combined with other symbols, icons and amplifiers to display operational information (see figure H-1). They do not follow the same building rules as the icon-based symbols but shall be built in accordance with the rules specified in the control measure appendix.

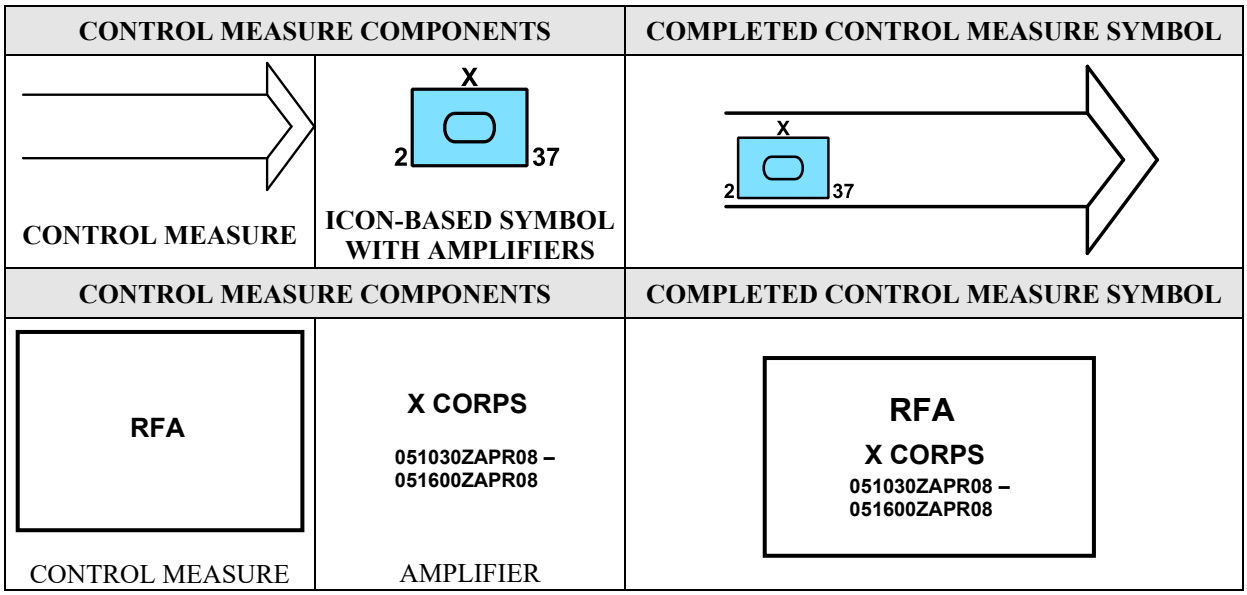


FIGURE H-1. Composition of control measure symbols.






H.5.1.1.1 Standard identity (color rules) for control measure symbols. The control measure symbols for monochrome systems shall be black or white, depending on display background. For color systems, control measures shall be black, blue (friendly), red (hostile), green (neutral or obstacles), or yellow (unknown or chemical, biological, radiological and nuclear hatched contaminated area fill). If red is not available for hostile standard identity, the graphic shall be drawn in black with the abbreviation "ENY" placed on the graphic in at least two places for linear and multi point control measures and in one place for single point control measures.

H.5.1.1.2 Point control measure height. Unless specifically indicated otherwise in the size/shape parameter of a point control measure's notes, the default point control measure symbol height should be 1L, where L is the default length and height of the bounding octagon (see 5.3.1).

H.5.1.1.3 Status. Status refers to whether a control measure exists at the location identified (status is "present") or will in the future reside at that location (status is "planned", "anticipated", "suspected", or "on order"). If a control measure is on order, the status code shall be specified "A – Anticipated/Planned" and field amplifier "W" shall be present and specified "O/O". In general, linear control measures (including boundary lines) and area control measures shall be a solid line when indicating present status and a dashed line when indicating anticipated or planned status, as depicted in table H-I. There are certain control measures such as counterattack which are drawn in the "present'" status with dashed lines. The codes for status in the SIDC are provided in the appendix for each symbology set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-I. Present and planned status for control measures symbols.

	POINT GRAPHICS	BOUNDARY LINE GRAPHICS	AREA GRAPHICS
PRESENT POSITION (P)			
ANTICIPATED, PLANNED, SUSPECTED, OR ON ORDER (A)			

H.5.1.1.4 Amplifiers. An amplifier provides optional additional information about a tactical symbol. The field ID, field title, description and maximum allowable display lengths of tactical symbol amplifiers are presented in table H-II. An example of each amplifier (both text and graphic indicators) is included in figure H-2.The default placement of amplifiers in fields for boundary lines, points, and areas are shown in figures H-8, H-12, H-13 and H-14, respectively. An example of chemical, biological, radiological and nuclear (CBRN) events can be seen in table H-XXI. As indicated in figures H-8, H-12, H-13 and H-14, certain fields can be displayed more than once within a tactical symbol. In some cases, a tactical symbol may require multiple instances of a given amplifier in order to fully create or represent an object: examples of these fields are H, T, W and Y. The unnumbered fields shall be filled before the numbered fields (i.e., fields W, H and T shall be used before fields W1, H1 and T1). As indicated in table II, not all amplifiers are applicable to all tactical symbols. However, when any such amplifier is displayed, it shall be defined in accordance with the contents of this table and positioned in accordance with figures H-2, H-8, H-12, H-13 and H-14.

TABLE H-II. Amplifier descriptions and maximum lengths for control measure symbols.

FIELD ID	FIELD TITLE	DESCRIPTION	P[1]	L[1]	A[1]	BL[1]	B/C[1]	R/N[1]
B	Echelon	A graphic amplifier in a unit symbol that identifies command level (see tables D-III and D-V in the Land appendix and figure H-8 and figure H-14).	-	G	G	G	-	-
C	Quantity	A text amplifier in an equipment symbol that identifies the number of items present.	-	-	-	-	-	6[2]
H	Additional Information	A text amplifier for control measure symbols; content is implementation specific.	20	20	20	-	20	20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-II. Amplifier descriptions and maximum lengths for control measure symbols - Continued.

FIELD ID	FIELD TITLE	DESCRIPTION	P[1]	L[1]	A[1]	BL[1]	B/C[1]	R/N[1]
N	Hostile (Enemy)	A text amplifier for control measure symbols; the letters "ENY" denote hostile control measure symbols.	3	3	3	3	3	3
Q	Direction of Movement Indicator	A graphic amplifier for events that identifies the direction of movement (see H.5.1.1.5 and figure H-2).	-	-	-	-	G	G
S2	Offset/Precise Location Indicator	A graphic amplifier A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, figure 13, H.5.1.1.7 and figures H-2, H-8, H-12, H-13, H-14).	G	-	-	-	G	G
T	Unique Designation	A text amplifier that uniquely identifies a particular control measure symbol. **Nuclear:** delivery unit (missile, aircraft, satellite, etc.)	30	30	30	30	30	30
V	Type	A text amplifier for equipment that indicates types of equipment or nuclear weapon type.	20	20	20		20	20
W[3]	Date/Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or “O/O” for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. The last four digits after the month are the year. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds.	16	16	16	-	16	16
X	Altitude / Depth	A text amplifier that displays the minimum, maximum and/or specific altitude (in feet or meters in relation to a reference datum), flight level, or depth (for submerged objects in feet below sea level). See H.5.1.1.9 for content.	14	14	14	-	14	14
Y	Location	A text amplifier that displays a graphic’s location in degrees, minutes and seconds (or in UTM or other applicable display format).	22	22	22	22	22	22
AM	Distance	A numeric amplifier that displays a minimum, maximum, or a specific distance (range, radius, width, length, etc.), in meters.	7	7	7	-	-	-
AN	Azimuth	A numeric amplifier that displays an angle measured from true north to any other line in degrees.	3	3	3	-	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-II. Amplifier descriptions and maximum lengths for control measure symbols - Continued.

FIELD ID	FIELD TITLE	DESCRIPTION	P[1]	L[1]	A[1]	BL[1]	B/C[1]	R/N[1]
AP	Target Number	A six character text modifier used in Fire Support operations to uniquely designate targets in accordance with STANAG 2147, where characters 1 and 2 are alphabetic, and characters 3-6 are numeric: AANNNN.	6	6	6	-	-	-
AP1	Target Extension Number	A 2-3 character text amplifier. A target number extension is a sequentially assigned number identifying the individual elements in a target (MIL-STD-6017), where character 1 is a dash (-) and characters 2-3 are number, from 1 through 15. It is applicable only to the "Point or Single Target" symbol, is conditional upon the presence of the Target Number amplifier, and is visually displayed appended to the Target Number amplifier.	3	-	-	-	-	-
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall us GENC).	-	3	-	3	-	-

Notes: 1. Column headings: P = points, L = lines, A = areas, BL = boundary lines, R/N = radiological/nuclear, B/C = biological/chemical.
2. Numeric entry indicates text amplifier. "G" indicates graphic amplifier. A dash (-) inside boxes indicates non-applicable.
3. Field W: D = day, H = hour, M = minute, S = second, Z = time zone suffix, MON = month and Y = year.

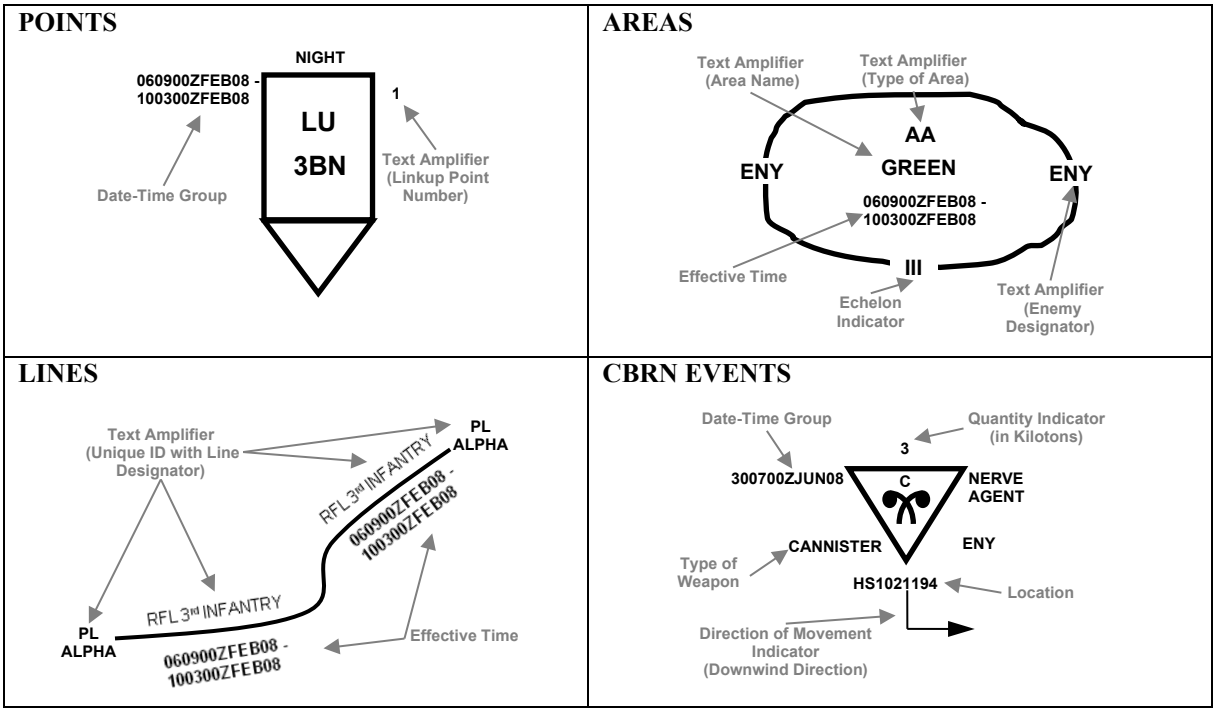


FIGURE H-2. Graphic amplifiers for control measure symbols.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.1.1.5 Direction of movement indicator. The direction of movement indicator is an arrow identifying the direction of movement of events. The arrow extends downward from the center of the icon and points in the direction of movement. The indicator is represented in field Q as defined in table H-II and positioned as shown in figure 13.

H.5.1.1.6 Echelon indicator. The echelon indicator provides a graphic representation of command level and is used to show the element echelon on boundary lines, lines and areas. Echelon indicator codes are listed in table D-III of the land appendix. The indicator is represented in field B as defined in table H-II and positioned as shown in figure H-2 and figure H-14.

H.5.1.1.7 Offset location indicator. The offset location indicator is used when placing an object away from its actual location. The indicator is a line extending downward from an appropriate anchor point on an icon. The actual location (field Y) is given in latitude and longitude. The indicator is represented in field **S** in table H-II and positioned as shown in figures H-2, H-8, H-12, H-13, H-14 and table H-XX.

H.5.1.1.8 Text amplifier. Table H-II defines the specific content, length and type of each text amplifier. Additional information is contained in field H, with the content of this field being implementation specific, provided the maximum number of characters in each field is not exceeded.

H.5.1.1.9 Altitude/depth amplifier. This field may contain alternate value formats. Enter a description of the altitude/depth (X) using one of the following.

H.5.1.1.10 Altitude base reference point. Legal values are “GL” ground level and “MSL” mean sea level.

H.5.1.1.10.1 Relative altitude. The relative altitude is a composite field consisting of multiple parts, the numeric altitude, the altitude unit of measurement and the altitude vertical dimension. Legal values for the numeric altitude are (minus) -99999 through 99999 in increments of 1. Legal values for altitude units of measure is feet “FT,” meters “M,” kilometers “KM,” and statute miles “SM.” The legal value for the depth unit of measure is feet “FT.” Legal values for the vertical dimension are “AGL” above ground level, “AMSL” above mean sea level, “HAE” height above ellipsoid and “BMSL” below mean sea level. BMSL is used only for depth of submerged objects, reported in feet. A space may be added between the values in the field to make it easier to read.

Examples: 1250 FT AGL, 1000 FT AMSL, 1524 M HAE, 35760 FT BMSL.

H.5.1.1.10.2 Flight level. By definition, flight level (FL) is, “Surfaces of constant atmospheric pressure which are related to a specific pressure datum, 1013.2 mb (29.92 in) and are separated by specific pressure intervals. (Flight levels are expressed in three digits that represent hundreds of feet; e.g., flight level 250 represents a barometric altimeter indication of 25,000 feet and flight level 255 is an indication of 25,500 feet.).” The legal value for flight level indicator is “FL.” A space may be added between the values in the field to make it easier to read. The legal value for context quantity is 000-999, in increments of one.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Example: FL 290.

H.5.1.1.10.3 Multiple instances of altitude/depth amplifiers. When multiple instances of the "X" amplifier are present in a single instance of a symbol or graphic (ex., Minimum Altitude "X," Maximum Altitude "X1"), for display purposes, the fields may be separated by a hyphen "-," or a space, hyphen and space " - ."

Examples:
500 FT AGL – 1250 FT AGL

25 FT AMSL – 150 FT AMSL

FL 250 – FL 290

MSL – 35760 FT BMSL

H.5.1.1.11 Date-time group. Date-time group (DTG) is defined as the date and time expressed in an alphanumeric combination. The alphanumeric combination used is day-time-time zone-month-year. The alphanumeric combination can be displayed in a number of ways. In its longest form, sixteen characters, it is composed of eight digits (first pair of digits denotes the date, second pair denotes the hours, third pair denotes the minutes and fourth pair denotes the seconds) followed by the time zone suffix, followed by a three-letter month abbreviation and four digits for the year: DDHHMMSSZMONYYYY. It can also be expressed in shorter forms by removing characters, such as DDHHMMZMONYY. On order (O/O) is a valid substitute for DTG.

H.5.1.1.12 Location of control measure symbols sector 1 and 2 modifiers. The location of sector 1 and sector 2 modifiers in control measure symbols is different than for other symbols within this standard as control measure symbols do not use a bounding octagon. The physical location is defined in the applicable control measure symbol template within this appendix.

H.5.1.1.12.1 Control measure sector 1 modifier. The Mine Types within the control measure symbols sector 1 modifier provides a graphic representation of the type(s) of mines used in a minefield or mined area. The Mine Types within the control measure symbols sector 1 modifier shall only be used with minefields and mined area control measure symbols. A minefield or mined area can contain a single mine type or multiple mine types, with a maximum of three (3) mine types in a single minefield or mined area.

H.5.1.1.12.2 Mine types. The seven mine types are Unspecified Mine, Antipersonnel Mine, Antipersonnel Mine with Directional Effects, Antitank Mine, Antitank Mine with Anti-handling Device, Wide Area Antitank Mine, and Mine Cluster.

H.5.1.1.12.3 Default mine type. All minefields and mined areas shall contain a minimum of one Mine Type. The default mine type is the Unspecified Mine, sector 1 modifier code "13". When the type of mines in a minefield or mined area are known, then the actual mine types shall be used, not the default Unspecified Mine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.1.1.12.4 Mine type(s) as a fill pattern. For the Minefield, Dynamic Depiction, Mined Area, and Mined Area, Fenced control measure symbols, the specified mine types will be used to create a fill pattern.

H.5.1.1.13 Feint/decoy/dummy indicator. Refer to 5.3.7.3 in base document for general guidance for this indicator. Additional guidance specific to control measure symbols is below.

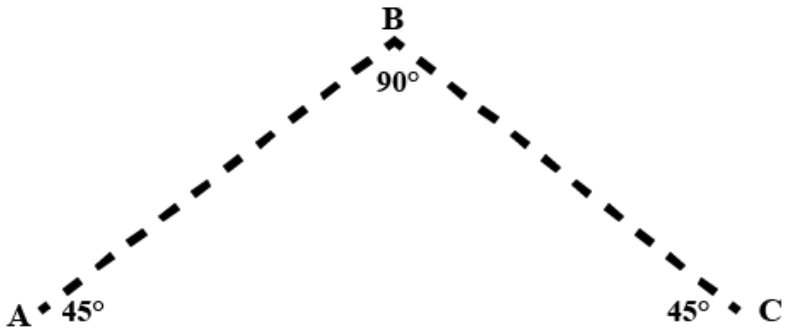


FIGURE H-3. Orientation of boundary lines.

H.5.1.1.13.1 Feint, decoy, or dummy indicator line style. The line style of the feint, decoy, or dummy indicator when used with control measure symbols shall always be rendered in accordance with 5.3.7.3.3 - as dashed lines, even when the status of the control measure symbols is present and the control measure symbol line style is solid.

H.5.1.1.13.2 Position of the feint, decoy, or dummy indicator for single point control measure symbols. The feint, decoy, or dummy indicator can be used with some sustainment, CBRN decontamination and/or special C2 point symbols. For these instances, the feint, decoy, or dummy indicator shall be positioned in relation to the frame as shown below. Point “A” shall be rendered 0.4L above the top of the top edge and 0.25L to the left of the left edge of the frame. Point “C” shall be rendered 0.4L above the top of the frame and 0.25L to the right of the right edge of the frame. This spacing will support any authorized any authorized amplifier(s) to be applied to the symbol without overlapping the indicator. The location of point “B” shall be calculated per the information and illustrations in this section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

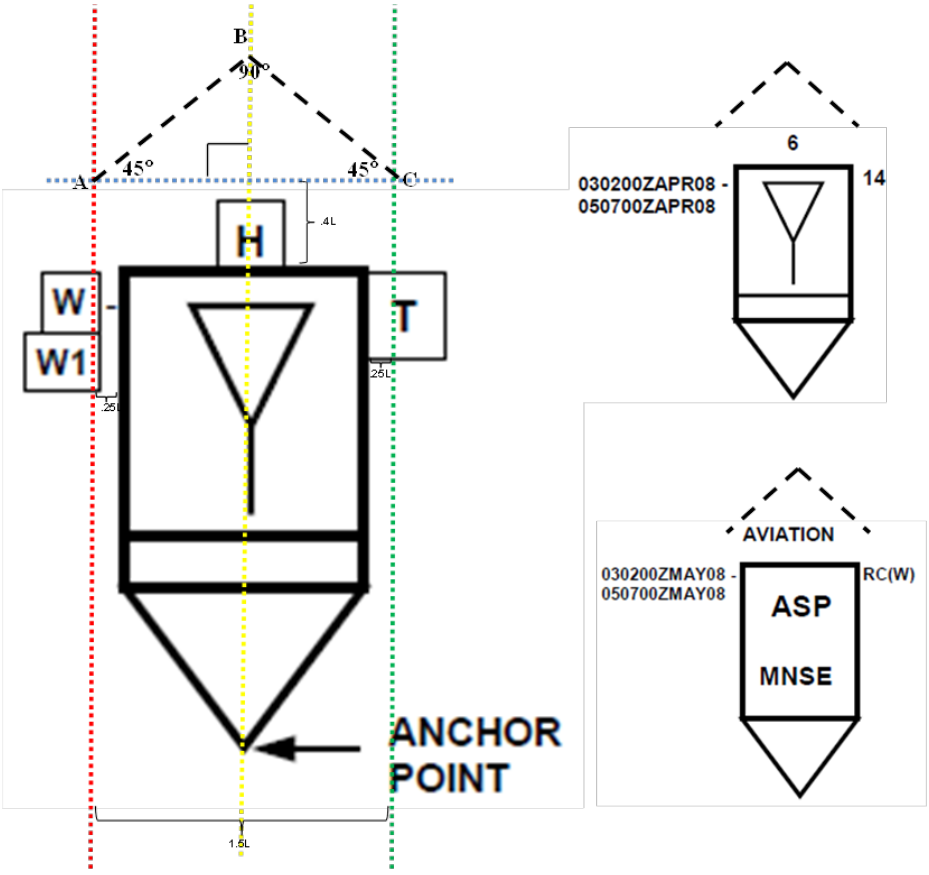


FIGURE H-4. Feint, decoy, or dummy indicator positioning for single point control measure symbols.

H.5.1.1.13.3 Feint, decoy, or dummy indicator rendering for most linear and area (polygon) control measure symbols. The rendering of the feint, decoy, or dummy indicator for most linear control measures and most area (polygon) control measures that do not contain a large directional arrow is described below. This does not apply to any Axis of Advance and/or Direction of Attack control measure symbols (they have large arrows); see H.5.1.1.13.4 for rendering guidance for Axis of Advance and Direction of Attack control measure symbols.

H.5.1.1.13.3.1 The feint, decoy, or dummy indicators point "A" x/y coordinate is calculated using the left most edge of the symbol area as the "x" (see red dotted line) and the top most edge of the symbol area as the "y" (see blue dotted line).

H.5.1.1.13.3.2 The feint, decoy, or dummy indicator point "C" x/y coordinate is calculated using the right most edge of the symbol area as the "x" (see green dotted line) and the top most edge of the symbol portion as the "y" (see blue dotted line).

H.5.1.1.13.3.3 For the feint, decoy, or dummy indicator portion point "B", x/y coordinate is calculated per H.5.1.1.13.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

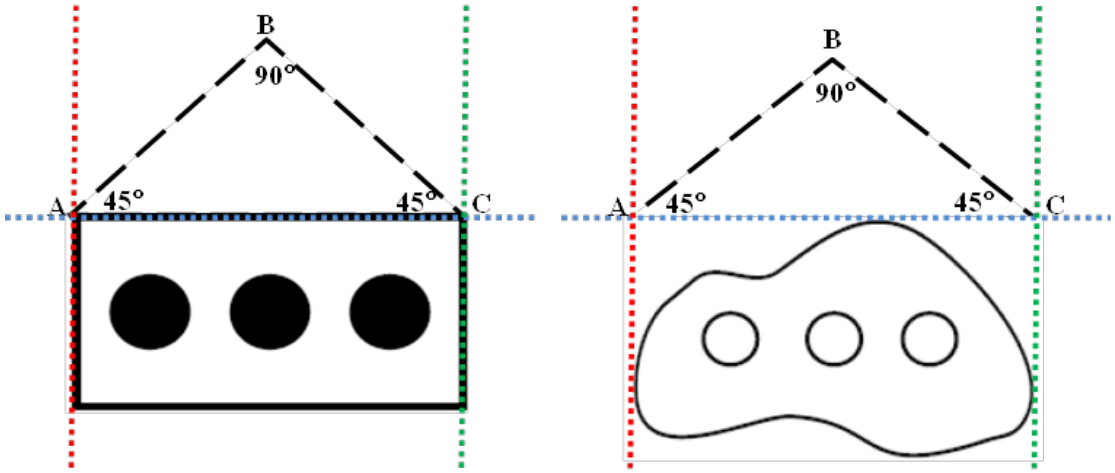


FIGURE H-5. Feint, decoy, or dummy indicator positioning for most linear and area (polygon) control measure symbols

H.5.1.1.13.4 Feint, decoy, or dummy indicator rendering for Axis of Advance and Direction of Attack control measure symbols. The rendering of the feint, decoy, or dummy indicator for Axis of Advance and/or Direction of Attack control measure symbols is described below. This section is an exception to H.5.1.1.13.3, rendering guidance for most linear and area polygon control measure symbols that do not contain a large directional arrow.

H.5.1.1.13.4.1 The feint, decoy, or dummy indicator point "A" x/y coordinate is calculated using the left most edge of the symbol's arrow head as the "x" (see red dotted line) and the pointed end of the arrow head side line as the "y" (see blue dotted line).

H.5.1.1.13.4.2 The feint, decoy, or dummy indicator point "C" x/y coordinate is calculated using the right most edge of the symbol's arrow head as the "x" (see green dotted line) and the pointed end of the arrow head side line as the "y" (see blue dotted line).

H.5.1.1.13.4.3 For the feint, decoy, or dummy indicator portion point "B", x/y coordinate is calculated per H.5.1.1.13.2.

H.5.1.1.13.4.4 The feint, decoy, or dummy indicator shall be positioned in relation to the orientation of the arrow head portion of the Axis of Advance and/or Direction of Attack control measure symbols as follows. Given the base of the arrow head is distance "w" (see blue dotted line, width) in figures H-6 and H-7 below, then the feint, decoy, or dummy indicator baseline "AC" (not rendered) shall be positioned 0.5w in front of the symbol arrow head and shall be rendered such that the yellow dotted line (not rendered) is centered in the middle of and perpendicular to the base of the arrow head (see blue dotted line, not rendered) and the yellow dotted line (not rendered) intersects feint, decoy, or dummy indicator point "B".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

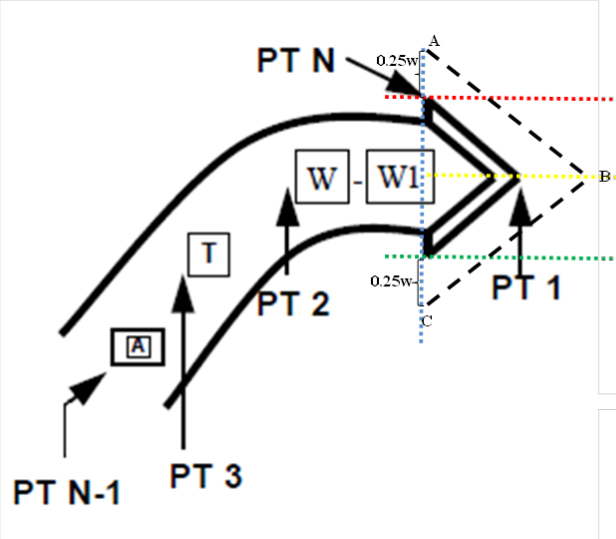


FIGURE H-6. Feint, decoy, or dummy indicator positioning for axis' of advance.

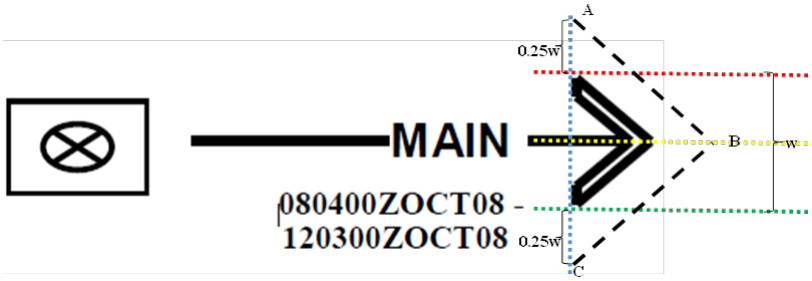


FIGURE H-7. Feint, decoy, or dummy indicator positioning for Direction of Attack.

H.5.2 Construction of control measure symbols. The rules for constructing control measure symbols vary depending on whether the object is point, line, or area based. The latter category of objects includes various forms of linear control measure symbols such as boundaries, areas of all shapes and sizes and complex figures such as an air corridor.

H.5.2.1 Point control measure symbols. A point-based control measure symbol, such as a casualty collection point, is constructed in the same manner as an unframed tactical symbol. Rules concerning the relative size of symbol components and placement of amplifiers in tactical symbols also apply to point based control measure symbols.

H.5.2.2 Line and area control measure symbols. A line or area control measure symbol is constructed using the anchor points, size and orientation defined for the control measure symbol. This appendix includes these parameters for the line and area graphics in the C2 domain. The size of the control measure symbol is determined by these parameters and the scale of the background on which the control measure symbols is placed. As a general rule, the line width and pattern height shall be scaled proportionally to the change in icon size required by its change in background scale (map or image). For control measure symbols, line width is dependent on

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

the distance between the points to be depicted and may vary (i.e., be reduced or enlarged) as display scale changes.

H.5.3 Coloring. All friendly control measure symbols will be shown in black or blue when drawn manually or on a color computer-generated display. Hostile control measure symbols shall be shown in red. If red is not available, they will be drawn in black with the abbreviation "ENY" placed on the symbols in one place for single point symbols and at least two places for Area and Line symbols. All obstacles as shown in this appendix, friendly, hostile, neutral, unknown or factional, shall be drawn using the color green. If the color green is not available obstacles should be drawn using black. The color yellow will be used for the hatching for CBRN contaminated areas. NOTE: The use of green and yellow for obstacles and CBRN is in contradiction to the standard identities.

H.5.4 Labeling. All text labeling shall be in upper case letters. The reader should be able to read the labels for all text labels of amplifier fields for control measures symbols when the bottom of the overlay is closest to the reader. Labeling written on an angle should be readable to the viewer so they do not have to turn their head. Where space is limited within an area, the amplifying information may be shown in a stacked manner, rather than side by side as displayed in the templates.

H.5.4.1 Fonts. Font sizes shall be scaled as appropriate in order for the information to be readable to the viewer.

H.5.5 Command and control. The exercise of authority and direction by a properly designated commander over assigned and attached forces in the accomplishment of the mission. Command and control functions are performed through an arrangement of personnel, equipment, communications, facilities, and procedures employed by a commander in planning, directing, coordinating, and controlling forces and operations in the accomplishment of the mission.

H.5.5.1 Boundaries. In land warfare, a boundary is a line by which areas of responsibility between adjacent units/formations are defined. For boundaries, all field labels are displayed perpendicular to the boundary line. Figure H-8 "Orientation of Boundary Lines" below provides the orientation of field labels for horizontal (east/west) and vertical (north/south orientation) boundary line segments. The symbol for the highest echelon (Field B) unit on lateral boundaries is used for the boundary line. The graphic for the lower echelon (Field B) unit on a rear or forward boundary is used for the boundary line (see figure H-8) When units of the same echelon are adjacent to each other, the abbreviated unique designator (Field T) can be omitted from the alphanumeric designator. Tables H-XXVI and H-XXVII at the end of the appendix provide a list of abbreviations and acronyms to be used for Field T. For all boundaries, use Arabic numerals to show the numbers of units, except for a corps boundary, use Roman numerals to show the number of corps. When the boundary is between units of different countries, the country trigraph (Field AS) is shown in parenthesis behind or below the unit designation.

H.5.5.2 Boundary line segment orientation determination. For the purpose of determining boundary line segment orientation, which is required to correctly position the field labels, the following additional guidance applies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.5.2.1 Horizontal (East/West) orientation boundary line segments are those line segments that are oriented between 46 and 135 degrees.

H.5.5.2.2 Vertical (North/South) orientation boundary line segments are those line segments that are oriented between 315 and 45 degrees.

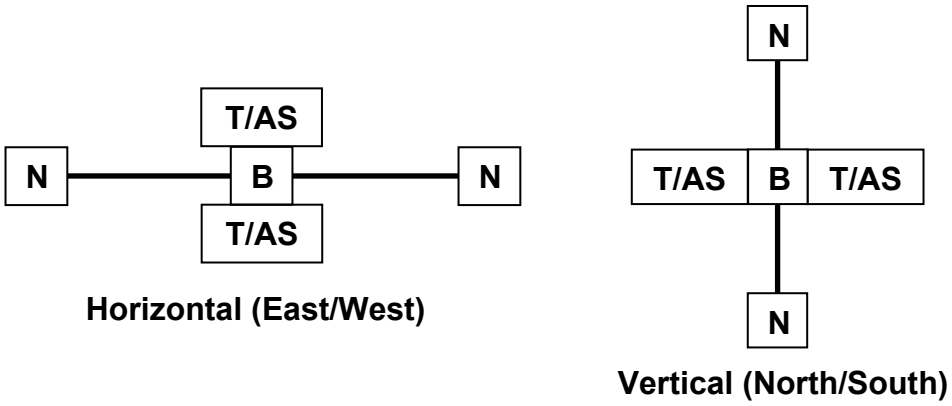
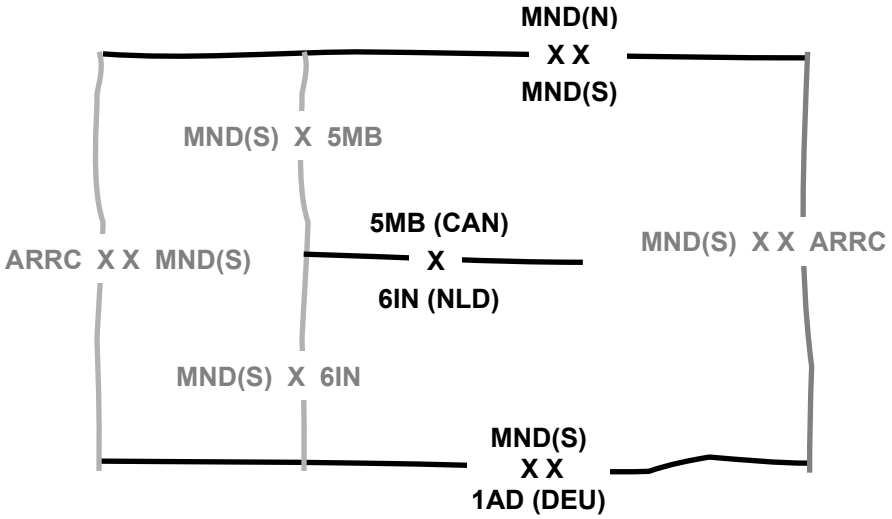


FIGURE H-8. Orientation of boundary lines.

H.5.5.2.3 Boundary line operational examples. The boundary line can be operationally used to depict a lateral boundary (figure H-9), a forward boundary (figure H-10), or a rear boundary (figure H-11). A lateral boundary is a control measure that defines the left or right limit of a unit's operational area; together with the rear and forward boundaries and a coordinating altitude, lateral boundaries define the area of operations for a commander. A forward boundary is the farthest limit, in the direction of the enemy, of an organization's responsibility. A rear boundary is the line that defines the rear area of operations assigned to a particular unit; the area behind the rear boundary belongs to the next higher commander and positioning of elements behind it must be coordinated with that commander



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

FIGURE H-9. Lateral boundary example

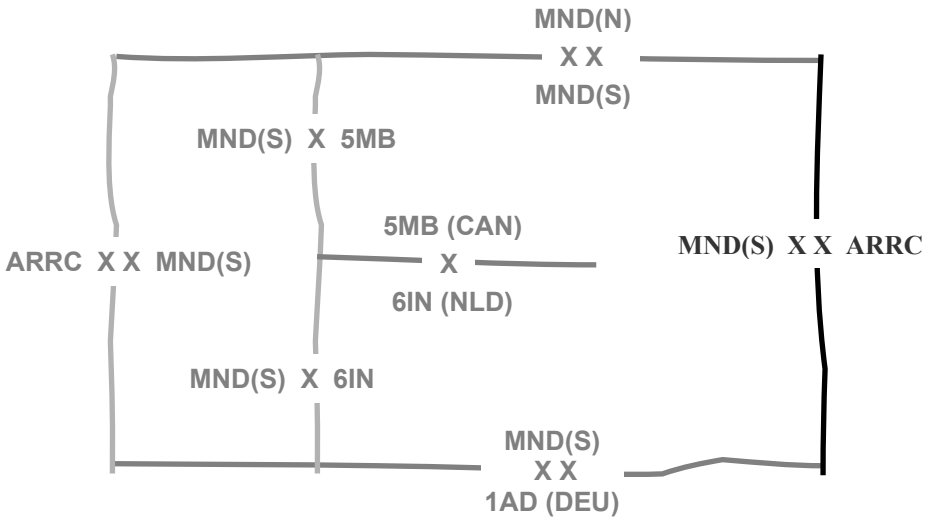


FIGURE H-10. Forward boundary example

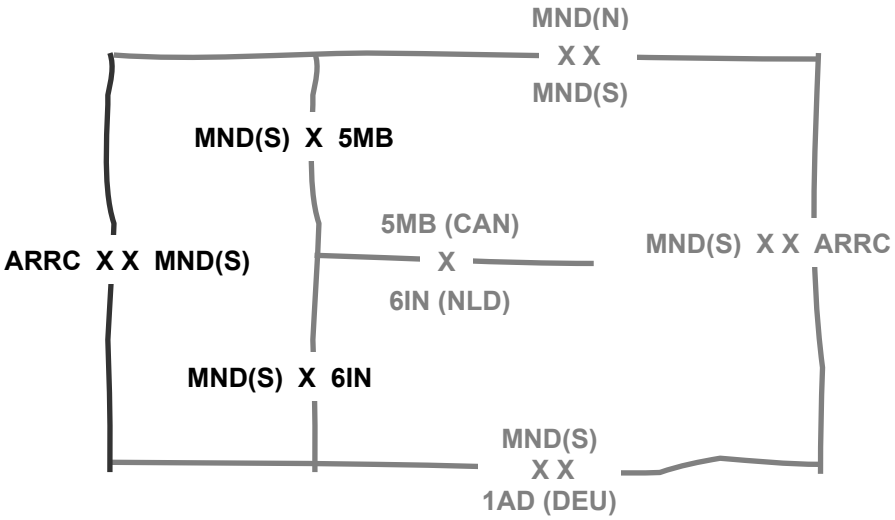



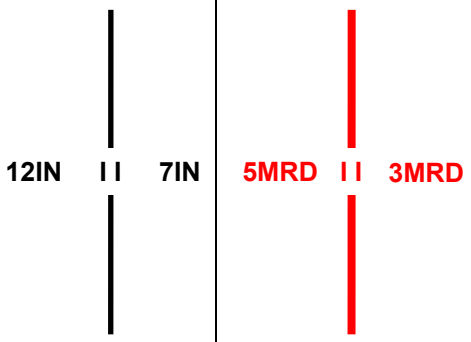




FIGURE H-11. Rear boundary example



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-III. Command and control lines.

CONTROL MEASURE	TEMPLATE	EXAMPLE Note: The symbols that have been colored gray are used to help explain how the control measure is used, but they are not a part of the control measure.
Command and Control Lines Symbol Set Code: 25 Code: **11**0000	N/A	N/A
Boundary Symbol Set Code: 25 Code: 11**01**00		  
Light Line Symbol Set Code: 25 Code: 11**02**00	 Designated line forward of which vehicles are required to use black-out lights at night.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-III. Command and control lines - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE Note: The symbols that have been colored gray are used to help explain how the control measure is used, but they are not a part of the control measure.
Engineer Work Line Symbol Set Code: 25 Code: 11**03**00	 A coordinated boundary used to compartmentalize an area of operations to indicate where specific engineer units have primary responsibility (FM 3-34).	

H.5.6 Points. In a number of tables (sustainment, CBRN decontamination and special C2) that follow there are single point control measure symbols that follow a specific format as shown in figure H-12 below. Supply points follow this same format with a modification to the symbol. Supply points use the same icon used for supply units. The supply icon is placed toward the bottom of the box as shown in figure H-12 below. This is format for use only with these types of points, as there are other points (contact, coordination, decision, targets, etc.) as displayed throughout this section on land control measure symbols that are formatted differently. In building points, the type of point is abbreviated and positioned inside the top part of the point symbol, displayed as a grey box in figure H-12 below. For supply symbols this may be a graphic depiction. In addition, below the abbreviation of the point name, the designation of the unit servicing that point may be included in field T1. To differentiate points, the point is numbered, lettered, or a combination. The number, letter or combination is placed on the outside of the symbol on the right side at the top in field T. On the outside of the point on the left side at the top and middle, date-time groups can be associated with the point. On the outside of the point at the top, additional information can be provided in field H. Text will not be written on an angle for single point symbols. For dynamic displays, if the system has the capability to rotate the map display in the direction of movement, a single point symbol may optionally be rotated on its anchor point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

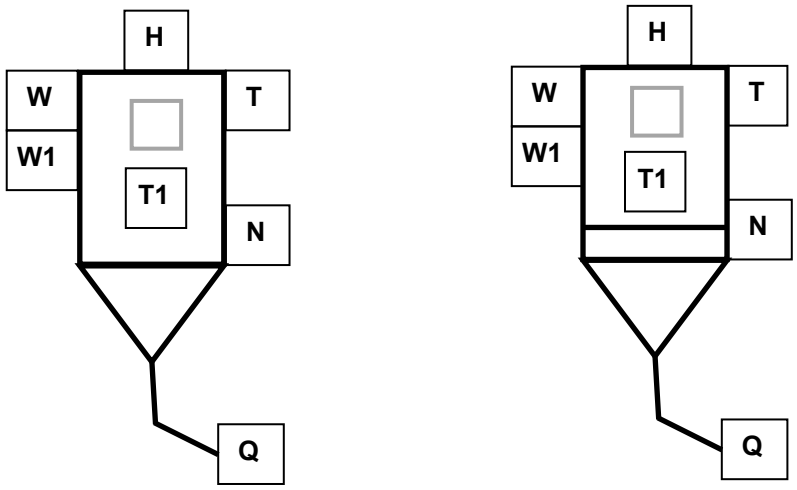


FIGURE H-12. Template for point (left) and supply point (right) control measure symbols.

H.5.7 Lines. In the tables that follow there are line control measure symbols that follow a specific format as shown in figure H-13 below. Most lines are also named as a phase line for easy reference for use in orders and during transmissions. A phase line will be marked as PL with the name in the T field. Other lines that have a specific purpose and are also named as phase lines should have the primary purpose in the T1 field (such as restrictive fire line "RFL") labeled on top of the line at both ends of the line inside the lateral boundaries or as often as necessary for clarity. The T2 field is used for fire support coordination measures to show the designation of the controlling headquarters. The use of phase lines to mark line control measure symbols is not mandatory. The gray box in figure H-13 is a placeholder for a specific symbol which is determined based on what control measure is being displayed.

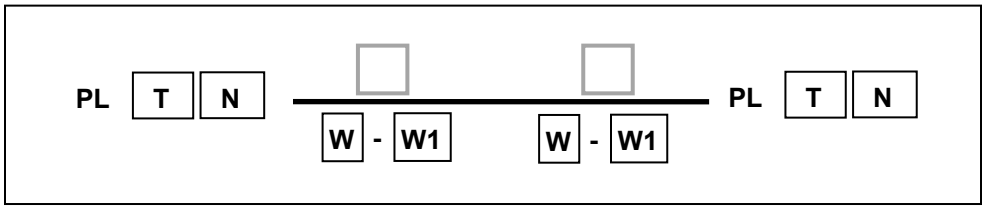


FIGURE H-13. Template for line control measure symbols.

H.5.8 Areas. In the tables that follow there are area control measure symbols that follow a specific format as shown in figure H-14. Areas will normally be marked with the abbreviation for the type of area in the A field followed by a name in the T field. This labeling should be in the center of the area unless the area is too small or the labeling would interfere with the locating of units. Not all fields are required for each area; some areas may use only one field, while other will use several. The gray box in figure H-14 is a placeholder for a specific symbol which is determined based on what control measure is being displayed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

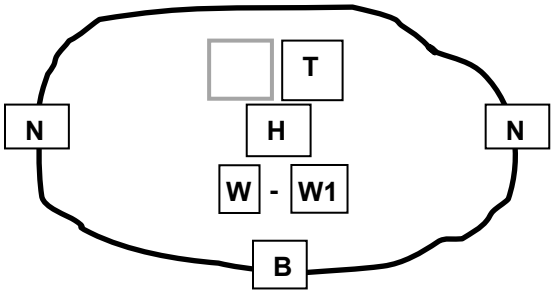


FIGURE H-14. Template for area control measure symbols.

H.5.9 Area of operations. An area of operations is an operational area defined by a joint commander for land or maritime forces to conduct military activities. Normally, an area of operations does not encompass the entire joint operations area of the joint commander, but is sufficient in size for the joint force component commander to accomplish assigned missions and protect forces. Operational area is an overarching term encompassing more descriptive terms for geographic areas in which military operations are conducted. Operational areas include, but are not limited to, such descriptors as area of responsibility, theatre of war, theatre of operations, joint operations area, amphibious objective area, joint special operations area and area of operations.

TABLE H-IV. Control Measure Draw Rules.

TYPE	DRAW RULE
Area1	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. The information fields should be moveable and scalable as a block within the area. **Orientation:** Not applicable.
Area2	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. The LAA point symbol requires one anchor point and is connected to the area symbol with a straight line. **Size/Shape:** Determined by the anchor points. The information fields should be moveable and scalable as a block within the area. **Orientation:** Not applicable.
Area3	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. **Orientation:** The side opposite Field B (Echelon) faces toward the hostile force.
Area4	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. The information fields should be moveable and scalable as a block within the area. The default tic length should be the same as the text height of the echelon field (B). Spacing between the tics should also be the height of B. Users should be provided a facility to allow them to manually alter the height of B, which in turn should affect the tic length and spacing accordingly. **Orientation:** Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Area5	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the semicircle's opening. Point 3 defines the end of the arrow. **Size/Shape:** Points 1 and 2 determine the diameter of the semicircle and point 3 determines the length of the arrow. The tip of the arrowhead will be at the center point of the semicircle's diameter and will project perpendicularly from the line between points 1 and 2. The default tic length should be the same as the text height of the echelon field (B). Spacing between the tics should also be the height of B. Users should be provided a facility to allow them to manually alter the height of B, which in turn should affect the tic length and spacing accordingly. **Orientation:** The opening typically faces enemy forces.
Area6	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** Points 1 and 2 will determine a radius that is long enough for the graphic to encompass the feature(s) being retained. The opening will be a 30-degree arc of the circle. The default tic length should be the same as the text height of the echelon field (R). Spacing between the tics should also be the height of R. Users should be provided a facility to allow them to manually alter the height of R, which in turn should affect the tic length and spacing accordingly. **Orientation:** The opening will be on the friendly side of the symbol.
Area7	**Anchor Points:** This symbol requires three anchor points. Point 1 is the tip of the arrowhead. Points 2 and 3 define the endpoints of the straight line on the back side of the symbol. **Size/Shape:** Points 2 and 3 determine the length of the straight line on the back side of the symbol. The rear of the arrowhead line shall connect to the midpoint of the line between points 2 and 3. The arrowhead line shall be perpendicular to the line formed by points 2 and 3. **Orientation:** Orientation is determined by the anchor points. The back side of the symbol encompasses the firing position, while the arrowhead typically points at the target.
Area8	**Anchor Points:** This symbol requires four anchor points. Points 1 and 2 define the endpoints of the straight line on the back side of the symbol. Points 3 and 4 define the tips of the arrowheads. **Size/Shape:** Points 1 and 2 determine the length of the straight line on the back side of the symbol. The rear of the arrows should connect to points 1 and 2. **Orientation:** Orientation is determined by the anchor points. The back side of the symbol encompasses the firing position, while the arrowheads typically indicate the left and right limits of coverage that the firing position is meant to support.
Area9	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. **Orientation:** Not applicable. The area will encompass two or more fire support symbols (point/single target, nuclear target, circular target, rectangular target, or area target). The naming convention determines whether the area describes a series or group of targets.
Area10	**Anchor Points:** This symbol requires a minimum of three (3) and a maximum of six (6) anchor points to define the boundary of the area. The anchor points shall be sequentially numbered, in increments of one (1), beginning with point one (1). **Size/Shape:** Determined by the anchor points. The information fields should be moveable and scalable within the area. **Orientation:** Not applicable.
Area11	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's vertical line. Point 3 defines the endpoint of the symbol's horizontal line. **Size/Shape:** Points 1 and 2 determine the length of the vertical line. The length of the horizontal line is determined by plotting point 3 on a plane extending perpendicularly from the midpoint of the vertical line. **Orientation:** The head of the "T" typically faces enemy forces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Area12	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the end points of the symbol's vertical line. Point 3 defines the tip of the longest arrow. **Size/Shape:** Points 1 and 2 determine the height of the symbol and point 3 determines its length. The spacing between the symbol's arrows will stay proportional to the symbol's vertical line. The length of the short arrows will remain in proportion to the length of the longest arrow. **Orientation:** The arrows point away from enemy forces.
Area13	**Anchor Points:** This symbol requires at least two anchor points. Points 1 and 2 define the corners of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the straight line. The radius of the semicircle is ½ the length of the straight line. **Orientation:** Not applicable.
Area14	**Anchor Points:** This symbol requires three anchor points. The center point defines the center of the symbol. Points 1 and 2 define the radii of circles 1 and 2. **Size/Shape:** As defined by the operator. **Orientation:** The center point is typically centered over Ground Zero (GZ) or Designated Ground Zero (DGZ).
Area15	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** The radius will be long enough for the symbol to encompass the UEI(s) or feature(s) being isolated. The opening will be a 30 degree arc of the circle. **Orientation:** The opening will be on the friendly side of the symbol.
Area16	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** Points 1 and 2 will determine a radius that is long enough for the symbol to encompass the feature(s) being occupied. The opening will be a 30-degree arc of the circle. **Orientation:** The opening will be on the friendly side of the control measure.
Area17	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's vertical line. Point 3 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the height of the symbol and point 3 determines its length. The arrow will project perpendicularly from the midpoint of the vertical line. **Orientation:** The arrow points toward enemy forces.
Area18	**Anchor Points:** This symbol requires four anchor points. Point 1 defines the tip of the first arrowhead. Point 2 defines the end of the straight line portion of the first arrow. Point 3 defines the tip of the second arrowhead. Point 4 defines the end of the second arrow. **Size/Shape:** Points 1 and 2 and points 3 and 4 determine the length of each arrow. Points 2 and 3 shall be connected by a smooth, curved line. **Orientation:** Determined by the anchor points. The unit being relieved is typically located at the base of the curve and the unit performing the relief is typically located at the end of the symbol. The arrowhead typically points to the location the relieved unit should move to.
Area19	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** Points 1 and 2 will determine a radius that is long enough for the symbol to encompass the feature(s) being secured. The opening will be a 30-degree arc of the circle. **Orientation:** The opening will be on the friendly side of the symbol.
Area20	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. **Orientation:** Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Area21	**Anchor Points:** This symbol requires three anchor points. Point 1 defines the vertex of the symbol. Points 2 and 3 define the tips of the arrowheads. **Size/Shape:** Points 1 and 2 and points 1 and 3 determine the length of the arrows. The length and orientation of the arrows can vary independently. **Orientation:** Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The tactical symbol indicator is centered over point 1.
Area22	**Anchor Points:** This symbol requires one anchor point. The center point defines the center of the symbol. **Size/Shape:** Static. **Orientation:** The symbol is typically centered over the desired location.
Area23	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. **Size/Shape:** Determined by the anchor points **Orientation:** Not applicable.
Area24	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's vertical line. Point 3 defines the endpoint of the symbol's horizontal line. **Size/Shape:** Points 1 and 2 determine the length of the vertical line. Points 2 and 3 determine the length of the horizontal line, which will project perpendicularly from the midpoint of the vertical line. **Orientation:** The head of the "T" typically faces enemy forces.
Area25	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the end points of the symbol's vertical line. Point 3 defines the tip of the longest arrow. **Size/Shape:** Points 1 and 2 determine the height of the symbol and point 3 determines its length. The spacing between the symbol's arrows will stay proportional to the symbol's vertical line. The length of the short arrows will remain in proportion to the length of the longest arrow. The arrows are perpendicular to the baseline (vertical line) and parallel to each other. **Orientation:** The arrows typically point toward enemy forces.
Area26	**Anchor Points:** This symbol requires a minimum of 6 anchor points. Add as many pairs of points as needed to accurately define the areas. The number of points shall always be an even number, with an equal number of points for both polygons. Points 1 through N/2 define the inner safe zone (zone 1). Points N/2 +1 though point N defines the outer zone (zone 2). **Size/Shape:** Determined by the anchor points. **Orientation:** The symbol will typically be oriented upright.
Point1	**Anchor Points:** This symbol requires one anchor point. The anchor point defines/is the tip of the inverted cone. **Size/Shape:** Static. **Orientation**: The symbol will typically be oriented upright.
Point2	**Anchor Points:** This symbol requires one anchor point. The center point defines/is the center of the symbol. **Size/Shape:** Static. **Orientation**: The symbol is typically centered over the desired location.
Point3	**Anchor Points:** This symbol requires one anchor point. The center point defines the center of the symbol. **Size/Shape:** Static. Maneuver area symbol shall be drawn with a black border. Maneuver areas may be either unfilled or filled with performance-contoured color options **Orientation:** The symbol is typically centered over the desired location.
Point4	**Anchor Points:** This symbol requires one anchor point. The point defines the bottom of the central vertical line in the symbol where the curved and vertical lines meet. **Size/Shape:** Static. **Orientation:** The symbol will typically be oriented upright (as shown in the template and example).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Point5	**Anchor Points:** This symbol requires one anchor point. The point defines the point where all the lines meet. **Size/Shape:** Static. **Orientation:** The symbol will typically be oriented upright (as shown in the example).
Point6	**Anchor Points:** This symbol requires one anchor point. The anchor point defines/is the center of the bottom of the control measure symbol as shown in the template and example. **Size/Shape:** Static. **Orientation:** The symbol will typically be oriented upright.
Point7	**Anchor Points:** This symbol requires one anchor point. The anchor point defines the midpoint of the symbol's base. **Size/Shape:** Static. **Orientation:** The symbol will typically be oriented upright (as shown in the template and example).
Point8	**Anchor Points:** This symbol requires one anchor point. The center point defines the center of the symbol. **Size/Shape:** Static. The symbol's corners form a 70- degree angle. **Orientation:** The symbol is typically centered over the desired location. A user can use this symbol to define a new type of point if the selection that follows is not sufficient.
Point9	**Anchor Points:** This symbol requires one anchor (center) point. The point defines the center of the symbol. **Size/Shape:** Static. The symbol's height should be 2x the symbol's width. **Orientation:** The symbol's center point is typically centered over the desired location. The symbol shall be oriented upright, as shown in the examples.
Point10	**Anchor Points:** This symbol requires one anchor point. The point defines the center of the circle. **Size/Shape:** Static. The diameter of the circle should be 1/2 the height of the symbol. **Orientation:** The symbol's center point is typically centered over the desired location. The symbol will be oriented upright, as shown in the example.
Point11	**Anchor Points:** This symbol requires one center point. The point defines the center of the symbol. **Size/Shape:** Static. Length is 2x the size of height. **Orientation:** The symbol is centered over the desired location. The symbol shall be oriented upright, as shown in the example.
Point12	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the tips of the arrowheads and point 3 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the symbol's height and point 3 determines its length. The vertical line at the rear of the symbol shall be the same length as the opening, and shall be perpendicular to the parallel lines formed with the rear of symbol vertical line and the lines ending with points 1 and 2. **Orientation:** The opening typically faces the applicable obstacle.
Point13	**Anchor Points:** This symbol requires one anchor point. The center point defines the center of the circle. **Size/Shape:** Static. **Orientation:** The symbol is typically centered over the desired location.
Point14	**Anchor Points:** This symbol requires one anchor point. The center point defines the center of the symbol. **Size/Shape:** There should be 45 degrees of angular separation between the two arrows. **Orientation:** The symbol is typically centered over the desired location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Point15	**Anchor Points:** This symbol requires one anchor point. The anchor point defines "nose" of the symbol. **Size/Shape:** Static. **Orientation:** The symbol is typically centered over the desired location.
Point16	**Anchor Points:** This symbol requires one anchor point; the point defines the circle at the base of the tower. **Size/Shape:** The symbol is a high-angle cone. **Orientation:** The symbol will remain upright.
Point17	**Anchor Points:** This symbol requires one anchor point. This anchor point represents the center of the rectangle and, therefore, the geographic location of that rectangle. **Size/Shape:** The size and shape of this symbol is determined by three additional numeric values; A length (AM1), a width (AM2), and a rotation angle. The length and width should be expressed in the appropriate map distance units. The length is aligned with the axis of rotation. The width is aligned perpendicular to the axis of rotation. **Orientation:** The orientation of this symbol is determined by the rotation angle provided, where 0 degrees is North and a positive rotation angle rotates the rectangle in a clockwise direction.
Point18	**Anchor Points:** This symbol requires one anchor point that defines the axis of angular rotation. **Size/Shape:** The size and shape of this symbol is determined by additional numeric values; A search axis azimuth, a start range, a stop range and a stop relative bearing. The stop relative bearing is an equal angle either side of the search axis. The start and stop range should be expressed in the appropriate map distance units. Field T should be positioned in the center of the search area aligned with the search axis. **Orientation:** The orientation of this symbol is determined by the search axis azimuth provided.
Line1	**Anchor Points:** This symbol requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** The first and last anchor points determine the length of the line. **Orientation:** Orientation is determined by the order in which the anchor points are entered.
Line2	**Anchor Points:** This symbol requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** The first and last anchor points determine the length of the line. The end-of line information will typically be posted at the ends of the line as it is displayed on the screen. **Orientation:** Orientation is determined by the order in which the anchor points are entered.
Line3	**Anchor Points:** This symbol requires three anchor points. Point 1 defines the vertex of the symbol. Points 2 and 3 define the tips of the arrowheads. **Size/Shape:** The length and orientation of the arrows can vary independently. **Orientation:** Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The top of the tactical symbol indicator may touch point 1.
Line 4	**Anchor Points:** This symbol requires two anchor points. Points 1 and 2 define the corner points of the symbol. **Size/Shape:** The symbol varies only in length. **Orientation:** Orientation is determined by the anchor points.
Line5	**Anchor Points:** This symbol requires two anchor points. Points 1 and 2 define the endpoints of the symbol. **Size/Shape:** The symbol varies only in length. **Orientation:** One point defines the origin from which the bearing is being taken and the other point defines the location or direction from which a contact is made.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Line6	**Anchor Points:** This symbol requires 3 anchor points. Point 1 defines the vertex of the symbol and points 2 and 3 define its endpoints. **Size/Shape:** Points 1, 2 and 3 determine the length of the lines connecting them. The line defined by points 1 and 2 is typically the same length as the line between points 2 and 3. **Orientation:** Orientation is determined by the anchor points
Line7	**Anchor Points:** This symbol requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** The first and last anchor points determine the length of the line. The line information will be posted once at the center of the line as it is displayed on the screen. **Orientation:** Orientation is determined by the order in which the anchor points are entered.
Line8	**Anchor Points:** This symbol requires a minimum of two (2) anchor points. Up to 298 additional points can be added to extend the line. The first point (point 1) defines the start point. The last point defines the endpoint. The points are numbered sequentially beginning with point one (1), in increments of one. **Size/Shape:** The anchor points define the size and shape. **Orientation:** The orientation is determined by the anchor points.
Line9	**Anchor Points:** This symbol requires 2 anchor points. Point 1 defines the tip of the arrowhead and point 2 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length. **Orientation:** The orientation is determined by the anchor points.
Line10	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the tip of the arrowhead and point 2 defines the rear of the symbol. Point 3 defines the 90 degree arc. **Size/Shape:** Points 1 and 2 are connected by a 90 degree arc. Point 3 indicates on which side of the line the arc is placed. **Orientation:** The rear of the symbol identifies the enemy's location and the arrow points in the direction the obstacle should force the enemy to turn.
Line11	**Anchor Points:** This symbol requires four points. Points 1 and 2 define one side of the gap and points 3 and 4 define the opposite side of the gap. Size/Shape. Determined by the anchor points. **Orientation:** Not applicable.
Line12	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol and point 3 defines the location of one side of the symbol. **Size/Shape:** Points 1 and 2 determine the centerline of the symbol and point 3 determines its width. **Orientation:** Orientation is determined by the anchor points.
Line13	**Anchor Points:** This symbol requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** The first and last anchor points determine the length of the line. The size of the tooth does not change. **Orientation:** Orientation is determined by the anchor points.
Line14	**Anchor Points:** This symbol requires two anchor points. Points 1 and 2 define the tips of the arrowheads. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length. The lines of the arrowhead will form an acute angle. **Orientation:** Orientation is determined by the anchor points.
Line15	**Anchor Points:** This symbol requires two anchor points. Points 1 and 2 define the length and orientation of the straight line (trip wire) portion of the symbol. **Size/Shape:** Points 1 and 2 determine the length and orientation of the line drawn from the physical mine to the end of the trip wire. The distance between the line connecting points 1 and 2 is the length of the trip wire connected to the mine. **Orientation:** Orientation is determined by the anchor points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Line16	**Anchor Points:** This symbol requires four points. Points 1 and 2 define one side of the assault crossing site and points 3 and 4 define the opposite side of the assault crossing site. **Size/Shape:** Determined by the anchor points. **Orientation:** Not applicable.
Line17	Anchor Points. This symbol requires three anchor points. Points 1 and 2 define the endpoints of the first line. Point 3 defines the location of the parallel line. **Size/Shape:** Points 1 and 2 determine the length of the symbol. Point 3 determines its width. **Orientation:** Orientation is determined by the anchor points.
Line18	**Anchor Points:** This symbol requires two anchor points. Points 1 and two define the tips of the arrowheads. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length. The arrowheads will be filled-in versions of a common arrowhead. **Orientation:** Orientation is determined by the anchor points.
Line19	**Anchor Points:** This symbol requires two anchor points. Points 1 and two define the corners on the front of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length. **Orientation:** Orientation is determined by the anchor points
Line20	**Anchor Points:** This graphic requires two anchor points. Point 1 defines the tip of the arrowhead, and point 2 defines the rear of the graphic. **Size/Shape:** Points 1 and 2 determine the length of the graphic, which varies only in length. **Orientation:** The arrow points to the location where the convoy has halted.
Line21	**Anchor Points:** This symbol requires at least two anchor points to define the line. Additional points can be defined to extend and shape the line. **Size/Shape:** The first and last anchor points determine the length of the line. The line segment between each pair of anchor points will repeat all information associated with the line segment. **Orientation:** Orientation is determined by the anchor points.
Line22	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's opening and point 3 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the symbol's height and point 3 determines its length. The vertical line at the rear of the symbol will be the same height as the opening and parallel to it. **Orientation:** The opening defines the span of the breach and typically faces enemy forces.
Line23	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's vertical line and point 3 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the symbol's height and point 3 determines its length. The spacing between the symbol's arrows will stay proportional to the symbol's height. The tip of the middle arrowhead will be at the midpoint of the vertical line. The arrows will stay perpendicular to the vertical line, regardless of the rotational orientation of the symbol as a whole. **Orientation:** The arrows typically point toward enemy forces.
Line24	**Anchor Points:** This symbol requires three anchor points. Point 1 defines the tip of the arrowhead. Point 2 defines the end of the straight line portion of the symbol. Point 3 defines the diameter and orientation of the 180 degree circular arc. **Size/Shape:** Points 1 and 2 determine the length of the straight line portion of the symbol. Point 3 defines which side of the line the arc is on and the diameter of the arc. **Orientation:** The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the base of the arc. The 180 degree circular arc is always perpendicular to the line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.

TYPE	DRAW RULE
Line25	**Anchor Points:** This symbol requires exactly two anchor points. Point 1 defines the tip of the arrowhead and point 2 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length. **Orientation:** The arrow typically points in the direction of the action.
Line26	**Anchor Points:** Where four points are available Point 1 and Point 2 define the ends of one arrow and Point 3 and Point 4 define the ends of the other arrow. Point 1 and Point 4 define the ends of their respective arrowheads. Where three points are available Point 1 defines the vertex of the symbol. Points 2 and 3 define the tips of the arrowheads. **Size/Shape:** Where four points are available, Points 1 and 2 and Points 3 and 4 determine the length of the arrows. Where three points are available Points 1 and 2 and points 1 and 3 determine the length of the arrows. The length and orientation of the arrows can vary independently. **Orientation:** Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The tactical symbol indicator is centered between point 2 and point 3 when four points are in use or centered on Point 1 when three points are in use.
Line27	**Anchor Points:** Where four points are available Point 1 defines the center of the circle. Point 2 defines the radius of the circle. Point 3 defines the curvature of the arc. Point 4 defines the end of the arrow. Where three points are available Point 1 defines the center point of the circle. Point 2 defines the tip of the arrowhead. Point 3 defines the 90 degree arc. **Size/Shape:** Where four points are available, Points 1 and 2 define the size of the circle, which should be adjusted as needed to contain the unit assigned the task. Point 3 controls the curvature of the arc. Point 4 defines the end of the arrow. Where three points are available Points 1 and 2 are connected by a 90 degree arc. The circle will at least be large enough to accommodate a tactical symbol. Point 3 indicates on which side of the line the arc is placed. **Orientation:** The arrowhead identifies the location/object to be seized and the circle identifies the unit(s) assigned the task. See 5.3.11 for options to accommodate multiple units.
Line28	**Anchor Points:** This symbol requires 2 anchor points. Point 1 defines the tip of the arrowhead, and point 2 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length. **Orientation:** The arrow typically points toward enemy forces with the tip of the arrowhead indicating the location of the action.
Line29	**Anchor Points:** This symbol requires three anchor points. Point 1 is the tip of the arrowhead. Points 2 and 3 define the endpoints of the curved line on the back side of the symbol. **Size/Shape:** Points 2 and 3 determine the length of the curved line on the back side of the symbol. The rear of the arrowhead line shall connect to the midpoint of the line between points 2 and 3. The arrowhead line shall be perpendicular to the line formed by points 2 and 3. **Orientation:** Orientation is determined by the anchor points. The back side of the symbol encompasses the ambush position, while the arrowhead typically points at the target.
Corridor1	**Anchor Points:** This symbol may contain multiple segments. Each segment requires 2 anchor points. Point numbers that define the trace of the segment are sequential beginning with point 1, in increments of 1, up to a max of 99 points. Each anchor point defines the endpoint of a segment's centerline. The anchor points are Air Control Points (ACP), Communications Checkpoints (CCP) or both. **Size/Shape:** Points 1 and 2 determine the length of a segment. The information field inside each segment should be moveable and scalable within each segment. The information box outside the symbol should be placed between points 1 and 2 in such a way it does not obscure the symbol. **Orientation:** The anchor points determine orientation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.


TYPE	DRAW RULE
Axis1	**Anchor Points:** The symbol requires N anchor points, where N is between 3 and 50. Point 1 defines the tip of the arrowhead. Point N-1 defines the rear of the symbol. Point N defines the back of the arrowhead. Anchor points are numbered sequentially beginning with point number one (1), in increments of one (1). **Size/Shape:** Points 1 through N-1 and 2 determine the symbol's centerline and Point N determines the width. The crossover point on the symbol shall occur between Points 1 and 2. **Orientation:** The arrowhead typically points toward enemy forces.
Axis2	**Anchor Points:** The symbol requires N anchor points, where N is between 3 and 50. Point 1 defines the tip of the arrowhead. Point N-1 defines the rear of the symbol. Point N defines the back of the arrowhead. Anchor points are numbered sequentially beginning with point number one (1), in increments of one (1). **Size/Shape:** Points 1 through N-1 and 2 determine the symbol's centerline and Point N determines the width. **Orientation:** The arrowhead typically points toward enemy forces.
Polyline1	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the infiltration lane and point 3 defines the width on one side of the lane. **Size/Shape:** Points 1 and 2 determine the centerline of the symbol and point 3 determines the width of the infiltration lane. The rest of the symbol stays proportional to the length of the centerline. **Orientation:** Orientation is determined by points 1 and 2.
Ellipse1	**Anchor Points:** This symbol requires one anchor point. This anchor point represents the center of an ellipse and, therefore, the geographic location of that ellipse. **Size/Shape:** The size and shape of this symbol is determined by three additional numeric values; A major axis radius, a minor axis radius, and a rotation angle. The radii should be expressed in the appropriate map distance units. **Orientation:** The orientation of this symbol is determined by the rotation angle provided, where 0 degrees is east/west and a positive rotation angle rotates the ellipse in a counter-clockwise direction.
Rectangular1	**Anchor Points:** This symbol requires two anchor points and a width, defined in meters, to define the boundary of the area. Points 1 and 2 will be located in the center of two opposing sides of the rectangle. **Size/Shape:** Size: As determined by the anchor points. The anchor points determine the length of the rectangle. The width, defined in meters, will determine the width of the rectangle. Shape: Rectangle. The information fields should be moveable and scalable. **Orientation:** As determined by the anchor points.
Rectangular2	**Anchor Points:** This symbol requires one (1) anchor point to define the center of the area. **Size/Shape:** Size Is determined by the anchor point, the target length (in meters) and target width (in meters). A rectangular target is wider and longer than 200 meters. The information fields should be moveable and saleable within the area. Shape: Rectangle. **Orientation:** As determined by the Target Attitude (in mils).
Rectangular3	**Anchor Points:** This symbol requires one anchor (center) point to define the center of the symbol. The target tactical symbol shall be centered upon the center of the area. The size and the orientation of the target symbol are fixed within the area. **Size/Shape:** As determined by the anchor points. The anchor points determine the area's length. Width, determined in meters, will define the width of the rectangle. **Orientation:** As determined by the anchor points. The center point of the area shall always have the target symbol with the same upright orientation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Control Measure Draw Rules - Continued.





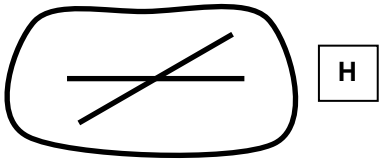



TYPE	DRAW RULE
Circular1	**Anchor Points:** This symbol requires one (1) anchor point and a radius. Point 1 defines the center point of the symbol. **Size/Shape:** Size: The radius defines the size. Shape: Circle. The information fields should be scalable within the circle. **Orientation:** Not applicable
Circular2	**Anchor Points:** This symbol requires one anchor point that defines an object at a dynamic grid location. This coordinate, which pinpoints the current physical location of a specific unit, weapon or acquisition system, may change with the movement of the object. The symbol for that object is located at the anchor point. **Size/Shape:** The size is determined by the distance in meters from the object at the center of the range fan. The shapes are concentric circles. A minimum of one (1) and a maximum of three (3) concentric circles can be used. **Orientation:** The center point is typically centered over the known location of a weapon or sensor system.
Arc1	**Anchor Points:** This graphic requires one anchor point that defines an object at a dynamic grid location. This coordinate, which pinpoints the current physical location of a specific unit, weapon or sensor system, may change with the movement of the object. The symbol for that object is located at the anchor point. **Size/Shape:** Determined by the anchor point, azimuths measured from true north, and the distance (range) in meters. The Left Sector Azimuth is the angle measured from true north to the left sector limit/edge of the Sector Range Fan. The Right Sector Azimuth is the angle measured from true north to the right sector limit/edge of the Sector Range Fan. Multiple distances (ranges) and/or left and right sector limits/edges of the sector, as well as altitude, may be added as required to define the sector. All azimuths are in degrees. All distances (ranges) are in meters. All altitudes are in feet. **Orientation:** The center point is typically centered over the known location of a weapon or sensor system. The orientation may change as the object moves or changes.

TABLE H-V. Command and control areas.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Command and Control Areas Symbol Set Code: 25 Code: **12**0000	N/A	N/A
Area of Operations Symbol Set Code: 25 Code: 12**01**00 Draw Rules: Area1 - Dynamic		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-V. Command and control areas - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Named Area of Interest Symbol Set Code: 25 Code: 12**02**00 Draw Rules: Area1 - Dynamic		
	A geographical area where information is gathered to satisfy specific intelligence requirements.	
Target Area of Interest Symbol Set Code: 25 Code: 12**03**00 Draw Rules: Area1 - Dynamic		
	The geographical area where high-value targets can be acquired and engaged by friendly forces.	
Airfield Zone Symbol Set Code: 25 Code: 12**04**00 Draw Rules: Area20 - Dynamic		
	Note: The Field “H” for this symbol includes type of airfield, length of runway and other pertinent information.	
Base Camp Symbol Set Code: 25 Code: 12**05**00 Draw Rules: Area1 - Dynamic		
	An evolving military facility that supports military operations of a deployed unit and provides the necessary support and services for sustained operations (ATP 3-37.10 / MCRP 3-17.7N).	

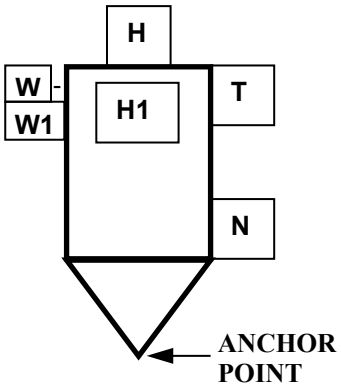
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-V. Command and control areas - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Guerrilla Base Symbol Set Code: 25 Code: 12**06**00 Draw Rules: Area1 - Dynamic		
	A temporary site where guerrilla installations, headquarters, and units are located (ATP 3-05.1).	

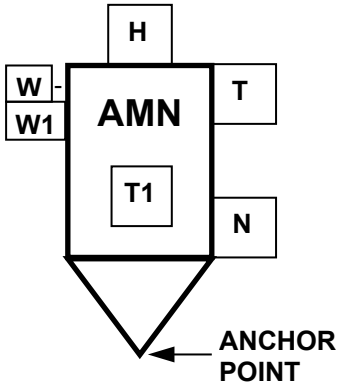
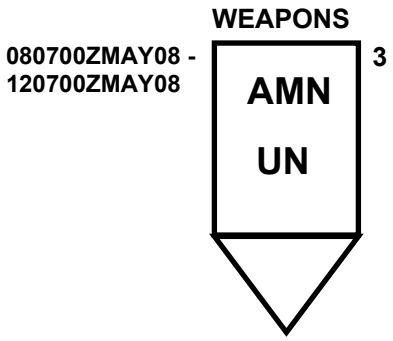
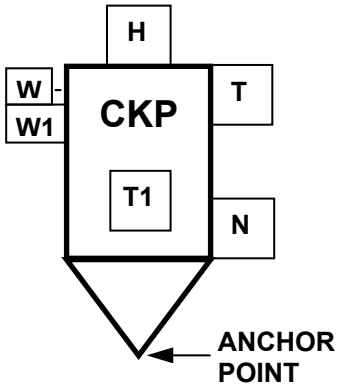
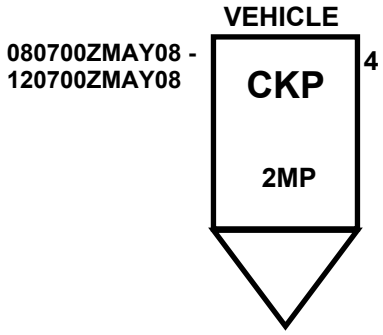


H.5.10 Command and control measure symbols. These symbols are used in the exercise of authority and direction by a properly designated commander over assigned and attached forces in the accomplishment of the mission.

TABLE H-VI. Command and control points.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Command and Control Points Type: Entity Symbol Set Code: 25 Code: **13**0000	N/A	N/A
Action Point (General) Symbol Set Code: 25 Code: 13**01**00 Draw Rules: Point1 - Static		Examples follow



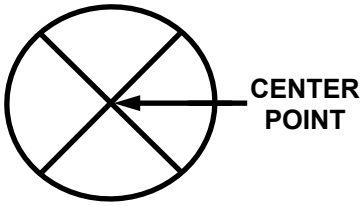



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VI. Command and control points - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Amnesty Point Symbol Set Code: 25 Code: 13**02**00 Draw Rules: Point1 - Static		
Checkpoint Symbol Set Code: 25 Code: 13**03**00 Draw Rules: Point1 - Static		
	Predetermined point on the surface of the earth used as a means of controlling movement, a registration target for fire adjustment, or reference for location.	
Center of Main Effort Symbol Set Code: 25 Code: 13**04**00 Draw Rules: Point2 - Static		
	Note: The symbol can be rotated so that the lines at the top of the symbol are oriented toward the point of main effort.	

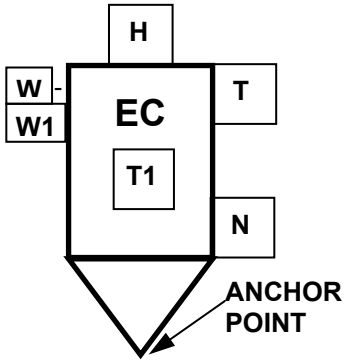
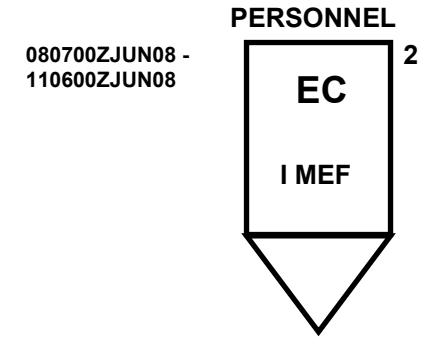
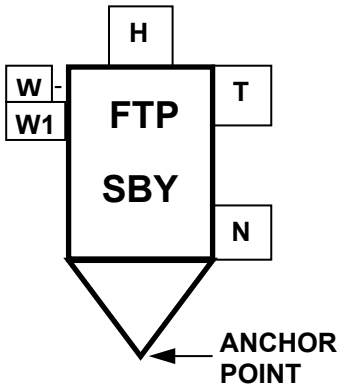
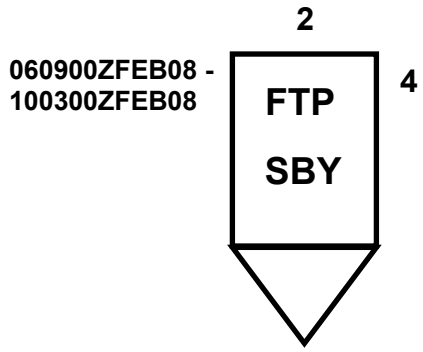
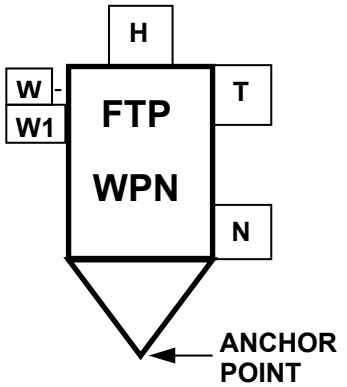
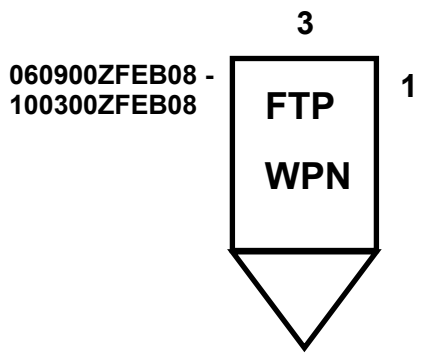
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VI. Command and control points - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Contact Point Symbol Set Code: 25 Code: 13**05**00 Draw Rules: Point2 - Static		
	In land warfare, a point on the terrain, easily identifiable, where two or more units are required to make contact.	
Coordinating Point Symbol Set Code: 25 Code: 13**06**00 Draw Rules: Point2 - Static		
	Designated point at which, in all types of combat, adjacent units/formations must make contact for purposes of control and coordination.	
Decision Point Symbol Set Code: 25 Code: 13**07**00 Draw Rules: Point2 - Static		
	A point in space and time, identified during the planning process, where it is anticipated that the commander must make a decision concerning a specific course of action.	
Distress Call Symbol Set Code: 25 Code: 13**08**00 Draw Rules: Point1 - Static		

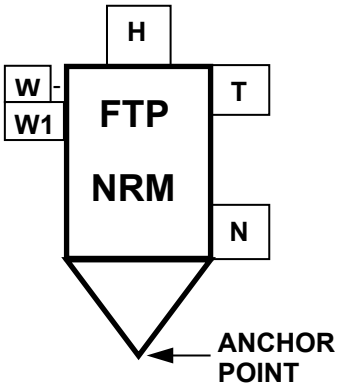
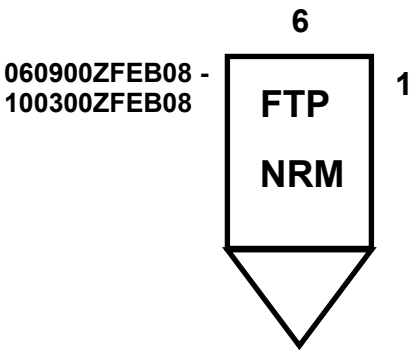
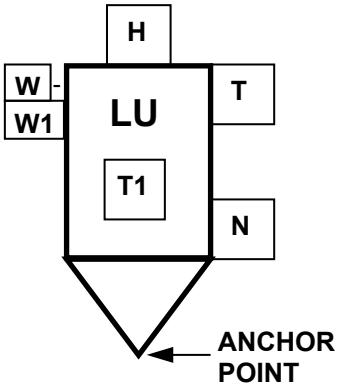
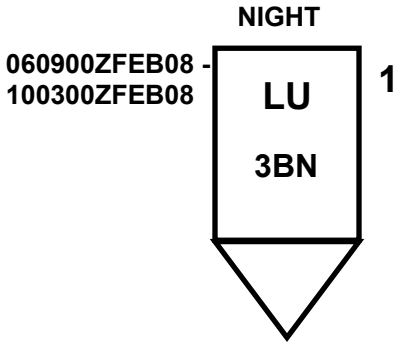
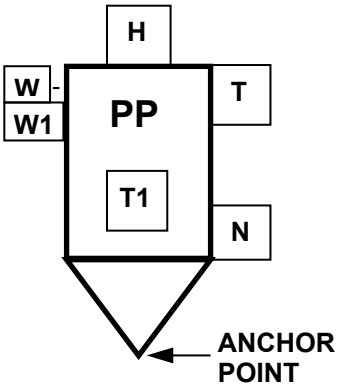
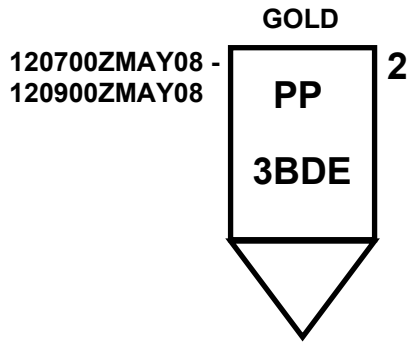
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VI. Command and control points - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Entry Control Point Symbol Set Code: 25 Code: 13**09**00 Draw Rules: Point1 - Static		
Fly-To-Point Symbol Set Code: 25 Code: 13**10**00	N/A	N/A
Fly-To-Point (Sonobuoy) Symbol Set Code: 25 Code: 1310**01** Draw Rules: Point1 - Static		
Fly-To-Point (Weapon) Symbol Set Code: 25 Code: 1310**02** Draw Rules: Point1 - Static		





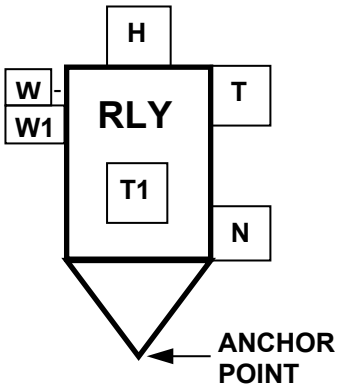
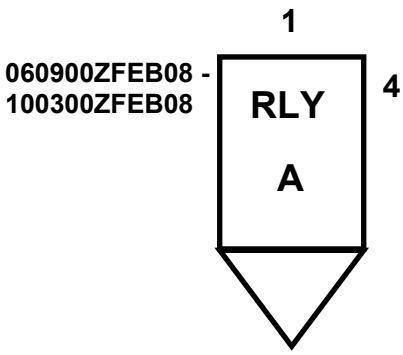
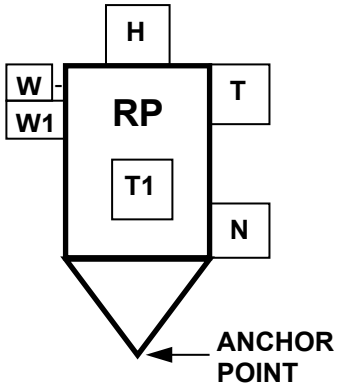
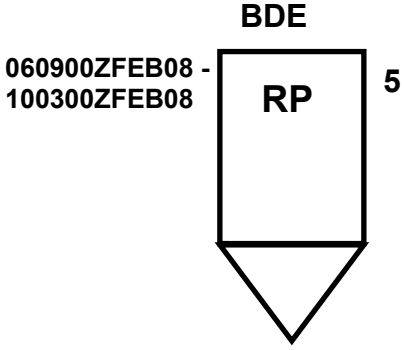
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VI. Command and control points - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Fly-To-Point (Normal) Symbol Set Code: 25 Code: 131**03** Draw Rules: Point1 - Static		
Linkup Point Symbol Set Code: 25 Code: 131**1**00 Draw Rules: Point1 - Static		
	A point where two infiltrating elements in the same or different infiltration lanes are scheduled to meet to consolidate before proceeding with their missions.	
Passage Point Symbol Set Code: 25 Code: 131**2**00 Draw Rules: Point1 - Static		
	A specifically designated place where the passing units will pass through the stationary unit.	

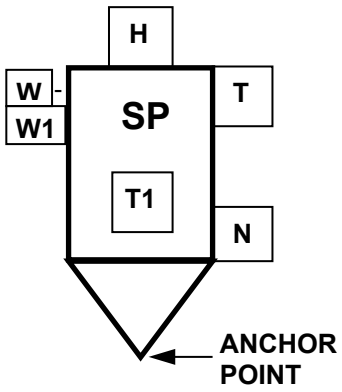
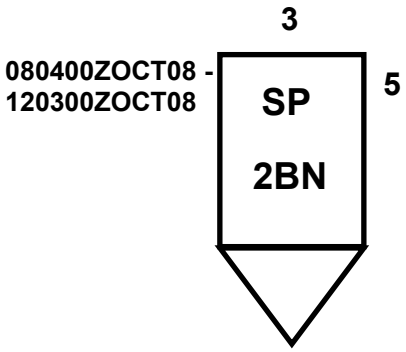




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VI. Command and control points - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Point of Interest Symbol Set Code: 25 Code: 13**1**300 Draw Rules: Point1 - Static		
Point of Interest – Launch Event Symbol Set Code: 25 Code: 1313**01** Draw Rules: Point1 - Static		
Rally Point Symbol Set Code: 25 Code: 13**1**400 Draw Rules: Point1 - Static	 An easily identifiable point on the ground at which units can reassemble and reorganize if they become dispersed.	
Release Point Symbol Set Code: 25 Code: 13**1**500 Draw Rules: Point1 - Static		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VI. Command and control points - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
	In road movements, a well-defined point on a route at which the elements composing a column return under the authority of their respective commanders, each one of these elements continuing its movement towards its own appropriate destination.	
Start Point Symbol Set Code: 25 Code: 131600 Draw Rules: Point1 - Static		
	A well-defined point on a route at which a movement of vehicles begins to be under the control of the commander of this movement. It is at this point that the column is formed by the successive passing, at an appointed time, of each of the elements composing the column. In addition to the principal start point of a column there may be secondary start points for its different elements.	
Special Point Symbol Set Code: 25 Code: 131700 Draw Rules: Point2 - Static		
Waypoint Symbol Set Code: 25 Code: 131800 Draw Rules: Point2 - Static		
	Designated point or series of points loaded and stored in a global positioning system or other electronic navigational aid system to facilitate movement.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.






TABLE H-VI. Command and control points - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Airfield (AEGIS Only) Symbol Set Code: 25 Code: 13**1**900 Draw Rules: Point2 - Static		
Target Handover Symbol Set Code: 25 Code: 13**2**000 Draw Rules: Point2 - Static		
	Depicts a direct fire Target Handover mission is in progress, facilitates orientation of direct fires in order to maximize combat effectiveness and minimize fratricide	
Key Terrain Symbol Set Code: 25 Code: 13**2**100 Draw Rules: Point2 - Static		
	Key Terrain is any locality, or area, the seizure or retention of which affords a marked advantage to either combatant (ATP 2-01.3 / MCRP 2-10B.1).	

H.5.11 Maneuver control measure symbols. Maneuver is the employment of forces on the battlefield through movement in combination with fire, or fire potential, to achieve a position of advantage in respect to the enemy in order to accomplish the mission.





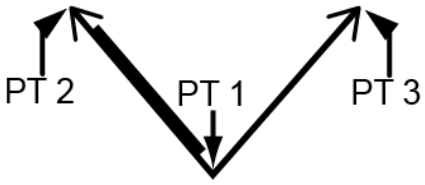

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Maneuver control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Maneuver Lines Symbol Set Code: 25 Code: **14**0000	N/A	N/A
Forward Line of Troops Symbol Set Code: 25 Code: 14**01**00 Draw Rules: Line1 - Dynamic	 A line which indicates the most forward positions of forces in any kind of military operation at a specific time. **Note:** The open side of the arc reflects the reported unit.	 Friendly Present  Friendly Planned or On Order  Enemy Suspected or Templated
Line of Contact A general trace delineating the locations where two opposing forces are engaged. The line of contact symbol is created when both the friendly and enemy forward line of troops symbols are displayed. **Note:** The open side of the arc reflects the reported unit.		









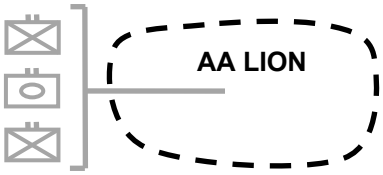
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Maneuver control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Phase Line Symbol Set Code: 25 Code: 14**03**00 Draw Rules: Line2 - Dynamic		
	A line utilized for control and coordination of military operations, usually a terrain feature extending across the zone of action.	
Forward Edge of the Battle Area Symbol Set Code: 25 Code: 14**04**00 Draw Rules: Line2 - Dynamic		
	The foremost limits of a series of areas in which ground combat units are deployed, excluding the areas in which the covering or screening forces are operating, designated to coordinate fire support, the positioning of forces or the maneuver of units.	
Principal Direction of Fire Symbol Set Code: 25 Code: 14**05**00 Draw Rules: Line3 - Dynamic		
Areas		
Maneuver Areas Symbol Set Code: 25 Code: **15**0000	N/A	N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Maneuver control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Area Symbol Set Code: 25 Code: 15**01**00 Draw Rules: Area1 - Dynamic		 Friendly Area  Planned or On Order  Enemy
Assembly Area (AA) Symbol Set Code: 25 Code: 15**02**00 Draw Rules: Area1 - Dynamic		 An area in which a command is assembled preparatory to further action.
Occupied Assembly Area Symbol Set Code: 25 Code: 15**03**00 Draw Rules: Area1 - Dynamic	 **Note**: Although unit symbols are not part of this control measure symbol area, numerous unit symbols can be included in the area for presentation.	 Occupied  Proposed or On Order with Offset Units







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Maneuver control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Action Area Symbol Set Code: 25 Code: 150500	N/A	N/A
Joint Tactical Action Area (JTAA) Symbol Set Code: 25 Code: 150501 Draw Rules: Area1 - Dynamic		
Submarine Action Area (SAA) Symbol Set Code: 25 Code: 150502 Draw Rules: Area1 - Dynamic		
Submarine- Generated Action Area (SGAA) Symbol Set Code: 25 Code: 150503 Draw Rules: Area1 - Dynamic		
Drop Zone (DZ) Symbol Set Code: 25 Code: 150600 Draw Rules: Area1 - Dynamic	 A specified area upon which airborne troops, equipment, or supplies are airdropped.	
Extraction Zone (EZ) Symbol Set Code: 25 Code: 150700 Draw Rules: Area1 - Dynamic	 A specified drop zone used for the delivery of supplies and/or equipment by means of an extraction technique from an aircraft flying very close to the ground.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Maneuver control measure symbols - Continued.







CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Landing Zone (LZ) Symbol Set Code: 25 Code: 150800 Draw Rules: Area1 - Dynamic		
A specified zone used for the landing of aircraft on land, water or deck.		
Pickup Zone (PZ) Symbol Set Code: 25 Code: 150900 Draw Rules: Area1 - Dynamic		
A geographic area used to pick up troops or equipment by helicopter.		
Fortified Area. Symbol Set Code: 25 Code: 151000 Draw Rules: Area1 - Dynamic		
Limited Access Area Symbol Set Code: 25 Code: 151100 Draw Rules: Area2 - Dynamic		
Note: The LAA point symbol will be oriented upright, as shown in the template and example.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.12 Defensive maneuver. Defensive operations defeat an enemy attack, buy time, economize forces, or develop conditions favorable for offensive operations.







H.5.12.1 Areas.

TABLE H-VIII. Defensive control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Battle Position Symbol Set Code: 25 Code: 15**12**00 Draw Rules: Area3 - Dynamic		
A defensive location oriented on a likely enemy avenue of approach.		
Battle Position Prepared (P) but not Occupied Symbol Set Code: 25 Code: 1512**02** Draw Rules: Area3 - Dynamic		
Strong Point Symbol Set Code: 25 Code: 1512**03** Draw Rules: Area4 - Dynamic		
A key point in a defensive position usually strongly fortified and heavily armed with automatic weapons, around which other positions are grouped for its protection.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VIII. Defensive control measure symbols – Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Contain Symbol Set Code: 25 Code: 151**204** Draw Rules: Area5 - Dynamic		
Retain Symbol Set Code: 25 Code: 151**205** Draw Rules: Area6 - Dynamic		
Engagement Area (EA) Symbol Set Code: 25 Code: 151**3**00 Draw Rules: Area1 - Dynamic	 An area where the commander intends to contain and destroy an enemy force with the massed effects of all available weapons and supporting systems.	









H.5.12.2 Observation post. A position from which military observations are made, or fire directed and adjusted and which possesses appropriate communications; may be airborne.

TABLE H-IX. Observation post.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Maneuver Points Symbol Set Code: 25 Code: **16**0000	N/A	N/A

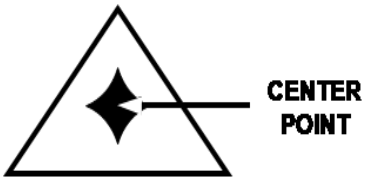




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IX. Observation post.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Observation Post /Outpost (Unspecified) Symbol Set Code: 25 Code: 16**01**00 Draw Rules: Point2 - Static		
Observation Post /Outpost (Specified) Symbol Set Code: 25 Code: 16**02**00 Draw Rules: Point2 - Static	N/A Templates follow.	N/A Examples follow.
Reconnaissance Outpost Symbol Set Code: 25 Code: 16020**1** Draw Rules: Point2 - Static		
Forward Observer Spotter Outpost/ Position Symbol Set Code: 25 Code: 16020**2** Draw Rules: Point2 - Static		
CBRN Observation Outpost Symbol Set Code: 25 Code: 16020**3** Draw Rules: Point2 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IX. Observation post.- Continued.


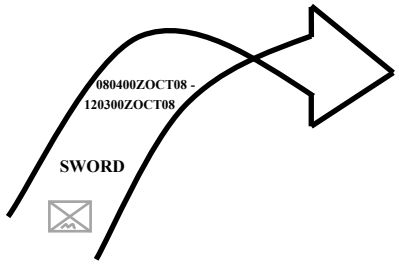
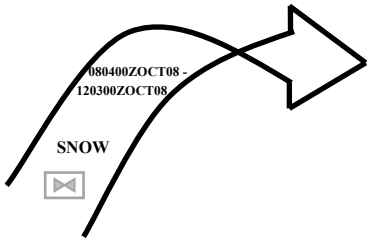

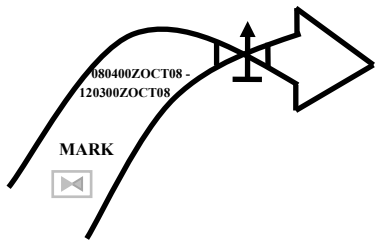
CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Sensor Outpost/Listening Post Symbol Set Code: 25 Code: 160**04** Draw Rules: Point2 - Static		
Combat Outpost Symbol Set Code: 25 Code: 160**05** Draw Rules: Point2 - Static		
Target Reference Point Symbol Set Code: 25 Code: 16**03**00 Draw Rules: Point2 - Static		
	An easily recognizable point on the ground (either natural or manmade) used to initiate, distribute and control fires. Target reference points (TRPs) can also designate the center of an area where the commander plans to distribute or converge the fires of all his weapons rapidly. They are used by task force and below and can further delineate sectors of fire within an engagement area. TRPs are designated using the standard target symbol and numbers issued by the fire support officer. Once designated, TRPs also constitute indirect fire targets.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.13 Offensive maneuver. Offensive operations aim at destroying or defeating an enemy.

H.5.14 Axis of advance. A line of advance assigned for purposes of control; often a road or a group of roads, or a designated series of locations, extending in the direction of the enemy.

TABLE H-X. Offensive Control Measure Symbols.

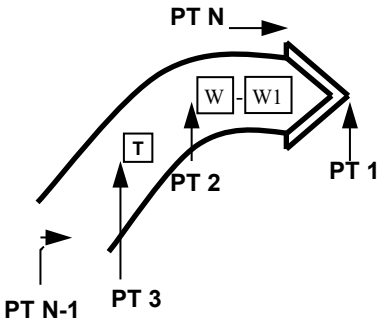

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Axis of Advance Symbol Set Code: 25 Code: 15**14**00	N/A	N/A
Friendly Airborne/ Aviation Symbol Set Code: 25 Code: 1514**01** Draw Rules: Axis1 - Dynamic		 Airborne  Aviation
Attack Helicopter Symbol Set Code: 25 Code: 1514**02** Draw Rules: Axis1 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-X. Offensive Control Measure Symbols - Continued.

<table>
<tr><th>CONTROL MEASURE</th><th>TEMPLATE</th><th>EXAMPLE
Note: Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.</th></tr>
<tr><td rowspan="2">Main Attack

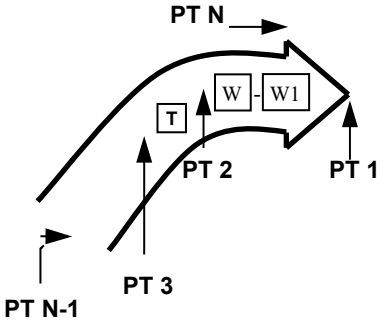

Symbol Set
Code: 25
Code: 15103

Draw Rules:
Axis2 - Dynamic</td><td rowspan="2"> 
</td><td> 

Main Attack - Feint</td></tr>
<tr><td colspan="2">The principal attack or effort into which the commander throws the full weight of the offensive power at his disposal.</td></tr>
<tr><td rowspan="2">Supporting Attack


Symbol Set
Code: 25
Code: 15104

Draw Rules:
Axis2 - Dynamic</td><td> 
</td><td> 

Supporting Attack</td></tr>
<tr><td>An offensive operation carried out in conjunction with a main attack and designed to achieve one or more of the following:

a. deceive the enemy;
b. destroy or pin down enemy forces which could interfere with the main attack;
c. control ground whose occupation by the enemy will hinder the main attack; or
d. force the enemy to commit reserves prematurely or in an indecisive area.</td><td> 

Planned or On Order









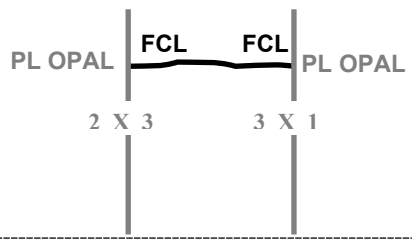
 

Enemy Templated or Suspected</td></tr>
</table>

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

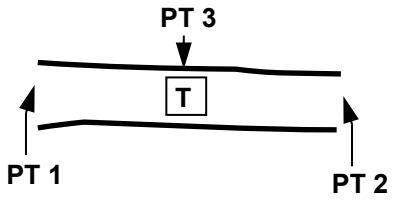


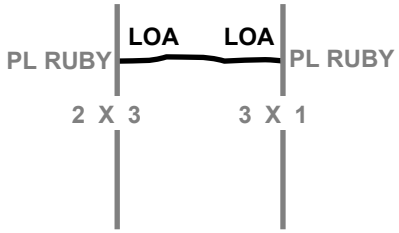

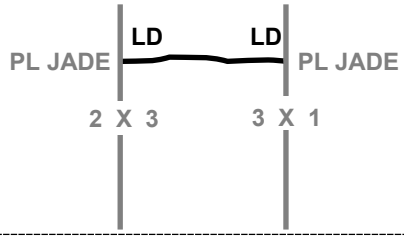

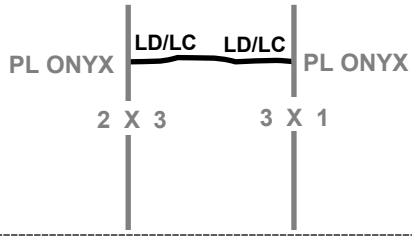
H.5.14.1 Direction of attack. A specific direction or route that the main attack or center of mass of the unit will follow.

TABLE H-XI. Offensive Control Measure Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Friendly Aviation Symbol Set Code: 25 Code: 140601 Draw Rules: Line1 - Dynamic		
Friendly Direction of Main Attack Symbol Set Code: 25 Code: 140602 Draw Rules: **Line1 - Dynamic**		  Axis of Advance - Feint
Friendly Direction of Supporting Attack Symbol Set Code: 25 Code: 140603 Draw Rules: **Line1 – Dynamic**		 Direction of Supporting Attack  Planned or On Order  Enemy Templated or Suspected
Final Coordination Line Symbol Set Code: 25 Code: 140700 Draw Rules: **Line2 - Dynamic**		
	A line close to the enemy position used to coordinate the lifting or shifting of supporting fires with the final deployment of maneuver elements.	


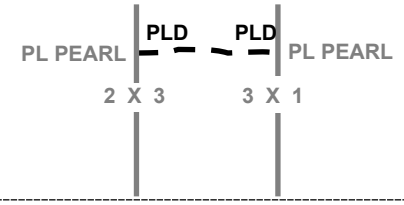




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XI. Offensive Control Measure Symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Infiltration Lane Symbol Set Code: 25 Code: 140800 Draw Rules: Polyline1 - **Dynamic**		
A control measure that coordinates forward and lateral movement of infiltrating units and fixes fire planning responsibilities.		
Limit of Advance Symbol Set Code: 25 Code: 140900 Draw Rules: Line2 - **Dynamic**		
An easily recognized terrain feature beyond which attacking elements will not advance.		
Line of Departure Symbol Set Code: 25 Code: 141000 Draw Rules: Line2 - **Dynamic**		
In land warfare, a line designated to coordinate the departure of attack elements. In amphibious warfare, a suitably marked offshore coordinating line to assist assault craft to land on designated beaches at scheduled times.		
Line of Departure / Line of Contact Symbol Set Code: 25 Code: 141100 Draw Rules: Line2 - **Dynamic**		
The designation of forward friendly positions as the line of departure when opposing forces are in contact.		


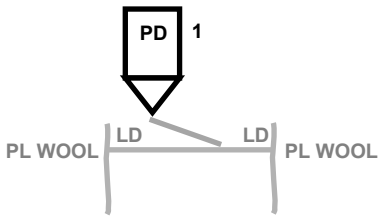
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XI. Offensive Control Measure Symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Probable Line of Deployment Symbol Set Code: 25 Code: 141200 Draw Rules: Line2 - Dynamic		
	A line selected on the ground, usually the last covered and concealed position prior to the objective and forward of the line of departure, where attacking units deploy prior to beginning an assault; it is generally used under conditions of limited visibility. **Note**: The dashed lines in this symbol shall be displayed in present and anticipated status.	
Areas		
Assault Position Symbol Set Code: 25 Code: 151500 Draw Rules: **Area1 - Dynamic**		
	That position between the line of departure and the objective in an attack from which forces assault the objective. Ideally, it is the last covered and concealed position before reaching the objective.	
Attack Position The last position occupied by the assault echelon before crossing the start line/line of departure. Symbol Set Code: 25 Code: 151600 Draw Rules: **Area1 - Dynamic**	 	 
	Note: The ‘A‘ modifier is used only used if a unit must stop in the attack position. Offset indicator may also be used.	
Objective Area Symbol Set Code: 25 Code: 151700 Draw Rules: **Area1 - Dynamic**		
	A defined geographical area within which is located an objective to be captured or reached by the military forces. This area is defined by competent authority for purposes of command and control.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.



TABLE H-XI. Offensive Control Measure Symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Points		
Point of Departure A specific place where a unit will cross the line of departure. Symbol Set Code: 25 Code: 16**04**00 Draw Rules: **Point1 - Static**		
	Note: The offset indicator is used in the example to allow the viewer to better see the LD. It is not required.	

H.5.15 Maneuver control measure symbols.







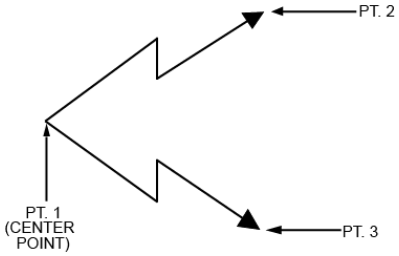

H.5.15.1 Maneuver control measure symbols. The employment of forces on the battlefield through movement in combination with fire, or fire potential, to achieve a position of advantage in respect to the enemy in order to accomplish the mission.

TABLE H-XII. Maneuver control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Areas		
Encirclement The loss of freedom of maneuver resulting from enemy control of all ground routes of evacuation and reinforcement. Symbol Set Code: 25 Code: 15**18**00 Draw Rules: Area1 - Dynamic	N/A **Note**: Although unit symbols are not part of a control measure symbol area, numerous unit symbols can be included in the area for presentation.	 Friendly  Enemy







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XII. Maneuver control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Penetration Box Symbol Set Code: 25 Code: 151900 Draw Rules: Area1 - Dynamic		
Attack By Fire Position Symbol Set Code: 25 Code: 152000 Draw Rules: Area7 - Dynamic		
Support by Fire Position Symbol Set Code: 25 Code: 152100 Draw Rules: Area8 - Dynamic		
Search Area/Reconnaissance Area Symbol Set Code: 25 Code: 152200 Draw Rules: Area21 - Dynamic		

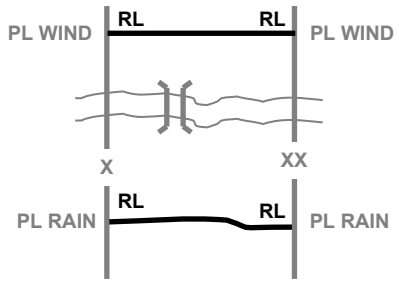


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XII. Maneuver control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Airhead Line Symbol Set Code: 25 Code: 141300 Draw Rules: Area1 - Dynamic	 AIRHEAD LINE	 AIRHEAD LINE
	A line denoting the limits of the objective area for an airborne assault. Airhead: A designated area in a hostile or threatened territory which, when seized and held, ensures the continuous air landing of troops and materiel and provides the maneuver space necessary for projected operations. Normally it is the area seized in the assault phase of an airborne operation.	
Lines		
Bridgehead Line (BL) The limit of the objective area in the development of the bridgehead. Symbol Set Code: 25 Code: 141400 Draw Rules: Line2 - Dynamic	 	
Holding Line (HL) Symbol Set Code: 25 Code: 141500 Draw Rules: Line2 - Dynamic	 	
	In retrograde river crossing operations, the outer limit of the area established between the enemy and the water obstacle to preclude direct and observed indirect fires into the crossings.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XII. Maneuver control measure symbols - Continued.

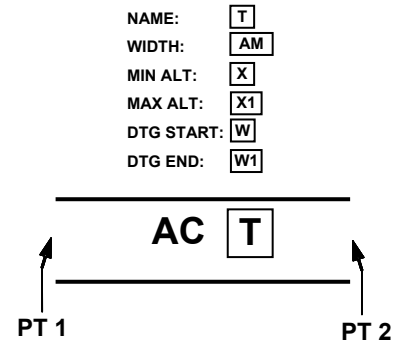
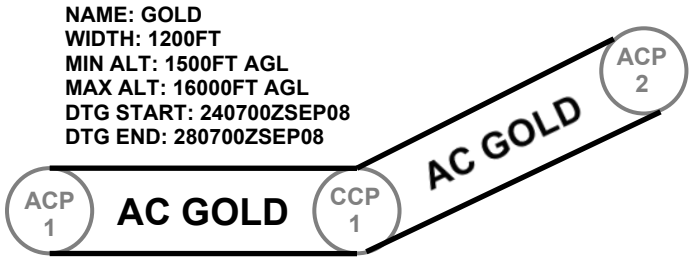
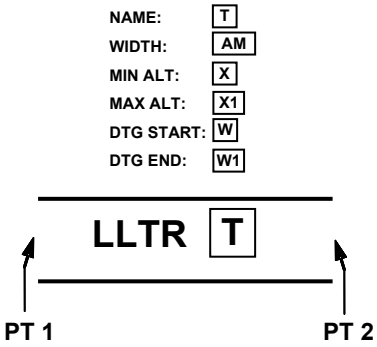
CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Release Line Symbol Set Code: 25 Code: 141600 Draw Rules: Line2 - Dynamic		
	Phase line used in river crossing operations that delineates a change in the headquarters controlling movement.	
Ambush Symbol Set Code: 25 Code: 141700 Draw Rules: Line29 - Dynamic		
	A surprise attack by fire from concealed positions on a moving or temporarily halted enemy.	

H.5.16 Airspace control measures (means).

H.5.16.1 Airspace control measures (means). Are control measures used by NATO to segregate, control and/or reserve airspace for allied operations. Airspace control means are used to enhance the effectiveness of accomplishing the joint force commander's objectives; to prevent mutual interference; to facilitate air defense identification; to prevent fratricide; and to help in safely accommodating the flow of all air traffic in the area of operations. In general terms, airspace control means can be broken down into the following groups: points, lines, air corridors and routes and areas.

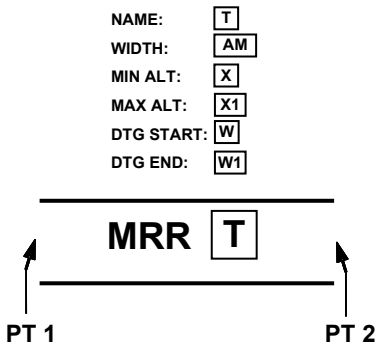
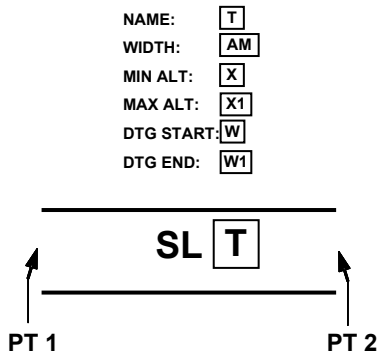
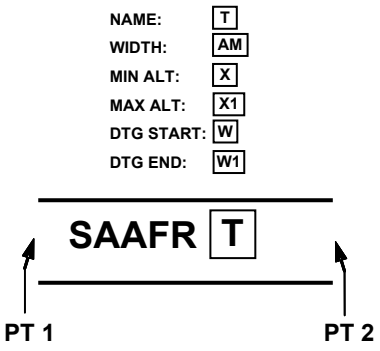
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Corridors (Areas)		
Airspace Control (Corridors) Areas Symbol Set Code: 25 Code: **17**0000	N/A	N/A
Air Corridor Symbol Set Code: 25 Code: 17**01**00 Draw Rules: Corridor1 - Dynamic	 A restricted air route of travel specified for use by friendly aircraft and established for the purpose of preventing friendly aircraft from being fired on by friendly forces.	NAME: GOLD WIDTH: 1200FT MIN ALT: 1500FT AGL MAX ALT: 20000FT AGL DTG START: 270600ZMAY08 DTG END: 271845ZMAY08 
Air Corridor with Multiple Segments		
Low-Level Transit Route Symbol Set Code: 25 Code: 17**02**00 Draw Rules: Corridor1 - Dynamic	 A temporary corridor of defined dimensions established in the forward area to minimize the risk to friendly aircraft from friendly air defenses or surface forces.	NAME: COBRA WIDTH: 300FT MIN ALT: 150FT AGL MAX ALT: 3000FT AGL DTG START: 240500ZOCT08 DTG END: 241845ZOCT08 

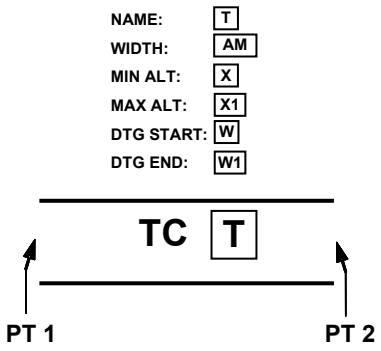
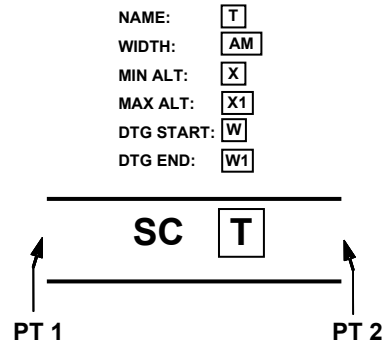


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Minimum-Risk Route Symbol Set Code: 25 Code: 17**03**00 Draw Rules: Corridor1 - Dynamic		**NAME: RED** **WIDTH: 1500FT** **MIN ALT: 3000FT AGL** **MAX ALT: 21000FT AGL** **DTG START: 110200ZSEP08** **DTG END: 140300ZSEP08** 
	A temporary route of defined dimensions recommended for use by fixed-wing platforms to route them between transit routes and the rear of the forward area and their operations areas. (AJP-3.3.5)	
Safe Lane Symbol Set Code: 25 Code: 17**04**00 Draw Rules: Corridor1 - Dynamic		**NAME: LION** **WIDTH: 600FT** **MIN ALT: 600FT AGL** **MAX ALT: 3000FT AGL** **DTG START: 240730ZFEB08** **DTG END: 280900ZFEB08** 
	A bi-directional lane connecting an airbase, landing site and/or base defense zone to adjacent routes/corridors. Safe lanes may also be used to connect adjacent activated routes/ corridors. (AJP-3.3.5)	
Standard Use Army Aircraft Flight Route (SAAFR) Symbol Set Code: 25 Code: 17**05**00 Draw Rules: Corridor1 - Dynamic		**NAME: BLUE** **WIDTH: 600FT** **MIN ALT: 150FT AGL** **MAX ALT: 3000FT AGL** **DTG START: 260930ZMAY08** **DTG END: 280700ZMAY08** 
	Route established below the coordination level to facilitate movement of army aviation assets in the forward area in direct support of ground operations. (AJP-3.3.5)	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Transit Corridors Symbol Set Code: 25 Code: 17**06**00 Draw Rules: Corridor1 - Dynamic		**NAME: KING** **WIDTH: 900FT** **MIN ALT: 2100FT AGL** **MAX ALT: 6000FT AGL** **DTG START: 260700ZMAR08** **DTG END: 280700ZMAR08** 
	Bi-directional and established to route aircraft through air defenses, in the rear area where appropriate, with minimum risk.	
Special Corridor Symbol Set Code: 25 Code: 17**07**00 Draw Rules: Corridor1 - Dynamic		**NAME: DRAGON** **WIDTH: 1200FT** **MIN ALT: 1500FT AGL** **MAX ALT: 12000FT AGL** **DTG START: 200700ZMAY08** **DTG END: 210700ZMAY08** 
	In air operations, an air corridor established to accommodate the special routing requirements of specific missions. (AJP-3.3.5)	
Areas (Zones)		
Base Defense Zone. Symbol Set Code: 25 Code: 17**08**00 Draw Rules: Area22 - Static		
	A zone established around airbases to enhance the effectiveness of local ground based air defense systems. (AJP-3.3.5)	





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
High-Density Airspace Control Zone Symbol Set Code: 25 Code: 17**09**00 Draw Rules: Area1 - Dynamic		
	Airspace of defined dimensions, designated by the airspace control authority, in which there is a concentrated employment of numerous and varied weapons/airspace users.	
Restricted Operations Zones		
Restricted Operations Zone (ROZ) Symbol Set Code: 25 Code: 17**10**00 Draw Rules: Area1 - Dynamic		
	Airspace of defined dimensions, designated by the airspace control authority, in response to specific operational situations/requirements within which the operation of one or more airspace users is restricted. **Note:** This is the definition for restricted operations area.	
Air-to-Air Restricted Operations Zone (AARROZ) Symbol Set Code: 25 Code: 17**11**00 Draw Rules: Area1 - Dynamic		
Unmanned Aircraft Restricted Operations Zone (UA-ROZ) Symbol Set Code: 25 Code: 17**12**00 Draw Rules: Area1 - Dynamic		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Weapons Engagement Zones		
Weapon Engagement Zone Symbol Set Code: 25 Code: 171300 Draw Rules: Area1 - Dynamic		
	In air defense, airspace of defined dimensions within which the responsibility for engagement normally rests with a particular weapon system. **Note**: Includes FEZ, JEZ, MEZ (LOMEZ and HIMEZ), SHORADEZ.	
Fighter Engagement Zone (FEZ) Symbol Set Code: 25 Code: 171400 Draw Rules: Area1 - Dynamic		
	In air defense, airspace of defined dimensions within which the responsibility for engagement normally rests with a particular weapon system.	
Joint Engagement Zone (JEZ) Symbol Set Code: 25 Code: 171500 Draw Rules: Area1 - Dynamic		
	In air defense, that airspace of defined dimensions within which multiple air defense systems (surface-to-air missiles and aircraft) are simultaneously employed to engage air threats.	

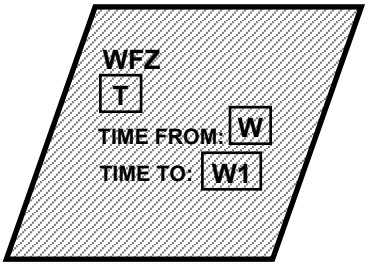




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Missile Engagement Zone (MEZ) Symbol Set Code: 25 Code: 171600 Draw Rules: Area1 - Dynamic		
	In air defense, airspace of defined dimensions within which the responsibility for engagement normally rests with a particular weapon system.	
Low (Altitude) Missile Engagement Zone (LOMEZ) Symbol Set Code: 25 Code: 171700 Draw Rules: Area1 - Dynamic		
High (Altitude) Missile Engagement Zone (HIMEZ) Symbol Set Code: 25 Code: 171800 Draw Rules: Area1 - Dynamic		
Short Range Air Defense Engagement Zone (SHORADEZ) Symbol Set Code: 25 Code: 171900 Draw Rules: Area1 - Dynamic		
	In air defense, airspace of defined dimensions within which the responsibility for engagement normally rests with a particular weapon system. **Note**: Replaces Forward Area Air Defense Engagement Zone (FAADEZ)	










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Weapons Free Zone Symbol Set Code: 25 Code: 17**2**000 Draw Rules: Area1 - Dynamic		
	An air defense zone established around key assets or facilities other than airbases which merit special protection by ground based air defense assets where weapons may be fired at any target not positively identified as friendly. (AJP-3.3.5) **Note:** Upward diagonal lines are part of the fill.	
Points		
Airspace Control Points Symbol Set Code: 25 Code: **18**0000 Draw Rules: Point2 - Static		
Air Control Point Symbol Set Code: 25 Code: 18**01**00 Draw Rules: Point2 - Static		
Communications Check Point Symbol Set Code: 25 Code: 18**02**00 Draw Rules: Point2 - Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Downed Aircrew Pick-Up Pont Symbol Set Code: 25 Code: 18**03**00 Draw Rules: Point1 - Static		
Pop-Up Point (PUP) Symbol Set Code: 25 Code: 18**04**00 Draw Rules: Point2 - Static		
	The location at which aircraft quickly gain altitude for target acquisition and engagement.	
Air Control Rendezvous Symbol Set Code: 25 Code: 18**05**00 Draw Rules: Point2 - Static		
TACAN Symbol Set Code: 25 Code: 18**06**00 Draw Rules: Point2 - Static		
CAP Station Symbol Set Code: 25 Code: 18**07**00 Draw Rules: Point2 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
AEW Station Symbol Set Code: 25 Code: 18**08**00 Draw Rules: Point2 - Static		
ASW (Helo and F/W) Station Symbol Set Code: 25 Code: 18**09**00 Draw Rules: Point2 - Static		
Strike Initial Point Symbol Set Code: 25 Code: 18**10**00 Draw Rules: Point2 - Static		
Replenishment Station Symbol Set Code: 25 Code: 18**11**00 Draw Rules: Point2 - Static		
Tanking Symbol Set Code: 25 Code: 18**12**00 Draw Rules: Point2 - Static		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Antisubmarine Warfare, Rotary Wing Symbol Set Code: 25 Code: 18**13**00 Draw Rules: Point2 - Static		
SUCAP – Fixed Wing Symbol Set Code: 25 Code: 18**14**00 Draw Rules: Point2 - Static		
SUCAP – Rotary Wing Symbol Set Code: 25 Code: 18**15**00 Draw Rules: Point2 - Static		
MIW – Fixed Wing Symbol Set Code: 25 Code: 18**16**00 Draw Rules: Point2 - Static		
MIW – Rotary Wing Symbol Set Code: 25 Code: 18**17**00 Draw Rules: Point2 - Static		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Tomcat Symbol Set Code: 25 Code: 18**18**00 Draw Rules: Point2 - Static		
Rescue Symbol Set Code: 25 Code: 18**19**00 Draw Rules: Point2 - Static		
Unmanned Aerial System (UAS/UA) Symbol Set Code: 25 Code: 18**20**00 Draw Rules: Point2 - Static		
VTUA Symbol Set Code: 25 Code: 18**21**00 Draw Rules: Point2 - Static		
Orbit Symbol Set Code: 25 Code: 18**22**00 Draw Rules: Point2 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Orbit – Figure Eight Symbol Set Code: 25 Code: 18**23**00 Draw Rules: Point2 - Static		
Orbit – Race Track Symbol Set Code: 25 Code: 18**24**00 Draw Rules: Point2 - Static		
Orbit – Random Closed Symbol Set Code: 25 Code: 18**25**00 Draw Rules: Point2 - Static		
Lines		
Airspace Control Lines Symbol Set Code: 25 Code: **19**0000	N/A	N/A
Identification, Friend-or-Foe (IFF) Off Line Symbol Set Code: 25 Code: 19**01**00 Draw Rules: Line2 - Dynamic	 Line demarking where friendly aircraft en-route to targets stop emitting an IFF signal. (AJP-3.3.5)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIII. Airspace control means - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Identification, Friend-or-Foe (IFF) On Line Symbol Set Code: 25 Code: 19**02**00 Draw Rules: Line2 - Dynamic	 Line demarking where friendly aircraft returning to friendly territory start emitting an IFF signal. (AJP-3.3.5)	

H.5.17 Maritime control measures.







H.5.17.1 Maritime control measures. Are used by NATO to help the maritime component commander and his subordinate commanders to direct action by establishing responsibilities and to prevent ships, units, or aircraft from impeding one another and to impose necessary coordination. They aide the cooperation among forces without imposing needless restrictions on their freedom of action. In general terms, maritime control measures can be broken down into the following groups: points, lines and areas.

TABLE H-XIV. Maritime control measures.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Maritime Control Area Symbol Set Code: 25 Code: **20**0000	N/A	N/A
Launch Area Symbol Set Code: 25 Code: 20**01**00	N/A	N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Launch Area, Ellipse/Circle (AEGIS only) Symbol Set Code: 25 Code: 200**01** Draw Rules: Ellipse1 - Dynamic		
	Note: Launch Area may be depicted as orange (RGB: 255,155,0) where, the area fill is 75% transparent.	
Defended Area Symbol Set Code: 25 Code: 20**02**00	N/A	N/A
Defended Area, Ellipse/Circle (AEGIS only) Symbol Set Code: 25 Code: 2002**01** Draw Rules: Ellipse1 - Dynamic		
	Note: Defended Area may be depicted as gray (RGB:85,119,136) where the gray area fill is 75% transparent.	
Defended Area, Rectangle (AEGIS only) Symbol Set Code: 25 Code: 2002**02** Draw Rules: Rectangular1 - Dynamic		
	Note: Defended Area may be depicted as gray (RGB:85,119,136) where the gray area fill is 75% transparent.	




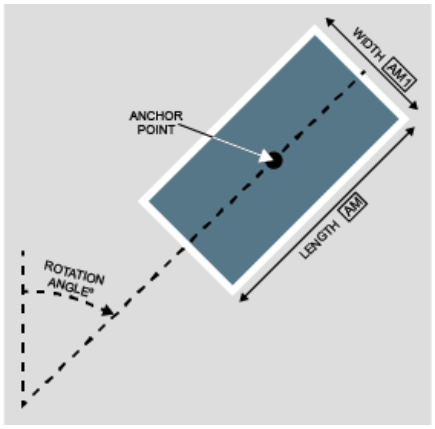
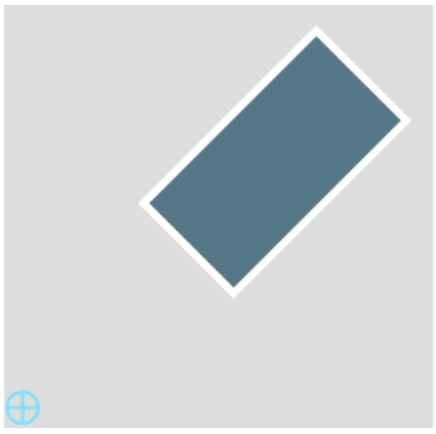
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
No Attack (NOTACK) Zone (AEGIS only) Symbol Set Code: 25 Code: 20**03**00 Draw Rules: Circular1 - Dynamic		
Ship Area of Interest, Maneuver Areas (AEGIS only) **Note**: Maneuver areas can only occur within a Ship AOI graphic. Symbol Set Code: 25 Code: 20**04**00 Draw Rules: Point3 - Dynamic		 **Note:** Gray background is used to show white border and is not part of the symbol
Ship Area of Interest, Eclipse/Circle (AEGIS only) Symbol Set Code: 25 Code: 2004**01** Draw Rules: Ellipse1 - Dynamic		  White-Colored Option

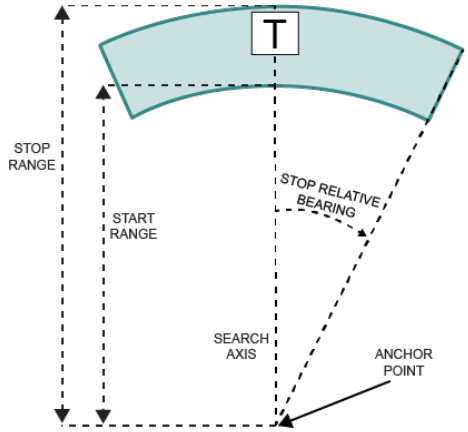
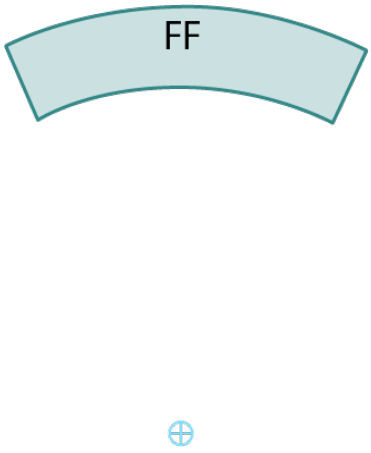



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Ship Area of Interest, Rectangle (AEGIS only) Symbol Set Code: 25 Code: 200**402** Draw Rules: Rectangular1 - Dynamic	 **AOI**	 **AOI**  **AOI** White-Colored Option
Active Maneuver Area (AEGIS only) Symbol Set Code: 25 Code: 20**0500** Draw Rules: Point2 - Static	 CENTER POINT	
Cued Acquisition Doctrine (AEGIS only) Symbol Set Code: 25 Code: 20**0600** Draw Rules: Point17 – Dynamic	  **Note1**: Cued Acquisition Doctrine symbol has a white border (RGB: 255,255,255) with a 75% transparent Gray fill (RGB: 85.119,136) **Note2:** Gray background is used to show white border and is not part of the symbol	










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Radar Search Doctrine (AEGIS only) Symbol Set Code: 25 Code: 20**0**700 Draw Rules: Point18 - Dynamic	 **Note:** RSD Graphic has a dark cyan border (RGB: 51,136,136) with a 75% transparent dark cyan fill (RGB: 51,136,136)	
Maritime Control Points Symbol Set Code: 25 Code: **21**0000	N/A	N/A
Plan Ship Symbol Set Code: 25 Code: 21**0**100 Draw Rules: Point2 - Static		
Aim Point Symbol Set Code: 25 Code: 21**0**200 Draw Rules: Point2 - Static		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Defended Asset Symbol Set Code: 25 Code: 21**0**300 Draw Rules: Point2 - Static		
Drop Point Symbol Set Code: 25 Code: 21**0**400 Draw Rules: Point4 - Static		
Entry Point Symbol Set Code: 25 Code: 21**0**500 Draw Rules: Point5 - Static		
Air Detonation Symbol Set Code: 25 Code: 21**0**600 Draw Rules: Point2 - Static		
Ground Zero Symbol Set Code: 25 Code: 21**0**700 Draw Rules: Point6 - Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Impact Point Symbol Set Code: 25 Code: 21**08**00 Draw Rules: Point2 - Static		
Predicted Impact Point Symbol Set Code: 25 Code: 21**09**00 Draw Rules: Point2 - Static		
Launched Torpedo (AEGIS only) Symbol Set Code: 25 Code: 21**10**00 Draw Rules: Point7 - Static		
Missile Detection Point Symbol Set Code: 25 Code: 21**11**00 Draw Rules: Point7 - Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Sub-Surface Warfare		
Acoustic Countermeasure (Decoy) (AEGIS only) Symbol Set Code: 25 Code: 211200 Draw Rules: Point7 - Static		
Electronic Countermeasures (ECM) Decoy (AEGIS only) Symbol Set Code: 25 Code: 211300 Draw Rules: Point2 - Static		
Brief Contact Symbol Set Code: 25 Code: 211400 Draw Rules: Point7 - Static		
Datum Lost Contact Symbol Set Code: 25 Code: 211500 Draw Rules: Point2 - Static	 **Note:** The symbol will be oriented as shown above and will be centered over the datum.	









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
BT Buoy Drop Symbol Set Code: 25 Code: 21**1**600 Draw Rules: Point9 - Static		
Reported Bottomed Sub Symbol Set Code: 25 Code: 21**1**700 Draw Rules: Point2 - Static		
Moving Haven Symbol Set Code: 25 Code: 21**1**800 Draw Rules: Point2 - Static		
Screen Center Symbol Set Code: 25 Code: 21**1**900 Draw Rules: Point2 - Static		
Lost Contact Symbol Set Code: 25 Code: 21**2**000 Draw Rules: Point7 - Static		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Sinker Symbol Set Code: 25 Code: 21**2**100 Draw Rules: Point7 - Static		
Trial Track Symbol Set Code: 25 Code: 21**2**200 Draw Rules: Point7 - Static		
Fix		
Acoustic Fix Symbol Set Code: 25 Code: 21**2**300 Draw Rules: Point2 - Static		
Electromagnetic Fix Symbol Set Code: 25 Code: 21**2**400 Draw Rules: Point2 - Static		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Electromagnetic - Magnetic Anomaly Detection (MAD) Symbol Set Code: 25 Code: 21**25**00 Draw Rules: Point2 - Static		
Optical Fix Symbol Set Code: 25 Code: 21**26**00 Draw Rules: Point2 - Static		
Formation Symbol Set Code: 25 Code: 21**27**00 Draw Rules: Point2 - Static		
Harbor Symbol Set Code: 25 Code: 21**28**00 Draw Rules: Point8 - Static	 **Note**: Normally, the H field has four possible entries as shown in the harbor entrance point entry below. However, a user can use this symbol to define a new type of point if the preceding selections are not sufficient.	











Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE		EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Harbor Entrance Point Symbol Set Code: 25 Code: 21**29**00 Draw Rules: Point8 - Static	A Code: 2129**01**	Q Code: 2129**02**	 Must be used in conjunction with the harbor control measure symbol.
	X Code: 2129**03**	Y Code: 2129**04**	
Search			
Dip Position Symbol Set Code: 25 Code: 21**30**00 Draw Rules: Point2 - Static			
Search Symbol Set Code: 25 Code: 21**31**00 Draw Rules: Point2 - Static			
Search Area Symbol Set Code: 25 Code: 21**32**00 Draw Rules: Point2 - Static			
Search Center Symbol Set Code: 25 Code: 21**33**00 Draw Rules: Point2 - Static			









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Navigational Reference Point Symbol Set Code: 25 Code: 21**34**00 Draw Rules: Point2 - Static		
Sonobuoys		
Sonobuoy Symbol Set Code: 25 Code: 21**35**00 Draw Rules: Point10 - Static		
Ambient Noise Sonobuoy Symbol Set Code: 25 Code: 2135**01** Draw Rules: Point10 - Static		
Air Transportable Communication (ATAC) Symbol Set Code: 25 Code: 2135**02** Draw Rules: Point10 - Static		
Barra Symbol Set Code: 25 Code: 2135**03** Draw Rules: Point10 - Static		











Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Bathythermo-graph Transmitting Sonobuoy (BT) Symbol Set Code: 25 Code: 213**504** Draw Rules: Point10 - Static		
Command Active Multi-Beam Sonobuoy (CAMBS) Symbol Set Code: 25 Code: 213**505** Draw Rules: Point10 - Static		
Command Active Sonobuoy Directional Command Active Sonobuoy System (CASS) Symbol Set Code: 25 Code: 213**506** Draw Rules: Point10 - Static		
Directional Frequency Analyzing and Recording (DIFAR) Symbol Set Code: 25 Code: 213**507** Draw Rules: Point10 - Static		











Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Directional Command Active Sonobuoy System (DICASS) Symbol Set Code: 25 Code: 213**508** Draw Rules: Point10 - Static		
Expendable Reliable Acoustic Path Sonobuoy (ERAPS) Symbol Set Code: 25 Code: 213**509** Draw Rules: Point10 - Static		
Expired Sonobuoy Symbol Set Code: 25 Code: 213**510** Draw Rules: Point10 - Static		
Kingpin Sonobuoy Symbol Set Code: 25 Code: 213**511** Draw Rules: Point10 - Static		
Low Frequency Analysis and Recording Sonobuoy (LOFAR) Symbol Set Code: 25 Code: 213**512** Draw Rules: Point10 - Static		











Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Pattern Center Sonobuoy Symbol Set Code: 25 Code: 2135**13** Draw Rules: Point10 - Static		
Range Only Sonobuoy Symbol Set Code: 25 Code: 2135**14** Draw Rules: Point10 - Static		
Vertical Line Array Directional Frequency Analysis and Recording (DIFAR) Sonobuoy Symbol Set Code: 25 Code: 2135**15** Draw Rules: Point10 - Static		
Reference Points		
Reference Point Symbol Set Code: 25 Code: 21**3**600 Draw Rules: Point2 - Static		
Special Point Symbol Set Code: 25 Code: 21**3**700 Draw Rules: Point2 - Static		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Navigational Reference Point Symbol Set Code: 25 Code: 21**38**00 Draw Rules: Point2 - Static		
Data Link Reference Point Symbol Set Code: 25 Code: 21**39**00 Draw Rules: Point2 - Static		
Vital Area Center Symbol Set Code: 25 Code: 21**41**00 Draw Rules: Point2 - Static		
Corridor Tab Point Symbol Set Code: 25 Code: 21**42**00 Draw Rules: Point2 - Static		
Enemy Point Symbol Set Code: 25 Code: 21**43**00 Draw Rules: Point2 - Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Marshall Point Symbol Set Code: 25 Code: 214400 Draw Rules: Point2 - Static		
Position and Intended Movement (PIM) Symbol Set Code: 25 Code: 214500 Draw Rules: Point2 - Static		
Pre-Landfall Waypoint Symbol Set Code: 25 Code: 214600 Draw Rules: Point2 - Static		
Estimated Position (EP) Symbol Set Code: 25 Code: 214700 Draw Rules: Point2 - Static		
Waypoint Symbol Set Code: 25 Code: 214800 Draw Rules: Point2 - Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Sea subsurface Stations		
General Sea Subsurface Station Symbol Set Code: 25 Code: 21**4**900 Draw Rules: Point2 - Static		
Submarine Sea Subsurface Station Symbol Set Code: 25 Code: 21**5**000 Draw Rules: Point2 - Static		
Submarine Antisubmarine Warfare Sea Subsurface Station Symbol Set Code: 25 Code: 21**5**100 Draw Rules: Point2 - Static		
Unmanned Underwater Vehicle Sea Subsurface Station Symbol Set Code: 25 Code: 21**5**200 Draw Rules: Point2 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Subsurface Station Symbol Set Code: 25 Code: 215300 Draw Rules: Point2 - Static		
Mine Warfare Unmanned Underwater Vehicle Sea Subsurface Station Symbol Set Code: 25 Code: 215400 Draw Rules: Point2 - Static		
Surface Warfare Unmanned Underwater Vehicle Sea Subsurface Station Symbol Set Code: 25 Code: 215500 Draw Rules: Point2 - Static		
Sea Surface Stations		
General Sea Surface Station Symbol Set Code: 25 Code: 215600 Draw Rules: Point2 - Static		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Antisubmarine Warfare (ASW) Sea Surface Station Symbol Set Code: 25 Code: 21**5**700 Draw Rules: Point2 - Static		
Mine Warfare Sea Surface Station Symbol Set Code: 25 Code: 21**5**800 Draw Rules: Point2 - Static		
Non-Combatant Sea Surface Station Symbol Set Code: 25 Code: 21**5**900 Draw Rules: Point2 - Static		
Picket Sea Surface Station Symbol Set Code: 25 Code: 21**6**000 Draw Rules: Point2 - Static		
Rendezvous Sea Surface Station Symbol Set Code: 25 Code: 21**6**100 Draw Rules: Point2 - Static		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Replenishment at Sea Surface Station Symbol Set Code: 25 Code: 21**62**00 Draw Rules: Point2 - Static		
Rescue Sea Surface Station Symbol Set Code: 25 Code: 21**63**00 Draw Rules: Point2 - Static		
Surface Warfare Sea Surface Station Symbol Set Code: 25 Code: 21**64**00 Draw Rules: Point2 - Static		
Unmanned Underwater Vehicle Sea Surface Station Symbol Set Code: 25 Code: 21**65**00 Draw Rules: Point2 - Static		
Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Surface Station Symbol Set Code: 25 Code: 21**66**00 Draw Rules: Point2 - Static		


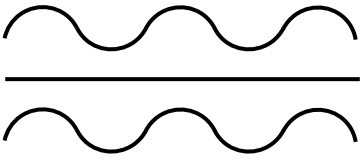

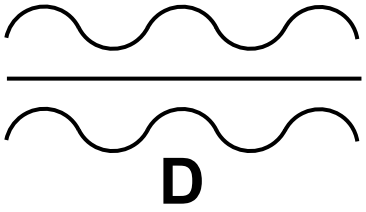

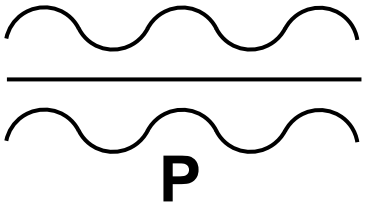

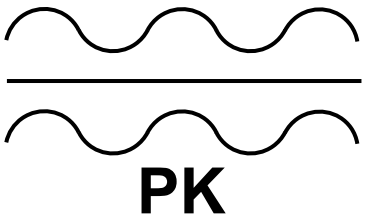
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Mine Warfare Unmanned Underwater Vehicle Sea Surface Station Symbol Set Code: 25 Code: 21**6**700 Draw Rules: Point2 - Static		
Remote Multi-Mission Vehicle Unmanned Underwater Vehicle Sea Surface Station Symbol Set Code: 25 Code: 21**6**800 Draw Rules: Point2 - Static		
Surface Warfare Unmanned Underwater Vehicle Sea Surface Station Symbol Set Code: 25 Code: 21**6**900 Draw Rules: Point2 - Static		
Shore Control Station Symbol Set Code: 25 Code: 21**7**000 Draw Rules: Point2 - Static		


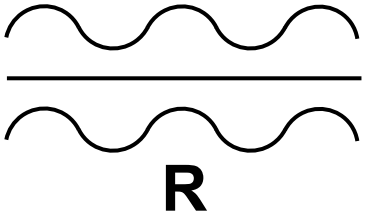

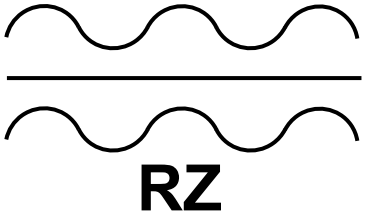




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Routes		
General Route Symbol Set Code: 25 Code: 217100 Draw Rules: Point2 - Static		
Diversion Route Symbol Set Code: 25 Code: 217200 Draw Rules: Point2 - Static		
Position and Intended Movement (PIM) Route Symbol Set Code: 25 Code: 217300 Draw Rules: Point2 - Static		
Picket Route Symbol Set Code: 25 Code: 217400 Draw Rules: Point2 - Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Point R Route Symbol Set Code: 25 Code: 217500 Draw Rules: Point2 - Static		
Rendezvous Route Symbol Set Code: 25 Code: 217600 Draw Rules: Point2 - Static		
Waypoint Route Symbol Set Code: 25 Code: 217700 Draw Rules: Point2 - Static		
Clutter, Stationary or Cease Reporting Symbol Set Code: 25 Code: 217800 Draw Rules: Point2 - Static		

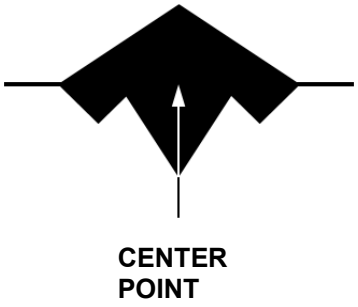







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Tentative or Provisional Track Symbol Set Code: 25 Code: 21**7**900 Draw Rules: Point2 - Static		
Emergency		
Distressed Vessel Symbol Set Code: 25 Code: 21**8**000 Draw Rules: Point7 - Static		
Ditched Aircraft/Downed Aircraft Symbol Set Code: 25 Code: 21**8**100 Draw Rules: Point7 - Static		
Person In Water/ Bailout Symbol Set Code: 25 Code: 21**8**200 Draw Rules: Point7 - Static		



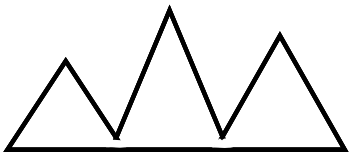

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Hazard		
Iceberg Symbol Set Code: 25 Code: 21**83**00 Draw Rules: Point2 - Static	 	
Navigational Symbol Set Code: 25 Code: 21**84**00 Draw Rules: Line4 - Dynamic	 	
Oil Rig Symbol Set Code: 25 Code: 21**85**00 Draw Rules: Point2 - Static	 	
Sea Mine-Like Symbol Set Code: 25 Code: 21**86**00 Draw Rules: Point2 - Static	 **Note**: The orientation of symbol can be rotated in 90 degree increments.	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Sea Subsurface Returns		
Bottom Return/ Non-Mine, Mine-Like Bottom Object (NOMBO) Symbol Set Code: 25 Code: 21**87**00 Draw Rules: Point7 - Static		
Bottom Return/ Non-Mine, Mine-Like Bottom Object (NOMBO)/ Installation/ Manmade Symbol Set Code: 25 Code: 21**88**00 Draw Rules: Point7 - Static		
Marine Life Symbol Set Code: 25 Code: 21**89**00 Draw Rules: Point15 - Static		
Sea Anomaly (Wake, Current, Knuckle) Symbol Set Code: 25 Code: 21**90**00 Draw Rules: Point2 - Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Bottom Return/Non-MILCO, Wreck, Dangerous Symbol Set Code: 25 Code: 21**9**100 Draw Rules: Point2 - Static		
Bottom Return/Non-MILCO, Wreck, Non Dangerous Symbol Set Code: 25 Code: 21**9**200 Draw Rules: Point2 - Static		
Maritime Control Lines Symbol Set Code: 25 Code: **22**0000	N/A	N/A
Bearing Line Symbol Set Code: 25 Code: 22**0**100 Draw Rules: Line5 - Dynamic		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Bearing Line, Electronic Symbol Set Code: 25 Code: 220101 Draw Rules: Line5 - Dynamic		
Bearing Line, Electronic Warfare Symbol Set Code: 25 Code: 220102 Draw Rules: Line5 - Dynamic		
	Note: "H" field may contain the following identifiers: •"MSL" – missile •"MCU" – missile control unit •"TENT - tentative	
Bearing Line, Acoustic Symbol Set Code: 25 Code: 220103 Draw Rules: Line5 - Dynamic		
	Note: "H" field may contain the following identifiers: •"L3-ACT" – LAMPS, active •"L3-pHELO" – LAMPS, Helicopter, passive •"L3-pSHIP" – LAMPS, Ship, passive •"L3-OSC" – LAMPS, Operator Specified Contact, passive •"L3-ATT" – LAMPS, Acoustic Target Track, passive	





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Bearing Line, Acoustic (Ambiguous) Symbol Set Code: 25 Code: 220104 Draw Rules: Line5 - Dynamic		
	Note: "H" field may contain the following identifiers: •"L3-ACT" – LAMPS, active •"L3-pHELO" – LAMPS, Helicopter, passive •"L3-pSHIP" – LAMPS, Ship, passive •"L3-OSC" – LAMPS, Operator Specified Contact, passive •"L3-ATT" – LAMPS, Acoustic Target Track, passive	
Bearing Line, Torpedo Symbol Set Code: 25 Code: 220105 Draw Rules: Line5 - Dynamic		
Bearing Line, Electro-Optical Intercept Symbol Set Code: 25 Code: 220106 Draw Rules: Line5 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XIV. Maritime control measures.- Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Bearing Line, Jammer Symbol Set Code: 25 Code: 220**107** Draw Rules: Line5 - Dynamic		
	Note: "H" field may only contain the "PAT-1" – PAT-1 Jammer	
Bearing Line, Radio Direction Finder (RDF) Symbol Set Code: 25 Code: 220**108** Draw Rules: Line5 - Dynamic		

H.5.18 Fire support coordination measures.


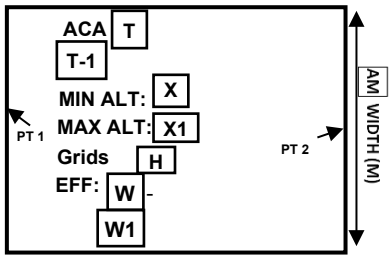

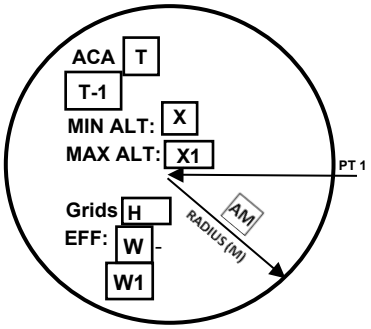
H.5.18.1 Fire support coordination measures. Measures employed by land or amphibious commanders to facilitate the rapid engagement of targets and simultaneously provide safeguards for friendly forces. Fire support control measures should be labeled with the abbreviation of the control measure, the controlling headquarters (Field T) and the effective times (Field W/W1). For lines this labeling should be on both ends of the line and repeated as often as necessary for clarity along any line that passes through many boundaries.

TABLE H-XV. Fire support coordination measures.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Fire Areas Symbol Set Code: 25 Code: **24**0000	N/A	N/A


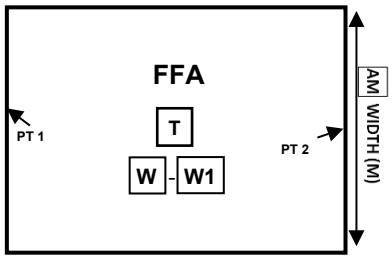


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XV. Fire support coordination measures - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Airspace Coordination Area (ACA) Symbol Set Code: 25 Code: 24**01**00	N/A	N/A
Airspace Coordination Area (ACA) - Irregular Symbol Set Code: 25 Code: 2401**01** Draw Rules: Area1 - Dynamic	 Note: T-1 is a Unit	
	A restricted area or route of travel specified for use by friendly aircraft and established for the purpose of preventing friendly aircraft from being fired on by friendly forces. (AArtyP-5)	
Airspace Coordination Area (ACA) - Rectangle Symbol Set Code: 25 Code: 2401**02** Draw Rules: Rectangular1 - Dynamic	 Note: T-1 is a Unit	
Airspace Coordination Area (ACA) – Circular Symbol Set Code: 25 Code: 2401**03** Draw Rules: Circular1 - Dynamic	 Note: T-1 is a Unit	


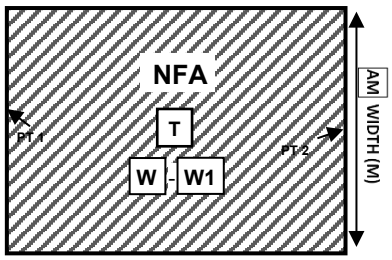


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XV. Fire support coordination measures - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Free Fire Area (FFA) Symbol Set Code: 25 Code: 24**02**00	N/A	N/A
Free Fire Area (FFA) - Irregular Symbol Set Code: 25 Code: 2402**01** Draw Rules: Area1 - Dynamic	 A specific designated area into which any weapon system may fire without additional co-ordination with the establishing headquarters.	
Free Fire Area (FFA) – Rectangle Symbol Set Code: 25 Code: 2402**02** Draw Rules: Rectangular1 - Dynamic		
Free Fire Area (FFA) – Circular Symbol Set Code: 25 Code: 2402**03** Draw Rules: Circular1 - Dynamic		
No Fire Area (NFA) Symbol Set Code: 25 Code: 24**03**00	N/A	N/A

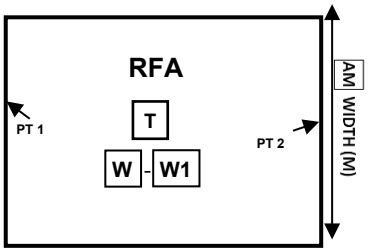

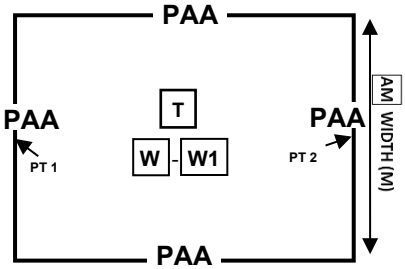
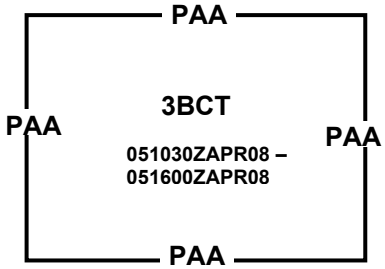
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XV. Fire support coordination measures - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
No Fire Area (NFA) - Irregular Symbol Set Code: 25 Code: 240**301** Draw Rules: Area1 - Dynamic		
An area into which no fires or the effects of fires are allowed.		
No Fire Area (NFA) – Rectangular Symbol Set Code: 25 Code: 240**302** Draw Rules: Rectangular1 - Dynamic		
No Fire Area (NFA) – Circular Symbol Set Code: 25 Code: 240**303** Draw Rules: Circular1 - Dynamic		
Restricted Fire Area (RFA) Symbol Set Code: 25 Code: 24**04**00	N/A	N/A
Restricted Fire Area (RFA) - Irregular Symbol Set Code: 25 Code: 240**401** Draw Rules: Area1 - Dynamic		

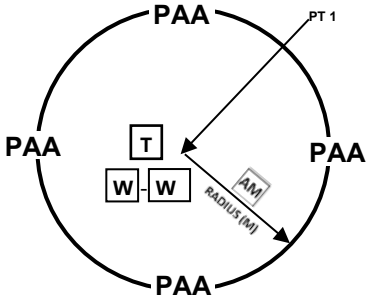







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XV. Fire support coordination measures - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
	An area in which specific restrictions are imposed and in which fires that exceed those restrictions are not delivered without co-ordination with the establishing headquarters. (AartyP-5).	
Restricted Fire Area (RFA) – Rectangular Symbol Set Code: 25 Code: 240**402** Draw Rules: Rectangular1 - Dynamic		
Restricted Fire Area (RFA) – Circular Symbol Set Code: 25 Code: 240**403** Draw Rules: Circular1 - Dynamic		
Position Area For Artillery (PAA) Symbol Set Code: 25 Code: 24**05**00	Note: An area assigned to an artillery unit where individual artillery systems can maneuver to increase their survivability (FM 3-090-1).	N/A
Position Area for Artillery (PAA) - Rectangular Symbol Set Code: 25 Code: 2405**01** Draw Rules: Rectangular1 - Dynamic		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XV. Fire support coordination measures - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Position Area for Artillery (PAA) - Circular Symbol Set Code: 25 Code: 240**502** Draw Rules: Circular1 - Dynamic		
Position Area for Artillery (PAA) - Irregular Symbol Set Code: 25 Code: 240**503** Draw Rules: Area1 - Dynamic		
Fire Lines Symbol Set Code: 25 Code: **26**0000	N/A	N/A
Fire Support Coordination Line (FSCL) Symbol Set Code: 25 Code: 26**01**00 Draw Rules: Line2 - Dynamic		 The end-of line information will typically be posted at the ends of the line as it is shown in the example.
	Note: Because of the length of the FSCL definition, see JP 3-09.	
Coordinated Fire Line (CFL) Symbol Set Code: 25 Code: 26**02**00 Draw Rules: Line7 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XV. Fire support coordination measures - Continued.








CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
No Fire Line Symbol Set Code: 25 Code: 26**03**00 Draw Rules: Line2 - Dynamic		
Battlefield Coordination Line Symbol Set Code: 25 Code: 26**04**00 Draw Rules: Line2 - Dynamic		
Restrictive Fire Line Symbol Set Code: 25 Code: 26**05**00 Draw Rules: Line2 - Dynamic		
	A line established between converging friendly forces (one or both may be moving) that prohibits all fire or effects from fires across the line without coordination with the affected force. (AartyP-5)	
Munition Flight Path Symbol Set Code: 25 Code: 26**06**00 Draw Rules: Line8 - Dynamic		
	Note 1. "MFP" shall be displayed once at the approximate center of the overall length of the Munition Flight Path. **Note 2**. The MFP begins at a weapon system/surface-to-surface fires unit and terminates at a target. **Note 3**. The effective DTG of the MFP is the shot/launch time of the projectile. The expiration DTG of the MFP is the splash/time of impact of the projectile. DTGs are not required to be displayed. If the DTG is displayed, it shall be displayed one time mid-way between Point 1 and midpoint of the graphic. **Note 4**. The 3D display of a MFP requires a height value for each anchor point.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.19 Targets.








H.5.19.1 Targets. Are the objects of a particular action, for example a geographic area, a complex, an installation, a force, equipment, an individual, a group or a system, planned for capture, exploitation, neutralization or destruction by military forces.

TABLE H-XVI. Target control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Point Targets		
Point Targets Symbol Set Code: 25 Code: 24**06**00	N/A	N/A
Point or Single Target Symbol Set Code: 25 Code: 2406**01** Draw Rules: Point2 - Static		 
	A target which requires the accurate placement of bombs or fire. **Note**: Guidance on building target numbers is found in AArtyP-1.	
Nuclear Target Symbol Set Code: 25 Code: 2406**02** Draw Rules: Point2 - Static		
	Note: The point at the center of the target represents the desired ground zero.	
Target-Recorded **(AEGIS Only)** Symbol Set Code: 25 Code: 2406**03** Draw Rules: Point11 - Static		



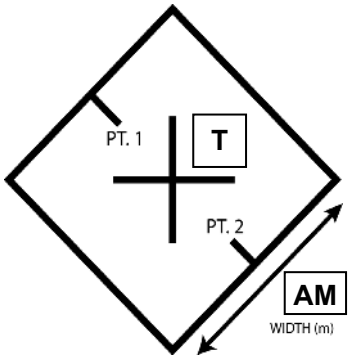
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVI. Target control measure symbols – Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Linear Targets Symbol Set Code: 25 Code: 24**0**700	N/A	N/A
Linear Target Symbol Set Code: 25 Code: 2407**01** Draw Rules: Line5 - Dynamic		
Linear Smoke Target Symbol Set Code: 25 Code: 2407**02** Draw Rules: Line5 - Dynamic		
Final Protective Fire (FPF) Symbol Set Code: 25 Code: 2407**03** Draw Rules: Line5 - Dynamic	 An immediately available prearranged barrier of fire designed to impede enemy movement across defensive lines or areas.	
Area Targets Symbol Set Code: 25 Code: 24**08**00	N/A	N/A
Area Target Symbol Set Code: 25 Code: 2408**01** Draw Rules: Area1 - Dynamic		


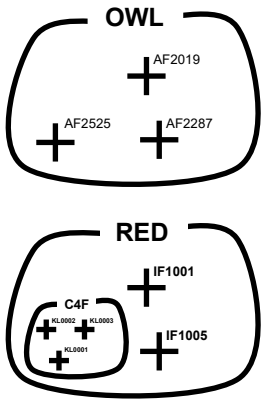




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVI. Target control measure symbols – Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Rectangular Target Symbol Set Code: 25 Code: 240**802** Draw Rules: Rectangular2 - Dynamic		
Circular Target Symbol Set Code: 25 Code: 240**803** Draw Rules: Circular1 - Dynamic		
Rectangular Target – Single Target (AEGIS Only) Symbol Set Code: 25 Code: 240**804** Draw Rules: Rectangular3 - Dynamic	 **Area**: This symbol requires two anchor points and a width (defined in meters) to define the boundary of the area. Points 1 and 2 will be located on the opposite sides of the area.	







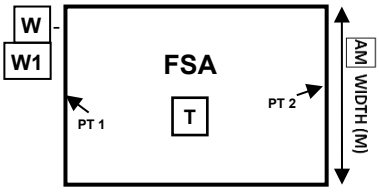
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVI. Target control measure symbols – Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Series or Group of Targets Symbol Set Code: 25 Code: 240805 Draw Rules: Area9 - Dynamic		 Point Targets
	In artillery and naval fire support, a number of targets and/or group(s) of targets planned to support a maneuver phase. A series of targets may be indicated by a nickname. A group of targets is designated by a letter/number combination or a nickname.	 Linear Targets
		 Area Targets
Smoke Symbol Set Code: 25 Code: 240806 Draw Rules: Area1 - Dynamic		
		 Planned or On Order

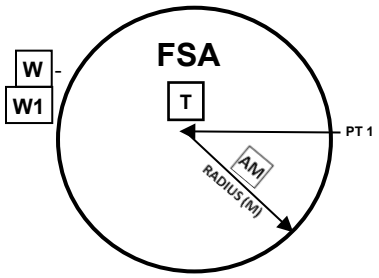







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVI. Target control measure symbols – Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Bomb Area Symbol Set Code: 25 Code: 240808 Draw Rules: Area1 - Dynamic		
Naval Gunfire		
Fire Support Station Symbol Set Code: 25 Code: 240900 Draw Rules: Point2 - Static		
	An exact location at sea within a fire support area from which a fire support ship delivers fire.	
Fire Support Area Symbol Set Code: 25 Code: 241000	N/A	N/A
Fire Support Area - Irregular Symbol Set Code: 25 Code: 241001 Draw Rules: Area1 - Dynamic		
	An appropriate maneuver area assigned to fire support ships from which to deliver gun-fire support of an amphibious operation.	
Fire Support Area - Rectangular Symbol Set Code: 25 Code: 241002 Draw Rules: Rectangular1 - Dynamic		


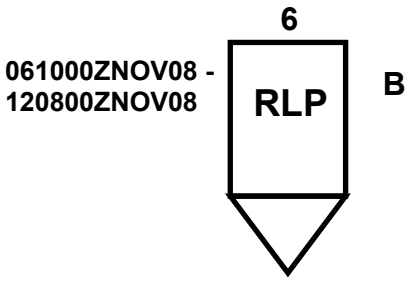

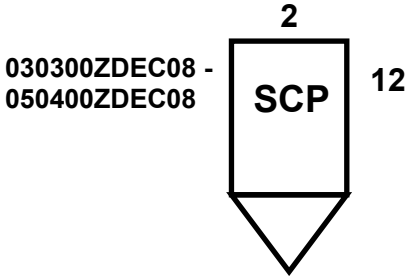


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVI. Target control measure symbols – Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Fire Support Area - Circular Symbol Set Code: 25 Code: 241**03** Draw Rules: Circular1 - Dynamic		010700ZJAN08 - 010745ZJAN08 
Field Artillery		
Fires Points Symbol Set Code: 25 Code: **25**0000	N/A	N/A
Firing Point Symbol Set Code: 25**01**00 Draw Rules: Point1 - Static		3 060900ZFEB08 - 100300ZFEB08  2
Hide Point Symbol Set Code: 25 Code: 25**02**00 Draw Rules: Point1 - Static		2 070700ZMAR08 - 110500ZMAR08  3
Launch Point Symbol Set Code: 25 Code: 25**03**00 Draw Rules: Point1 - Static		6 100200ZAUG08 - 110800ZAUG08  4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVI. Target control measure symbols – Continued.



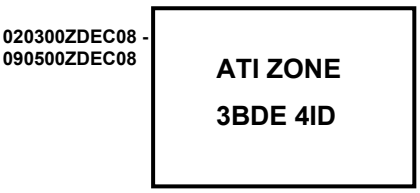

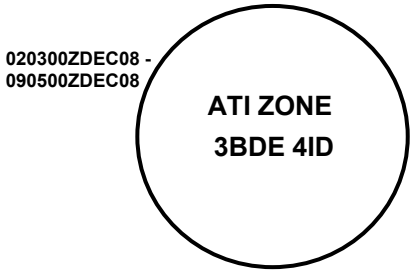
CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Reload Point Symbol Set Code: 25 Code: 25**04**00 Draw Rules: Point1 - Static		
Survey Control Point Symbol Set Code: 25 Code: 25**05**00 Draw Rules: Point1 - Static		
Known Point Symbol Set Code: 25 Code: 25**06**00 Draw Rules: Point2 - Static		
	A point known to both the observer and the FDC and recorded or plotted in the FDC. (ATP 3-09.30)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.20 Target acquisition.



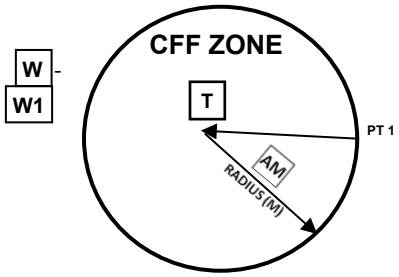



H.5.20.1 Target acquisition. The detection, identification and location of a target in sufficient detail to permit the effective employment of weapons.

TABLE H-XVII. Target acquisition control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Artillery Target Intelligence Zone (ATI) Symbol Set Code: 25 Code: 24**11**00	N/A	N/A
Artillery Target Intelligence Zone (ATI), Irregular Symbol Set Code: 25 Code: 2411**01** Draw Rules: Area10 - Dynamic	 An area in enemy territory that the commander wishes to monitor closely.	
Artillery Target Intelligence Zone (ATI), Rectangular Symbol Set Code: 25 Code: 2411**02** Draw Rules: Rectangular1 - Dynamic		
Artillery Target Intelligence Zone (ATI), Circular Symbol Set Code: 25 Code: 2411**03** Draw Rules: Circular1 - Dynamic		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Call For Fire Zone (CFFZ) Symbol Set Code: 25 Code: 24**1**200	N/A	N/A
Call For Fire Zone (CFFZ), Irregular Symbol Set Code: 25 Code: 2412**01** Draw Rules: Area10 - Dynamic	 A search area from which the commander wants to attack hostile firing systems.	020300ZDEC08 - 090500ZDEC08 
Call For Fire Zone (CFFZ), Rectangular Symbol Set Code: 25 Code: 2412**02** Draw Rules: Rectangular1 - Dynamic		020300ZDEC08 - 090500ZDEC08 
Call For Fire Zone (CFFZ), Circular Symbol Set Code: 25 Code: 2412**03** Draw Rules: Circular1 - Dynamic		020300ZDEC08 - 090500ZDEC08 
Censor Zone Symbol Set Code: 25 Code: 24**1**300	N/A	N/A
Censor Zone, Irregular Symbol Set Code: 25 Code: 2413**01** Draw Rules: Area10 - Dynamic	 An area from which radar is prohibited from automatically reporting target acquisitions. (JP 3-09)	020300ZDEC08 - 090500ZDEC08 





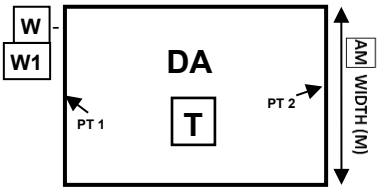
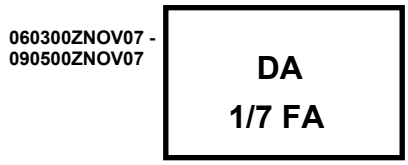
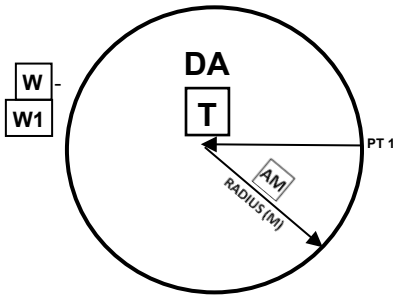

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Censor Zone, Rectangular Symbol Set Code: 25 Code: 241**302** Draw Rules: Rectangular1 - Dynamic		020300ZDEC08 - 090500ZDEC08 
Censor Zone, Circular Symbol Set Code: 25 Code: 241**303** Draw Rules: Circular1 - Dynamic		020300ZDEC08 - 090500ZDEC08 
Critical Friendly Zone (CFZ) Symbol Set Code: 25 Code: 24**1**400	N/A	N/A
Critical Friendly Zone (CFZ), Irregular Symbol Set Code: 25 Code: 2414**01** Draw Rules: Area10 - Dynamic	 An area, usually a friendly unit or location that the maneuver commander designates as critical to the protection of an asset whose loss would seriously jeopardize the mission.	020300ZDEC08 - 090500ZDEC08 
Critical Friendly Zone (CFZ), Rectangular Symbol Set Code: 25 Code: 2414**02** Draw Rules: Rectangular1 - Dynamic		020300ZDEC08 - 090500ZDEC08 




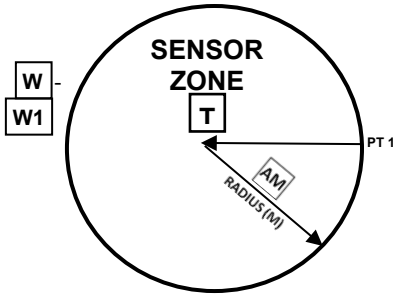


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Critical Friendly Zone (CFZ), Circular Symbol Set Code: 25 Code: 241**403** Draw Rules: Circular1 - Dynamic		
Dead Space Area Symbol Set Code: 25 Code: 24**15**00	N/A	N/A
Dead Space Area, Irregular Symbol Set Code: 25 Code: 2415**01** Draw Rules: Area10 - Dynamic	 An area where hostile weapons cannot be detected.	
Dead Space Area, Rectangular Symbol Set Code: 25 Code: 2415**02** Draw Rules: Rectangular1 - Dynamic		
Dead Space Area, Circular Symbol Set Code: 25 Code: 2415**03** Draw Rules: Circular1 - Dynamic		




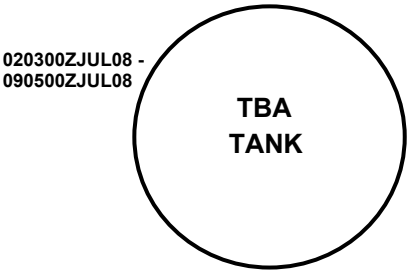



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Sensor Zone Symbol Set Code: 25 Code: 24**1**600	N/A	N/A
Sensor Zone, Irregular Symbol Set Code: 25 Code: 2416**01** Draw Rules: Area10 - Dynamic		020300ZDEC08 - 090500ZDEC08 
Sensor Zone, Rectangular Symbol Set Code: 25 Code: 2416**02** Draw Rules: Rectangular1 - Dynamic		020300ZDEC08 - 090500ZDEC08 
Sensor Zone, Circular Symbol Set Code: 25 Code: 2416**03** Draw Rules: Circular1 - Dynamic		020300ZDEC08 - 090500ZDEC08 
Target Build-up Area Symbol Set Code: 25 Code: 24**1**700	N/A	N/A
Target Build-up Area, Irregular Symbol Set Code: 25 Code: 2417**01** Draw Rules: Area10 - Dynamic		020300ZJUL08 - 090500ZJUL08 






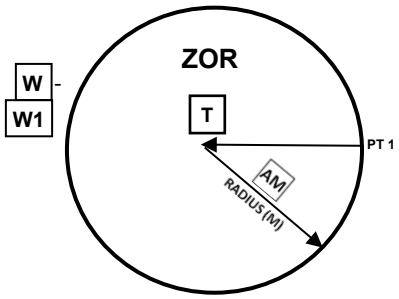

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Target Build-up Area, Rectangular Symbol Set Code: 25 Code: 241**02** Draw Rules: Rectangular1 - Dynamic		
Target Build-up Area, Circular Symbol Set Code: 25 Code: 241**03** Draw Rules: Circular1 - Dynamic		
Target Value Area Symbol Set Code: 25 Code: 24**18**00	N/A	N/A
Target Value Area, Irregular Symbol Set Code: 25 Code: 2418**01** Draw Rules: Area10 - Dynamic		
Target Value Area, Rectangular Symbol Set Code: 25 Code: 2418**02** Draw Rules: Rectangular1 - Dynamic		



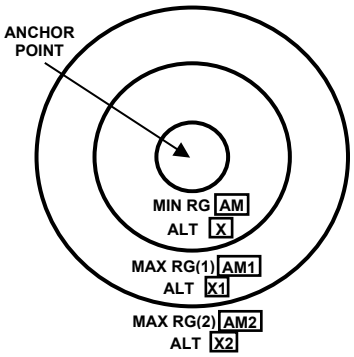
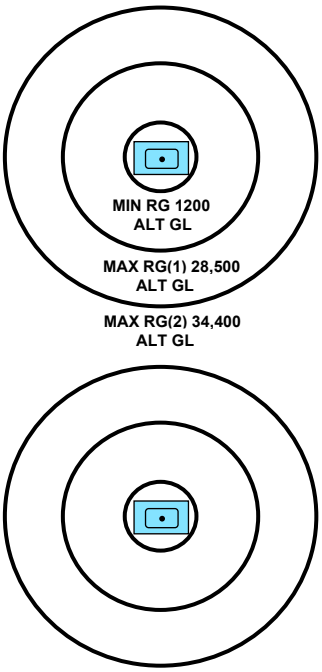
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Target Value Area, Circular Symbol Set Code: 25 Code: 2418**03** Draw Rules: Circular1 - Dynamic		
Zone of Responsibility Symbol Set Code: 25 Code: 24**19**00	N/A	N/A
Zone of Responsibility, Irregular Symbol Set Code: 25 Code: 2419**01** Draw Rules: Area10 - Dynamic		
Zone of Responsibility, Rectangular Symbol Set Code: 25 Code: 2419**02** Draw Rules: Rectangular1 - Dynamic		
Zone of Responsibility, Circular Symbol Set Code: 25 Code: 2419**03** Draw Rules: Circular1 - Dynamic		

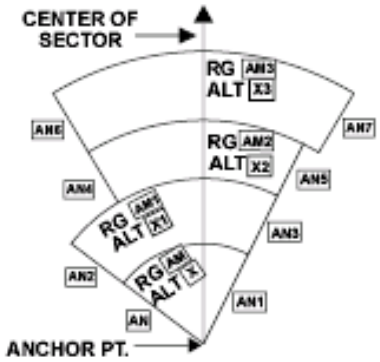
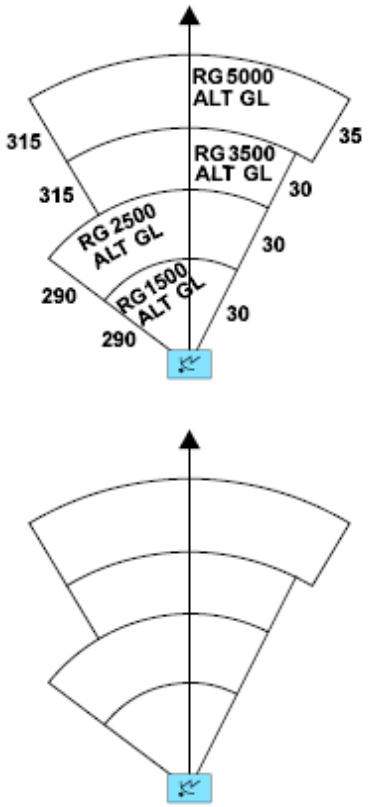


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Terminally Guided Munition Footprint (TGMF) Symbol Set Code: 25 Code: 24**20**00 Draw Rules: Area10 - Dynamic		
Weapon/Sensor Range fan, Circular Symbol Set Code: 25 Code: 24**21**00 Draw Rules: Circular2 - Dynamic		
	The display of distance and altitude numerical values is not required. An altitude of zero indicates surface level.	


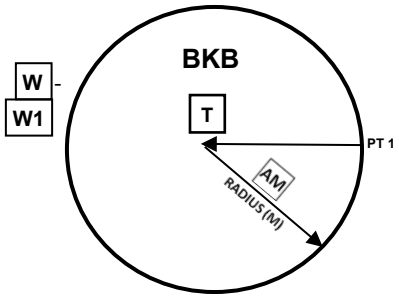




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Weapon/Sensor Range fan, Sector Symbol Set Code: 25 Code: 24**22**00 Draw Rules: Arc1 - Dynamic		
	Minimum and maximum distances (ranges), center of sector, left and right sector limits, and altitude may be displayed if desired but are not required to be displayed. An altitude of zero indicates surface level.	
Kill Box Symbol Set Code: 25 Code: 24**23**00 Static/Dynamic: D	N/A	N/A
Blue Kill Box, Irregular Symbol Set Code: 25 Code: 2423**01** Draw Rules: Area10 - Dynamic		

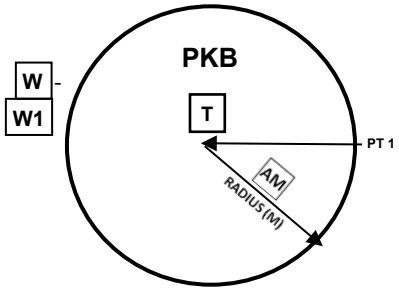
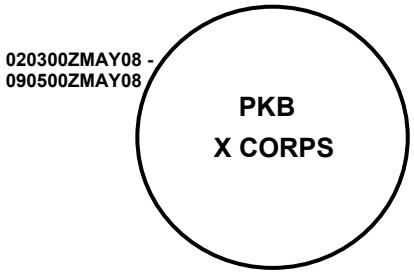
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Blue Kill Box, Rectangular Symbol Set Code: 25 Code: 242302 Draw Rules: Rectangular1 - Dynamic		
Blue Kill Box, Circular Symbol Set Code: 25 Code: 242303 Draw Rules: Circular1 - Dynamic		
Purple Kill Box, Irregular Symbol Set Code: 25 Code: 242304 Draw Rules: Area10 - Dynamic		
Purple Kill Box, Rectangular Symbol Set Code: 25 Code: 242305 Draw Rules: Rectangular1 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.



TABLE H-XVII. Target acquisition control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Purple Kill Box, Circular Symbol Set Code: 25 Code: 242306 Draw Rules: Circular1 - Dynamic		

H.5.21 Obstacles.






H.5.21.1 Obstacles. Natural or man-made restrictions to movement which will impose delay and which will normally require specific equipment or munitions to overcome. (AAP-19). Obstacles are normally shown in green. If color is not available, they are to be shown in black. Regardless of whether green or black is used for color, ENY must be used. If red is used, the ENY may be omitted.

TABLE H-XVIII. Obstacle control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Protection Areas Symbol Set Code: 25 Code: 270000	N/A	N/A
Obstacle Belt Symbol Set Code: 270100 Draw Rules: Area1 - Dynamic		
	An area designated at brigade level in which barrier operations are focused. (AAP-19)	




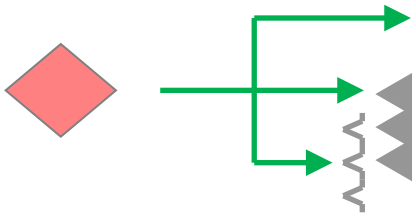

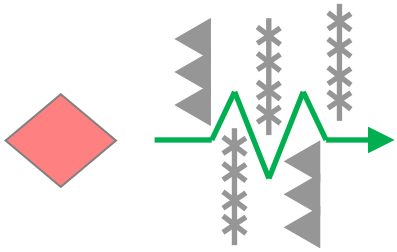
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Obstacle Zone Symbol Set Code: 25 Code: 27**02**00 Draw Rules: Area1 - Dynamic		
	An area designated at corps or division level in which barrier operations are focused. It may be subdivided, below division, into a number of obstacle belts. (AAP-19)	
Obstacle Free Zone Symbol Set Code: 25 Code: 27**03**00 Draw Rules: Area1 - Dynamic		
Obstacle Restricted Zone Symbol Set Code: 25 Code: 27**04**00 Draw Rules: Area1 - Dynamic		
Obstacle Effects Symbol Set Code: 25 Code: 27**05**00	N/A	N/A


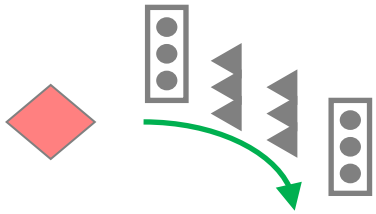




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Block Symbol Set Code: 25 Code: 270501 Draw Rules: Area11 - Dynamic		
	An obstacle effect that integrates fire planning and obstacle effort to stop an attacker along a specific avenue of approach or to prevent him from passing through an engagement area. The horizontal line is the limit of the enemy advance. The vertical line indicates where obstacles tie in to terrain that is untrafficable.	
Disrupt Symbol Set Code: 25 Code: 270502 Draw Rules: Area12 - Dynamic		
	An obstacle effect that focuses fire planning and obstacle effort to cause the enemy to break up his formation and tempo, interrupt his timetable, commit breaching assets prematurely and attack in a piecemeal effort. Short arrow indicates where enemy is disrupted by obstacles. Longer arrows indicate where movement is allowed and enemy is attacked by fires.	
Fix Symbol Set Code: 25 Code: 270503 Draw Rules: Line9 - Dynamic		
	An obstacle effect that focuses fire planning and obstacle effort to slow an attacker's movement within a specified area, normally an engagement area. **Note**: From the tip of the arrow to the back of the irregular part of the symbol indicates where enemy advance is slowed by obstacles.	

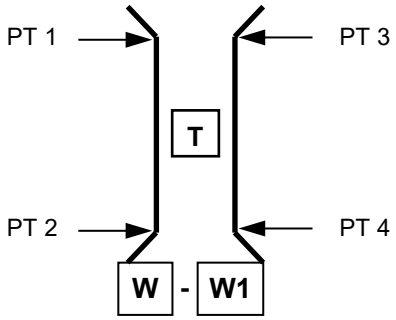


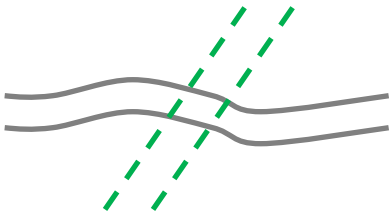

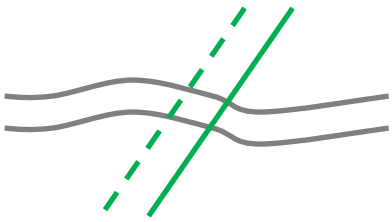
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Turn Symbol Set Code: 25 Code: 270**504** Draw Rules: Line10 - Dynamic	 An obstacle effect that integrates fire planning and obstacle effort to drive an enemy formation from one avenue of approach to an adjacent avenue of approach or into an engagement area. **Note**: Direction of the arrow indicates the desired direction of turn.	
Obstacle Bypass Symbol Set Code: 25 Code: 27**06**00	N/A	N/A
Obstacle Bypass Easy Symbol Set Code: 25 Code: 2706**01** Draw Rules: Point12 - Dynamic		
Obstacle Bypass Difficult Symbol Set Code: 25 Code: 2706**02** Draw Rules: Point12 - Dynamic		
Obstacle Bypass Impossible Symbol Set Code: 25 Code: 2706**03** Draw Rules: Point12 - Dynamic		


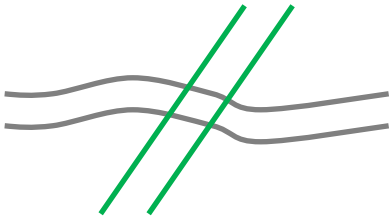

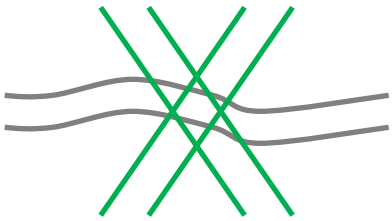

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Bridge or Gap Symbol Set Code: 25 Code: 271**1**100 Draw Rules: Line11 - Dynamic		
	An area within a minefield or obstacle belt, free of live mines or obstacles, whose width and direction will allow a friendly force to pass through in tactical formation.	
Roadblocks, Craters and Blown Bridges Symbol Set Code: 25 Code: 271**2**00	N/A	N/A
	Crater obstacle – An obstacle consisting of one or more craters, created normally in a roadway using demolitions.	
Planned Symbol Set Code: 25 Code: 2712**01** Draw Rules: Line12 - Dynamic		
Explosives, State of Readiness 1 (Safe) Symbol Set Code: 25 Code: 2712**02** Draw Rules: Line12 - Dynamic		



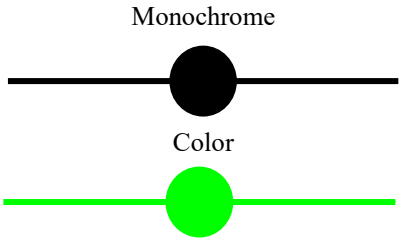




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Explosives, State of Readiness 2 (armed but passable) Symbol Set Code: 25 Code: 271**03** Draw Rules: Line12 - Dynamic		
Roadblock Complete (Executed) Symbol Set Code: 25 Code: 271**04** Draw Rules: Line12 - Dynamic		
Protection Points Symbol Set Code: 25 Code: **28**0000	N/A	N/A
Abatis Symbol Set Code: 25 Code: 28**01**00 Draw Rules: Line13 - Dynamic		
	An obstacle constructed by the felling and interlacing of trees across a route. (AAP-19)	
Protection Lines Symbol Set Code: 25 Code: **29**0000	N/A	N/A


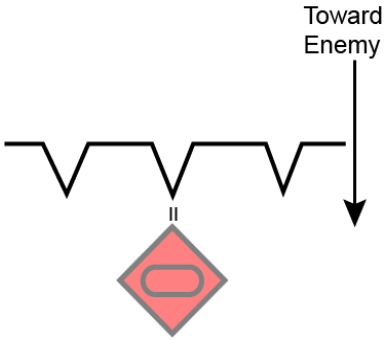


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Obstacle Line Symbol Set Code: 25 Code: 29**01**00 Draw Rules: Line1 - Dynamic		
	A conceptual control measure used at battalion or brigade level to show placement intent without specifying a particular type of linear obstacle.	
Mineline Symbol Set Code: 25 Code: 2901**01** Draw Rules: Line1 - Dynamic		
	{ Please insert description of Mineline here}	
Antitank Obstacles Symbol Set Code: 25 Code: 29**02**00	N/A	N/A
	A ditch which is impassable to vehicles unaided. It may be prepared using machinery or explosives.	
Antitank Ditch – Under Construction Symbol Set Code: 25 Code: 290**201** Draw Rules: Line1 - Dynamic		
Antitank Ditch – Completed Symbol Set Code: 25 Code: 290**202** Draw Rules: Line1 - Dynamic		







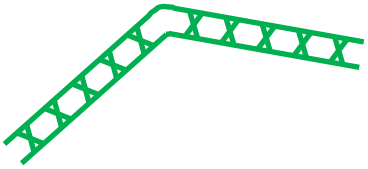


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Antitank Ditch Reinforced, with Antitank Mines Symbol Set Code: 25 Code: 290**03** Draw Rules: Line1 - Dynamic		
	Note: The teeth typically point toward enemy forces.	
Antitank Wall Symbol Set Code: 25 Code: 290**04** Draw Rules: Line1 - Dynamic		
	Note: The teeth typically point toward enemy forces.	
Wire Obstacles Symbol Set Code: 25 Code: 29**03**00	N/A	N/A
Unspecified Symbol Set Code: 25 Code: 290**301** Draw Rules: Line1 - Dynamic		
Single Fence Symbol Set Code: 25 Code: 290**302** Draw Rules: Line1 - Dynamic		





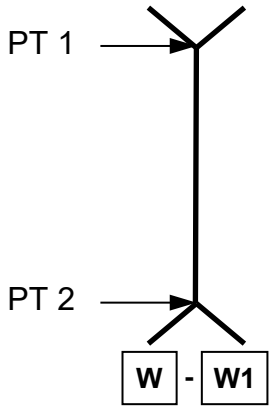

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Double Fence Symbol Set Code: 25 Code: 290**303** Draw Rules: Line1 - Dynamic		
Double Apron Fence Symbol Set Code: 25 Code: 290**304** Draw Rules: Line1 - Dynamic		
Low Wire Fence Symbol Set Code: 25 Code: 290**305** Draw Rules: Line1 - Dynamic		
High Wire Fence Symbol Set Code: 25 Code: 290**306** Draw Rules: Line1 - Dynamic		
Single Concertina Symbol Set Code: 25 Code: 290**307** Draw Rules: Line1 - Dynamic		

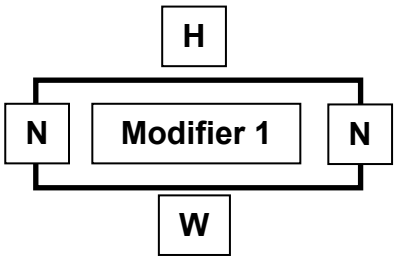








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Double Strand Concertina Symbol Set Code: 25 Code: 290**308** Draw Rules: Line1 - Dynamic		
Triple Strand Concertina Symbol Set Code: 25 Code: 290**309** Draw Rules: Line1 - Dynamic		
Lane Symbol Set Code: 25 Code: 29**06**00 Draw Rules: Line14 - Dynamic	 A route through an enemy or friendly obstacle that provides a passing force safe passage.	
Minefield Symbol Set Code: 25 Code: 27**07**00	N/A In land mine warfare, a defined area in which mines have been emplaced.	N/A



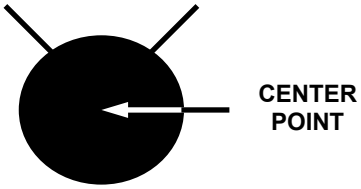

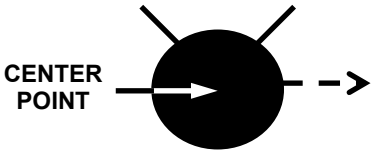



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Static Depiction Symbol Set Code: 25 Code: 270**701** Draw Rules: Point2 - Static		Monochrome  Color 
Dynamic Depiction Symbol Set Code: 25 Code: 270**707** Draw Rules: Area23 - Dynamic		
Mined Area Symbol Set Code: 25 Code: 27**08**00 Draw Rules: Area1 - Dynamic		
	An area which is dangerous because of the presence or suspected presence of mines.	
Mined Area, Fenced Symbol Set Code: 25 Code: 270**801** Draw Rules: Area1 - Dynamic		



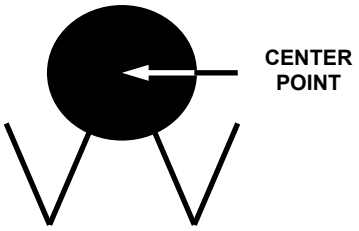





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Unexploded Explosive Ordnance (UXO) Area Symbol Set Code: 25 Code: 27**1**000 Draw Rules: Area1 - Dynamic		
Antipersonnel Mine Symbol Set Code: 25 Code: 28**02**00 Draw Rules: Point2 - Static		
	In land mine warfare, a mine designed to be exploded by the presence, proximity or contact of a person and that will incapacitate, wound or kill one or more persons. (AAP-19)	
Antipersonnel Mine with Directional Effects Symbol Set Code: 25 Code: 2802**01** Draw Rules: Point2 - Static		
Antitank Mine Symbol Set Code: 25 Code: 28**03**00 Draw Rules: Point2 - Static		
	A mine designed to immobilize or destroy a tank. (AAP-19)	




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Antitank Mine with Anti-handling Device Symbol Set Code: 25 Code: 28**04**00 Draw Rules: Point2 - Static		
A device intended to protect a mine and which is part of, linked to, attached to or placed under the mine and which activates when an attempt is made to tamper with or otherwise intentionally disturb the mine. (AAP-19)		
Wide Area Antitank Mine Symbol Set Code: 25 Code: 28**05**00 Draw Rules: Point2 - Static		
An antitank mine that detects and acquires targets then launches submunition(s) that attacks the top of the targets.		
Unspecified Mine Symbol Set Code: 25 Code: 28**06**00 Draw Rules: Point2 - Static		
Booby Trap Symbol Set Code: 25 Code: 28**07**00 Draw Rules: Point13 - Static		
A device designed, constructed or adapted to kill or injure, which functions when a person disturbs or approaches an apparently harmless object or performs an apparently safe act.		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Tetrahedrons, Dragons Teeth, and Other Similar Obstacles Symbol Set Code: 25 Code: 28**19**00 Draw Rules: Point7 - Static	N/A	N/A
Fixed and Prefabricated Symbol Set Code: 25 Code: 2819**01** Draw Rules: Point7 - Static		
Movable Symbol Set Code: 25 Code: 2819**02** Draw Rules: Point7 - Static		
Movable and Prefabricated Symbol Set Code: 25 Code: 2819**03** Draw Rules: Point7 - Static		

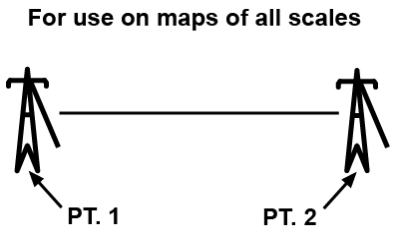
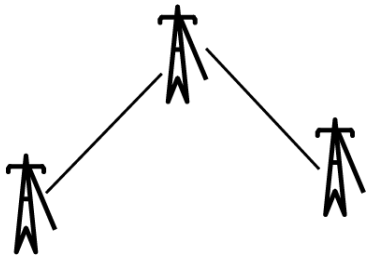
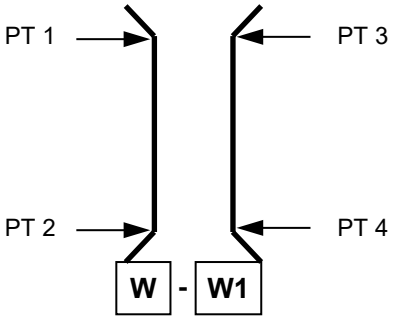


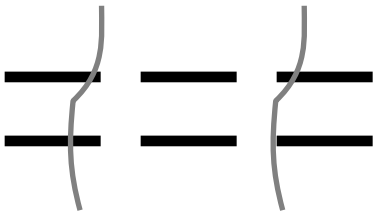


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Mine Cluster Symbol Set Code: 25 Code: 29**04**00 Draw Rules: Area13 - Dynamic		
	Note: The dashed lines in this symbol shall be displayed in present and anticipated status.	
Trip Wire Symbol Set Code: 25 Code: 29**05**00 Draw Rules: Line15 - Dynamic		
Vertical Obstructions Symbol Set Code: 25 Code: 28**20**00	N/A	N/A
Tower, Low Symbol Set Code: 25 Code: 2820**01** Draw Rules: Point16 - Dynamic		
	Note: Towers less than 1000 Ft AGL	
Tower, High Symbol Set Code: 25 Code: 2820**02** Draw Rules: Point16 - Dynamic		
	Note: Towers 1000 Ft and Higher AGL	

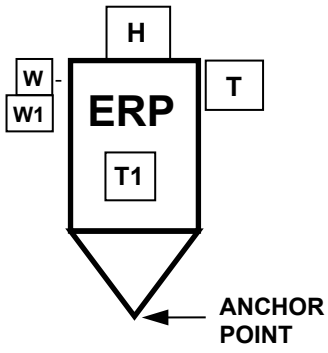
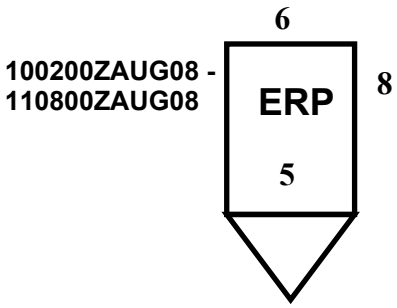

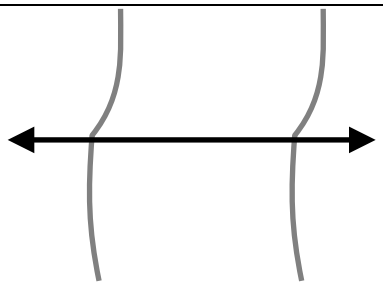

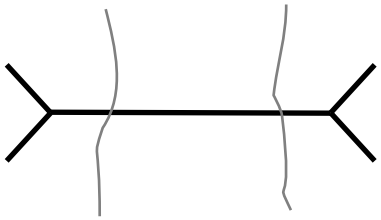
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Overhead Wire Symbol Set Code: 25 Code: 282**03** Draw Rules: Line1 - Dynamic		
Water Crossing Site The location of a single bridge or rafting site, or in an initial assault a site for the crossing of assault boats or for the swimming or fording of vehicles on a broad front.		
Assault Crossing Symbol Set Code: 25 Code: 27**13**00 Draw Rules: Line16 - Dynamic		
Ford Easy Symbol Set Code: 25 Code: 27**15**00 Draw Rules: Line17 - Dynamic		
Ford Difficult Symbol Set Code: 25 Code: 27**16**00 Draw Rules: Line17 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XVIII. Obstacle control measure symbols - Continued.






CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Engineer Regulating Point Symbol Set Code: 25 Code: 28**08**00 Draw Rules: Point1 - Dynamic		
	Checkpoint to ensure that vehicles do not exceed the capacity of the crossing means and to give drivers final instructions on site-specific procedures and information, such as speed and vehicle interval.	
Ferry Symbol Set Code: 25 Code: 29**07**00 Draw Rules: Line18 - Dynamic		
Raft Site Symbol Set Code: 25 Code: 29**08**00 Draw Rules: Line14 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.22 Field fortification control measures.




H.5.22.1 Field fortification. Is an emplacement or shelter of a temporary nature which can be constructed with reasonable facility by units requiring no more than minor engineer supervisory and equipment participation.

TABLE H-XIX. Field fortification control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Shelter Symbol Set Code: 25 Code: 28**0**900 Draw Rules: Point2 - Static		
Above Ground Shelter Symbol Set Code: 25 Code: 28**1**000 Draw Rules: Point2 - Static		
Below Ground Shelter Symbol Set Code: 25 Code: 28**11**00 Draw Rules: Point2 - Static		
Fort Symbol Set Code: 25 Code: 28**12**00 Draw Rules: Point2 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.



TABLE H-XIX. Field fortification control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Fortified Line Symbol Set Code: 25 Code: 29**0**900 Draw Rules: Line1 - Dynamic		
	Note: The ramparts typically point toward enemy forces.	
Fighting Position Symbol Set Code: 25 Code: 29**1**000 Draw Rules: Line19 - Dynamic		
	Note: The symbol typically faces enemy forces.	

H.5.23 CBRN defense control measure symbols.











H.5.23.1 CBRN defense. These control measure symbols depict those conditions found in an area resulting from immediate or persisting effects of chemical, biological, radiological or nuclear attacks or events (release other than attack).

TABLE H-XX. CBRN defense control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Contaminated Areas		
Biological Contaminated Area Symbol Set Code: 25 Code: 27**1**700 Draw Rules: Area1 - Dynamic		

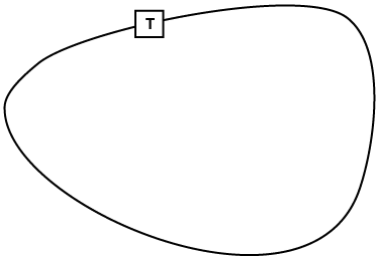
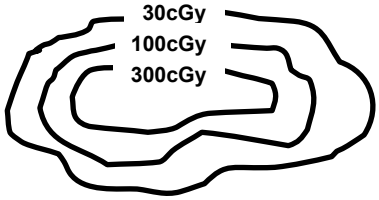
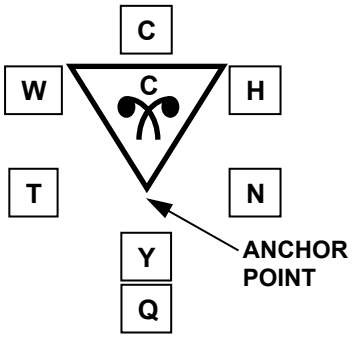
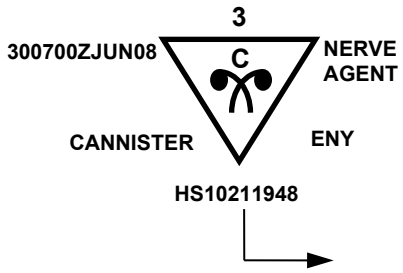

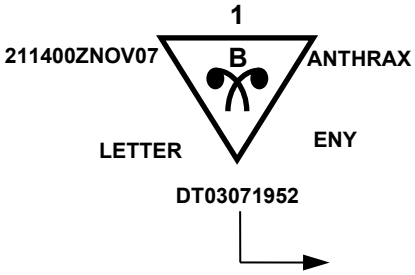


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XX. CBRN defense control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Chemical Contaminated Area Symbol Set Code: 25 Code: 271**8**00 Draw Rules: Area1 - Dynamic		
Nuclear Contaminated Area Symbol Set Code: 25 Code: 271**9**00 Draw Rules: Area1 - Dynamic		
Radiological Contaminated Area Symbol Set Code: 25 Code: 272**0**00 Draw Rules: Area1 - Dynamic		
Minimum Safe Distance Zone Symbol Set Code: 25 Code: 272**1**00 Draw Rules: Area14 - Dynamic		
Multiple Strike - (STRIKWARN) Symbol Set Code: 25 Code: 2721**01** Draw Rules: Area26 - Static		


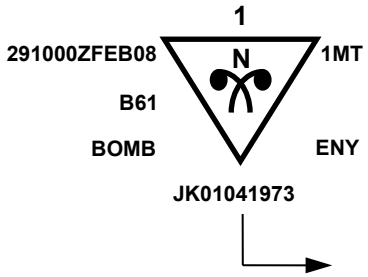
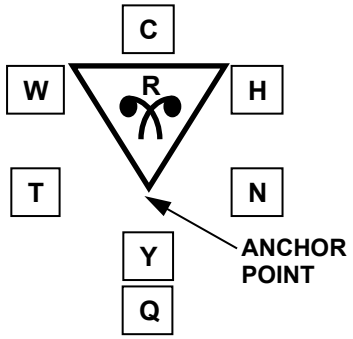
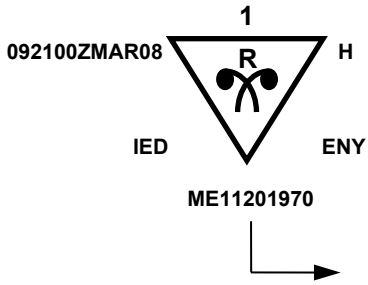
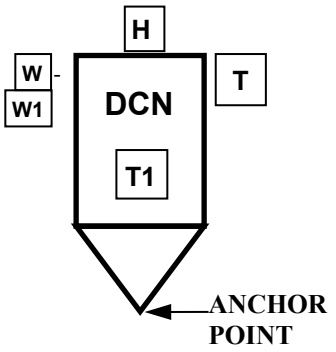
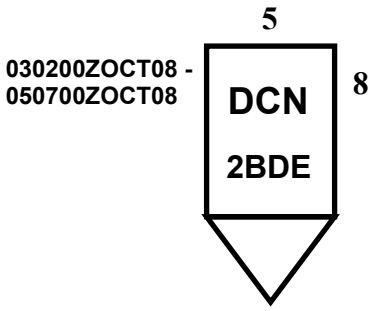
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XX. CBRN defense control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Radiation Dose Rate Contour Line Symbol Set Code: 25 Code: 272200 Draw Rules: Area1 - Dynamic		
	A line on a map, diagram or overlay joining all points at which the radiation dose rate at a given time is the same.	
Chemical Event Symbol Set Code: 25 Code: 281300 Draw Rules: Point7 - Static		
Biological Event Symbol Set Code: 25 Code: 281400 Draw Rules: Point7 - Static		
Nuclear Event Symbol Set Code: 25 Code: 281500 Draw Rules: Point7 - Static		


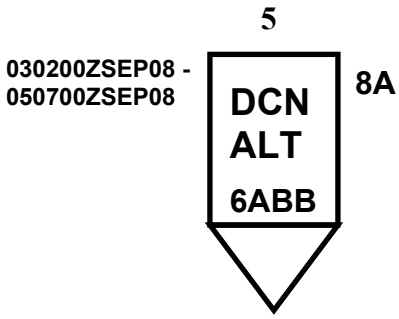

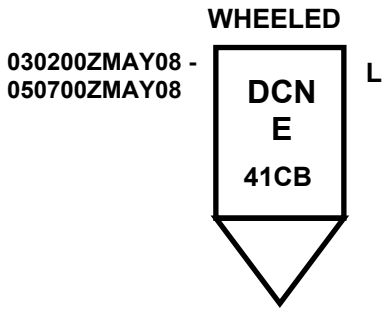

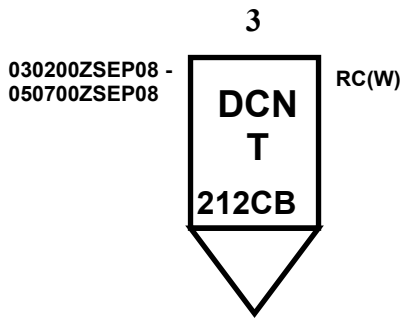

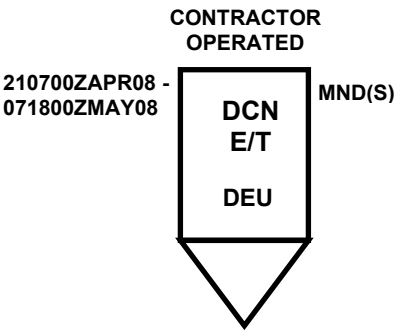
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XX. CBRN defense control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Nuclear Fallout Producing Event Symbol Set Code: 25 Code: 28**1**600 Draw Rules: Point7 - Static		
Radiological Event Symbol Set Code: 25 Code: 28**1**700 Draw Rules: Point7 - Static		
Decontamination Points/Sites		
General De-contamination Point/Site Symbol Set Code: 25 Code: 28**1**800 Draw Rules: Point1 - Static		


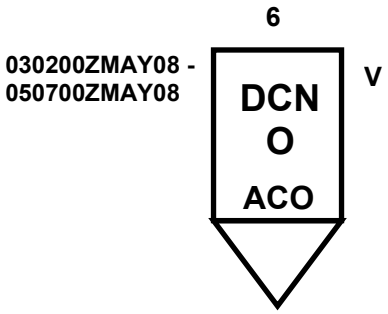

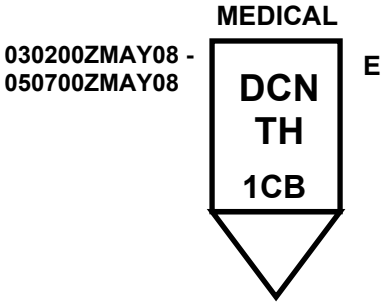

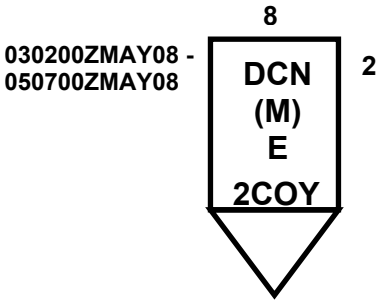

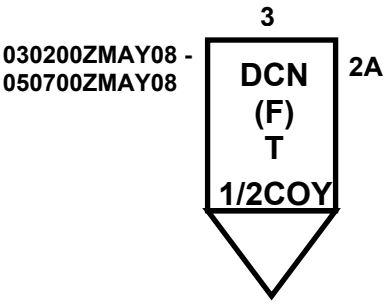
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XX. CBRN defense control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Alternate De-contamination Point/Site Symbol Set Code: 25 Code: 281**801** Draw Rules: Point1 - Static		
Equipment De-contamination Point/Site Symbol Set Code: 25 Code: 281**802** Draw Rules: Point1 - Static		
Troop De-contamination Point/Site Symbol Set Code: 25 Code: 281**803** Draw Rules: Point1 - Static		
Equipment / Troop De-contamination Point/Site Symbol Set Code: 25 Code: 281**804** Draw Rules: Point1 - Static		


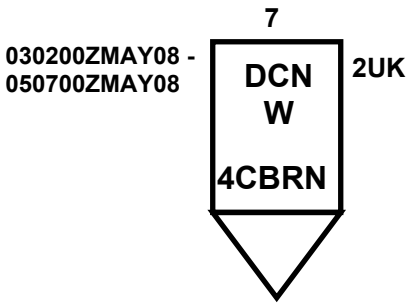
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XX. CBRN defense control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Operational De-contamination Point/Site Symbol Set Code: 25 Code: 281**805** Draw Rules: Point1 - Static		
Thorough De-contamination Point/Site Symbol Set Code: 25 Code: 281**806** Draw Rules: Point1 - Static		
Main Equipment De-contamination Point/Site Symbol Set Code: 25 Code: 281**807** Draw Rules: Point1 - Static		
Forward Troop De-contamination Point/Site Symbol Set Code: 25 Code: 281**808** Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.


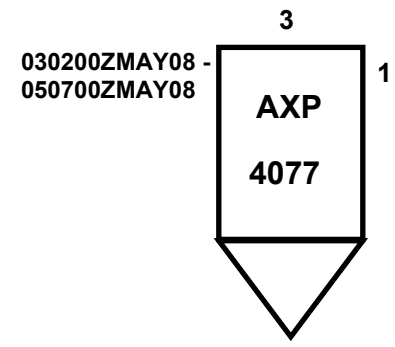
TABLE H-XX. CBRN defense control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Wounded Personnel De-contamination Site Symbol Set Code: 25 Code: 281**09** Draw Rules: Point1 - Static		

H.5.24 Sustainment control measures.


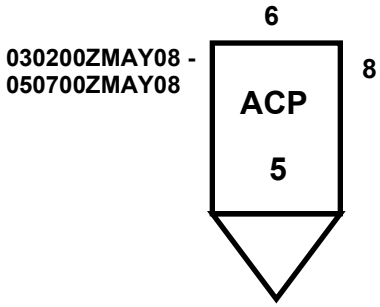

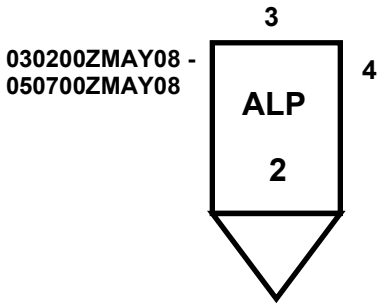

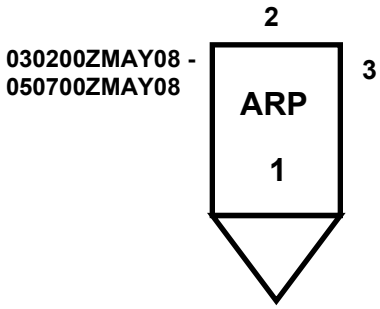
H.5.24.1 Sustainment control measures. The provision of logistics and personnel services required to maintain and prolong operations until successful mission accomplishment.

TABLE H-XXI. Sustainment point control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Sustainment Points Symbol Set Code: 25 Code: **32**0000	N/A	N/A
Ambulance Points Symbol Set Code: 32**01**00	N/A	N/A
Ambulance Exchange Point Symbol Set Code: 3201**01** Draw Rules: Point1 - Static		
	A location where a patient is transferred from one ambulance to another en-route to a medical treatment facility. (ATP 4-02.2)	


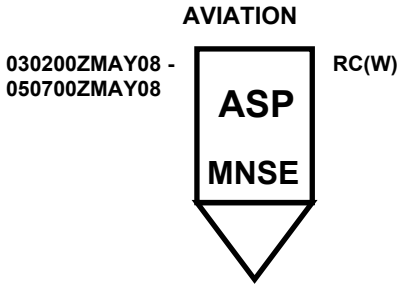

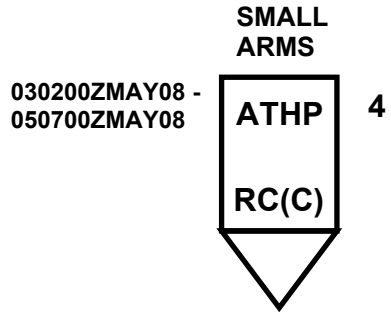

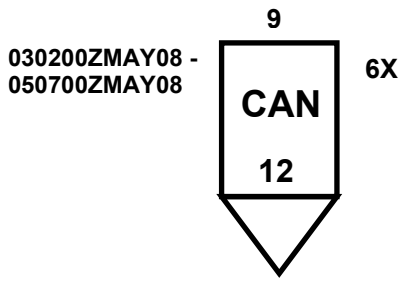

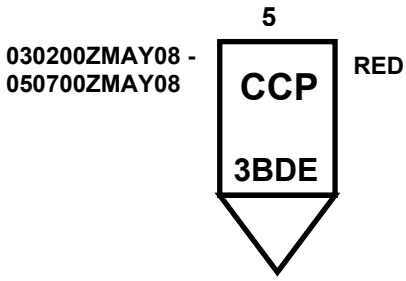
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXI. Sustainment point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Ambulance Control Point Symbol Set Code: 25 Code: 320**102** Draw Rules: Point1 - Static		
	A point where ambulances may take one of two or more directions to reach loading points. (ATP 4-02.2)	
Ambulance Load Point Symbol Set Code: 25 Code: 320**103** Draw Rules: Point1 - Static		
	A point where one or more ambulances are stationed ready to receive patients for evacuation. (ATP 4-02.2)	
Ambulance Relay Point Symbol Set Code: 25 Code: 320**104** Draw Rules: Point1 - Static		
	A point where one or more empty ambulances are stationed. (ATP 4-02.2)	


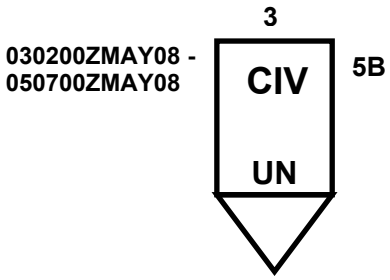

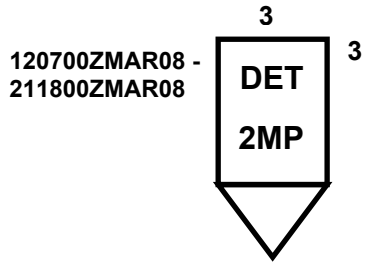

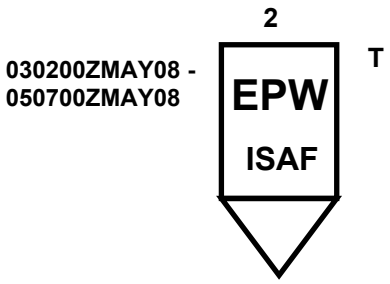
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXI. Sustainment point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Ammunition Supply Point Symbol Set Code: 25 Code: 32**02**00 Draw Rules: Point1 - Static		
An area designated to receive, store, reconfigure and issue Class V material.		
Ammunition Transfer Point Symbol Set Code: 25 Code: 32**03**00 Draw Rules: Point1 - Static		
A designated temporary site from which Class V material is transferred to unit vehicles.		
Cannibalization Point Symbol Set Code: 25 Code: 32**04**00 Draw Rules: Point1 - Static		
Casualty Collection Point Symbol Set Code: 25 Code: 32**05**00 Draw Rules: Point1 - Static		
A specific location where casualties are assembled to be transported to a medical treatment facility, for example, a company aid post.		


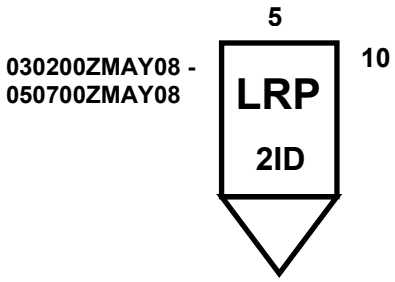

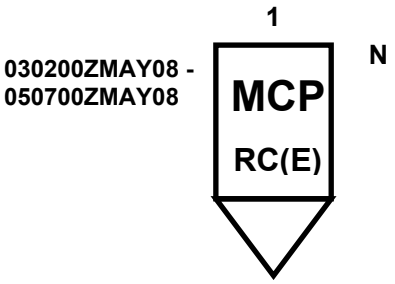

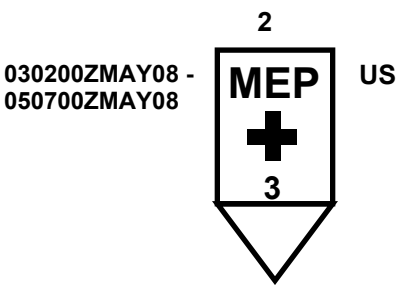

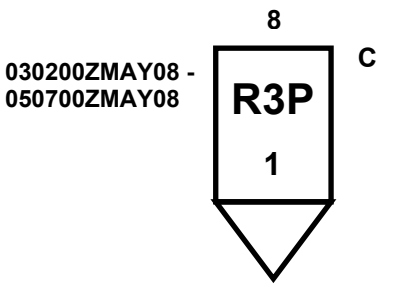
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXI. Sustainment point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Civilian Collection Point Symbol Set Code: 25 Code: 32**0**600 Draw Rules: Point1 - Static		
A specific location where civilians are assembled to be transported to another location.		
Detainee Collection Point Symbol Set Code: 25 Code: 32**0**700 Draw Rules: Point1 - Static		
A specific location where detainee are assembled to be transported to another location.		
Enemy Prisoner of War (EPW) Collection Point Symbol Set Code: 25 Code: 32**0**800 Draw Rules: Point1 - Static		
A specific location where enemy prisoners of war are assembled to be transported to another location.		






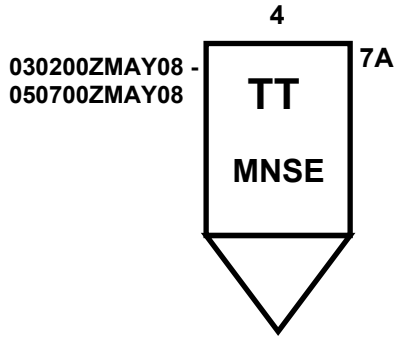

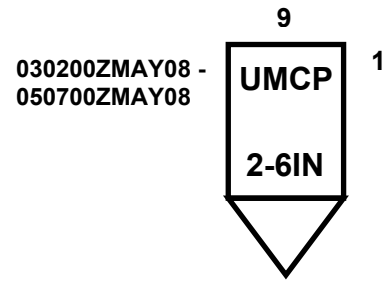
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXI. Sustainment point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Logistics Release Point (LRP) Symbol Set Code: 25 Code: 32**0**900 Draw Rules: Point1 - Static		
Maintenance Collection Point (MCP) Symbol Set Code: 25 Code: 32**1**000 Draw Rules: Point1 - Static		
	A point established to collect equipment awaiting repair, controlled exchange, cannibalization, or evacuation. It may be operated by the user or by the direct support maintenance units.	
Medical Evacuation (MEDEVAC) Pick-up Point Symbol Set Code: 25 Code: 32**1**100 Draw Rules: Point1 - Static		
Rearm, Refuel and Resupply Point (R3P) Symbol Set Code: 25 Code: 32**1**200 Draw Rules: Point1 - Static		
	A designated point through which a unit passes where it receives fuel, ammunition and other necessary supplies to continue operations.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXI. Sustainment point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Refuel On the Move (ROM) Point Symbol Set Code: 25 Code: 321300 Draw Rules: Point1 - Static		
An area established to ensure that fuel tanks on combat and fuel servicing vehicles are full before they arrive in the unit's tactical assembly area.		
Traffic Control Post (TCP) Symbol Set Code: 25 Code: 321400 Draw Rules: Point1 - Static		
Manned post used to preclude interruption of traffic flow or movement along designated routes.		
Trailer Transfer Point (TTP) Symbol Set Code: 25 Code: 321500 Draw Rules: Point1 - Static		
A location where trailers are transferred from one carrier to another while en-route.		
Unit Maintenance Collection Point (UMCP) Symbol Set Code: 25 Code: 321600 Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.


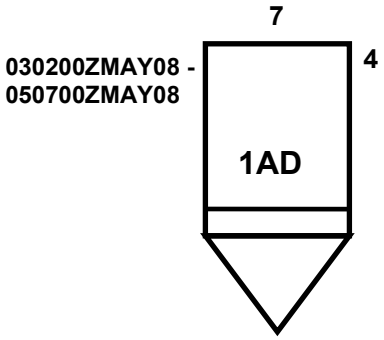

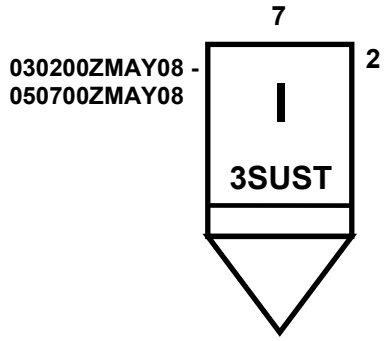
TABLE H-XXI. Sustainment point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
	A location or series of locations, operated by a battalion maintenance platoon, that is the nearest point to the combat unit to which equipment can be recovered and where limited parts are available and some repairs can be performed.	

H.5.25 Supply points.


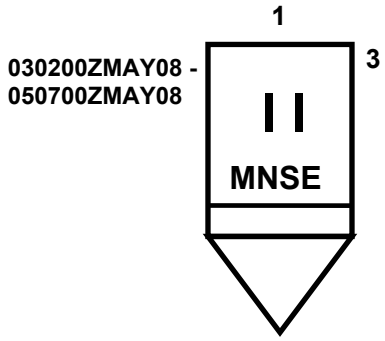

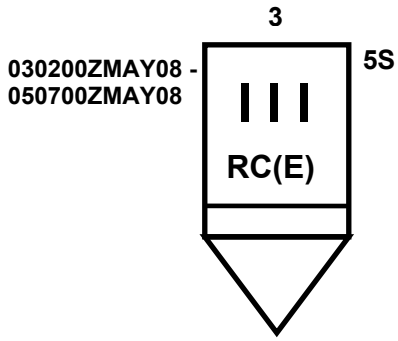

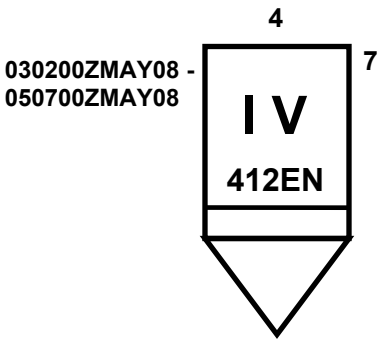
H.5.25.1 Supply point. Any point where supplies are issued in detail. Supply points follow the format as shown above with a modification to the symbol. As with the symbol for supply units, there is an additional line placed toward the bottom of the box. In building points, the name/type of the point is abbreviated and positioned inside the top part of the point symbol in field "A". For some supply symbols this may be a symbol icon. STANAG 2961 provides comparison charts for NATO and NATO nation classes of supply.

TABLE H-XXII. Supply point control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
General Supply Point Symbol Set Code: 25 Code: 32**1**700 Draw Rules: Point1 - Static		
NATO **Class I** Symbol Set Code: 25 Code: 321**01** Draw Rules: Point1 - Static		
	Those items which are consumed by personnel or animals at the approximately uniform rate, irrespective of local changes in combat or terrain conditions. (STANAG 2961)	


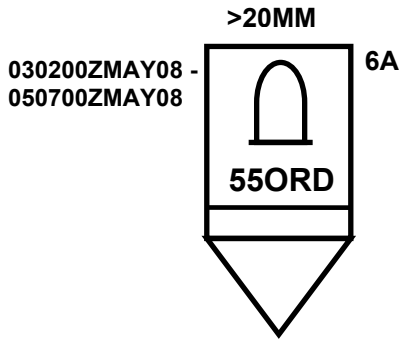

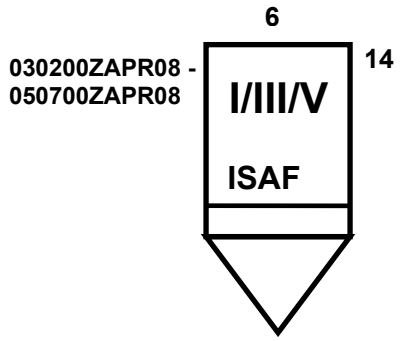

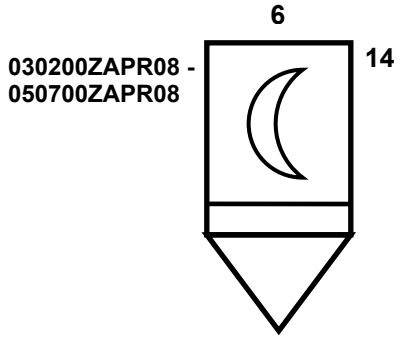
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
NATO Class II Symbol Set Code: 25 Code: 321**02** Draw Rules: Point1 - Static		
	Supplies for which allowances are established by tables of organization and equipment. (STANAG 2961)	
NATO Class III Symbol Set Code: 25 Code: 321**03** Draw Rules: Point1 - Static		
	Fuels and lubricants for all purposes, except for operating aircraft or for use in weapons such as flame throwers. (STANAG 2961)	
NATO Class IV Symbol Set Code: 25 Code: 321**04** Draw Rules: Point1 - Static		
	Supplies for which initial issue allowances are not prescribed by approved issue tables. (STANAG 2961)	


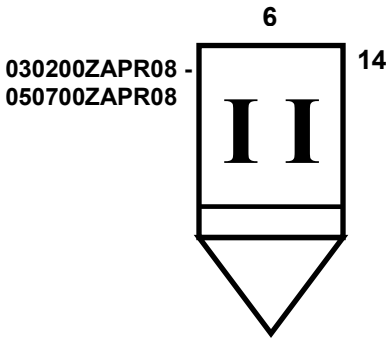

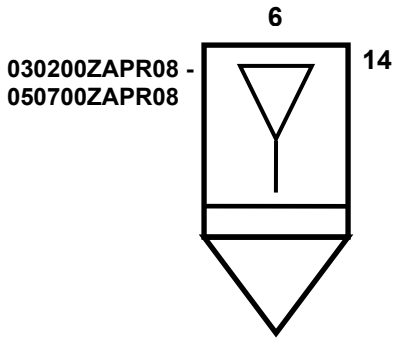
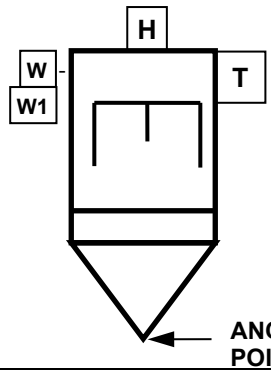
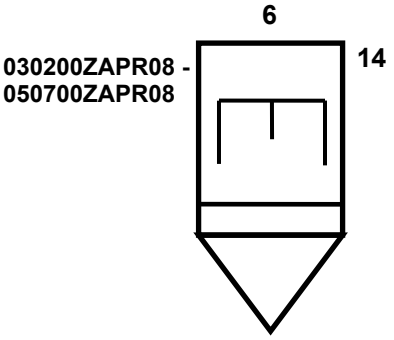
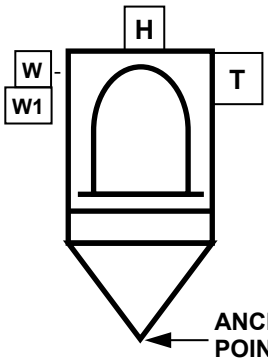
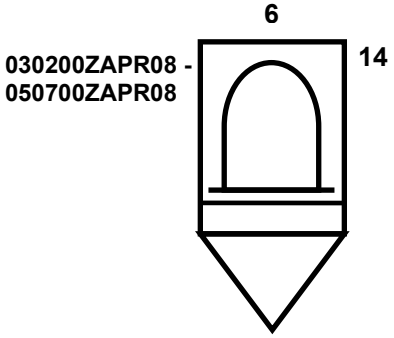
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
NATO Class V Symbol Set Code: 25 Code: 321**05** Draw Rules: Point1 - Static		
	Ammunition, explosives and chemical agents of all types. (STANAG 2961)	
NATO Multiple Supply Class Point. Symbol Set Code: 25 Code: 321**06** Draw Rules: Point1 - Static		
	Note: Use supply class numbers (I, II, III, IV and V) for A field or ALL for all classes of supply.	
US Class I Symbol Set Code: 25 Code: 321**07** Draw Rules: Point1 - Static		

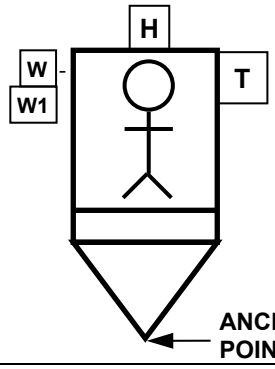
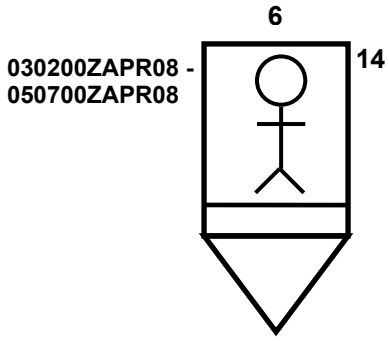
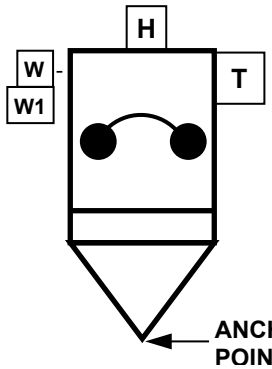
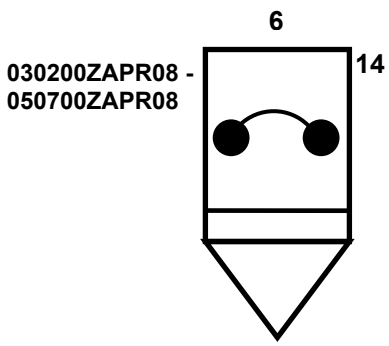
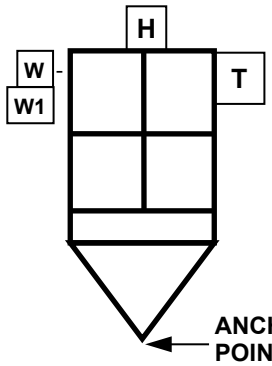
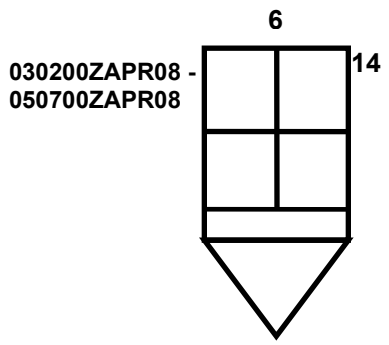
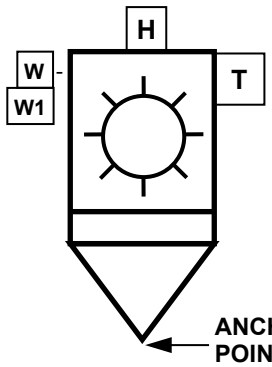
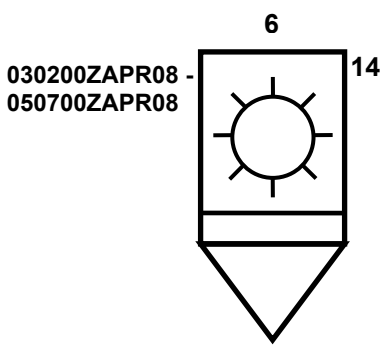
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
US Class II Symbol Set Code: 25 Code: 321**08** Draw Rules: Point1 - Static		
US Class III Symbol Set Code: 25 Code: 321**09** Draw Rules: Point1 - Static		
US Class IV Symbol Set Code: 25 Code: 321**10** Draw Rules: Point1 - Static		
US Class V Symbol Set Code: 25 Code: 321**11** Draw Rules: Point1 - Static		

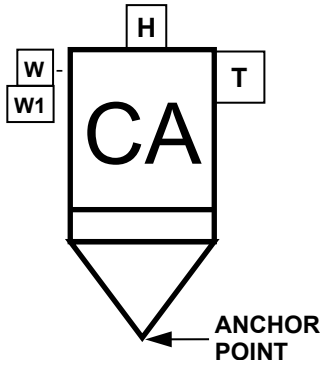
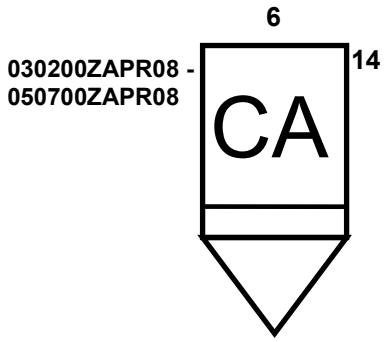

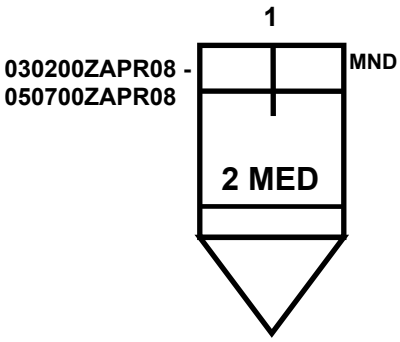

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
US Class VI Symbol Set Code: 25 Code: 321**12** Draw Rules: Point1 - Static		
US Class VII Symbol Set Code: 25 Code: 321**13** Draw Rules: Point1 - Static		
US Class VIII Symbol Set Code: 25 Code: 321**14** Draw Rules: Point1 - Static		
US Class IX Symbol Set Code: 25 Code: 321**15** Draw Rules: Point1 - Static		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
US Class X Symbol Set Code: 25 Code: 321**16** Draw Rules: Point1 - Static		
Medical Supply Point Symbol Set Code: 25 Code: 32**18**00 Draw Rules: Point1 - Static		
Convoy A group of vehicles organized for the purpose of control and orderly movement with or without escort protection.		
Sustainment Areas Symbol Set Code: 25 Code: **31**0000	N/A	N/A
Detainee Holding Area Symbol Set Code: 25 Code: 31**01**00 Draw Rules: Area1 - Dynamic		



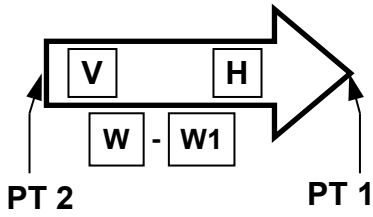

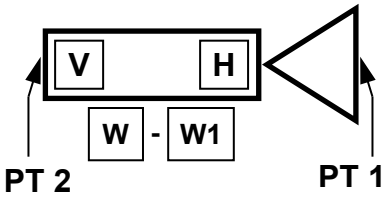

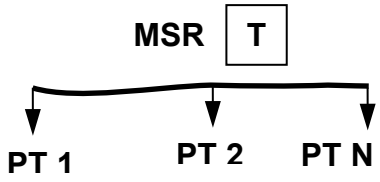
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Enemy Prisoner of War Holding Area Symbol Set Code: 25 Code: 31**02**00 Draw Rules: Area1 - Dynamic		
Forward Arming and Refueling Point (FARP) Symbol Set Code: 25 Code: 31**03**00 Draw Rules: Area1 - Dynamic		
	A temporary facility — organized, equipped and deployed by an aviation commander and normally located in the main battle area closer to the area where operations are being conducted than the aviation unit's combat service area — to provide fuel and ammunition necessary for the employment of aviation maneuver units in combat. The forward arming and refueling point permits combat aircraft to rapidly refuel and rearm simultaneously.	
Refugee Holding Area Symbol Set Code: 25 Code: 31**04**00 Draw Rules: Area1 - Dynamic		
Support Area		
Regimental Support Area Symbol Set Code: 25 Code: 31**05**00 Draw Rules: Area1 - Dynamic		
Brigade Support Area (BSA) Symbol Set Code: 25 Code: 31**06**00		



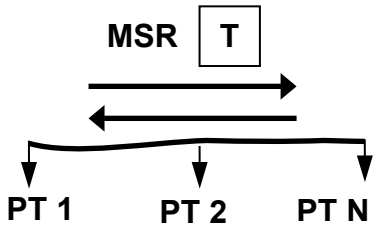
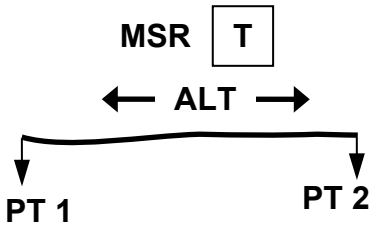

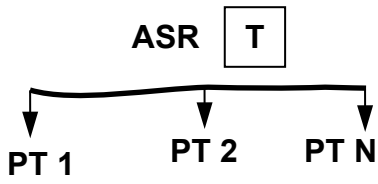
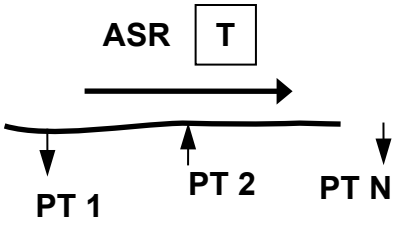

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Draw Rules: Area1 - Dynamic	A designated area in which combat service support elements from division support command and corps support command provide logistic support to a brigade.	
Division Support Area Symbol Set Code: 25 Code: 31**0**700 Draw Rules: Area1 - Dynamic	 An area normally located in the division rear and often positioned near air-landing facilities along the main supply route.	
Sustainment Lines Symbol Set Code: 25 Code: **33**0000	N/A	N/A
Moving Convoy Symbol Set Code: 25 Code: 33**0**100 Draw Rules: Line9 - Dynamic	 **Note**: The arrow points in the direction the convoy is moving.	
Halted Convoy Symbol Set Code: 25 Code: 33**0**200 Draw Rules: Line20 - Dynamic		
Supply Route		
Main Supply Route (MSR) Symbol Set Code: 25 Code: 33**0**300 Draw Rules: Line21 - Dynamic	 The route or routes designated within an area of operations upon which the bulk of traffic flows in support of military operations.	

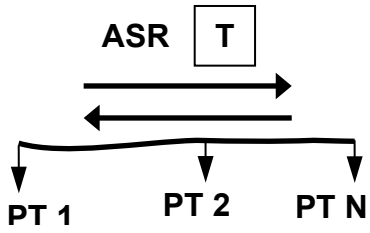
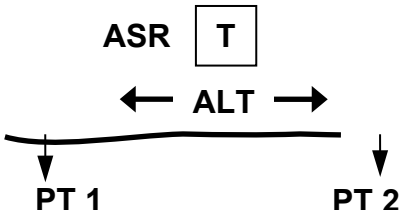

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
One Way Traffic Symbol Set Code: 25 Code: 330**01** Draw Rules: Line21 - Dynamic		
Two Way Traffic Symbol Set Code: 25 Code: 330**02** Draw Rules: Line21 - Dynamic		
Alternating Traffic Symbol Set Code: 25 Code: 330**03** Draw Rules: Line21 - Dynamic		
Alternate Supply Route (ASR) Symbol Set Code: 25 Code: 33**04**00 Draw Rules: Line21 - Dynamic	 A route or routes designated within an area of operations to provide for the movement of traffic when main supply routes become disabled or congested.	
One Way Traffic Symbol Set Code: 25 Code: 330**401** Draw Rules: Line21 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXII. Supply point control measure symbols - Continued.

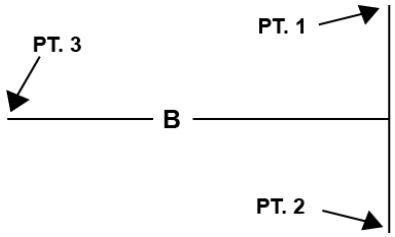



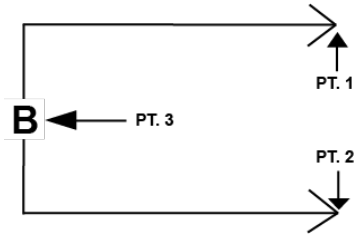


CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Two Way Traffic Symbol Set Code: 25 Code: 330**02** Draw Rules: Line21 - Dynamic		
Alternating Traffic Symbol Set Code: 25 Code: 330**03** Draw Rules: Line21 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.26 Mission and Operational tasks.





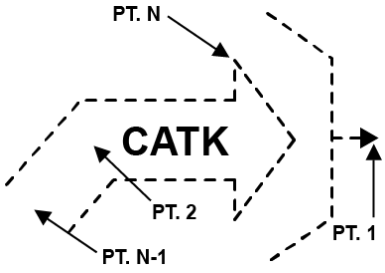
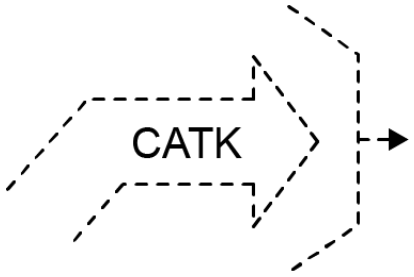


H.5.26.1 Mission and operational task symbols. A specific activity performed by a unit while executing a form of tactical operation or form of maneuver.

TABLE H-XXIII. Mission Task Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Mission Tasks Symbol Set Code: 25 Code: **34**0000 Static/Dynamic: N/A	N/A	N/A
Block Symbol Set Code: 25 Code: 34**01**00 Draw Rules: Area24 - Dynamic		
Breach Symbol Set Code: 25 Code: 34**02**00 Draw Rules: Line22 - Dynamic		
Bypass Symbol Set Code: 25 Code: 34**03**00 Draw Rules: Point12 - Dynamic		
Canalize Symbol Set Code: 25 Code: 34**04**00 Draw Rules: Point12 - Dynamic		



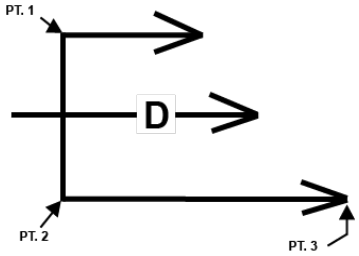

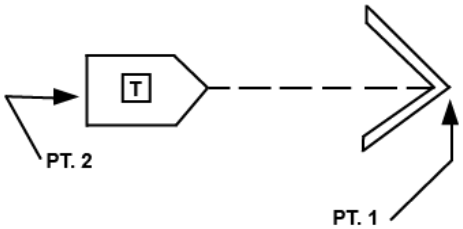
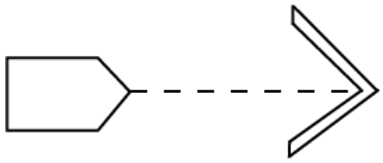


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXIII. Mission Task Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Clear Symbol Set Code: 25 Code: 340500 Draw Rules: Line23 - Dynamic		
Counterattack Symbol Set Code: 25 Code: 340600 Draw Rules: Axis2 - Dynamic	 **Note:** The dashed lines in this graphic shall be displayed in present and anticipated status.	
Counterattack by Fire Symbol Set Code: 25 Code: 340700 Draw Rules: Axis2 - Dynamic	 **Note:** The dashed lines in this graphic shall be displayed in present and anticipated status.	
Delay Symbol Set Code: 25 Code: 340800 Draw Rules: Line24 - Dynamic		






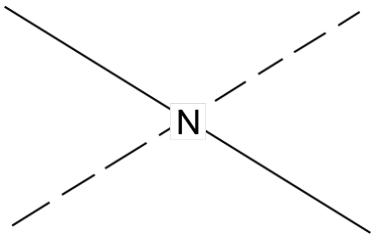


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXIII. Mission Task Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Destroy Symbol Set Code: 25 Code: 34**09**00 Draw Rules: Point2 - Static		
Disrupt Symbol Set Code: 25 Code: 34**10**00 Draw Rules: Area25 - Dynamic		
Fix Symbol Set Code: 25 Code: 34**11**00 Draw Rules: Line28 - Dynamic		
Follow and Assume Symbol Set Code: 25 Code: 34**12**00 Draw Rules: Line25 - Dynamic		
	Note: The dashed lines in this graphic shall be displayed in present and anticipated status.	
Follow and Support Symbol Set Code: 25 Code: 34**13**00 Draw Rules: Line25 - Dynamic		




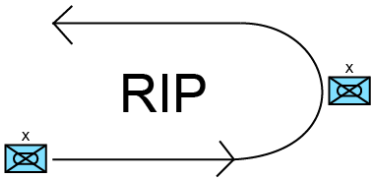

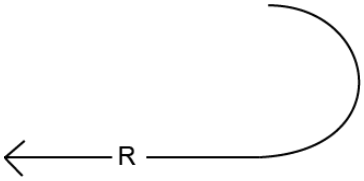


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXIII. Mission Task Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Interdict Symbol Set Code: 25 Code: 34**1**400 Draw Rules: Point14 - Static		
Isolate Symbol Set Code: 25 Code: 34**1**500 Draw Rules: Area15 - Dynamic		
Neutralize Symbol Set Code: 25 Code: 34**1**600 Draw Rules: Point2 - Static	 **Note:** The dashed lines in this graphic shall be displayed in present and anticipated status.	
Occupy Symbol Set Code: 25 Code: 34**1**700 Draw Rules: Area16 - Dynamic		

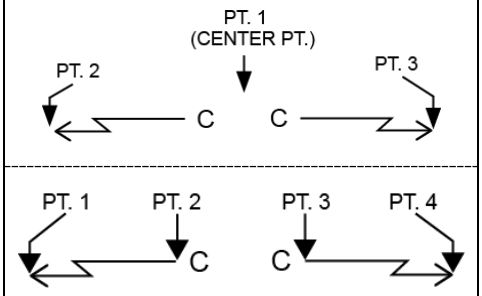
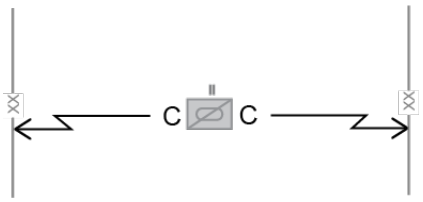
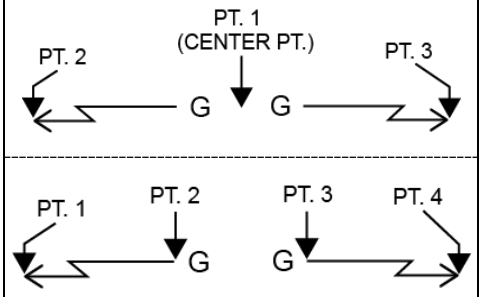

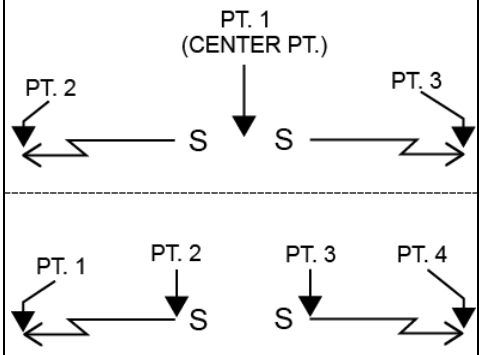

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXIII. Mission Task Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Penetrate Symbol Set Code: 25 Code: 34**18**00 Draw Rules: Area17 - Dynamic		
Relief in Place (RIP) Symbol Set Code: 25 Code: 34**19**00 Draw Rules: Area18 - Dynamic		
Retire/ Retirement Symbol Set Code: 25 Code: 34**20**00 Draw Rules: Line24 - Dynamic		
Secure Symbol Set Code: 25 Code: 34**21**00 Draw Rules: Area19 - Dynamic		



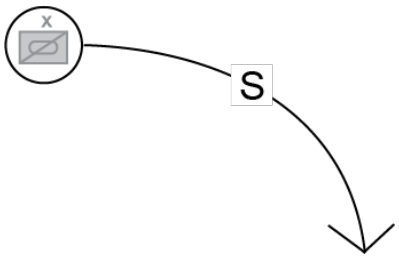
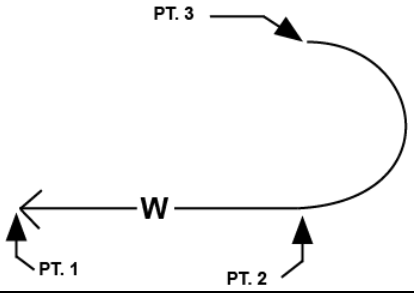
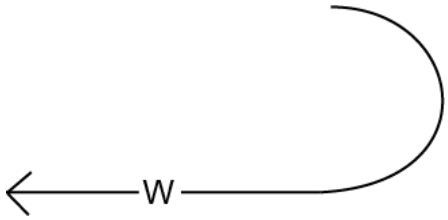
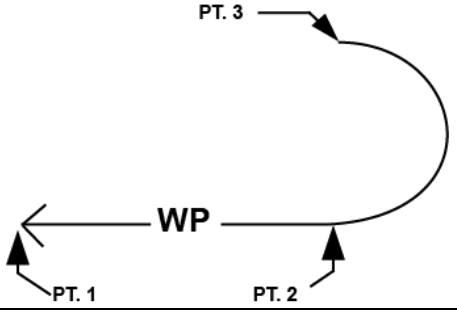
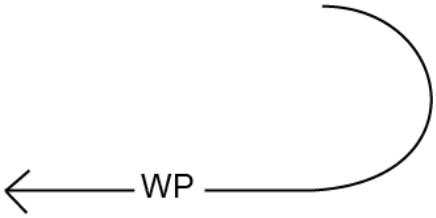
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXIII. Mission Task Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Security Symbol Set Code: 25 Code: 34**22**00	N/A	N/A
Cover Symbol Set Code: 25 Code: 3422**01** Draw Rules: Line26 - Dynamic		
Guard Symbol Set Code: 25 Code: 3422**02** Draw Rules: Line26 - Dynamic		
Screen Symbol Set Code: 25 Code: 3422**03** Draw Rules: Line26 - Dynamic		

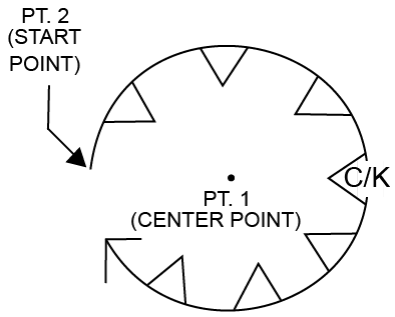

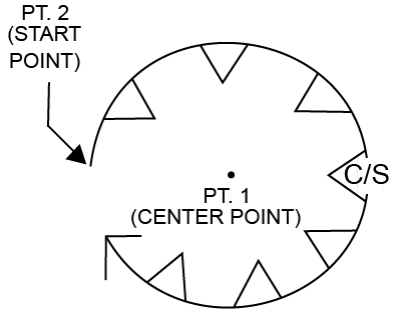

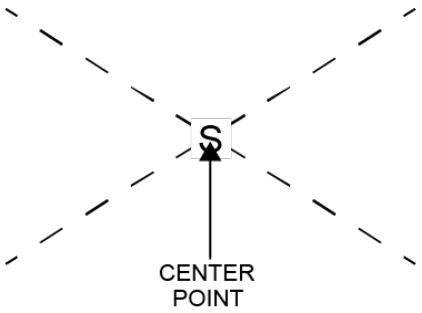
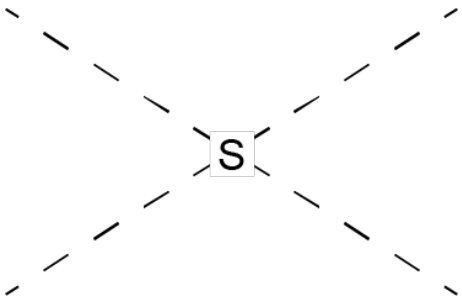
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXIII. Mission Task Symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Seize Symbol Set Code: 25 Code: 34**23**00 Draw Rules: Line27 - Dynamic	 	
Withdraw Symbol Set Code: 25 Code: 34**24**00 Draw Rules: Line24 - Dynamic		
Withdraw Under Pressure Symbol Set Code: 25 Code: 34**25**00 Draw Rules: Line24 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXIII. Mission Task Symbols.



CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Cordon and Knock Symbol Set Code: 25 Code: 34**26**00 Draw Rules: Area15 - Dynamic		
Cordon and Search Symbol Set Code: 25 Code: 34**27**00 Draw Rules: Area15 - Dynamic		
Suppress Symbol Set Code: 25 Code: 34**28**00 Draw Rules: Point2 - Static	 **Note:** The dashed lines in this graphic shall be displayed in present and anticipated status.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.27 Intelligence control measures.

H.5.27.1 Intelligence control measure symbols. Support the planning, execution and support the acquisition of timely, tailored and accurate intelligence in relation with the commander's mission.

TABLE H-XXIV. Intelligence control measure symbols.

CONTROL MEASURE	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure is used and are not a part of the control measure.
Intelligence Lines Symbol Set Code: 25 Code: **30**0000	N/A	N/A
Intelligence Coordination Line (ICL) Symbol Set Code: 30**01**00 Draw Rules: Line2 - Dynamic		

H.5.28 Control measure sector 1 modifiers. Only one control measure symbol, the limited access area (LAA), is authorized to use control measure sector 1 modifiers code values 01 through 12. The location of the modifier is in a fixed position in relation to the area, as determined by the anchor points. The physical location of the sector 1 modifiers in the control measure symbol is different from the other appendices in this standard. The physical location is depicted in the symbol template.

TABLE H-XXV. Control measures sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
WHEELED (LIMITED CROSS COUNTRY) Symbol Set Code: 25 Code: 01			For use with Limited Access Area only
WHEELED (CROSS COUNTRY) Symbol Set Code: 25 Code: 02			For use with Limited Access Area only

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXV. Control measures sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
TRACKED Symbol Set Code: 25 Code: 03			For use with Limited Access Area only
WHEELED AND TRACKED COMBINATION Symbol Set Code: 25 Code: 04			For use with Limited Access Area only
TOWED Symbol Set Code: 25 Code: 05			For use with Limited Access Area only
RAILWAY Symbol Set Code: 25 Code: 06			For use with Limited Access Area only
OVER-SNOW (PRIME MOVER) Symbol Set Code: 25 Code: 07			For use with Limited Access Area only
SLED Symbol Set Code: 25 Code: 08			For use with Limited Access Area only
PACK ANIMAL Symbol Set Code: 25 Code: 09			For use with Limited Access Area only
BARGE Symbol Set Code: 25 Code: 10			For use with Limited Access Area only
AMPHIBIOUS Symbol Set Code: 25 Code: 11			For use with Limited Access Area only
NO VEHICLES Symbol Set Code: 25 Code: 12			For use with Limited Access Area only
UNSPECIFIED Symbol Set Code: 25 Code: 13	Mine Type		
ANTIPERSONNEL MINE Symbol Set Code: 25 Code: 14	Mine Type		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXV. Control measures sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS Symbol Set Code: 25 Code: 15	Mine Type		
ANTITANK MINE Symbol Set Code: 25 Code: 16	Mine Type		
ANTITANK MINE WITH ANTIHANDLING DEVICE Symbol Set Code: 25 Code: 17	Mine Type		
WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 18	Mine Type		
MINE CLUSTER Symbol Set Code: 25 Code: 19	Mine Type		
ANTIPERSONNEL MINE AND ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS Symbol Set Code: 25 Code: 20	Mine Type		
ANTIPERSONNEL MINE AND ANTITANK MINE Symbol Set Code: 25 Code: 21	Mine Type		
ANTIPERSONNEL MINE AND ANTITANK MINE WITH ANTIHANDLING DEVICE Symbol Set Code: 25 Code: 22	Mine Type		
ANTIPERSONNEL MINE AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 23	Mine Type		
ANTIPERSONNEL MINE AND MINE CLUSTER Symbol Set Code: 25 Code: 24	Mine Type		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXV. Control measures sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS AND ANTITANK MINE Symbol Set Code: 25 Code: 25	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS AND ANTITANK MINE WITH ANTIHANDLING DEVICE Symbol Set Code: 25 Code: 26	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 27	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS AND MINE CLUSTER Symbol Set Code: 25 Code: 28	Mine Type		
ANTITANK MINE AND ANTITANK MINE WITH ANTIHANDLING DEVICE Symbol Set Code: 25 Code: 29	Mine Type		
ANTITANK MINE AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 30	Mine Type		
ANTITANK MINE AND MINE CLUSTER Symbol Set Code: 25 Code: 31	Mine Type		
ANTITANK MINE WITH ANTIHANDLING DEVICE AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 32	Mine Type		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXV. Control measures sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTITANK MINE WITH ANTIHANDLING DEVICE AND MINE CLUSTER Symbol Set Code: 25 Code: 33	Mine Type		
WIDE AREA ANTITANK MINE AND MINE CLUSTER Symbol Set Code: 25 Code: 34	Mine Type		
ANTIPERSONNEL MINE, ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, AND ANTITANK MINE Symbol Set Code: 25 Code: 35	Mine Type		
ANTIPERSONNEL MINE, ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, AND ANTITANK MINE WITH ANTIHANDLING DEVICE Symbol Set Code: 25 Code: 36	Mine Type		
ANTIPERSONNEL MINE, ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 37	Mine Type		
ANTIPERSONNEL MINE, ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, AND MINE CLUSTER Symbol Set Code: 25 Code: 38	Mine Type		
ANTIPERSONNEL MINE, ANTITANK MINE, AND ANTITANK MINE WITH ANTIHANDLING DEVICE Symbol Set Code: 25 Code: 39	Mine Type		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXV. Control measures sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTIPERSONNEL MINE, ANTITANK MINE, AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 40	Mine Type		
ANTIPERSONNEL MINE, ANTITANK MINE, AND MINE CLUSTER Symbol Set Code: 25 Code: 41	Mine Type		
ANTIPERSONNEL MINE, ANTITANK MINE WITH ANTIHANDLING DEVICE, AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 42	Mine Type		
ANTIPERSONNEL MINE, ANTITANK MINE WITH ANTIHANDLING DEVICE, AND MINE CLUSTER Symbol Set Code: 25 Code: 43	Mine Type		
ANTIPERSONNEL MINE, WIDE AREA ANTITANK MINE, AND MINE CLUSTER Symbol Set Code: 25 Code: 44	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, ANTITANK MINE, AND ANTITANK MINE WITH ANTIHANDLING DEVICE Symbol Set Code: 25 Code: 45	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, ANTITANK MINE, AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 46	Mine Type		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-XXV. Control measures sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, ANTITANK MINE, AND MINE CLUSTER Symbol Set Code: 25 Code: 47	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, ANTITANK MINE WITH ANTIHANDLING DEVICE, AND WIDE AREA ANTITANK MINE Symbol Set Code: 25 Code: 48	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, ANTITANK MINE WITH ANTIHANDLING DEVICE, AND MINE CLUSTER Symbol Set Code: 25 Code: 49	Mine Type		
ANTIPERSONNEL MINE WITH DIRECTIONAL EFFECTS, WIDE AREA ANTITANK MINE, AND MINE CLUSTER Symbol Set Code: 25 Code: 50	Mine Type		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.29 Abbreviations and acronyms for use with control measure symbols.

H.5.29.1 Boundary abbreviations and acronyms. Table H-XXVI below provides a list of abbreviations and acronyms for echelons and functional organizations to be used with boundaries.

TABLE H-XXVI. Abbreviations and acronyms for use with boundaries.

ECHELON	ABBREVIATION /ACRONYM	EXAMPLES Note: Any Unit identification can be followed by a 3 letter country code in parenthesis.
Army Group	AG (AAP-15)	1AG
Army	A (AAP-15)	3A
Corps	Does not require an abbreviation. Corps is the only echelon to use Roman numerals.	II
Marine Expeditionary Force	MEF (AAP-15)	III MEF (Use Roman numerals)
Marine Air-Ground Task Force	MAGTF (AAP-15)	4MAGTF
Division	DIV (AAP-15)	1DIV
Air Assault Division	AAD	101AAD
Airborne Division	ABD (AAP-15)	6ABD
Armored Division	AD (AAP-15)	2AD
Cavalry Division	CD	1CD
Infantry Division	ID (AAP-15)	52ID
Marine Division	MARD	1MARD
Mechanized Division	MD (AAP-15)	4MD
Mountain Division	MTND	10MTND
Multinational Division	MND (AAP-15)	1MND or MND(S).
Note: Multinational divisions may use geographical references in parenthesis		
Brigade	BDE (AAP-15)	2BDE
Air Assault Brigade	AAB (AAP-15)	8AAB
Airborne Brigade	ABB (AAP-15)	3ABB
Marine Expeditionary Brigade	MEB (AAP-15)	6MEB
Multinational Brigade	MNB (AAP-15)	2MNB
Naval Infantry Brigade	NIB (AAP-15)	4NIB
Regiment	REGT (AAP-15)	21REGT
Airborne Regiment	ABR (AAP-15)	901ABR
Marine Expeditionary Unit	MEU (AAP-15)	3MEU
Group	GP	41GP
Battle Group	BG (AAP-15)	5BG
Battalion	BN (AAP-15)	7BN
Company	COY (AAP-15)	ACOY or 2COY
Platoon	PLT	2PLT
Team	TM	BTM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.29.2 Unit functions abbreviation and acronyms. Table H-XXVII provides a list of abbreviations and acronyms for unit functions to be used with control measures. The asterisk behind the abbreviation indicates that it is in AAP-15.

TABLE H-XXVII. Abbreviation and acronyms used in control measure symbols for unit functions.

Function	Abbreviation /Acronyms
Air Defense	ADA*
Antitank/Antiarmor	AT*
Armor	AR*
Aviation	AVN*
Chemical Biological Radiological Nuclear (CBRN)	CB
Civil Affairs	CA*
Combined Arms	CAR
Counterintelligence	CI*
Electronic Warfare	EW*
Engineer	EN
Explosive Ordnance Disposal	EOD*
Field Artillery	FA*
Infantry	IN
Logistics	LOG*
Maintenance	MNT
Medical	MED*
Military Intelligence	MI*
Military Police	MP*
Naval	NAV
Ordnance	ORD
Quartermaster	QM
Reconnaissance	REC
Signal	SIG
Special Forces	SF
Special Operations Force	SOF
Surveillance	SUR
Sustainment	SUST
Transportation	TPT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

METEOROLOGICAL AND OCEANOGRAPHIC SYMBOLOGY

I.1 SCOPE

I.1.1 Scope. This appendix addresses control measure symbols in the meteorological and oceanographic (METOC) domain. Although the symbology in this domain is outside the configuration management of the Symbology Standards Management Committee (SSMC), it is beneficial to present the information to users of this standard as a separate appendix. This appendix has been coordinated and approved by the joint METOC community and is a mandatory part of this standard. The information contained herein is intended for compliance.

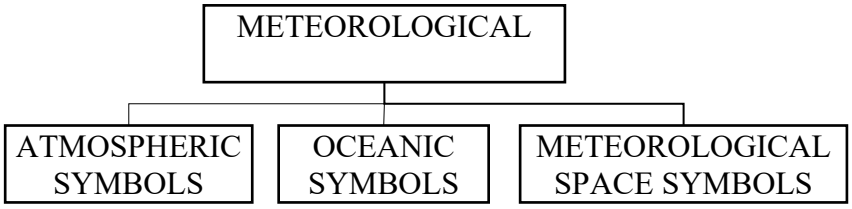


FIGURE I-1. Meteorological and oceanographic appendix sections

I.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

I.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

I.4 GENERAL REQUIREMENTS

I.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and METOC symbology.

I.5 DETAILED REQUIREMENTS

I.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

I.5.2 Symbology identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

I.5.3 Symbology set. The following graphics are some of those more commonly used to depict weather and should only be used on weather-related displays. These graphics must be implemented as a separate layer or classification since they may conflict with other symbols or icons used in the warrior icon set. These graphics are based on approved symbols and icons from the World Meteorological Organization (WMO).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-I. Standard Draw Rules.

Draw Rule Type	Draw Rule
Area1	**Anchor Points:** This graphic requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Scalable. **Orientation:** Not applicable.
Area2	**Anchor Points:** This graphic requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. **Orientation:** Not applicable.
Point1	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable. **Orientation:** The graphic is typically centered over the desired location.
Point2	**Anchor Points:** This graphic requires one anchor point. The center point defines the geometric center of the graphic. **Size/Shape:** Scalable. **Orientation:** The graphic is centered over the anchor location.
Point3	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable. **Orientation:** The graphic is oriented upright on the display and operator-centered over the desired location.
Point4	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable. **Orientation:** The graphic is centered over the location of the reported wind.
Point5	**Anchor Points:** This graphic requires a minimum of two anchor points. The first point defines the location of the plot circle. Additional points define the wind shaft and the speed of the wind. Wind speed is depicted on the shaft using a combination of the shaft alone (1-2 knots), half barbs (5 knots), barbs (10 knots) and pennants (50 knots). Wind speeds 5 knots or greater are rounded to the nearest 5 knots. Missing wind speed is depicted by an "X" at the end of the wind shaft. Winds with missing direction are not displayed. **Size/Shape:** Not applicable. **Orientation:** The shaft of the graphic is oriented with reference to true north in the direction from which the wind is blowing to the nearest 10 degrees. The barbs and pennants lie back from the shaft at an angle of 120 degrees and are oriented to the left of the shaft in the Northern Hemisphere and to the right in the Southern Hemisphere. The graphic is operator-centered over the desired location.
Point6	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable. **Orientation:** The graphic is centered over the location of the reported cloud cover.
Point7	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable. **Orientation:** The graphic is centered over the location of the reported conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-I. Standard Draw Rules - Continued.

Draw Rule Type	Draw Rule
Point8	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable. **Orientation:** The graphic is centered over the position of the tropical system.
Line1	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The curvature of the line is operator defined. **Orientation:** The first and last anchor points determine the length of the line.
Line2	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a straight line consisting of a short line section and an alternating V shape. The curvature and amplitude of the waves of the line is operator defined. **Orientation:** The first and last anchor points determine the length of the line. The line should be drawn so the "V" shapes are facing in the direction of movement. The "V" shapes and short line segment will alternate along the line.
Line3	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a straight line consisting of a short line section and alternating two dots. The curvature and amplitude of the waves of the line is operator defined. **Orientation:** The first and last anchor points determine the length of the line. The two dots and the short line segment will alternate along the line.
Line4	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a curved/wavy line consisting of a short line and one dot. The curvature and amplitude of the waves of the line is operator defined. **Orientation:** The first and last anchor points determine the length of the line. The dot and the short line segment will alternate along the line.
Line5	**Anchor Points:** This graphic requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. **Orientation:** The first and last anchor points determine the length of the line. The dual line segments will be parallel to slightly wider at the western end.
Line6	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a solid straight line with alternating slanted lines connected as depicted in the example to indicate convergence. **Orientation:** The first and last anchor points determine the length of the line. The alternating slanted lines will be evenly spaced along the line. Orientation is determined by the anchor points.
Line7	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a dashed straight or curved line. The curvature of the line is operator defined. **Orientation:** The first and last anchor points determine the length of the line. The red and green line segments will alternate along the line. Orientation is determined by the anchor points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-I. Standard Draw Rules - Continued.

Draw Rule Type	Draw Rule
Line8	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable. **Orientation:** The graphic is oriented upright on the display as shown in the example and operator-centered over the desired location.

TABLE I-II. Atmospheric icons.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS Static/Dynamic: N/A Symbol Set Code: 45 Code: **11**0000	N/A	N/A
PRESSURE SYSTEMS **LOW PRESSURE CENTER** Static/Dynamic: D Symbol Set Code: 45 Code: 11**01**00 **Color**: Red (RGB 255,0,0) Draw Rules: Point1 - Static		The graphic is a letter 'L' with a dynamic tag 'P' below it that represents the lowest atmospheric pressure of the system. The value is three or 4 digits and represents the pressure in hectopascals (millibars). The value below, 998, represents 998 hectopascals. A value above 1000 hectopascals would be reflected in 4 digits like 1008 hectopascals.
PRESSURE SYSTEMS LOW PRESSURE CENTER **CYCLONE CENTER** Static/Dynamic: S Symbol Set Code: 45 Code: 1101**01** **Color**: Red (RGB 255,0,0) Draw Rules: Point1 - Static		The graphic is a letter 'C' that represents the atmospheric circulation center of the system.
PRESSURE SYSTEMS LOW PRESSURE CENTER **TROPOPAUSE LOW** Static/Dynamic: D Symbol Set Code: 45 Code: 1101**02** **Color**: Black Draw Rules: Point1 - Static		The center of the graphic is the pressure center. The low point of the Tropopause topography is indicated by the letter 'L' and the height (H in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS **HIGH PRESSURE CENTER** Static/Dynamic: D Symbol Set Code: 45 Code: 11**02**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point1 - Static		The graphic is a letter 'H' with a dynamic tag 'P' below it that represents the highest atmospheric pressure of the system. The value is three or four digits and represents the pressure in hectopascals (millibars). The value below, 1016, represents 1016 hectopascals. A value below 1000 hectopascals would be reflected in three digits like 998 hectopascals.
PRESSURE SYSTEMS HIGH PRESSURE CENTER **ANTICYCLONE CENTER** Static/Dynamic: S Symbol Set Code: 45 Code: 1102**01** **Color**: Blue (RGB 0,0,255) Draw Rules: Point1 - Static		The graphic is a letter 'A' that represents the atmospheric circulation center of the system. .
PRESSURE SYSTEMS HIGH PRESSURE CENTER **TROPOPAUSE HIGH** Static/Dynamic: D Symbol Set Code: 45 Code: 1102**02** **Color**: Black Draw Rules: Point1 - Static		The center of the graphic is the pressure center. The high point of the Tropopause topography is indicated by the letter 'H' and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
PRESSURE SYSTEMS **FRONTAL SYSTEMS** Symbol Set Code: 45 Code: 11**03**00	N/A	For special lines that are not symmetrical, such as Fronts, the sequence of anchor points determines the proper alignment of the line. For two anchor points that describe the position of the front or a section of the front, with L (for left point) and R (for right point): (1) If R comes before L in sequence, the front is rendered in the way shown, (2) If L comes before R in sequence, the front is rendered in the reverse with pips shown facing the opposite direction.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS FRONTAL SYSTEMS **COLD FRONT** Symbol Set Code: 45 Code: 110301 **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
PRESSURE SYSTEMS FRONTAL SYSTEMS COLD FRONT **UPPER COLD FRONT** Symbol Set Code: 45 Code: 110302 **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with hollow, triangular pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
PRESSURE SYSTEMS FRONTAL SYSTEMS COLD FRONT **COLD FRONTOGENESIS** Symbol Set Code: 45 Code: 110303 **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular pips spaced evenly along the line separated by one dot. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
PRESSURE SYSTEMS FRONTAL SYSTEMS COLD FRONT **COLD FRONTOLYSIS** Symbol Set Code: 45 Code: 110304 **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular pips spaced evenly along the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS FRONTAL SYSTEMS **WARM FRONT** Symbol Set Code: 45 Code: 110305 **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
PRESSURE SYSTEMS FRONTAL SYSTEMS WARM FRONT **UPPER WARM FRONT** Symbol Set Code: 45 Code: 110306 **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with hollow, half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
PRESSURE SYSTEMS FRONTAL SYSTEMS WARM FRONT **WARM FRONTOGENESIS** Symbol Set Code: 45 Code: 110307 **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, half-circle pips spaced evenly along the line separated by one dot. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
PRESSURE SYSTEMS FRONTAL SYSTEMS WARM FRONT **WARM FRONTOLYSIS** Symbol Set Code: 45 Code: 110308 **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, half-circle pips spaced evenly along the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS FRONTAL SYSTEMS **OCCLUDED FRONT** Symbol Set Code: 45 Code: 110309 **Color**: Purple (RGB 111,49,152) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with alternating solid, triangular and half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. An occluded front is where a cold front has overtaken a warm front and is the discontinuity between colder air and cooler air and the colder air forces the cooler air aloft.
PRESSURE SYSTEMS FRONTAL SYSTEMS OCCLUDED FRONT **UPPER OCCLUDED FRONT** Symbol Set Code: 45 Code: 110310 **Color**: Purple (RGB 111,49,152) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with alternating hollow, triangular and half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
PRESSURE SYSTEMS FRONTAL SYSTEMS OCCLUDED FRONT **OCCLUDED FRONTOLYSIS** Symbol Set Code: 45 Code: 110311 **Color**: Purple (RGB 111,49,152) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with alternating solid, triangular and half-circle pips spaced evenly along the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS FRONTAL SYSTEMS **STATIONARY FRONT** Symbol Set Code: 45 Code: 110312 **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular and half-circle pips spaced evenly on alternating sides of the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down).
PRESSURE SYSTEMS FRONTAL SYSTEMS STATIONARY FRONT **UPPER STATIONARY FRONT** Symbol Set Code: 45 Code: 110313 **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with hollow, triangular and half-circle pips spaced evenly on alternating sides of the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down).
PRESSURE SYSTEMS FRONTAL SYSTEMS STATIONARY FRONT **STATIONARY FRONTOGENESIS** Symbol Set Code: 45 Code: 110314 **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular and half-circle pips spaced evenly on alternating sides of the line separated by one dot. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS FRONTAL SYSTEMS STATIONARY FRONT **STATIONARY FRONTOLYSIS** Symbol Set Code: 45 Code: 1103**15** **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular and half-circle pips spaced evenly on alternating sides of the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down)..
PRESSURE SYSTEMS **LINES** Static/Dynamic: N/A Symbol Set Code: 45 Code: 11**04**00	N/A	
PRESSURE SYSTEMS LINES **TROUGH AXIS** Symbol Set Code: 45 Code: 1104**01** **Color**: Black Draw Rules: Line1 - Dynamic		This is a surface feature. The points are typically connected with a dashed curved line and should be drawn along the trough axis.
PRESSURE SYSTEMS LINES **UPPER TROUGH AXIS** Symbol Set Code: 45 Code: 1104**02** **Color**: Black Draw Rules: Line1 - Dynamic		The points are typically connected with a dashed curved line and should be drawn along the trough axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS LINES **RIDGE AXIS** Symbol Set Code: 45 Code: 110**03** **Color**: Black Draw Rules: Line1 - Dynamic		The points are typically connected with a solid zigzag line. The line should be drawn along the ridge axis. The zigzag of the line will be placed at regular intervals along the entire length of the line.
PRESSURE SYSTEMS LINES **SEVERE SQUALL LINE** Symbol Set Code: 45 Code: 110**04** **Color**: Black Draw Rules: Line2 - Dynamic		This line type is rarely seen, but may appear in products from the Canadian meteorological service (Meteorological Services of Canada). The term “severe squall line” is generally implied by “squall line”
PRESSURE SYSTEMS LINES **INSTABILITY LINE** Symbol Set Code: 45 Code: 110**05** **Color**: Black Draw Rules: Line3 - Dynamic		
PRESSURE SYSTEMS LINES **SHEAR LINE** Symbol Set Code: 45 Code: 110**06** **Color**: Black Draw Rules: Line4 - Dynamic		A shear line is normally the convergent easterly winds where a cold front has intruded into a tropical region.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS LINES **INTER-TROPICAL CONVERGENCE ZONE** Symbol Set Code: 45 Code: 110**07** **Color**: Orange (RGB 255,128,0) Draw Rules: Line5 - Dynamic		The operator should place the modifier(s) to indicate areas of weather activity within the graphic. The Inter-Tropical Convergence Zone (ITCZ) is a region where the northeasterly and southeasterly trade winds converge.
PRESSURE SYSTEMS LINES **CONVERGENCE LINE** Symbol Set Code: 45 Code: 110**08** **Color**: Orange (RGB 255,128,0) Draw Rules: Line6 - Dynamic		
PRESSURE SYSTEMS LINES **INTER-TROPICAL DISCONTINUITY** Symbol Set Code: 45 Code: 110**09** **Color**: Alternate Red (RGB 255,0,0) and Green (RGB 13,223,39) Draw Rules: Line7 - Dynamic		
PRESSURE SYSTEMS **PRESSURE TENDENCY** Static/Dynamic: D Symbol Set Code: 45 Code: 11**05**00 **Note:** Each symbol within the pressure tendency group is static, but only one can be applied to a particular station plot, dependent upon the pressure tendency at that location. As such, the group of symbols is dynamic.	N/A	N/A
	Pressure tendency symbols are depicted to the right of the plot circle just after the text value for the actual pressure change. Pressure tendency is displayed in two digits in black immediately to right of the plot circle followed by the pressure tendency symbol.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS PRESSURE TENDENCY **RISE THEN FALL HIGHER** Symbol Set Code: 45 Code: 110501 **Color**: Black / Blue (RGB 0,0,255) Draw Rules: Point2 - Static		
PRESSURE SYSTEMS PRESSURE TENDENCY **RISE THEN STEADY** Symbol Set Code: 45 Code: 110502 **Color**: Black / Blue (RGB 0,0,255) Draw Rules: Point2 - Static		
PRESSURE SYSTEMS PRESSURE TENDENCY **RISE** Symbol Set Code: 45 Code: 110503 **Color**: Black / Blue (RGB 0,0,255) Draw Rules: Point2 - Static		
PRESSURE SYSTEMS PRESSURE TENDENCY **RISE THEN RISE HIGHER** Symbol Set Code: 45 Code: 110504 **Color**: Black / Blue (RGB 0,0,255) Draw Rules: Point2 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS PRESSURE TENDENCY **STEADY** Symbol Set Code: 45 Code: 110**05** **Color**: Black Draw Rules: Point2 - Static		
PRESSURE SYSTEMS PRESSURE TENDENCY **FALL THEN RISE LOWER** Symbol Set Code: 45 Code: 110**06** **Color**: Black / Red (RGB 255,0,0) Draw Rules: Point2 - Static		
PRESSURE SYSTEMS PRESSURE TENDENCY **FALL THEN STEADY** Symbol Set Code: 45 Code: 110**07** **Color**: Black / Red (RGB 255,0,0) Draw Rules: Point2 - Static		
PRESSURE SYSTEMS PRESSURE TENDENCY **FALL** Symbol Set Code: 45 Code: 110**08** **Color**: Black / Red (RGB 255,0,0) Draw Rules: Point2 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS PRESSURE TENDENCY **RISE THEN FALL LOWER** Symbol Set Code: 45 Code: 110**09** **Color**: Black / Red (RGB 255,0,0) Draw Rules: Point2 - Static		
TURBULENCE Static/Dynamic: N/A Symbol Set Code: 45 Code: **12**0000	N/A	**Note**: USAF turbulence forecasts are based on Category II type aircraft.
TURBULENCE **LIGHT** Static/Dynamic: D Symbol Set Code: 45 Code: 12**01**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		**Note:** Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
TURBULENCE **MODERATE** Symbol Set Code: 45 Code: 12**02**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
TURBULENCE **SEVERE** Symbol Set Code: 45 Code: 12**03**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
TURBULENCE **EXTREME** Symbol Set Code: 45 **Code**: 12**04**00 Color: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
TURBULENCE **MOUNTAIN WAVES** Symbol Set Code: 45 Code: 12**05**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
ICING Symbol Set Code: 45 Code: **13**0000	N/A	N/A
ICING **CLEAR ICING** Symbol Set Code: 45 Code: 13**01**00	N/A	N/A
ICING CLEAR ICING **LIGHT** Symbol Set Code: 45 Code: 1301**01** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
ICING CLEAR ICING **MODERATE** Symbol Set Code: 45 Code: 1301**02** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
ICING CLEAR ICING **SEVERE** Symbol Set Code: 45 Code: 1301**03** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
ICING **RIME ICING** Symbol Set Code: 45 Code: 13**02**00	N/A	N/A
ICING RIME ICING **LIGHT** Symbol Set Code: 45 Code: 1302**01** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
ICING RIME ICING **MODERATE** Symbol Set Code: 45 Code: 1302**02** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
ICING RIME ICING **SEVERE** Symbol Set Code: 45 Code: 1302**03** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
ICING **MIXED ICING** Symbol Set Code: 45 Code: 1**303**00	N/A	
ICING MIXED ICING **LIGHT** Symbol Set Code: 45 Code: 1303**01** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
ICING MIXED ICING **MODERATE** Symbol Set Code: 45 Code: 1303**02** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
ICING MIXED ICING **SEVERE** Symbol Set Code: 45 Code: 1303**03** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WINDS Symbol Set Code: 45 Code: **14**0000	N/A	
WINDS **CALM WINDS** Symbol Set Code: 45 Code: 14**01**00 **Color**: Black Draw Rules: Point4 - Static		
WINDS **WIND PLOT** Symbol Set Code: 45 Code: 14**02**00 **Color**: Black Draw Rules: Point5 - Static	Example 1 	Cloud coverage is typically depicted in the plot circle in accordance with cloud coverage graphics. The wind speed, direction and cloud coverage depicted in wind plot graphics are example only. Example 1: From 270 degrees at 1-2 knots Example 2: From 270 degrees at 5 knots Example 3: From 250 degrees at 10 knots Example 4: From 110 degrees at 25 knots Example 5: From 250 degrees at 50 knots Example 6: From 270 degrees with missing wind speed
	Example 2 	
	Example 3 	
	Example 4 	
	Example 5 	
	Example 6 	





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WINDS **JET STREAM** Symbol Set Code: 45 Code: 14**03**00 **Color**: Red or Black Draw Rules: Line1 - Dynamic		The arrowheads will be evenly spaced along the line.
WINDS **STREAM LINE** Symbol Set Code: 45 Code: 14**04**00 **Color**: Operator Defined Draw Rules: Line1 - Dynamic		The arrowheads will be evenly spaced along the line.
CLOUD COVERAGE Symbol Set Code: 45 Code: **15**0000	N/A	N/A
CLOUD COVERAGE **CLOUD COVERAGE SYMBOLS** Symbol Set Code: 45 Code: 15**01**00	N/A	N/A
CLOUD COVERAGE CLOUD COVERAGE SYMBOLS **CLEAR SKY** Symbol Set Code: 45 Code: 1501**01** **Color**: Black Draw Rules: Point6 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
CLOUD COVERAGE CLOUD COVERAGE SYMBOLS **FEW COVERAGE** Symbol Set Code: 45 Code: 150102 **Color**: Black Draw Rules: Point6 - Static		
CLOUD COVERAGE CLOUD COVERAGE SYMBOLS **SCATTERED COVERAGE** Symbol Set Code: 45 Code: 150103 **Color**: Black Draw Rules: Point6 - Static		
CLOUD COVERAGE CLOUD COVERAGE SYMBOLS **BROKEN COVERAGE** Symbol Set Code: 45 Code: 150104 **Color**: Black Draw Rules: Point6 - Static		
CLOUD COVERAGE CLOUD COVERAGE SYMBOLS **OVERCAST COVERAGE** Symbol Set Code: 45 Code: 150105 **Color**: Black Draw Rules: Point6 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
CLOUD COVERAGE CLOUD COVERAGE SYMBOLS **SKY TOTALLY OR PARTIALLY OBSCURED** Symbol Set Code: 45 Code: 150106 **Color**: Black Draw Rules: Point6 - Static		
WEATHER SYMBOLS Symbol Set Code: 45 Code: **16**0000	N/A	
WEATHER SYMBOLS **RAIN** Symbol Set Code: 45 Code: 16**01**00	N/A	
WEATHER SYMBOLS RAIN **INTERMITTENT LIGHT** Symbol Set Code: 45 Code: 160**1** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN INTERMITTENT LIGHT **CONTINUOUS LIGHT** Symbol Set Code: 45 Code: 160**2** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS RAIN **INTERMITTENT MODERATE** Symbol Set Code: 45 Code: 160103 **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN **INTERMITTENT MODERATE/CONTINUOUS MODERATE** Symbol Set Code: 45 Code: 160104 **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN **INTERMITTENT HEAVY** Symbol Set Code: 45 Code: 160105 **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN **INTERMITTENT HEAVY/CONTINUOUS HEAVY** Symbol Set Code: 45 Code: 160106 **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS **FREEZING RAIN** Symbol Set Code: 45 Code: 16**02**00	N/A	
WEATHER SYMBOLS FREEZING RAIN **LIGHT** Symbol Set Code: 45 Code: 1602**01** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS FREEZING RAIN **MODERATE/HEAVY** Symbol Set Code: 45 Code: 1602**02** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS **RAIN SHOWERS** Symbol Set Code: 45 Code: 16**03**00	N/A	
WEATHER SYMBOLS RAIN SHOWERS **LIGHT** Symbol Set Code: 45 Code: 1603**01** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS RAIN SHOWERS **MODERATE/HEAVY** Symbol Set Code: 45 Code: 160**302** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN SHOWERS **TORRENTIAL** Symbol Set Code: 45 Code: 160**303** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS **DRIZZLE** Symbol Set Code: 45 Code: 16**04**00	N/A	
WEATHER SYMBOLS DRIZZLE **INTERMITTENT LIGHT** Symbol Set Code: 45 Code: 1604**01** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS DRIZZLE **INTERMITTENT LIGHT/CONTINUOUS LIGHT** Symbol Set Code: 45 Code: 160**402** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS DRIZZLE **INTERMITTENT MODERATE** Symbol Set Code: 45 Code: 160**403** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS DRIZZLE **INTERMITTENT MODERATE/CONTINUOUS MODERATE** Symbol Set Code: 45 Code: 160**404** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS DRIZZLE **INTERMITTENT HEAVY** Symbol Set Code: 45 Code: 160**405** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS DRIZZLE **INTERMITTENT HEAVY/CONTINUOUS HEAVY** Symbol Set Code: 45 Code: 1604**06** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS **FREEZING DRIZZLE** Symbol Set Code: 45 Code: 16**05**00	N/A	N/A
WEATHER SYMBOLS FREEZING DRIZZLE **LIGHT** Symbol Set Code: 45 Code: 1605**01** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS FREEZING DRIZZLE **MODERATE/HEAVY** Symbol Set Code: 45 Code: 1605**02** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS **RAIN AND SNOW MIXED** Symbol Set Code: 45 Code: 16**06**00	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS RAIN AND SNOW MIXED **RAIN OR DRIZZLE AND SNOW – LIGHT** Symbol Set Code: 45 Code: 160601 **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN AND SNOW MIXED **RAIN OR DRIZZLE AND SNOW – MODERATE/HEAVY** Symbol Set Code: 45 Code: 160602 **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN AND SNOW MIXED **RAIN AND SNOW SHOWERS - LIGHT** Symbol Set Code: 45 Code: 160603 **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS RAIN AND SNOW MIXED **RAIN AND SNOW SHOWERS - MODERATE/HEAVY** Symbol Set Code: 45 Code: 160604 **Color**: Green Draw Rules: Point7 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS **SNOW** Symbol Set Code: 45 Code: 16**07**00	N/A	
WEATHER SYMBOLS SNOW **INTERMITTENT LIGHT** Symbol Set Code: 45 Code: 1607**01** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS SNOW **INTERMITTENT LIGHT/CONTINUOUS LIGHT** Symbol Set Code: 45 Code: 1607**02** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS SNOW **INTERMITTENT MODERATE** Symbol Set Code: 45 Code: 1607**03** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS SNOW **INTERMITTENT MODERATE/CONTINUOUS MODERATE** Symbol Set Code: 45 Code: 160**04** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS SNOW **INTERMITTENT HEAVY** Symbol Set Code: 45 Code: 160**05** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS SNOW **INTERMITTENT HEAVY/CONTINUOUS HEAVY** Symbol Set Code: 45 Code: 160**06** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS SNOW **BLOWING SNOW - LIGHT/MODERATE** Symbol Set Code: 45 Code: 160**07** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS SNOW **BLOWING SNOW – HEAVY** Symbol Set Code: 45 Code: 160**708** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS **SNOW GRAINS** Symbol Set Code: 45 Code: 16**08**00 **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS **SNOW SHOWERS** Symbol Set Code: 45 Code: 16**09**00	N/A	N/A
WEATHER SYMBOLS SNOW SHOWERS **LIGHT** Symbol Set Code: 45 Code: 1609**01** **Color**: Green Draw Rules: Point7 - Static		
WEATHER SYMBOLS SNOW SHOWERS **MODERATE/HEAVY** Symbol Set Code: 45 Code: 1609**02** **Color**: Green Draw Rules: Point7 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS **HAIL** Symbol Set Code: 45 Code: 16**10**00	N/A	N/A
WEATHER SYMBOLS HAIL **LIGHT NOT ASSOCIATED WITH THUNDER** Symbol Set Code: 45 Code: 1610**01** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS HAIL **MODERATE/HEAVY NOT ASSOCIATED WITH THUNDER** Symbol Set Code: 45 Code: 1610**02** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS **ICE CRYSTALS (DIAMOND DUST)** Symbol Set Code: 45 Code: 16**11**00 **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS **ICE PELLETS (SLEET)** Symbol Set Code: 45 Code: 16**12**00	N/A	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS ICE PELLETS (SLEET) **LIGHT** Symbol Set Code: 45 Code: 1612**01** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS ICE PELLETS (SLEET) **MODERATE** Symbol Set Code: 45 Code: 1612**02** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS ICE PELLETS (SLEET) **HEAVY** Symbol Set Code: 45 Code: 1612**03** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS **INVERSION** Symbol Set Code: 45 Code: 16**13**00 **Color**: Black Draw Rules: Point7 - Static		
WEATHER SYMBOLS **STORMS** Symbol Set Code: 45 Code: 16**14**00	N/A	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS STORMS **THUNDERSTORM - NO PRECIPITATION** Symbol Set Code: 45 Code: 1614**01** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS STORMS **THUNDERSTORM LIGHT TO MODERATE WITH RAIN/SNOW - NO HAIL** Symbol Set Code: 45 Code: 1614**02** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS STORMS **THUNDERSTORM HEAVY WITH RAIN/SNOW - NO HAIL** Symbol Set Code: 45 Code: 1614**03** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS STORMS **THUNDERSTORM LIGHT TO MODERATE - WITH HAIL** Symbol Set Code: 45 Code: 1614**04** **Color**: Red Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS STORMS **THUNDERSTORM HEAVY - WITH HAIL** Symbol Set Code: 45 Code: 161405 **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS STORMS **FUNNEL CLOUD (TORNADO/WATERSPOUT)** Symbol Set Code: 45 Code: 161406 **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS STORMS **SQUALL** Symbol Set Code: 45 Code: 161407 **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS STORMS **LIGHTNING** Symbol Set Code: 45 Code: 161408 **Color**: Red Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS **FOG** Symbol Set Code: 45 Code: 16**15**00	N/A	
WEATHER SYMBOLS FOG **SHALLOW PATCHES** Symbol Set Code: 45 Code: 1615**01** **Color**: Yellow Draw Rules: Point7 - Static		
WEATHER SYMBOLS FOG **SHALLOW CONTINUOUS** Symbol Set Code: 45 Code: 1615**02** **Color**: Yellow Draw Rules: Point7 - Static		
WEATHER SYMBOLS FOG **PATCHY** Symbol Set Code: 45 Code: 1615**03** **Color**: Yellow Draw Rules: Point7 - Static		
WEATHER SYMBOLS FOG **SKY VISIBLE** Symbol Set Code: 45 Code: 1615**04** **Color**: Yellow Draw Rules: Point7 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS FOG **SKY OBSCURED** Symbol Set Code: 45 Code: 161**505** **Color**: Yellow Draw Rules: Point7 - Static		
WEATHER SYMBOLS FOG **FREEZING, SKY VISIBLE** Symbol Set Code: 45 Code: 161**506** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS FOG **FREEZING, SKY OBSCURED** Symbol Set Code: 45 Code: 161**507** **Color**: Red Draw Rules: Point7 - Static		
WEATHER SYMBOLS **MIST** Symbol Set Code: 45 Code: 16**16**00 **Color**: Yellow Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS **SMOKE** Symbol Set Code: 45 Code: 16**1**700 **Color**: Brown Draw Rules: Point7 - Static		
WEATHER SYMBOLS **HAZE** Symbol Set Code: 45 Code: 16**18**00 **Color**: Brown Draw Rules: Point7 - Static		
WEATHER SYMBOLS **DUST OR SAND** Symbol Set Code: 45 Code: 16**19**00	N/A	
WEATHER SYMBOLS DUST OR SAND **LIGHT TO MODERATE** Symbol Set Code: 45 Code: 1619**01** **Color**: Brown Draw Rules: Point7 - Static		
WEATHER SYMBOLS DUST OR SAND **SEVERE** Symbol Set Code: 45 Code: 1619**02** **Color**: Brown Draw Rules: Point7 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS DUST OR SAND **DUST DEVIL** Symbol Set Code: 45 Code: 1619**03** **Color**: Brown Draw Rules: Point7 - Static		
WEATHER SYMBOLS DUST OR SAND **BLOWING DUST OR SAND** Symbol Set Code: 45 Code: 1619**04** **Color**: Brown Draw Rules: Point7 - Static		
WEATHER SYMBOLS **TROPICAL STORM SYSTEMS** Symbol Set Code: 45 Code: 16**20**00	N/A	
WEATHER SYMBOLS TROPICAL STORM SYSTEMS **TROPICAL DEPRESSION** Static/Dynamic: D Symbol Set Code: 45 Code: 1620**01** **Color**: Red, Purple or Black Draw Rules: Point8 - Static		*Red* or *Purple* - Current and Forecast Position *Black* - Past Position



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS TROPICAL STORM SYSTEMS **TROPICAL STORM** Symbol Set Code: 45 Code: 162**02** **Color**: Red, Purple or Black Draw Rules: Point8 - Static		*Red* or *Purple* - Current and Forecast Position *Black* - Past Position
WEATHER SYMBOLS TROPICAL STORM SYSTEMS **HURRICANE/TYPHOON** Symbol Set Code: 45 Code: 162**03** **Color**: Red, Purple or Black Draw Rules: Point8 - Static		*Red* or *Purple* - Current and Forecast Position *Black* - Past Position
WEATHER SYMBOLS TROPICAL STORM SYSTEMS **TROPICAL STORM WIND AREAS AND DATE/TIME LABELS** Static/Dynamic: D Symbol Set Code: 45 Code: 162**04** **Color**: Red/Purple/Black *Red* - Outermost area of winds = 34 knots *Purple* - Second area of winds = 50 knots [=64 knots Atlantic only] *Red* or *Black* - Innermost area of winds = 100 knots Draw Rules: Area1 - Dynamic		US Navy ship avoidance areas can be depicted using **Operator-Defined Freeform**.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS **VOLCANIC ERUPTION** Symbol Set Code: 45 Code: 16**21**00 **Color**: Black Draw Rules: Point7 - Static		
WEATHER SYMBOLS VOLCANIC ERUPTION **VOLCANIC ASH** Symbol Set Code: 45 Code: 1621**01** **Color**: Black or Brown Draw Rules: Point7 - Static		
WEATHER SYMBOLS **TROPOPAUSE LEVEL** Symbol Set Code: 45 Code: 16**22**00 **Color**: Black Draw Rules: Point7 - Static		
WEATHER SYMBOLS **FREEZING LEVEL** Symbol Set Code: 45 Code: 16**23**00 **Color**: Black Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
WEATHER SYMBOLS **PRECIPITATION OF UNKNOWN TYPE AND INTENSITY** Symbol Set Code: 45 Code: 16**24**00 **Color**: Green Draw Rules: Point7 - Static		
BOUNDED AREAS OF WEATHER Symbol Set Code: 45 Code: **17**0000	N/A	
BOUNDED AREAS OF WEATHER **INSTRUMENT FLIGHT RULE (IFR)** Symbol Set Code: 45 Code: 17**01**00 **Color**: Red Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER **MARGINAL VISUAL FLIGHT RULE (MVFR)** Symbol Set Code: 45 Code: 17**02**00 **Color**: Blue Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER **TURBULENCE** Symbol Set Code: 45 Code: 17**03**00 **Color**: Blue Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
BOUNDED AREAS OF WEATHER **ICING** Symbol Set Code: 45 Code: 170**4**00 **Color**: Brown Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER **LIQUID PRECIPITATION - NON-CONVECTIVE CONTINUOUS OR INTERMITTENT** Symbol Set Code: 45 Code: 170**5**00 **Color**: Green Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER LIQUID PRECIPITATION - NON-CONVECTIVE CONTINUOUS OR INTERMITTENT **LIQUID PRECIPITATION – CONVECTIVE** Symbol Set Code: 45 Code: 1705**01** **Color**: Green Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER **FREEZING/FROZEN PRECIPITATION** Symbol Set Code: 45 Code: 170**6**00 **Color**: Red Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
BOUNDED AREAS OF WEATHER **THUNDERSTORM** Symbol Set Code: 45 Code: 17**07**00 **Color**: Red Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER **FOG** Symbol Set Code: 45 Code: 17**08**00 **Color**: Yellow Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER **DUST OR SAND** Symbol Set Code: 45 Code: 17**09**00 **Color**: Brown Draw Rules: Area2 - Dynamic		
BOUNDED AREAS OF WEATHER **OPERATOR-DEFINED FREEFORM** Symbol Set Code: 45 Code: 17**10**00 **Color**: Operator Defined Draw Rules: Area2 - Dynamic	 	(Used to designate areas of specific weather phenomenon as determined by the operator.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
ISOPLETHS Symbol Set Code: 45 Code: **18**0000	N/A	N/A
ISOPLETHS **ISOBAR – SURFACE** Symbol Set Code: 45 Code: 18**01**00 **Color**: Black Draw Rules: Line1 - Dynamic		Used on **surface analyses**. Although not part of the graphic, numerical values of the isopleth can be placed along the line for presentation. The modifier text will be placed at each end of the line and once in the middle of the line.
ISOPLETHS **CONTOUR - UPPER AIR** Symbol Set Code: 45 Code: 18**02**00 **Color**: Black Draw Rules: Line1 - Dynamic		Used on **upper air analyses**. Although not part of the graphic, numerical values of the isopleth can be placed along the line for presentation. The modifier text will be placed at each end of the line and once in the middle of the line.
ISOPLETHS **ISOTHERM** Symbol Set Code: 45 Code: 18**03**00 **Color**: Red Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.
ISOPLETHS **ISOTACH** Symbol Set Code: 45 Code: 18**04**00 **Color**: Purple Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
ISOPLETHS **ISODROSOTHERM** Symbol Set Code: 45 Code: 18**05**00 **Color**: Green Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.
ISOPLETHS **THICKNESS** Symbol Set Code: 45 Code: 18**06**00 **Color**: Red Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.
ISOPLETHS **OPERATOR-DEFINED FREEFORM** Symbol Set Code: 45 Code: 18**07**00 **Color**: Operator Defined Draw Rules: Line1 - Dynamic		Used to display isopleth areas of specific weather parameters as determined by the operator. The modifier text will be placed at each end of the line and once in the middle of the line.
STATE OF THE GROUND Symbol Set Code: 45 Code: **19**0000	N/A	
STATE OF THE GROUND **WITHOUT SNOW OR MEASURABLE ICE COVER** Symbol Set Code: 45 Code: 19**01**00	N/A	




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **SURFACE DRY WITHOUT CRACKS OR APPRECIABLE DUST OR LOOSE SAND** Symbol Set Code: 45 Code: 190101 **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **SURFACE MOIST** Symbol Set Code: 45 Code: 190102 **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **SURFACE WET, STANDING WATER IN SMALL OR LARGE POOLS** Symbol Set Code: 45 Code: 190103 **Color**: Black Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **SURFACE FLOODED** Symbol Set Code: 45 Code: 190104 **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **SURFACE FROZEN** Symbol Set Code: 45 Code: 190105 **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **GLAZE (THIN ICE) ON GROUND** Static/Dynamic: S Symbol Set Code: 45 Code: 190106 **Color**: Black Draw Rules: Point1 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **LOOSE DRY DUST OR SAND NOT COVERING GROUND COMPLETELY** Symbol Set Code: 45 Code: 190107 **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **THIN LOOSE DRY DUST OR SAND COVERING GROUND COMPLETELY** Symbol Set Code: 45 Code: 190108 **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **MODERATE/THICK LOOSE DRY DUST OR SAND COVERING GROUND COMPLETELY** Symbol Set Code: 45 Code: 190109 **Color**: Black Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
STATE OF THE GROUND WITHOUT SNOW OR MEASURABLE ICE COVER **EXTREMELY DRY WITH CRACKS** Symbol Set Code: 45 Code: 1901**10** **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND **WITH SNOW OR MEASURABLE ICE COVER** Symbol Set Code: 45 Code: 19**02**00	N/A	
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **PREDOMINATELY ICE COVERED** Symbol Set Code: 45 Code: 1902**01** **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **COMPACT OR WET SNOW (WITH OR WITHOUT ICE) COVERING LESS THAN ONE-HALF OF GROUND** Symbol Set Code: 45 Code: 1902**02** **Color**: Black Draw Rules: Point1 - Static		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **COMPACT OR WET SNOW (WITH OR WITHOUT ICE) COVERING AT LEAST ONE-HALF GROUND, BUT GROUND NOT COMPLETELY COVERED** Symbol Set Code: 45 Code: 190**03** **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **EVEN LAYER OF COMPACT OR WET SNOW COVERING GROUND COMPLETELY** Symbol Set Code: 45 Code: 190**04** **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **UNEVEN LAYER OF COMPACT OR WET SNOW COVERING GROUND COMPLETELY** Symbol Set Code: 45 Code: 190**05** **Color**: Black Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **LOOSE DRY SNOW COVERING LESS THAN ONE-HALF OF GROUND** Symbol Set Code: 45 Code: 19020**6** **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **LOOSE DRY SNOW COVERING AT LEAST ONE-HALF GROUND, BUT GROUND NOT COMPLETELY COVERED** Symbol Set Code: 45 Code: 19020**7** **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **EVEN LAYER OF LOOSE DRY SNOW COVERING GROUND COMPLETELY** Symbol Set Code: 45 Code: 19020**8** **Color**: Black Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **UNEVEN LAYER OF LOOSE DRY SNOW COVERING GROUND COMPLETELY** Symbol Set Code: 45 Code: 190**09** **Color**: Black Draw Rules: Point1 - Static		
STATE OF THE GROUND WITH SNOW OR MEASURABLE ICE COVER **SNOW COVERING GROUND COMPLETELY, DEEP DRIFTS** Symbol Set Code: 45 Code: 190**10** **Color**: Black Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS Symbol Set Code: 46 Code: **11**0000	N/A	
ICE SYSTEMS **ICEBERGS** Symbol Set Code: 46 Code: 11**01**00 Color: Black	N/A	
ICE SYSTEMS ICEBERGS **MANY ICEBERGS** Symbol Set Code: 46 Code: 1101**01** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS ICEBERGS **BELTS AND STRIPS** Symbol Set Code: 46 Code: 1101**02** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS ICEBERGS **GENERAL** Symbol Set Code: 46 Code: 1101**03** **Color**: Black Draw Rules: Point3 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS ICEBERGS **MANY ICEBERGS – GENERAL** Symbol Set Code: 46 Code: 1101**04** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS ICEBERGS **BERGY BIT** Symbol Set Code: 46 Code: 1101**05** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS ICEBERGS **MANY BERGY BITS** Symbol Set Code: 46 Code: 1101**06** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS ICEBERGS **GROWLER** Symbol Set Code: 46 Code: 1101**07** **Color**: Black Draw Rules: Point3 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS ICEBERGS **MANY GROWLERS** Symbol Set Code: 46 Code: 1101**08** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS ICEBERGS **FLOEBERG** Symbol Set Code: 46 Code: 1101**09** **Color**: Black Top with White Bottom Draw Rules: Point3 - Static		
ICE SYSTEMS ICEBERGS **ICE ISLAND** Symbol Set Code: 46 Code: 1101**10** **Color**: White Hexagon/Black Hatches Draw Rules: Point3 - Static		
ICE SYSTEMS **ICE CONCENTRATION** Symbol Set Code: 46 Code: 11**02**00	N/A	
ICE SYSTEMS ICE CONCENTRATION **BERGY WATER** Symbol Set Code: 46 Code: 1102**01** **Color**: Black Draw Rules: Point3 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS ICE CONCENTRATION **WATER WITH RADAR TARGETS** Symbol Set Code: 46 Code: 110**02** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS ICE CONCENTRATION **ICE FREE** Symbol Set Code: 46 Code: 110**03** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS **DYNAMIC PROCESSES** Symbol Set Code: 46 Code: 11**03**00	N/A	
ICE SYSTEMS DYNAMIC PROCESSES **CONVERGENCE** Symbol Set Code: 46 Code: 1103**01** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS DYNAMIC PROCESSES **DIVERGENCE** Symbol Set Code: 46 Code: 1103**02** **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS DYNAMIC PROCESSES **SHEARING OR SHEAR ZONE** Symbol Set Code: 46 Code: 110303 **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS DYNAMIC PROCESSES **ICE DRIFT (DIRECTION)** Symbol Set Code: 46 Code: 110304 **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS **SEA ICE** Symbol Set Code: 46 Code: 110400 **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS SEA ICE **ICE THICKNESS (OBSERVED)** Symbol Set Code: 46 Code: 110401 **Color**: Box with Black Outline Draw Rules: Point3 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS SEA ICE **ICE THICKNESS (ESTIMATED)** Symbol Set Code: 46 Code: 1104**02** **Color**: Box with Black Dashed Line Draw Rules: Point3 - Static		
ICE SYSTEMS SEA ICE **MELT PUDDLES OR FLOODED ICE** Symbol Set Code: 46 Code: 1104**03** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS **LIMITS** Symbol Set Code: 46 Code: 11**05**00	N/A	
ICE SYSTEMS LIMITS **LIMITS OF VISUAL OBSERVATION** Symbol Set Code: 46 Code: 1105**01** **Color**: Black Draw Rules: Line1 - Dynamic		The ovals will be repeated the entire length of the line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS LIMITS **LIMITS OF UNDERCAST** Symbol Set Code: 46 Code: 110502 **Color**: Black Draw Rules: Line1- Dynamic		The wave-like shapes will be repeated the entire length of the line.
ICE SYSTEMS LIMITS **LIMITS OF RADAR OBSERVATION** Symbol Set Code: 46 Code: 110503 **Color**: Black Draw Rules: Line1- Dynamic		The ovals and x's will alternate the entire length of the line.
ICE SYSTEMS LIMITS **OBSERVED ICE EDGE OR BOUNDARY** Symbol Set Code: 46 Code: 110504 **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a solid curved line.
ICE SYSTEMS LIMITS **ESTIMATED ICE EDGE OR BOUNDARY** Symbol Set Code: 46 Code: 110505 **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a dashed curved line.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS LIMITS **ICE EDGE OR BOUNDARY FROM RADAR** Symbol Set Code: 46 Code: 1105**06** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a curved line with Xs spaced evenly along the entire length of the line.
ICE SYSTEMS **OPENINGS IN THE ICE** Symbol Set Code: 46 Code: 11**06**00	N/A	
ICE SYSTEMS OPENINGS IN THE ICE **CRACKS** Symbol Set Code: 46 Code: 1106**01** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a curved line.
ICE SYSTEMS OPENINGS IN THE ICE **CRACKS AT A SPECIFIC LOCATION** Symbol Set Code: 46 Code: 1106**02** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a curved line with perpendicular lines spaced evenly along the line. The perpendicular lines will be placed at regular intervals along the entire length of the line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS OPENINGS IN THE ICE **LEAD** Symbol Set Code: 46 Code: 1106**03** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with parallel curved lines.
ICE SYSTEMS OPENINGS IN THE ICE **FROZEN LEAD** Symbol Set Code: 46 Code: 1106**04** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with parallel curved lines connected by vertical lines spaced evenly along the line. The perpendicular lines joining the main lines will be placed at regular intervals along the entire length of the main lines.
ICE SYSTEMS **SNOW COVER** Symbol Set Code: 46 Code: 11**07**00 **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS SNOW COVER **SASTRUGI (WITH ORIENTATION)** Symbol Set Code: 46 Code: 1107**01** **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
ICE SYSTEMS **TOPOGRAPHICAL FEATURES** Static/Dynamic: N/A Symbol Set Code: 46 Code: 11**08**00	N/A	
ICE SYSTEMS TOPOGRAPHICAL FEATURES **RIDGES OR HUMMOCKS** Symbol Set Code: 46 Code: 1108**01** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS TOPOGRAPHICAL FEATURES **RAFTING** Symbol Set Code: 46 Code: 1108**02** **Color**: Black Draw Rules: Point3 - Static		
ICE SYSTEMS TOPOGRAPHICAL FEATURES **JAMMED BRASH BARRIER** Symbol Set Code: 46 Code: 1108**03** **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY Static/Dynamic: N/A Symbol Set Code: 46 Code: **12**0000	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY **DEPTH** Static/Dynamic: N/A Symbol Set Code: 46 Code: 12**01**00	N/A	
HYDROGRAPHY DEPTH **SOUNDINGS** Symbol Set Code: 46 Code: 1201**01** **Color**: Gray Draw Rules: Point3 - Static		
HYDROGRAPHY DEPTH **DEPTH CURVE** Symbol Set Code: 46 Code: 1201**02** **Color**: Gray Thin Solid Line Draw Rules: Line1 - Dynamic		The points are typically connected with a solid curved line. The modifier text will be placed at each end of the line and at regular intervals along the line.
HYDROGRAPHY DEPTH **DEPTH CONTOUR** Symbol Set Code: 46 Code: 1201**03** **Color**: Gray Thin Solid Line Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and at regular intervals along the line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY DEPTH **DEPTH AREA** Symbol Set Code: 46 Code: 120**104** **Color**: Blue/Pale Blue/White Draw Rules: Area2 - Dynamic		The points are connected with a solid line.
HYDROGRAPHY **COASTAL HYDROGRAPHY** Static/Dynamic: N/A Symbol Set Code: 46 Code: 12**02**00	N/A	
HYDROGRAPHY COASTAL HYDROGRAPHY **COASTLINE** Symbol Set Code: 46 Code: 1202**01** **Color**: Gray thin solid line Draw Rules: Line1 - Dynamic		The points are connected with a solid line.
HYDROGRAPHY COASTAL HYDROGRAPHY **ISLAND** Static/Dynamic: S Symbol Set Code: 46 Code: 1202**02** **Color**: Brown solid fill Draw Rules: Area2 - Dynamic		The points are connected with a solid line.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY COASTAL HYDROGRAPHY **BEACH** Symbol Set Code: 46 Code: 120**03** **Color**: Beige outline and stipple fill Draw Rules: Area2 - Dynamic		The points are connected with a solid line.
HYDROGRAPHY COASTAL HYDROGRAPHY **WATER** Static/Dynamic: S Symbol Set Code: 46 Code: 120**04** **Color**: White fill (gray dashed line shown for representation purpose only). Draw Rules: Area2 - Dynamic		
HYDROGRAPHY COASTAL HYDROGRAPHY **FORESHORE - LINE** Symbol Set Code: 46 Code: 120**05** **Color**: Yellow-green solid line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY COASTAL HYDROGRAPHY **FORESHORE - AREA** Symbol Set Code: 46 Code: 120**06** **Color**: Yellow-green solid fill Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY **PORTS AND HARBORS** Static/Dynamic: N/A Symbol Set Code: 46 Code: 12**03**00	N/A	N/A
HYDROGRAPHY PORTS AND HARBORS **PORTS** Static/Dynamic: N/A Symbol Set Code: 46 Code: 1203**01**	N/A	N/A
HYDROGRAPHY PORTS AND HARBORS PORTS **BERTHS (ONSHORE)** Symbol Set Code: 46 Code: 1203**02** **Color**: Magenta small circle Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS PORTS **BERTHS (ANCHOR)** Symbol Set Code: 46 Code: 1203**03** **Color**: Magenta anchor w/ small circle Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS PORTS **ANCHORAGE - POINT** Symbol Set Code: 46 Code: 1203**04** **Color**: Magenta anchor Draw Rules: Point1 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY PORTS AND HARBORS PORTS **ANCHORAGE - LINE** Symbol Set Code: 46 Code: 120305 **Color**: Magenta dash/chevron line w/ anchor symbol Draw Rules: Line8 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS PORTS **ANCHORAGE - AREA** Symbol Set Code: 46 Code: 120306 **Color**: Magenta dash/chevron outline w/ anchor Draw Rules: Area2 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS PORTS **CALL IN POINT** Static/Dynamic: S Symbol Set Code: 46 Code: 120307 **Color**: Magenta circle w/ two cones Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY PORTS AND HARBORS PORTS **PIER/WHARF/QUAY** Symbol Set Code: 46 Code: 120308 **Color**: Gray thin solid line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS **FISHING HARBOR - POINT** Symbol Set Code: 46 Code: 120309 **Color**: Magenta fish w/arcs above and below Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS **FISH WEIRS - POINT** Symbol Set Code: 46 Code: 120310 **Color**: Gray fish inside net Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS **FISH STAKES - POINT** Symbol Set Code: 46 Code: 120311 **Color**: Gray L **Style**: repeating pattern of gray L's Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY PORTS AND HARBORS **FISH TRAPS - AREA** Symbol Set Code: 46 Code: 120312 **Color**: Gray rectangle below angle line pattern fill dashed outline Draw Rules: Area2 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS **FACILITIES** Static/Dynamic: N/A Symbol Set Code: 46 Code: 120313	N/A	N/A
HYDROGRAPHY PORTS AND HARBORS FACILITIES **DRYDOCK** Symbol Set Code: 46 Code: 120314 **Color**: Brown solid area w/ black thin outline Draw Rules: Area2 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS FACILITIES **LANDING PLACE** Symbol Set Code: 46 Code: 120315 **Color**: Magenta yacht inside circle Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY PORTS AND HARBORS FACILITIES **OFFSHORE LOADING FACILITY - POINT** Symbol Set Code: 46 Code: 120316 **Color**: Black installation buoy Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS FACILITIES **OFFSHORE LOADING FACILITY - LINE** Symbol Set Code: 46 Code: 120317 **Color**: Gray thick solid line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS FACILITIES **OFFSHORE LOADING FACILITY - AREA** Symbol Set Code: 46 Code: 120318 **Color**: Brown solid fill Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY PORTS AND HARBORS FACILITIES **RAMP - ABOVE WATER** Symbol Set Code: 46 Code: 120319 **Color**: Black solid line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS FACILITIES **RAMP - BELOW WATER** Symbol Set Code: 46 Code: 120320 **Color**: Black dashed line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS FACILITIES **LANDING RING** Symbol Set Code: 46 Code: 120321 **Color**: Dark Brown filled square w/ black outline Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY PORTS AND HARBORS FACILITIES **FERRY CROSSING** Symbol Set Code: 46 Code: 120322 **Color**: Magenta dashed line w/ boat symbol Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS FACILITIES **CABLE FERRY CROSSING** Symbol Set Code: 46 Code: 120323 **Color**: Black Black dashed line w/ boat symbol Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS FACILITIES **DOLPHIN** Symbol Set Code: 46 Code: 120324 **Color**: Dark Brown filled square w/ black outline Draw Rules: Point1 - Static		
HYDROGRAPHY PORTS AND HARBORS **SHORELINE PROTECTION** Static/Dynamic: N/A Symbol Set Code: 46 Code: 120325	N/A	N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY PORTS AND HARBORS SHORELINE PROTECTION **BREAKWATER/GROIN/JETTY - ABOVE WATER** Symbol Set Code: 46 Code: 120326 **Color**: Gray solid line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS SHORELINE PROTECTION **BREAKWATER/GROIN/JETTY - BELOW WATER** Symbol Set Code: 46 Code: 120327 **Color**: Gray dashed line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY PORTS AND HARBORS SHORELINE PROTECTION **SEAWALL** Symbol Set Code: 46 Code: 120328 **Color**: Gray solid line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY **AIDS TO NAVIGATION** Static/Dynamic: N/A Symbol Set Code: 46 Code: 120400	N/A	N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY AIDS TO NAVIGATION **BEACON** Symbol Set Code: 46 Code: 120401 **Color**: Black beacon/buoy base Draw Rules: Point1 - Static		Anchor Points. This graphic requires one anchor point. The center point defines the center of the graphic. Size/Shape. Scalable. Orientation. The graphic is typically centered over the desired location.
HYDROGRAPHY AIDS TO NAVIGATION **BUOY DEFAULT** Symbol Set Code: 46 Code: 120402 **Color**: Black/Magenta Draw Rules: Point1 - Static		Black default buoy beside magenta question mark
HYDROGRAPHY AIDS TO NAVIGATION **MARKER** Symbol Set Code: 46 Code: 120403 **Color**: Magenta Draw Rules: Point1 - Static		Magenta Inverted T with open circle at bottom below box
HYDROGRAPHY AIDS TO NAVIGATION **PERCHES/STAKES - POINT** Symbol Set Code: 46 Code: 120404 **Color**: Black small circle Draw Rules: Point1 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY AIDS TO NAVIGATION **PERCHES/STAKES - AREA** Static/Dynamic: D Symbol Set Code: 46 Code: 120**405** **Color**: Blue Fill with black dot outline Draw Rules: Area2 - Dynamic		
HYDROGRAPHY AIDS TO NAVIGATION **LIGHT** Symbol Set Code: 46 Code: 120**406** **Color**: Magenta flare Draw Rules: Point1 - Static		
HYDROGRAPHY AIDS TO NAVIGATION **LEADING LINE** Symbol Set Code: 46 Code: 120**407** **Color**: Black solid to dashed line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY AIDS TO NAVIGATION **LIGHT VESSEL/LIGHT SHIP** Symbol Set Code: 46 Code: 120**408** **Color**: Black light vessel Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY AIDS TO NAVIGATION **LIGHTHOUSE** Symbol Set Code: 46 Code: 120**09** **Color**: Black lighthouse symbol Draw Rules: Point1 - Static		
HYDROGRAPHY **DANGERS/HAZARDS** Static/Dynamic: N/A Symbol Set Code: 46 Code: 12**05**00	N/A	N/A
HYDROGRAPHY DANGERS/HAZARDS **ROCK SUBMERGED** Symbol Set Code: 46 Code: 1205**01** **Color**: Blue/Black Black cross in blue solid circle w/ black dotted outline Draw Rules: Point1 - Static		
HYDROGRAPHY DANGERS/HAZARDS **ROCK AWASHED** Symbol Set Code: 46 Code: 1205**02** **Color**: Black 6 point asterisk Draw Rules: Point1 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY DANGERS/HAZARDS **UNDERWATER DANGER/HAZARD** Symbol Set Code: 46 Code: 120503 **Color**: Blue/Black Blue fill w/ black dot outline Draw Rules: Area2 - Dynamic		
HYDROGRAPHY DANGERS/HAZARDS **FOUL GROUND - POINT** Symbol Set Code: 46 Code: 120504 **Color**: Gray pound (#) symbol Draw Rules: Point1 - Static		
HYDROGRAPHY DANGERS/HAZARDS **FOUL GROUND - AREA** Symbol Set Code: 46 Code: 120505 **Color**: Gray pound (#) offset pattern fill Draw Rules: Area2 - Dynamic		
HYDROGRAPHY DANGERS/HAZARDS **KELP/SEAWEED - POINT** Symbol Set Code: 46 Code: 120506 **Color**: Gray kelp symbol Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY DANGERS/HAZARDS **KELP/SEAWEED - AREA** Symbol Set Code: 46 Code: 120507 **Color**: Gray kelp symbol pattern fill Draw Rules: Area2 - Dynamic		
HYDROGRAPHY DANGERS/HAZARDS **SNAGS/STUMPS** Symbol Set Code: 46 Code: 120508 **Color**: Blue oval w/ black dotted outline Draw Rules: Point1 - Static		
HYDROGRAPHY DANGERS/HAZARDS **WRECK (UNCOVERS)** Symbol Set Code: 46 Code: 120509 **Color**: Gray wreck symbol Draw Rules: Point1 - Static		Anchor Points. This graphic requires one anchor point. The center point defines the center of the graphic. Size/Shape. Scalable. Orientation. The graphic is typically centered over the desired location.
HYDROGRAPHY DANGERS/HAZARDS **WRECK (SUBMERGED)** Symbol Set Code: 46 Code: 120510 **Color**: Black horizontal bar w/ 3 ticks in blue solid oval w/ black dotted outline Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY DANGERS/HAZARDS **BREAKERS** Symbol Set Code: 46 Code: 120511 **Color**: Gray thin dashed line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY DANGERS/HAZARDS **REEF** Symbol Set Code: 46 Code: 120512 **Color**: Black jagged line Draw Rules: Line1 - Dynamic		
HYDROGRAPHY DANGERS/HAZARDS **EDDIES/OVERFALLS/TIDE RIPS** Symbol Set Code: 46 Code: 120513 **Color**: Gray Draw Rules: Point1 - Static		
HYDROGRAPHY DANGERS/HAZARDS **DISCOLORED WATER** Symbol Set Code: 46 Code: 120514 **Color**: Blue filled w/ black dot outline Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY **BOTTOM FEATURES** Static/Dynamic: N/A Symbol Set Code: 46 Code: 12**06**00	N/A	N/A
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - SAND** Symbol Set Code: 46 Code: 1206**01** **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - MUD** Symbol Set Code: 46 Code: 1206**02** **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - CLAY** Symbol Set Code: 46 Code: 1206**03** **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - SILT** Symbol Set Code: 46 Code: 120604 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - STONES** Symbol Set Code: 46 Code: 120605 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - GRAVEL** Symbol Set Code: 46 Code: 120606 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - PEBBLES** Symbol Set Code: 46 Code: 120607 **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - COBBLES** Symbol Set Code: 46 Code: 120608 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - ROCK** Symbol Set Code: 46 Code: 120609 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - CORAL** Symbol Set Code: 46 Code: 120610 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **BOTTOM CHARACTERISTICS - SHELL** Symbol Set Code: 46 Code: 120611 **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY BOTTOM FEATURES **QUALIFYING TERMS - FINE** Symbol Set Code: 46 Code: 120612 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **QUALIFYING TERMS - MEDIUM** Symbol Set Code: 46 Code: 120613 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY BOTTOM FEATURES **QUALIFYING TERMS - COARSE** Symbol Set Code: 46 Code: 120614 **Color**: Black Draw Rules: Point3 - Static		
HYDROGRAPHY **TIDE AND CURRENT** Static/Dynamic: N/A Symbol Set Code: 46 Code: 120700	N/A	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY TIDE AND CURRENT **WATER TURBULENCE** Symbol Set Code: 46 Code: 120701 **Color**: Gray wavy line Draw Rules: Point1 - Static		
HYDROGRAPHY TIDE AND CURRENT **CURRENT FLOW - EBB** Symbol Set Code: 46 Code: 120702 **Color**: Gray arrow w/ no feather Draw Rules: Line1 - Dynamic		The line should be drawn in the direction of the flow.
HYDROGRAPHY TIDE AND CURRENT **CURRENT FLOW - FLOOD** Symbol Set Code: 46 Code: 120703 **Color**: Gray arrow w/ one feather Draw Rules: Line1 - Dynamic		The line should be drawn in the direction of the flow.
HYDROGRAPHY TIDE AND CURRENT **TIDE DATA POINT** Symbol Set Code: 46 Code: 120704 **Color**: Gray diamond Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
HYDROGRAPHY TIDE AND CURRENT **TIDE GAUGE** Symbol Set Code: 46 Code: 120705 **Color**: Brown with Magenta Draw Rules: Point1 - Static		
OCEANOGRAPHY Static/Dynamic: N/A Symbol Set Code: 46 Code: 130000	N/A	N/A
OCEANOGRAPHY **BIOLUMINESCENCE** Static/Dynamic: N/A Symbol Set Code: 46 Code: 130100	N/A	N/A
OCEANOGRAPHY BIOLUMINESCENCE **VISUAL DETECTION RATIO (VDR) LEVEL 1-2** Symbol Set Code: 46 Code: 130101 **Color**: Dark Green (RGB 26:153:77) Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 2-3** Symbol Set Code: 46 Code: 130102 **Color**: Light Green (RGB 26:204:77) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 3-4** Symbol Set Code: 46 Code: 130103 **Color**: Lime Green RGB (128:255:51) Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 4-5** Symbol Set Code: 46 Code: 130104 **Color**: Yellow-Green RGB (204:255:26) Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 5-6** Symbol Set Code: 46 Code: 130105 **Color**: Yellow RGB (255:255:0) Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 6-7** Symbol Set Code: 46 Code: 130106 **Color**: Gold RGB (255:204:0) Draw Rules: Area2 - Dynamic		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 7-8** Symbol Set Code: 46 Code: 130**107** **Color**: Light Orange RGB (255:128:0) Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 8-9** Symbol Set Code: 46 Code: 130**108** **Color**: Dark Orange RGB (255:77:0) Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BIOLUMINESCENCE **VDR LEVEL 9-10** Symbol Set Code: 46 Code: 130**109** **Color**: Red RGB (255:0:0) Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY **BEACH SLOPE** Static/Dynamic: N/A Symbol Set Code: 46 Code: 13**02**00	N/A	N/A
OCEANOGRAPHY BEACH SLOPE **FLAT** Symbol Set Code: 46 Code: 1302**01** **Color**: Light Gray Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
OCEANOGRAPHY BEACH SLOPE **GENTLE** Symbol Set Code: 46 Code: 130**02** **Color**: Dark Gray Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BEACH SLOPE **MODERATE** Symbol Set Code: 46 Code: 130**03** **Color**: Light Gray Dot Fill with Gray Outline Draw Rules: Area2 - Dynamic		
OCEANOGRAPHY BEACH SLOPE **STEEP** Symbol Set Code: 46 Code: 130**04** **Color**: Dark Gray Dot Fill w/ Gray Outline Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS Static/Dynamic: N/A Symbol Set Code: 46 Code: **14**0000	N/A	N/A
GEOPHYSICS/ACOUSTICS **MINE WARFARE (MIW)** **BOTTOM DESCRIPTORS** Static/Dynamic: N/A Symbol Set Code: 46 Code: 14**01**00	N/A	N/A



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - SOLID ROCK** Symbol Set Code: 46 Code: 140**101** **Color**: Purple (RGB 255:0:255) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - CLAY** Symbol Set Code: 46 Code: 140**102** **Color**: Periwinkle (RGB 100:130:255) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - VERY COARSE SAND** Symbol Set Code: 46 Code: 140**103** **Color**: Gold (RGB 255:180:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - COARSE SAND** Symbol Set Code: 46 Code: 140**104** **Color**: Light Gold (RGB 255:215:0) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - MEDIUM SAND** Symbol Set Code: 46 Code: 140105 **Color**: Yellow (RGB 255:235:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - FINE SAND** Symbol Set Code: 46 Code: 140106 Color: Light Yellow (RGB 255:255:140) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - VERY FINE SAND** Symbol Set Code: 46 Code: 140107 **Color**: Pale Yellow (RGB 255:255:220) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINEWARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - VERY FINE SILT** Symbol Set Code: 46 Code: 140108 **Color**: Turquoise (RGB 0:215:255) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - FINE SILT** Symbol Set Code: 46 Code: 140**09** **Color**: Aquamarine (RGB 25:255:230) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - MEDIUM SILT** Symbol Set Code: 46 Code: 140**10** **Color**: Green (RGB 0:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - COARSE SILT** Symbol Set Code: 46 Code: 140**11** **Color**: Lime Green (RGB 200:255:105) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - BOULDERS** Symbol Set Code: 46 Code: 140**12** **Color**: Red (RGB 255:0:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - COBBLES, OYSTER SHELLS** Symbol Set Code: 46 Code: 140113 **Color**: Dark Peach (RGB 255:150:150) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - PEBBLES, SHELLS** Symbol Set Code: 46 Code: 140114 **Color**: Peach (RGB 255:190:190) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - SAND AND SHELLS** Symbol Set Code: 46 Code: 140115 **Color**: Light Peach (RGB 255:220:220) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - LAND** Symbol Set Code: 46 Code: 140116 **Color**: Gray (RGB 220:220:220) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW-BOTTOM SEDIMENTS - NO DATA** Symbol Set Code: 46 Code: 140117 **Color**: Light Gray (RGB 230:230:230) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **BOTTOM ROUGHNESS - SMOOTH** Symbol Set Code: 46 Code: 140118 **Color**: Green (RGB 0:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **BOTTOM ROUGHNESS - MODERATE** Symbol Set Code: 46 Code: 140119 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **BOTTOM ROUGHNESS - ROUGH** Symbol Set Code: 46 Code: 140120 **Color**: Red (RGB 0:255:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **CLUTTER (BOTTOM) - LOW** Symbol Set Code: 46 Code: 140121 **Color**: Green (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **CLUTTER (BOTTOM) - MEDIUM** Symbol Set Code: 46 Code: 140122 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **CLUTTER (BOTTOM) - HIGH** Symbol Set Code: 46 Code: 140123 **Color**: Red (RGB 255:0:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **IMPACT BURIAL - 0%** Symbol Set Code: 46 Code: 140124 **Color**: Blue RGB (0:0:255) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **IMPACT BURIAL - 0-10%** Symbol Set Code: 46 Code: 140125 **Color**: Green RGB (0:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINEWARFARE BOTTOM DESCRIPTORS **IMPACT BURIAL - 10-20%** Symbol Set Code: 46 Code: 140126 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **IMPACT BURIAL - 20-75%** Symbol Set Code: 46 Code: 140127 **Color**: Orange (RGB 255:127:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **IMPACT BURIAL - >75%** Symbol Set Code: 46 Code: 140128 **Color**: Red (RGB 255:0:00) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM CATEGORY - A** Symbol Set Code: 46 Code: 140**129** **Color**: Green (RGB 0:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM CATEGORY - B** Symbol Set Code: 46 Code: 140**130** **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM CATEGORY - C** Symbol Set Code: 46 **Code**: 140**131** Color: Red (RGB 255:0:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - A1** Symbol Set Code: 46 Code: 140**132** **Color**: Green (RGB 48:255:0) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - A2** Symbol Set Code: 46 Code: 140**33** **Color**: Light Green (RGB 127:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - A3** Symbol Set Code: 46 Code: 140**34** **Color**: Lime Green (RGB 175:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - B1** Symbol Set Code: 46 Code: 140**35** **Color**: Yellow-Green (RGB 207:255:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - B2** Symbol Set Code: 46 Code: 140**36** **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - B3** Symbol Set Code: 46 Code: 140**37** **Color**: Gold (RGB 255:207:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - C1** Symbol Set Code: 46 Code: 140**38** **Color**: Orange (RGB 255:127:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - C2** Symbol Set Code: 46 Code: 140**39** **Color**: Dark Orange (RGB 255:80:0) Draw Rules: Area2 - Dynamic		
GEOPHYSICS/ACOUSTICS MINE WARFARE BOTTOM DESCRIPTORS **MIW BOTTOM TYPE - C3** Symbol Set Code: 46 Code: 140**40** **Color**: Orange-Red (RGB 255:48:0) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
LIMITS Static/Dynamic: N/A Symbol Set Code: 46 Code: **15**0000	N/A	N/A
LIMITS **MARITIME LIMIT BOUNDARY** Symbol Set Code: 46 Code: 15**01**00 **Color**: Magenta thin short dash line Draw Rules: Line1 - Dynamic		
LIMITS **MARITIME AREA** Symbol Set Code: 46 Code: 15**02**00 **Color**: Magenta Draw Rules: Area2 - Dynamic		
LIMITS **RESTRICTED AREA** Symbol Set Code: 46 Code: 15**03**00 **Color**: Magenta dashed T line Draw Rules: Line1 - Dynamic		
LIMITS **SWEPT AREA** Symbol Set Code: 46 Code: 15**04**00 **Color**: Pink dots Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
LIMITS **TRAINING AREA** Symbol Set Code: 46 Code: 15**05**00 **Color**: Magenta/Magenta ! in circle w/ dashed outline Draw Rules: Area2 - Dynamic		
LIMITS **OPERATOR-DEFINED** Symbol Set Code: 46 Code: 15**06**00 **Color**: Orange solid outline Draw Rules: Area2 - Dynamic		
MAN-MADE STRUCTURES Static/Dynamic: N/A Symbol Set Code: 46 Code: **16**0000	N/A	N/A
MAN-MADE STRUCTURES **SUBMARINE CABLE** Symbol Set Code: 46 Code: 16**01**00 **Color**: Magenta Draw Rules: Line1 - Dynamic		**Line Style**: Repeating pattern wavy lines The points are typically connected with a solid curved lined.
MAN-MADE STRUCTURES **SUBMERGED CRIB** Symbol Set Code: 46 Code: 16**02**00 **Color**: Blue fill w/ black dotted outline Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
MAN-MADE STRUCTURES **CANAL** Static/Dynamic: D Symbol Set Code: 46 Code: 16**03**00 **Color**: Black solid thick line Draw Rules: Line1 - Dynamic		
MAN-MADE STRUCTURES **FORD** Symbol Set Code: 46 Code: 16**04**00 **Color**: Black symbol Draw Rules: Point1 - Static		
MAN-MADE STRUCTURES **LOCK** Symbol Set Code: 46 Code: 16**05**00 **Color**: Black symbol Draw Rules: Point1 - Static		
MAN-MADE STRUCTURES **OIL/GAS RIG** Symbol Set Code: 46 Code: 16**06**00 **Color**: Black symbol Draw Rules: Point1 - Static		
MAN-MADE STRUCTURES **OIL/GAS RIG FIELD** Symbol Set Code: 46 Code: 16**07**00 **Color**: Gray dot pattern fill Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
MAN-MADE STRUCTURES **PIPELINES/PIPE** Symbol Set Code: 46 Code: 16**08**00 **Color**: Gray dash line with circle Draw Rules: Line1 - Dynamic		
MAN-MADE STRUCTURES **PILE/PILING/POST** Symbol Set Code: 46 Code: 16**09**00 **Color**: Black dot Draw Rules: Point1 - Static		

TABLE I-IV. Meteorological space icons.

DESCRIPTION	ICON	DRAW RULES
SPACE Static/Dynamic: N/A Symbol Set Code: 47 Code: **11**0000	N/A	No icon is associated with this entity. It is for hierarchal purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SIGNALS INTELLIGENCE SYMBOLS

J.1 SCOPE

J.1.1 Scope. This appendix addresses symbols that support signals intelligence (SIGINT) in the C2 domain. The tables in this appendix present the icons and modifiers for the SIGINT domain. This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

J.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

J.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

J.4 GENERAL REQUIREMENTS

J.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and SIGINT symbology.

J.5 DETAILED REQUIREMENTS

J.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

J.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

J.5.3 Composition of SIGINT symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Figure J-1 shows an example of a SIGINT symbol.

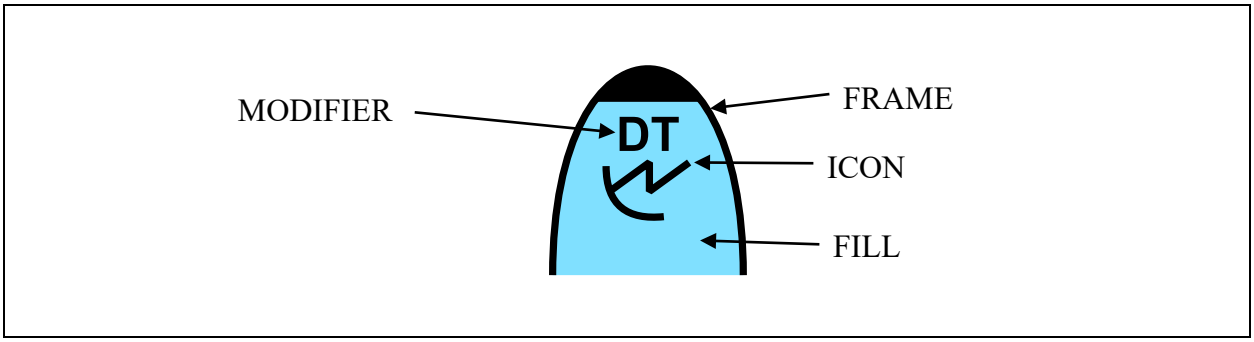






FIGURE J-1. Signals intelligence symbol components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

J.5.3.1 Symbol building process. Table J-1 depicts the symbol building process for SIGINT symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE J-I. Signal intelligences symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity of the object from the appropriate dimension column in tables I, II, or III. In this example, the standard identity is friend and the dimension is space. The example depicts a “friendly space track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “radar,” a SIGINT entity type. The example depicts a “friendly space radar.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “data transmission,” a sector 1 modifier. The example depicts a “friendly space radar with data transmission capability.” **Note**: There are no sector 2 modifiers in SIGINT symbols.	
4.	The finished symbol will appear as shown in the example.	

J.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table J-I). When depicted, modifiers shall be placed in sector 1 as appropriate (see table J-I). There are no sector 2 modifiers in SIGINT. Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

J.5.3.3 Amplifiers. The display of additional alphanumerical and graphical information on identity, movement and location and capabilities of a SIGINT symbol is dependent on the dimension of that symbol. A SIGINT symbol may be in the space, air, land equipment, sea surface, or sea subsurface dimension. For example, if the SIGINT symbol is in the space dimension, then that symbol shall follow the amplifier requirements as stated in the space appendix. See 5.3.7 for more information on amplifiers.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

J.6 SIGINT SYMBOLS

J.6.1 SIGINT symbols. This section includes the lists of icons and modifiers for building SIGINT symbols.

J.6.2 SIGINT icons. Table J-II depicts SIGINT icons.








TABLE J-II. Signals intelligence icons.

DESCRIPTION	ICON	REMARKS
SIGNAL INTERCEPT Type: Entity Symbol Set Code: 50, 51, 52, 53, 54 Code: **11**0000 Icon Type: Full Octagon	N/A	Reserved for hierarchical purposes.
COMMUNICATIONS Type: Entity Type Entity: SIGNAL INTERCEPT Symbol Set Code: 50, 51, 52, 53, 54 Code: 11**01**00 Icon Type: Main		N/A
JAMMER Type: Entity Type Entity: SIGNAL INTERCEPT Symbol Set Code: 50, 51, 52, 53, 54 Code: 11**02**00 Icon Type: Main		N/A
RADAR Type: Entity Type Entity: SIGNAL INTERCEPT Symbol Set Code: 50, 51, 52, 53, 54 Code: 11**03**00 Icon Type: Main		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.










J.6.3 SIGINT sector 1 modifiers. The SIGINT sector 1 modifiers denote communications and radar categories based on dimension (for example, space, air, land, sea surface, or sea subsurface). Table J-III lists SIGINT sector 1 modifiers and illustrates their placement within the bounding octagon.

TABLE J-III. Signals intelligence sector 1 modifiers.- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ANTI-AIRCRAFT FIRE CONTROL Symbol Set Code: 52,53 Code: 01	LAND/SEA SURFACE RADAR		N/A
AIRBORNE SEARCH AND BOMBING Symbol Set Code: 51 Code: 02	AIR RADAR		N/A
AIRBORNE INTERCEPT Symbol Set Code: 51 Code: 03	AIR RADAR		N/A
ALTIMETER Symbol Set Code: 51 Code: 04	AIR RADAR		N/A
AIRBORNE RECONNAISSANCE AND MAPPING Symbol Set Code: 51 Code: 05	AIR RADAR		N/A
AIR TRAFFIC CONTROL Symbol Set Code: 51, 52, 53 Code: 06	AIR/LAND/SEA SURFACE RADAR		N/A
BEACON TRANSPONDER (NOT IFF) Symbol Set Code: 51, 52, 53, 54 Code: 07	AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BATTLEFIELD SURVEILLANCE Symbol Set Code: 51, 52 Code: 08	AIR/LAND RADAR		N/A
CONTROLLED APPROACH Symbol Set Code: 52,53 Code: 09	LAND/SEA SURFACE RADAR		N/A
CONTROLLED INTERCEPT Symbol Set Code: 51,52,53 Code: 10	AIR/LAND/SEA SURFACE RADAR		N/A
CELLULAR/MOBILE Symbol Set Code: 51, 52, 53, 54 Code: 11	AIR/LAND/SEA SURFACE/SEA SUBSURFACE COMMUNICATIONS		N/A
COASTAL SURVEILLANCE Symbol Set Code: 51 Code: 12	LAND RADAR		N/A
DECOY/MIMIC Symbol Set Code: 51, 52, 53, 54 Code: 13	AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
DATA TRANSMISSION Symbol Set Code: 50, 51, 52, 53, 54 Code: 14	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
EARTH SURVEILLANCE Symbol Set Code: 50 Code: 15	SPACE RADAR		N/A
EARLY WARNING Symbol Set Code: 51,52,53,54 Code: 16	AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
FIRE CONTROL Symbol Set Code: 51,52,53 Code: 17	AIR/LAND/SEA SURFACE RADAR		N/A
GROUND MAPPING Symbol Set Code: 51 Code: 18	AIR RADAR		N/A
HEIGHT FINDING Symbol Set Code: 52,53 Code: 19	LAND/SEA SURFACE RADAR		N/A
HARBOR SURVEILLANCE Symbol Set Code: 52 Code: 20	LAND RADAR		N/A
IDENTIFICATION, FRIEND OR FOE (INTERROGATOR) Symbol Set Code: 50, 51, 52, 53, 54 Code: 21	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
INSTRUMENT LANDING SYSTEM Symbol Set Code: 52, 53 Code: 22	LAND/SEA SURFACE RADAR		N/A
IONOSPHERIC SOUNDING Symbol Set Code: 51, 52 Code: 23	AIR/LAND RADAR		N/A
IDENTIFICATION, FRIEND OR FOE (TRANSPONDER) Symbol Set Code: 50, 51, 52, 53, 54 Code: 24	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
BARRAGE JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 25	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
CLICK JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 26	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
DECEPTIVE JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 27	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
FREQUENCY SWEPT JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 28	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
JAMMER (GENERAL) Symbol Set Code: 50, 51, 52, 53, 54 Code: 29	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
NOISE JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 30	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
PULSED JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 31	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
REPEATER JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 32	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
SPOT NOISE JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 33	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
TRANSPONDER JAMMER Symbol Set Code: 50, 51, 52, 53, 54 Code: 34	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
MISSILE ACQUISITION Symbol Set Code: 51,52,53 Code: 35	AIR/LAND/SEA SURFACE RADAR		N/A
MISSILE CONTROL Symbol Set Code: 50, 51, 52, 53, 54 Code: 36	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
MISSILE DOWNLINK Symbol Set Code: 51 Code: 37	AIR RADAR		N/A
METEOROLOGICAL Symbol Set Code: 51, 52, 53 Code: 38	AIR/LAND/SEA SURFACE RADAR		N/A
MULTI-FUNCTION Symbol Set Code: 50, 51, 52, 53, 54 Code: 39	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		Two or more of EW, TA, TT, MG, TI
MISSILE GUIDANCE Symbol Set Code: 51,52,53 Code: 40	AIR/LAND/SEA SURFACE RADAR		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
MISSILE HOMING Symbol Set Code: 51 Code: 41	AIR RADAR		N/A
MISSILE TRACKING Symbol Set Code: 50, 51, 52, 53, 54 Code: 42	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
NAVIGATIONAL/GENERAL Symbol Set Code: 50, 51, 52, 53, 54 Code: 43	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
NAVIGATIONAL/DISTANCE MEASURING EQUIPMENT Symbol Set Code: 50, 51, 52, 53, 54 Code: 44	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
NAVIGATIONAL/TERRAIN FOLLOWING Symbol Set Code: 50, 51, 52, 53, 54 Code: 45	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
NAVIGATIONAL/WEATHER AVOIDANCE Symbol Set Code: 51, 52, 53, 54 Code: 46	AIR/LAND/SEA SURFACE/SEA SUBSURFACE JAMMER		N/A
OMNI-LINE OF SIGHT (LOS) Symbol Set Code: 51,52,53,54 Code: 47	AIR/LAND/SEA SURFACE/SEA SUBSURFACE COMMUNICATIONS		N/A
PROXIMITY FUSE Symbol Set Code: 51 Code: 48	AIR RADAR		N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
POINT-TO-POINT LINE OF SIGHT (LOS) Symbol Set Code: 50, 51, 52, 53, 54 Code: 49	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE COMMUNICATIONS		N/A
INSTRUMENTATION Symbol Set Code: 50, 51, 52, 53, 54 Code: 50	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
RANGE ONLY Symbol Set Code: 50, 51, 52, 53, 54 Code: 51	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
SONOBUOY Symbol Set Code: 53, 54 Code: 52	SEA SURFACE/SEA SUBSURFACE RADAR		N/A
SATELLITE DOWNLINK Symbol Set Code: 50 Code: 53	SPACE COMMUNICATIONS		N/A
SPACE Symbol Set Code: 50, 51, 52, 53, 54 Code: 54	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
SURFACE SEARCH Symbol Set Code: 50, 51, 52, 53, 54 Code: 55	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
SHELL TRACKING Symbol Set Code: 52 Code: 56	LAND RADAR		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
SATELLITE UPLINK Symbol Set Code: 51,52,53,54 Code: 57	AIR/LAND/SEA SURFACE/SEA SUBSURFACE COMMUNICATIONS		N/A
TARGET ACQUISITION Symbol Set Code: 50,51,52,53,54 Code: 58	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
TARGET ILLUMINATION Symbol Set Code: 51,52,53 Code: 59	AIR/LAND/SEA SURFACE RADAR		N/A
TROPOSPHERIC SCATTER Symbol Set Code: 52 Code: 60	LAND COMMUNICATIONS		N/A
TARGET TRACKING Symbol Set Code: 50, 51, 52, 53, 54 Code: 61	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
UNKNOWN Symbol Set Code: 50, 51, 52, 53, 54 Code: 62	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
VIDEO REMOTING Symbol Set Code: 50, 51, 52, 53, 54 Code: 63	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A
EXPERIMENTAL Symbol Set Code: 50, 51, 52, 53, 54 Code: 64	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE RADAR		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CYBERSPACE Symbol Set Code: 50, 51, 52, 53, 54 Code: 65	SPACE/AIR/LAND/SEA SURFACE/SEA SUBSURFACE CAPABILITY		N/A

J.6.4 SIGINT sector 2 modifiers. The SIGINT sector 2 modifiers denote communications and radar categories based on dimension (for example, space, air, land, sea surface, or sea subsurface). Table J-IV lists SIGINT sector 2 modifiers and illustrates their placement within the bounding octagon.

TABLE J-IV. Signals intelligence sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
CYBERSPACE Symbol Set Code: 50, 51, 52, 53, 54 Code: 01	CAPABILITY		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

USE OF WARFIGHTING SYMBOLS IN PSEUDO-THREE-DIMENSIONAL DISPLAYS

K.1 SCOPE

K.1.1 Scope. This appendix provides definitions and guidelines for display of Common Warfighting Symbology in pseudo-three-dimensional displays, also known as 2.5D displays. In the context of this appendix, 2.5D display refers to the presentation of information that gives the perception of depth or varying distance, as in a non-orthogonal viewing angle. In other words, it is a viewing angle that is not perpendicular to the surface of the Earth. This is in contrast to several other emerging graphic technologies that will allow for viewing in stereographic or full three-dimensional display. In stereo display, dual images are used to recreate a three-dimensional perception in the human brain.

a. Although there is some discussion of the use of 2.5D symbols, the primary focus of this appendix is the display of the two-dimensional symbols contained in MIL-STD-2525 in a 2.5D display of the surrounding environment. Modeling and simulation standards and methods of portrayal would be more suitable for the display of 2.5D or full three-dimensional symbols and models.

b. This appendix is not a mandatory part of the standard. It is intended for guidance only.

K.2 REFERENCES

This section is not applicable to this standard.

K.3 DEFINITIONS

K.3.1 Billboarding: A method for portraying a symbol in a 2.5D display in which the symbol is perpendicular to the viewing angle.

K.3.2 Cubing: A method for portraying a symbol in a 2.5D display in which the symbol is overlaid on a cube to present a surface visible from the viewing angle.

K.3.3 Curve (line): One-dimensional geometric primitive representing the continuous image of a line.

K.3.4 Geospatial: Pertaining to the geographic location and characteristics of natural or constructed features and boundaries on, above, or below the Earth's surface; especially referring to data that is geographic and spatial in nature.

K.3.5 Glyph: A symbol (as a curved arrow on a road sign) that conveys information nonverbally.

K.3.6 Icon: A sign (as a word or graphic symbol) whose form suggests its meaning.

K.3.7 Image: The optical counterpart of an object produced by an optical device (as a lens or mirror) or an electronic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.3.8 Marker post (lollipop): A method for portraying a symbol in a 2.5D display in which the symbol is billboarded but also raised above or below the terrain surface by a vertical line.

K.3.9 Model: A miniature representation or simulation.

K.3.10 Pictograph: A picture representing a word or idea; a hieroglyph.

K.3.11 Point: Zero-dimensional geometric primitive, representing a position.

K.3.12 Solid (volume): Three-dimensional geometric primitive, representing the continuous image of a region of Euclidean three space.

K.3.13 Surface (area): Two-dimensional geometric primitive locally representing a continuous image of a region of a plane.

K.3.14 Symbicon: A hybrid of a symbol and icon which attempts to combine the best identification performance benefits of each representation.

K.3.15 Symbol: An object that presents information (MIL-STD-2525). An arbitrary or conventional sign used in writing or printing relating to a particular field to represent operations, quantities, elements, relations, or qualities.

K.3.16 Terrain draping: A method for portraying a symbol in a 2.5D display in which the symbol is overlaid on a terrain surface.

K.3.17 Three-dimensional: Giving the illusion of depth or varying distances.

K.3.18 Two-dimensional: Lacking depth of characterization.

K.4 PSEUDO-THREE-DIMENSIONAL (2.5D) SYMBOLIZATION

K.4.1 Introduction. Symbols are used to convey information about objects in space. In most traditional command and control applications, this has been accomplished by an orthogonal (directly overhead) view, such as when looking at a map. Command and control symbols have been overlaid on top of geospatial information or a “map background” to provide a geospatial context to locate the military object of interest at a geographic position. Attributes of the object are visually encoded in the symbol to communicate information about the object to the observer.

a. As command and control symbology has evolved from hand-annotated paper maps to automated computer display screens, views other than orthogonal have become practical. Non-overhead views or dynamic viewing positions such as “fly-through” displays provide new ways in which a warfighter can better perceive and understand the operational environment.

b. This appendix establishes some basic terminology for addressing portrayal of information in 2.5D displays and provides advantages, disadvantages and guidance on some of these methods of display. Although some aspects of 2.5D symbols are discussed, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

primary focus of this appendix is on portrayal of the two-dimensional symbols contained in MIL-STD-2525 in a 2.5D display. The modeling and simulation (M&S) community has been portraying the environment in 2.5D for a long time and there are M&S standards and symbol libraries available for 2.5D symbology (see K.5.2).

c. This appendix is not intended to be a "standard" as such. New developments in the information technology, computer graphics and the geospatial information systems (GIS) and modeling and simulation industries will undoubtedly eclipse the information provided here.

K.4.2 When to use 2.5D displays. The paramount point when considering the use of 2.5D displays is to recognize that a 2.5D display is not necessarily better than a two-dimensional display for every application. A 2.5D display may look neat and impress a viewing audience, but it must really be evaluated as to whether it presents information better or not as good as a traditional two-dimensional display.

K.4.2.1 Research indicates that using 2.5D displays provide advantages such as:

a. A visual representation that may be useful in understanding the shape or rough spatial layout of scenes

b. More intuitive and natural usage

c. Preferred by users

d. Clearer picture of tactical information (eliminate need to search text boxes for attributes such as altitude and to do mental integration of information from different views). These benefits may also be engineered into 2D displays.[1]

K.4.2.2 Conversely, 2.5D displays have several disadvantages. They are:

a. Prone to distortion (due to association with parameters of perspective)

b. Prone to clutter (less display area near horizon, so more objects are packed into a smaller area; addition of depth cues such as drop lines increase number of objects displayed)

c. Poor for tasks requiring precision, both about objects (e.g. realistic icons do not scale well; distant objects may be too small to recognize) and distances and angles (from foreshortening and inadequate and conflicting depth cues.

[1] Smallman, H. S., St. John, M., Oonk, H. M. and Cowen, M. B. (2001), Information availability in 2D and 3D displays, IEEE Computer Graphics and Application, 21, 51-57.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.4.2.3 Research is mixed concerning performance benefits of using 2D or 2.5D displays largely due to the great variety of factors considered in the studies. Also, users may prefer (or rate highly) displays that actually hinder rather than enhance their performance.[2]

K.4.3 Taxonomy of symbols and displays. Symbols can be classified many different ways, including subject area, data structure and visual aspects. A basic taxonomy might look something like this:

K.4.3.1 Subject area.

a. Operational symbols – military operations and control measures

b. Geospatial symbols – provides geospatial context (map background)

K.4.3.2 Delineation type.

a. Point – one coordinate point

b. Line – a series of coordinate points

c. Area – a series of coordinate points in which the line creates a polygon

d. Volume – a polygon or shape with a vertical component

K.4.3.3 Degree of Abstraction.

a. Abstract symbol – a symbol representing an object based on learned association

b. Pictograph or icon – a symbol representing an object based on the symbol looking like the object

c. Symbicon – a hybrid of a symbol and an icon which attempts to combine the best identification performance benefits of each representation.

d. Two-dimensional image – a picture of the object based on varying intensity of reflected energy from the object

e. Pseudo-three-dimensional model – a physical or digital representation of an object

K.4.3.4 Dimensionality.

a. Two-dimensional – a symbol lacking depth of characterization

---

[2] Smallman, H. S., St. John, M., Oonk, H. M. and Cowen, M. B. (2005), Niive Realism: Misplaced faith in the utility of realistic displays, Ergonomics in Design, 13(3), 6-13, Fernandes, K. Usability of 3D Perspective Displays, SPAWAR and St. John, M, Cowen, M.B., Smallman, H.S. and Oonk, H.M. (2001) The use of 2D and 3D displays for shape understanding versus relative position tasks. Human Factors, 43, 79-98.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

b. Pseudo-three-dimensional (2.5D) – a symbol giving the illusion of depth or varying distances

c. Three-dimensional – a symbol displayed by stereoscopic, holographic or other means that provides a complete representation of three dimensions.

K.4.3.5 Relative to terrain.

a. Ground clamped – symbol is shown on terrain

b. Elevated – symbol is raised above terrain surface

K.4.4 Geospatial (map) symbols. Geospatial symbology generally follows the “earth surface” and can be draped over elevation data. Typically, operational symbols are shown on a map background to provide a positional reference. Digital geospatial information can be classified into two types.

K.4.4.1 Raster data. Raster data is a method of representing geospatial data characterized by a matrix of evenly spaced rows and columns of data points. These data points (called "pixels" in image and scanned map data) typically represent some value at that point, while the position within the columns and rows determines the geographic position. Raster data structures are typically used to record scanned maps and charts (MC&G graphic data), image data, or gridded data, such as terrain elevation posts in an elevation model.

K.4.4.2 Vector data. Vector data represents each cartographic feature by an entity description (feature code) and a spatial extent (geographic position). Geographic position may be two-dimensional (horizontal position only) or three-dimensional (including elevation). Features are categorized as point, line, or area features. The position of a point feature is described by a single coordinate pair (or triplet for three dimensional data). The spatial extent of a line feature is described by a string of coordinates of points lying along the line, while the extent of an area feature is described by treating its boundary as a line feature. Vector data may be stored in a sequential, chain node, or topological data structure.

K.4.5 Imagery. By its nature, imagery is not symbolized but instead relies on variations in intensity of captured light (or other portion of spectrum or other phenomena) to create a visual picture of the object or phenomena being represented. Imagery can be used as a background display or the picture of an object or piece of equipment.

a. There is a significant difference between raster geospatial data or an image and vector geospatial data. In vector data, geographic features can be filtered or turned on or off in a vector display. In a raster display, the map or image content is fixed and you see whatever was shown on the scanned paper map or image.

K.4.6 Optimum display method. Each type of symbolization has advantages and disadvantages. There is no one right answer. The intended application will determine which method best meets the intended use of the display.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5 GUIDANCE AND PORTRAYAL CONSIDERATIONS IN PSEUDO-THREE-DIMENSIONAL (2.5D) DISPLAYS

K.5.1 Use of 2D symbols in 2.5D display. The symbols provided in the appendices of MIL-STD-2525 were designed for two-dimensional display. They can be used in a 2.5D display, using various visualization techniques, some of which are described below. The visualizations described here are not intended to be an all-encompassing or comprehensive list but merely some of the more common approaches. The intent of this appendix is to provide guidance to implementers on some of the advantages and disadvantages of these visualization techniques.

K.5.1.1 Visualization of icons. The symbols in the various appendices of MIL-STD-2525 for space, air, land, maritime (sea surface and sea subsurface), meteorology, signals intelligence, etc., symbolize units, equipment and installations as point symbols. Each is associated with a single geographic coordinate. The following paragraphs describe several methods of symbolizing point icons.

K.5.1.1.1 Terrain draping. One simple method of displaying two-dimensional symbols in a 2.5D display is to simply place the 2D symbols over the 2.5D surface model (see figure K-1). This makes it appear as if operational symbols were large flags laid out on the ground. With draping, no changes to existing 2D symbols are required. Since the viewing angle is not perpendicular, symbols may be distorted in shape. Depending on the underlying terrain, some symbols may be obscured by higher terrain in between the symbol and the viewing position.

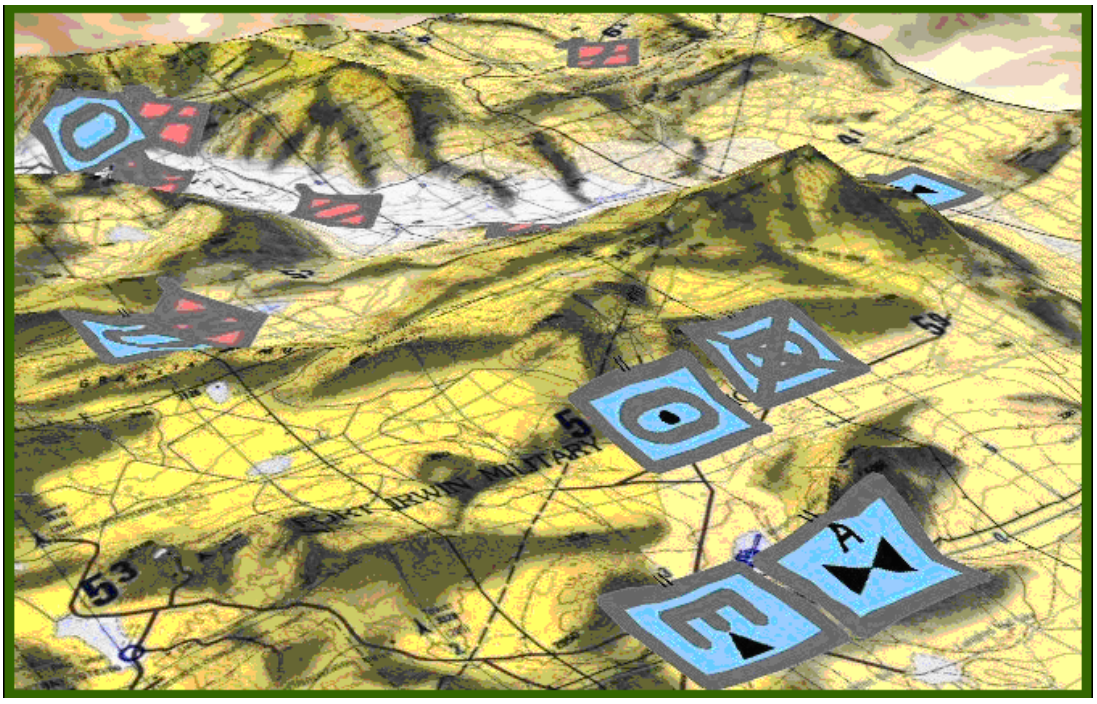


FIGURE K-1. Example of terrain draping of icons.
(Static MOLE layer displayed in ArcGlobe)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5.1.1.2 Billboarding. Billboarding is a technique in which a two-dimensional symbol is positioned vertically or perpendicular to the view angle (see figure K-2). This makes symbols easier to see than if they were draped over the terrain but is much more computationally demanding, sometimes affecting system performance. Although used in systems, the performance benefits of billboarding have not been validated with performance data. There are several factors that must be considered when orienting the billboard as well. Symbols placed on the ground have to be elevated enough so the entire symbol is visible. If the center of the symbol was co-located with the position on the ground surface, the bottom half of the symbol would be obscured. Billboarding is conceptually different from lollipopping. In fact most billboard displays are raised above ground level. Billboarding refers to placing the 2D symbol perpendicular to view angle, while lollipopping or using a marker post refers to elevating the symbol above or below the terrain surface.

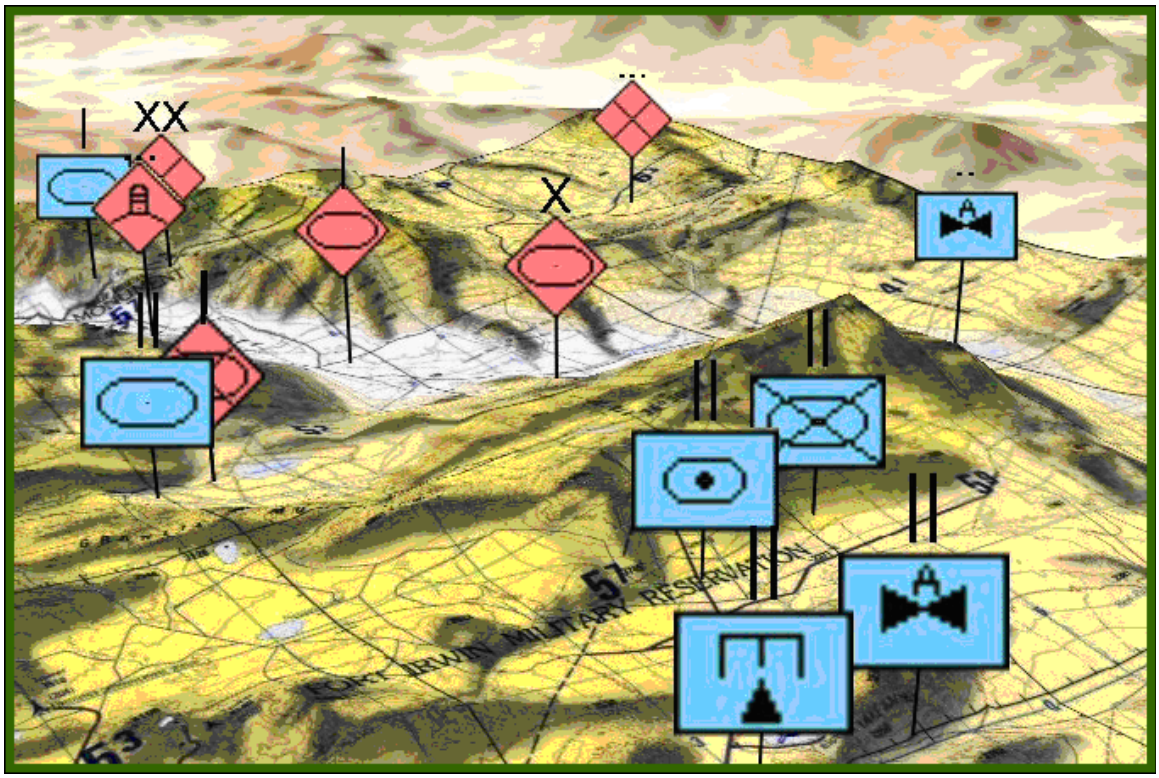


FIGURE K-2. Example of billboarding of icons. (TOC 3D display)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5.1.1.3 Cubing. An alternative to billboarding is to project the 2D symbol onto a 2.5D shape, such as a cube (see figure K-3). As with billboarding, cubes can also be elevated above the terrain surface.

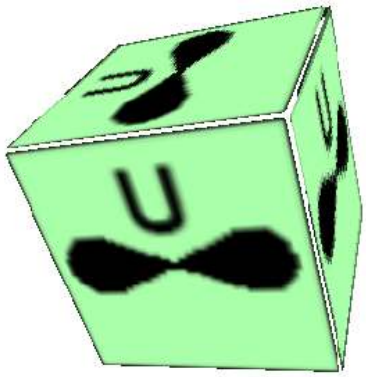
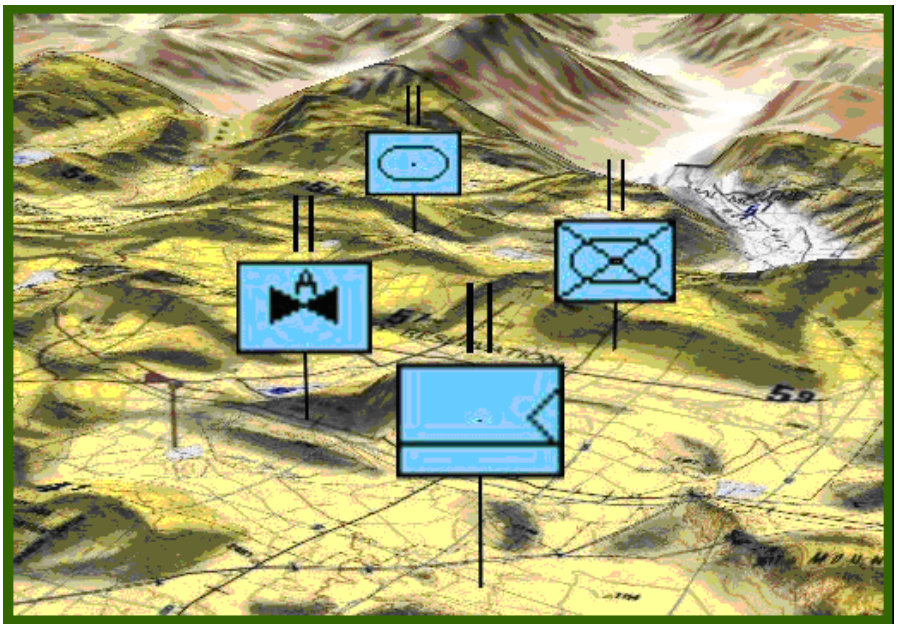


FIGURE K-3. Example of cubing of icons.

K.5.1.1.4 Marker post. In many cases, billboarded or cubed symbols are raised above the ground surface using a marker post, a technique sometimes called “lollipopping” (see figure K-4). The user can set an arbitrary height above ground surface and drop down lines connect the symbol to its ground location. In a 2.5D display, tracks that are actually above or below ground or water surface can be portrayed in their actual location. Lollipopping has the potential to create confusion with the actual altitude of an above or below-ground/water track. For example, it might appear that a helicopter is flying underneath a tank. Care must also be taken to distinguish between symbols raised to an arbitrary height above or below terrain and those symbols showing an actual altitude/depth, if both types are used in the same display.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

FIGURE K-4. Example of marker posts.
(TOC 3D display)

K.5.1.2 Visualization of control measure symbols. The control measure symbols in MIL-STD-2525 are more complex than the simple icons in appendix A and contain point, line and area symbols. The techniques for portrayal of line and area symbols are generally similar to the point symbols. Lines may be “draped” over the terrain; but, as with points, draping creates the potential for a symbol to be obscured by intervening terrain (see figure K-5). Line symbols can be extruded above the terrain for visual emphasis, forming what appear to be walls on the terrain surface (see figure K-6). These walls could be used as a background for presenting additional information, such as echelon, status, etc.

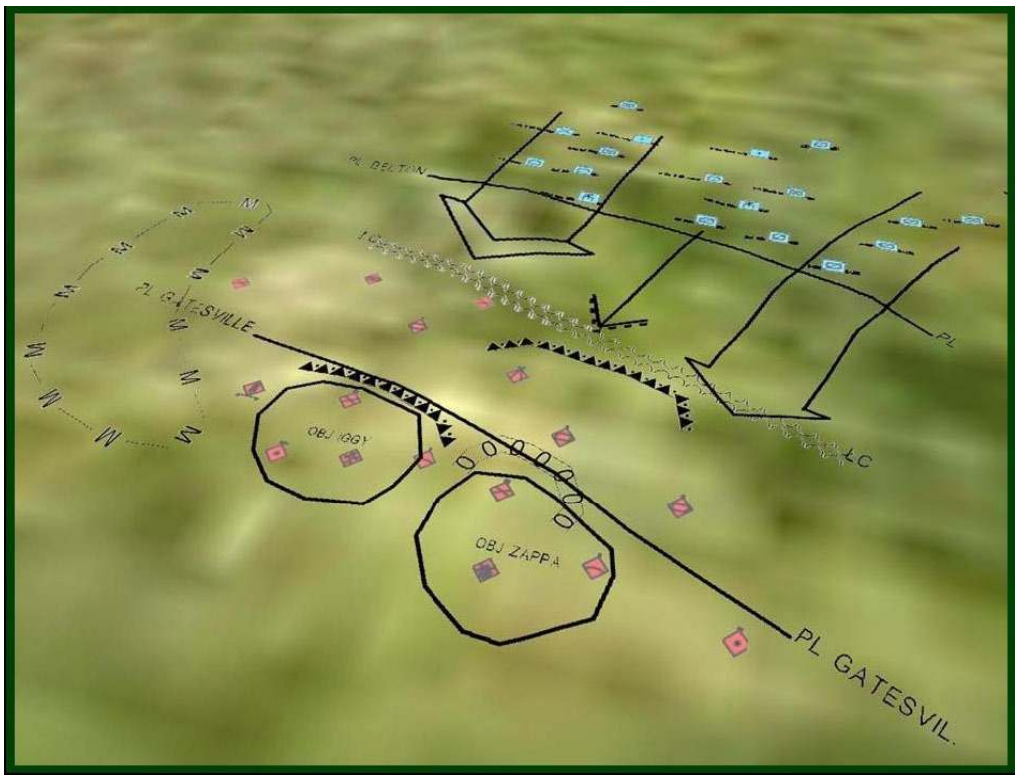


FIGURE K-5. Example of draped control measure symbols.
(MOLE in ArcGlobe)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

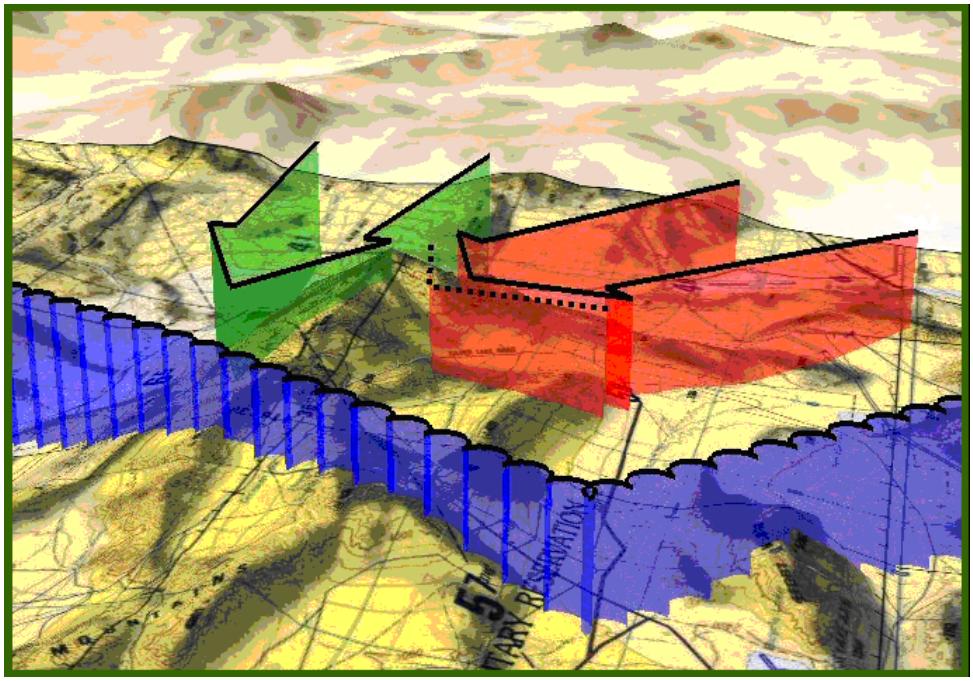


FIGURE K-6. Example of extruded control measure symbols. (TOC 3D display)

K.5.1.3 Symbicon. A symbicon is a hybrid of an abstract symbol with a pictograph or icon that increases the ease of identifying an object[3] (see figure K-7). A typical symbicon may combine the identification code of a symbol, for example "B" for bomber, with the stylized silhouette of an aircraft.

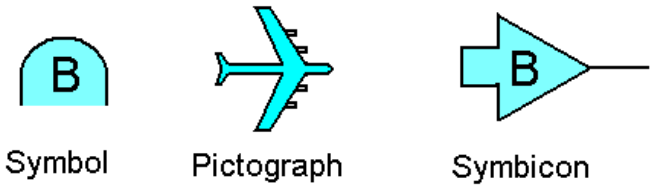


FIGURE K-7. Example of a symbicon.

K.5.2 Pseudo-three-dimensional models. Many systems are starting to use 2.5D models to represent military objects, rather than the 2D symbols contained in MIL-STD-2525 (see figure K-8). Models may work well for portrayal of individual platforms or systems, such as a tank or aircraft, but models work less well or may be impractical for symbolizing larger units. Although in general, users prefer to look at realistic icons, they result in slower, error-prone performance.[4] The level of detail provided by the model may also create recognition problems

[3] Symbicons: Advanced Symbology for Two-dimensional and Three-dimensional Displays, SPAWAR TR 1850, February 2001

[4] Smallman, H.S., St. John, M.B., Oonk, H.M. and Cowen, M.B. (2000) Track recognition using two-dimensional symbols or three-dimensional realistic icons. SPAWAR Technical Report 1818.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

in the display that reflect the situation in the real world. For example, if an operator were unfamiliar with the appearance of a particular weapons system, it would not make much sense to use a 2.5D model of that weapons system to identify the equipment type. You would also expect recognition errors to occur if two weapons systems were similar in appearance. Overall, traditional symbols were more useful when determining platform identity and affiliation were required. Icons are better for determining some aspects of direction of movement.[5]



FIGURE K-8. Examples of pseudo-three-dimensional models.

K.5.2.1 Modeling and Simulation (M&S) standards. The International Organization for Standardization (ISO) 18023, Computer Graphics and Image Processing – Synthetic Environment Data Representation and Interchange Specification (SEDRIS) suite of standards are used for the exchange of modeling and simulation data.

K.5.2.2 Model libraries. The DoD maintains several libraries of reusable digital models of weapons systems at:

a. Army Model Exchange: https://modelexchange.army.mil

b. M&S Glossary: http://www.msco.mil/MSGlossary_ABR_M.html

c. M&S Coordination Office: http://msco.mil/

d. M&S Resource Repository System: http://www.msco.mil/resource_discovery.html

K.5.3 Design considerations for symbology in a 2.5D display.

K.5.3.1 Symbol location. One important function of a symbol is to indicate where the object is located. MIL-STD-2525, 5.3.12 requires that point icons be positioned so the geometric center, or center of mass of the symbol, corresponds to the actual location of the object. Certain other control measure symbols have specified “anchor points” that differ from the center of mass of the symbol.

[5] Searching for Tracks Imaged as Symbols or Realistic Icons: A Comparison Between Two-Dimensional and Three-Dimensional Displays, SPAWAR TR 1854, April 2001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5.3.1.1 Submergence of symbols. If a symbol is overlain on the terrain "terrain draping," it is possible to tie the center of mass of the symbol to the symbol location as in a two-dimensional display and conform to the general rules of MIL-STD-2525. If, however, the symbols are billboarded or shown vertically, then linking the symbol location to the center of mass of the symbol will result in the bottom half of the symbol being below the terrain surface. Billboarding displays generally place bottom of the symbol on the terrain surface. This problem does not occur if the object is an air or sub-surface track and is far enough above or below the terrain surface (ground/water).

K.5.3.1.2 Height above/below terrain surface. Some 2.5D displays use the "lollipop" technique to elevate symbols a fixed distance above the terrain surface. This works well for ground tracks but may cause confusion if ground and air tracks were shown in the same display, since some symbols will be raised an arbitrary height while air tracks will generally show actual altitude of the track.

K.5.3.1.3 Estimating track position. Studies have shown that estimating a track position in a 2.5D display is difficult because many of the visual cues that the human brain uses to estimate a location cannot be duplicated in a 2.5D digital display. Operator performance is increased if artificial cues are added, typically a drop line or drop shadow. A drop line is a vertical line from the above-surface object to the terrain surface. A drop shadow is a silhouette of the object on the terrain surface. These artificial cues can contribute to display clutter. Even two-dimensional displays will benefit by having a distinct "locator point" on the symbol, rather than just using the center of mass of the symbol.[6]

K.5.3.2 Perspective. In a traditional two-dimensional (map-like) display, the perspective is "orthogonal" or viewed from directly overhead; so, there is no change of scale over the display. In a 2.5D view the scale of the display decreases (gets smaller) as distance from the observer increases. This creates difficulty in perceiving the actual location of an object in space. In a two-dimensional display, the elevation of an object is not obvious, but the horizontal position (x,y coordinates) is not in doubt. In a 2.5D display, the latitude, longitude and elevation (x, y and z) aspects of location are each ambiguous. When viewing an object in the real world, a human observer uses a number of visual cues to determine location in three-dimensional space. Objects become smaller with increasing distance. Illumination provides variation in light and dark to specify shape in depth. Closer objects block out objects that are farther away. People see in stereo vision and can judge how far away an object is based on the slight differences in the image in their right and left eyes. In a digital display, many of these real-world cues are impossible or impractical to reproduce. Varying symbol size with distance and closer objects obscuring more distant objects are the most easily implemented visual cues. These visual cues have limitations when implemented in a digital display. Symbols can only be made so small before they becomes unrecognizable; yet, exaggerating their size to make them more legible distorts the appearance of location, making them appear closer than they really are. Closer symbols obscuring symbols that are farther away also makes legibility difficult. Artificial visual cues, not found in the real world but possible on a digital display, such as drop lines and drop

[6] Track Location Enhancements for Perspective View Displays, SPAWAR TR 1847, December 2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

shadows (discussed previously), enhance a human's ability to determine the location of an object in a 2.5D display.[6]

K.5.3.3 Direction indicators. In a 2.5D display, the viewing angle is variable, dependent on the viewing position selected by the operator. Typical viewing angles range from 25 to 65 degrees. Unlike map displays, where north is generally displayed oriented to the top of the display, the 2.5D display can be viewed from any direction. In a "fly-through" the viewing direction is changing frequently. There are several methods to provide a visual cue for direction of view, including placing north arrows in the display or showing the heading and attitude in a "heads-up display" type symbol (see figure K-9).

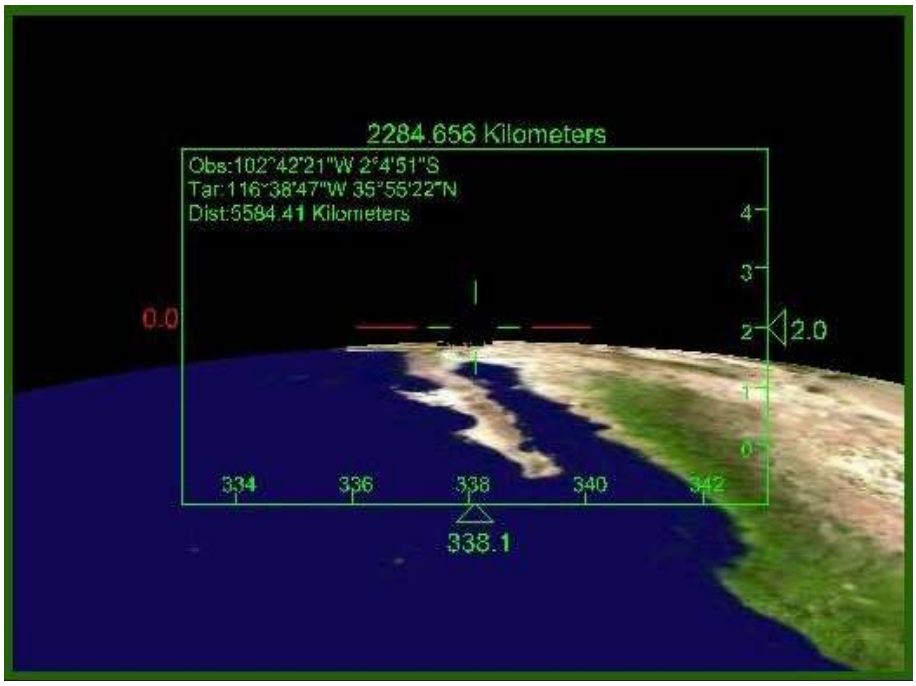


FIGURE K-9. Example of visual cue for direction of view. (TOC 3D display)

K.5.4 Text amplifiers for symbols. Many symbols in MIL-STD-2525 have text fields around them to present additional information. Text fields for point icons are defined in figure 2. Text fields are also found on the control measure symbols and control measures. Showing text around symbols in a 2.5D display creates a number of difficulties. Perhaps the greatest is the perspective in the display. One of the visual cues to create the impression of three dimensions is to show objects that are farther away in a smaller size; however, reducing symbol size, including text, also reduces legibility. Occultation is another visual cue, in which closer objects obscure more distant objects. Closer objects with text around them just create a larger "footprint" in the visual plane, potentially obscuring distant symbols or terrain features. Finally, the text will only be visible if there is enough contrast between the text and the background.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5.5 Speed vectors and trailing lines. A speed vector is a line extending in front of a symbol or icon, whose length is proportional to the speed of the object. The speed vector is an easy way to symbolize the speed and the heading of the platform. They are generally used on fast-moving platforms such as air tracks. A trailing line is a line showing the track of a platform, indicating where it has been for a period of time in the past. In a 2.5D perspective display, the record of a track of a platform is sometimes enhanced by using drop lines to indicate the position on the terrain surface. Drop lines are sometimes filtered by time to show only a limited trail and to reduce display clutter.

K.5.6 Incomplete data. One of the difficulties facing implementers of 2.5D displays is that sometimes the track data being symbolized may be incomplete. For example, the latitude and longitude of an air track may be known, but the altitude unknown. This is not a great problem in an overhead two-dimensional display, but in a 2.5D display, where should the air track be shown? If the direction of travel is unknown, which direction should be symbolized? The implementer might choose to ignore the missing data (show the air track on the ground) or infer it from other sources. In either case, a warning indicator should be included with the symbol to indicate to the operator that the track has been symbolized based on incomplete information.

K.5.7 Vertical exaggeration of terrain and tactical symbols. In 2.5D displays, the vertical dimension is often exaggerated to highlight variation in the terrain (see figure K-10). This particular example has a vertical exaggeration of x15. This vertical exaggeration may create distortions in the display, when tactical symbols are also used. For example, if the vertical exaggeration was x3, then the altitude of the air track would also have to be exaggerated by x3 to keep relative position with the terrain.

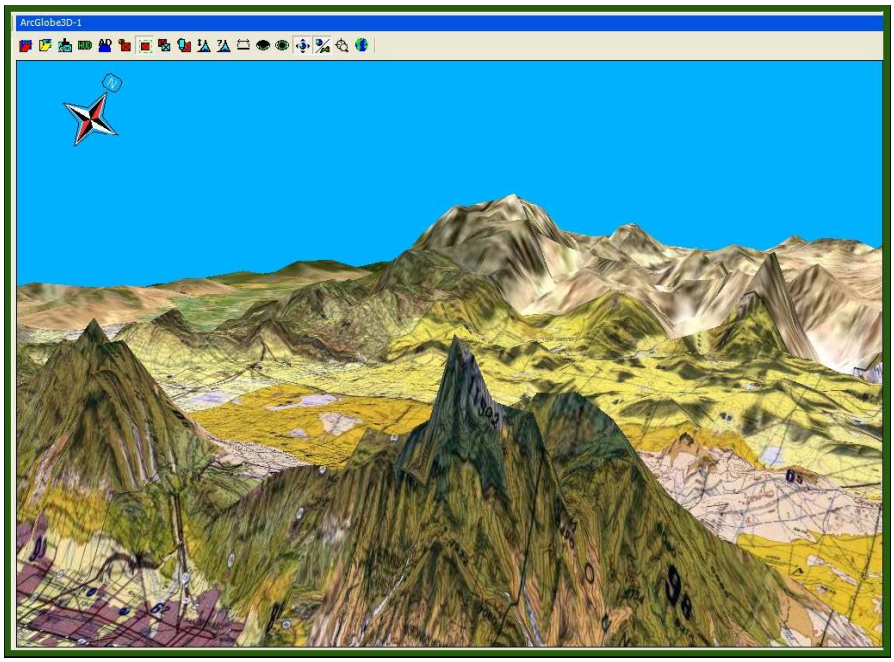


FIGURE K-10. Example of vertical exaggeration. (TOC 3D display)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5.8 Implications for training and doctrine. The use of 2.5D displays in the command and control community is growing. Research into human performance has shown, however, that a 2.5D display is not necessarily the best way to accomplish all tasks. In fact, some tasks are better performed using a conventional “overhead” 2D display or even a conventional map. The types of tasks performed on a C4ISR system should be conducted using a display mode (2D or 2.5D) that best fits the intended task. Operators should be trained to understand which tasks are accomplished best using each display type. User preference often has little bearing on the choice because an operator may like one type of display, even though his/her performance is degraded, compared to other display modes. Some tasks may be accomplished best using a combination of 2.5D to get an overall impression of the situation and 2D views to do the specific locational analysis needed to accomplish the task.

K.6 NOTES

K.6.1 Graphics displayed in this appendix are from the 3D Visualization and Tactical Symbology Considerations for Command, Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance (C4ISR) Applications, Concurrent Technologies Corporation (CTC) White Paper, April 2, 2004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CYBERSPACE SYMBOLS

L.1 SCOPE

L.1.1 Scope. This appendix addresses symbols that support cyberspace operations within the cyberspace domain. The tables in this appendix present the icons for organizations conducting operations within the cyberspace domain. This appendix is a mandatory part of the standard. The information contained herein is intended for compliance.

L.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

L.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

L.4 GENERAL REQUIREMENTS

L.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and cyberspace symbology.

L.5 DETAILED REQUIREMENTS

L.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

L.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

L.5.3 Composition of cyberspace symbols. A standard method for constructing symbols is presented. Refer to 5.3.9 for an explanation of symbol composition. Figure L-1 shows an example of a cyberspace symbol.

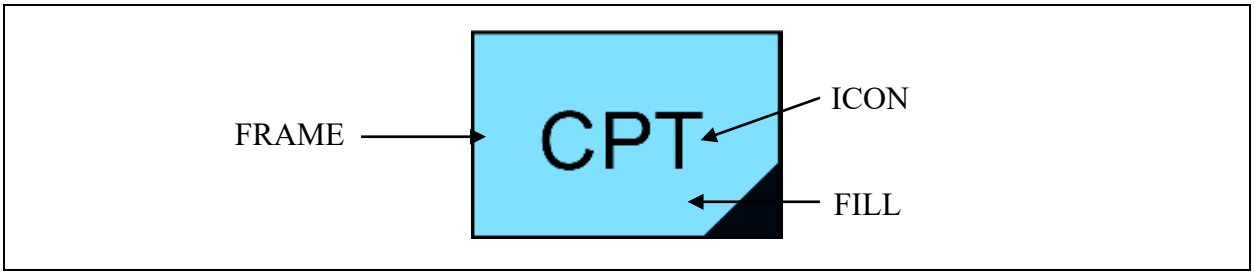



FIGURE L-1. Cyberspace symbol components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.3.1 Symbol building process. Table L-I depicts the symbol building process for cyberspace symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE L-I. Cyberspace symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the standard identity of the object from the appropriate dimension column in tables I, II, or III. In this example, the standard identity is friend and the dimension is cyberspace. The example depicts a “friendly air track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “cyber protection team,” a cyberspace entity type. The example depicts a “friendly cyber protection team.” Note: There are no modifiers in cyberspace symbols.	
3.	The finished symbol will appear as shown in the example.	

L.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table L-I). There are no modifiers in cyberspace symbols.

L.5.3.3 Amplifiers.

L.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure L-2 shows the placement of space symbol amplifiers around the friend symbol frame. Table L-II provides descriptions and formats of each amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

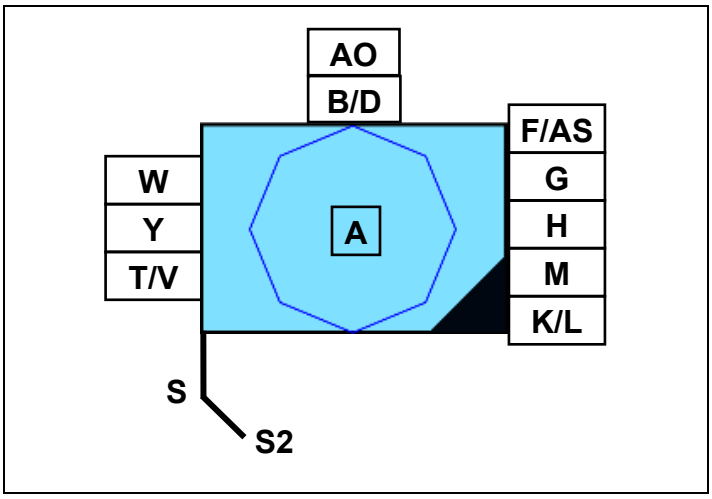


FIGURE L-2. Placement of cyberspace symbol amplifiers.

TABLE L-II. Descriptions and formats of cyberspace symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Cyberspace Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
B	Echelon	A graphic amplifier in a unit symbol that identifies command level (see figure 13).	
D	Task Force Indicator	A graphic amplifier that identifies a unit or an activity symbol as a task force (see 5.3.7.2 and figure 13 in the base document).	
F	Reinforced or Reduced	A text amplifier in a unit symbol that displays (+) for reinforced, (-) for reduced, (±) reinforced and reduced.	
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
K	Combat Effectiveness	A text amplifier for units and installations that indicates effectiveness. **The entries are:** fully operational (FO) substantially operational (SO) marginally operational (MO) not operational (NO) unknown (UNK)	
L	Signature Equipment	A text amplifier for hostile equipment; "**!**" indicates detectable electronic signatures.	
M	Higher Formation	A text amplifier for units that indicates number or title of higher echelon command (Corps is designated by Roman numerals).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-II. Descriptions and formats of cyberspace symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
S	Headquarters Staff Indicator	A graphic amplifier for units, installations and activities that identifies them as a headquarters (see figure 4 and figure 13).	
S2	Offset Location Indicator	A graphic amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.4, 5.3.12, and figure 13).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W[2]	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or "O/O" for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds.	
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote, 1) local/remote status; 2) engagement status; and 3) weapon type.	A:BBC-CC, where A = remote/local BBB = engagement status CC = weapon asset
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC). In stability activities, this field can be used for factions or groups.	

L.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.3.4 CYBERSPACE SYMBOLS

L.5.4 Cyberspace symbols. This section includes the lists of icons and modifiers for building cyberspace symbols.

L.5.5 Cyberspace icons. Table L-III depicts cyberspace icons.

TABLE L-III. Cyberspace icons.

DESCRIPTION	ICON	REMARKS
MISSION FORCE Type: Entity Symbol Set Code: 60 Code: **11**0000	N/A	Reserved for hierarchical purposes.
COMBAT MISSION TEAM Type: Entity Type Entity: MISSION FORCE Symbol Set Code: 60 Code: 11**01**00		N/A
NATIONAL MISSION TEAM Type: Entity Type Entity: MISSION FORCE Symbol Set Code: 60 Code: 11**02**00		N/A
CYBER PROTECTION TEAM Type: Entity Type Entity: MISSION FORCE Symbol Set Code: 60 Code: 11**03**00		N/A
NATION STATE CYBER THREAT ACTOR Type: Entity Type Entity: MISSION FORCE Symbol Set Code: 60 Code: 11**04**00		N/A
NON NATION STATE CYBER THREAT ACTOR Type: Entity Subtype Entity/Entity Type: MISSION FORCE Symbol Set Code: 60 Code: 11**05**00		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Abatis 522
Above Ground Shelter 534
Accident 236, 394
Acoustic Countermeasure (Decoy) 469
Acoustic Fix 471
Acronyms 3
Action Area 435
Action Point (General) 424
Active Maneuver Area 465
Activities Symbols 363
Administrative 197
Adult Day Care 301
AEW Station 458
Aftershock 388
Agriculture and Food Infrastructure 292
Agriculture Laboratory 292
Aids to Navigation 646
Aim Point 466
Air 167, 168, 387
Air and Missile Defense 187
Air Assault 228
Air Assault with Organic Lift 180
Air Control Point 456
Air Control Rendezvous 457
Air Corridor 450
Air Corridor with Multiple Segments 450
Air Cushioned 335
Air Defense 186
Air Defense Gun 242
Air Defense Gun - Heavy 243
Air Defense Gun - Light 242
Air Defense Gun - Medium 243
Air Defense Missile Launcher 246
Air Defense Missile Launcher - Heavy 248
Air Defense Missile Launcher – Heavy, TLAR 248
Air Defense Missile Launcher - Light 246

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Air Defense Missile Launcher – Light, TELAR 247
Air Defense Missile Launcher – Light, TLAR 247
Air Defense Missile Launcher - Medium 247
Air Defense Missile Launcher – Medium, TELAR 248
Air Defense Missile Launcher – Medium, TLAR 247
Air Detonation 467
Air Independent Propulsion 346
Air Symbols 149
Air Traffic Control 680
Air Traffic Facility 303
Air Traffic Services/Airfield Operations 180
Air Transportable Communication (ATAC) 474
Air/Land Naval Gunfire Liaison 187
Airborne 221
Airborne Command Post (ACP) 155, 161
Airborne Early Warning (AEW) 155, 162
Airborne Intercept 680
Airborne Reconnaissance and Mapping 680
Airborne Search and Bombing 680
Aircraft Production/Assembly 285
Airfield (AEGIS Only) 431
Airfield Zone 423
Airfield, Aerial Port Of Debarkation, Or Aerial Port Of Embarkation 220
Airhead Line 448
Airport of Debarkation/Airport of Embarkation 198
Airport/Air Base 303
Airship 158, 159
Airspace Control (Corridors) Areas 450
Airspace Control Lines 461
Airspace Control Points 456
Airspace Coordination Area (ACA) 494
Airspace Coordination Area (ACA) – Circular 494
Airspace Coordination Area (ACA) - Irregular 494
Airspace Coordination Area (ACA) - Rectangle 494
Air-to-Air Restricted Operations Zone (AARROZ) 453
All Classes of Supply 198
Allied Command Europe Rapid Reaction Corps (ARRC) 206
Allied Command Operations 206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Alternate Decontamination Point/Site 539
Alternate Supply Route (ASR) 555
Alternating Traffic 555
Altimeter 680
Ambient Noise Sonobuoy 474
Ambulance 277
Ambulance Control Point 542
Ambulance Exchange Point 541
Ambulance Load Point 542
Ambulance Points 541
Ambulance Relay Point 542
Ambush 449
Ammunition 198
Ammunition and Explosives Production 285
Ammunition Cache 285
Ammunition Ship 322
Ammunition Supply Point 543
Ammunition Transfer Point 543
Amnesty Point 425
Amphibious 32, 181, 183, 565
Amphibious 229
Amphibious Assault Ship, General 317
Amphibious Assault Ship, Helicopter 317
Amphibious Assault Ship, Multipurpose 317
Amphibious Assault, Non-specified 317
Amphibious Command Ship 317
Amphibious Transport Dock 318
Amphibious Utility Wheeled Vehicle 264
Amphibious Warfare Ship 218
Amphibious Warfare Ship 316
Amplifier 4
Amplifiers 21
Analysis 194, 195
Anchorage - Area 640
Anchorage - Line 640
Anchorage - Ports 639
Animal Feedlot 292
Antennae 273

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Antiair Warfare 330
Anti-Aircraft Fire Control 680
Anti-Ballistic 168
Anticyclone Center 577
Antipersonnel Land Mine (APL) 276
Antipersonnel Mine 528, 565
Antipersonnel Mine and Antipersonnel Mine with Directional Effects 566
Antipersonnel Mine and Antitank Mine 566
Antipersonnel Mine and Antitank Mine with Antihandling Device 566
Antipersonnel Mine and Mine Cluster 566
Antipersonnel Mine and Wide Area Antitank Mine 566
Antipersonnel Mine with Directional Effects 528, 566
Antipersonnel Mine with Directional Effects and Antitank Mine 567
Antipersonnel Mine with Directional Effects and Antitank Mine with Antihandling Device 567
Antipersonnel Mine with Directional Effects and Mine Cluster 567
Antipersonnel Mine with Directional Effects and Wide Area Antitank Mine 567
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Mine Cluster 570
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine 570
Antipersonnel Mine with Directional Effects, Antitank Mine, and Antitank Mine with Antihandling Device 569
Antipersonnel Mine with Directional Effects, Antitank Mine, and Mine Cluster 570
Antipersonnel Mine with Directional Effects, Antitank Mine, and Wide Area Antitank Mine 569
Antipersonnel Mine with Directional Effects, Wide Area Antitank Mine, and Mine Cluster 570
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine 568
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine with Antihandling Device 568
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Mine Cluster 568
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Wide Area Antitank Mine 568
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Mine Cluster 569
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine 569
Antipersonnel Mine, Antitank Mine, and Antitank Mine with Antihandling Device 568
Antipersonnel Mine, Antitank Mine, and Mine Cluster 569
Antipersonnel Mine, Antitank Mine, and Wide Area Antitank Mine 569
Antipersonnel Mine, Wide Area Antitank Mine, and Mine Cluster 569
Antisatellite Weapon 140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Antisubmarine Warfare 155, 163, 331, 343
Antisubmarine Warfare (ASW) Sea Surface Station 482
Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Subsurface Station 481
Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Surface Station 483
Antisubmarine Warfare, Rotary Wing 459
Antisurface Warfare 155, 164
Antitank Ditch – Completed 523
Antitank Ditch – Under Construction 523
Antitank Ditch Reinforced, with Antitank Mines 524
Antitank Gun 243
Antitank Gun - Heavy 243
Antitank Gun - Light 243
Antitank Gun - Medium 243
Antitank Mine 276, 528, 566
Antitank Mine and Antitank Mine with Antihandling Device 567
Antitank Mine and Mine Cluster 567
Antitank Mine and Wide Area Antitank Mine 567
Antitank Mine with Antihandling Device 566
Antitank Mine with Anti-handling Device 529
Antitank Mine with Antihandling Device and Mine Cluster 568
Antitank Mine with Antihandling Device and Wide Area Antitank Mine 567
Antitank Missile Launcher 248
Antitank Missile Launcher - Heavy 249
Antitank Missile Launcher - Light 249
Antitank Missile Launcher - Medium 249
Antitank Obstacles 523
Antitank Rocket Launcher 252
Antitank Rocket Launcher - Heavy 253
Antitank Rocket Launcher - Light 252
Antitank Rocket Launcher - Medium 252
Antitank Wall 524
Antitank/Antiarmor 180
Anti-torpedo Torpedo 345
Appendix A 49
Appendix B 135
Appendix C 149
Appendix D 171
Appendix E 311

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Appendix F 337
Appendix G 363
Appendix H 395
Appendix I 573
Appendix J 677
Appendix K 689
Appendix L 705
Arctic 221
Area 4, 209, 434
Area of Operations 422
Area of Uncertainty Amplifier 35
Area Target 501
Area Targets 501
Areas 399
Armament Production 285
Armor/Armored/Mechanized/Self-Propelled/Tracked 181
Armored 180, 216, 253, 280
Armored Assault 261
Armored Carrier with Volcano 260
Armored Engineer Recon Vehicle (AERV) 261
Armored Fighting Vehicle 253
Armored Fighting Vehicle Command and Control 254
Armored Personnel Carrier 254
Armored Personnel Carrier Ambulance 254
Armored Personnel Carrier, Recovery 255
Armored Protected Vehicle 254
Armored Protected Vehicle Medical Evacuation 254
Armored Protected Vehicle Recovery 254
Armored/Mechanized/Tracked 183, 188
Army 221
Army Aviation/Aviation Rotary Wing 181, 182
Army Field Support 205
Army Music 198
Arrest 367
Arrow 147
Arson 367
Artillery Target Intelligence Zone (ATI) 507
Artillery Target Intelligence Zone (ATI), Circular 507

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Artillery Target Intelligence Zone (ATI), Irregular 507
Artillery Target Intelligence Zone (ATI), Rectangular 507
Assassination 233, 392
Assault 219
Assault Breacher Vehicle (ABV) with Combat Dozer Blade 259
Assault Crossing 532
Assault Position 445
Assembly Area (AA) 434
Assumed Friend 4
Astronomical Satellite 140, 142
ASW (Helo and F/W) Station 458
ASW Helo - LAMPS 165
ASW Helo – SH-60R 165
ATM 293
Atomic Energy Reator 309
Attack 209, 228, 280, 344
Attack By Fire Position 447
Attack Helicopter 441
Attack Position 445
Attack/Strike 153, 160
Attempted 393
Attempted Criminal Activity 367
Attribute 4
Automatic Rifle 241
Automobile 265
Autonomous Control 335, 348
Autonomous Underwater Vehicle (AUV)/Unmanned Underwater Vehicle (UUV) 342
Auxiliary 343
Auxiliary Flag Ship 323
Auxiliary Ship 322
Avalanche 388
Aviation 218
Aviation Composite 182
Aviation Fixed Wing 182
Axis of Advance 441
Backhoe 261
Ballistic 146, 168
Ballistic Missile 332, 344

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Ballistic Missile Defense, Long-Range Surveillance and Track (LRS&T) 333
Ballistic Missile Defense, Shooter 333
Band 198
Bank 293
Banking Finance and Insurance Infrastructure 293
Barge 32, 565
Barge, Not Self-Propelled 325, 328
Barge, Self-Propelled 325
Barra 474
Barrage Jammer 683
Base Camp 423
Base Defense Zone. 452
Bathythermograph Transmitting Sonobuoy (BT) 475
Battle Damage Repair 221
Battle Position 437
Battle Position Prepared (P) but not Occupied 437
Battlefield Coordination Line 499
Battlefield Surveillance 681
Battleship 315
Beach 638
Beach Slope 660
Beach Slope, Flat 660
Beach Slope, Gentle 661
Beach Slope, Moderate 661
Beach Slope, Steep 661
Beacon 647, 680
Bearing Box AOU Amplifier 35
Bearing Line 490
Bearing Line, Acoustic 491
Bearing Line, Acoustic (Ambiguous) 492
Bearing Line, Electronic 491
Bearing Line, Electronic Warfare 491
Bearing Line, Electro-Optical Intercept 492
Bearing Line, Jammer 493
Bearing Line, Radio Direction Finder (RDF) 493
Bearing Line, Torpedo 492
Below Ground Shelter 534
Belts and Strips 626

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Bergy Bit 627
Bergy Water 628
Berths (Anchor) 639
Berths (Onshore) 639
Bicycle Equipped 222
Billboarding 689
Biological 209, 278, 307
Biological Contaminated Area 535
Biological Event 537
Biologicial Warfare Production 309
Bioluminescence 658
Biosatellite 140, 142
Bird 390
Black List Location 285
Black Marketing 369
Block 519, 556
Blowing Dust or Sand 611
Blowing Snow – Heavy 603
Blowing Snow - Light/Moderate 602
Blue Kill Box, Circular 516
Blue Kill Box, Irregular 515
Blue Kill Box, Rectangular 516
Bomb 160, 273, 371
Bomb Area 504
Bomb Explosion 374
Bomb Threat 371
Bomber 153, 160
Bombing 371
Booby Trap 273, 369, 529
Boom and Drogue 166
Boom-Only 166
Border 210
Border Patrol 207, 270, 289, 380
Bottom Features 653
Bottom Features - Clay 653
Bottom Features - Cobbles 655
Bottom Features - Coral 655
Bottom Features - Gravel 654

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Bottom Features - Mud 653
Bottom Features - Pebbles 654
Bottom Features - Rock 655
Bottom Features - Sand 653
Bottom Features - Shell 655
Bottom Features - Silt 654
Bottom Features - Stones 654
Bottom Return/ Non-Mine, Mine-Like Bottom Object (NOMBO) 489
Bottom Return/ Non-Mine, MineLike Bottom Object (NOMBO)/Installation/Manmade 489
Bottom Return/Non-MILCO, Wreck, Dangerous 490
Bottom Return/Non-MILCO, Wreck, Non Dangerous 490
Bottom Roughness - Moderate 666
Bottom Roughness - Rough 666
Bottom Roughness - Smooth 666
Boundary 4, 409
Bounded Areas of Weather 614
Breach 556
Breakers 652
Breakwater/Groin/Jetty - Above Water 646
Breakwater/Groin/Jetty - Below Water 646
Bridge 257, 279, 286
Bridge Mounted on Utility Vehicle 257
Bridge or Gap 521
Bridgehead Line (BL) 448
Bridging 210
Brief Contact 469
Brigade 221
Brigade Support Area (BSA) 553
Broadcast 204
Broadcast Transmitter Antennae 177, 178, 302
Broken Coverage 593
BT Buoy Drop 470
Bullion Storage 294
Buoy Default 647
Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) 207, 270, 289, 380
Burglary 370
Bus 262
Bus Station 303

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Bypass 556
C2 4
Cable Ferry Crossing 645
Call For Fire Zone (CFFZ) 508
Call For Fire Zone (CFFZ), Circular 508
Call For Fire Zone (CFFZ), Irregular 508
Call For Fire Zone (CFFZ), Rectangular 508
Call in Point 640
Calm Winds 591
Canal 674
Canalize 557
Cannibalization Point 543
CAP Station 457
Capsule 139, 142
Cargo 154, 161, 280
Cargo, General 326
Carrier 315
Casualty Collection Point 543
Casualty Staging 222
Cave Entrance 389
CBRN 286
CBRN Equipment 273
CBRN Events 399
CBRN Observation Outpost 439
Cellular/Mobile 681
Censor Zone 508
Censor Zone, Circular 509
Censor Zone, Irregular 508
Censor Zone, Rectangular 509
Center of Main Effort 425
Certain Submarine 345
Checkpoint 425
Chemical 210, 278, 307
Chemical Agent 384
Chemical Biological Radiological Nuclear Defense 189
Chemical Contaminated Area 536
Chemical Event 537
Chemical Plant 295

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Chemical Warfare Production 309
Chemical, Biological, Radiological, Nuclear, and High-Yield Explosives 190
Child Day Care 301
Circular Target 502
Civil Affairs 177
Civil Disturbance 374
Civil Rioting 369
Civilian 141, 158, 231, 234, 279, 308, 325, 342
Civilian Collection Point 544
Civilian Telephone 308
Civilian Television 309
Civilian Vehicle 265
Civil-Military Cooperation 178
Clear 557
Clear Icing 588
Clear Icing, Light 588
Clear Icing, Moderate 589
Clear Icing, Severe 589
Clear Sky 592
Clearing 222
Click Jammer 683
Close Protection 210
Close Range 166, 222
Close Range (CRBM) 148
Cloud Coverage 592
Cloud Coverage Symbols 592
Clutter (Bottom) - High 667
Clutter (Bottom) - Low 667
Clutter (Bottom) - Medium 667
Clutter, Stationary or Cease Reporting 486
Coal 308
Coast Guard 208, 272, 291, 382
Coastal Hydrography 637
Coastal Surveillance 681
Coastline 637
Cold Front 578
Cold Frontogenesis 578
Cold Frontolysis 578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

College 297
Color 45
Combat 182, 210, 236
Combat Mission Team 709
Combat Outpost 440
Combat Search and Rescue 228
Combat Search and Rescue (CSAR) 155, 164
Combat Service Support 198
Combat Service Support Vehicle 255
Combat Support (Maneuver Enhancement) 190
Combat Support Ship, Fast 324
Combined Arms 182
Command Active Multi-Beam Sonobuoy (CAMBS) 475
Command Active Sonobuoy Directional Command Active Sonobuoy System (CASS) 475
Command and Control 177, 210, 344
Command and Control Areas 422
Command and Control Lines 409
Command and Control Points 424
Command Launch Equipment (CLE) 274
Command Post Node 219
Commercial Food Distribution Center 292
Commercial Infrastructure 295
Communications 155, 163, 679
Communications Check Point 456
Communications Contingency Package 210
Communications Satellite 140, 142
Compact 265
Compact or Wet Snow (With or Without Ice) Covering at Least One-Half Ground, but Ground Not Completely Covered 623
Compact or Wet Snow (With or Without Ice) Covering Less Than One-Half of Ground 622
Composite 230
Composite Loss 233
Computer System 274
Construction 210
Construction Vehicle 261
Contact Point 425
Contain 438
Container Ship 326

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Contaminated Hazardous Waste Site 296
Continuous Light 594
Contour - Upper Air 617
Contracting Services 205
Control 222
Control Measures Symbols 395
Control Valve 305
Controlled Approach 681
Controlled Intercept 681
Convergence 629
Convergence Line 584
Convoy 322
Coordinated Fire Line (CFL) 498
Coordinating Point 426
Cordon and Knock 563
Cordon and Search 563
Corps 221
Corridor Tab Point 478
Corrosive Material 384
Corvette 316
Counterattack 557
Counterattack by Fire 557
Counterintelligence 195
Cover 561
Cracks 633
Cracks at a Specific Location 633
Crane/Loading Device 272
Criminal Activity Incident 367
Criminal Investigation Division 191, 219
Critical Friendly Zone (CFZ) 509
Critical Friendly Zone (CFZ), Circular 510
Critical Friendly Zone (CFZ), Irregular 509
Critical Friendly Zone (CFZ), Rectangular 509
Cross Cultural Communication 211
Cross-Country Truck 263
Crowd and Riot Control 211
Cruise 168
Cruiser 315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Cubing 689
Cued Acquisition Doctrine 465
Current Flow - Ebb 657
Current Flow - Flood 657
Curve (line) 689
Customs Service 207, 270, 289, 381
Cyber Protection Team 709
Cyberspace 144, 145, 165, 167, 218, 229, 236, 237, 280, 281, 309, 310, 333, 335, 346, 348, 394, 688
Cyberspace Symbols 705
Cyclone Center 576
Dam 305
Dangers/Hazards 649
Data Link Reference Point 478
Data Transmission 681
Datum Lost Contact 469
Dead Body 370
Dead Reckoning Trailer Amplifier 35
Dead Space Area 510
Dead Space Area, Circular 510
Dead Space Area, Irregular 510
Dead Space Area, Rectangular 510
Debris 148
Deceptive Jammer 683
Decision Point 426
Decontamination 211, 222, 308
Decoy 160, 320, 343
Decoy Mined Area, Fenced 527
Decoy/Mimic 681
Defended Area 4, 463
Defended Area, Ellipse/Circle 463
Defended Area, Rectangle 463
Defended Asset 467
Definitions 3
Delay 558
Demolition 222
Demonstration 374
Dental 222

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Department of Justice (DOJ) 207, 271, 289, 381
Depth 636
Depth Area 637
Depth Contour 636
Depth Curve 636
Destroy 558
Destroyer 316
Detainee Collection Point 544
Detainee Holding Area 552
Detention 211
Diesel – Type 1 346
Diesel – Type 2 347
Diesel – Type 3 347
Diesel Electric, General 346
Digital 220, 223
Dip Position 473
Direct Communications 211
Direct Fire Gun 244
Direct Fire Gun - Heavy 244
Direct Fire Gun - Light 244
Direct Fire Gun - Medium 244
Direction Finding 195
Directional Command Active Sonobuoy System (DICASS) 476
Directional Frequency Analyzing and Recording (DIFAR) 475
Discharge Outfall 305
Discolored Water 652
Displaced Person(s), Refugee(s) and Evacuee(s) 234
Displaced Persons/ Refugee/Evacuees Camp 288
Disrupt 558
Disrupt 519
Distress Call 426
Distressed Vessel 487
Ditched Aircraft/Downed Aircraft 487
Dive Report Location 361
Diver 342
Divergence 629
Diversion Route 485
Diving 191, 211

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Division 211
Division Support Area 553
Dock 334
Dog 191, 211
Dolphin 645
Double Apron Fence 525
Double Fence 525
Double Strand Concertina 526
Downed Aircrew Pick-Up Pont 457
Downlinked 167
Dozer, Armored 261
Dozer, Tank Chassis 260
Dredge 326
Dredger 329
Drifter 328
Drill 258
Drill Mounted on Utility Vehicle 258
Drilling 191, 212
Drive-By Shooting 368
Drizzle 597
Drogue-Only 166
Drone Equipped 332
Drop Point 467
Drop Zone (DZ) 435
Drought 390
Drug Enforcement Administration (DEA) 271
Drug Enforcement Administration (DEA) 381
Drug Enforcement ADMINISTRATION (DEA) 207
Drug Enforcement Agency (DEA) 289
Drug Related 368
Drug Vehicle 270
Drydock 642
Dust Devil 611
Dust or Sand 610, 616
Dynamic Amplifier 4
Dynamic Depiction 527
Dynamic Graphic Amplifiers 33
Dynamic Processes 629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Dynamic Towed Sensor Array Amplifier	36
Early Warning	681
Early Warning Radar	278
Earth Observation Satellite	140, 142
Earth Surveillance	681
Earthmover	258
Earthquake Epicenter	388
Echo Tracker Classifier (ETC)/Possible Contact (POSCON)	349
Economic Infrastructure Asset	294
Eddies/Overfalls/Tide Rips	652
Educational Facilities Infrastructure	296
Elder Care	302
Electric Power	297
Electromagnetic - Magnetic Anomaly Detection (MAD)	472
Electromagnetic Fix	471
Electronic Attack (EA)	157, 164
Electronic Combat (EC)/Jammer	154, 162
Electronic Countermeasures (ECM) Decoy	469
Electronic Ranging	195
Electronic Support (ES)	156, 163
Electronic Warfare	195, 331
Electro-Optical	212
Ellipse AOU Amplifier	35
Emergency Collection Evacuation Point	377
Emergency Food Distribution	377
Emergency Incident Command Center	377
Emergency Medical Operation	233, 275, 291, 378
Emergency Operation	207, 277, 291, 376
Emergency Operations Center	377
Emergency Public Information Center	377
Emergency Shelter	377
Emergency Staging Area	378
Emergency Water Distribution Center	378
EMT Station Location	378
Encirclement	446
Enclosed Facility (Public Venue)	300
Enemy Point	478
Enemy Prisoner of War (EPW) Collection Point	544

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Enemy Prisoner of War Holding Area 552
Energy Facilities Infrastructure 297
Engagement Area (EA) 438
Engineer 191
Engineer Equipment Prodiction 286
Engineer Regulating Point 533
Engineer Vehicle and Equipment 257
Engineer Work Line 410
Enhanced 212
Enhanced Position Location Reporting System (EPLRS) 223
Entry Control Point 426
Entry Point 467
Environmental Protection 231
Environmental Report Location 361
Equipment 223
Equipment Decontamination Point/Site 539
Equipment Manufacture 286
Equipment/Troop Decontamination Point/Site 539
Escort 157, 162, 331
Estimated Ice Edge or Boundary 632
Estimated Position (EP) 479
Even Layer of Compact or Wet Snow Covering Ground Completely 623
Even Layer of Loose Dry Snow Covering Ground Completely 624
Evolved Sea Sparrow Missile (ESSM) 170
Execution (Wrongful Killing) 233, 392
Exercise Mine, Bottom 351
Exercise Mine, Floating 352
Exercise Mine, General 351
Exercise Mine, Moored 351
Exercise Mine, Rising 352
Exfiltration 376
Expendable 335, 348
Expendable Reliable Acoustic Path Sonobuoy (ERAPS) 476
Experimental 687
Expired Sonobuoy 476
Explosion 373
Explosive Material 385
Explosive Ordnance Disposal (EOD) 192, 212

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Explosives, State of Readiness 1 (Safe) 521
Explosives, State of Readiness 2 (armed but passable) 522
Extortion 368
Extraction Zone (EZ) 435
Extremely Dry with Cracks 622
Facilities 642
Fall 586
Fall Then Rise Lower 586
Fall Then Steady 586
False 393
Farm/Ranch 292
Farthest-On Circle DR Trailer Amplifier 35
Fast 335
Federal Bureau of Investigation (FBI) 208, 271, 290, 381
Federal Reserve Bank 294
Ferry 326, 533
Ferry Crossing 645
Ferry Terminal 303
Ferry Transporter 261
Few Coverage 593
Field 5
Field Artillery 187
Field Artillery Observer 188
Field Camp Construction 192
Fighter 153, 161
Fighter Engagement Zone (FEZ) 454
Fighter/Bomber 153, 164
Fighting Position 535
Final Coordination Line 443
Final Protective Fire (FPF) 501
Finance 198
Financial Exchange 294
Find 393
Fire Areas 493
Fire Control 682
Fire Direction Center 212
Fire Event 382
Fire Fighting Operation 379

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Fire Fighting/Fire Protection 192, 277
Fire Hydrant 380
Fire Lines 498
Fire Origin 383
Fire Station 291, 380
Fire Support Area 504
Fire Support Area - Circular 505
Fire Support Area - Irregular 504
Fire Support Area - Rectangular 504
Fire Support Coordination Line (FSCL) 498
Fire Support Station 504
Firearms Manufacture 295
Firearms Retailer 295
Fires 186
Fires Points 505
Firing Point 505
Fish Stakes - Point 641
Fish Traps - Area 642
Fish Weirs - Point 641
Fishing Harbor - Point 641
Fishing Vessel 328
Fix 519, 558
Fixed and Prefabricated 530
Fixed Bridge 257
Fixed-Wing 153, 159
Fixed-Wing MISO 185
Flame Thrower 242
Flammable Gas 385
Flammable Liquid 385
Flammable Solid 385
Floating Bridge 257
Floating Craft 203
Floeberg 628
Flood 390
Fly-To-Point 427
Fly-To-Point (Normal) 427
Fly-To-Point (Sonobuoy) 427
Fly-To-Point (Weapon) 427

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Fog 608, 616
Folding Girder Bridge 257
Follow and Assume 558
Follow and Support 559
Food Distribution 292
Food Production Center 293
Food Retail 293
Foraging/Searching 375
Force 212
Ford 674
Ford Difficult 532
Ford Easy 532
Foreign Fighter(s) 234
Foreshore - Area 638
Foreshore - Line 638
Formation 472
Fort 534
Fortified Area. 436
Fortified Line 535
Forward 212
Forward Arming and Refueling Point (FARP) 552
Forward Boundary 408
Forward Edge of the Battle Area 433
Forward Line of Troops 432
Forward Observer 439
Forward Troop Decontamination Point/Site 540
Foul Ground - Area 650
Foul Ground - Point 650
Found and Cleared 393
Frame 5
Free Fire Area (FFA) 495
Free Fire Area (FFA) – Circular 495
Free Fire Area (FFA) - Irregular 495
Free Fire Area (FFA) – Rectangle 495
Freezing Drizzle 599
Freezing Drizzle, Light 599
Freezing Drizzle, Moderate/Heavy 599
Freezing Level 613

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Freezing Rain 596
Freezing Rain, Light 596
Freezing Rain, Moderate/Heavy 596
Freezing, Sky Obscured 609
Freezing, Sky Visible 609
Freezing/Frozen Precipitation 615
Frequency Swept Jammer 683
Friend 5
Friendly Airborne/Aviation 441
Friendly Aviation 443
Friendly Direction of Main Attack 443
Friendly Direction of Supporting Attack 443
Frigate 316
Frontal Systems 577
Frontogenesis 5
Frontolysis 5
Frozen Lead 634
Funnel Cloud (Tornado/Waterspout) 607
Fused Track 336, 349
Gang Member or Gang 234
General Decontamination Point/Site 538
General Mine Anchor 360
General Route 485
General Sea Subsurface Station 480
General Sea Surface Station 481
Generation Station 297
Generator Set 274
Geologic 388
Geophysics/Acoustics 661
Geospatial 194, 217, 689
Geospatial Support/Geospatial Information Support 192
Geostationary Orbit (GO) 144
Geosynchronous Orbit (GSO) 144
Geothermal 308
Glaze (Thin Ice) on Ground 620
Glyph 689
Government 156, 162
Government Leadership 286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Government Organization 232, 234
Govrnment Site Infrastructure 298
Graffiti 368
Grain Storage 293
Graphic 5
Gray List Location 286
Grenade Explosion 373
Grenade Launcher 241
Grenade Launcher - Heavy 242
Grenade Launcher - Light 242
Grenade Launcher - Medium 242
Ground 185
Ground Mapping 682
Ground Station Module 212
Ground Water Well 306
Ground Zero 467
Ground-Based Interceptor (GBI) 147
Ground-based Midcourse Defense (GMD) Fire Control (GFC) Center 274
Growler 627
Guard 561
Guerilla 228
Guerrilla Base 424
Guided Missile 332, 344
Hail 604
Halted Convoy 554
Harbor 472
Harbor Entrance Point 473
Harbor Surveillance 682
Hazardous Material Production 295
Hazardous Material Storage 295
Hazardous Materials 384
Hazardous Materials Incident 384
Hazardous When Wet 384
Haze 610
Headquarters 221
Headquarters Staff Element 221
Health Department Facility 378
Heavy 165, 223, 334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Heavy Capability Equipment 259
Heavy Lift 326
Height Finding 682
Helicopter Equipped/VSTOL 333
Helicopter Landing Site 303
Hide Point 505
High Altitude 223
High Earth Orbit (HEO) 144
High Pressure Center 577
High to Low Altitude 228
High to Medium Altitude 225
High Wire Fence 525
High-Density Airspace Control Zone 453
Hijacker 165, 236, 333, 346, 394
Hijacking/Hijacked 333, 346, 392
Hijacking/Hijacking 165, 233, 279
HIMEZ 455
Hoax (Decoy) 393
Holding Line (HL) 448
Hollow Deck Bridge 258
Home Eviction 369
Hospital Ship 323, 328
Hostile 5
Hot Spot 383
House-to-House 392
Hovercraft 327
Howitzer 245
Howitzers - Heavy 245
Howitzers - Light 245
Howitzers - Medium 245
Hurricane/Typhoon 612
Hydroelectric 308
Hydrofoil 335
Hydrography 635
Hydro-Meteorological 389
Ice Concentration 628
Ice Crystals (Diamond Dust) 604
Ice Drift (Direction) 630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Ice Edge or Boundary From Radar 633
Ice Free 629
Ice Island 628
Ice Pellets (Sleet) 604
Ice Pellets (Sleet), Heavy 605
Ice Pellets (Sleet), Light 605
Ice Pellets (Sleet), Moderate 605
Ice Systems 626
Ice Thickness (Estimated) 631
Ice Thickness (Observed) 630
Iceberg 488
Icebergs 626
Icebergs, General 626
Icing 588, 615
Icon 5, 689
Icon-based symbol 5
Identification, Friend or Foe (Interrogator) 682
Identification, Friend or Foe (Transponder) 682
Identification, Friend-or-Foe (IFF) Off Line 461
Identification, Friend-or-Foe (IFF) On Line 462
IED Cache 372
IED Event 371
IED Explosion 371
IED Suicide Bomber 372
Illegal Drug Lab 373
Illegal Drug Operation 372
Image 690
Impact Burial - >75% 668
Impact Burial - 0% 667
Impact Burial – 0-10% 668
Impact Burial – 10-20% 668
Impact Burial – 20-75% 668
Impact Point 468
Improvised Explosive Device (IED) 276, 343
Incendiary Explosion 373
Incident 367, 394
Independent Command 220
Individual 232, 391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Industrial Site 296
Infantry 182
Infantry Fighting Machine 183
Infestation 390
Infiltration 376
Infiltration Lane 444
In-Flight Interceptor Communications System (IFICS) Data Terminal (IDT) 274
Information Operations 178
Infrared 145
Infrastructure 291
Insect 390
Instability Line 583
Installation 5, 285
Instrument Flight Rule (IFR) 614
Instrument Landing System 682
Instrumentation 686
Intelligence 194
Intelligence Collector 323
Intelligence Coordination Line (ICL) 564
Intelligence Lines 564
Intelligence, Surveillance, Reconnaissance 331, 344
Intensive Care 164, 223
Intercept 196
Intercept (Search and Recording) 196
Interceptor 146, 161, 168
Intercontinental 147, 170
Interdict 559
Intermediate Range 147, 170
Intermittent Heavy 595, 598, 602
Intermittent Heavy/Continuous Heavy 595, 599, 602
Intermittent Light 594, 597, 601
Intermittent Light/Continuous Light 598, 601
Intermittent Moderate 595, 598, 601
Intermittent Moderate/Continuous Moderate 595, 598, 602
Intermodal 223
Internal Security Force 209, 382
International Security Assistance Force (ISAF) 206
Interoperability 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Interpreter 205
Interrogation 196
Inter-Tropical Convergence Zone 584
Inter-Tropical Discontinuity 584
Intrusion 278
Invalid Symbols 21
Inversion 605
Ionospheric Sounding 682
Island 637
Isobar – Surface 617
Isodrosotherm 618
Isolate 559
Isopleths 617
Isotach 617
Isotherm 617
Jail Break 369
Jammed Brash Barrier 635
Jammer 679
Jammer (general) 683
Jamming 196
Jeep Type Vehicle 267
Jeep Type Vehicle – Large/Heavy 268
Jeep Type Vehicle - Medium 268
Jeep Type Vehicle – Small/Light 268
Jet Ski 320, 330
Jet Stream 592
Joint Engagement Zone (JEZ) 454
Joint Fire Support 188
Joint Information Bureau (JIB) 202
Joint Intelligence Center 197
Joint Military Symbology 5
Joint Network Node 219
Joint Tactical Action Area (JTAA) 435
Joker 5
Judge Advocate General 199
Junk/Dhow 328
Kelp/Seaweed - Area 651
Kelp/Seaweed - Point 650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Key Terrain 431
Kidnapping 234, 392
Kill Box 515
Killing 368
Killing Victim 232
Killing Victims 232
Kingfisher 351
Kingpin Sonobuoy 476
Known Insurgent Vehicle 270
Known Point 506
Labor 199
Laboratory 224
Land Mine 276
Land Mines 276
Land Symbols 171
Landfill 296
Landing Craft 229, 318
Landing Place 642
Landing Ring 644
Landing Ship 230, 318
Landing Support 213
Landing Zone (LZ) 436
Landslide 389
Lane 526
Large Box Truck 267
Large Bus 267
Laser 274
Lash Carrier (with Barges) 327
Lateral Boundary 408
Launch 229, 325
Launch Area 462
Launch Area, Ellipse/Circle 463
Launch Point 505
Launched 169
Launched Torpedo 468
Launcher 224
Laundry/Bath 199
Law Enforcement 207, 288

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Law Enforcement Operation 380
Law Enforcement Vessel 329
Law Enforment 270
Lead 634
Leader or Leadership 235, 236
Leading Line 648
Leisure Craft, Motorized 329
Leisure Craft, Sailing 329
Less than Lethal 276
Liaison 178
Light 166, 223, 281, 334, 648
Light And Medium 231
Light Armored Reconnaissance 255
Light Line 409
Light not Associated with Thunder 604
Light Vessle/Light Ship 648
Light Wheeled Armored Vehicle 255
Lighter Than Air 158, 159
Lighthouse 649
Lightning 607
Limit of Advance 444
Limited Access Area 436
Limited Cross-Country Truck 263
Limits 631, 672
Limits of Radar Observation 632
Limits of Undercast 632
Limits of Visual Observation 631
Line DR Trailer Amplifier 35
Line of Bearing AOU Amplifier 35
Line of Contact 432
Line of Departure 444
Line of Departure / Line of Contact 444
Linear Smoke Target 501
Linear Target 501
Linear Targets 501
Lines 399, 582
Linkup Point 428
Liquid Precipitation – Convective 615

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Liquid Precipitation - Non-Convective Continuous or Intermittent 615
Littoral Combatant Ship 316
Load Handling System 218
Lock 674
Locomotive 264
LOFAR 476
Logistics 334
Logistics Release Point (LRP) 544
Lollipopping 6
LOMEZ 455
Long Range 147, 166, 170, 224
Loose Dry Dust or Sand not Covering Ground Completely 621
Loose Dry Snow Covering at Least One-Half Ground, but Ground Not Completely Covered 624
Loose Dry Snow Covering Less Than One-Half of Ground 624
Loot 236, 369
Lost Contact 470
Low Altitude 224
Low Earth Orbit (LEO) 144
Low Frequency Analysis and Recording Sonobuoy 476
Low Pressure Center 576
Low Wire Fence 525
Low-Level Transit Route 450
Machine Gun 241
Machine Gun - Heavy 241
Machine Gun - Light 241
Machine Gun - Medium 241
Main Attack 442
Main Equipment Decontamination Point/Site 540
Main Gun System 183, 187
Main Supply Route (MSR) 554
Maintenance 280
Maintenance 199, 213
Maintenance Collection Point (MCP) 545
Maintenance Facility 304
Maneuver Areas 433
Maneuver Lines 432
Maneuver Points 438
Man-Made Structures 673

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Manual Track 143, 160, 278, 336, 349
Many Bergy Bits 627
Many Growlers 628
Many Icebergs 626
Many Icebergs – General 627
Marginal Visual Flight Rule (MVFR) 614
Marine 184, 387
Marine Life 489
Maritime Area 672
Maritime Control Area 462
Maritime Control Lines 490
Maritime Control Points 466
Maritime Limit Boundary 672
Marker 647
Marker Post (Lollipop) 690
Marshall Point 479
Mass Grave Site 287
Material 199
Materiel 287
Mechanized 189, 191, 193
MedEvac 280
MEDEVAC 218
Medical 199, 262, 299, 331
Medical Evacuation (MEDEVAC) 153, 162, 262
Medical Evacuation Helicopter 276
Medical Evuation (MEDEVAC) Pick-up Point 545
Medical Facilities Outpatient 379
Medical Infrastructure 298
Medical Supply Point 552
Medical Treatment Facility 199
Medical Treatment Facility (Hospital) 299
Medium 166, 224, 281, 334
Medium Altitude 224
Medium Capability Equipment 79, 259
Medium Earth Orbit (MEO) 144
Medium Range 147, 166, 170, 224
Medium to Low Altitude 228
Meeting 376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Melt Puddles or Flooded Ice 631
Merchant Ship 325
Meteorological 188, 213, 684
Meteorological and Oceanographic Symbols 573
Microbial 391
Midsize 265
MILCO - Bottom 355
MILCO - Bottom, Confidence Level 1 355
MILCO - Bottom, Confidence Level 2 355
MILCO - Bottom, Confidence Level 3 356
MILCO - Bottom, Confidence Level 4 356
MILCO - Bottom, Confidence Level 5 356
MILCO - Floating 357
MILCO - Floating, Confidence Level 1 358
MILCO - Floating, Confidence Level 2 358
MILCO - Floating, Confidence Level 3 358
MILCO - Floating, Confidence Level 4 358
MILCO - Floating, Confidence Level 5 358
MILCO - General, Confidence Level 1 354
MILCO - General, Confidence Level 2 354
MILCO - General, Confidence Level 3 354
MILCO - General, Confidence Level 4 355
MILCO - General, Confidence Level 5 355
MILCO - Moored 356
MILCO - Moored, Confidence Level 1 356
MILCO - Moored, Confidence Level 2 357
MILCO - Moored, Confidence Level 3 357
MILCO - Moored, Confidence Level 4 357
MILCO - Moored, Confidence Level 5 357
MILCO-General 354
Military 139, 153, 315, 322, 341
Military Armory 299
Military Base 299
Military Combatant 315
Military History 197
Military Information Support Operations (MISO) 178, 275
Military Informations Support Operation (MISO) 374
Military Infrastructure 299

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Military Intelligence 197
Military Police 192
Mine 193, 287, 663, 667
Mine Clearing 193
Mine Clearing Equipment 258
Mine Clearing Equipment on Tank Chassis 259
Mine Clearing Equipment Trailer - Mounted 259
Mine Cluster 531, 566
Mine Countermeasure 213
Mine Countermeasures 319, 331, 344
Mine Countermeasures (MCM) 156, 163
Mine Countermeasures, Support Ship 319
Mine Explosion 373
Mine Hunter 319
Mine Launching 193
Mine Layer 318
Mine Laying 193, 375
Mine Laying Equipment 260
Mine Laying Equipment on Utility Vehicle 260
Mine Sweeper 318
Mine Sweeper, Drone 319
Mine Warfare 331, 344
Mine Warfare (MIW) Bottom Descriptors 661
Mine Warfare Sea Surface Station 482
Mine Warfare Ship 318
Mine Warfare Unmanned Underwater Vehicle Sea Subsurface Station 481
Mine Warfare Unmanned Underwater Vehicle Sea Surface Station 484
Mined Area 527
Minefield 526
Mineine 523
Mine-Like Contact (MILCO) 354
Mine-Like Echo (MILEC), General 359
Mine-Like Echo, Bottom 359
Mine-Like Echo, Floating 359
Mine-Like Echo, Moored 359
Miniaturized Satellite 140, 143
Minimum Safe Distance Zone 536
Minimum-Risk Route 451

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Missile 146, 167, 169, 187, 188, 213
Missile Acquisition 684
Missile and Space System Production 287
Missile Control 684
Missile Defense 194, 331
Missile Detection Point 468
Missile Downlink 684
Missile Engagement Zone (MEZ) 455
Missile Guidance 684
Missile Homing 685
Missile Launcher 246
Missile Launcher - Heavy 246
Missile Launcher - Light 246
Missile Launcher - Medium 246
Missile Support 272
Missile Tracking 685
Mission Force 709
Mission Tasks 556
Mist 609
MIW – Fixed Wing 459
MIW – Rotary Wing 459
MIW Bottom Category - A 669
MIW Bottom Category – A1 669
MIW Bottom Category – A2 670
MIW Bottom Category – A3 670
MIW Bottom Category - B 669
MIW Bottom Category – B1 670
MIW Bottom Category – B2 670
MIW Bottom Category – B3 671
MIW Bottom Category - C 669
MIW Bottom Category – C1 671
MIW Bottom Category – C2 671
MIW Bottom Category – C3 671
MIW Bottom Sediments - Solid Rock 662
MIW-Bottom Sediments - Boulders 664
MIW-Bottom Sediments - Clay 662
MIW-Bottom Sediments – Coarse Sand 662
MIW-Bottom Sediments – Coarse Silt 664

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

MIW-Bottom Sediments – Cobbles, Oyster Shells 665
MIW-Bottom Sediments – Fine Sand 663
MIW-Bottom Sediments – Fine Silt 664
MIW-Bottom Sediments - Land 665
MIW-Bottom Sediments – Medium Sand 663
MIW-Bottom Sediments – Medium Silt 664
MIW-Bottom Sediments – No Data 666
MIW-Bottom Sediments – Pebbles, Shells 665
MIW-Bottom Sediments – Sand and Shells 665
MIW-Bottom Sediments – Very Coarse Sand 662
MIW-Bottom Sediments – Very Fine Sand 663
MIW-Bottom Sediments – Very Fine Silt 663
Mixed Icing 590
Mixed Icing, Light 590
Mixed Icing, Moderate 590
Mixed Icing, Severe 590
Mobile Advisor and Support 213
Mobile Emergency Physician 262
Mobile Subscriber Equipment 213
Mobility Assault 218
Mobility Support 213
Model 690
Moderate/Heavy not Associated with Thunder 604
Moderate/Thick Loose Dry Dust or Sand Covering Ground Completely 621
Modifier 6
Modifiers 21
Molniya Orbit (MO) 144
Morale, Welfare and Recreation 200
Morgue 379
Mortar 20, 188, 250
Mortar - Heavy 250
Mortar - Light 250
Mortar - Medium 250
Mortar Fire Explosion 373
Mortuary Affairs/Graves Registration 200
Motorize 180
Motorized 183, 184, 189, 191, 193
Mountain 224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Mountain Waves 588
Movable 530
Movable and Prefabricated 530
Movement and Maneuver 180
Moving Convoy 554
Moving Haven 470
Multi-Channel 225
Multi-Function 684
Multifunctional Earthmover/Digger 258
Multi-Mission 165
Multinational 214
Multinational (MN) 206
Multinational Specialized Unit 214
Multiple Classes of Supply 200
Multiple Passenger Vehicle 266
Multiple Rocket Launcher 214, 251
Multiple Rocket Launcher - Heavy 252
Multiple Rocket Launcher - Light 251
Multiple Rocket Launcher - Medium 252
Multiple Strike - (STRIKWARN) 536
Multi-purpose Blade 279
Munition Flight Path 499
Murder 392
Murder Victims 233
Named Area of Interest 423
Named Headquarters 206
Nation State Cyber Threat Actor 709
National Mission Team 709
NATO Class I 547
NATO Class II 547
NATO Class III 548
NATO Class IV 548
NATO Class V 548
NATO Medical Role 1 214
NATO Medical Role 2 214
NATO Medical Role 3 214
NATO Medical Role 4 214
NATO Multiple Supply Class Point. 549

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

NATO Supply Class - All 205
NATO Supply Class I 200
NATO Supply Class II 200
NATO Supply Class IV 201
Natural Event 388
Natural Gas 308
Natural Gas Facility 298
Naval 206, 214
Naval Cargo Ship 323
Naval Stores Ship 322
Navigational 488
Navigational Reference Point 474, 478
Navigational Satellite 141, 143
Navigational/Distance Measuring Equipment 685
Navigational/General 685
Navigational/Terrain Following 685
Navigational/Weather Avoidance 685
Navy Barge, Not Self-Propelled 229
Navy Barge, Self-Propelled 229
Navy Task Element 321
Navy Task Force 321
Navy Task Group 321
Navy Task Organization 321
Navy Task Unit 321
Negative Reacquisition, Bottom 359
Negative Reacquisition, Floating 360
Negative Reacquisition, General 359
Negative Reacquisition, Moored 360
Network or Network Operations 220
Neutral 6
Neutralize 559
Neutralized Mine, Bottom 352
Neutralized Mine, Floating 353
Neutralized Mine, General 352
Neutralized Mine, Moored 352
Neutralized Mine, Other Position 353
Neutralized Mine, Rising 353
Neutralized Obstructor 360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

No Attack (NOTACK) Zone 464
No Fire Area (NFA) 495
No Fire Area (NFA) – Circular 496
No Fire Area (NFA) - Irregular 496
No Fire Area (NFA) – Rectangular 496
No Fire Line 498
No Vehicles 565
Noise Jammer 683
Non Nation State Cyber Threat Actor 709
Noncombatant Generic Vessel 230
Non-Combatant Sea Surface Station 482
Non-Flammable Gas 385
Nongovernmental Organization Member or Nongovernmental Organization 235
Nonlethal Weapon 253
Non-Mine Mine-Like Object (NMLO), General 360
Non-Mine Mine-Like Object, Bottom 361
Non-Mine Mine-Like Object, Floating 361
Non-Mine Mine-Like Object, Moored 361
Non-Residential Fire 383
Nonsubmarine 341
Nuclear 215, 278, 307
Nuclear – Type 1 347
Nuclear – Type 2 347
Nuclear – Type 3 347
Nuclear – Type 4 347
Nuclear – Type 5 347
Nuclear – Type 6 348
Nuclear – Type 7 348
Nuclear (Non CBRN Defense) 287
Nuclear Contaminated Area 536
Nuclear Event 537
Nuclear Fallout Producing Event 538
Nuclear Material Production 310
Nuclear Material Storage 310
Nuclear Powered 334
Nuclear Powered, General 347
Nuclear Target 500
Nulcear Warfare Production 309

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Objective Area 445
Observation Post /Outpost (Specified) 439
Observation Post /Outpost (Unspecified) 439
Observed Ice Edge or Boundary 632
Observer 183
Obstacle Belt 517
Obstacle Bypass 520
Obstacle Bypass Difficult 520
Obstacle Bypass Easy 520
Obstacle Bypass Impossible 520
Obstacle Effects 518
Obstacle Free Zone 518
Obstacle Line 523
Obstacle Restricted Zone 518
Obstacle Zone 518
Obstructor 360
Occluded Front 580
Occluded Frontolysis 580
Occupied Assembly Area 434
Occupy 560
Ocean Going Tug Boat 230
Oceanographic Research Ship 323
Oceanography 658
Offshore Loading Facility - Area 643
Offshore Loading Facility - Line 643
Offshore Loading Facility - Point 643
Oil Rig 488
Oil/Gas Rig 674
Oil/Gas Rig Field 674
Oiler, Replenishment 324
Oiler/Tanker 327
Omni-Line of Sight (LOS) 685
One Way Traffic 554, 555
Open Facility (pUBLIC Venue) 300
Open-Bed Truck 265
Openings in the Ice 633
Operation 374
Operational Condition Amplifier 36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Operational Decontamination Point/Site 540
Operations 215
Operator Defined 673
Operator-Defined Freeform 616, 618
Optical 145
Optical (Flash) 225
Optical Fix 472
Orbit 460
Orbit – Figure Eight 461
Orbit – Race Track 461
Orbit – Random Closed 461
Orbiter Shuttle 139, 142
Ordnance 201
Organic Peroxide 386
Organization or Group 232
Orientation 44
Other 236
Other Equipment 273
Other Financial Services 294
Other Guided Missile 332, 345
Other Submersible 341
Other Water Supply Location 380
Overcast Coverage 593
Overhead Wire 532
Over-Snow (Prime Mover) 32, 565
Own Ship 330, 336
Ownship 6
Oxidizer 386
Pack Animal 225, 565
Pack Animals 32, 272
Pairing line Amplifier 36
Palletized Load System 218
Parachute Rigger 205
Passage Point 428
Passenger 157, 161, 327
Patchy 608
Patient Evacuation Coordination 225
Patriot 147, 169

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Patrol	154, 162
Patrol Boat	319
Patrol Craft, Submarine Chaser/Escort, General	319
Patrol Ship, General	320
Patrolling	374
Pattern Center Sonobuoy	477
Pending	6
Penetrate	560
Penetration Box	447
Perches/Stakes - Area	648
Perches/Stakes - Point	647
Person In Water/	487
Personnel Recovery	156, 163
Personnel Services	201
Petroleum	308
Petroleum, Oil and Lubricant	263
Petroleum, Oil and Lubricants	201
Petroleum, oil, and lubricants (POL)	280
Petroleum/Gas/Oil	298
Pharmaceutical Manufacturer	296
Pharmacy	379
Phase Line	433
Photographic (Reconnaissance)	163
Photographic Reconnaissance	157
Picket Route	485
Picket Sea Surface Station	482
Pickup	266
Pickup - Large	266
Pickup - Small	266
Pickup Zone (PZ)	436
Pictograph	690
Pier/Wharf/Quay	641
Pile/Piling/Post	675
Pipeline	220
Pipelines/Pipe	675
Piracy	234, 392
Pirate	393
Plan Ship	466

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Planet Lander 139
Planned 20, 521
Plotting 44
Plunder 369
Point 6, 690
Point of Departure 446
Point of Interest 428
Point of Interest – Launch Event 429
Point or Single Target 500
Point R Route 486
Point Targets 500
Points 399
Point-to-Point Line of Sight (LOS) 686
Poisoning 368
Police 208, 271, 290, 381
Polling Place/Election 376
Pop-Up Point (PUP) 457
Ports 639
Ports and Harbors 639
Position 439
Position and Intended Movement (PIM) 479
Position and Intended Movement (PIM) Route 485
Position Area For Artillery (PAA) 497
Position Area for Artillery (PAA) - Circular 497
Position Area for Artillery (PAA) - Irregular 498
Position Area for Artillery (PAA) - Rectangular 497
Possible Submarine - High 3 345
Possible Submarine - High 4 345
Possible Submarine - Low 1 345
Possible Submarine - Low 2 345
Post Office 300
Postal 220
Postal Distribution Center 300
Postal Service Infrastructure 299
Precipitation of Unknown Type and Intensity 614
Predicted Impact Point 468
Predominately Ice Covered 622
Pre-Landfall Waypoint 479

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Premature IED Explosion 372
Pressure Systems 576
Pressure Tendency 584
Preventive Maintenance 225
Principal Direction of Fire 433
Printed Media 287
Prison 208, 290, 381
Probable Line of Deployment 445
Probable Submarine 345
Propane Facility 298
Propellant Transporter 273
Protection 189
Protection Areas 517
Protection Lines 522
Protection Points 522
Proximity Fuse 685
Pseuado-Three Dimensional 689
Psychological 225
Public Affairs/Public Information 201
Public Venues Infrastructure 300
Pulsed Jammer 683
Pumping Station 306
Purple Kill Box, Circular 517
Purple Kill Box, Irregular 516
Purple Kill Box, Rectangular 516
Qualifying Terms - Coarse 656
Qualifying Terms - Fine 656
Qualifying Terms - Medium 656
Quartermaster 201
Radar 145, 215, 277, 679
Radar Search Doctrine 466
Radiation Dose Rate Contour Line 537
Radio 178
Radio Frequency Identification (RFID) Interrogator/Sensor 215
Radio Relay 179
Radio Relay Line of Sight 225
Radio Teletype Center 179
Radioactive Material 386

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Radiological 215, 279, 307
Radiological Contaminated Area 536
Radiological Event 538
Radiological Warfare Production 309
Raft Site 533
Rafting 635
Raid on House 376
Rail 387
Railcar 265
Railhead 202
Railhead/Railroad Station 304
Railroad 226
Railway 281
Railway 32
Railway 565
Rain 594
Rain and Snow Mixed 599
Rain and Snow Showers - Light 600
Rain and Snow Showers - Moderate/Heavy 600
Rain or Drizzle and Snow – Light 600
Rain or Drizzle and Snow –Moderate/Heavy 600
Rain Showers 596
Rain Showers, Light 596
Rain Showers, Moderate/Heavy 597
Rain Showers, Torrential 597
Rally Point 429
Ramp - Above Water 644
Ramp - Below Water 644
Range Only 686
Range Only Sonobuoy 477
Ranger 186
Ransack 369
Rape 234, 393
Rear Boundary 408
Rearm, Refuel and Resupply Point (R3P) 545
Recoilless Gun 244
Recoilless Gun - Heavy 245
Recoilless Gun - Light 244

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Recoilless Gun - Medium 245
Reconnaissance 154, 162, 181, 182, 190, 192
Reconnaissance and Surveillance 184
Reconnaissance Armored 190
Reconnaissance Equipped 190
Reconnaissance Outpost 439
Reconnaissance Satellite 141
Reconnaissance/Cavalry/Scout 181
Reconnaissance/Cavalry/Scout 184
Recovery (Maintenance) 226
Recovery (Unmanned Systems) 226
Recreational Area 301
Recruitment 375
Rectangular Target 502
Rectangular Target – Single Target 502
Reef 652
Re-entry Vehicle 139
Reference Point 477
Refuel 228
Refuel On the Move (ROM) Point 545
Refugee Holding Area 553
Regimental Support Area 553
Release Line 449
Release Point 429
Relief in Place (RIP) 560
Religious Institution 301
Religious Leader 391
Religious or Religious Organization 235
Religious Support 202
Reload Point 506
Remote Multi-Mission Vehicle (RMV) 332
Remote Multi-Mission Vehicle Unmanned Underwater Vehicle Sea Surface Station 484
Remote Piloted Vehicle (RPV) 158, 159
Remotely Piloted 335, 348
Rendezvous Route 486
Rendezvous Sea Surface Station 482
Repair Ship 324
Repeater Jammer 683

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Replacement Holding Unit 202
Replenishment at Sea Surface Station 483
Replenishment Station 458
Reported Bottomed Sub 470
Reptile 391
Rescue 460
Rescue Coordination Center 226
Rescue Sea Surface Station 483
Reservoir 306
Residential Fire 383
Rest Stop 304
Restricted Area 672
Restricted Fire Area (RFA) 496
Restricted Fire Area (RFA) – Circular 497
Restricted Fire Area (RFA) - Irregular 496
Restricted Fire Area (RFA) – Rectangular 497
Restricted Operating Zone (ROZ) 453
Restrictive Fire Line 499
Retain 438
Retire/ Retirement 560
Retransmission Site 219
Ridge Axis 583
Ridges or Hummocks 635
Rifle 240
Rigid-Hull Inflatable Boat (RHIB) 320, 329
Rime Icing 589
Rime Icing, Light 589
Rime Icing, Moderate 589
Rime Icing, Severe 590
Rise 585
Rise Then Fall Higher 585
Rise Then Fall Lower 587
Rise Then Rise Higher 585
Rise Then Steady 585
Riverine 226
Roadblock Complete (Executed) 522
Roadblocks, Craters and Blown Bridges 521
Robbery 370

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Robotic 281, 282
Rock Awashed 649
Rock Submerged 649
Rock Throwing 370
Rocket Explosion 373
Rodent 391
Roll On/Roll Off 326
Rolling Airframe Missile (RAM) 170
rotary Wing 278
Rotary-Wing 157, 159
Route, Reconnaissance, and Clearance 219
Sabotage 371
Safe House 287
Safe Lane 451
Sastrugi (with Orientation) 634
Satellite 140, 142
Satellite Downlink 686
Satellite Uplink 687
Satellite, General 139
Scattered Coverage 593
School 297
School Fire 383
Screen 561
Screen Center 470
Sea Air Land (SEAL) 184
Sea Anomaly (Wake, Current, Knuckle 489
Sea Ice 630
Sea Mine Decoy 353
Sea Mine Decoy, Bottom 353
Sea Mine Decoy, Moored 354
Sea Mine, Bottom 350
Sea Mine, Floating 350
Sea Mine, General 350
Sea Mine, Moored 350
Sea Mine, Other Position 351
Sea Mine, Rising 350
Sea Mine-Like 488
Sea Port/Naval Base 304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Sea Subsurface Symbols 337
Sea Surface Symbols 311
Sea Surface Warfare Surface Station 483
Sea-Base X-Band 333
Sea-Based X-Band (SBX) Radar 322
Seaport of Debarkation/ Seaport of Embarkation 202
Search 196, 197, 473
Search and Rescue 156, 163, 194, 215
Search Area 473
Search Area/Reconnaissance Area 447
Search Center 473
Seawall 646
Secure 561
Security 193, 215, 561
Security Force Assistance 231, 394
Security Police (Air) 194
Sedan 265
Seize 562
Self–Propelled 187
Self-Propelled Tracked 188
Semiautomatic Rifle 240
Semi-Trailer and Truck 262
Semi-Trailer and Truck - Light 263
Sensor 197, 216, 277
Sensor Emplaced 277
Sensor Outpost/Listening Post 440
Sensor Zone 511
Sensor Zone, Circular 511
Sensor Zone, Irregular 511
Sensor Zone, Rectangular 511
Sensors 277
Series or Group of Targets 503
Service Craft/Yard 230, 324
Severe Squall Line 583
Shallow Continuous 608
Shallow Patches 608
Shear Line 583
Shearing or Shear Zone 630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Shell Tracking 686
Shelter 230, 534
Ship Area of Interest, Eclipse/Circle 464
Ship Area of Interest, Maneuver Areas 464
Ship Area of Interest, Rectangle 465
Ship Yard 304
Shooting 372
SHORADEZ 455
Shore Control Station 484
Shore Patrol 194
Shoreline Protection 645
Short Range 147, 166, 170, 226
Signal 179
Signal - Radio 178
Signal - Radio Relay 179
Signal - Tactical Satellite 179
Signal - Teletype 179
Signal - Video Imagery (Combat Camera) 179
Signal Intercept 679
Signals Iintelligence Symbols 677
Signals Intelligence 216
Signals Intelligence (SIGINT) 145
Single Channel 226
Single Concertina 525
Single Fence 524
Single Rocket Launcher 216, 251
Single Rocket Launcher - Heavy 251
Single Rocket Launcher - Light 251
Single Rocket Launcher - Medium 251
Single Shot Rifle 240
Sinker 471
Ski 226
Sky Obscured 609
Sky Totally or Partially Obscured 594
Sky Visible 608
Sled 32, 565
Small Box Truck 267
Small Bus 266

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Small Object, Mine-Like 351
Smoke 216, 383, 503, 610
Smuggling 370
Snags/Stumps 651
Sniper 184, 216
Sniping 372
Snow 601
Snow Cover 634
Snow Covering Ground Completely, Deep Drifts 625
Snow Grains 603
Snow Showers 603
Snow Showers, Light 603
Snow Showers, Moderate/Heavy 603
Solid (Volume) 690
Sonobuoy 474, 686
Sound Ranging 216
Soundings 636
Space 146, 148, 168, 169, 179, 675, 686
Space Launched Vehicle (SLV) 141
Space Station 141, 143
Space Symbols 135
Space Vehicle 139
Speaker 235, 391
Special Boat 185
Special Corridor 452
Special Forces 185
Special Needs Fire 383
Special Needs Infrastructure 301
Special Operations Forces 156
Special Operations Forces (SOF) 163, 185, 217, 332, 345
Special Point 430, 477
Special SSNR 186
Special Troops 180
Special Weapons and Tactics 217
Speed Leader Amplifier 35
Speedboat 320, 330
Spontaneously Combustible Material 386
Sport Utility Vehicle (SUV) 267

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Spot Noise Jammer 684
Spotter Outpost 439
Spy 232, 375
Squall 607
Staff 6
Standard Missile – 2 (SM-2) 169
Standard Missile – 3 (SM-3) 148
Standard Missile – 6 (SM-6) 169
Standard Missile Terminal Phase (SM-T) 148
Standard Use Army Aircraft Flight Route (SAAFR) 451
Start Point 430
State of the Ground 618
Static Amplifier 6
Static Depiction 527
Stationary Front 581
Stationary Frontogenesis 581
Stationary Frontolysis 582
Steady 586
Storage Tower 306
Storms 605
Strategic 227
Stream Line 592
Strike Initial Point 458
Strong Point 437
Submarine 341
Submarine Action Area (SAA) 435
Submarine Antisubmarine Warfare Sea Subsurface Station 480
Submarine Cable 673
Submarine- Generated Action Area (SGAA) 435
Submarine Sea Subsurface Station 480
Submarine Tender 324
Submarine, Bottomed 341
Submarine, Snorkeling 341
Submarine, Surfaced 341
Submerged Crib 673
Submersible 342
Subsidence 389
Subsurface 168, 169

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SUCAP – Fixed Wing 459
SUCAP – Rotary Wing 459
Supply 229
Support 205, 218, 227
Support by Fire Position 447
Supporting Attack 442
Suppress 563
Suppression of Enemy Air Defense 157, 164
Surface 167, 169
Surface (Area) 690
Surface Combatant, Line 315
Surface Deployment and Distribution Command 230
Surface Dry without Cracks or Appreciable Dust or Loose Sand 619
Surface Flooded 620
Surface Frozen 620
Surface Moist 619
Surface Search 686
Surface Warfare 164, 332, 344
Surface Warfare Unmanned Underwater Vehicle Sea Subsurface Station 481
Surface Warfare Unmanned Underwater Vehicle Sea Surface Station 484
Surface Water Intake 306
Surface Wet, Standing Water in Small or Large Pools 619
Surface-to-Surface Missile Launcher 249
Surface-to-Surface Missile Launcher - Heavy 250
Surface-to-Surface Missile Launcher - Light 249
Surface-to-Surface Missile Launcher - Medium 250
Surveillance 185
Survey 189, 217
Survey Control Point 506
Survey Ship 323
Suspect 6
Suspicious Activity 371
Sustainment 197, 198
Sustainment Areas 552
Sustainment Lines 553
Sustainment Points 541
Sustainment Shipments 275
Swept Area 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Symbicon 690
Symbol 6, 690
Symbol Identification Code (SIDC) 7
Symbol Identification Codes 49
TACAN 457
Tactical 227
Tactical Exploitation 217
Tactical Satellite 179
Tactical Satellite Communications 209
Tagert Acquisition 187
Tank 20, 255, 334
Tank - Heavy 256
Tank - Light 255
Tank - Medium 256
Tank Recovery Vehicle 256
Tank Recovery Vehicle - Heavy 256
Tank Recovery Vehicle - Light 256
Tank Recovery Vehicle - Medium 256
Tanker 154, 161
Tanking 458
Tank-width Mine Plow 279
Target Acquisition 217, 687
Target Area of Interest 423
Target Build-up Area 511
Target Build-up Area, Circular 512
Target Build-up Area, Irregular 511
Target Build-up Area, Rectangular 512
Target Handover 431
Target Illumination 687
Target Reference Point 440
Target Tracking 687
Target Value Area 512
Target Value Area, Circular 513
Target Value Area, Irregular 512
Target Value Area, Rectangular 512
Targeted Individual or Organization 235
Target-Recorded 500
Taser 253

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Telecommunications (Civilian) 302
Telecommunications Infrastructure 302
Telecommunications Tower 302
Tent 275
Tent, Civilian 275
Tent, Military 275
Tentative or Provisional Track 487
Tented Camp 288
Terminal High Altitude Area Defense (THAAD) 148
Terminally Guided Munition Footprint (TGMF) 514
Terrain Draping 690
Terrorist or Terrorist Organization 235
Tethered Lighter than Air 158, 159
Tethered Satellite 141, 143
Tetrahedrons, Dragons Teeth, and Other Similar Obstacles 530
Text 7
Text Modifiers 33
Theater 220
Theater Army 221
Theft 370, 394
Thickness 618
Thin Loose Dry Dust or Sand Covering Ground Completely 621
Thorough De-contamination Point/Site 540
Three-Dimensional 690
Thunderstorm 616
Thunderstorm - No Precipitation 606
Thunderstorm Heavy - with Hail 607
Thunderstorm Heavy with Rain/Snow - No Hail 606
Thunderstorm Light to Moderate - with Hail 606
Thunderstorm Light to Moderate with Rain/Snow - No Hail 606
Tide and Current 656
Tide Data Point 657
Tide Gauge 658
Tilt-Rotor 219, 279
Toll Facility 304
Tomcat 460
Topographic 194, 217
Topographical Features 635

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Torpedo	332, 343
Tow	327
Tow Truck	264
Tow Truck - Heavy	264
Tow Truck - Light	264
Towed	32, 189, 227, 565
Towed Sonar Array (Long)	33
Towed Sonar Array (Short)	33
Tower, High	531
Tower, Low	531
Toxic Gas	386
Toxic Infectious Material	387
Toxic Release Inventory	296
Track	7
Tracked	281
Tracked	32, 231
Tracked	565
Tractor Trailer	282
Tractor Trailer Truck with Box	268
Tractor Trailer Truck with Box - Large/Heavy Box Trailer	269
Tractor Trailer Truck with Box - Medium Box Trailer	268
Tractor Trailer Truck with Box - Small/Light Box Trailer	268
Tractor Trailer Truck with Flatbed Trailer	269
Tractor Trailer Truck with Flatbed Trailer - Heavy	269
Tractor Trailer Truck with Flatbed Trailer - Medium	269
Tractor Trailer Truck with Flatbed Trailer - Small/Light	269
Traffic Control Post (TCP)	546
Traffic Inspection Facility	305
Trafficking	372
Trailer Transfer Point (TTP)	546
Train	264
Trainer	154, 162
Training Area	673
Training Camp	288
Transit Corridors	452
Translator	205
Transloader	272
Transponder Jammer	684

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Transport Ship, Hazardous Material 328
Transportation 202
Transportation Incident 387
Transportation Infrastructure 303
Transportation Security Administration (TSA) 208, 271, 290, 382
Transporter 272
Trawler 329
Triage 379
Trial Track 471
Trip Wire 531
Triple Strand Concertina 526
Troop 227
Troop De-contamination Point/Site 539
Tropical Depression 611
Tropical Storm 612
Tropical Storm Systems 611
Tropical Storm Wind Areas and Date/Time Labels 612
Tropopause High 577
Tropopause Level 613
Tropopause Low 576
Tropospheric Scatter 687
Trough Axis 582
Truck Mounted with Volcano 260
Tsunami 390
Tug Harbor 230
Tug, Harbor 325
Tug, Ocean Going 324, 327
Tunnel 305
Turbulence 587, 614
Turbulence , Light 587
Turbulence, Extreme 588
Turbulence, Moderate 587
Turbulence, Severe 587
Turn 520
TV and Radio Propaganda 374
Two Way Traffic 554, 555
Two-Dimensional 690
Ultra Light 156, 161

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Underwater Danger/Hazard 650
Underwater Demolition Team 186
Uneven Layer of Compact or Wet Snow Covering Ground Completely 623
Uneven Layer of Loose Dry Snow Covering Ground Completely 625
Unexploded Explosive Ordnance (UXO) Area 528
Unexploded Ordnance 353, 387
Unit Deployment Shipments 275
Unit Maintenance Collection Point (UMCP) 546
United States Secret Service(Treas) (USSS) 208, 271, 290, 382
University 297
Unknown 7, 21, 148, 687
Unmanned Aerial System (UAS/UA) 460
Unmanned Aerial Systems 186
Unmanned Aerial Systems (UAS) 215
Unmanned Aircraft (UA) 158, 159
Unmanned Aircraft Restricted Operations Zone (UAROZ) 453
Unmanned Aircraft System (UAS) 158, 159
Unmanned Surface Water Vehicle (USV) 320, 330
Unmanned Underwater Vehicle Sea Subsurface Station 480
Unmanned Underwater Vehicle Sea Surface Station 483
Unspecified 524, 565
Unspecified Mine 529
Unwilling/Coerced 375
Unwilling/Coerced Recruit 235
Upgraded Early Warning Radar 279
Upper Cold Front 578
Upper Occluded Front 580
Upper Stationary Front 581
Upper Trough Axis 582
Upper Warm Front 579
US Class I 549
US Class II 549
US Class III 550
US Class IV 550
US Class IX 551
US Class V 550
US Class VI 550
US Class VII 551

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

US Class VIII 551
US Class X 551
US Marshals Service 209, 272, 291, 382
US Supply Class I 203
US Supply Class IV 203
US Supply Class IX 204
US Supply Class VI 203
US Supply Class VII 203
US Supply Class VIII 204
US Supply Class X 204
Utility 280
Utility 154, 161, 217, 228
Utility Vehicle 262, 267
Van 266
Vandalism 369
Vdr Level 1-2 658
Vdr Level 2-3 658
Vdr Level 3-4 659
Vdr Level 4-5 659
Vdr Level 5-6 659
Vdr Level 6-7 659
Vdr Level 7-8 660
Vdr Level 8-9 660
Vdr Level 9-10 660
Vehicle 253, 262, 334, 387
Vertical Line Array Directional Frequency Analysis and Recording (DIFAR) Sonobuoy 477
Vertical Obstructions 531
Vertical or Short Take-off and Landing (VTOL/VSTOL) 227
Vertical-Takeoff UAV (VT-UAV) 158
Very Heavy 229
Very Important Person (VIP) 157
Very Important Person (VIP) Transport 164
Veterinary 227
Victim of an Attempted Crime 232
Video Imagery (Combat Camera) 179, 217
Video Remoting 687
Vital Area Center 478
Volcanic Ash 613

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Volcanic Eruption 389, 613
Volcanic Threat 389
VSTOL 155
VSTOL/VTOL 161
VTUA 460
Warehouse/Storage Facility 288
Warhead Transporter 273
Warm Front 579
Warm Frontogenesis 579
Warm Frontolysis 579
Warrant Served 375
Wastewater Treatment Facility 306
Water 220, 264, 281, 307, 638
Water Cannon 253
Water Purification 204
Water Supply Infrastructure 305
Water Treatment 307
Water Turbulence 657
Water with Radar Targets 629
Waypoint 430, 479
Waypoint Route 486
Weapon 160, 216, 343
Weapon Engagement Zone 454
Weapon/Sensor Range fan, Circular 514
Weapon/Sensor Range fan, Sector 515
Weapon/Weapon System 240
Weapons 219
Weapons Free Zone 456
Weapons Grde Production 310
Weather Satellite 141, 143
Weather Symbols 594
Wheeled 227
Wheeled (Cross Country) 564
Wheeled (Cross-Country) 31
Wheeled (Limited Cross Country) 564
Wheeled (Limited Cross-Country) 31
Wheeled and Tracked Combination 32, 565
Wheeled LTD 282

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Wheeled Vehicle Explosion 388
Wheeled X 282
White List Location 288
Wide Area Antitank Mine 529, 566
Wide Area Antitank Mine and Mine Cluster 568
Wild Fire 384
Willing 375
Willing Recruit 235
Wind Plot 591
Winds 591
Wire Obstacles 524
With Snow or Measurable Ice Cover 622
Withdraw 562
Withdraw Under Pressure 562
Without Snow or Measurable Ice Cover 618
Wounded Personnel De-contamination Site 541
Wreck (Submerged) 651
Wreck (Uncovers) 651
Written Military Information Support Operations 393
Zone of Responsibility 513
Zone of Responsibility, Circular 513
Zone of Responsibility, Irregular 513
Zone of Responsibility, Rectangular 513

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AC
Navy – OM
Air Force – 93
NGA – MP

Preparing activity:
DISA – DC3
(INST-2020-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.