MILITARY SPECIFICATION

WIPER ASSEMBLY: 10538530, 10538600 & 10549760

1. SCOPE

1.1 This specification covers one basic type of electrically operated periscope wiper assembly. The part number designation identifies design and application differences (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel; General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurements of
MIL-STD-810	Environmental Test Methods

DRAWINGS

U.S. Army, Frankford Arsenal

F10538530	Wiper Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

F10538600	Wiper Assembly
F10549760	Wiper Assembly

PACKAGING DATA SHEET

10549760	Packaging of Wiper Assembly:	10549760
10538530	Packaging of Wiper Assembly:	10538530
10538600	Packaging of Wiper Assembly:	10538600

(Copies of specifications, standards, drawings and packaging sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The wiper assembly shall be manufactured in accordance with applicable drawing listed in 2.1 and the drawings pretaining thereto.

3.2 General specification.- The contractor shall be responsible for adherence to the following requirements of MIL-F-13926:

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Electrical and electronic assemblies
f. Workmanship

3.3 Environmental.

3.3.1 Storage temperatures.- The wiper assembly shall show no evidence of physical failure due to thermal stabilization of -80°F to +155°F.

3.3.2 Operating temperatures.- The wiper assembly shall be operable (3.4 thru 3.6.1) while thermally stabilized at temperatures of -65°F and +150°F.

3.3.3 Vibration.- The wiper assembly shall be operable (3.5) during the following vibration exposure:

a. Simple harmonic motion applied successively along the 3 mutually perpendicular axes.

b. The frequency varying either linearly or logarithmically from 5 to 55 to 5cps in 5 minutes cycles. Total of 15 minutes along each of the axes.

c. The amplitude of vibration maintained constant at 1/64 inch (1/32 inch total excursion).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

Subsequent to vibration, there shall be no visual defects and the assembly shall be capable of meeting all requirements herein.

3.3.4 Shock.- The wiper assembly shall sustain operation (3.4 thru 3.6) subsequent to receiving 9 impact shocks; 3 shocks in each of the 3 mutually perpendicular directions. Each impact shock shall be 50 g's of acceleration with a pulse duration of 7 ± 1 milliseconds. There shall be no visual mechanical defects subsequent to being shocked.

3.3.5 Sealing.- The applicable housing and support assemblies listed below shall be impervious to water when exposed to rainfall. This requirement shall be met with the wiper assembly positioned in its normal operational mode and with provisions taken to insure that applicable Cover Assemblies 10538526, 10538594 and 10549762 are not exposed to rainfall.

Wiper Assembly 10538530	Housing Assembly 10538527
	Housing Assembly 10538585
	Support Assembly 10538584
Wiper Assembly 10538600	Housing Assembly 10538595
	Housing Assembly 10538585
	Support Assembly 10538584
Wiper Assembly 10549760	Housing Assembly 10549752
	Housing Assembly 8589875
	Support Assembly 10549753

3.4 Wiper blade pressure.- The wiper blade shall lay against the head window face with .5 to 1.5 ounces of pressure when measured at the center of the plate. The requirement shall be met with the wiper assembly positioned in its normal operational mode and a periscope head window (or equal), with its long edge established perpendicular to the contact edge of the wiper blade, positioned as follows:

Wiper Assembly Part Number	Distance from ℄ of Support Assy. to Window	Inclination of window toward wiper assy.
10538530	0.853 ± .016	5° ± 15'
10538600	0.875 ± .016	2° ± 15'
10549760	1.250 ± .016	1° ± 15'

3.5 Operation.- The wiper assembly shall operate with 24 to 28 volts dc applied between Pins A, B and C of Electrical Receptacle MS3112E8-4P as shown on the applicable wiring diagram (Drawings D10538526, D10538594 and C10549797). (Pin A shall be polarized negative in respect to Pins B and C). With the voltage applied, the wiper blade shall oscillate thru an arc of 165° ± 5°. The movement shall be equally spaced within 15° about the vertical centerline of the head window face. The wiper blade shall return to a parked or horizontal position, either side of center, when B + or the 24 to 28 volt source is removed from Pin C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

3.6 Torque.- The slip clutch shall transmit sufficient torque to oscillate the wiper blade against a clean, dry head window face. The slip clutch shall function such that holding the wiper arm stationary in any position for at least 2 minutes will not cause undue or excessive loads on the gear-motor. Upon release of the wiper arm, the slip clutch shall again transmit the sufficient torque to oscillate the wiper blade against a clean, dry head window face.

3.6.1 Synchronization.- Upon release of the wiper arm, the wiper movement shall be synchronized and again be equidistant to the vertical center within 15°.

3.7 Electromagnetic interference.- The wiper assembly shall meet the requirements of CE03 and RE02 of equipment Class IIC per MIL-STD-461.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of 3 wiper assemblies plus 3 each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as sused in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisons.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the Technical Data Package (TDP). In the absence of SQAP's the applicable Quality Assurance Provisions of MIL-F-13926 shall apply.

4.3.2.2 Wiper Assembly.- Examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables I, II and III herein. Examinations and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables I, II and III shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE I - CLASSIFICATION OF DEFECTS

CLASS	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
CRITICAL:	NONE		
MAJOR:	AQL 1.0% Defective		
101.	Vibration	3.3.3	4.6.3, 4.6.3.1
102.	Wiper blade pressure	3.4	4.6.6.1
103.	Operation	3.5	4.6.6.2
104.	Torque	3.6	4.6.6.3
105.	Synchronization	3.6.1	4.6.6.4
MINOR:	NONE DEFINED		

NOTE: The tests in Table I shall be conducted at a temperature between +60° and +90°F.

4.3.3 Acceptance and rejection.- Rejected lots shall be acreened for all defective characteristics. Removal or correction of defective

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special Sampling.

4.4.1 General.- One wiper assembly shall be selected at random as a special sampling from each 100 produced. The sample shall meet the requirements and tests in Table II.

TABLE II

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Fabrication	3.1	Applicable drawings - Visual
302.	General specification	3.2	MIL-F-13926 - Visual

4.4.2 Environmental.- Three (3) wiper assemblies shall be selected at random from each 50 produced or from each months production, whichever occurs first. Each sample shall meet the requirements and tests in Table III.

TABLE III

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
303.	Storage temperatures (-80°F to +155°F)	3.3.1	4.6.1
304.	Wiper blade pressure	3.3.2, 3.4	4.6.2, 4.6.6.1
305.	Operation, wiper assembly	3.3.2, 3.5	4.6.2, 4.6.6.2
306.	Torque	3.3.2, 3.6	4.6.2, 4.6.6.3
307.	Synchronization	3.3.2, 3.6.1	4.6.2. 4.6.6.4
308.	Shock (+60°F to +90°F)	3.3.4	4.6.4
309.	Wiper blade pressure, post shock	3.3.4, 3.4	4.6.4, 4.6.6.1
310.	Operation, post shock	3.3.4, 3.5	4.6.4, 4.6.6.2
311.	Torque, post shock	3.3.4, 3.6	4.6.4, 4.6.6.3
312.	Synchronization, post shock	3.3.4, 3.6.1	4.6.4, 4.6.6.4

NOTE: The tests for Characteristics 304 through 307 inclusive shall be conducted at -65°F and +150°F. The test for Characteristics 309 through 312 inclusive shall be conducted at a temperature between +60° and +90°F.

4.4.3 Sealing (rain test).- In addition to the first article samples, the test in 4.6.5 to determine compliance with 3.3.5 shall be performed on 3 units randomly selected at the 25, 50, and 75% point of production.

4.4.4 Electromagnetic interference.- In addition to the first article samples, the test in 4.6.7 to determine compliance with 3.7 shall be performed on 3 wiper assemblies randomly selected at the 25, 50 and 75% point of production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

4.4.5 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the represented inspection lot will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance to test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the Technical Data Package (TDP).

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerance used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Inspection equipment design requirements.

4.5.2.3.1 Orientation and operability (operating temperatures and vibration).- Special testing equipment to test the environmental operability of the wiper assembly shall consist of the following:

a. Mounting plate assembly
b. Window-holder assembly
c. Vibration and temperature cycling test stand assembly
d. Vibrating Machine
e. Regulated power supply
f. Pull tester

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

4.5.2.3.1.1 Mounting plate assembly.- The mounting plate assembly shall accept and rigidly position the wiper assembly so that the geometric axes through both housing assemblies and the support assembly are in the vertical plane. The mounting plate shall provide for accepting and rigidly positioning the window-holder assembly in its proper orientation (see 4.5.2.3.1.2).

4.5.2.3.1.2 Window-holder assembly.- The window of the assembly shall be plate glass of commercial quality and flatness. The minimum dimensions of the window shall be 6.0 inches wide by 9.360 inches long. The holder shall secure the window with its long axis (9.360 inch) in a horizontal plane. The holder shall also position the window with its face inclined towards the wiper blade assembly, as required in 3.4 for the assembly being procured. The window-holder assembly shall be capable of being adjusted in the horizontal plane so that the distance between the centerline of the support assembly and the window, as measured at the middle of the wiper blade, conforms to the requirements of 3.4.

4.5.2.3.1.3 Vibration and temperature cycling test stand assembly - The vibration and temperature cycling test stand assembly shall function as a holder for the mounting plate assembly and window-holder assembly positioned in their proper orientation. The test stand shall provide for maintaining the geometric axis through the wiper assembly in a vertical plane during the vibration and temperature cycle. Features shall be designed into the test stand assembly that will assure positive and secure mounting of the mounting plate assembly and window-holder assembly on the test stand.

4.5.2.3.1.4 Vibration machine.- The vibration and temperature cycling test stand shall be firmly and securely mounted on the vibration machine. The vibrating machine shall be capable of providing the amplitude and frequency specified in 3.3.3. The vibrating machine shall also be capable of vibrating the wiper assembly along 3 mutually perpendicular axes while the wiper assembly is maintained in the position specified in 4.5.2.3.1.3.

4.5.2.3.1.5 Regulated power supply.- The power supply shall be continuously variable over a voltage range of 0-30 Vdc, within $\pm$ 3%. Its ripple content shall be less than 1%. The power supply shall not be subjected to the vibration and temperature cycling environment of the wiper assembly.

4.5.2.3.1.6 Pull tester.- The pull tester shall be an indicating type with a minimum range of 0 to 2 ounces, the accuracy of which shall be $\pm$ 0.5% of full scale.

4.5.2.3.2 Operability requirements.- The special testing equipment utilized to test the operability requirements of the wiper assembly shall incorporate the applicable design requirements specified in 4.5.2.3.1.1 and 4.5.2.3.1.2, together with a test stand assembly that shall function as a holder for the mounting plate and window-holder assemblies positioned in their proper orientation (see Figure I). The power supply specified in 4.5.2.3.1.5 and the pull tester specified in 4.5.2.3.1.6 shall be utilized for these tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

4.6 Test methods and procedures.

4.6.1 Storage temperatures.- The test chamber utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926 and the conditions of 3.3.1 The wiper assembly shall be exposed to each specified temperature extreme until thermal stabilization at the specified temperature is reached. Subsequent to the temperature exposures the wiper assembly shall be stabilized in an ambient temperature between +60° and +90°F and subjected to a visual and tactile examination to assure conformance with 3.3.1. Caution shall be exercised during this test to avoid subjecting the wiper assembly to thermal shock.

4.6.2 Operating temperatures.- The test chamber utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926 and the conditions of 3.3.2. Position the wiper assembly on the test equipment specified in 4.5.2.3.1.1, 4.5.2.3.1.2 and 4.5.2.3.1.3. Position the test equipment with wiper assembly in the test chamber. The wiper assembly shall be energized by the power supply positioned external to the test chamber, as required. The wiper assembly shall be exposed to each temperature extreme until thermal stabilization at the specified temperature in 3.3.2 is reached. While at each temperature extreme, the wiper assembly shall be subjected to the tests specified in 4.6.6.1 through 4.6.6.4 inclusive. The wiper assembly shall conform to the requirements of 3.3.2 for each temperature extreme. Caution shall be exercised during this test to avoid subjecting the wiper assembly to thermal shock.

4.6.3 Vibration.- Perform this test with the wiper assembly positioned on test equipment specified in 4.5.2.3.1.1 through 4.5.2.3.1.4 inclusive. The wiper assembly shall be energized by the power supply as required. The wiper assembly shall be vibrated in accordance with Method 514, Procedure IX, Part 1 of MIL-STD-810, except that the frequency, frequency cycling, and amplitude of the vibration shall be as specified in 3.3.3. During vibration the unit under test shall be operable in accordance with 4.6.6.2. Upon completion of the vibration cycling the wiper assembly shall be subjected to the test specified in 4.6.3.1.

4.6.3.1 Examination.- Subsequent to vibration, the wiper assembly shall be examined for mechanical defects prior to being subjected to the remaining tests specified herein. A visual examination shall be made for missing or damaged parts. A tactile examination shall be conducted to determine looseness, broken components; and a functional examination of moving parts for undue irregularity of movement, friction or looseness. Wiper assemblies that have passed the aforementioned examinations shall be subjected to the tests of 4.6.6.1 through 4.6.6.4 inclusive to determine overall compliance with the requirements of 3.3.3. Any one of the aforementioned defects shall be cause to consider a wiper assembly defective.

4.6.4 Shock.- Perform this test with the wiper assembly rigidly secured on the shock test machine with its geometric axes in a vertical plane. The full contact edge of the wiper blade shall be positioned against

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

a smooth rigid vertical surface with a pressure between .5 and 1.5 ounces. The wiper assembly shall be subjected to the shock test in accordance with Test Method 516.1, Procedure IV of MIL-STD-810, except that the number of shock impulses, direction and time duration shall be as specified in 3.3.4. At the conclusion of this test the wiper assembly shall be subjected to the test in 4.6.3.1. Wiper assemblies that have passed the aforementioned examinations shall be subjected to the tests in 4.6.6.1 through 4.6.6.4 inclusive. The wiper assembly shall conform to the requirements of 3.4 through 3.6.1 inclusive.

4.6.5 Sealing (rain test).- With the wiper assembly positioned in a holding device, the cover assembly and all the electrical and mechanical components below the cover assembly, not exposed in normal operation, shall be adequately sealed against moisture penetration. The wiper assembly shall then be subjected to the rain test in accordance with Procedure I of MIL-F-13926. Immediately following the specified exposure, the exposed surfaces of the wiper assembly shall be dried by blotting with water absorbing material. Remove the applicable upper housing assembly and visually inspect all interior surfaces of the assembly for any evidence of water penetration. Wiper assemblies that have satisfactorily withstood this test shall have the housing assembly replaced and resealed as specified on applicable wiper assembly drawing.

4.6.6 Operability.- The following tests shall be conducted with the wiper assembly mounted on the special testing equipment specified in 4.5.2.3.2. Unless otherwise specified, the distance between the front surface of the window and the geometric axis of the applicable wiper assembly (as measured at the middle of the blade) shall be as indicated in 3.4. The window shall be inclined toward the wiper assembly as indicated in 3.4.

4.6.6.1 Wiper blade pressure.- Perform this test with the pull tester specified in 4.5.2.3.1.6, and a piece of .002 inch thick plastic (mylar) shim stock 1 1/2 inches square. A controllable means shall be provided to support the pull tester in a horizontal plane and to the height wherein contact can be made with the wiper arm plate and permit a horizontal pull (perpendicular to the wiper blade surface). Position the wiper blade in the vertical plane. Insert the .002 inch thick plastic shim stock between the upper half of the wiper blade (center of plate to top of blade) and the simulated window. The wiper blade shall retain the shim stock in place. Attach the pull tester to wiper blade plate as shown in Figure 1. A pull force perpendicular to the blade surface shall be applied. At the point where the shim stock starts to drop, the measured pull force shall be within the value specified in 3.4. Repeat the above test with the wiper blade positioned to the right and left, between 60° and 75° to each side of the center position. The resultant wiper blade pressure on the window shall be within the range specified in 3.4.

4.6.6.2 Operation.- Energize the wiper assembly as specified in 3.5 for a period of one minute. During this one minute period the wiper blade, from the parked position, shall operate and oscillate as specified in 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

Remove the voltage source from the pins indicated in 3.5 and observe that the wiper blade performs as specified in 3.5.

4.6.6.3 Torque.- Energize the wiper assembly as specified in 3.5. From the parked position the wiper blade shall operate in a constant reciprocating motion while the entrance window is frost free and dry. Continue test by manually holding the wiper arm stationary for the period specified in 3.6. During this period the wiper motor and clutch shall also conform to the requirements of 3.6. At the conclusion of this holding period and upon release of the wiper, the wiper blade shall perform as specified in 3.6.

NOTE: During the test at low temperature, an appropriate commercial antifreeze solution (in spray form) may be used to keep the window frost free.

4.6.6.4 Synchronization.- Perform this test concurrently with the test in 4.6.6.3. Upon release of the wiper arm, and with the wiper motor still energized, observe that wiper blade performs as specified in 3.6.1.

4.6.7 Electromagnetic interference.- The wiper assembly shall be tested for the requirements specified in 3.7 in accordance with the procedures specified in MIL-STD-462.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.- Packaging, packing and marking shall be in accordance with Packaging Data Sheet (see 2.1). The level of protection shall be as specified in procurement document.

6. NOTES

6.1 Intended use.- The wiper assembly is used to wipe condensation from the entrance window, or head prism, of periscopes in combat vehicles. The intended use of the wiper assemblies are as follows:

Wiper Assembly Part Number	Applicable Periscope	Applicable Combat Vehicle
10538530	Periscope, Tank: M50	Tank: M60A2
10538600	Periscope, Tank: M51	Tank: M60A2
10549760	Periscope, Tank: M47 & Periscope, Tank: M48	Vehicle, Recon.- Gen. Sheridan: M551

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Selection of applicable levels of preservation, packaging and packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

(c) Applicable packaging data sheet number (see 5.1).
(d) Applicable stock number.

(e) Requirement for first article inspection.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1240-A549

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

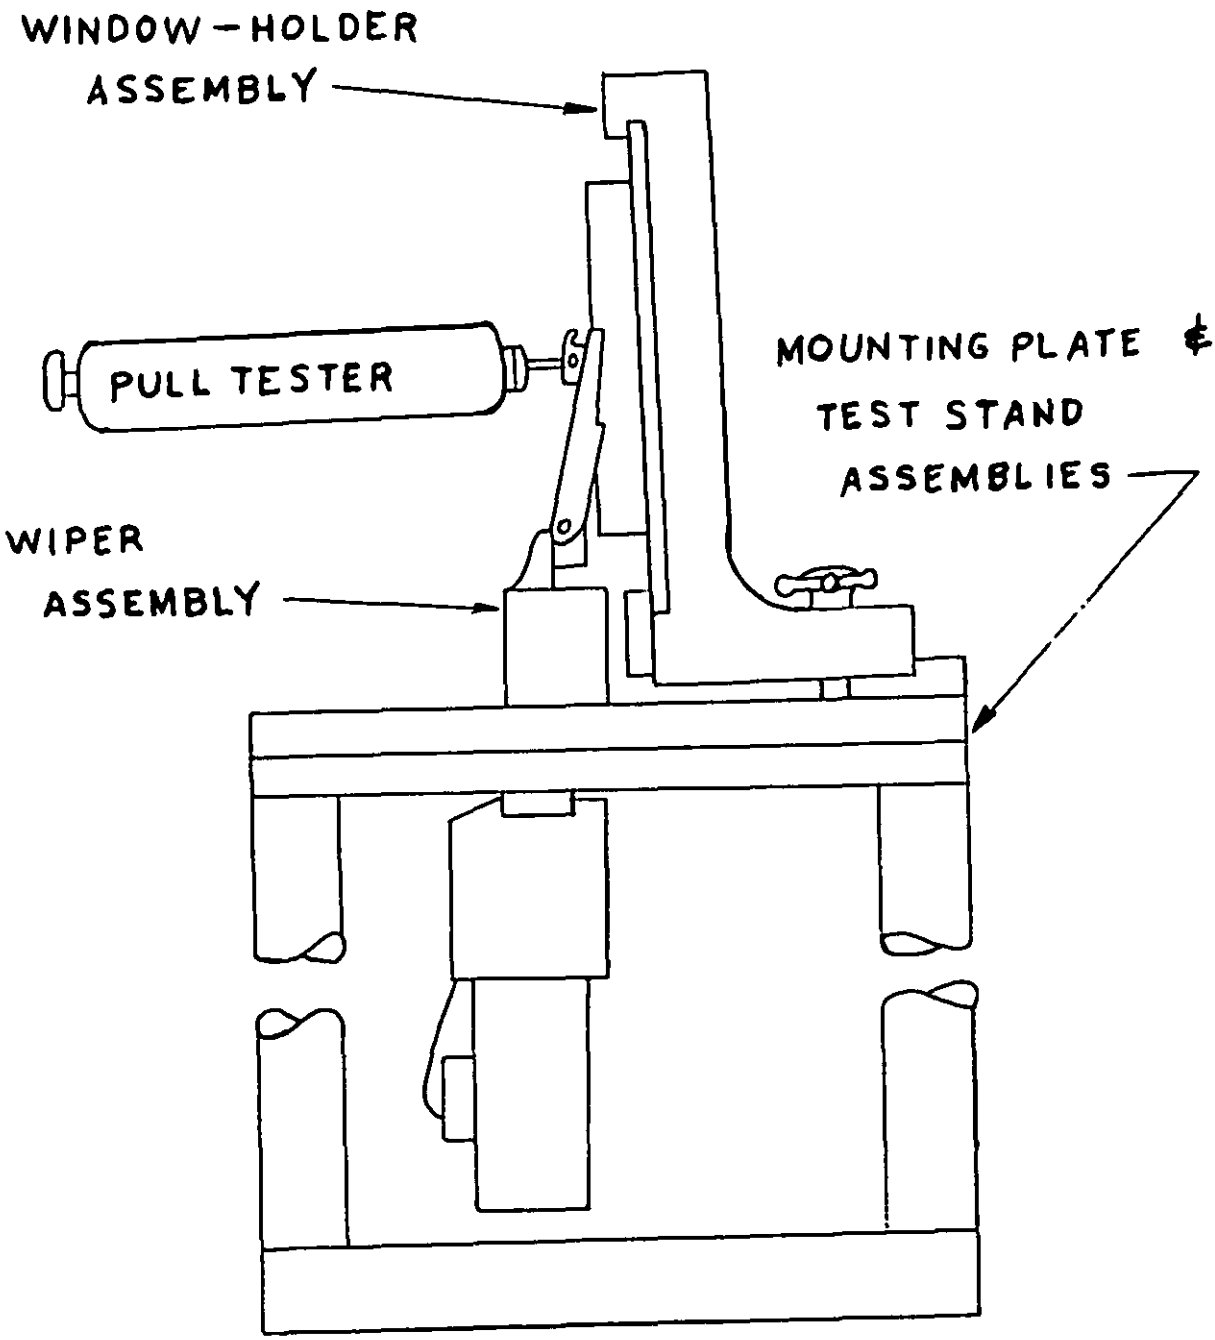


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:54Z
Check the source to verify that this is the current version before use.