MIL-A-49095A(CR)
7 July 1978
SUPERSEDING
MIL-A-49095(EL)
24 September 1976

MILITARY SPECIFICATION

AMPLIFIER, AUDIO FREQUENCY AM-6747( )/V

This specification is approved by the Communications Research and Development Command, Dept of the Army, and is available for the use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of audio frequency amplifier designated Amplifier, Audio Frequency AM-6747( )/V which is used in vehicular communications systems utilizing TSEC/KY-65 units. (See 6.1 and 6.6)

1.2 Description. Amplifier, Audio Frequency AM-6747( )/V is a rugged, compact, combined audio frequency amplifier and loudspeaker unit. The unit contains the amplifier necessary to furnish cryptographic communications in particular military vehicles. In addition, the unit contains loudspeaker LS-445/U as an integral part, and provides facilities for employment of the H-189/U or equivalent dynamic handset. Modular construction and printed wiring are employed in the audio amplifier unit itself. The amplifier operates from a 24 volt DC nominal input potential. A mounting bracket is provided for mounting Amplifier, Audio Frequency AM-6747( )/V to a bulkhead or bracket in a military vehicle.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Communication Research and Development Command, ATTN: DRDCO-CM-DM, Fort Monmouth, N.J. 07703 by using the self-addressed Standardization Document Improvement Proposal, (DD Form 1426) appearing at the end of this document or by letter.

FSC 5830

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-71	Pallets, Material , Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
QQ-S-781	Strapping, Steel, and Seals
PPP-B-20	Bag, Cotton, Mailing
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes
PPP-P-291	Paperboard, Wrapping, Cushioning
PPP-S-760	Strapping, Nonmetallic, (and Connectors)
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing)
PPP-T-97	Tape, Packaging/Industrial, Filament Reinforced

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation-Packaging, Methods of
MIL-S-901	Shock Tests, H.i. (High impact), Shipboard Machinery, Equipment and Systems, Requirements for (Navy)
MIL-I-6869	Impregnants for Aluminum Alloy and Magnesium Alloy Castings
MIL-P-11268	Parts, Materials, and Processes Used in Electronic Equipment
MIL-L-12606	Loudspeaker, Permanent Magnet (Unencased, 4" diameter cone, 2-watt; Fungus; Gunblast; and Immersion-Resistant), Type LS-445/U
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Electronic Equipment

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Equipment
MIL-STD-147	Palletized Unit Loads for 40" x 48" Pallets
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-276	Impregnation of Parous Non Ferrous Metal Castings
MIL-STD-454	Standard General Requirements for Electronic Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

MIL-STD-461 Notice 4	Electromagnetic Interference Characteristics, Requirements for Equipment, Subsystem and Systems
MIL-STD-462 Notice 3	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-781	Reliability Tests Exponential Distribution
MIL-STD-810	Environmental Test Methods
MIL-STD-965	Parts Control Program
MIL-STD-1188	Commerical Packaging of Supplies and Equipment
MIL-STD-1562	Lists of Standard Microcircuits

DRAWINGS

ELECTRONICS COMMAND

SC-A-46439	List of Accessories for Package Tester
DL-SC-B-658722	Amplifier, Audio Frequency AM-6747( )/V

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 The following requirements are applicable to Amplifier, Audio Frequency, AM-6747( )/V.

3.2 First article samples. When specified in the contract or purchase order the contractor shall furnish five First Article Samples in accordance with paragraph 4.3 (See 4.3 & 6.2).

3.3 Construction. Amplifier, Audio Frequency AM-6747( )/V shall be constructed in accordance with the drawings on Drawing and Data List DL-SC-B-658722.

3.4 Selection of electronic parts, materials and processes. Selection of electronic parts, devices, components, materials, processes, and technologies shall be in accordance with MIL-P-11268 except that MIL-STD-965 shall be used in lieu of MIL-STD-749 for parts control approval procedures. Microcircuits shall be selected from MIL-STD-1562 (see 4.4).

3.5 Finish, protective. The amplifier shall be given protective finishes in accordance with MIL-F-14072 and the equipment drawings. This includes finish of hardware, such as handles, hinges, screws, etc., and necessary touch up after mounting. The final paint film on Type I surfaces shall be forest green enamel, film designation W per MIL-F-14072. (See 4.4).

3.6 Marking. (See 4.4).

3.6.1 Conformance. Marking shall conform to MIL-STD-130. Front panel marking shall conform to MIL-M-13231, Group I. All functional markings shall be easily discernible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.6.2 Serial numbers. Amplifier, Audio Frequency AM-6747( )/V shall be serial numbered.

3.7 Impregnation of aluminum castings. All exterior aluminum castings shall be impregnated in accordance with MIL-STD-276, using Type II impregnating material in accordance with MIL-I-6869. Castings which have been impregnated shall be marked "IMP". The impregnation shall be to correct general seepage only and shall not be used to correct poor foundry techniques or significant porosity (see 4.4).

3.8 Service conditions. The equipment shall meet the following service conditions.

3.8.1 Low temperature.

3.8.1.1 Operating. The equipment shall be operable without degradation in specified performance at air temperatures as low as -50°F. (See 4.7.2).

3.8.1.2 Storage and transportation. The equipment shall withstand exposure to ambient air temperatures as low as -70°F. (See 4.7.2).

3.8.2 High temperature.

3.8.2.1 Operating. The equipment shall be operable without degradation in specified performance at ambient air temperatures as high as 125°F plus the effects of solar radiation at a rate of 360 BTU/ft^2/hr (see 4.7.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.8.2.2 Storage and transportation. The equipment shall withstand exposure to ambient air temperature as high as +160°F (see 4.7.3).

3.8.3 Humidity. The equipment shall exhibit no physical damage such as corrosion, rust, blistering, swelling or deterioration of parts and materials, and shall meet the requirements of 3.9.2 and 3.9.5 during the operating time specified in 4.7.4.

3.8.4 Vibration and shock.

3.8.4.1 Vibration. The equipment shall withstand vibration and shock induced during vehicular transport as part of a mobile assemblage or installed within or upon a military vehicle, over all types of roads and cross-country terrain; and shocks encountered during servicing (see 4.7.5).

3.8.4.2 Shock, ballistic. After being subjected to the test of 4.7.6 the amplifier shall meet the requirements of 3.9.2 and 3.9.5 and no physical damage shall be present (see 4.7.6).

3.8.5 Immersion resistance. The equipment shall be immersion proof to a covering depth of 3 feet of water for a period of not less than two hours. There shall not be water leakage into the circuitry portion of the amplifier (see 4.7.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.8.6 Fungus. After the fungus test of 4.7.8 the equipment, including accessories, shall be visually examined, using a 10 power magnifier. The equipment, including accessories, shall show no more than six minute unrelated spots, each no greater than 0.015 square inch in area, of sparse microbial growth as evidenced by growth colonization which includes branching and sporulation on or within each cubic foot, or fraction thereof, of equipment assembly volume. Isolated instances of partial tubular germination shall not be included in this evaluation (see 4.7.8).

3.8.7 Salt fog. After testing as specified in 4.7.9 the equipment when examined with the aid of a ten-power magnifier shall show no evidence of corrosion as evidenced by any visible degradation that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface. (See 4.7.9).

3.9 Electrical. The amplifier shall meet the following electrical requirements (See 4.8).

3.9.1 Voltage regulation. The voltage regulator shall furnish +12 ±0.7 volts DC from a 22 to 32 volt DC supply (See 4.8.3).

3.9.2 Distortion. The total harmonic distortion shall not exceed 3 percent (See 4.8.4).

3.9.3 Frequency response. The amplifier frequency response shall be within ±2 dB of 1000 Hz reference from 300 to 3500 Hz. (See 4.8.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.9.4 Voltage gain. The voltage gain of the amplifier shall be a minimum of 1.2 dB at 1000 Hz (see 4.8.6).

3.9.5 Audio output power. The minimum audio output power shall be 400 mW (see 4.8.7).

3.9.6 Muting. When a push-to-talk (PTT) signal is applied from a handset, the amplifier output shall drop to zero volts (see 4.8.8).

3.10 Loudspeaker LS-445/U. Loudspeaker LS-445/U shall be constructed in accordance with drawings listed on DL-SC-B-658722 and shall meet the requirements of MIL-L-12606 (see 4.9).

3.11 Electromagnetic compatibility. The AM-6747( )/V Audio Frequency Amplifier shall comply with the following emission and susceptibility requirements of MIL-STD-461, Notice 4 (see 4.10).

CE01	CS01	RE02	RS03
CE03	CS02	*RE02.1	*RS03.1
CE04	CS06		
CE05			

*The upper frequency limit of test shall be 1GHz.

NOTE: Switch Transients from the PTT Relay are exempt from the Emission limit of MIL-STD-461, Notice 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.11.1 Electromagnetic susceptibility. The electrical performance requirements specified in 3.9 shall not be degraded by the susceptibility requirements CS01, CS02, CS06, RS03 and RS03.1 (see 4.10.1).

3.12 Interchangeability. Like units, assemblies, sub-assemblies, and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment. Individual items shall not be hand-picked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc. The equipment shall meet the requirements of Requirement 7, MIL-STD-454. All modules shall be fully interchangeable (see 4.11).

3.13 Operational inspection. Amplifier, Audio Frequency AM-6747( )/V, shall be subjected to a final inspection, as specified in 4.13, after all other inspections and tests have been completed, to determine that the unit is operable prior to packaging (see 4.16).

3.14 Preconditioning.

3.14.1 Bounce preconditioning. The amplifier shall be capable of meeting the requirements herein without subsequent processing after subjection to the bounce preconditioning of 4.6.1 (see 4.5).

3.14.2 Burn-in. Each amplifier shall be subject to a 48 hour (on-time) burn-in period with the final 24 hour (on-time) failure free in accordance with 4.6.2 (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.15 Systems safety engineering. (See 4.1.5).

3.15.1 Personnel hazards. Personnel hazards shall be kept to a minimum in accordance with MIL-STD-454, Requirement 1.

3.15.2 Radioactive materials. Radioactive materials shall not be used (e.g., luminous dials/markings, electron tubes, lenses).

3.15.3 Mechanical hazards. Finished items should bear no raw, sharp or rough metal edges on any parts.

3.15.4 Chemical hazards.

a. The equipment shall not contain materials or components which during any phase of the life cycle will envolve toxic gases, vapors, fumes or droplets.

b. Materials which support combustion or which are capable of causing an explosion shall not be used in the equipment.

c. Flammable materials shall be in accordance with MIL-STD-454, requirement 3.

d. Dissimilar metal combinations shall be in accordance with requirement 16 of MIL-STD-454 for Class II environment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.16 Workmanship. Amplifier, Audio Frequency, AM-6747( )/V shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454 and the applicable portions of the following paragraphs herein (see 4.13).

a. In MIL-P-11268:

Plastic material and parts.
Wiring and cabling, including:
- Slack
- Protection
- Clearance
- Splicing
- Connections, General
- Grounding, General
- Shielding on wire and cable
- Printed Wiring Assemblies
- Printed Wiring Boards
- Soldering and Brazing
- Cleaning of units
- General requirements for securing of parts
- Process for welding
- Controls
- Self-tapping screws
- Cleaning prior to welding

b. In this specification:

3.3	Construction
3.5	Finish
3.6	Marking
3.7	Casting impregnation & quality
3.15	System Safety Engineering

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. First Article Inspection (Does not include packaging) (See 4.3).

b. Inspection covered by subsidiary documents (See 4.4).

c. Quality conformance inspection.

(1) Quality conformance inspection of equipment before packaging (See 4.5).

(2) Quality conformance inspection of packaging (See 4.13).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.3 First article. Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor.

4.3.1 First article units. The contractor shall furnish five first article units of the AM-6747( )/(V).

4.3.2 First article inspection. This inspection will be performed by the contractor unless otherwise specified in the contract. It shall consist of the inspection specified in the subsidiary documents covering the items listed in 4.4; the preconditioning specified in 4.6.1 and 4.6.2, and the inspection specified for Group A, Group B, and Group C (See TABLES III, IV and V respectively). Order of environmental tests shall be specified in TABLE I.

4.3.3 First article data. The first article test plan and report(s) shall be as specified in the contract or purchase order.

4.4 Inspection covered by subsidiary document. The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before packaging:

ITEM	WHERE REQUIRED
Parts, Materials and Processes used in Electronic Equipment	3.4
Finish	3.5
Marking	3.6
Casting impregnation	3.7
Workmanship	3.16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection of equipment before packaging. The contractor shall perform the inspections specified in 4.4, 4.6, and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements.

TABLE I - First article inspection

Order of Inspection	Number of Samples				
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5
Non-damaging (See Note 1)					
Low Temperature	1				
High Temperature	2				
Electromagnetic Compatibility					1
Potentially Damaging					
Humidity		1			
Vibration				1	
Shock (Ballistic)				2	
Immersion Resistance (See Note 2)				3	
Fungus (See Note 3)			1		
Salt Fog	3				

Note 1: Other first article inspection may precede, follow, or be interspersed between the non-damaging tests.

Note 2: The immersion test shall be performed before and after vibration and shock testing and on the same unit.

Note 3: Following fungus and salt fog testing, the test item shall be thoroughly washed, dried, and refurbished, if necessary before proceeding with subsequent tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.5.1 Group A inspection. Each unit (and each sub-assembly and assembly) identified in TABLE III on contract or purchase order shall be inspected for conformance to the inspections specified in TABLE III. The order of inspection of the sub-assemblies, assemblies, and units (end equipment) shall be as follows:

a. Prior to their assembly into the end equipment, the assemblies and sub-assemblies identified in TABLE III shall be subjected to a 100% visual/mechanical and electrical inspection by the contractor for conformance with the inspection requirements provided in TABLE III.

b. After completion of the above 100% inspection by the contractor discrete lots shall be formed from the sub-assemblies and assemblies which passed the 100% inspection and these shall be subjected by the contractor to sampling inspection utilizing the procedures of MIL-STD-105 using general inspection levels and AQL's indicated in TABLE III (Quality Assurance Verification). Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105.

c. Subassemblies and assemblies from the discrete lots which have passed the above Quality Assurance Verification Inpsection shall be assembled into the end equipments which shall then be subjected by the contractor to the preconditioning requirements of 4.6 and a 100% visual/mechanical and electrical inspection in accordance with TABLE III in that order.

NOTE: Subassemblies and assemblies are not required to undergo further visual/mechanical and electrical inspection as part of the contractor's 100% Group A Inspection of the end equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

d. After completion of the above 100% inspection by the contractor, discrete lots shall be formed from units which passed the 100% inspection and these shall be subjected to the contractor's sampling inspection utilizing the procedures of MIL-STD-105 using the general inspection levels and AQL's indicated in TABLE III. Group A electrical inspection shall be performed in the order shown in TABLE III with the exception that the Operational Test (4.16) shall be last (See 6.7).

NOTE: Subassemblies and assemblies are not required to undergo further visual/mechanical and electrical inspection as part of the contractor's sampling inspection of the end equipment.

4.5.1.1 Lot size. Lot size shall be determined in accordance with TABLE II.

TABLE II. Lot formation

Production Rate	Size of Lot
500 or more per month	One week's production
51 to 499 per month	Two week's production
0 to 50 per month	One month's production

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection

INSPECTION	REQ'T PARA	INSP PARA	AQL% MAJOR	AQL% MINOR
Visual & Mechanical				
Assembled PCB	3.15	4.12	0.65%	2.5%
Assembled AM-6747( )/V	3.15	4.12	1.0%	4.0%
Electrical				
Loudspeaker LS-445/U AM-6747( )/V	3.10	4.9	1.0%	*
Voltage Regulation	3.9.1	4.8.3		*
Distortion	3.9.2	4.8.4		*
Frequency Response	3.9.3	4.8.5	1.0 DPHU	*
Voltage Gain	3.9.4	4.8.6	for the	*
Audio Output Power	3.9.5	4.8.7	group	*
Muting	3.9.6	4.8.8		*
Operational	3.13	4.16	1.0%	*

*All electrical defects shall be considered major.

4.5.2 Group B inspection. Group B inspection shall normally be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection. This inspection shall conform to TABLE IV and the special inspection levels of TABLE I of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE IV. Group B inspection

INSPECTION	REQ'T PARA	INSP PARA	AQL% (See 4.5.2.1)
Immersion resistance	3.8.5	4.7.7	4.0%
Interchangeability mechanical	3.12	4.11.1	6.5%
Interchangeability electrical	3.12	4.11.2	6.5%

4.5.2.1 Group B sampling plans. The Group B sampling plans for the acceptable quality levels (AQL) listed in TABLE IV, shall be Inspection Level S-4.

AQL	Inspection Level for Normal and Tighter Inspection	Inspection Level Reduced Inspection
4.0%	S-4	S-3
6.5%	S-4	S-3

4.5.2.2 Order of inspection within Group B. Group B inspection shall be performed in any order which is satisfactory to the Government.

4.5.3 Group C inspection. This inspection shall consist of the tests specified in TABLE V and shall be performed on sample units that have been subjected to and passed Group A and Group B inspection. Samples shall be selected in accordance with 4.5.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.5.3.1 Sampling for Group C inspection.

TABLE V - Group C Inspection

INSPECTION	REQ'T PARA	INSP PARA
Subgroup I		
Immersion (See Note 1)	3.8.5	4.7.7
Vibration	3.8.4.1	4.7.5
Shock, Ballistic	3.8.4.2	4.7.6
Subgroup II		
Electromagnetic Compatibility	3.11	4.10
Low Temperature	3.8.1	4.7.2
High Temperature	3.8.2	4 7.3
Humidity	3.8.3	4.7.4
Fungus (See Note 2)	3.8.6	4.7.8
Salt Fog	3.8.7	4.7.9

NOTE 1: The immersion test shall be performed prior to and following vibration testing of the same item.

NOTE 2: Following fungus and salt fog testing, the test item shall be thoroughly washed, cleaned, dried, and refurbished, if necessary before proceeding with subsequent tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.5.3.1.1 Subgroup I. For this subgroup, two (2) units from the first fifty (50) units of production quantity shall be selected. For subsequent inspection two units from each 300 units shall be selected.

4.5.3.1.2 Subgroup II. For this subgroup, two (2) units shall be selected from the first fifty (50) units of production. For subsequent inspection two (2) units shall be selected from each 500 production units.

4.5.3.2 Order of inspection within Group C. Group C inpsection shall be performed in the order shown in TABLE V.

4.5.3.3 Group C failures. Actions required relative to Group C failures shall be as specified in the contract or purchase order.

4.5.4 Reinspection of conforming Group B and C sample units. Unless otherwise specified, sample units which have been subjected to and passed both Group B and Group C inspection may be accepted on the contract provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.6 Pre-conditioning.

4.6.1 Bounce pre-conditioning. The amplifier, with shock mounts (if any) removed or blocked, shall be placed on its cover on the table of the Package Tester, Type 1000-SC, as made by L.A.B. Corporation, Skaneatales, New York, or equal. Accessories shall be selected from those listed on SC-A-46439. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32 inch thick strip of material under one corner or edge of the unit to a distance of 3 inches as the unit bounces. The unit shall be subjected to this pre-conditioning for 1 minute. After bounce pre-conditioning, the unit shall not be repaired, aligned, cleaned or otherwise changed prior to subjection to inspection (See 3.14.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.6.2 Burn-in. Each amplifier shall be subjected to a 48 hour (on time) burn-in period with the final 24 hours (on time) failure free. The test shall be run continuously using the test conditions of Test Level C of MIL-STD-781 and an input voltage of 25.5 volts DC. Relays shall be energized for 1 minute out of every 10. A failure for burn-in purposes shall be defined as either less than 400 milliwatts of amplifier audio output power or more than 3% total harmonic distortion at 1000 Hz. All failures shall be recorded and analyzed in accordance with paragraph 5.11.2.1 of MIL-STD-781 (See 3.14.2).

4.7 Performance tests. The equipment shall be fully operational prior to, during, and following environmental service condition tests as required by the test procedures specified herein. The electrical performance measurements to verify proper operation are specified in 3.9.2 (Distortion) and 3.9.5 (Audio Output Power).

4.7.1 Temperature test.

4.7.2 Low temperature. Perform the tests referenced in 4.7 and record pre-test data. Subject the equipment to the test of Method 502.1, Procedure I, of MIL-STD-810. The storage temperature in Step 2 shall be -57°C (-70°F), and shall be maintained for a period of not less than 2 hours following stabilization of the test item. Low operating temperature in Step 4 shall be -46°C (-50°F). After temperature stabilization at Step 4, conduct electrical performance measurements in accordance with tests specified in 4.7 and compare the results with the pre-test data. Failure to meet the requirements of 3.9.2 and 3.9.5 shall be cause for rejection of test item. Operate the test item at standard ambient conditions and compare the results with pre-test data (See 3.8.1.1 and 3.8.1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.7.3 High temperature. Perform the tests referenced in 4.7 and record pre-test data. Subject the equipment to the test of Method 501.1, Procedure II, of MIL-STD-810. The storage temperature in Step 4 shall be +71°C (+160°F), and shall be maintained for a period of not less than 2 (two) hours following stabilization of the test item. High operating temperature in Step 7 shall be +71°C (+160°F). (This includes effects of solar radiation). After temperature stabilization at Step 7, conduct electrical performance measurements in accordance with tests specified in 4.7 and compare the results with pre-test data. Failure to meet the requirements of 3.9.2 and 3.9.5 shall be cause for rejection of the test item. Operate the test item at standard ambient conditions and compare the results with pretest data (See 3.8.2.1 and 3.8.2.2).

4.7.4 Humidity (moisture-resistance) test. Perform the tests referenced in 4.7 and record pre-test data. Subject the equipment to the test of Method 507.1, Procedure II, of MIL-STD-810. In Step 6, conduct electrical performance measurements in accordance with the tests specified in 4.7, (during the pre-test data). These measurements shall be made during the last five hours of the last humidity cycle. Do not move equipment from the humidity chamber for measurements, and do not leave power "on" after measurements have been completed. If any equipment fails to meet the specified performance during cycling, it shall be realigned and/or readjusted once and the test continued. No replacement of parts shall be permitted. If the equipment still fails to meet specified performance during cycling, or fails subsequently the requirements of 3.9.2 and 3.9.5 it does not pass the test (See 3.8.3).

4.7.5 Vibration. Perform the tests referenced in 4.7 and record pre-test data. Subject the equipment to the test of Method 514.1, Procedure IX, Part 2, of MIL-STD-810. Energize the equipment and conduct electrical performance measurements in accordance with tests specified in 4.7, during not less than 10 minutes of each 3/4 hour test period. Compare the results with the pre-test data. Failure to meet the requirements of 3.9.2 and 3.9.5 shall be cause for rejection of the test item. Any physical damage that could cause structural failure should also be cause for rejection (See 3.8.4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.7.6 Shock, ballistic. Perform the tests referenced in 4.7 and record pre-test data. Equipment shall be subjected to the test of MIL-S-901 for type A, lightweight equipment. Mounting of the equipment on the test plate shall simulate the most severe condition which may be encountered in service. At the conclusion of the test, conduct electrical performance measurements in accordance with the tests specified in 4.7 and compare the results with pre-test data (See 3.8.4.2).

4.7.7 Immersion resistance. The amplifier shall be submerged in fresh tap water to a depth of at least 3 feet and maintained at that depth for a period of 2 hours. The water temperature shall be 65 to 75°F. At the end of the 2 hour submersion period, the equipment shall be removed from the tank and shall be drained, wiped, and allowed to dry naturally for 30 minutes. At the completion of 30 minute drying period, the equipment shall be tested in accordance with 4.8.7 and examined for leakage into the unit. The equipment shall be allowed to dry at room ambient conditions for 48 hours and shall then be tested in accordance with 4.8.4 and 4.8.5 (See 3.8.5).

4.7.8 Fungus test. The equipment shall be subjected to the fungus test specified in Method 508.1, Procedure I of MIL-STD-810. There shall be abundant growth colonization (6.3) on 50 percent or more of the area of the control item after 14 and 28 days. No cleaning of the equipment is permitted for 72 hours prior to the fungus test. Handling, prior to and during testing, shall be accomplished without contamination of the equipment. Inability of the equipment to meet the requirements of 3.8.6 shall constitute failure of this test (See 3.8.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.7.9 Salt fog. The equipment shall be subjected to Test Method 509.1 of MIL-STD-810. At the conclusion of the test, the equipment shall be examined for evidence of visible corrosion. Inability of the equipment to meet the requirements of 3.8.7 shall constitute failure of this test (See 3.8.7).

4.8 Electrical.

4.8.1 Standard test conditions. All tests shall be conducted under the following conditions, except as specified for the individual tests:

Temperature	Room ambient
Humidity	Room ambient
Input voltage	25.5 volts DC
Input voltage, audio	1.8 volts RMS
Audio load, impedance	8 ohms
Audio frequency	1000 Hz
Source impedance	600 ohms

4.8.2 Standard test equipment. Standard test equipment is listed in Table VI by manufacturer and model number. In all cases, equivalent substitutes may be used with prior approval of the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE VI - Standard Test Equipment

1. Audio Oscillator	Output voltage: 15 volt RMS, 5 Hz to 60 KHz, Hewlett-Packard Type 200 CD or equivalent
2. VTVM	Voltage Range: AC-10 mV to 300 V RMS, 10 Hz to 4 MHz, Hewlett-Packard Type 400D, or equivalent
3. Power Supply	Output voltage: 0-32 volts DC capable of 300 mV Triplett type 630A or equivalent
4. Distortion Analyzer	Range: 5 Hz to 600 KHz, 300 uV to 300 V RMS, Hewlett-Packard Type 330B, or equivalent
5. DC Volt-Ohm Meter	Voltage Range: 1 mV to 1000V Resistance: 1 OHM to 100 Megohms Hewlett-Packard Type 412A, or equivalent.

4.8.3 Voltage regulation. The equipment shall be connected as shown in FIGURE I. Under standard test conditions adjust the signal generator output level to 1.8 volts RMS as indicated on the VTVM. Adjust the power supply to an output level of 22 volts DC as indicated on the multimeter. Note the output voltage at PIN 2 of the amplifier module. Adjust the power supply to an output level of 25.5 volts DC, and repeat the test. Adjust the power supply to an output level of 32 volts DC and repeat the test. The voltage regulator output shall conform to 3.9.1 (See 3.9.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.8.4 Distortion. The equipment shall be connected as shown in FIGURE 1, except that the output leads shall be connected to the distortion analyzer AUDIO FREQUENCY input. Set the distortion analyser input FUNCTION switch to AUDIO FREQUENCY. Set the analyzer METER RANGE switch to 3.0 volts RMS. Adjust the power supply to an output level of 25.5 volts DC, as indicated on the multimeter. Adjust the signal generator to an output level of 1.8 volts RMS. Tune the signal generator to 300 Hz. Set the distortion analyzer FUNCTION switch to SET LEVEL. Adjust the distortion analyzer FUNCTION SWITCH to SET LEVEL. Adjust the distortion analyzer INPUT SENSITIVITY control to obtain an indication of 2.0 on the upper meter scale. Set the distortion analyzer FUNCTION switch to DISTORTION. Tune the distortion analyzer FREQUENCE controls and the BALANCE control to obtain a null indication on the meter. Reduce the METER RANGE switch as necessary to obtain an easy-to-read null indication. Note the output indicated on the distortion analyzer. Compute the output distortion using the formula: Distortion = $\frac{Eout}{2}$ x 100%. Repeat the test with frequencies of 1000, 2000 and 3500 HZ. The distortion shall not exceed 3.0 percent (see 3.9.2).

4.8.5 Frequency response. The equipment shall be connected as shown in FIGURE 1. Adjust the power supply to an output level of 25.5 volts DC, as indicated on the multimeter. Set the distortion analyzer METER RANGE switch to 3.0 volts RMS. Set the distortion analyzer output level to 1.8 RMS as indicated on the VTVM. Tune the signal generator to 1000 Hz. Note the output level in dB as indicated on the distortion analyzer. Using the 1000 Hz as a reference, repeat the test at frequencies of 300, 2000, and 3500 Hz. The measurements shall meet the acceptance limits of 3.9.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.8.6 Voltage gain. The equipment shall be connected as shown in FIGURE 1. Set the distortion analyzer METER RANGE switch to 3.0 volts RMS. Set the distortion analyzer FUNCTION switch to METER. Adjust the signal generator output level to 1.8 volts RMS as indicated on the multimeter. Tune the signal generator to 1000 Hz. Note the dB output level indicated on the distortion analyzer. The voltage gain shall be the difference between the input voltage in dB, and the output voltage in dB. The voltage gain shall be a minimum of 1.2 dB at 1000 Hz (See 3.9.4).

4.8.7 Audio output power. Connect the equipment as shown in FIGURE 1. Under standard test conditions set the distortion analyzer METER RANGE switch to 3.0 volts RMS. Set the distortion analyzer FUNCTION switch to METER. Under standard test conditions, adjust the signal generator output level to 1.8 volts RMS as indicated on the VTVM. Note the output level as indicated on the distortion analyzer. Compute the output power using the formula:

$$\text{OUTPUT POWER} = \frac{E^2_{out}}{8}$$

The output power shall be a minimum of 400 mW for compliance with 3.9.5 (See 3.9.5).

4.8.8 Muting. The equipment shall be connected as shown in FIGURE 1. Set the distortion analyzer METER RANGE switch to 3.0 volts RMS. Set the distortion analyzer FUNCTION switch to METER. Under standard test conditions, adjust the signal generator output level to 1.8 volts RMS as indicated on the VTVM. Close switch S1. Note the output level as indicated on the distortion analyzer. Upon closure of switch S1, the output voltage shall drop to zero volts (See 3.9.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.9 Electrical performance of Loudspeaker LS-445/U. Prior to assembly in the AM-6747( )/V, Loudspeaker LS-445/U shall be tested to determine compliance with the performance requirements specified in MIL-L-12606 (See 3.10).

4.10 Electromagnetic compatibility. The Amplifier, AM-6747( )/V, shall be tested for compliance with the requirements of 3.11. Test methods and procedures shall be in accordance with MIL-STD-462, Notice 3 as detailed in a contractor prepared government approved test plan. Tests shall be performed with the equipment operating under standard test conditions in accordance with 4.8.1.

4.10.1 Electromagnetic susceptibility. During susceptibility testing the amplifier shall meet the electrical performance requirements of 3.9 and shall be operated as specified in 4.8.3 through 4.8.7 (See 3.11.1).

4.11 Inspection for interchangeability.

4.11.1 Inspection for mechanical interchangeability. The dimensions listed below shall be gauged or measured to determine conformance with physical interchangeability requirements of 3.12. When a listed dimension is not within specified or design limits, it shall be considered a major defect (See 3.12).

a. External and internal dimensions of cases, covers, and insertable assemblies when such dimensions affect mating of parts.

b. Dimensions of cavities, when dimensions affect insertion of items.

c. Location of connectors, locking pins and mountings which receive mating parts, plug-in assemblies and major units.

d. Size and form of special threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.11.2 Inspection for electrical interchangeability. Assemblies, subassemblies and modules from three amplifiers shall be interchanged. The units shall then be tested to determine compliance with the electrical performance requirements specified in Table III.

4.12 Visual and mechanical inspection. The equipment shall be examined for the defects listed in MIL-STD-252 (See 3.16).

4.13 Quality conformance inspection of packaging. Packaging shall be inspected in accordance with MIL-P-116 to determine conformance with the applicable provisions of Section 5.

4.14 Rough handling test. (Packaging). When rough handling test in accordance with MIL-P-116 is required by the contract (See 6.2), the following functional test shall be conducted to determine freedom from operational malfunction caused by the rough handling:

PARAGRAPH	MEASUREMENT
3.9.2	Distortion
3.9.5	Audio output power

4.15 Systems safety engineering test. A safety evaluation shall be performed during production to insure that the requirements of 3.15 are met (See 3.15).

4.16 Operational inspection. Amplifier, Audio Frequency AM-6747( )/V shall be operated under standard test conditions of 4.8.1, and shall meet full specification performance for the measurement specified in 4.8.7 (See 3.13).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B or Commercial as specified (see 6.2(c)).

5.1.1 Level A.

5.1.1.1 Cleaning. Amplifier, Audio Frequency AM-6747( )/V shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Amplifier, Audio Frequency AM-6747( )/V shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservative application. No preservative required.

5.1.1.4 Unit packing. Unit packing shall be in accordance with the methods or submethods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Hardware. Each set of hardware, including spares, shall be stowed in a cotton mailing bag conforming to PPP-B-20. Close the bag with the drawstrings provided.

5.1.1.4.2 Spare lamp. Each lamp shall be unit packed Method III as follows: cushion the lamp by wrapping with paperboard conforming to PPP-P-291, Type III. Secure the wrap with tape conforming to PPP-T-45, Type III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5.1.1.4.3 Amplifier, Audio Frequency AM-6747( )/V. Each amplifier shall be unit packed Method III as follows: position the hardware and spare lamp, unit packed as specified in 5.1.1.4.1 and 5.1.1.4.2, on the front of the amplifier and secure with tape conforming to PPP-T-76. Cushion the amplifier, together with the hardware and lamp, by wrapping a double thickness of paperboard conforming to PPP-P-291, Type III. Secure the wrap with tape conforming to PPP-T-76. Place the cushioned unit within a close-fitting fiberboard box conforming to PPP-B-636, W5C. Close the box in accordance with the appendix of the box specification.

5.1.2 Level B. Cleaning, drying, preservative application and unit packing shall be as specified in 5.1.1.

5.1.3 Commercial preservation. Preservation shall be as specified in MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of Amplifier, Audio Frequency AM-6747( )/V, unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2, or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds,or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type 1, finish A.

5.2.1.1 Unitization. Palletization shall be required when: Containers specified in 5.2.1 do not require skids; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers packed as specified in 5.2.1, except that container strapping may be omitted, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type 1, finish A, or shrink film.

5.2.2 Level B. A quantity of Amplifier, Audio Frequency AM-6747( )/V, unit packed as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S=781, type 1, finish A, or shrink film. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5.2.2.1 Unitization. Palletization shall be required when quantities per destination comprise a pallet load. A quantity of Amplifier, Audio Frequency AM-6747( )/V, unit packed as specified in 5.1, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type 1, finish A, or shrink film.

5.2.3 Commercial packing. Packing shall be in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

6. NOTES.

6.1 Intended use. Amplifier, Audio Frequency AM-6747( )/V is intended primarily for use in a vehicular communication system. The unit mounts directly to a military vehicle and is normally used with the TSEC/KY-8, TSEC/KY-38, TSEC/KY-57, or TSEC/KY-65. (See 1.1).

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Type required.

c. Level A, level B or Commercial preservation and packing (see Sect. 5).

d. First article pack(s) as follows:

Makeup of pack(s)

Number of each kind of pack to be submitted.

Inspection to be performed thereon.

e. Marking and shipping of samples.

f. Place of final inspection.

g. Technical literature required.

h. Quantity of running spare parts required.

i. When rough handling test is required (see 4.15).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

j. Size data. Size limitations cited herein are based on the dimensions of the equipment for which these requirements were established. Requests to exceed these limitations must be supported by data indicating why limitation cannot be met and recommend a revised limitation.

6.3 Definitions.

6.3.1 Equipment divisions. The terms used herein for equipment divisions conform to MIL-STD-280.

6.3.2 Definitions of inspection terms. The inspection terms used herein conform to MIL-STD-109. The following are abbreviated definitions selected from those given therein for immediate reference.

6.3.2.1 Inspection. Inspection is the examination or testing or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

6.3.2.2 Examination. Examination consists of simple, generally nondestructive determinations of compliance, without use of special testing equipment.

6.3.2.3 Testing. Testing consists of determinations of compliance, using technical means.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

6.3.3 Branching. Branching is a connected arrangement of filaments (hyphae) formed by shoots or secondary stems growing from the main stem or filament (hypha).

6.3.4 Growth colonization. Growth colonization is a mass of individual plants, generally of one species, living together; or a group of hyphae which is formed from one spore or cell and may be one individual plant. Colonization which completely covers the surface of the nutrient material constitutes abundant growth.

6.3.5 Microbial growth. Microbial growth is the growth of very minute organisms. Such organisms when present in large numbers may provide a colony visible to the naked eye.

6.3.6 Sporulation. Sporulation is the formation of minute unicellular reproductive or dormant bodies, called spores.

6.3.7 Tubular germination. Tubular germination is partial growth by the production of hyphae, which are tubular shaped fungal filaments. Tubular germination constitutes restricted individual spore growth not proceeding to colonization.

6.4 Humidity. Natural climatic extremes may include 100 percent relative humidity, with condensation, up to 4 hours at a time. This requirement (see 3.8.3) is specified by MIL-STD-210. The moisture resistance test (see 4.7.4) using MIL-STD-810, is a procedure that gives a practical test approximating the natural conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

6.5 Group C inspection. Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action (see 4.5.3.3).

6.6 Nomenclature. The parenthesis in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: AM-6747A/V. The contractor should apply for nomenclature in accordance with the applicable clause in the contract (see 1.1).

6.7 Location of operational tests. It is required that the operational tests be performed at a location that will minimize handling after this inspection is completed. (see 4.16).

6.8 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

Custodian
Army - CR

Preparing Activity
Army - CR

Project No.
5830A056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

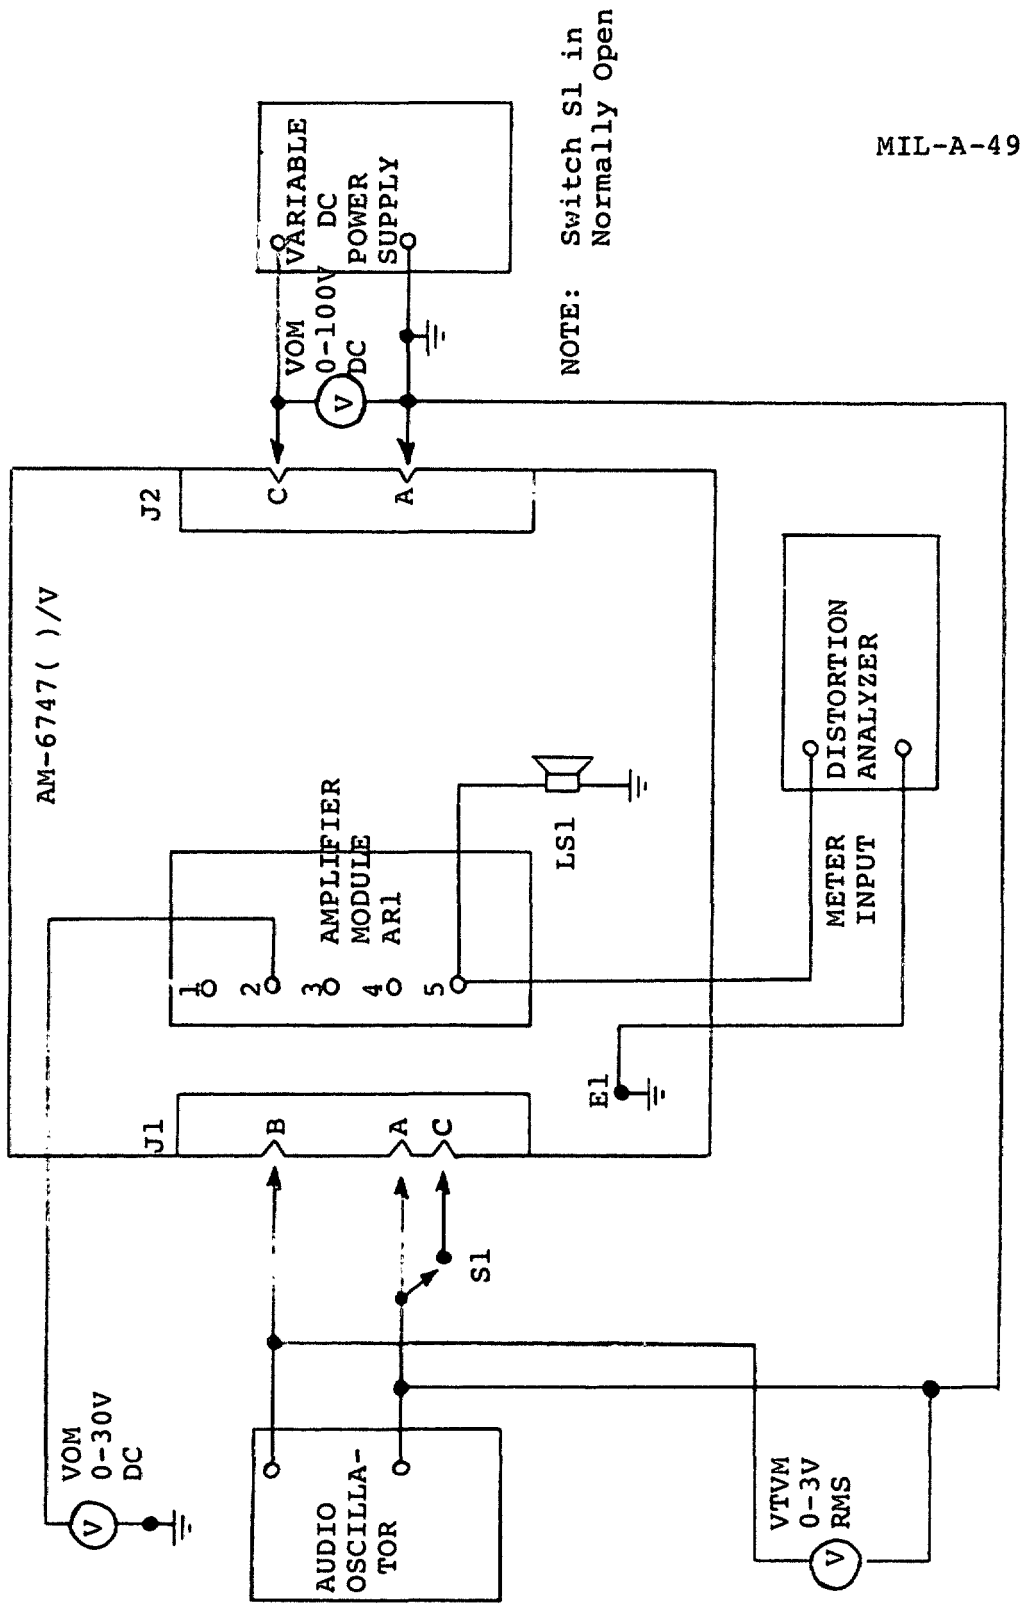


FIGURE 1. Voltage Regulation, Distortion, Frequency Response, Gain, Output Power and Muting Test

☆U.S. GOVERNMENT PRINTING OFFICE: 1978 — 703-122/3572

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-A-49095A (CR)

NAME OF ORGANIZATION AND ADDRESS
US Army CORADCOM
ATTN: DRDCO CM IM
Ft Monmouth, NJ 07703

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   [ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.