MILITARY SPECIFICATION

TELEPHONE SET TA-838( )/TT

This specification is approved for use by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of 2-wire/4-wire field telephone, designated as Telephone Set TA-838( )/TT. (See 6.1 and 6.5.)

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-71	Pallet, Materials-handling, Wood
QQ-S-781	Strapping, Steel, Flat and Seals
PPP-B-585	Box, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Cdr, US Army Electronics Command, ATTN: DRSEL-RD-TS-S, Fort Monmouth, N.J. 07703 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5805

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

PPP-B-640	Box, Fiberboard, Corrugated, Triple Wall
PPP-F-320	Fiberboard, Corrugated and Solid Sheet Rock
PPP-S-760	Strapping, Nonmetallic (and Connectors)
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced

MILITARY

MIL-P-116	Preservation-packaging, Methods of
MIL-P-11268	Parts, Materials, and Processes used in Electronics Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Electronic Equipment
MIL-P-19644	Plastic Molding Material (Polystyrene Foam)
MIL-P-26514	Polyurethane Foam

STANDARDS

FEDERAL

FED-STD-141	Paint, Varnish, Lacquer and Related Materials, Methods of Inspection, Sampling and Testing

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized and Containerized Unit Loads
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-454	Standard General Requirements for Electronic Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment Subsystems, and Systems
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-781	Reliability Tests Exponential Distribution
MIL-STD-810	Environmental Test Methods

DRAWINGS

ELECTRONICS COMMAND

DL-SM-B-790663 Telephone Set TA-838( )/TT

SM-A-790762 Production Test Procedures for Telephone Set TA-838( )/TT

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First Article. When specified in the contract or purchase order, the contractor shall furnish sample units for First Article inspection and approval (See 4.3).

3.2 Construction. The equipment shall be constructed in accordance with the requirements of this specification and Drawing and Data List DL-SM-B-790663, (including the requirements for parts, materials, and processes thereon) (See 4.4).

3.3 Parts, Materials, and Processes, General. In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein, shall apply (See 4.4).

3.4 Finish. The equipment shall be finished in accordance with MIL-F-14072 and the equipment drawings (See 4.4).

3.5 Marking

3.5.1 General. Marking shall conform to Specification MIL-M-13231(See 4.4).

3.5.2 Serial Numbers. The equipment shall be serially numbered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.6 Interchangeability. Like units, assemblies, subassemblies and replaceable parts shall conform to Requirement 7 of MIL-STD-454 (See 4.8).

3.7 Preconditioning. The equipment shall be capable of meeting the requirements herein, without subsequent processing, after subjection to the bounce preconditioning of 4.6.1 and after completing the 24 hour failure free burn-in/debugging of 4.6.2.

3.8 Electrical

3.8.1 Random Noise. The equipment shall not generate random noise greater than 39 dbrn at the send terminals (See 4.9.1).

3.8.2 Audible and Visual Alarms. Upon detecting an incoming ring signal, the equipment shall produce the following audible and visual alarms(See 4.9.2).

3.8.2.1 Audible Alarm. The audible alarm shall be an acoustic tone between 900 Hz and 3400 Hz at a level of at leat 77 dB (re .0002 dynes/cm^2) at a distance of 3 feet, with the volume control in the maximum loudness position. The signal shall be audible at all settings of the volume control.

3.8.2.2 Visual Alarm. The visual alarm shall have a minimum brightness of 4 ft-lamberts direct view photoptic response averaged over the entire area.

3.8.3 DTMF Signalling (See 4.9.3).

3.8.3.1 Output Level. The single tone output level shall be -7 dBm + 2, -3 dB. The composite tone output level shall be -4 dBm +2, -3 dB.

3.8.3.2 Frequency. The digit frequencies shall be as follows:

Key	Frequency (Hz)
1	697 ± 9.06/1209 ± 15.7
2	697 ± 9.06/1336 ± 17.4
3	697 ± 9.06/1477 ± 19.2
4	770 ± 10.1/1209 ± 15.7
5	770 ± 10.1/1336 ± 17.4
6	770 ± 10.1/1477 ± 19.2
7	852 ± 11.1/1209 ± 15.7
8	852 ± 11.1/1336 ± 17.4
9	852 ± 11.1/1477 ± 19.2
0	941 ± 12.2/1336 ± 17.4
R	941 ± 12.2/1209 ± 15.7
C	941 ± 12.2/1477 ± 19.2
FO	697 ± 9.06/1633 ± 21.2
F	770 ± 10.1/1633 ± 21.2
I	852 ± 11.1/1633 ± 21.2
P	941 ± 12.2/1633 ± 21.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.8.3.3 Digit Sidetone. The digit sidetone level shall be -40 ± 5 dB into a 150 ohm load.

3.8.4 Four Wire Characteristics

3.8.4.1 AC Supervision

3.8.4.1.1 Seizure. The equipment shall generate a seize signal of 2250 ± 23.9 Hz at a level of -4 dBm +2, -3 dB when the handset is taken off-hook. The seize signal sidetone level shall be less than -60 dBm into a 150 ohm load (See 4.9.4).

3.8.4.1.2 Release (See 4.9.5).

3.8.4.1.2.1 Signal Output. The equipment shall generate a release signal of 2600 ± 33.8 Hz at a level of -4 dBm +2, -3 dB when the handset is placed on-hook.

3.8.4.1.2.2 Release Trip. The equipment shall discontinue the release signal between 180 and 380 milliseconds (ms) after receipt of a release acknowledge signal.

3.8.4.1.2.3 Release Time Out. In the absence of a release acknowledge signal, the equipment shall discontinue the release signal after 3 to 10 seconds.

3.8.4.1.3 Signal Detection. The equipment shall detect incoming ring and seize acknowledge signals at the levels and frequencies specified in Figure 1 (See 4.9.6).

3.8.4.2 AC/DC Common Battery. The equipment shall operate satisfactorily over a 24 volt DC phantom loop of 310 to 1310 ohms which includes the source and line impedance and excludes the resistance of the subscriber instrument (See 4.9.7).

3.8.4.2.1 Telephone Supply Voltage. The common battery input voltage of 24 volts shall be converted and regulated to provide a telephone supply voltage between 4.4 and 6.4 volts.

3.8.4.2.2 AC Common Battery (AC/CB). In the AC/CB mode, the equipment shall present the following load to the switchboard:

Equipment	Maximum Current Drain
On-Hook	4 ma
Ringing	5.5 ma
OFF-Hook	10 ma

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.8.4.2.3 DC Common Battery (DC/CB). In the DC/CB mode, the equipment shall present the following load to the switchboard:

Equipment	Current Drain
ON-Hook	4 ma or less
Ringing	5.5 ma or less
OFF-Hook	10.5 to 22 ma

3.8.4.3 Point-to-Point. In the point-to-point mode, the equipment shall generate a 570 ± 15 Hz ring signal for 2.0 ± 1 seconds at a level of -4 dBm + 2, -3 dB whenever the handset is taken off-hook. With two equipments in the point-to-point mode, going off-hook on set 1 shall activate the alarms on set 2. With both equipments off-hook, a two-way conversation shall be possible (See 4.9.8).

3.8.4.4 Extension Control (AC/LB Only). The equipment shall be capable of being bridged by three additional TA-838/TT telephone sets with a maximum separation of 100 ohms per loop pair. The first set off-hook shall send seize and the last set on-hook shall send release. The additional current drain from any extension shall not exceed 2 ma per extension set. The voice transmission level between extension sets shall be no greater than 4 dB below the voice sidetone level specified in 3.8.4.8 (See 4.9.9).

3.8.4.5 Local Battery Current Drain. With the equipment in the LB configuration, the maximum off-hook current drain, exclusive of extension control, shall be 20 ma. The maximum on-hook current drain shall be 1 ma (See 4.9.9).

3.8.4.6 Return Loss. When referenced to a 600 ohm resistive load, the return loss shall be greater than or equal to the value specified in the following table, over the frequency range from 300 Hz to 3.5 KHz (See 4.9.10).

Frequency (Hz)	Return Loss (dB min)
300 to 500	14
501 to 800	17
801 to 2800	20
2801 to 3200	17
3201 to 3500	14

3.8.4.7 Send Output. With a sound pressure input of 28 dynes/cm^2 at a frequency of 1000 Hz, the equipment shall produce a send output of -6 dBm + 4, -3 dB into a 600 ohm load (See 4.9.11).

3.8.4.8 Sidetone. The sidetone level into a 150 ohm load shall be -18 dBm ± 2 dB with a send output level of -4 dBm (See 4.9.11).

3.8.4.9 Receive Circuit Loss. The power loss from the equipment receive terminals to the receiver element shall not exceed 3 dB at 1 KHz (See 4.9.12).

3.8.4.10 Crosstalk. The electrical loss, send to receive or receive to send, shall be at least 30 dB over the frequency range from 300 Hz to 3.5 KHz (See 4.9.12).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.8.4.11 Clipping. The equipment shall not clip or limit below an output level of 0 dBm with local battery voltages of 5 volts. With local battery voltages of 4.4 volts dc, the equipment shall not clip or limit below an output level of -2 dBm. The equipment shall have absolute limiting at 5 dBm with local battery voltages of 6.4 volts dc (See 4.9.12).

3.8.4.12 Distortion. The total harmonic distortion introduced by the equipment with a 1000 Hz, 0 dBm (-2 dBm for supply voltages less than 5.0 volts) output signal produced at the send terminals, shall be less than 5 percent (See 4.9.12).

3.8.4.13 Signal Rise Time. The rise time of the seize and release tones shall not exceed 100 ms. The rise time of the DTMF tones shall not exceed 50 ms (See 4.9.13).

3.8.4.14 Acoustic Decoupling. The transmitter and receiver elements shall be acoustically decoupled a minimum of 30 dB over the frequency range from 300 Hz to 3.5 KHz (See 4.9.14).

3.8.5 Two Wire Characteristics. The equipment shall provide satisfactory performance over both 950 ohm local battery and 550 ohm common battery loops.

3.8.5.1 Send Output (2W). With a sound pressure input of 28 dynes/cm^2 at a frequency of 1000 Hz, the equipment shall produce a 2 wire send output level within $\pm$ 2 dB of the 4 wire send output (See 4.9.15).

3.8.5.2 Sidetone (2W). The sidetone output level into a 150 ohm load shall be -18 dBm $\pm$ 3 dB with a send output level of -4 dBm (See 4.9.15).

3.8.5.3 Ring Current. With a 60 volt rms sine wave input at any frequency between 15 and 25 Hz, the equipment shall draw 9.5 ma maximum and the audible and visual alarm shall be activated (See 4.9.16).

3.8.5.4 Receive Circuit Loss (2W). The power loss from the equipment two-wire terminals to the receiver element shall not exceed 3.5 dB at 1 KHz (See 4.9.17).

3.8.5.5 Off-Hook Current. The equipment shall draw a minimum of off-hook current of 30 ma when operated in a 950 ohm loop (See 4.9.18).

3.8.5.6 Extension Service (2W). The equipment shall be capable of operation when bridged by one additional TA-838/TT with a maximum separation of 25 ohms (See 4.9.18).

3.8.5.7 Return Loss (2W). When referenced to a 600 ohm resistive load, the return loss at 30 ma shall be greater than or equal to the value specified in the following table (See 4.9.19).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

Frequency (Hz)	Return Loss (dB Min)
300	12
1000	19
3500	18

3.8.6 Operation. The equipment shall transmit and receive intelligible voice signals and provide satisfactory performance without buzzing, rattling or other spurious sounds when tested in accordance with 4.9.20.

3.9 Environmental. The equipment shall meet the following environmental conditions.

3.9.1 Temperature

3.9.1.1 Low. During and after testing as specified in 4.10.1.1, the equipment shall meet the requirements of 3.8.

3.9.1.2 High. During and after testing as specified in 4.10.1.2, the equipment shall meet the requirements of 3.8.

3.9.2 Humidity. During and after testing as specified in 4.10.2, the equipment shall exhibit no physical damage, such as corrosion, rust, blistering, swelling, or deterioration of parts and materials, and shall meet the requirements of 3.8.

3.9.3 Altitude. The equipment shall show no evidence of damage or deterioration in performance at altitudes up to 10,000 feet above sea level after storage at altitudes up to 50,000 feet above sea level (See 4.10.3).

3.9.4 Leakage (Immersion). The equipment shall show no evidence of leakage after testing as specified in 4.10.4.

3.9.5 Bounce, Loose Cargo. Following testing as specified in 4.10.5, the equipment shall meet the requirements of 3.8.

3.9.6 Shock, Drop. Following testing as specified in 4.10.6, the equipment shall meet the requirements of 3.8.

3.9.7 Bench Handling. Following testing as specified in 4.10.7, the equipment shall meet the requirements of 3.8.6.

3.9.8 Dust. When tested in accordance with 4.10.8, the equipment shall meet the requirements of 3.8.6.

3.9.9 Salt Fog. After the salt fog test of 4.10.9, the equipment when examined visually with aid of a 10-power magnifier, shall show no evidence of degradation, such as flaking, pitting, blistering or loosening of finish or metal surface, or exfoliation of metal (See 6.8.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.9.10 Fungus. After the fungus test of 4.10.10, the equipment shall be visually examined using a 10-power magnifier. The equipment shall show no more than six minute unrelated spots, each no greater than .015 square inches in area, of sparse microbial growth as evidenced by growth colonization which includes branching and sporulation on or within each cubic foot, or fraction thereof, of equipment assembly volume. Isolated instances of partial tubular germination shall not be included in this evaluation(See 6.8).

3.10 Workmanship. The equipment shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454 and the applicable portions of MIL-P-11268 (See 4.7).

3.11 Electromagnetic Compatibility. The equipment, programmed for all modes of operation, shall meet the following requirements of MIL-STD-461A with Notice 4 when exercised sequentially through the following operations: on-hook, ringing, off-hook, and keyboard manipulation (See 4.11).

CE03	30 Hz to 50 KHz	
CE05	50 KHz to 50 MHz	
RE02	14 KHz to 1 GHz	
RE02.1	14 KHz to 1 GHz	
RS03	10 KHz to 400 MHz	See 3.11.1
RS03.1	2 MHz to 12.4 GHz	

3.11.1 Radiated Susceptibility. The equipment shall provide satisfactory sequential operation and meet the random noise requirements of 3.8.1 when exposed to the following radiated field strengths.

Frequency	Field Strength (V/M)
10 KHz to 1.9 MHz	1.0
2 MHz to 399 MHz	10.0
400 MHz to 12.4 GHz	5.0

3.12 Reliability. The equipment shall demonstrate a specified mean-time-between-failure (MTBF) of ten thousand (10,000) hours, when tested in accordance with 4.12.

3.13 Specular Gloss. The 60-degree specular gloss of the handset and equipment case shall be less than 30 (See 4.13).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and service conform to prescribed requirements.

4.2 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. First Article Inspection (See 4.3). Does not include preparation for delivery.

b. Inspections covered by subsidiary documents (See 4.4).

c. Quality conformance inspection:

(1) Quality conformance inspection of equipment before preparation for delivery (See 4.5).

(2) Quality conformance inspection of packaging (See 4.14).

4.3 First Article. Unless otherwise specified in the contract or purchase order, the First Article inspection shall be performed by the contractor.

4.3.1 First Article Units. The contractor shall furnish six (6) First Article units of Telephone Set TA-838( )/TT.

4.3.2 First Article Inspection. The First Article inspection shall consist of the inspections specified in Table I, and shall be performed in the order specified therein.

4.3.3 First Article Data. The First Article test plan and test report(s) shall be as required in the contract or purchase order.

4.3.4 Failures. One or more failures shall be cause for refusal to grant First Article approval.

TABLE I
First Article Inspection

Insp	Reqmt	Test	Units
Inspection covered by Subsidiary Documents	3.2 3.3 3.4 3.5	4.4	All Units
Preconditioning	3.7	4.6	All Units
Reliability	3.12	4.12	All Units
Group A	Table II		All Units
Group B	Table III		All Units
Group C	Table IV		Units 1 & 2
Fungus	3.9.10	4.10.10	Unit 3
Specular Gloss	3.13	4.13	Unit 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.4 Inspections Covered by Subsidiary Documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection required by this specification, and the inspection requirement specified in the contract or purchase order.

Item	Where Required
Construction	3.2
Parts, Materials and Processes	3.3
Finish	3.4
Marking	3.5

4.5 Quality Conformance Inspection Before Preparation for Delivery. The contractor shall perform the inspections specified in 4.4, 4.6, 4.12 and 4.5.1 through 4.5.3, in that order. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements.

4.5.1 Group A Inspection. Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table II. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to verification sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels, and AQL's indicated in Table II.

4.5.1.1 Order of Inspection Within Group A. Group A inspection shall be performed in an order satisfactory to the Government, except that the operation test in 4.9.20 shall be last.

4.5.2 Group B Inspection. Group B inspection shall normally be performed on lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection. This inspection shall conform to Table III and to the special inspection levels of Table I of MIL-STD-105.

4.5.2.1 Group B Sampling Plans. The Group B sampling plans, for the AQL's listed in Table III shall be as follows:

AQL	Inspection Level
4.0 DPHU	S-4
6.5%	S-4

4.5.2.2 Order of Inspection Within Group B. Group B inspection shall be performed in an order satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE II
Group A Inspection

Insp	Reqmt	Insp		AQL Major	AQL Minor
Visual Mechanical	3.10	4.7		1%	4%
Electrical					
DTMF Signalling	3.8.3	4.9.3			
Seizure	3.8.4.1.1	4.9.4			
Release	3.8.4.1.2	4.9.5			
Signal Detection	3.8.4.1.3	4.9.6			
AC/DC Common Battery	3.8.4.2	4.9.7	1.0 DPHU for the group		*
Send Output	3.8.4.7	4.9.11			
Sidetone	3.8.4.8	4.9.11			
Send Output (2W)	3.8.5.1	4.9.15			
Sidetone (2W)	3.8.5.2	4.9.15			
Operation	3.8.6	4.9.20		0.40%	*

* All electrical and operational defects are considered major.

TABLE III
Group B Inspection

Insp	Reqmt	Insp		AQL
Interchangeability	3.6	4.8		6.5%
Random Noise	3.8.1	4.9.1		
Audible & Visual Signals	3.8.2	4.9.2		
Point-to-Point	3.8.4.3	4.9.8		
Extension Control	3.8.4.4	4.9.9		
LB Current Drain	3.8.4.5	4.9.9		
Return Loss	3.8.4.6	4.9.10		
Receive Circuit Loss	3.8.4.9	4.9.12		
Crosstalk	3.8.4.10	4.9.12		
Clipping	3.8.4.11	4.9.12	4.0 DPHU for the group	
Distortion	3.8.4.12	4.9.12		
Signal Rise Time	3.8.4.13	4.9.13		
Acoustic Decoupling	3.8.4.14	4.9.14		
Ring Current	3.8.5.3	4.9.16		
Receive Circuit Loss (2W)	3.8.5.4	4.9.17		
Loop Resistance	3.8.5.5	4.9.18		
Extension Service (2w)	3.8.5.6	4.9.18		
Return Loss (2W)	3.8.5.7	4.9.19		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.5.3 Group C Inspection. Group C inspection shall be performed on units that have passed Group A and Group B inspection. The inspection shall consist of the inspections specified in Table IV. Samples shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for Group C Inspection. Two sample units shall be selected at random for all inspections in Table IV every 3 months or 1500 units or fraction thereof produced, whichever occurs first. The first samples selected shall be at the start of the contract from the first quality conformance inspection production lot.

4.5.3.2 Order of Inspection Within Group C. Group C inspection shall be performed in the order specified in Table IV.

4.5.3.3 Group C Failures. Actions required relative to Group C failures shall be as specified in the contract or purchase order.

4.5.4 Reinspection of Conforming Group C Sample Units. Unless otherwise specified, sample units which have been subjected to and passed Group C inspection may be accepted on contract provided all damage is repaired and the sample units are resubjected to and pass Group A and Group B inspection.

TABLE IV
Group C Inspection

			Unit	
Insp	Reqmt	Insp	1	2
Low Temperature	3.9.1.1	4.10.1.1	1	
High Temperature	3.9.1.2	4.10.1.2	2	
Humidity	3.9.2	4.10.2	3	
Altitude	3.9.3	4.10.3		1
Leakage (Immersion)	3.9.4	4.10.4		5
Bounce, Loose Cargo	3.9.5	4.10.5		2
Shock, Drop	3.9.6	4.10.6		4
Bench Handling	3.9.7	4.10.7		3
Dust	3.9.8	4.10.8	4	
Salt Fog	3.9.9	4.10.9	5	
Electromagnetic Compatibility	3.11	4.11		6

4.6 Preconditioning

4.6.1 Bounce Preconditioning. The unit shall be placed in its normal operating position on the table of the Package Tester, Type 1000-SC, as made by the L.A.B. Corporation, Skaneateles, N. Y., or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32 inch thick strip of material under one corner or edge to a distance of 3 inches as the unit bounces. The unit shall be subjected to this preconditioning for 1 minute. After bounce preconditioning, the unit shall not be repaired, aligned, cleaned, or otherwise changed prior to subjection to inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.6.2 Burn-In/Debugging

4.6.2.1 Test Conditions. The test conditions of 4.12.1 shall be maintained throughout the 24 hour burn-in period.

4.6.2.2 Monitoring. The performance parameters of Table V shall be measured at the end of the 24 hour burn-in period to demonstrate compliance with the 24 hour failure free requirement (See 3.7). The contractor may elect to perform continuous or periodic monitoring during the burn-in period.

4.6.2.3 Failures. If a failure is detected at the end of or during the 24 hour period, the equipment shall be repaired and resubjected to burn-in until a continuous 24 hour failure free period is completed.

4.7 Visual and Mechanical Inspection of Equipment. Equipment shall be examined for compliance with 3.10 and for the defects listed in MIL-STD-252.

4.8 Inspection for Dimensional Interchangeability. The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.6. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

a. External and internal dimensions of cases, covers, and insertable assemblies, when such dimensions affect mating of parts.

b. Dimensions of cavities, when such dimensions affect insertion of items.

c. Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.

d. Location of connectors, locking pins, fasteners, slides, and mountings which receive mating parts of plug-in assemblies and major units; and location of the mating parts on the plug-in assembly or major unit.

e. Size and form of special threads.

4.9 Electrical

4.9.1 Random Noise. The equipment shall be subjected to the test specified in paragraph 3.6 of SM-A-790762 and meet the requirements of 3.8.1.

4.9.2 Audible and Visual Signals. The equipment shall be subjected to the test specified in paragraph 3.7 of SM-A-790762 and meet the requirements of 3.8.2.

4.9.3 DTMF Signalling. The equipment shall be subjected to the test specified in paragraph 2.2, Step 4, of SM-A-790762 and meet the requirements of 3.8.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.9.4 Seizure. The equipment shall be subjected to the test specified in paragraph 2.2, Step 1, of SM-A-790762 and meet the requirements of 3.8.4.1.1.

4.9.5 Release. The equipment shall be subjected to the test specified in paragraph 2.2, Steps 2 and 3, of MS-A-790762 and meet the requirements of 3.8.4.1.2.

4.9.6 Signal Detection. The equipment shall be subjected to the tests specified in paragraph 2.4 of SM-A-790762 and meet the requirements of 3.8.4.1.3.

4.9.7 AC/DC Common Battery. The equipment shall be subjected to the tests specified in paragraph 2.5 of SM-A-790762 and meet the requirements of 3.8.4.2.

4.9.8 Point-to-Point. The equipment shall be subjected to the test specified in paragraph 3.2 of SM-A-790762 and meet the requirements of 3.8.4.3.

4.9.9 Extension Control/Current Drain. The equipment shall be subjected to the tests specified in paragraph 3.1 of SM-A-790762 and meet the requirements of 3.8.4.4 and 3.8.4.5.

4.9.10 Return Loss. The equipment shall be subjected to the tests specified in paragraph 3.4 of SM-A-790762 and meet the requirements of 3.8.4.6.

4.9.11 Send Output/Sidetone. The equipment shall be subjected to the tests specified in paragraph 2.3 of SM-A-790762 and meet the requirements of 3.8.4.7 and 3.8.4.8.

4.9.12 Receive Circuit Loss, Crosstalk, Clipping, Distortion. The equipment shall be subjected to the applicable tests of paragraph 3.5 of SM-A-790762 and meet the requirements of 3.8.4.9, 3.8.4.10, 3.8.4.11 and 3.8.4.12.

4.9.13 Signal Rise Time. The equipment shall be subjected to the test specified in paragraph 3.3 of SM-A-790762 and meet the requirements of 3.8.5.13.

4.9.14 Acoustic Decoupling. The equipment shall be subjected to the test specified in paragraph 3.8 of SM-A-790762 and meet the requirements of 3.8.5.14.

4.9.15 Send Output/Sidetone (2W). The equipment shall be subjected to the tests of paragraph 2.6 of SM-A-790762 and meet the requirements of 3.8.5.1 and 3.8.5.2.

4.9.16 Ring Current. The equipment shall be subjected to the test specified in paragraph 3.9 of SM-A-790762 and meet the requirements of 3.8.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.9.17 Receive Circuit Loss (2W). The equipment shall be subjected to the test specified in paragraph 3.10 of SM-A-790762 and meet the requirements of 3.8.5.4.

4.9.18 Loop Resistance & Extension Service (2W). The equipment shall be subjected to the tests specified in paragraph 3.11 of SM-A-790762 and meet the requirements of 3.8.5.5 and 3.8.5.6.

4.9.19 Return Loss (2W). The equipment shall be subjected to the tests specified in paragraph 3.12 of SM-A-790762 and meet the requirements of 3.8.5.7.

4.9.20 Operation. The equipment shall be subjected to the test specified in paragraph 2.7 of SM-A-790762 and meet the requirements of 3.8.6.

4.10 Environmental Conditions.

4.10.1 Temperature.

4.10.1.1 Low. The equipment shall be tested in accordance with Method 502.1, Procedure I of MIL-STD-810. The storage temperature shall be -70°F for a period of not less than 2 hours following stabilization of the test item. The operating temperature shall be -30°F.

4.10.1.2 High. The equipment shall be tested in accordance with Method 501.1, Procedure II, of Mil-STD-810. The operating temperature shall be 150°F.

4.10.2 Humidity. The equipment shall be tested in accordance with Method 507.1, Procedure III of MIL-STD-810. Measurements shall be made during the last 5 hours of each 48 hour cycle and at the end of the 480 hour soak period.

4.10.3 Altitude. The equipment shall be tested in accordance with Method 500.1, Procedure I of MIL-STD-810, except that the operating altitude shall be 10,000 feet and the storage altitude shall be 50,000 feet. During and after testing the equipment shall meet the requirements of 3.8.6.

4.10.4 Leakage (Immersion). The equipment shall be tested in accordance with Method 512.1, Procedure I of MIL-STD-810. When the equipment is opened there shall be no evidence of water leakage.

4.10.5 Bounce, Loose Cargo. The equipment shall be tested in accordance with Method 514.2, Procedure XI, Part 2 of MIL-STD-810.

4.10.6 Shock, Drop.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.10.6.1 Handset. The handset, with transmitter and receiver elements in place, shall be tested in accordance with Method 516.2, Procedure II of MIL-STD-810.

4.10.6.2 Telephone. The equipment with handset in place, shall be tested in accordance with Method 516.2, Procedure II of MIL-STD-810.

4.10.7 Bench Handling. The equipment shall be tested in accordance with Method 516.2, Procedure V of MIL-STD-810.

4.10.8 Dust. The equipment shall be tested in accordance with Method 510.1, Procedure I of MIL-STD-810.

4.10.9 Salt Fog. The equipment shall be tested in accordance with Method 509.1, Procedure 1 of MIL-STD-810. Inability of the equipment to meet the requirements of 3.9.9 shall constitute failure of this test.

4.10.10 Fungus. The equipment shall be tested in accordance with Method 508.1, Procedure I of MIL-STD-810. All non-hermetic sealed test items shall be opened during exposure. Inability of the equipment to meet the requirements of 3.9.10 shall constitute failure of this test.

4.11 Electromagnetic Compatibility. The equipment shall be tested in accordance with Notice 3, MIL-STD-462 and meet the requirements of 3.11.

4.12 Reliability. The equipment shall meet the requirements of 3.12 when tested as follows:

4.12.1 Test Conditions.

a. Test level shall be level C of MIL-STD-781.

b. Input voltage shall be 24 vdc applied through a short phantom loop. The voltage shall be cycled off-on every four hours.

c. Equipment cycling shall consist of twenty of the following Call Sequences performed in every four hour period:

(1) Go off-hook, transmit Seize tone.

(2) Receive Acknowledge tone, stop Seize tone.

(3) Transmit digits 1, 5, 9 and P.

(4) Go on-hook, receive Ring tone.

(5) Go off-on-hook.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

d. Each unit on contract shall be operated for the period shown below:

Total Equipments on Contract	Operating Hours
1975 or less	48
1976 to 3030	32
3031 or more	24

e. Preventive maintenance is not permitted.

f. Test procedures and report requirements (See paragraph 5.11 of MIL-STD-781) shall be furnished as specified in the contract or purchase order.

TABLE V
Burn-In/Debugging and Reliability

Performance Parameters

Insp	Requt	Insp	Remarks
Seizure	3.8.4.1.1	4.9.4	Delete Step 1(d)
Release	3.8.4.1.2	4.9.5	Delete Step 3
DTMF Signalling	3.8.3	4.9.3	Delete DTMF Sidetone
Send Output	3.8.4.7	4.9.11	
Sidetone	3.8.4.8	4.9.11	
Audible and Visual Alarms	3.8.2	4.9.2	Measure audible ring level only at position 2, Set Up #3. Delete Step 2,5, and 6, but verify LED is on during ring.
Signal Detection	3.8.4.1.3	4.9.6	Four points of measurement at -23 dBm level shall include no detect at frequencies below 500 Hz or above 640 Hz. The detect range shall be from 555 Hz to 585 Hz.
AC Common Battery	3.8.4.2.2	4.9.7	Delete voltage readings. Perform Steps 1, 3, and 9 only.
Send Output (2W)	3.8.5.1	4.9.15	
Sidetone (2W)	3.8.5.2	4.9.15	

Note: Perform the tests of Table V in the Common Battery mode.

4.12.2 Inspection. Following the operating hours specified above, each equipment shall be tested and shall meet the performance parameters cited in Table V. The inability of the equipment to meet the performance requirements cited in Table V constitutes a failure. Failure categories shall be defined in accordance with MIL-STD-781.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.12.3 Accept/Reject Criteria. The accept/reject criteria shall be as specified in Figure #2 except as modified below:

a. The accept line of Test Plan III of MIL-STD-781 extended shall be a limiting boundary line. The failure shall be a "traveling point" plot. It shall be continuously updated as cumulative test time progresses. The failure plot shall not cross the limiting boundary line, but shall when reaching the limiting boundary line, follow this line. When a failure occurs and the failure to imcremental (not total) test time ratio does not exceed the slope of the limiting boundary line (i.e., the failure plot has followed the limiting boundary and the time since the last previous failure is greater than .693200 (i.e., .6932 hours)) the failure shall be noted on the failure plot at the time the failure occurred but the failure plot shall not leave the boundary line. When a failure occurs and the failure to imcremental test time ratio exceeds the slope of the limiting boundary line (i.e., the failure plot has followed the limiting boundary line and the time since the last previous failure is less than .693200 (i.e., .6932 hours)) the failure plot shall leave the boundary line at the time at which the failure occurred and travel vertically between the limiting boundary line and the reject line for a distance equal to one failure. When the failure plot is not following the limiting boundary, time shall be plotted as a horizontal displacement and failures as a vertical displacement.

b. When an equipment meets the performance requirement of Table V after reliability test, it shall contribute zero failures and credit hours equal to the "on-time" accumulated.

c. When an equipment fails to meet the performance requirements of Table V after reliability test, it shall contribute one failure and one half the "on-time" accumulated.

4.12.3.1 Reject Situation. If the plot of cumulative Failures versus Test Time crosses the Reject line of Figure 2 a reject situation has occurred. The procuring activity shall be notified immediately and corrective action taken as specified in the contract or purchase order.

4.12.3.2 Accept Situation. If the plot of cumulative Failures versus Test Time remains below the Reject line of Figure 2 an accept situation exists and equipments meeting the requirements of Table V shall continue on the test program as specified in paragraph 4.12.

4.12.4 Restoration of Failed Equipments. Failed equipment shall be processed as specified in paragraph 5.9 of MIL-STD-781.

4.13 Specular Gloss. When measured in accordance with Method 6101 of Federal Test Method Standard 141, the specular gloss shall meet the requirement of 3.13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.14 Quality Conformance Inspection of Packaging. Packaging shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

4.15 Rough Handling Test (Packaging). When the rough handling test, in accordance with MIL-P-116 is required by the contract, the Operation test of 4.9.20 shall be conducted to determine freedom from malfunction caused by rough handling.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A, B or Commercial as specified (See 6.2).

5.1.1 Level A

5.1.1.1 Cleaning. Telephone Set TA-838()/TT shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Telephone Set TA-838()/TT shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservative Application. No preservative required.

5.1.1.4 Unit Packing. Unit packing shall be in accordance with the methods or submethods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical Literature. Each technical literature shall be unit packed submethod IC-1.

5.1.1.4.2 Telephone Set TA-838( )/TT. Each set shall be individually unit packed method III as follows: cushion each unit on all surfaces with cells or pads or both fabricated of fiberboard conforming to PPP-F-320, type CF, class weather-resistance, variety SW, grade W5c, designed to protect all projections and absorb the shock of impact in handling and transit. As an alternate, cushioning material may be fabricated of plastic molding material conforming to MIL-P-19644 or polyurethane foam conforming to MIL-P-26514. Place the cushioned unit within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Place the technical literature, unit packed as specified in 5.1.1.4.1, on top of the contents, directly under the lid of the box. Close the box in accordance with the appendix of the box specification.

5.1.2 Level B. Cleaning, drying, preservative application and unit packing shall be as specified in 5.1.1.

5.1.3 Commercial Preservation. Items shall be given the best degree of protection employed by the supplier to afford protection against corrosion, deterioration, and damage during shipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of Telephone Set, TA-838( )/TT, unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type 1, finish A.

5.2.1.1 Unitization. Palletization shall be required when: Containers specified in 5.2.1 do not require skids; quantitites per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers packed as specified in 5.2.1, except that container strapping may be moitted, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type 1, finish A, or shrink film.

5.2.2 Level B. A quantity of Telephone Set, TA-838( )/TT, unit packed as specified in t.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type 1, finish A, or shrink film. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

5.2.2.1 Unitization. Palletization shall be required when quantities per destination comprise a pallet load. A quantity of Telephone Set, TA-838( )/TT, unit packed as specified in 5.1, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. A fiberboard cap shall be employed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type 1, finish A, or shrink film.

5.2.3 Commercial packing. The item shall be packed to meet carrier acceptance and safe delivery to destination at lowest rates in compliance with requirements of carrier rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Military Marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial Marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall as a minimum be marked as follows: Noun nomenclature; National Stock Number, or part number when NSN is not given; Government contract or purchase order number; quantity; contractor's policy/procedures; exterior containers shall also be marked with the appropriate address markings. Markings may be applied by any means which provide legibility.

6 NOTES

6.1 Intended Use. Telephone Set TA-838( )/TT is a solid state, Dual Tone Modulated Frequency (DTMF), Two-wire and Four-wire telephone intended for use in automatic switching systems under severe tactical environments. Operating power is obtained from common or local batteries.

6.2 Ordering Data. Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Level A, level B or Commercial preservation and packing (See Section 5).

c. When the rough handling test is required (See 4.15).

d. When First Article samples are required (See 4.3.1).

6.3 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

6.4 Group C Inspection. Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action (See 4.5.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

6.5 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: TA-838W/TT. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.6 Verification Inspection. Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

6.7 Location of Operational Inspection. It is desirable that the operational inspection (4.9.20) be performed at a location that will minimize handling (which might cause damage to the equipment) after this inspection is completed. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.

6.8 Definitions

6.8.1 Branching. Branching is a connected arrangement of filaments(hyphol) formed by shoots or secondary items growing from the main stem or filament (hypha).

6.8.2 Growth Colonization. Growth colonization is a mass of individual plants, generally of one species, living together; or a group of hyphae which is formed from one spore or cell and may be one individual plant. Colonization which completely covers the surface of the nutrient material constitutes abundant growth.

6.8.3 Microbial Growth. Microbial growth is the growth of very minute organisms. Such organisms, when present in large numbers, may provide a colonly visible to the naked eye.

6.8.4 Sporulation. Sporulation is the formation of minute unicellular reproductive or dormant bodies, called spores.

6.8.5 Tubular Germination. Tubular germination is partial growth by the production of hyphae, which are tubular shaped fungae filaments. Tubular germination constitutes restricted individual spore growth not proceeding to colonization.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

6.8.6 Exfoliation. Exfoliation is corrosion along the grain boundaries of the metal resulting in the peeling or separating, or both, of successive layers of the metal. The appearance resembles loose book pages or onion skin peeling.

Custodian:

Army - (EL)

Preparing Activity

Army - (EL)

Project No. 5805-A240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TELEPHONE SET TA 838/TT 570 Hz DETECTOR RESPONSE

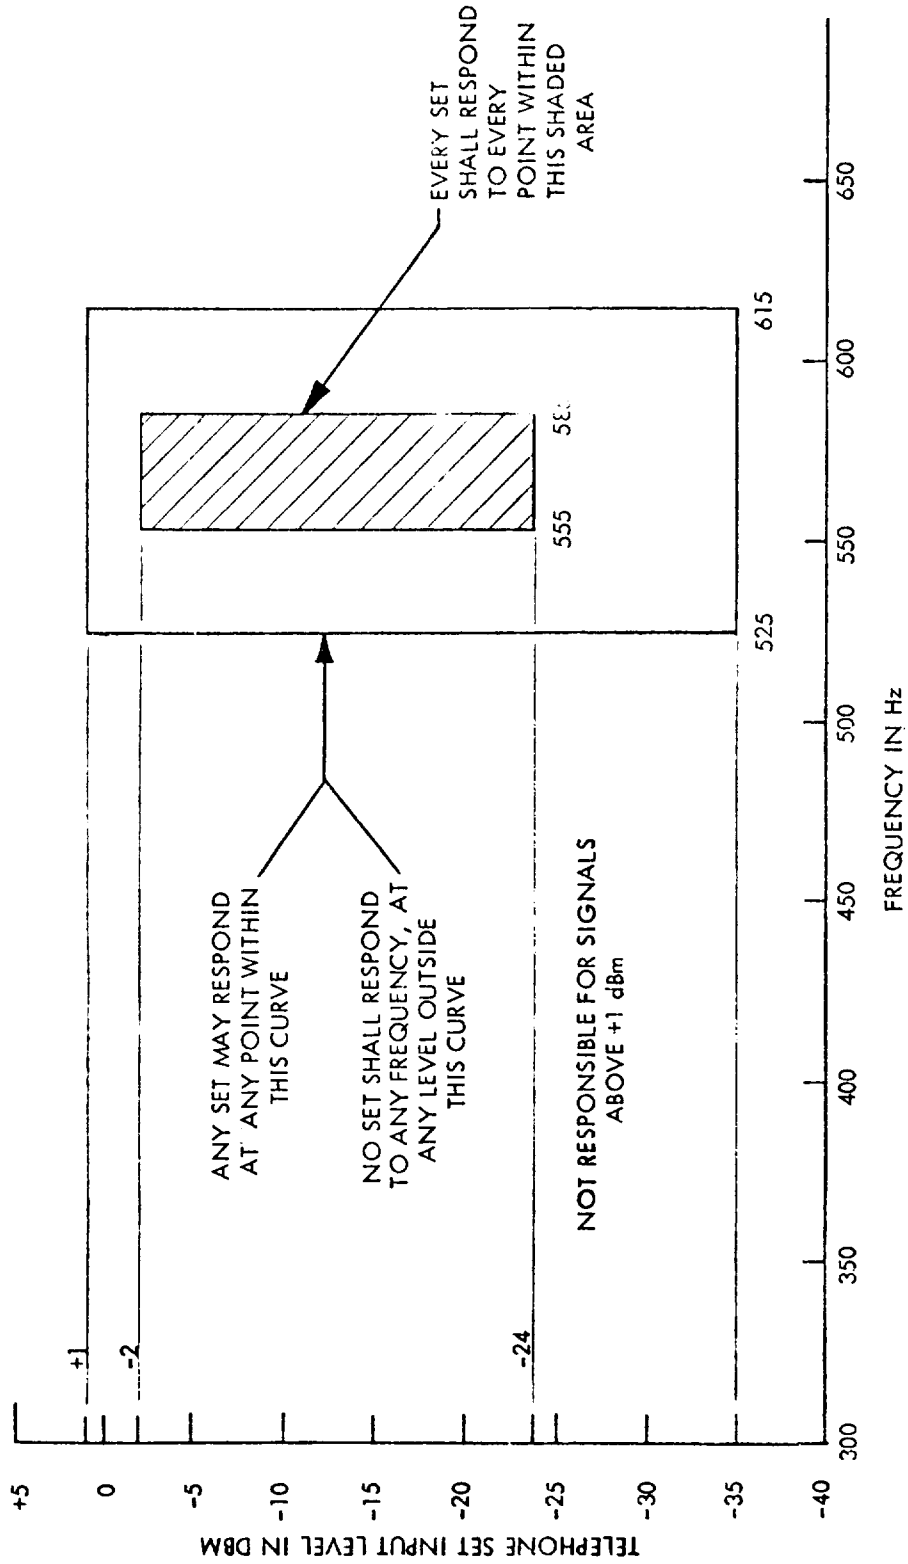


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

RELIABILITY TEST PLAN

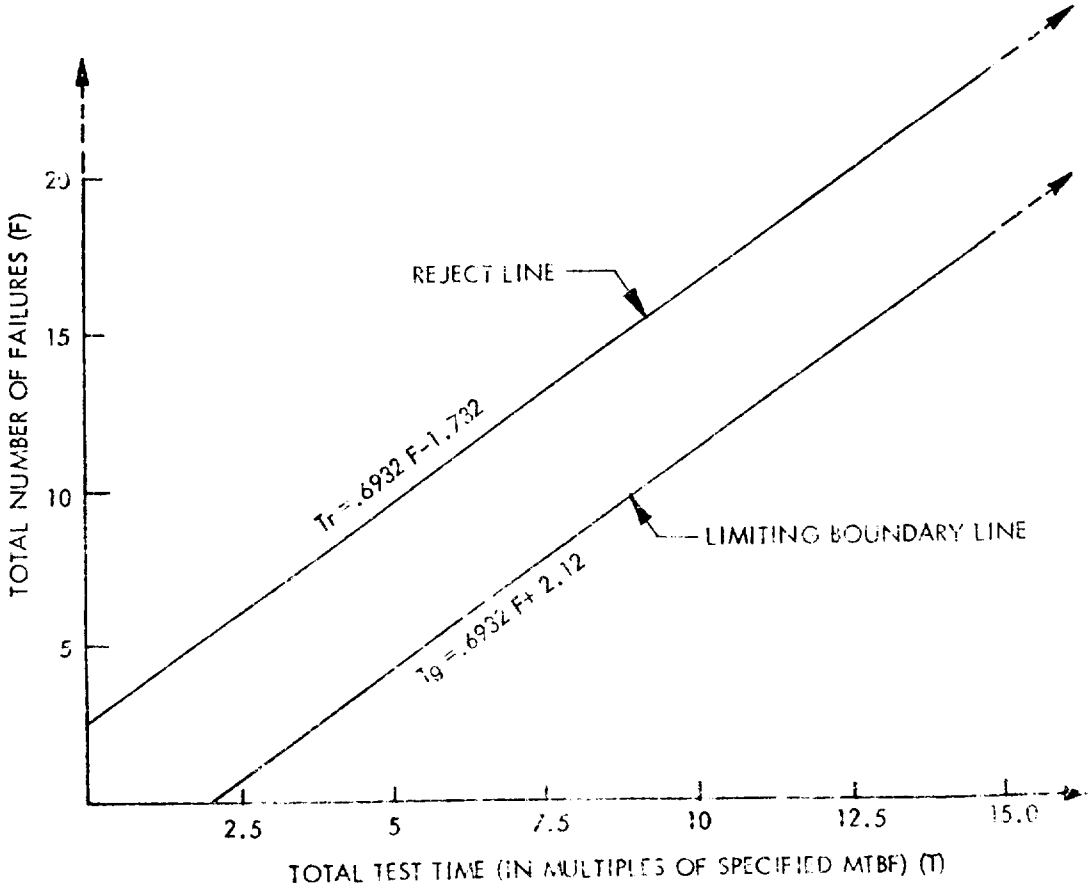


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-T-49110(EL) TELEPHONE SET TA-838( )/TT

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: ~~AMSEL~~XX DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.