INCH-POUND

MIL-C-53024B(ME)
30 October 1992
SUPERSEDING
MIL-C-53024A(ME)
23 January 1991

MILITARY SPECIFICATION

COMPACTOR, HIGH SPEED, SELF-PROPELLED, COMMERCIAL CONSTRUCTION EQUIPMENT (CCE)

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a high speed, self-propelled, diesel powered, tamping foot, embankment compactor.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

VV-F-800	- Fuel Oil, Diesel.

MILITARY

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Material.
MIL-F-3541	- Fittings, Lubrication.
MIL-B-46176	- Brake Fluid, Silicone, Automotive, All Weather, Operational and Preservative.
MIL-T-83133	- Turbine Fuel, Aviation, Kerosene Type, Grade JP-8.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: SATBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3895

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595	- Colors Used in Government Procurement.

MILITARY

MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.
MIL-STD-1474	- Noise Limits For Army Materiel.
MIL-STD-1791	- Designing for Internal Aerial Delivery in Fixed Wing Aircraft.
MS35844	- Plug Machine Thread, Magnetic; Drain.
MS52131	- Connector, Plug, Electrical Intervehicle Power Cable.
MS52149	- Battery, Storage, Lead Acid (Low Maintenance).
MS53052	- Bracket Assembly, Liquid Container, Five Gallon.

HANDBOOKS

MILITARY

MIL-HDBK-113	- Guide for the Selection of Lubricants, Functional Fluids, Preservatives, and Specialty Products for Use in Ground Equipment Systems.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

US ARMY TANK-AUTOMOTIVE COMMAND (TACOM)

Report No. CR-82-588-003 – STE/ICE Design Guide for Vehicle Diagnostic Connector Assembly.

DRAWINGS

TACOM

12258941	- Connector Receptacle 54 PIN
12258955	- Vehicle Test Card.

(Copies of the TACOM report and drawing required by contractors in connection with specific acquisition functions should be obtained from the USA Tank Automotive Command, ATTN: AMSTA-MD, Warren, MI 48397-5000.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

ME

13229E8014 - Bracket Assembly Rifle Stowage.

(Copies of drawings required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Development, and Engineering Center, ATTN: SATBE-FMT, Fort Belvoir, VA 22060-5606.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 1557 - Moisture-Density Relations of Soils and Soil-Aggregate Mixtures - Unified Soils Classification System using l0-lb. (4.54-KG) Rammer and l8-in. (457-MM) Drop.
D 2487 - Classification of Soils for Engineering Purposes – AASHO.
D 2922 - Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth).
D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

ASSOCIATION OF AMERICAN RAILROADS (AAR)

Rules Governing the Loading of Commodities on Open-Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 50 F Street NW, Suite 7702, Washington, DC 20001.)

INTERNATIONAL STANDARDS ORGANIZATION

ISO 1496/1 - Series 1 Freight Containers – Specifications and Testing - Part 1: General Cargo Container for General Purposes.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

J154 - Operator Enclosures Human Factor Design Considerations.
J185 - Access Systems for Off-Road Machines.
J209 - Instrument Face Design and Location for Construction and Industrial Equipment.
J258 - Circuit Breaker with Automatic Reset.
J276 - Steering Frame Lock for Articulated Loaders and Tractors.
J297 - Operator Controls on Industrial Equipment.
J386 - Operators Restraint Systems for Off-Road Work Machines.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:50Z
Check the source to verify that this is the current version before use.

J534 - Lubrication Fittings.
J538 - Grounding of Storage Batteries.
J551 - Performance Levels and Methods of Measurement of Electromagnetic Radiation from Vehicles and Devices (30 - 1000 MHz).
J753 - Lubrication Chart - Construction and Industrial Machinery.
J833 - USA Human Physical Dimensions.
J898 - Control Locations for Off-Road Work Machines.
J899 - Operator's Seat Dimensions for Off-Road Self-Propelled Work Machines.
J994 - Alarm - Backup - Electric - Performance Test and Application.
J1040 - Performance Criteria for Rollover Protective Structures (ROPS) for Construction, Earthmoving, Forestry and Mining Machines.
J1136 - Braking Performance for Compactors and Rollers.
J1362 - Symbols for Controls, Indicators, and Tell-Tales for Off-Road, Self-Propelled Work Machines.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The compactor shall be a self-propelled, diesel powered, tamping machine for high speed embankment compaction. The compactor shall be a commercial model consisting of articulated steering, a hydraulically controlled strike-off dozer blade, rear wheel oscillation, and all wheels shall have tamping foot or segmented impact pads with adjustable wheel cleaners (see 3.1.1). The compactor shall be complete with all components furnished as standard equipment that are customarily offered with a compactor of this type whether stipulated herein or not, together with such attachments as may be necessary to enable the compactor to function reliably and efficiently in a sustained operation. The compactor shall conform to all Environmental Protection Agency (EPA) and Occupational Safety and Health Administration (OSHA) legal requirements for US domestic equipment in effect at the date of manufacture.

3.1.1 Commerciality. The compactor shall be the offeror’s standard commercial products, as described by the offeror's published commercial literature, except as modified to meet the requirements of this specification, which has been manufactured and sold to the general public in substantial quantities for at least one year prior to the opening date of the Governments solicitation (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

3.1.2 Dimensions. The compactor shall not exceed the following dimensions:

Length - 236 inches (without blade.)
Width - 121 inches (without blade.)
Height - 115 inches (exhaust stack and ROPS removed or collapsed.)

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Performance. The compactor shall be capable of compacting two different groups of soils to at least 1500 cubic yards per hour, each, in each of the two different types of soils cited herein. The two types of soils shall correspond to a clayey sandy (sc) type soil with a plasticity index of 5-12, and a lean clay (cl) type soil with a plasticity index of 10-16. Both types of soils, when compacted, shall be within 2 percentage points of their respective optimum moisture content. In addition to compacting the types of soils cited herein to at least 1500 cubic yards per hour, the compacted soils must be compacted to a density of 95 percent of ASTM D 1557 for the entire depth of the lift minus 1 inch maximum. The minimum height of the lift shall be 6 inches. The compactor shall be capable of light bulldozing and leveling of loose material. The compactor shall be capable of climbing a 30 degree slope and shall be capable of turning and maneuvering on a 15 degree slope. The compactor shall be capable of operating in ambient temperatures between 125 and -25 °F without exceeding the engine manufacturer's recommended limits for radiator top tank temperature, engine oil temperatures in the sump and gallery, and hydraulic component manufacturer’s fluid temperature limits.

3.4 Material. Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification. Materials, coatings and special treatments utilized shall provide protection against the various forms of material deterioration in the applicable operating and storage environments to which the compactor may be exposed.

3.4.1 Material deterioration prevention and control. The compactor shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the compactor may be exposed.

3.4.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion.

3.4.3 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the compactor may be newly fabricated from recovered materials to the maximum extent practicable, provided the compactor produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the compactor.

3.4.4 Radioactive material. No radioactive material shall be used in any part of the compactor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

3.4.5 Asbestos. No asbestos material shall be used in any form or in any part of the compactor.

3.5 Maintenance.

3.5.1 Maintainability. All major assemblies and installed attachments shall be accessible for maintenance, repair, and replacement. Covers or plates which must be removed or opened for component adjustment or maintenance shall be equipped with quick-opening, hand-operable fasteners and shall be labeled to indicate the items accessed through them. Drain outlets shall be accessible. Ease of maintenance provisions shall incorporate features insuring operating clearances for hand tools and lubricating equipment, and the accessibility for service operations such as adding oil to the engine crankcase and adding oil to gear cases. Each maintenance, assembly, or disassembly operation required during testing in accordance with 4.3 shall be accomplished by no more than two men (except a hoist and operator may be used as necessary) using common tools furnished with the compactor. After completion of any maintenance operation, the compactor shall operate as specified herein. Electrical system circuit breaker with automatic reset conforming to SAE J258 shall be grouped at a common location. Each circuit breaker holder shall be labeled as to equipment served by the breaker and the breaker's current rating (i.e., lights 20A). The label shall be readable when the breaker is in place.

3.5.2 Safety. All exposed parts which are subject to high operating temperatures, or which are energized electrically shall be insulated, fully enclosed or guarded. All rotating, reciprocating or moving parts which are of such nature or so located as to be a hazard to operating or maintenance personnel shall be fully enclosed or guarded. All walking surfaces/steps shall be provided with an anti-skid surface. Seat belts shall be anchored in accordance with SAE J386. The operator's vision shall not be obstructed and shall permit operation in forward and reverse travel. All platforms, steps, and hand holds shall be in accordance with SAE J185 and permit safe entry and exit from the equipment. A reverse alarm of the audible type with a manual override shall be provided conforming to SAE J994, type C. The backup alarm signal shall be audible above and distinguishable from the surrounding compactor noise level.

3.5.2.1 Rollover protective structure (ROPS). The compactor shall be equipped with a collapsible or removable bolted down ROPS. The ROPS shall conform to SAE JI040. A slinging eye(s) shall be provided to facilitate ROPS removal.

3.5.3 Human factors engineering (HFE). The compactor shall be operable and maintainable by a small human through a large human as defined by SAE J833 while wearing cold weather clothing and nuclear, biological, chemical (NBC) protective gear. Controls and displays shall be located in accordance with SAE J898 and J297.

3.5.4 Noise limits. The noise produced by the compactor shall conform to MIL-STD-1474 requirements with the exception of MIL-STD-1474, 5.1.1.3.2, 5.2, 5.3, and 5.4, when tested in accordance with 4.5.2.6 of this specification and MIL-STD-1474, 5.5. The noise level shall not exceed category C (90 dB(A)). The provisions of MIL-STD-1474, 4.2 and 5.3 shall be provided if MIL-STD-1474, category D (85 dB(A), cannot be met. (Warning label, if required, shall specify the distance in feet at which 85 dB(A) will be achieved (i.e., hearing protection required within “X” feet).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

3.6 Steering system. The compactor shall be equipped with a hydraulic powered articulated (center point) type steering system which provides for tracking of front and rear wheels of full width coverage. Compactors, built in two sections with a hinge point for articulation, shall have steering frame locks conforming to SAE J276. A caution plate shall be posted on each side of the compactor near the articulation point cautioning personnel not to stand in the area of the articulation point when the engine is running and to use the steering locks when servicing the equipment and during transport.

3.7 Lighting system. The compactor shall be furnished with front and rear mounted head lamps or flood lamps for illumination of the area in front of and behind the compactor for night operation of the compactor.

3.8 Propulsion system. The compactor shall be equipped with a torque converter and a power shift transmission having at least 3 gear speed ratios in both forward and reverse. A single forward-reverse lever shall be provided to control the direction of the compactor for each of the 3 minimum gear speed ratios. Engine power may also be transmitted through a full hydrostatic drive with infinitely variable speed control in forward and reverse. The compactor engine starting system shall be such that the transmission must be placed in neutral position before the engine can be started.

3.9 Brake system. The compactor shall be provided with a brake system which meets the performance requirements of SAE J1136.

3.9.1 Brake fluid. When hydraulic brakes are utilized, the brake system shall be compatible with silicone brake fluid conforming to MIL-B-46176.

3.10 Strike-off (leveling) dozer blade. The leveling blade shall be hydraulically operated and shall have a replaceable cutting edge. The blade width shall be wider than the compactor width, but shall not exceed the compactor width by more than 6 inches on each side. The blade height shall be not less than 30 inches. Hydraulic controls shall include lift, lower, float and hold positions.

3.11 Wheels and cleaners. Each compactor wheel or drum shall be provided with tamping feet or segmented impact pads. The tamping foot tips or segmented impact pad caps shall be of the replaceable type. Adjustable and replaceable cleaners shall be provided fore and aft.

3.12 Control station. The compactor shall be equipped with a operator control station. The station shall be sized in accordance with SAE J154. Access and egress from the station shall be in accordance with SAE J185.

3.12.1 Seating. The control station shall be equipped with a seat conforming to SAE J899. The seat shall be covered with a durable, waterproof covering.

3.12.2 Instruments. The control station shall be equipped with all instruments, gauges, and indicators necessary for operation of the compactor. As a minimum, the station shall be equipped with an ammeter or voltmeter, an oil pressure gauge, a fuel gauge, and an engine coolant temperature gauge. Pictograms conforming to SAE J1362 may be used in lieu of text labels. Instruments shall be located in accordance with SAE J209.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

3.12.3 Controls. The control station shall be equipped with all controls necessary for operation of the compactor. Controls shall be designed and located in accordance with SAE J297 and J898. Pictograms conforming to SAE J1362 may be used in lieu of text labels.

3.13 Diesel engine. The compactor shall be powered by industrial diesel engine having horsepower, torque, and speed characteristics to satisfactorily meet all performance requirements specified herein without exceeding the engine manufacturer's intermittent rated horsepower of the engine furnished. The engine governed speed shall be set and sealed in accordance with the engine manufacturer's recommendations. The engine shall operate on either JP-8 turbine or diesel fuel conforming to MIL-T-83133 or VV-F-800, respectively.

3.13.1 Engine fuel tank. The fuel tank shall be corrosion resistant and of sufficient capacity for not less than 10 hours operation at the maximum fuel rating of the engine. The fuel tank shall be located in a manner which will not allow spills or overflows to run onto the engine, exhaust, or electrical equipment. Fuel lines shall be protected against mechanical damage. Construction and mounting shall be such that neither vibration nor tightening of mounted devices will cause leaks to develop. The bottom of the fuel tank and its supporting members shall not be lower than the lowest adjacent part of the chassis or body. A fuel line shutoff to the tank shall be provided if the fuel filter is mounted lower than the top of the fuel tank. The fuel fill port shall be labeled “DIESEL OR JP-8 FUEL ONLY” in letters not less than 1 inch height.

3.13.2 Engine oil sampling valve. An oil sampling valve shall be provided on the engine. The valve shall be located in such a way as to insure that personnel will not be exposed to danger when taking oil samples with the engine running. The location of the valve shall be such that when samples are taken, it shall be a true representation of oil that is flowing while the engine is running. An oil sampling valve shall be provided for the transmission and hydraulic system. The sampling valve shall be labeled adjacent to the valve indicating the type of oil sampled (engine or transmission or hydraulic, as applicable).

3.13.3 Diagnostic connector assembly (DCA). The compactor shall incorporate an easily accessible DCA located in or near the operator's compartment for interface with the Simplified Test Equipment for Internal Combustion Engines Reprogrammable (STE/ICE) test equipment. The DCA shall be in accordance with TACOM drawing no. 12258941 and shall be labeled "Diagnostic Connector Assembly". All requirements for DCA shall be in accordance with STE/ICE-R design guide for vehicle Diagnostic Connector Assemblies, report no. CR-82-588-003, revision 1. The DCA shall have the capabilities for measuring the minimum functions defined in table 2-2 of report no. CR-82-588-003, revision 1. Additional test parameters to be monitored in either the DCA or transducer kit (TK) mode shall be as follows: fuel return pressure, engine oil pressure, engine oil filter pressure drop, starter solenoid voltage, and transmission oil pressure. Test points identified to monitor functions in the TK mode shall be accessible without the removal of major assemblies and installed attachments. Those additional test parameters which are inaccessible for monitoring without the removal of other components in the TK mode shall be monitored in the DCA mode. Fittings/adapters required for interface with the STE/ICE-R test set when monitoring in the TK mode shall be permanently installed on the compactor to insure that adapters in the STE/ICE-R test set readily mate with the TK mode test point locations. A separate wiring harness shall be provided for the DCA and shall include all wiring and necessary hardware to perform required capabilities. A fuel shut-off method shall be provided for conducting compression unbalance checks. The contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

shall also provide STE/ICE-R vehicle test cards in the format specified in TACOM drawing 12258955 addressing both DCA and TK measurements, and shall incorporate the test cards into the compactor technical manuals.

3.14 Electrical system. The compactor shall be furnished with a 24 volt electrical system including a NATO slave receptacle conforming to MS52131. The connector shall be provided and installed on the exterior of the vehicle near the battery enclosure and shall be accessible to personnel on the ground. A data plate shall be provided adjacent to the salve receptacle which reads "24 volts".

3.14.1 Batteries. Batteries conforming to MS52149, type 6TL shall be furnished and shall accessible for service with removal of other components. Batteries shall be negative grounded in accordance with SAE J538. Positive and negative terminals shall be identified and corrosion resistant bolts and nuts provided. Positive and negative cable terminals shall be color coded. A pictorial battery connection diagram shall be provided. The diagram shall be located such that it is viewable by the maintainer during battery maintenance. The battery circuit shall be provided with a reverse current device to protect the voltage regulator from damage when the batteries are connected in reverse polarity.

3.15 Electromagnetic interference. The electromagnetic interference emission and susceptibility characteristics of the compactor shall conform to SAE J551, devices category.

3.16 Bracket assembly, rifle stowage. A rifle stowage bracket assembly conforming to Drawing 13229E8014 shall be furnished and mounted by the contractor. The location of the bracket shall be such that it is accessible to the operator and provides clearance for the rifle to be removed. The bracket shall be located away from operator's controls and shall not impair the vision of the operator.

3.17 Transportability. The compactor shall be capable of being transported (see 6.2), by military or commercial trailers, rail, marine vessels, and aircraft and must be capable of withstanding the impact forces encountered in shipment without damage or permanent deformation. The compactor shall be equipped with tiedown and slinging provisions. During preparation for highway or rail transport, the exhaust stack, ROPS, and blade may be removed provided disassembly and reassembly can be accomplished in 60 minutes or less by a mechanic using only hand tools and a lifting device with operator. The compactor shall have 25 percent of its fuel supply and shall be fully serviced when transported.

3.17.1 Tiedown provisions. The tiedown provisions shall conform to MIL-STD-209, class 2 or 3, type IV equipment, and to MIL-STD-1791 for equipment restraint criteria. The tiedown provisions shall satisfactorily complete the pull testing as specified in 4.5.2.9, without weld failure, permanent deformation, cracking, loosening, or breaking of the provision or its connecting structural components. Tiedown points shall be labelled "TIEDOWN HERE" and combination lift/tiedown points shall be labelled "LIFT/TIEDOWN HERE". The labels shall conform to MIL-STD-1472.

3.17.2 Slinging provisions. The slinging provisions shall conform to MIL-STD-209, class l or 3, type IV. The provisions shall enable the complete compactor to be lifted in the normal operating position. The provisions shall be located so that not less than 1-inch clearance is maintained between slings and all exterior parts and shall be fastened to members which will withstand stresses in the amount and direction of pull specified for the provisions without weld failure, permanent deformation, cracking, loosening, or breaking of the provision or its connecting structural components. Slinging provisions may also be used as tiedown provisions when such provisions meet

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

the requirements specified in 3.17.1. Lift points shall be labelled “LIFT HERE”. The labels shall conform to the requirements of MIL-STD-1472.

3.17.3 Air transportability. The compactor shall meet the requirements of MIL-STD-1791 for air transport (see 6.7).

3.17.4 Rail transportability. The compactor shall be rail transportable in CONUS and NATO countries without restrictions. When loaded on a 50-inch (127 cm) high rail car, the compactor shall have a dimensional profile within the AAR outline diagram and the Gabarit International de Chargement (GIC), as specified in figure 1. The compactor shall be capable of withstanding shock loads resulting from the rail impact testing specified in 4.5.2.10 without failure, damage, or permanent deformation.

3.17.5 Highway transportability. The compactor, when loaded on a semitrailer/tractor, shall be within the highway permit limits of all states.

3.17.6 Marine transportability. The compactor shall be transportable by LARC-V and larger vessesl operating over any type of waterwary. The compactor shall withstand, without damage, the shock, rolling, and pitching normally experienced in marine transportation on the deck or in the hold of the cargo vessel. For design purposes, the following conditions are assumed for marine transport:

a. Normal roll shall not exceed 15 degrees.
b. Normal pitch shall not exceed 10 degrees.
c. Stacking containers six high, when each is loaded to its rated groos weight of 17,500 pounds in accordance with ISO 1496-I.

3.18 Towing attachments. Towing attachment(s) shall be provided. The attachment(s) shall be hook(s) or loop(s) suitable for towing (or recovering) the compactor. Instructions for the use of the attachments shall be included on plates made of material specified in 3.24. The instruction plates shall be permanently affixed to the compactor.

3.19 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating. The compactor shall be serviced with lubricants selected by the contractor which are listed in MIL-HDBK-l13. Run-in and testing shall be performed with these lubricants. A lubrication data plate conforming to SAE J753 shall be mounted on each compactor and shall identify all lubricants and applicable temperature ranges to be used when servicing the compactor. Grease lubrication fittings conforming to SAE J534 shall be provided in a protected, but accessible location.

3.19.1 Lubrication fittings. Lubrication fittings shall conform to MIL-F-3541, type I, II or III. Fittings shall be located in a protected position. Fittings shall be accessible to a grease gun conforming to MIL-G-3859, equipped with a straight hydraulic coupler and l0-inch flexible extension. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Engine-housing side panels and plates equipped with hand-operable, quick-disconnect fasteners may be removed to provide accessibility to lubrication fittings.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:50Z
Check the source to verify that this is the current version before use.

3.19.2 Filling, draining, and checking provisions. Enclosures such as gear cases and transmission housing that contain a reservoir of lubricants for the lubrication of the parts enclosed shall be equipped with dipstick, check plugs not less than 1/2-inch pipe size, or sight gages to determine the level of the lubricant. Each enclosure shall be equipped for filling the enclosure with lubricant and for draining. The drain outlet shall be fitted with a drain plug conforming to MS35844. The drain outlet shall be located so that removal of the plug will result in complete drainage of the lubricant from the enclosure into a suitable container. Integral tubes or troughs may be used to satisfy this requirement.

3.19.3 Servicing and adjustments. The contractor shall service and adjust each compactor for correct operation and travel.

3.20 Instruction data plates. Instruction data plates shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. The compactor shall be furnished with data plates/labels which include all warnings, cautions, and diagrams describing any special or important procedures to be followed in assembling, operating, or servicing the compactor. All data plates shall be attached by screws, bolts, or rivets, in a conspicuous protected location.

3.20.1 Shipping data plate. A shipping data plate shall be furnished showing the silhouette of the compactor in transport position and indicate the center of gravity, weight of the compactor, and the location and capacity of the lifting and the tiedown provisions. The recommended lifting and tiedown arrangement shall be included on the plate.

3.20.2 Identification marking. The compactor shall be identified and marked in accordance with MIL-STD-130.

3.21 Treatment and painting. The portions of the compactor normally painted, internally and externally, shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. The top coat color shall be 34094 green 383 conforming to FED-STD-595. When specified (see 6.2), the compactor shall be overcoated in accordance with the Government furnished camouflage patterns. High temperature surfaces shall not be painted with CARC paint.

3.21.1 Camouflage pattern data. When specified (see 6.2), the contractor shall provide camouflage pattern data.

3.22 Tool box. The compactor shall be provided with a lockable, waterproof compartment or tool box to carry tools and accessories required for operation and operator maintenance of the equipment.

3.23 Workmanship. Each compactor shall have no evidence of cracks, dents, scratches, burrs, sharp edges, loose parts, missing fasteners, distortions, spatter, or foreign material. Workmanship of the compactor shall in no case, be less than that of comparable products furnished to the commercial market.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

3.23.1 Riveted connections. All rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall completely fill the hole. Rivet heads shall be of an approved shape and shall be concentric with the rivet. Rivet heads shall make full contact with the intended surface. The rivets shall be so fabricated as to develop a joint strength not less than the design value.

3.23.2 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defects which reduces the castings ability to perform its intended function.

3.24 Government-furnished property. When specified (see 6.2), the following property in the quantity indicated will be furnished by the Government (see 6.8).

Item No.	Description
1	Camouflage paint pattern.
2	Report CR 82-588-003 STE/ICE Design Guide for Vehicle Diagnostic Connector.
3	STE/ICE-R vehicle test cards (drawing 12258955)

3.25 Decontamination apparatus, portable (DAP), M13. The compactor DAP mounting bracket (MS53052-1) shall be installed in an upright position in a manner which shall not interfere with the normal operation of the equipment and be accessible to personnel on the ground. The DAP device has a flash point of 165 °F and shall be installed away from exhaust or heat sources.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The compactor shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Test. The compactor shall be tested as specified in 4.5.2.1 through 4.5.2.12. All first article tests shall be run using JP-8 fuel conforming to MIL-T-83133. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each compactor shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Test. Each compactor shall be completely assembled, properly adjusted, and otherwise serviced for operation. Each compactor shall be operated for not less than 2 hours. The compactor shall be driven in both the forward and reverse mode for a total distance of not less than 5 miles. All controls shall be operated as many times as necessary, but not less than 30 times, to determine ease of operation, effectiveness, and responsiveness, and that the mechanisms actuated by the controls operate promptly, fully, and without restriction, malfunction, or excessive vibration. Gear cases, bearings, and other moving parts shall be examined for excessive heating or abnormal operation insofar as is practicable and possible. Tests shall be run using JP-8 or diesel fuel conforming to MIL-T-83133 and VV-F-800, respectively (see 3.13). The entire compactor shall be examined for evidence of failure, slippage, or deformation. Failure to pass any phase of this test shall be cause for rejection.

4.5 Inspection procedures.

4.5.1 Examination. The compactor shall be examined for the following defects:

101. Compactor not assembled as specified (see 3.1).
102. Dimensions not as specified (see 3.1.2).
103. Materials not as specified (see 3.4).
104. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration of the applicable storage and operating environments (see 3.4.1).
105. Dissimilar metals are not effectively insulated from each other (see 3.4.2).
106. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the compactor (see 3.4.3).
107. Radioactive materials used (see 3.4.4).
108. Asbestos materials used (see 3.4.5).
109. Maintainability not as specified (see 3.5.1).
110. Safety devices missing or not as specified (see 3.6).
111. Rollover protective structure (ROPS) not as specified (see 3.5.2.1).
112. Human factors engineering requirements not as specified (see 3.5.3).
113. Steering system not as specified (see 3.6).
114. Lighting system not as specified (see 3.7).
115. Propulsion system not as specified (see 3.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

116. Brake system not as specified (see 3.9).
117. Brake fluid not as specified (see 3.9.1).
118. Dozer blade not as specified (see 3.10).
119. Wheels and cleaners not as specified (see 3.11).
120. Control station not as specified (see 3.12 thru 3.12.3).
121. Engine not as specified (see 3.13).
122. Engine fuel tank not as specified (see 3.13.1).
123. Engine oil sampling valve not as specified (see 3.13.2).
124. Diagnostic connector not as specified (see 3.13.3).
125. Electrical system not as specified (see 3.14).
126. Batteries not as specified (see 3.14.1).
127. Electromagnetic interference not as specified (see 3.15).
128. Rifle stowage bracket assembly not as specified (see 3.16).
129. Transportability not as specified (see 3.17 thru 3.17.6).
130. Towing attachments not as specified (see 3.18).
131. Lubrication not as specified (see 3.19).
132. Lubrication fittings not as specified (see 3.19.1).
133. Filling, draining, and checking provisions not as specified (see 3.19.2).
134. Servicing and adjustments not as specified (see 3.19.3).
135. Instruction data plates missing or not as specified (see 3.20).
136. Shipping data plate not as specified (see 3.20.1).
137. Identification marking not as specified (see 3.20.2).
138. Treatment and painting not as specified (see 3.21).
139. Camouflage pattern data not provided as specified (see 3.21.1).
140. Tool box not as specified (see 3.22).
141. Workmanship not as specified (see 3.23).
142. Riveted connections not as specified (see 3.23.1).
143. Castings not as specified (see 3.23.2).
144. Decontaminating mounting bracket not as specified (see 3.25).

4.5.2 Tests.

4.5.2.1 Test conditions. Unless otherwise specified in a test, tests shall be performed without shelter and at the climatic conditions existing at the place of test. The compactor shall operate as specified herein without maintenance other than the contractor's recommended normal scheduled maintenance as established by a maintenance schedule prepared and submitted by the contractor prior to test.

4.5.2.2 Performance. Operate the compactor on a fill, built over a natural soil subgrade having an initial density of at least 90 percent when measured in accordance with ASTM D 1557. The fill material shall correspond to two different groups of soils: a clayey sandy (sc) type with a plasticity index of 5-12, and a lean clay (cl) type with a plasticity index of 10-16, of the Soil Classification Chart in ASTM D 2487. Both types of soils, when compacted shall be within 2 percentage points of their respective optimum moisture content according to ASTM D 1557, methods B, C, or D. The compacted fill site shall be not less than 30 feet wide, with the actual width of the fill being a minimum of 3 feet wider than the compacted area as shown in figure 2. The fill may be placed prior to the start of compaction operation, during compaction operations, or the contractor may elect to till

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

the natural soil in lieu of placing fill material. When hauling equipment is run over spread, uncompacted fill material, the fill site shall be sacrificed or tilled to a uniformly loose uncompacted condition. Spreading of the fill material shall be done with a grader. Spreading runs shall be only that necessary to reach the estimated uncompacted fill lift thickness. Water distribution equipment may be used as required. The material to be compacted shall be of sufficient thickness, initially, to give a compacted lift of at least 6-inches. The laboratory density of the soil to be compacted shall be determined in accordance with ASTM D 1557, method optional. Compaction operations may be stopped by the contractor only after the following conditions have been met: Exactly 1 hour has elapsed from the time the test has begun to determine whether or not the compactor is successfully able to compact the type(s) of soils described herein to 1500 cubic yards per hour with the minimum lift and test site dimensions/restrictions cited herein; and, the soils tested have been compacted to 95 percent of maximum density at optimum water content according to ASTM D 1557. The time used in density testing shall not be counted as compaction time. Density measurements shall be taken at points along the test strip using the pattern shown on figure 2 at intervals of 200 feet. In addition, a minimum of 3 samples shall be taken at intervals of 100 feet and at random locations specified by the Government. Nuclear density testing shall be accomplished according to ASTM D 2922, method B-direct transmission. The depth of measurement shall correspond to the compacted soil layer thickness (minus 1 inch maximum). Oven dried laboratory soil moisture content tests shall be used to check, and correct if necessary, the nuclear moisture reading. An achieved full depth fill material density of less than 95 percent of maximum density at optimum water content according to ASTM D 1557, or compacted fill layer thickness of less than 6-inches in depth shall constitute failure of this test. Sufficient measurements shall be taken to determine the in-place quantity of material compacted. The above procedure shall be repeated for a total of 3 times for each type of soil. The average compacted cubic yards shall be determined.

4.5.2.2.1 Failure criteria. An average compaction rate of less than the compacted cubic yards per hour specified in 3.1.3 and failure to achieve full depth material density or minimum compacted fill layer thickness as specified in 4.5.2.2 for each test shall constitute failure of this test.

4.5.2.3 Gradeability. The compactor shall be operated to demonstrate the capability of light bulldozing, leveling of loose material, the ability to climb a 30 degree slope, and turning and maneuvering on a 15 degree slope as specified in 3.3.

4.5.2.3.1 Failure criteria. Inability to negotiate the grade under either condition specified above shall constitute failure of this test.

4.5.2.4 High temperature operation. The contractor shall provide proof (test data or calculation) that the compactor can be operated in ambient temperatures up to and including 125 °F without exceeding the engine manufacturer's recommended limits for radiator top tank temperature, engine oil temperature in the sump and gallery, and hydraulic component manufacturer's fluid temperature limit.

4.5.2.4.1 Failure criteria. Failure to meet this requirement shall constitute failure and acceptance of the equipment shall not be approved until corrective action has been taken and approved by the Government.

4.5.2.5 Electromagnetic interference. Unless otherwise specified, the compactor shall be tested in accordance with SAE J551. A report tabulating the allowable maximum interference and the measured interference shall be furnished with the first article test report.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

4.5.2.5.1 Failure criteria. Failure to meet the requirements of SAE J551, shall constitute failure of this test.

4.5.2.6 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 and reported in the format specified by MIL-STD-1474. Noise contours shall be taken at not fewer than 12 equal horizontal arc increments, with data recorded at the noisiest position. The noise levels at typical operating position shall also be measured and recorded.

4.5.2.6.1 Failure criteria. Failure to comply with MIL-STD-1474 or 3.5.4 provisions shall constitute failure of this test.

4.5.2.7 Brake test. The compactor shall be completely stopped five times as specified in 3.9 within a period of 10 minutes, to test brake fadeout. The distance from point of brake application to actual stop shall be measured on the fifth pass to determine conformance of 3.9. The service brake test shall be conducted in both forward and reverse. With the roller stopped on a 15 percent slope, the parking brakes shall be applied and shall be capable of securing the compactor in the stopped position without creeping. The brake test shall be conducted with the compactor heading up and down slope.

4.5.2.7.1 Failure criteria. Failure of the compactor to meet the braking requirements specified in 3.9 shall constitute failure of this test.

4.5.2.8 Tiedown provision test. The tiedown provisions shall be tested in accordance with MIL-STD-209 to prove conformance to 3.17.1. Inability to meet the requirements of 3.17.1 shall constitute failure of this test.

4.5.2.9 Slinging provision test. The slinging provisions shall be tested in accordance with MIL-STD-209 to prove conformance to 3.17.2. Inability to meet the requirements of 3.17.2 shall constitute failure of this test.

4.5.2.10 Rail transportability test. Rail impact shall be tested in accordance with MIL-STD-810 to prove conformance to 3.17.4. Inability to meet the requirements of 3.17.4 shall constitute failure of this test.

4.5.2.1 Air transportability test. The air transportability shall be tested in accordance with MIL-STD-1792 to prove conformance to 3.17.3. Inability to meet the requirements of 3.17.3 shall constitute failure of this test.

4.5.2.12 DCA capability. The contractor shall perform a 100 percent visual inspection of all DCA wiring harnesses prior to installation on the compactor to ensure wire and connections are free of error. After installation on the compactor, test the DCA harness (see Report No. CR-82-588-003) on each vehicle with a DCA tester prior to interfacing with STE/ICE.

4.5.2.12.1 Failure criteria. Nonconformance to 3.13.3 shall constitute failure of this test.

4.5.2.12.2 DCA-STE/ICE interface. Upon completion of inspection and tests specified in 4.5.2.12, test the DCA for all measurements specified in 3.13.3 using the STE/ICE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

4.5.2.12.2.1 Failure criteria. Nonconformance to 3.13.3 or failure of any components or wiring in the DCA harness which results in inability to obtain the measurements previously recorded with the STE/ICE shall constitute failure of this test.

4.6 Inspection of packaging. The preservation, packing and marking shall be examined in accordance with the quality assurance provisions of ASTM D 3951.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B, or commercial as specified (see 6.2).

5.1.1 Level A or B. Each complete compactor shall be preserved as specified for level A or B requirements for rollers, in accordance with MIL-R-3075.

5.1.2 Commercial. Each complete compactor shall be preserved in accordance with the manufacturer's commercial practice in a manner to afford protection against deterioration and damage during shipment from the contractor to the initial destination.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A or B. Each complete compactor shall be packed as specified by the level A or B requirements for rollers, in accordance with MIL-R-3075.

5.2.2 Commercial. Each complete compactor shall be packed in accordance with ASTM D 3951.

5.3 Marking. Marking shall be level A, B, or commercial as specified (see 6.2).

5.3.1 Level A or B. The compactor shall be marked as required for rollers in accordance with MIL-R-3075.

5.3.2 Commercial. The compactor shall be marked as specified by ASTM D 3951.

6. NOTES

(This section contains information of general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The high speed, segmented compactor covered by this specification will be used for embankment compaction of SC type soils during the construction of roads, airfields and dams.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article is not required (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

d. Time frame for submission of first article and number of compactors required (see 3.2).
e. When the Government will conduct any or all of the first article examination and tests (see 3.2). When the Government will conduct some but not all of the first article examination and tests the contracting officer shall specify which examination and test will be conducted by the Government and which examination and test will be conducted by the contractor (see 3.2).
f. When electromagnetic interference requirements are other than as specified (see 3.15).
g. When overcoating with camouflage patterns is required (see 3.24).
h. When camouflage patterns will be provided (see 3.24.1 and 6.2.1).
i. Degree of preservation and packing required (see 5.1 and 5.2).
j. Degree of marking required (see 5.3).
k. When a transportability report is required (see 6.2.1 and 6.7).

6.2.1 Consideration of data requirements. The following data requirements must be listed, as applicable, on the Contract Data Requirements List (DD Form 1423) when this specification is applied on a contract, in order to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference paragraph	DID Number	DID Title
a. 3.24.1	DI-MISC-80192	Color photograph prints
b. 3.24.1	DI-MISC-80176	Camouflage line art data
c. 3.17	DI-PACK-80880	Transportability report

The above DID's were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Commerciality. When requested by the procuring activity, the contracting officer should require the contractor to submit evidence to establish commerciality of the compactor and furnish names and addresses of non-Government sources that have acquired the compactor at least one year prior to the opening date of the solicitation.

6.5 Technical manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, military specifications and

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

standards that have been cleared and listed in DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL) must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under separate contract line item in the contract.

6.6 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions or shipment of compactors.

6.7 Transportability report. When required (see 6.2), the contracting officer should require the contractor to provide sufficient information (dimensions and weight) to the Government to confirm that the compactor being supplied can be loaded and transported by C-5 aircraft.

6.8 Government-furnished property. The contracting officer should arrange to furnish the property listed in 3.24.

6.9 Subject term (key word) listing.

Diesel engine
Embankment
Tamping foot

6.10 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
Army - ME

Project 3895-A341

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

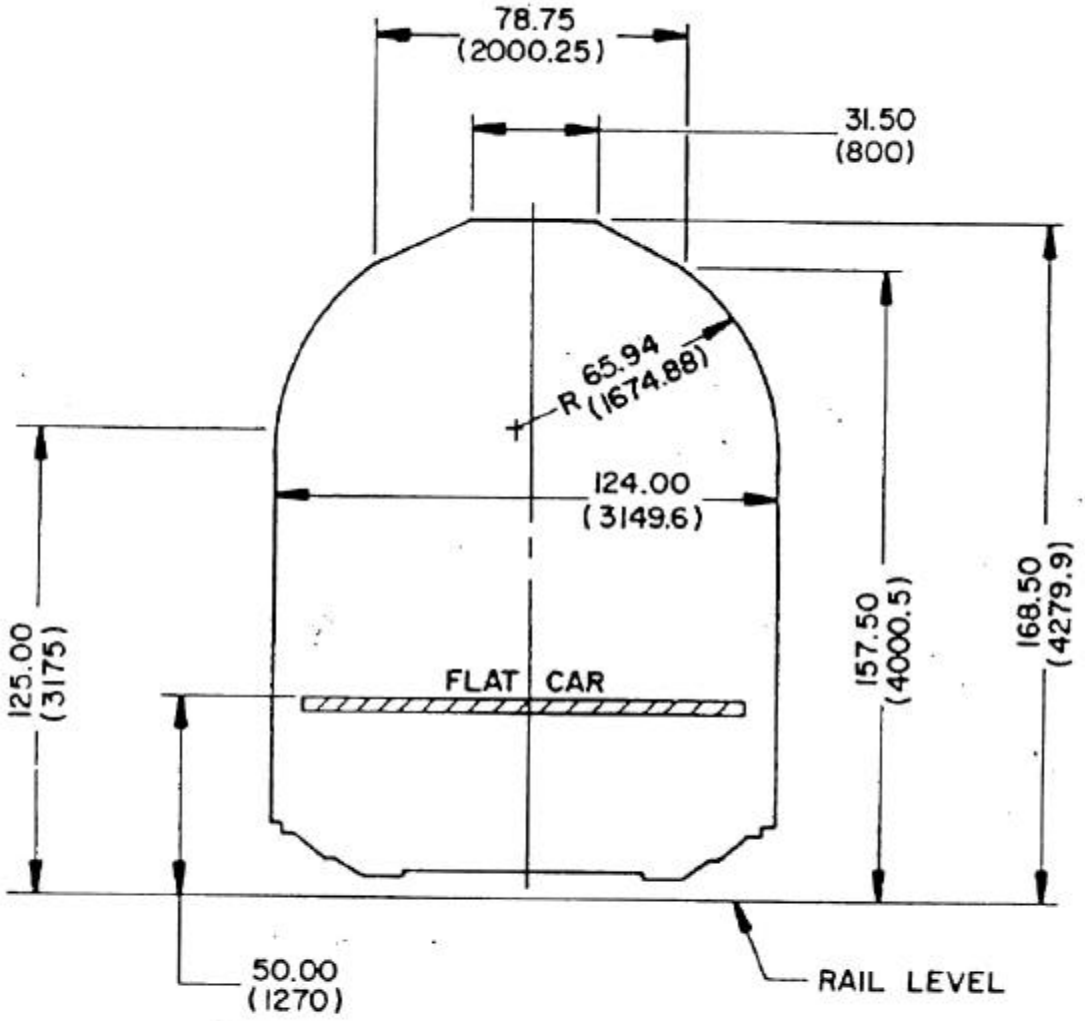

NOTE: DIMENSIONS SHOWN: INCHES (MILLIMETERS)

FIGURE 1. Gabarit International De Chargement (GIC) clearance diagram.

X - 4093 C

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

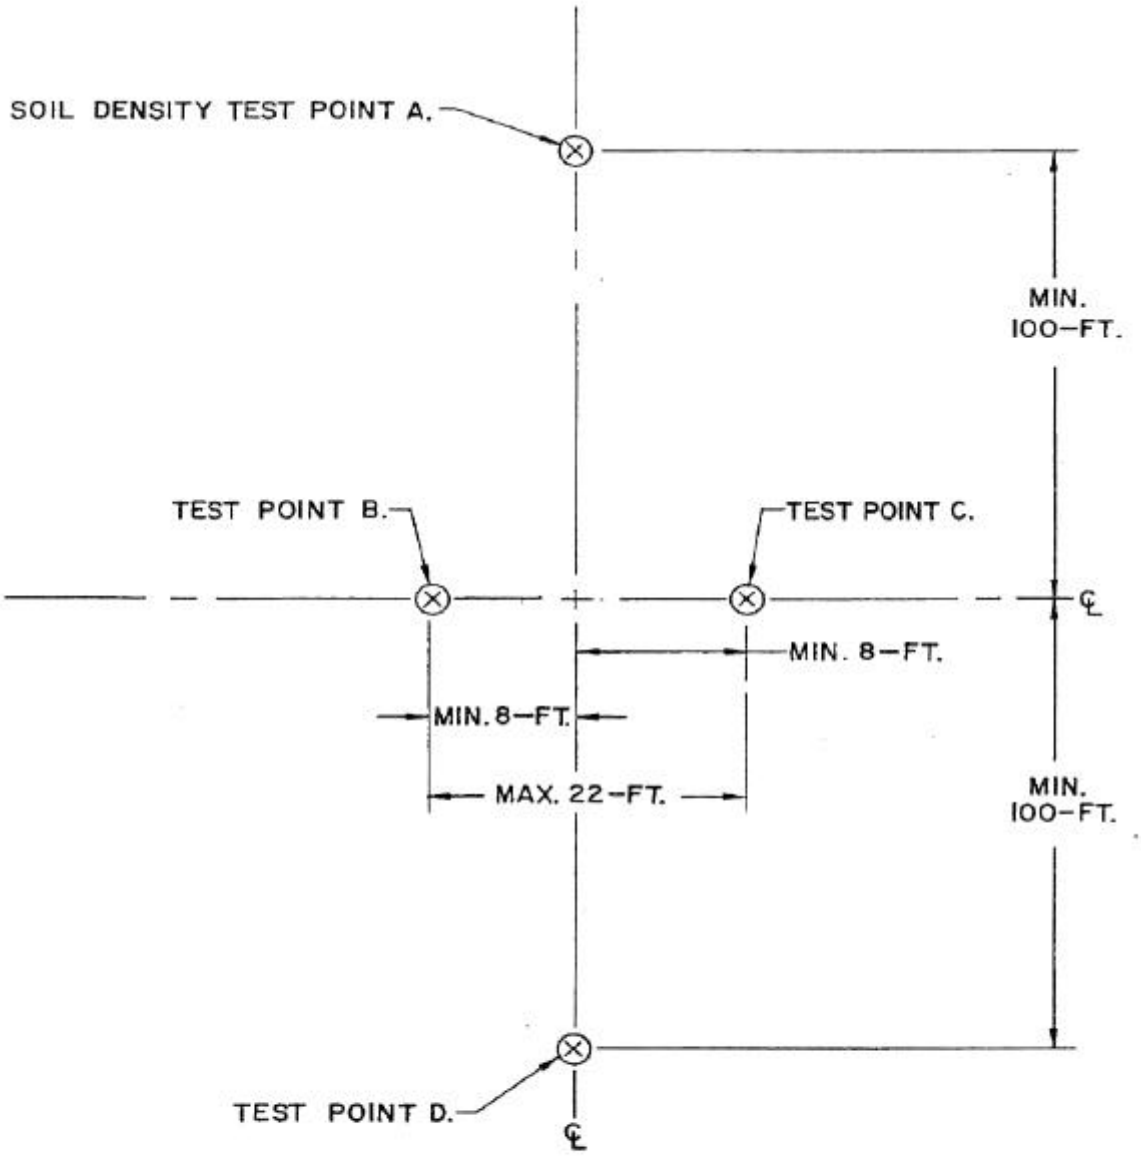


FIGURE 2. Test strip pattern.

X-4080

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-53024B(ME)	2. DOCUMENT DATE (YYMMDD) 921030

3. DOCUMENT TITLE Compactor, High Speed, Self-Propelled, Commercial Construction Equipment (CCE)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (if applicable) (2) AUTOVON	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. NAME Betty Taylor	b. TELEPHONE (Include Area Code) (1) Commercial (703) 704-3466 (2) AUTOVON 654-3466
c. ADDRESS (Include Zip Code US Army Belvoir RDE Center ATTN: SATBE-TSE Fort Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:50Z
Check the source to verify that this is the current version before use.