MILITARY SPECIFICATION

TRANSIT FRAME, ANTENNA
MT-3894()/TRC and MT-3895()/TRC

1. SCOPE

1.1 This specification covers the following:

1.1.1 One type of antenna transit frame, capable of carrying one complete Antenna Group AN/TRA-37() in stored condition; designated Transit Frame Antenna MT-3894()/TRC. (See 6.1 and 6.5)

1.1.2 One type of antenna transit frame, capable of carrying two each complete Antenna Group AN/TRA-37() in stored condition; designated Transit Frame, Antenna MT-3895()/TRC. (See 6.1 and 6.5)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

CCC-D-950	Dying and Aftertreating Processes for Cotton Fabrics
PPP-C-650	Crates, Wood, Open and Covered

FSC-2510

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation, Methods of
MIL-W-530	Webbing,Textile,Cotton,General Purpose, Natural or in Colors
MIL-W-6858	Welding,Aluminum, Magnesium, Non-Hardening Steels or Alloys and Titanium, Spot, Seam and Stitch
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment
MIL-W-45205	Welding,Gas, Metal-Arc and Gas, Tungsten-Arc, Aluminum Alloys,Readily Weldable, for Structures, Excluding Armor

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-1235	Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

DRAWINGS

ELECTRONICS COMMAND

DL-SC-B-569009	Transit Frame, Antenna MT-3894()/TRC
DL-SC-B-604725	Transit Frame, Antenna MT-3895()/TRC

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies.)

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:55Z
Check the source to verify that this is the currentversion before use.

3. REQUIREMENTS

3.1 Description.-

3.1.1 MT-3894( )/TRC.- This antenna transit frame is an all metal framework which is capable of carrying all components of one Antenna Group AN/TRA-37( ). The frame includes a canvas cover. The envelope of the frame is 79 inches wide at the top, 48½ inches wide at the base, 85 inches long, 70 inches high (same as Shelter, Electrical Equipment S-250( )/G), and is normally mounted on the bed of a 1¼ ton utility vehicle.

3.1.2 MT-3895( )/TRC.- This antenna transit frame is an all metal framework which is capable of carrying all components of two (2) each Antenna Group AN/TRA-37( ). The transit frame includes a canvas cover. The envelope of the frame is 86 inches wide, 145¼ inches long, 75¼ inches high (similar to a Shelter, Electrical Equipment S-280( )/G), and is normally mounted on the bed of a 2½ ton, 6 X 6 vehicle.

3.2 Preproduction sample.- Unless otherwise specified in the invitation for bids and contract, the contractor shall furnish one preproduction sample of the transit frame(s) on contract for approval. (See 4.3)

3.3 Construction.-

a. Transit Frame, Antenna MT-3894( )/TRC shall be constructed in accordance with drawings as listed on DL-SC-B-569009. (See 4.6)

b. Transit Frame, Antenna MT-3895( )/TRC shall be constructed in accordance with drawings as listed on DL-SC-B-604725. (See 4.6)

3.4 Vehicular transportation.- The fully loaded antenna transit frame(s) shall be capable of being transported over cross-country terrain by a military vehicle without sustaining any buckling, bending, cracking or other permanent deformation. (See 4.7)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

3.5 Railroad transportation.- The fully loaded antenna transit frame(s) shall be capable of being loaded, blocked, and braced on a flatcar for shipment by rail. When so loaded, the equipment shall be subjected to and withstand the test of paragraph 4.8 without sustaining any buckling, bending, cracking, or other permanent deformation.

3.6 Drops, flat and rotational.- The fully loaded antenna transit frame(s) shall be capable of withstanding drops of 18 inches onto concrete. The equipment shall be subjected to and withstand the tests of paragraphs 4.9.1 and 4.9.2 without sustaining any buckling, bending, cracking or other permanent deformation. To insure that no damage to the components of the AN/TRA-37( ) Antenna Group has resulted, the antenna(s) shall be erected and all movable and rotatable components shall function properly and the following performance requirements shall be met:

3.6.1 Antenna VSWR, assembled.- The VSWR (voltage-standing-wave-ratio) measured at the input of the 25 feet-long-flexible-waveguide section shall not exceed 1.58 from 4.4 to 5.0 GHz. (See 4.9.3)

3.6.2 Feedhorn leakage.- When pressurized with nitrogen to 1 psig for 30 minutes, the leakage rate from the feedhorn shall not exceed 0.25 cubic foot per hour. (See 4.9.4)

3.7 Mounting inserts.- All mounting inserts shall be installed without use of auxiliary materials, such as adhesive, and when installed each insert shall be capable of withstanding the axial and the torque loads referenced in 4.10. There shall be no damage to the insert and no rotation of the insert from its original position. Testing of inserts shall be made prior to use of the inserts in fastening bracketry, racks, etc.

3.8 Canvas cover.- The fabric and thread in the canvas cover(s) shall be preshrunk or allowance shall be made for shrinkage in order to provide for satisfactory fit of finished covers both before and after they are soaked in tap water at normal room temperature for 24 hours and then dried thoroughly at normal room temperature. (Satisfactory fit shall mean fit without any pulling or stretching of the cover, and the cover is within specified drawing limits). (See 4.11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

3.9 Cleaning.- After fabrication, parts shall be cleaned in accordance with good commercial practice or as specified in the applicable portions of Specification MIL-F-14072. Cleaning processes shall have no deleterious effect. Corrosive material shall be removed completely before the parts are assembled. After assembly, units shall be cleaned thoroughly and shall be free from particles of flux, scale, and any other foreign material. In addition, when necessary, such cleaning shall also be performed before and after final assembly of the units.

3.10 Finish.- The antenna transit frame(s) shall be finished in accordance with Specification MIL-F-14072 and the equipment drawings.

3.11 Marking.-

3.11.1 General.- Marking of the antenna transit frame(s) shall conform to Specification MIL-M-13231 and the equipment drawings.

3.11.2 Aircraft loading data plate.- The antenna transit frame(s) shall be provided with data plates in accordance with the equipment drawings. Gross weights and locations of centers-of-gravity shall be determined by the contractor using the first article (preproduction sample).

3.11.3 Nameplates.- The antenna transit frame(s) shall be serial numbered sequentially and provided with a nameplate so imprinted in accordance with the equipment drawings.

3.12 Securing of parts.- Brackets, lugs, flanges, inserts, bolts, and other mounting arrangements shall retain components of the transit frame and the antenna group securely so that loosening, wear of mounting arrangements, or permanent separation of parts or components will not occur when the equipment is subjected to the specified drop and transportation tests.

3.12.1 Screws, threaded devices, and related parts.- Screws, threaded devices and related parts shall be as defined by the drawings. Thread forming screws shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

3.13 Tropicalization of material.- The canvas cover, binding tapes, web-straps, etc. shall be treated to be resistant to moisture and fungi as on the drawings and as follows:

3.13.1 Cloth, duck.- The duck in the transit cover shall be given Class B after-treatment, using inhibitor (f) as specified in specification CCC-D-950.

3.13.2 Web-straps.- Straps and tape shall be Type III, Class 4 treated in accordance with specification MIL-W-530.

3.13.3 Treating materials.- Treating materials containing a mercury-bearing fungicide shall not be used. The contractor shall determine that the treating material is compatible with the material or surface to be treated. Selection of treating materials shall be such that any increase in flammability of treated material will be held to the practical minimum.

3.13.4 Toxicity.- Treating materials shall cause no skin irritation or other injury to personnel handling the treated material during fabrication, transportation, operation, or maintenance of the equipment, or during use of the finished items when used for the purpose intended.

3.13.5 Flexibility.- Treatment shall not affect the flexibility of treated materials, to the extent that the equipment may fail to meet specified requirements when subjected to specified service conditions.

3.13.6 Statement of treatment.- The statement of treatment shall indicate whether or not nutrient materials have been employed. If nutrient materials have been used, it shall also describe in detail the materials to be treated and the treating compounds and processes the contractor proposes to use. (See 6.2)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

3.14 Welding.- All welded joints shall be as defined by the drawings and shall be such that grinding on the finished weld will be unnecessary. Inert-gas-shielded arc welding (MIG) using helium, argon or a mixture of the two, shall be used for welding of aluminum joints. The welding shall be in accordance with MIL-W-45205, Class B, except where spot welds are used. Spot, stitch, and seam welds shall conform to MIL-W-6858, Class B. Welds shall have thorough penetration and good fusion and shall be free of scabs, blisters, abnormal pock-marks, cracks, voids, slag inclusions, and other harmful defects. All surfaces to be welded shall be cleaned in accordance with good commercial practice and shall be free from scale, paint, grease, and other foreign materials. After welding, assemblies shall be cleaned to remove any scale, oxidation products, and excess flux. Any acid used in cleaning shall be completely neutralized and removed. (See 4.4)

3.15 Interchangeability.- Like units, assemblies, subassemblies and replaceable parts shall be physically and functionally interchangeable without modification of such items or of the equipment. (See 4.12). Individual items shall not be hand-picked for fit or performance.

3.16 Workmanship.- The transit frame shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs:

3.3 Construction
3.7 Mounting inserts
3.9 Cleaning
3.10 Finish
3.11 Marking
3.12 Securing of parts
3.13 Tropicalization
3.14 Welding
3.15 Interchangeability

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified the supplier may utilize his own facilities or any commercial laboratory acceptable to the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to insure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- Inspection shall be classified as follows:

a. Preproduction inspection (does not include preparation for delivery). (See 4.3)

b. Inspection covered by subsidiary documents. (See 4.4)

c. Quality conformance inspection.

(1) Quality conformance inspection of equipment before preparation for delivery. (See 4.5)

(2) Quality conformance inspection of preparation for delivery. (See 4.14)

4.3 Preproduction inspection.- This inspection shall consist of the inspection specified in the subsidiary documents covering the items listed in 4.4, and the inspection specified for Group A, Group B, and Group C (see Tables I,II, and III, respectively). The preproduction inspection shall normally be performed in this order:

a. Mounting inserts
b. Vehicular transportation
c. Rail transportation
d. Flat drop
e. Rotational drop

The remaining preproduction tests shall be performed in any order satisfactory to the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

4.4 Inspection covered by subsidiary documents.- The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before preparation for delivery:

Item	Where required
Finish	3.10
Marking	3.11
Tropicalization	3.13
Welding	3.14

4.5 Quality conformance inspection of equipment before preparation for delivery.- The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the government -- at its discretion --- may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements. (See 6.6). Test equipment for government verification inspection shall be made available by the contractor.

4.5.1 Each transit frame of each lot of transit frames shall be inspected for conformance to all the inspection and test requirements of Table I. Equipment so conforming, shall be subject to verification utilizing the procedures for the multilevel continuous sampling plan (CSP-M) of MIL-STD-1235, unless otherwise specified.

Table I - Group A Inspection

Inspection	Rqr Para	Insp Para	AQL Major	AQL Minor
Visual and Mechanical	3.16	4.13	1.0%	4.0%

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

4.5.1.1 Group A sampling plan.- The Group A sampling plan for the AQL listed in Table I above when used in conjunction with Table X of MIL-STD-1235, shall be as follows:

AQL%	f	K	i	k 1	k 2	k 3
1.0	½	2*	43	½	¼**	Not to be used
4.0	½	3*	15	½	¼	1/8**

* Max "K" inspection level permitted
** Max "k" sampling freq. permitted

4.5.2 Group B inspection.- This inspection, including sampling, shall conform to Table II and to the procedures for multilevel continuous sampling plan (CSP-M) of MIL-STD-1235, unless otherwise specified. Group B inspection shall normally be performed on units of production that have passed Group A inspection.

Table II - Group B inspection

Inspection	Rqr Para	Insp Para	AQL% (See 4.5.2.1)
Mounting insert	3.7	4.10	4.0
Interchangeability	3.15	4.12	4.0

4.5.2.1 Group B sampling plan.- The Group B sampling plan for the AQL listed in Table II above when used in conjunction with Table X of MIL-STD-1235, shall be as follows:

AQL%	f	K	i	k 1	k 2	k 3
4.0	½	3*	15	½	¼	1/8**

* Max "K" inspection level permitted
** Max "k" sampling freq. permitted

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

4.5.3 Group C inspection.- This inspection shall consist of the tests specified in Table III and shall normally be performed on sample units that have been subjected to and met Group A and Group B inspection.

Table III - Group C Inspection

Inspection	Rqr Para	Insp Para
Construction verification	3.3	4.6
Vehicular transportation	3.4	4.7
Rail transportation	3.5	4.8
Drops, flat and rotational	3.6	4.9
Shrinkage of cover	3.8	4.11

4.5.3.1 Sampling for inspection of construction evaluation.- The Equipment Verification Review in accordance with paragraph 4.6, shall be performed once on each part and assembly, randomly selected, and their installation into one of the first 10 transit frames producted.

4.5.3.2 Sampling for inspection of drop tests and shrinkage.- One transit frame and one cover shall be selected at random from the first 50 units or fraction thereof, and one transit frame and one cover from each additional 150 units or fraction thereof, produced and subjected to the drop tests and shrinkage test respectively.

4.5.3.3 Sampling for inspection of vehicular and rail transportation.- The transit frame selected for the first Group C drop test shall be subjected to the vehicular and rail transportation tests prior to the performance of the drop test.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

4.5.3.4 Noncompliance.- The contractor shall immediately report in writing each Group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials, as applicable, and, (ii) all units of production which were manufactured under the same conditions and which the government considers subject to the same failure. Reports shall be forwarded to the responsible technical activity designated in the contract through the Quality Assurance Representative. After corrective action has been taken, additional sample units shall be subjected to Group C inspection (all inspections, or the inspection which the sample failed, at the option of the government) and Groups A and B inspection may be reinstituted; however, final acceptance and shipment will be withheld until Group C reinspection results have shown that the corrective action was effective. (See 6.4)

4.5.4 Reinspection of conforming Group C sample units.- Unless otherwise specified, sample units which have been subjected to and passed Group C inspection may be accepted on the contract or order provided that they are resubjected to pass Group A inspection after repair of all visible damage. (See 6.4)

4.6 Construction verification.- The contractor shall perform an Equipment Verification Review (EVR), consisting of a complete technical audit of the equipment on order against the drawings (see 3.3) cited in the Technical Data Package (as supplemented by all approved engineering changes). EVR shall consist of the following:

a. An audit to establish that "as-built" antenna transit frames, including individual parts, their use in subassemblies and assemblies (components), and their final installation forming the antenna transit frame are in accordance with the end product drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

b. An audit to establish that "as-built" antenna transit frames, including parts, components and their installation, meet the acceptance requirements specified in the Technical Data Package for each part, component, and frame. The audit shall record all acceptance test methods used together with resulting verification test data.

c. Preparation of EVR report(s) containing the following information:

(1) Identification of parts, components, transit frames and details proving compliance with 4.6a and b above.

(2) Discrepancies noted.

(3) Corrective action taken.

d. Two (2) copies of the EVR report shall be submitted no later than 15 days prior to the submission of the first production unit or lot to the government technical organization cited in the contract. The results of the EVR shall be subject to verification by authorized government personnel at the time the first unit or production lot is offered for acceptance. Government verification will be to the depth and extent necessary to demonstrate that the "as-built" hardware is in accordance with the cited drawings. Copies of the EVR reports shall be made available to government personnel during the verification. The contractor shall provide the following:

(1) Segregation of parts, components of transit frames, to permit reviewing government personnel access for detailed inspection. The contractor shall also provide personnel to disassemble any parts of the transit frame necessary to permit government review of the transit frame, its components and their installation, and to reassemble parts after inspection.

(2) Have as required, responsible personnel from each functional department available for discussions in their respective areas.

(3) Adequate administrative support for the EVR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.


4.7 Vehicular transportation test.- The antenna transit frame(s) shall be secured to a government furnished truck (a 1¼ ton M-715 for the MT-3894()/TRC; a 2½ ton M-35 for the MT-3895()/TRC) and transported over the specially prepared course described in 4.7.1 for 10 laps at a speed of 5 mph., 10 laps at a speed of 10 mph., 10 laps at a speed of 15 mph., and 10 laps at a speed of 18 to 20 mph. A lap is defined as traversing the course in one direction. The transit frame(s) shall meet the requirements of 3.4 after completion of the test. (Note: The transit frame(s) shall be loaded with live loads (see 6.2b) for this test.)

4.7.1 Vehicular transportation course.- The course for the military truck transportation shall have twelve(12) 4-inch by 8-inch timbers placed 25 feet apart on the 8-inch face and with the 4-inch face fully above ground. The top edges shall have a 1 x 1-inch chamfer. The sixth and twelfth timbers shall be placed at 45 degrees to the direction of travel, and all other timbers shall be placed perpendicular to the direction of travel. The timbers shall be anchored securely by any convenient means. The ground on which the timbers are placed shall be hard and level.

4.8 Rail transport, impact test.- The antenna transit frame(s) with loads as specified in 4.7, shall be loaded onto a railroad flatcar in accordance with Figure 1 or Figure 2 as applicable. Lashing shall consist of 4 wire rope slings each with minimum breaking strength of 9,000 pounds and each including 3/8 inch diameter, 6 x 19, flexible, steel, preformed-wire rope (having a breaking strength of 10,600 pounds minimum), a turnbuckle, two hooks, with thimbles and fasteners as required. Before each impact, the slings shall be taut (turnbuckle shall be hand-tight plus one turn). The test shall be conducted on a flat stretch of track. A loaded flatcar or gondola totaling 165,000 pounds (load on this car shall be constrained to prevent shifting during the test) traveling at 9 miles per hour (or equivalent energy conditions approved by the government) shall be impacted against the stationary test flatcar coupled to two empty boxcars, all with brakes off. Four impacts shall be performed as follows:


a. MT-3894( )/TRC - With the transit frame positioned longitudinally on the flatcar, two impacts, one from each end of the transit frame; with the transit frame positioned transversely on the flatcar, two impacts, one from each side of the transit frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

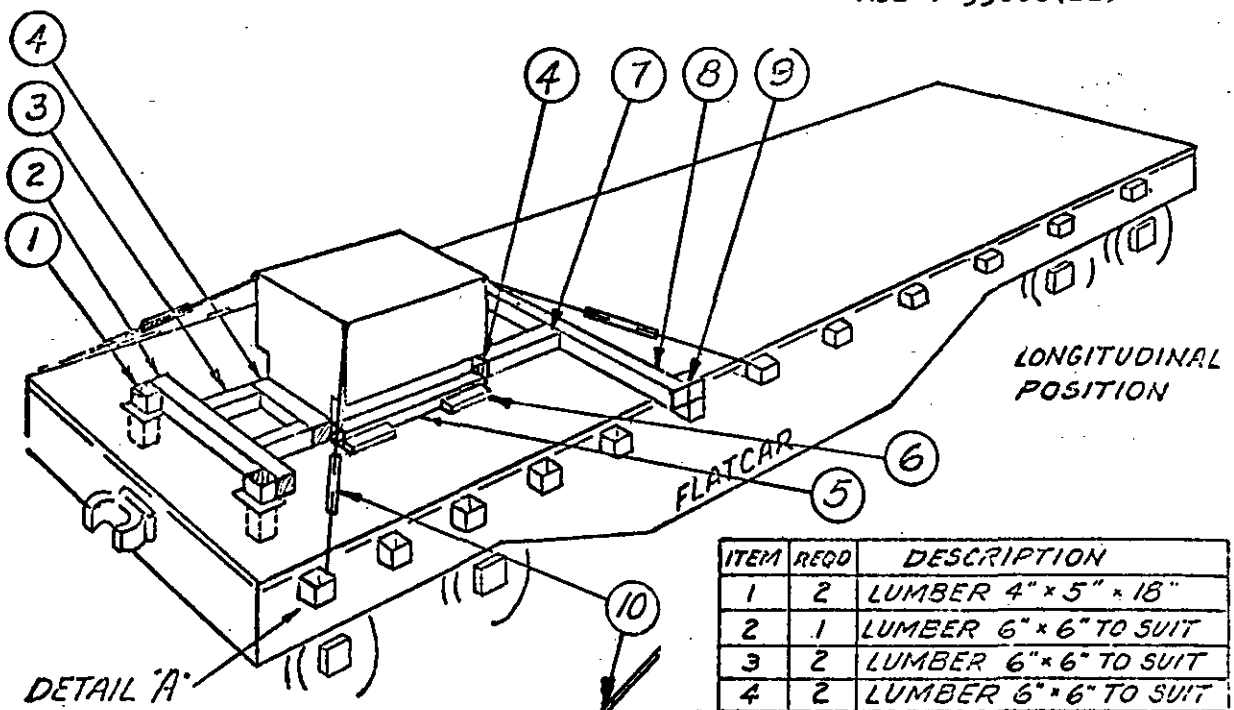

ITEM	REQD	DESCRIPTION
1	2	LUMBER 4" × 5" × 18"
2	1	LUMBER 6" × 6" TO SUIT
3	2	LUMBER 6" × 6" TO SUIT
4	2	LUMBER 6" × 6" TO SUIT
5	2	LUMBER 4" × 4" TO SUIT
6	4	LUMBER 2" × 4" × 14"
7	2	LUMBER 6" × 6" TO SUIT
8	1	LUMBER 6" × 6" TO SUIT
9	2	LUMBER TO SUIT
10	4	WIRE ROPE SLING (SEE PARA. 4.8)
11	AS REQD	FLEX METAL SHEETING

DETAIL "A" TYPICAL

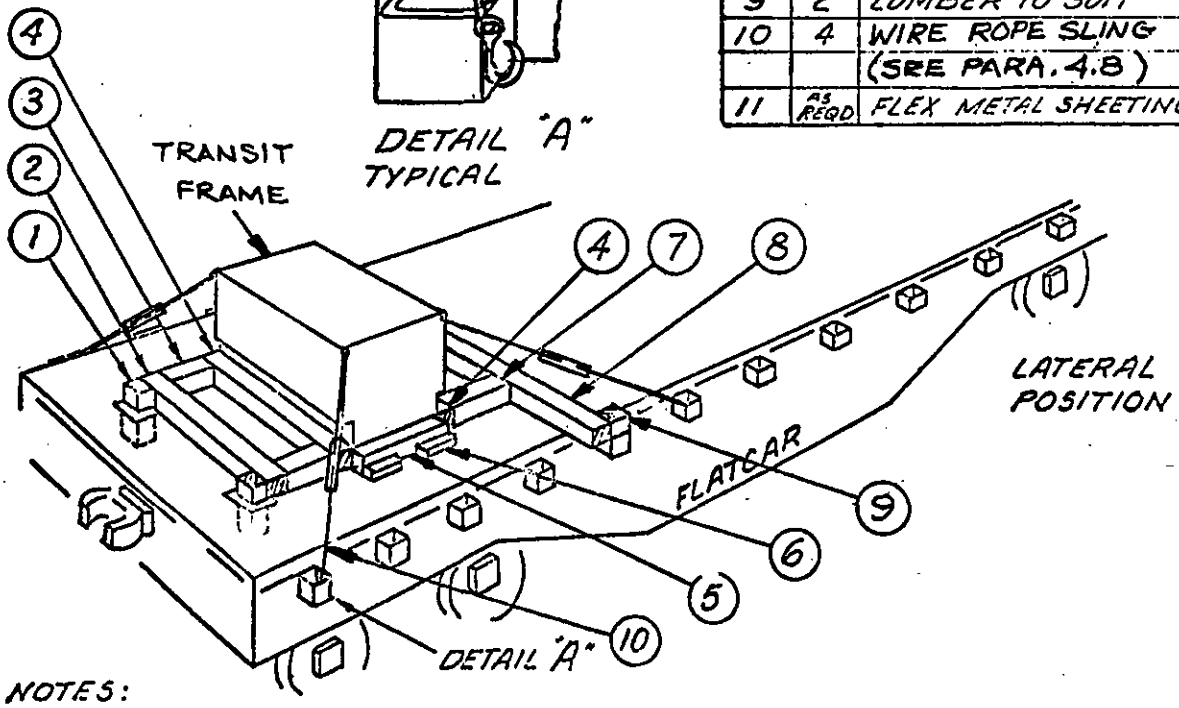


NOTES:

1- THE BLOCKING LUMBER SHALL BE NOTCHED TO ACCOMODATE TOWING EYES, BOLTS AND RIVET HEADS.

2- THE BLOCKING LUMBER SHALL BE RIGIDLY FASTENED TO THE FLOOR OF THE FLATCAR.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

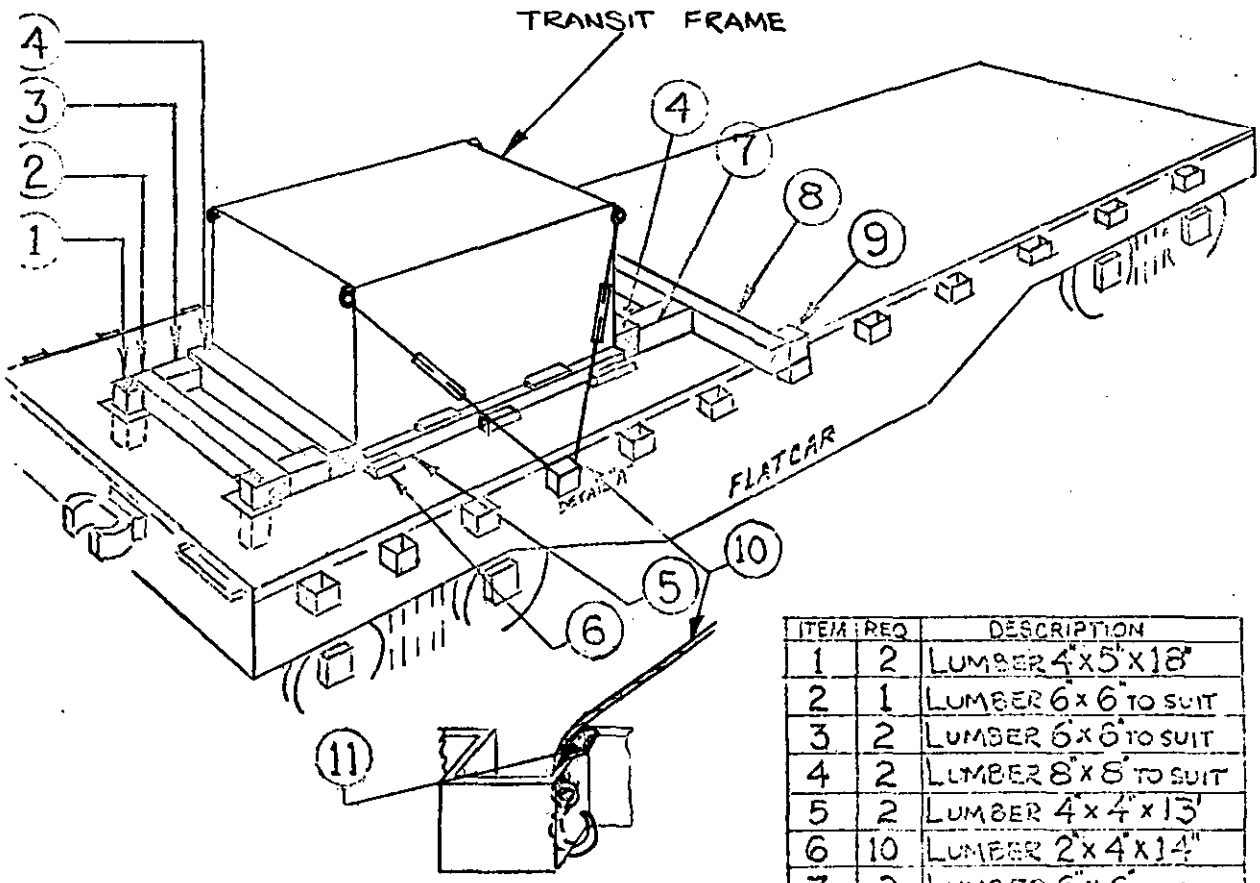

DETAIL "A"

Wire tiedown same for all points of contact with stake pockets

ITEM	REQ	DESCRIPTION
1	2	LUMBER 4"X5"X18"
2	1	LUMBER 6"X6" TO SUIT
3	2	LUMBER 6"X6" TO SUIT
4	2	LUMBER 8"X8" TO SUIT
5	2	LUMBER 4"X4"X13'
6	10	LUMBER 2"X4"X14"
7	2	LUMBER 6"X6" TO SUIT.
8	1	LUMBER 6"X6" TO SUIT
9	2	LUMBER TO SUIT
10	4	SLING (SEE PARA. 4.8)
11	4	FLEX. METAL SHEETING

NOTES:

a. The blocking lumber shall be notched to accomodate towing eyes, bolts and rivet heads.

b. The blocking lumber shall be rigidly fastened to the floor of the flatcar.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:55Z
Check the source to verify that this is the current version before use.

b. MT-3895( )/TRC - With the transit frame positioned longitudinally on the flatcar, two impacts into each end of the transit frame.

If the cabling or blocking is torn loose by the impact, the run shall be repeated. A damage survey shall be made after each impact and the equipment shall meet the requirement of 3.5.

4.9 Drop tests.-

4.9.1 Flat drop.- The antenna transit frame(s) loaded as in 4.7, shall be lifted 18 inches from the ground and allowed to fall freely with the skids impacting onto a hard concrete surface. The test shall be performed once. Upon completion of this drop, the equipment shall meet the requirements of 3.6.

4.9.2 Rotational drop.- The antenna transit frame(s), loaded as in 4.7, shall have one skid (or the knuckles of the skids) resting on a nominal 4-inch high timber. The outer edge of the opposite skid (or the opposite knuckles of the skids) shall be raised 18 inches and the transit frame(s) shall be allowed to fall freely onto a hard concrete surface. This impact shall be performed four times, once for each bottom edge of the frame(s). On completion of these drops, the transit frame(s) and the antenna(s) shall meet the requirements of 3.7.

4.9.3 VSWR measurement.- The VSWR of the assembled antenna shall be measured at the input of the 25-foot flexible waveguide section for both Transmit and Receive ports at 4.4, 4.7, and 5.0 GHz. The requirement of 3.6.1 shall be met.

4.9.4 Feedhorn leakage test.- The feedhorn shall be pressurized with nitrogen to 1 psig for 30 minutes. The leakage rate shall be determined at 10 minute intervals. The leakage rate shall meet the requirements of 3.6.2.

4.10 Mounting insert test.- Five of each size insert (if the total quantity of any size is less than five, all of that size shall be tested) shall be selected for test in the transit frame(s). Each selected insert shall be tested with an axial load followed by a torque in accordance with Table IV. After test, the requirements of 3.7 shall be met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

Table IV - Mounting Insert Loads

Insert size	Axial load (lbs)	Torque(IN-LBS)
5/16-18	1000	100
1/4-20	650	60

4.11 Test for shrinkage.- The cover(s) shall be soaked in tap water at ambient temperature (70 ± 15°F) for 24 hours and thoroughly dried at that temperature. The requirements of 3.8 shall be met.

4.12 Inspection for interchangeability.- The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirements of 3.15. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

a. Size and location of mounting inserts.

b. Size and location of locking pins, fasteners, and mountings which receive components of the AN/TRA-37() Antenna Group.

c. Location of fasteners common to the transit frame and its cover.

d. Size and location of lifting and tie-down devices on the frame.

4.13 Visual and mechanical inspection.- The transit frame(s) shall be examined for conformance to the requirements of 3.16 and for the defects listed in Table V.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

Table V - Classification of Visual and Mechanical Defects

Classification	Defects
Major	1. Aircraft loading data plate, instruction or nameplate omitted, incorrect, or illegible. 2. Welds cracked or porous. 3. Mounting inserts missing or mislocated. 4. Locating pins loose or missing. 5. Retaining bracketry or tie-down devices missing or inoperative. 6. Locking hardware or captivating devices missing. 7. Tears or rips in cover. 8. Cushioning pads missing. 9. Sharp edges or burrs adjacent to manually operated devices, or in contact with canvas cover.
Minor	1. Fastening devices difficult to operate. 2. Finish has abrasions or scratches. 3. Misalignment of tie-down straps or devices which do not prevent intended use.

4.14 Quality conformance inspection of preparation for delivery.- Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of Section 5.

4.15 Rough handling test (preparation for delivery).- When rough handling test in accordance with MIL-P-116 is required by the contract, (See 6.2f), the following functional tests shall be conducted to determine freedom from operational malfunction caused by rough handling:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

Paragraph 4.9.3 and 4.9.4 - Antenna Tests
NOTE: These tests are required only if the transit frame(s) contains the antenna group at time of rough handling test.

Paragraph 4.13 - Visual & Mechanical

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C as specified.(See 6.2e).

5.1.1 Level A.

5.1.1.1 Cleaning.- Components of MT-3894/TRC and MT-3895/TRC Transit Frames shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying.- Components of the Transit Frames shall be dried in accordance with the applicable procedures of MIL-P-116.

5.1.1.3 Preservation Application.- None required.

5.1.1.4 Unit packaging.- Unit packaging shall be in accordance with the methods prescribed in MIL-P-116, as specified herein.

5.1.1.4.1 Transit frames.- Secure the cover in position on the transit frame. No further packaging required.

5.1.2 Level C.Transit Frames.- Transit frames shall be prepared for shipment in a manner that will afford adequate protection against, deterioration and damage during shipment from the supply source to the first receiving activity.

5.2 Packing.- Packing shall be A,B, or C, as specified (See 6.2e).

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the currentversion before use.

5.2.1 Level A.- Transit Frames MT-3894/TRC and MT-3895/TRC, shall be packed within crates conforming to PPP-C-650, type III, Style B, except that the rubbing strips shall be nominal 2 inch lumber rather than 1 inch as specified. Strapping and closure shall be as specified in the appendix of the box specification.

5.2.2 Level B.- Transit Frames MT-3894/TRC and MT-3895/TRC shall be packed as specified in 5.2.1.

5.2.3 Level C.- Transit frames MT-3894/TRC and MT-3895/TRC, shall be packed in such a manner that will afford adequate protection against damage to the item during shipment from the supply source to the first receiving activity.

5.3 In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The Transit Frame, Antenna MT-3894( )/TRC is used to transport the components of one Antenna Group AN/TRA-37( ). These items are part of Radio Terminal Set AN/TRC-112, a tropospheric scatter radio terminal. The Transit Frame, Antenna MT-3895( )/TRC is used to transport components of two Antenna Group AN/TRA-37( ). These items are part of Radio Terminal Set AN/TRC-121, a tropospheric scatter radio terminal.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Preproduction and Group C inspection of the transit frame(s) requires the use of government furnished live loads (Antenna Group AN/TRA-37( )) unless otherwise specified in the bid request and contract.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:55Z
Check the source to verify that this is the current version before use.

c. A list of equipment to be government loaned for testing purposes.

d. Submission of the statement referenced in 3.13.6 as soon as possible after award of contract. This statement should be submitted to the contracting officer.

e. Level of packaging and level of packing required for shipment. (Level A, Level B, or Level C.)

f. Whether rough handling and functional tests are required.

6.3 Inspection.- Inspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

6.3.1 Examination.- Examination consists of simple, generally non-destructive determinations of compliance, without use of special testing equipment.

6.3.2 Testing.- Testing consists of determinations of compliance, using technical means.

6.4 Group C inspection.- Approval to ship may be withheld, at the discretion of the government, pending the decision from the contracting officer on the adequacy of corrective action. (See 4.5.3.4)

6.5 Nomenclature.- The parenthesis in the nomenclature will be deleted or replaced by a letter identifying the particular design, for example: MT-3894K/TRC or MT-3895R/TRC. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

Source: https://assist.dla.mil -- Downloaded: 20260-22T23:55Z
Check the source to verify that this is the current version before use.

6.6 Verification inspection.- Verification by the government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the government will be adjusted to make maximum utilization of the contractor's qualtiy control system and the quality history of the product.

Custodian:
ARMY-EL

Preparing Activity
Army - EL

Project No. 2510-A073

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-TD-SS
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-T-55686(EL), TRANSIT FRAME, ANTENNA MT-3894( )/TRC and MT-3895( )/TRC

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 20261O-22T23:55Z
Check the source to verify that this is the current version before use.