Department of the Navy 14 August 1969


PALLETIZING
DOMESTIC UNIT LOAD

WALLEYE CONTROL SECTION
(IN CONTAINER MK 423 MOD 0)


UNIT LOAD DATA

NUMBER OF CONTROL SECTIONS PER CONTAINER		1
NUMBER OF CONTAINERS PER UNIT LOAD		2
NUMBER OF CONTROL SECTIONS PER UNIT LOAD		2
GROSS WEIGHT OF ONE CONTAINER	(Lbs.)	268
GROSS WEIGHT OF TWO CONTAINERS	(Lbs.)	536
WEIGHT OF BATTEN ASSEMBLIES (EST.)	(Lbs.)	66
WEIGHT OF PALLET	(Lbs.)	94
WEIGHT OF UNIT LOAD	(Lbs.)	696
CUBE	(Cu. Ft.)	52.2

DO NOT STACK MORE THAN 5 UNIT LOADS HIGH IN STORAGE



CONTAINER
MK 423 MOD 0
DL64A36F1

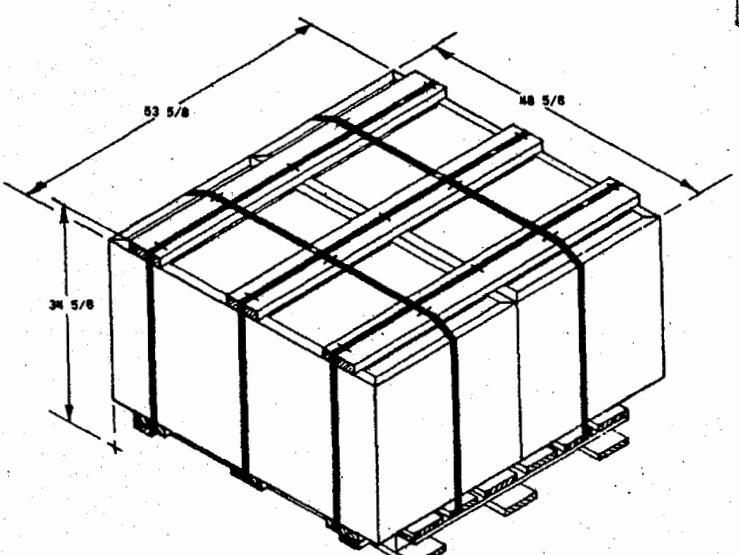

MIL-STD NUMBER	ASSOCIATED PROCESS
1320-	TRUCKLOADING
1325-	CARLOADING

NOTES:
1. FOR GENERAL PALLETIZING REQUIREMENTS SEE MIL-STD-1322 (NAVY).
2. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23
Check the source to verify that this is the current version befo

PALLETIZING PROCEDURE

(a) THREAD STRAPPING, PC. 2, THROUGH NOTCHES IN PALLET, PC. 1. (SEE DETAIL A).

(b) PLACE CENTER STRAP, PC. 3, ON CENTER OF PALLET DECK UNDER CENTER BOTTOM BATTEN ASSEMBLY.

(c) PLACE END BOTTOM BATTEN ASSEMBLIES ON PALLET DECK IN POSITION SHOWN.

(d) POSITION CONTAINERS WITH EQUAL OVERHANG ON BOTH ENDS.

(e) PLACE TOP BATTEN ASSEMBLIES ON CONTAINERS IN POSITION SHOWN.

(f) TENSION STRAPS, PC. 2, AND SECURE WITH DOUBLE CRIMPED SEAL, PC. 4.

(g) TENSION CENTER STRAP AND SECURE WITH DOUBLE CRIMPED SEAL.

(h) POSITION REMAINING TWO STRAPS, PC. 3, UNDER PALLET DECK AND AROUND UNIT LOAD, TENSION AND DOUBLE CRIMP SEAL.

(i) SECURE STRAPS TO BATTENS WITH STAPLES, PC. 5, AS SHOWN.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING, PCS. 2 AND 3.

(b) REMOVE TOP BATTEN ASSEMBLIES.

(c) REMOVE CONTAINERS.


(d) REMOVE BOTTOM BATTEN ASSEMBLIES.

REQ.	ITEM	DESCRIPTION	MAT'L.	MAT'L. SPEC.	DIMENSIONS
AS REQ'D	11	NAILS, STANDARD BOX	STEEL, CEMENT COATED	FF-N-105	4d
AS REQ'D	10	NAILS, STANDARD BOX	STEEL, CEMENT COATED	FF-N-105	6d
6	9	SPACER TOP	PLYWOOD	NN-P-515 TY. I CL. 1	3/16 X 5-1/2 X 23-7/8
6	8	SPACER BOTTOM	PLYWOOD	NN-P-515 TY. I CL. 1	3/16 X 5-1/2 X 24-1/8
4	7	SPACER	WOOD, DRESSED	MIL-STD-731	1 X 4 X 6-5/8
6	6	TOP AND BOTTOM BATTENS	WOOD, DRESSED	MIL-STD-731	2 X 6 X 53-1/2
15	5	STAPLE	STEEL, CEMENT COATED	COM'L.	3/4
5	4	SEAL	STEEL, COATED	COM'L.	3/4 X 22 GA. MIN.
3	3	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	.035 X 3/4 X 15 FT.
2	2	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	.035 X 3/4 X 14 FT.
1	1	PALLET	WOOD	MIL-P-15011 OR MIL-P-3938	40 X 48

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23
Check the source to verify that this is the current version befo


CONSTRUCTION DETAILS

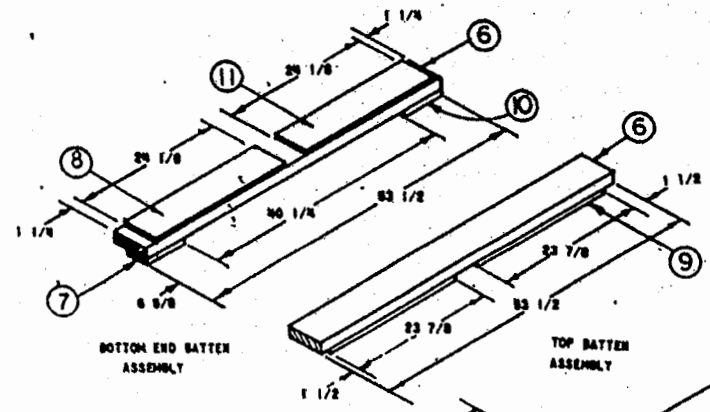

BOTTOM END BATTEN ASSEMBLY


TOP BATTEN ASSEMBLY

NOTE:
OMIT PIECE 7 FROM BOTTOM CENTER BATTEN ASSEMBLY

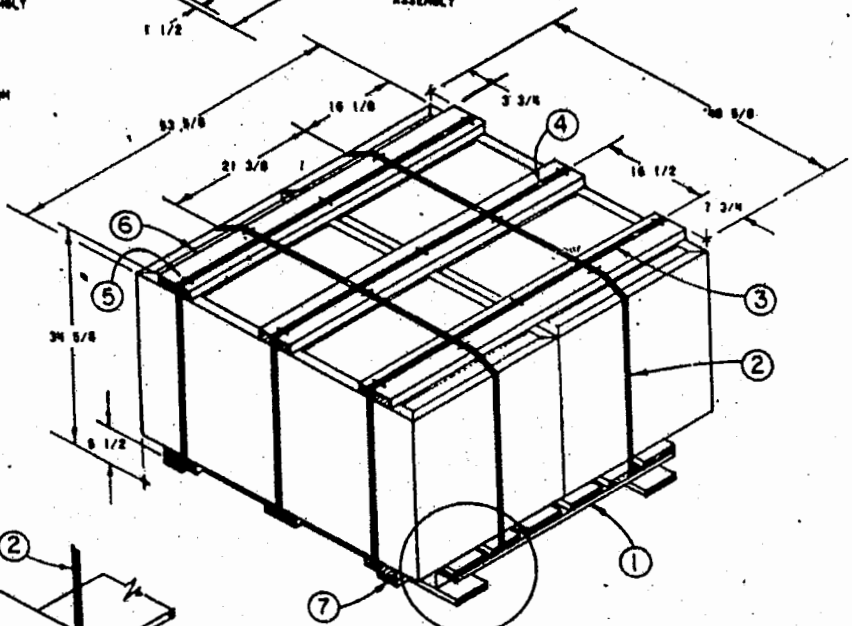

DETAIL A

ASSEMBLED UNIT LOAD



DETAIL A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:54
Check the source to verify that this is the current version before u