MIL-STD-1322-505 (Navy)
14 August 1969

Department of the Navy

PALLETIZING
DOMESTIC UNIT LOAD
PROPELLANT GRAIN MK 49 MOD 0
(IN CONTAINER MK 22 MOD 0)

UNIT LOAD DATA

NUMBER OF GRAINS PER CONTAINER		1
NUMBER OF CONTAINERS PER UNIT LOAD		36
WEIGHT OF 36 CONTAINERS EMPTY	(Lbs.)	288
WEIGHT OF 36 CONTAINERS LOADED	(Lbs.)	1570
WEIGHT OF PALLET CRATE	(Lbs.)	123
WEIGHT OF UNIT LOAD WITH EMPTY CONTAINERS	(Lbs.)	411
WEIGHT OF UNIT LOAD WITH LOADED CONTAINERS	(Lbs.)	1693
CUBE	(Cu. Ft.)	44.0

DO NOT STACK MORE THAN 4 UNIT
LOADS HIGH IN STORAGE

CLASS B EXPLOSIVES

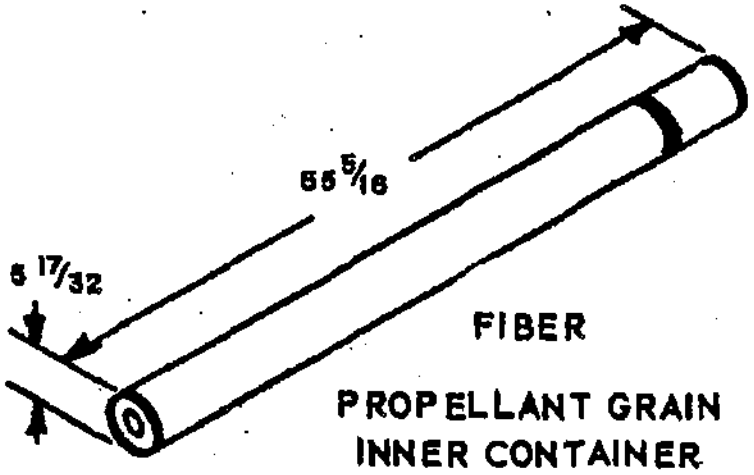

FIBER

PROPELLANT GRAIN
INNER CONTAINER
MK 22 MOD 0
DWG 1516312
(LD269046)

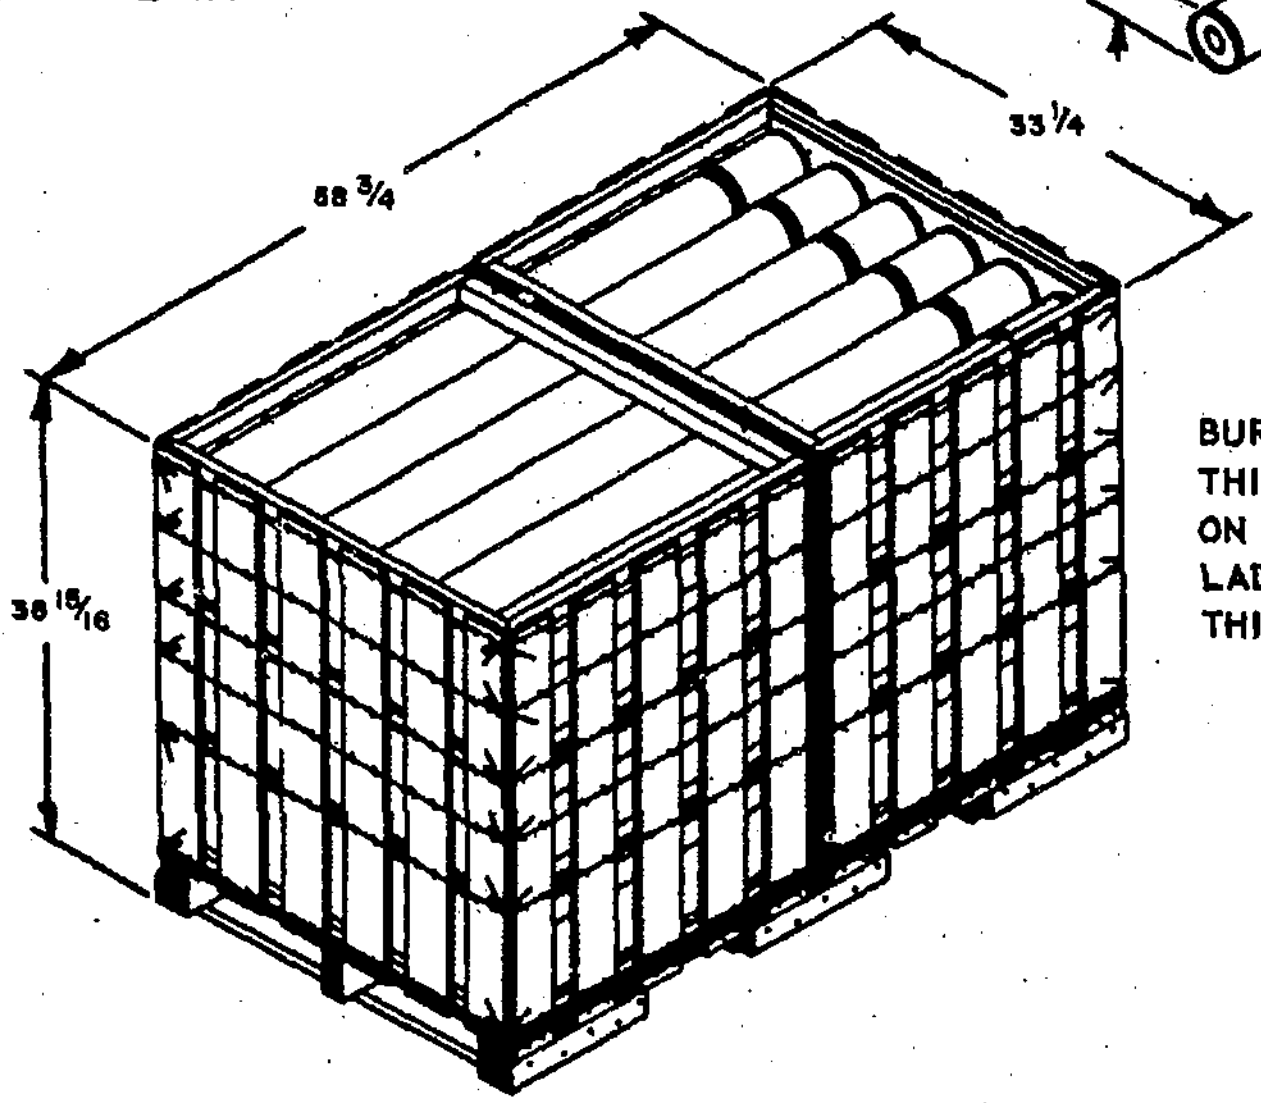

BUREAU APPROVAL NO. 750
THIS BA NO. 750 MUST BE SHOWN
ON ALL GOVERNMENT BILLS OF
LADING COVERING SHIPMENTS OF
THIS UNIT LOAD.

NOTES:
1. FOR GENERAL PALLETIZING REQUIREMENTS SEE MIL-STD-1322 (NAVY).
2. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.

MIL-STD NUMBER	ASSOCIATED PROCESS
1320-51	TRUCKLOADING
1326-26	CARLOADING

THIS UNIT LOAD IS AUTHORIZED
AND RELEASED FOR DEPOT HANDLING
AND STORAGE AND FOR SHIPMENT BY COMMON
CARRIER IN COMPLIANCE WITH DOT REGULATIONS.

PALLETIZING PROCEDURE

1. CRATE ASSEMBLY
   - (a) CRATE WILL BE RECEIVED KNOCKED DOWN.
   - (b) ASSEMBLE TWO END BLANKS, PC. 3, AND TWO SIDE BLANKS, PC. 2, ON BASE, PC. 1. ALIGNING STRAPPING SLOTS OF SIDE BLANKS WITH NOTCHES IN BASE RUNNERS. ALL CLOSURE LOOPS (ROCK FASTENERS) SHALL BE FOLDED OVER ON END BLANKS AS SHOWN. (SEE NOTE)
   - (c) FASTEN EACH SIDE BLANK TO BASE RUNNER WITH 5 NAILS, PC. 4, AND EACH END BLANK TO DECK BOARDS WITH 3 NAILS.
   - (d) POSITION GIRTHWISE STRAP, PC. 11, DIRECTLY BELOW STAPLES OF BOTTON WIRE, TENSION AND DOUBLE CRIMP SEAL. SECURE STRAPPING TO BATTEN WITH STAPLES, PC. 10.
   - (e) PLACE CHIPBOARD PAD, PC. 5, ON BASE DECK AND POSITION PLYWOOD PANELS, PC. 8, AGAINST END BLANKS.
2. LOADING
   - (a) STACK 36 CONTAINERS IN 6 ROWS OF 6 EACH IN THE ASSEMBLED CRATE.
   - (b) THREAD STRAPPING, PC. 8 THROUGH SLOTS IN BOTTOM SIDE CLEATS AND BASE RUNNERS.
   - (c) POSITION BATTEN, PC. 7, ACROSS TOP ROW OF CONTAINERS DIRECTLY OVER STRAPPING SLOT.
   - (d) THREAD STRAPPING BETWEEN SIDE CLEATS AND BINDING WIRES AND OVER TOP CLEATS AND BATTEN AS SHOWN.
   - (e) TENSION STRAPPING AND SECURE WITH DOUBLE CRIMPED SEAL, PC. 9, SECURE STRAPPING TO BATTEN WITH STAPLES, PC. 10.

NOTES

1. ROCK FASTENERS SHALL BE CLOSED IN ACCORDANCE WITH FIGURE 18 OF MIL-C-11133.
2. WHEN REUSING PALLET CRATE, REPLACE ANY BROKEN WIRES BY ANOTHER STRAP, PC. 11.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

DEPALLETIZING PROCEDURE

- (a) REMOVE STAPLES FROM TOP BATTEN.
- (b) CUT AND REMOVE STRAPPING, PC. 8.
- (c) RETAIN TOP BATTEN IN CRATE AND REMOVE CONTAINERS AS REQUIRED.
- (d) STORE EMPTY CRATE AND REUSABLE PARTS FOR REUSE.

* .031 COLD ROLLED, HEAT TREATED MAY BE SUBSTITUTED.

REQ.	ITEM	DESCRIPTION	MAT'L.	MAT'L. SPEC.	DIMENSIONS
1	11	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * X 16 FT. 6
AS REQ'D	10	STAPLE	STEEL, CEMENT COATED	COM'L.	3/4
2	9	SEAL	STEEL, COATED	COM'L.	3/4 X 22 GA. MIN.
1	8	STRAPPING	STEEL, COATED	QQ-S-781 TY. I CL. A OR B	3/4 X .035 * X 12 FT.
1	7	BATTEN	WOOD, DRESSED	MIL-STD-731	2 X 4 X 30-3/4
2	6	PANEL	PLYWOOD	NN-P-530 TY. I	1/4 X 30-1/2 X 33
1	5	PAD	CHIPBOARD	UU-C-282 90 LB. BASIS WT.	30-1/2 X 55-1/2
16	4	NAIL, PALLET	STEEL	FF-N-105 TY. II, ST. 18	2-1/2 X .135 DIA.
2	3	BLANK, END	WOOD, WIRE BOUND	2086413 LD483331	32-1/2 X 34-1/2
2	2	BLANK, SIDE	WOOD, WIRE BOUND	2086412 LD483331	57-3/4 X 35-7/8
1	1	BASE	WOOD	2086411 LD483331	[illegible]

LIST OF MATERIALS

NOTICE:

THE INNER CONTAINERS SHALL BE SEALED WITH TAPE BEFORE THEY ARE STACKED IN THE PALLET CRATE. THE JOINT BETWEEN THE OUTER TUBE AND COVER SHALL BE SEALED WITH ONE INCH WIDE TAPE CONFORMING TO PPP-T-60, TY.3, CL.1. TO FACILITATE REMOVAL OF THE TAPE THE END SHALL BE FOLDED TO FORM A 1/2 INCH TAB.

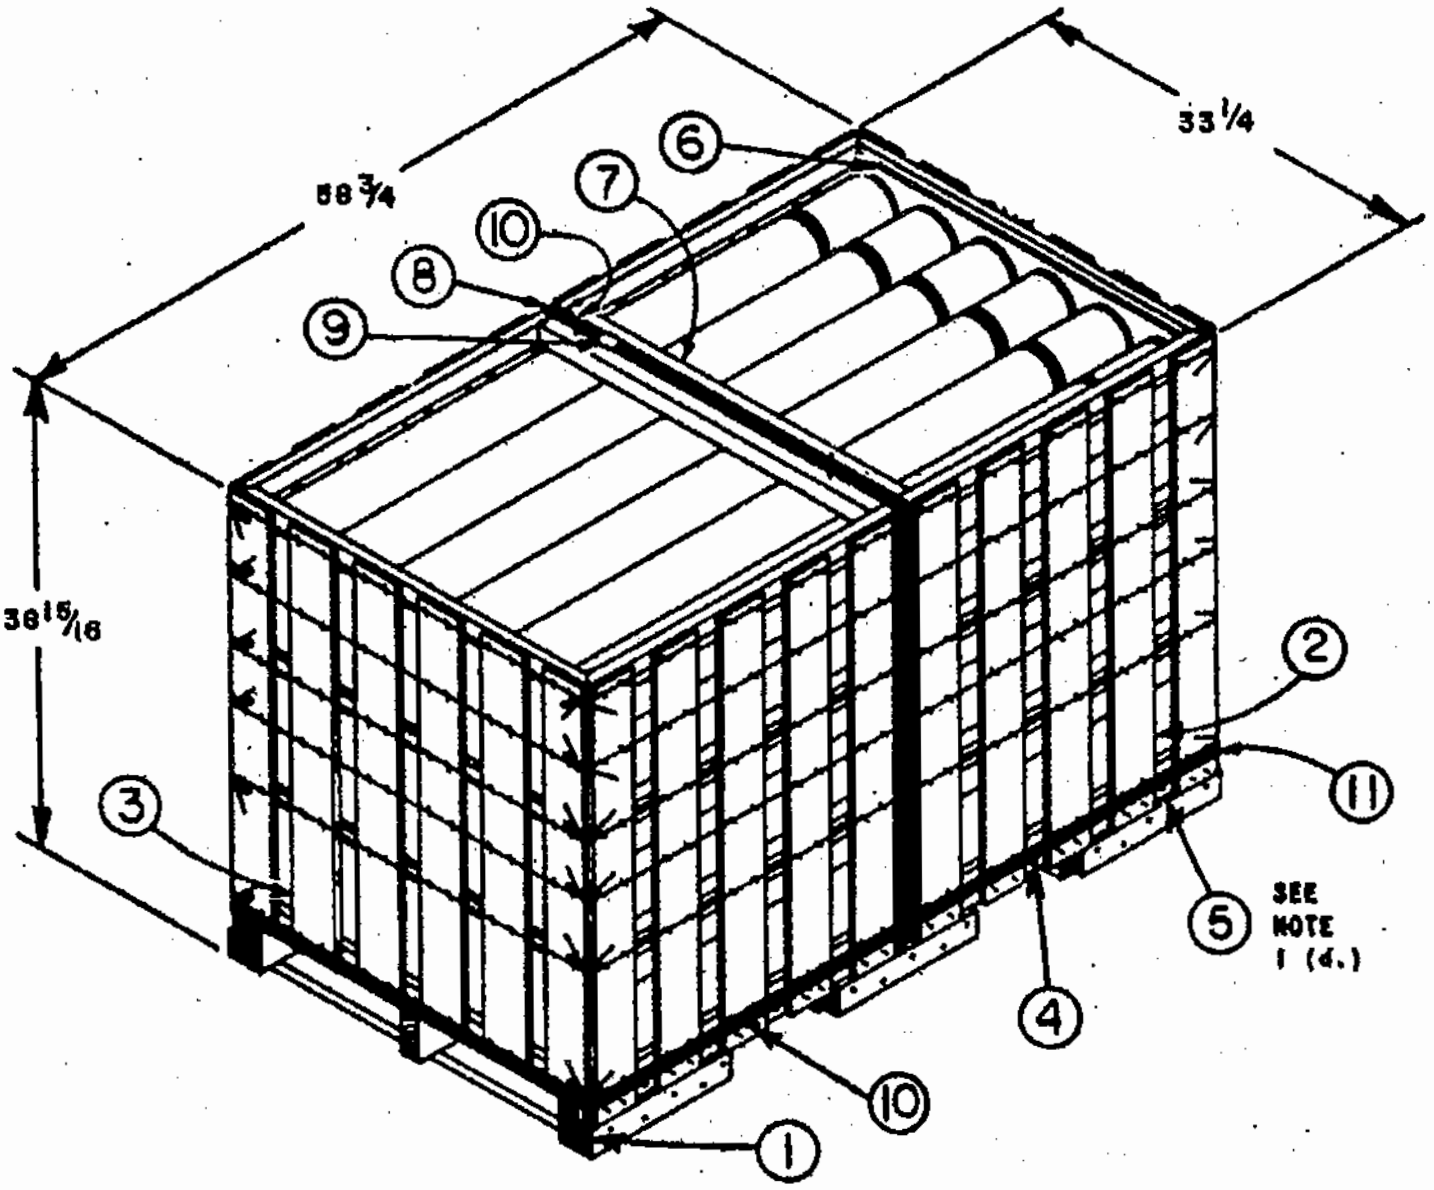
58 3/4
33 1/4
38 15/16
⑥
⑦
⑩
⑧
⑨
②
⑪
③
⑤
SEE NOTE 1 (d.)
④
⑩
①

ASSEMBLED UNIT LOAD