MIL-R-55602A(EL)
30 JUNE 1976
Superseding
MIL-R-55602(EL)
9 April 1969

MILITARY SPECIFICATION

RESTORER, PULSE FORM TD-206( )/G

This specification is approved for use by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 This specification covers the requirements for Restorer Pulse Form TD-206( )/G (See 6.6) used with Cable Assembly, Special Purpose, Electrical CX-11230( )/G connected in Pulse Code Modulation (PCM) Time Division Multiplexed cable transmission systems.

## 2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bid or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

| | |
|---|---|
| NN-P-71 | Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial) |
| QQ-S-781 | Strapping, Steel, Flat and Seals |
| ZZ-R-765 | Rubber, Silicone |
| PPP-B-585 | Box, Wood, Wirebound |

FSC 5805

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| PPP-B-601 | Box, Wood, Cleated Plywood |
| PPP-B-621 | Box, Wood, Nailed and Lock Corner |
| PPP-B-636 | Box, Shipping, Fiberboard |
| PPP-B-640 | Box, Fiberboard Corrugated, Triple-Wall |
| PPP-F-320 | Fiberboard Corrugated and Solid Sheet-Stock (Container Grade), and Cut Shapes |
| PPP-S-760 | Strapping, Nonmetallic, (And Connectors) |
| PPP-T-97 | Tape, Pressure-Sensitive Adhesive, Filament Reinforced |

Military

| | |
|---|---|
| MIL-P-116 | Preservation-Packaging, Methods of |
| MIL-R-6130 | Rubber, Cellular, Chemically Blown |
| MIL-R-6855 | Rubber, Synthetic, Sheets, Strips, Molded or Extruded Shapes |
| MIL-P-11268 | Parts, Materials and Processes Used In Electronic Equipment |
| MIL-M-13231 | Marking of Electronic Items |
| MIL-F-14072 | Finish for Ground Signal Equipment |
| MIL-P-19644 | Plastic Molding Material (Polystyrene Foam, Expanded Bead) |
| MIL-P-26514 | Polyurethane Foam, Rigid or Plastic, for Packaging |
| MIL-I-46058 | Insulating Compound, Electrical (For Coating Printed Circuit Assemblies) |
| MIL-C-55583 | Cable Assembly, Special Purpose Electrical CX-11230( )/G Cable Assembly Adapter CX-10734( )/G |
| MIL-C-55661 | Connector, Plug, Electrical UG-1870( )/U Connector, Receptacle, Electrical UG-1837( )/U |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

| | |
|---|---|
| FED-STD-356 | Commercial Packaging of Supplies and Equipment |
| FED-STD-406 | Plastics, Methods of Testing |
| FED-STD-601 | Rubber, Sampling and Testing |

Military

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection By Attributes |
| MIL-STD-129 | Marking for Shipment and Storage |
| MIL-STD-147 | Palletized and Containerized Unit Loads 40 Inch x 48 Inch Pallets, Skids, Runners or Pallet Type Base |
| MIL-STD-252 | Wired Equipment, Classification of Visual and Mechanical Defects |
| MIL-STD-275 | Printed Wiring for Electronic Equipment |
| MIL-STD-454 | Standard General Requirements for Electronic Equipment |
| MIL-STD-461 | Electromagnetic Interference Characteristics Requirements for Equipment |
| MIL-STD-462 | Electromagnetic Interference Characteristics, Measurement of |
| MIL-STD-781 | Reliability Tests: Exponential Distribution |
| MIL-STD-810 | Environmental Test Methods |



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the currentversion before use.

DRAWINGS

Electronics Command

| | |
|---|---|
| DL-SC-A-339551 | Cable Assembly, Adapter CX-10734( )/G |
| SC-DL-525135 | Cable Assembly, Power Electrical CX-11727( )/G |
| SC-DL-531012 | Cable Assembly, Radio Frequency CG-1040( )/U |
| SC-DL-531016 | Cable Assembly, Radio Frequency CG-2437( )/TCC |
| SC-DL-531017 | Cable Assembly, Radio Frequency CG-2438( )/TCC |
| DL-SC-B-598923 | Connector, Receptacle UG-1837( )/U |
| SC-DL-704733 | Restorer, Pulse Form TD-206( )/G |
| SM-A-704756 | Circuit Card Assembly-Unattended Repeater Testing Requirements |
| SM-E-704762 | Random Word Generator and Error Detector Assembly (Model B) Schematic Diagram |

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AEROSPACE MATERIALS SPECIFICATIONS

| | |
|---|---|
| AMS-3195 | Silicone, Rubber, Sponge, Closed Cell, Medium |

(Application for copies should be addressed to the National Referral Center for Science and Technology, Library of Congress, Washington, D.C. 20540.)

SOCIETY OF AUTOMOTIVE ENGINEERS

| | |
|---|---|
| ARP-1173 | SAE Test Procedures To Measure The R.F. Shielding Characteristics of EMI Gaskets |

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, Pa. 15096.)



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

## 3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, the contractor shall furnish first article units in accordance with 4.3.

3.2 Construction. The equipment shall be constructed in accordance with the requirements of this specification, and of Drawing SC-DL-704733 (including the requirements for parts, materials, and processes thereon).

3.3 Parts, materials and processes; general. In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein, shall apply.

3.4 Electrical characteristics.

3.4.1 Operating characteristics of PCM.

3.4.1.1 Timing recovery. Each restorer shall receive and process timing rates from 2.304 MHz - 0.005% to 2.304 MHz + 0.005%. A receive timing rate of 2.304 MHz ±0.001% shall not induce jitter in excess of 1 ns peak to peak in each restorer, or 30 ns total when measured in a 40 mile cable system, using a Pseudo Random Pattern Generator (PRPG) having a minimum of 23 stages (see 4.9.7 and 4.9.8).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

3.4.1.2 Signal detection. (See 4.9.6 and 4.9.9) The signal detection process shall operate over the input signal range of 20 to 50 millivolts peak-to-peak. The order wire signal shall not interfere with the detection process. Error free operation, defined as one error per minute or less, shall take place with a minimum ratio of peak signal to RMS noise of +20 dB for gaussian noise. For single frequency interference, error free detection shall take place with the peak signal to RMS interference ratios specified below:

| Carrier Frequency | Maximum Peak Signal To RMS Carrier Ratio |
|---|---|
| 300 kHz | -10 dB |
| 500 kHz | +1 dB |
| 800 kHz | +9 dB |
| 1152 kHz | +15 dB |
| 2304 kHz | +25 dB |
| 3000 kHz | +24 dB |
| 4500 kHz | +18 dB |

3.4.1.3 Signal regeneration. (See 4.9.10) The pulses regenerated for transmission shall be restored to their original width and shall be accurately timed with the recovered timing from the input signal. The pulses shall be 1.6 to 2.0 volts above the ac zero level. Pulse width measured between the 50% amplitude point of the leading edge and the 50% amplitude point of the trailing edge shall be 180 to 230 nanoseconds. Due to the method of coupling this signal onto Cable CX-11230( )/G, per MIL-C-55583, only the first pulse after four intervals with no pulse will exhibit the above characteristics.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

3.4.2 Order wire. (See 4.9.6) Equalization shall reduce the order wire and ringing signals at the input to the PCM circuits so that order wire and ringing signals shall provide error free operation. (See 3.4.1.2)

3.4.2.1 Functional operation. (See 4.9.6) The order wire shall be functional during all operational conditions and tests described in this specification. Functional is defined as the ability to signal, talk and listen intelligibly on the cable order wire without affecting the other performance parameters specified.

3.4.3 Power supply. (See 4.9.13) Power for the TD-206( )/G is provided by TD-754( )/G. The restorer shall operate with constant current inputs of 32 to 42 ma.

3.4.4 Fault location. With a PCM signal at 6.6 mV rms, 1010-----pattern, applied to the restorer, and the cable current set at 38 mA ±3%, the voltage drop across the restorer shall be 7.250 ±0.725 Vdc and the voltage at the input of the restorer shall be 21.45 ±0.50 Vdc. When the PCM signal is removed, the voltage measured at the input shall increase by 3.95 ±0.10 Vdc (see 4.9.11).

3.4.5 Transient protection. The TD-206( )/G shall meet the requirements of 3.4.1.3 after being subjected to the tests of 4.9.12.

3.5 Weight. The total weight of the TD-206( )/G shall not be greater than 7.5 pounds (see 4.15).



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

3.6 Air seal test, provision for. The equipment enclosure shall provide means for enabling performance of the air seal test (see 4.7).

3.7 Service conditions. The equipment shall meet the following service conditions--where a test is referenced, meeting the test shall be considered as compliance with the requirement:

3.7.1 Temperature. The following low and high temperature requirements shall be met.

3.7.1.1 Low. During and after testing as specified in 4.8.1.1 the equipment shall meet the performance requirements for the tests specified in 4.9.7.

3.7.1.2 High. During and after testing as specified in 4.8.1.2 the equipment shall meet the performance requirements for the tests specified in 4.9.7.

3.7.2 Humidity. The equipment shall exhibit no physical damage, such as corrosion, rust, blistering, swelling or deterioration of parts and materials, and shall meet the requirements of 4.9.7 during the operating times specified in 4.8.2.

3.7.3 Low pressure (altitude). The equipment shall meet the performance requirements for the measurements specified in 4.9.7 during and after testing as specified in 4.8.3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

3.7.4 Vibration and shock.

3.7.4.1 Vibration, internal. The equipment shall meet the performance requirements for the measurements specified in 4.9.7 when tested in accordance with 4.8.4.

3.7.4.2 Shock (bounce). The equipment shall meet the performance requirements for the measurements specified in 4.9.7 when tested in accordance with 4.8.5. There shall be no evidence of physical damage except minor surface abrasion.

3.7.4.3 Shock (bench handling). The equipment in its servicing condition (with covers removed) shall withstand shock encountered during servicing and meet the electrical performance requirements for the measurements specified in paragraph 4.9.7 when tested in accordance with paragraph 4.8.6. There shall be no evidence of physical damage except minor surface abrasion.

3.7.4.4 Shock (drop). The equipment shall meet the performance requirements for the measurements specified in 4.9.7 when tested in accordance with 4.8.7. There shall be no evidence of physical damage except minor surface abrasion.

3.7.5 Fungus. After the fungus test of 4.8.9, the equipment shall be visually examined, using a 10-power magnifier. The equipment shall show no more than six minute unrelated spots, each no greater than 0.015 square inch in area, of sparse microbial growth (see 6.3) as evidenced by growth colonization (see 6.3) (which includes branching (see 6.3) and sporulation (see 6.3) ) on or within each cubic foot, or fraction thereof, of equipment assembly volume. Isolated instances of partial tubular germination (see 6.3) shall not be included in this evaluation.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

3.7.6 Immersion. The equipment shall show no signs of leakage when tested as specified in 4.8.8.

3.7.7 Salt fog. After testing as specified in 4.8.10 the equipment when examined with the aid of a ten-power magnifier shall show no evidence of corrosion as evidenced by any visible degradation that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface.

3.7.8 Dust. After testing as specified in 4.8.11, the equipment shall meet full specification performance of 4.9.7.

3.8 Interchangeability. Like units, assemblies, subassemblies and replaceable parts shall conform to requirement 7 of MIL-STD-454. (See 4.12)

3.9 Printed wiring assemblies. (See 4.4) Printed wiring assemblies shall be in accordance with the applicable paragraph in MIL-P-11268 and shall be conformally coated in accordance with MIL-STD-275 with a coating material that conforms to MIL-I-46058, type ER (Epoxy).

3.10 Electromagnetic compatibility. The unit shall comply with the following emission and susceptibility requirements of MIL-STD-461A, Notice 4: (See 4.11)

| | |
|---|---|
| RE02 | RS03 |
| *RE02.1 | *RS03.1 |

*The upper frequency limit of test shall be 10 GHz.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

3.10.1 Bonds and grounds. Bonding for equipment current path returns and shock hazard shall be so installed that expansion, contraction, or movement incident to normal service use and maintenance will not break or loosen the connection. Surface preparation for bonds and grounds shall be accomplished by removing all anodic film, grease, paint, lacquer or other high resistance properties from the immediate areas of contact. The equipment finish shall be restored to its original condition in accordance with MIL-F-14072. The D.C. resistance of bonds and grounds shall not exceed 2.5 milliohms. (See 4.11.1)

3.10.2 Gaskets. (See 4.4) Gasket material shall be certified in accordance with: Fed. Test Method Std. No. 406; Fed. Test Method Std. No. 601; SAE procedure ARP 1173; Fed. Test Method Std. No. -4011, 4021, 4031, 4041, 4042, 4052, 1084, 1021, 9111 and 9211 (from Std. 406 and 601 respectively); MIL-R-6130; AMS-3195; MIL-R-6855; and ZZ-R-765.

3.11 Electrical preconditioning (burn-in). Each equipment on order shall be subjected to a minimum 48 hour (on-time) burn-in period under the applicable conditions specified in 4.14.2 and in accordance with government approved test procedures required by the contract. The last 24 hours (on-time) of the required 48 hour burn-in period shall be failure free.

3.12 Reliability. The TD-206( )/G shall have a specified ($\theta_o$) mean-time-between-failures (MTBF) of 20,000 hours when tested in accordance with 4.14 and the government approved test procedures as required by the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

3.13 Safety engineering.

3.13.1 Personnel hazards (see 4.10). Personnel hazards shall be kept to a minimum. The criteria of MIL-STD-454, Requirement 1, shall be made applicable for tasks and efforts such as the selection of parts, the complete manufacturing and assembly processes, and any product baseline configuration changes that may be implemented during the course of the contract. Verification that compliance with this requirement has been achieved shall be through a visual examination and inspection.

3.13.2 Radioactive materials. Radioactive materials shall not be used (e.g., luminous dials/markings, electron tubes/spark gaps, lenses).

3.14 Finish. The equipment shall be finished in accordance with Specification MIL-F-14072 and the equipment drawings. (See 4.4)

3.15 Marking. (See 4.4)

3.15.1 General. Marking shall conform to Specification MIL-M-13231. Exterior marking shall be group I as described in that specification.

3.15.2 Visibility. Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.15.3 Serial numbers. Each Pulse Form Restorer, TD-206( )/G shall have a serial number.

3.16 Preconditioning. The equipment shall be capable of meeting the requirements herein, without subsequent processing, after subjection to the bounce preconditioning of 4.6. (Also see 4.5)



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

3.17 Circuit card assembly. (See 4.9.15) The TD-206( )/G Circuit Card Assembly 7A1A shall meet the requirements of test requirement drawing SM-A-704756 entitled, "Circuit Card Assembly Unattended Repeater Testing Requirements".

3.18 Connector, Receptacle, Electrical UG-1837( )/G. (See 4.4) The connector UG-1837( )/G shall meet the requirements of MIL-C-55661( )/(EL) and shall be constructed in accordance with DL-SC-B-598923.

3.19 System compatability verification. (See 4.9.14) When tested in a forty mile cable configuration, the Pulse Form Restorers shall meet full specification performance for the requirements cited in 3.4.1.1, 3.4.2, 3.4.2.1, and 3.4.3.

3.20 Workmanship. (See 4.10) The equipment shall be manufactured and assembled in accordance with Requirement 9 of MIL-STD-454 and the applicable portions of the following paragraph:

In MIL-P-11268:

General requirements for plastic material and plastic parts.
Wiring and cabling, including:
Slack.
Protection.
Clearance.
Splicing.
Connections, general.
Grounding, general.
Shielding on wire and cable.
Soldering and brazing.
Cleaning.
General requirements for securing of parts.
Cleaning prior to welding.
Process for welding.
Cleaning after welding.
Controls.
Self-tapping screws.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Test equipment and facilities for Government Inspection shall be made available by the contractor.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First Article Inspection (see 4.3) - does not include preparation for delivery.

b. Inspection covered by subsidiary documents (see 4.4).

c. Quality conformance inspection.

(1) Quality conformance inspection of equipment before preparation for delivery (see 4.5).

(2) Quality conformance inspection of preparation for delivery (see 4.16).

4.3 First article. Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor.

4.3.1 First article units. The contractor shall furnish 50 first article units of the complete Restorer, Pulse Form TD-206( )/G.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.3.2 First article inspection. The first article inspection shall consist of inspections specified in Table I, and shall be performed in the order specified herein.

4.3.3 First article data. The first article test plan and test report(s) shall be as required in the contract or purchase order.

4.4 Inspection covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection requested by this specification, and the inspection requirement specified in the contract or purchase order.

| Item | Requirement |
|---|---|
| Parts, materials and processes | 3.3 |
| Printed Wiring | 3.9 |
| Gaskets | 3.10.2 |
| Finish | 3.14 |
| Marking | 3.15 |
| Connector | 3.18 |

4.5 Quality conformance inspection of equipment before preparation for delivery. The contractor shall perform the inspection specified in 4.4, 4.6 and 4.5.1 through 4.5.5 in that order. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specified requirements.

4.5.1 Group A inspection. Each unit (and each subassembly and assembly identified in Table II) on contract or purchase order shall be inspected for conformance to the inspections specified in Table II. The order of inspection of the subassemblies and assemblies and units (end equipment) shall be as follows:



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

| Inspections | Rqt Para | Test Para | Unit 1 | Unit 2 | Unit 3 | Unit 4 | Unit 5 | Unit 6 | Unit 7 | Unit 8 | Unit 9-50 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1. Inspections covered by subsidiary documents | 3.3, 4.9, 3.10.2, 3.14,3.15, 3.18 | 4.4 | Inspection to be performed on all units | | | | | | | | |
| 2. Bounce preconditioning | 3.16 | 4.6 | Inspection to be performed on all units | | | | | | | | |
| 3. Electrical preconditioning (Burn-in) | 3.11 | 4.13 | Inspection to be performed on all units | | | | | | | | |
| 4. Group A Inspection (See Table II) | | | Inspection to be performed on all units | | | | | | | | |
| 5. Group B Inspection (See Table III) | | | Inspection to be performed on all units | | | | | | | | |
| 6. Group C Inspection | | | | | | | | | | | |
| Current surge and voltage transient | 3.4.5 | 4.9.12 | | | | | | | | | (Note C) |
| System compatibility | 3.19 | 4.9.14 | | | | | | | | | (Note C) |
| Weight | 3.5 | 4.15 | | | | | | | | | (Note C) |
| EMI | 3.10 | 4.11 | | | | | 1 | | | | |
| Low temperature | 3.7.1.1 | 4.8.1.1 | | 1 | | | | | 1 | | |
| High temperature | 3.7.1.2 | 4.8.1.2 | | 2 | | | | | 2 | | |
| Humidity | 3.7.2 | 4.8.2 | | 3 | | | | | 3 | | |
| Low pressure (altitude) | 3.7.3 | 4.8.3 | | | 1 | | | | | 1 | |
| Vibration | 3.7.4.1 | 4.8.4 | | | 2 | | | | | 2 | |
| Bounce (Vehicular) | 3.7.4.2 | 4.8.5 | | | 3 | | | | | 3 | |
| Shock (bench handling) | 3.7.4.3 | 4.8.6 | | | 4 | | | | | 4 | |
| Shock, drop | 3.7.4.4 | 4.8.7 | 2 | | | | | 2 | | | |
| Fungus (See Note D) | 3.7.5 | 4.8.9 | | | | 1 | | | | | |
| Immersion | 3.7.6 | 4.8.8 | 1,3 | | | | | 1,3 | | | |
| Salt Fog (See Note D) | 3.7.7 | 4.8.10 | | | | | 2 | | | | |
| Dust | 3.7.8 | 4.8.11 | 4 | | | | | | | | |
| 7. Group D Reliability | 3.12 | 4.14 | | | | | | | | | (Note C) |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

TABLE I, First article inspection (continued)

NOTES:

A. The inspections 1 through 5 in the order shown, shall be performed on all First Article units before subjecting these units to any other inspection requirements in the table.

B. The numbers in the unit columns in the table covered by inspections numbered 6 and 7, specify the order of inspections for the indicated unit.

C. Units 9 through 50. These units are to undergo the same tests as Units 1 through 8 up to and including Group B inspection. Thereafter, the quantity and order of Group C and Reliability Testing of these units shall be as follows:

| INSPECTION | UNITS |
|---|---|
| System Compatability | 9 - 48 |
| Reliability (Group D) | 9 - 38 |
| Current Surge and Voltage Transient | 39 - 50 |
| Weight | 39 - 50 |

D. Equipment shall be thoroughly washed, cleaned, dried, and refurbished after this inspection before proceeding with subsequent inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

a. Prior to their assembly into the end equipment, the assemblies and subassemblies identified in Table II shall be subjected to a 100% visual/mechanical and electrical inspection by the contractor for conformance with the inspection requirements provided in Table II.

b. After completion of the above 100% inspection by the contractor discrete lots shall be formed from the subassemblies and assemblies which passed the 100% inspection and these shall be subjected to sampling inspection utilizing the procedures of MIL-STD-105 using general inspection levels and AQL's indicated in Table II (Quality Assurance Verification). Factors of lot composition not defined herein, or in the contract or pruchase order, shall be in accordance with MIL-STD-105.

c. Assemblies from the discrete lots which have passed the above Quality Assurance Verification Inspection shall be assembled into the end equipments which shall then be subjected by the contractor to the preconditioning requirements of 3.11 and a 100% visual/mechanical and electrical inspection in accordance with Table II in that order.

NOTE: Assemblies are not required to undergo further visual/mechanical and electrical inspection as part of the contractor's 100% Group A Inspection of the end equipment.

d. After completion of the above 100% inspection by the contractor, discrete lots shall be formed from units which passed the 100% inspection and these shall be subjected to sampling inspection by the contractor utilizing the procedures of MIL-STD-105 using the general inspection levels and AQL's indicated in Table II. Group A electrical inspection shall be performed in the order shown in Table II.

NOTE: Assemblies and subassemblies are not required to undergo further visual/mechanical and electrical inspection as part of the above contractor's sampling inspection of the end equipment.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the currentversion before use.

4.5.1.1 Order of inspection with Group A. Group A inspection shall be performed in an order satsifactory to the Government.

TABLE II. Group A Inspection

| Inspection | Req Para | Insp Para | Ref Fig | AQL Major | AQL Minor |
|---|---|---|---|---|---|
| Visual and Mechanical | | | | | |
| Circuit card assembly | 3.20 | 4.10 | - | 1.0% | 4.0% |
| Case | 3.20 | 4.10 | - | 1.0% | 4.0% |
| Case covers | 3.20 | 4.10 | - | 1.0% | 4.0% |
| TD-206( )/G assembly | 3.20 | 4.10 | - | | * |
| Electrical performance | | | - | | |
| Circuit card assembly | 3.17 | 4.9.15 | - | 1.0% | |
| TD-206( )/G assembly | | | | | |
| Power supply | 3.4.3 | 4.9.13 | 3 | 1.0% | |
| Fault location | 3.4.4 | 4.9.11 | 5 | 1.0% | |
| Signal detection | 3.4.12 | 4.9.9 | 5 | 1.0% | |
| Operational (output signal) | 3.4.1.2<br>3.4.2<br>3.4.2.1 | 4.9.6 | 2 | 1.0% | |
| Air seal test | 3.6 | 4.7 | - | 1.0% | |

* Defects in all characteristics other than visual and mechanical are considered major.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

4.5.2 Group B inspection. Group B inspection shall normally be performed in inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection. This inspection shall conform to Table III and to the special inspection levels of Table I of MIL-STD-105.

TABLE III, Group B Inspection

| Inspection | Req Para | Ref Fig | Insp Para | AQL |
|---|---|---|---|---|
| Timing Recovery | 3.4.1.1 | 4 | 4.9.8 | 1.0% for the groups |
| Signal Regeneration | 3.4.1.3 | 6 | 4.9.10 | |
| Dimensional interchangeability | 3.8 | - | 4.12 | 6.5% |

4.5.2.1 Group B sampling plan. The Group B sampling plans, for the AQL's listed in Table III, shall be as follows:

| AQL | Inspection level |
|---|---|
| 1.0% | S-4 |
| 6.5% | S-4 |

4.5.2.2 Order of inspection with group B. Group B inspection shall be performed in an order satisfactory to the Government.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

4.5.3 Group C inspection. Group C inspection with the exception of subgroup 4 shall be performed on units that have passed Group A and Group B inspection. Subgroup 4 inspections shall be performed on units that have passed Group A inspection. The inspection shall consist of the inspections specified in Table IV. Samples shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for Group C inspection.

4.5.3.1.1 Subgroup 1. For this subgroup, two units shall be selected from the first production lot. For subsequent Group C inspection, two units shall be selected every month. One unit shall be subjected to humidity testing; and one unit shall be subjected to electrical current surge and voltage transient test and temperature testing in that order.

4.5.3.1.2 Subgroup 2. For this subgroup, three units shall be selected from the first production lot. For subsequent Group C inspection, three units shall be selected every third month. One unit shall be subjected to immersion, drop and immersion testing; one unit shall be subjected to EMI testing; and one unit shall be subjected to vibration and bounce vehicular testing with each unit subjected to testing in the order given.

4.5.3.1.3 Subgroup 3. For this subgroup, three units shall be selected from the first production lot. For subsequent Group C inspection, three units shall be selected from the fourth month and every six months thereafter. One unit shall be subjected to weight, altitude, dust and bench handling testing in that order; one unit shall be subjected to salt fog testing; and one unit shall be subjected to fungus testing.

4.5.3.1.4 Subgroup 4. For this subgroup, 39 units shall be selected from the first production lot. For subsequent Group C inspection, 39 units shall be selected every sixth month.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the currentversion before use.

TABLE IV. Group C Inspection

| Inspection | Requirement Paragraph | Reference Figure | Inspection Paragraph |
|---|---|---|---|
| Subgroup 1 | | | |
| Temperature | | | |
| Low | 3.7.1.1 | 3 | 4.8.1.1 |
| High | 3.7.1.2 | 3 | 4.8.1.2 |
| Humidity | 3.7.2 | 3 | 4.8.2 |
| Current surge and voltage transient | 3.4.5 | 7 | 4.9.12 |
| Subgroup 2 | | | |
| Vibration | 3.7.4.1 | 3 | 4.8.4 |
| Shock (bounce) | 3.7.4.2 | 3 | 4.8.5 |
| Shock (drop) | 3.7.4.3 | 3 | 4.8.7 |
| Immersion | 3.7.6 | - | 4.8.8 |
| EMC | 3.10 | 8 | 4.11 |
| Subgroup 3 | | | |
| Weight | 3.5 | - | 4.15 |
| Low pressure (altitude) | 3.7.3 | 3 | 4.8.3 |
| Shock (bench handling) | 3.7.4.3 | - | 4.8.6 |
| Fungus* | 3.7.5 | - | 4.8.9 |
| Salt fog * | 3.7.7 | - | 4.8.10 |
| Dust | 3.7.8 | 3 | 4.8.11 |
| Subgroup 4 | | | |
| System compatibility | 3.19 | 9 | 4.9.14 |

*The equipment shall be thoroughly washed, cleaned, dried and refurbished after this inspection before proceeding with subsequent inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.5.3.2 Order of inspection within Group C. Group C inspection shall be performed in the order specified in 4.5.3.1.

4.5.3.3 Group C failures. Actions required relative to Group C failures shall be as specified in the contract or purchase order.

4.5.4 Reinspection of conforming Group B and C sample units. Unless otherwise specified, sample units which have been subjected to and passed both Group B and Group C inspection may be accepted on the contract provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.5.5 Group D inspection. This inspection shall consist of the tests specified in Table V and shall be performed on unit from lots which have been subjected to and met Group A and Group B inspection.

Table V - Group D Inspection

| Inspection | Requirement Para. | Test Para. |
|---|---|---|
| Reliability | 3.12 | 4.14 |

4.6 Bounce preconditioning. (See 3.16) The unit, with shock mounts (if any) removed or blocked, shall be placed in its normal operation position on the table of the Package Tester, Type 1000-SC, as made by the L. A. B. Corporation, Skaneateles, New York, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch thick strip of material under one corner or edge of the unit to a distance of 3 inches as the unit bounces. The unit shall be subjected to this preconditioning for 1 minute. After bounce preconditioning, the unit shall not be repaired, aligned, cleaned or otherwise changed prior to subjection to inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.7 Air-seal test. (See 3.6) The equipment shall be opened and closed again in such manner as to break and remake the seal. Immediately thereafter, the equipment as field transported shall be subjected to a vacuum of 1 pound per square inch (1 pound per square inch less than the atmospheric pressure surrounding the equipment) applied to the interior of the transit case or to the interior of the equipment inclosure when no transit case is provided. The vacuum then shall be valved-off and the interior pressure measured during the ensuing period of 1 minute. During this 1-minute period the decrease in vacuum shall not exceed 0.01 pound. The gage used for measurement of the vacuum shall be of such accuracy that a difference of 0.01 pound can be determined readily.

4.8 Service condition tests. The following service condition tests shall be performed.

4.8.1 Temperature tests.

4.8.1.1 Low temperature. (See 3.7.1.1) The equipment shall be subjected to Test Method 502.1, Procedure I of MIL-STD-810. Storage temperature shall be minus 70 degrees F and operation temperature shall be minus 50 degrees F. Storage time shall be 72 hours. At operation temperature, tests shall start within 5 minutes after ac power application. A pretest performance record is required and is speciified in 4.9.7. Performance checks per 4.9.7 shall be made as specified in Test Method 502.1 during tests.

4.8.1.2 High temperature. (See 3.7.1.2) The equipment shall be subjected to Test Method 501.1, Procedure II of MIL-STD-810 except as follows: Step 4, the non-operating temperature is 68 degrees C (154 degrees F), Step 8 shall be modified as follows: Solar radiation of the intensity of 360 BTU/sq ft/hr shall be maintained for four hours and then tested in



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

accordance with paragraph 4.9.7. The highest operating temperature is 125 degrees + 5 degrees -0 degrees F not including the effects of solar radiation. Performance tests per 4.9.7 shall be made during tests as specified in Test Method 501.1, Procedure II.

4.8.2 Humidity test. (See 3.7.2) The equipment shall be subjected to Test Method 507.1, Procedure III of MIL-STD-810. In Step 7 of Procedure III, the covers shall be removed from the TD-206 ( )/G so as to expose the normally sealed areas to the chamber environment. In Step 6, measurements shall be taken at the end of 22 hours and 46 hours during each 48 hour cycle. Test measurements shall start within 5 minutes after each application of AC power to the TD-754. Pretest data required is specified in 4.9.7.

4.8.3 Low pressure (altitude) test. (See 3.7.3) The equipment shall be subjected to Test Method 500.1, Procedure I of MIL-STD-810. Pretest data required is specified in 4.9.7.

4.8.4 Vibration. (See 3.7.4.1) The equipment shall be subjected to the following test:

a. Operate the test item in accordance with 4.9.7 and record pre-performance electrical test measurements. Inspect the test item mechanically.

b. Mounting techniques. The equipment shall be attached to the vibrator exciter table by its normal mounting means, or by means of a Rigid Fixture capable of transmitting the vibration conditions as specified herein. Precautions shall be taken in the establishment of mechanical interfaces to minimize the introduction of undesirable responses in the test setup. Whenever possible, the test load shall be distributed uniformly on the vibration exciter table in order to reduce to the smallest amount, effects of unbalanced loads. Vibration amplitudes and frequencies shall be measured by techniques that will not significantly affect test item input control or response. The input control sensing device(s) shall be rigidly attached to the vibration table or to the intermediate structure, "if used", at or near as possible to the attachment point(s) of the test item.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

c. The test item shall be vibrated along each of its three mutually perpendicular axes in accordance with Test Levels, Frequency Range, and Time Schedules outlined below. The frequency of the applied vibration shall be swept logarithmically over the specified frequency range.

Test level: 1G

Frequency range: 5 Hz to 500 Hz

Time schedule: 2 1/2 hours per axis

Sweep rate: 5 - 500 - 5 Hz in fifteen (15) minutes

Upon completion of the test, visually inspect the test item for any evidence of mechanical damage and operate the test item and compare the results with pre-performance test data.

4.8.5 Shock (bounce). (See 3.7.4.2) The equipment shall be subjected to Test Method 514.2, Procedure XI, Part 2 of MIL-STD-810. Pretest data required is specified in 4.9.7. The TD-206( )/G shall be tested with the connector covers secured.

4.8.6 Shock test, bench handling. (See 3.7.4.3) The equipment shall be subjected to Test Method 516.2, Procedure V of MIL-STD-810. Pretest data per 4.9.7 is required.

4.8.7 Shock test, drop. (See 3.7.4.4) The equipment shall be subjected to Test Method 516.2, Procedure II of MIL-STD-810. Height of drop shall be 20 feet. Number of drops shall be six. Pretest data required is specified in 4.9.7.

4.8.8 Immersion test. (See 3.7.6) The equipment, with connector protective covers removed from the connectors, shall be subjected to Test Method 512.1, Procedure I of MIL-STD-810.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.8.9 Fungus test. (See 3.7.5) The equipment shall be subjected to the fungus test specified in Method 508.1, Procedure I of MIL-STD-810. There shall be abundant growth colonization (6.3) on 50 percent or more of the area of the control item after 14 and 28 days. No cleaning of the equipment is permitted for 72 hours prior to the fungus test. Handling, prior to and during testing, shall be accomplished without contamination of the equipment. Inability of the equipment to meet the requirements of 3.7.5 shall constitute failure of this test.

4.8.10 Salt fog. (See 3.7.7) The equipment shall be subjected to Test Method 509.1 of MIL-STD-810. At the conclusion of the test, the equipment shall be examined for evidence of visible corrosion. Inability of the equipment to meet the requirements of 3.7.7 shall constitute failure of this test.

4.8.11 Dust test. (See 3.7.8) The equipment shall be tested in accordance with Method 510, Procedure I, of MIL-STD-810. Pretest data per 4.9.7 is required.

4.9 Electrical tests.

4.9.1 Standard conditions. Tests shall be conducted at room ambient temperature, pressure, and humidity per MIL-STD-810 unless otherwise specified.

4.9.2 Alignment. Alignment of the TD-206( )/G is not required. However, alignment of the TD-754 for 48 channel operation shall be in accordance with the following:

a. Connect per test figures using Multiplexer TD-754( )/G.

b. Align the Multiplexer TD-754( )/G per TM 11-5805-383-12.

c. Set the TD-754( )/G Cable Miles switch on panels 12A4 and 12A5 to "1 mile".

d. Set the TD-754( )/G MODE switch to "48AR" position.

e. Set the cable current to 38 ma ±3%.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.9.3 Standard test equipment. Standard test equipment is indicated in test figures by manufacturer and model number. In all cases, equivalent substitutes may be used. The equipment indicated in the figures is listed in Table VI. Standard test equipment shall be provided by the contractor. Government Technical Representative approval is required prior to use of proposed substitute items.

TABLE VI. Standard Test Equipment

| Designation in Fig | Function | Manufacturer |
|---|---|---|
| TEK R5403/D40 | Dual trace Oscilloscope | Tektronix, Inc. |
| Fluke 8120A | Digital Multimeter | Fluke (John) Mfg Co |
| HP606B | Signal Generator | Hewlett Packard Co |
| HP5245L | Electronic Counter | Hewlett Packard Co |
| USVH | Selective Voltmeter | Rhode & Schwarz |
| GR-1390B | Random Noise Generator | General Radio Co |
| HP-400EL | AC Voltmeter | Hewlett Packard Co |
| 670A | Milliohm meter | Shallcross |

4.9.4 Special test equipment. Special test equipment is indicated by name in the test figures. A description of this equipment follows. Unless otherwise specified, special test equipment shall be provided by the contractor subject to approval of the Government Technical Representative.

a. Pseudo Random Pattern Generator (PRPG) and Error Detector, see SM-E-704762. This is a circuit to provide a pseudo random PCM pattern at a 48 channel rate. The generator shall consist of a 23 (or more) stage shift register with the appropriate feedback circuitry to produce a maximal length sequence. A single error generator shall be provided to verify the operation of the error detection circuitry. An error detection circuit shall detect the transmission of errors. For error detection, two generators are needed, one for transmit and one for receive. External timing of the correct frequency may be used.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

b. Cable signal test circuit. (See Figure 1) This circuit is used to test the effect of noise and carrier on the TD-206( )/G. It allows for the addition of noise or tone to the PCM cable signal at the 1/2 mile point and at the same time allows adjustment of the level of the FROM CABLE PCM signal from 20 to 50 millivolts peak-to-peak through 1 mile of CX-11230( )/G cable to the next TD-206( )/G input.

NOTE: DC and orderwire must pass through the circuit.

c. 144 kHz square wave generator. The circuit shall divide the 2.304kHz timing signal from the P.R.P.G. by four (4). The PCM out shall have rise and fall times of 20 to 120 ns when measured from the 10 to 90 percent point. The signal amplitude shall be +0.0 to -0.4 volts from a "0" and -2.2 to -2.6 for a "1" level.

d. 2.304MHz variable frequency timing generator. The square wave output of the 2.304MHz variable frequency timing generator shall be continuously variable from 2.304MHz -0.006% to 2.304MHz +0.006%. The external timing generator output shall be applied to the "External Clock" terminal J1 of the P.R.P.G. per SM-E-704762.

4.9.5 Ancillary items. Ancillary items required for testing by this specification shall be furnished by the contractor in the quantities necessary and with cable lengths as required to accomplish the testing herein. The ancillary items are the following:

a. Cable Assembly, Radio Frequency CG-2437( )/TCC. In accordance with SC-DL-531016, length shall be ten feet unless otherwise specified in the bid request and contract (interconnects between the TD-754 and CX-10734).

b. Cable Assembly, Radio Frequency CG-2438( )/TCC. In accordance with SC-DL-531017, length shall be ten feet unless otherwise specified in bid request and contract (interconnects between the TD-754 and CX-10734).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

c. Cable Assembly, Adapter CX-10734( )/G. In accordance with DL-SC-A-339551 and meet the requirements of MIL-C-55583 (interconnects between the CG-2437 and CX-11230 and between the CG-2438 and CX-11230).

d. Cable Assembly, Radio Frequency CG-1040( )/U. In accordance with SC-DL-531012, length shall be six feet unless otherwise specified in the bid request and contract (interconnection between P.R.P.G., TD-660( )/G and TD-754( )/G.

e. Cable Assembly, Power Electrical CX-11727( )/U. In accordance with SC-DL-525135, length five feet unless otherwise specified in the bid request and contract. (Power cord for TD-660 and TD-754).

4.9.6 Output signal test (operational test). (See 3.4.1.2, 3.4.2 and 3.4.2.1).

a. Connect equipment per Figure 2.

b. Align equipment for 48 channel operation.

c. Press TALK-SIGNAL switch to SIGNAL at the TD-754 and hold (both directions).

d. Measure error rate for three seconds. If an error is detected in the three second period, continue to measure the error rate for a total of two minutes. Measure error rate in both directions.

e. Signal, talk, and listen on cable orderwire.

f. The requirements of paragraph 3.4.1.2, 3.4.2 and 3.4.2.1 shall be met.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.9.7 Environmental test. (See 3.7)

a. Connect the equipment per Figure 3.

b. Align equipment for 48 channel operation.

c. Press TALK-SIGNAL switch to SIGNAL at the TD-754 ( )/G and hold (both directions).

d. Measure the error rate for two minutes, both directions.

e. Signal, talk, and listen on the cable orderwire.

f. Adjust the timing to the PRPG to 2.304 MHz - 0.005%.

g. Measure the error rate for two minutes both directions.

h. Adjust the timing to the PRPG to 2.304 MHz + 0.005%.

i. Measure the error rate for two minutes both directions.

j. The requirements of paragraph 3.4.1.1, 3.4.1.2 and 3.4.2 shall be met.

4.9.8 Timing recovery test. (See 3.4.1.1)

a. Connect equipment per Figure 4.

b. Align the equipment for 48 channel operation.

c. At the PCM-IN-1 connector of the TD-754 ( )/G, apply a 144 kHz square wave.

d. Measure the peak to peak phase jitter of the trailing edge of the TO CABLE signal at the output of the TD-754 ( )/G and the output of the restorer under test.

e. Measure the peak to peak phase jitter at the 50% amplitude points of the leading edge of the signal at the TIM-OUT-1 connector of the receiving TD-754 ( )/G.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

f. Repeat d. and e. above for the opposite directions.

g. The requirements of paragraph 3.4.1.1 shall be met.

4.9.9 Signal detection test. (See 3.4.1.2)

a. Connect equipment per Figure 5.

b. Align equipment for 48 channel operation.

c. Adjust level of signal at TD-206( )/G input to 50 millivolts peak-to-peak (8.84 millivolts RMS at 2304 kHz for 50% "1" pattern) into 62 ohms.

d. Insert noise at half mile point and adjust for peak signal to RMS noise ratio of 20 dB at 62 ohm termination.

e. Reconnect TD-206( )/G input signal.

f. Count errors for not less than 2 minutes.

g. Repeat c thru f above for 30 and 20 millivolts peak-to-peak. (5.3 and 3.5 millivolts RMS at 2304 kHz for 50% "1" pattern).

h. Repeat c above.

i. Disconnect noise generator and connect oscillator.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

j. Measure error performance with oscillator set to produce each of the signal to carrier ratios specified in 3.4.1.2.

k. Repeat j above for 30 and 20 millivolts peak-to-peak input to the TD-206 ( )/G.

l. The requirements of 3.4.1.2 shall be met.

4.9.10 Signal regeneration test. (See 3.4.1.3)

a. Connect equipment per Figure 6.

b. Align Multiplexer TD-754 ( )/G for 12 channel operation.

c. Measure pulse amplitude above ac zero and pulse width of first pulse after at least 4 consecutive intervals with no pulse.

d. The requirements of 3.4.1.3 shall be met.

4.9.11 Fault location measurements test. (See 3.4.4)

a. Connect the equipment per Figure 5.

b. Align equipment for 48 channel operation. Set the input signal at the repeater under test to 6.6 MV RMS at 230 kHz with the word generator set to a 1010--- pattern.

c. With 6.6 MV RMS signal applied to the repeater under test, measure the voltage between E1 and E14.

d. Measure the voltage at the input of the repeater under test, pins E1 and E2.

e. Switch timing out at the PRPG to "EXT" and again measure the voltage at the input of the repeater under te pins E1 and E2.

f. The requirements of paragraph 3.4.4 shall be met.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.9.12 Electrical current surge and voltage transient test. (See 3.4.5)

a. Connect the equipment in accordance with Figure 7.

b. Set the TD-754 ( )/G METER SELECT switch to the Cable volts position.

c. With Switch "A" closed and switches "B" and "C" open, turn on TD-754 ( )/G cable power. Close switch "B" about one second after turning on cable power while TEST ALIGN meter is still pegged.

d. Repeat c, four (4) times.

e. Open switch "B" and close switch "C". Check oscilloscope for normal restorer output pulses in accordance with 3.4.1.3.

f. With switch "B" open and switches "A" and "C" closed, open switch "A" and wait for TD-754 ( )/G cable power supply to shut down. Close switch "A" and reset the cable power supply by operating the CABLE POWER switch to OFF and then to ON.

g. Repeat f, four (4) more times.

h. Close switches "A" and "C". Check that the cable power supply is on. Check with oscilloscope for normal restorer output pulses in accordance with 3.4.1.3.

i. Turn restorer end-for-end and repeat a. through h.

j. The requirements of 3.4.5 shall be met.

4.9.13 Power supply test. (See 3.4.3)

a. Connect the equipment per Figure 2.

b. Align the equipment for 48 channel operation.

c. Adjust cable current to 32 ma.



Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the current version before use.

d. Measure error rate for three seconds. If an error is detected, continue to count errors for a total of two minutes. Measure error rate in both directions.

e. Adjust cable current to 42 ma.

f. Repeat paragraph d.

g. The requirements of paragraph 3.4.3 shall be met.

4.9.14 System compatability verification test. (See 3.19)

a. Connect the equipment per Figure 9.

b. Align equipment for 48 channel operation.

c. Press talk-signal switch to signal at the TD-754( )/G and hold.

d. Measure the error rate for one minute.

e. Signal, talk, and listen on cable orderwire.

f. Adjust the timing to the P.R.P.G. to 2.304MHz -0.005%.

g. Repeat d. and e. above.

h. Adjust the timing to the P.R.P.G. to 2.304MHz +0.005%.

i. Repeat d. and e. above.

j. Adjust the Cable Current to 32 ma.

k. Repeat d. and e. above.

l. Adjust the Cable Current to 42 ma.

m. Repeat d. and e. above.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

n. Adjust the external 2.304KHz square wave generator to obtain zero jitter at the output of the transmitting TD-754( )/G.

o. Measure peak-to-peak phase jitter of the trailing edge of the "to Cable" signal at the zero crossing point at the following locations: output of first, second, fourth, eighth, sixteenth, thirty-second, and thirty-ninth TD-206( )/G.

p. Measure peak-to-peak jitter of the 50% amplitude point of the leading edge of the signal at the TIM OUT 1 connector of the receiving TD-754( )/G.

q. Repeat c. through p. above for the opposite direction transmission.

r. The requirements of paragraphs 3.4.1.1, 3.4.2, 3.4.2.1, 3.4.3 shall be met

4.9.15 Circuit card assembly test. Circuit card assembly 7A1A shall be tested to the test requirement specification drawing cited in paragraph 3.17.

4.10 Visual and mechanical inspection. (See 3.13 and 3.20) Equipment shall be examined for the defects listed in MIL-STD-252. An inspection shall be performed to verify compliance with those portions of 3.13 (safety engineering) which can be determined visually.

4.11 Electromagnetic compatibility. (See 3.10) Test methods and procedures shall be in accordance with MIL-STD-462, Notice 3 and Figure 8.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

4.11.1 Bonds and grounds. (See 3.10.1) The 2.5 milliohm bonding requirements of 3.10.1 shall be verified, prior to any other EMI/EMC test. The bonding measurements shall be made using a Shallcross Model 670A (or equivalent) milliohm meter. The bonding measurements shall be made at the points listed below (as a minimum) and recorded for inclusion in the EMI/EMC test report:

a. Between each connector shell and the equipment chassis (at least once in each quadrant).

b. Between each lid and the equipment chassis (measured from half way between each mating screw on the lid to the opposite point on the chassis).

c. Between each lid (at the connector end) and the chassis (at the connector end).

d. Bonding of the ground lead of power filters to the ground plane shall be verified to be 2.5 milliohms (max).

4.12 Inspection for dimensional interchangeability. (See 3.8) The dimensions listed below shall be measured to determine conformance to the physical interchangeability requirement of 3.8. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

a. External and internal dimensions of cases, covers, and insertable assemblies when such dimensions affect mating of parts.

b. Dimensions of cavities, when such dimensions affect insertion of items.

c. Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

d. Location of connectors, locking pins, fasteners, slides, and mountings which receive mating parts for plug-in assemblies and major units; and location of the mating parts on the plug-in assembly or major unit.

e. Size and form of special threads.

f. Subassembly cavities that require close fitting.

4.13 Electrical preconditioning (burn-in) inspection. (See 3.11) Each equipment on order shall be subjected to the burn-in test and meet the requirements of 3.11. The preconditioning shall consist of the following: The equipment shall be deenergized and reenergized a minimum of six (6) times during preconditioning (off time 2 minutes, on time no less than four (4) hours) and periodic checks performed in accordance with 4.9.6a. through 4.9.6e., inclusive, (except Figure 2 is modified to use up to 39 each restorers with appropriate lengths of CX-11230 cable), to detect any failures at intervals not to exceed 8 hours. If an equipment fails during the last 24 hour failure free period, it shall be repaired, returned to test and the test continued until a 24 hour failure free period has been achieved. A failure is defined as the inability of the equipment to meet the requirements of tests cited in 4.9.6a thru 4.9.6e.

4.13.1 Test procedure. The contractor shall perform tests in accordance with contractor prepared Government approved test procedures to demonstrate normal operation of the equipment during periodic operational tests.

4.13.2 Retesting. Assemblies failing electrical acceptance tests subsequent to satisfactory completion of electrical preconditioning, may be repaired and retested, accepted and delivered without repeat of electrical preconditioning.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the currentversion before use.

4.13.3 Preconditioning stamp. All electrical preconditioned restorers shall be identified by a preconditioning stamp. The stamp shall be affixed to the tube near the nameplate of each unit which has been preconditioned. The stamp shall be a "p" in a circle and shall be marked on the preconditioned unit per the Group 3 requirements of MIL-M-13231.

4.14 Reliability testing. (See 3.12)

4.14.1 First article and Group D inspection. To determine compliance with 3.12, first article units shall be tested in accordance with test plan XXIV of MIL-STD-781. For Group D inspection, the equipment shall be tested in accordance with test plan XXV of MIL-STD-781. Paragraph 4.2.2.4, test length, of MIL-STD-781 shall apply.

4.14.2 Reliability test conditions. The test shall be conducted under the following conditions:

Temperature - cycled from ambient to -20°F ±5°F to +125°F ±5°F to ambient in 24 hours

Vibration - none

Input voltage - nominal specified voltage

Duty cycle - continuous

Equipment on-off cycle - once each 24 hours

Performance checks shall be performed in accordance with 4.9.6 a. through 4.9.6 e. (except Figure 2 is modified to use 29 each restorers with 30 miles of CX-11230 cable) and in accordance with the Government approved test procedure required in the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.14.3 Failure definition. A failure is defined as the inability of the equipment to perform its required function within limits as described in this specification. This includes any event which causes departure from performance as required by this specification or the contractor's approved test procedures. If a pattern failure occurs, then a reject decision has been reached and corrective action shall be accomplished as specified elsewhere in the contract. Paragraphs 5.4.8, Determination of compliance; 5.5.1, Failure categories; 5.6, Verifying repair; 5.8, Preventive maintenance; 5.9, Restoration of failed equipments; and 5.10, Test records of MIL-STD-781 shall apply.

4.14.4 Sampling for first article Group D inspection. Twenty-nine (29) units shall be selected from the first article units in accordance with TABLE I and subjected to the test of 4.14.

4.14.5 Sampling for Group D inspection. A maximum of twenty-nine sample units shall be selected at random from the first month's production and subjected to the test of 4.14. For subsequent Group D inspections, twenty-nine (29) units shall be selected at random from each third month's production lot. Samples selected from each inspection lot may be selected early in the month so that testing can be completed by the end of that month. A lot shall be defined as one month's production.

4.14.6 Non-compliance. In case of Group D failure occurrence, procedures and requirements specified elsewhere in the contract shall be followed.

4.14.7 Reinspection of conforming Group D sample units. Unless otherwise specified, sample units which have been subjected to and have passed Group D inspection may be accepted on the contract provided all damage is repaired and the sample units are resubjected to and pass Group A inspection only.

4.15 Weight. (See 3.5) The equipment shall be weighed to show compliance with 3.5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.16 Quality conformance inspection of preparation for delivery. Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

4.17 Rough handling test (preparation for delivery). When the rough handling test in accordance with Specification MIL-P-116 is required by the contract (see 6.2.c), the following functional tests shall be conducted to determine freedom from operational malfunction caused by the rough handling: Operational Test (Output Signal Test), paragraphs 3.4.1.2, 3.4.2, 3.4.2.1, 4.9.6, except up to 39 each restorers and 40 miles of CX-11230 cable may be used per Figure 2.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

5. PACKAGING.

5.1 Preservation. Preservation shall be level A, B or Commercial, as specified (see 6.9).

5.1.1 Level A.

5.1.1.1 Cleaning. Each Pulse Form, Restorer, TD-206( )/G shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Each Pulse Form, Restorer, TD-206 ( )/G shall be dried in accordance with the applicable procedures of MIL-P-116.

5.1.1.3 Preservation application. No preservative required.

5.1.1.4 Unit packaging. Unit packing shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical literature. Each technical literature shall be unit packed method IC-1.

5.1.1.4.2 Pulse Form, Restorer TD-206 ( )/G. Each item shall be individually unit packed method III as follows: Cushion each item on all surfaces with cells or pads or both, fabricated of fiberboard conforming to PPP-F-320, type CF, class weather-resistant, variety SW, grade W5c, designed to protect all projections and absorb the shock of impact in handling and transit. As an alternate, cushioning material may be fabricated of plastic molding material conforming to MIL-P-19644 or polyurethane foam conforming to MIL-P-26514. Place each cushioned unit within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Place the technical literature, packaged as specified in 5.1.1.4.1, on top of the contents, directly under the lid of the box. Close the box in accordance with appendix of the box specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

5.1.2 Level B.

5.1.2.1 Cleaning, drying, preservative application and unit packing. Each Pulse Form, Restorer shall be cleaned, dried, preserved and unit packed as specified in 5.1.1.

5.1.3 Commercial preservation. Preservation shall be in accordance with FED-STD-356.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.10). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of Pulse Form, Restorer TD-206()/G, unit packed as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. A quantity of the containers shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

5.2.1.1 Unitization. Palletization shall be required when: containers specified in 5.2.1 do not require skids; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers packed as specified in 5.2.1, except that container strapping may be omitted, shall be placed on a pallet, load type I, conforming to MIL-STD-147.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.2 Level B. A quantity of Pulse Form, Restorer TD-206()/G, unit packed as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. A quantity of the containers shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E or PPP-B-636, type CF, class weather-resistant, variety DW. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.2.1 Unitization. Palletization shall be required when: containers specified in 5.2.2 do not require pallet mounting; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers packed as specified in 5.2.2, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial packing. Packing shall be in accordance with FED-STD-356.

5.3 Marking

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with FED-STD-356.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Restorer, Pulse Form TD-206 ( )/G operates in cable systems terminated by Multiplexers TD-204 ( )/U and TD-754 ( )/G. The restorers are normally exposed to all environmental conditions peculiar to the areas in which they are deployed.

6.1.1 Description. The Restorer TD-206 ( )/G performs the function of reshaping and retiming the PCM signals received over Cable Assembly, Special Purpose, Electrical CX-11230 ( )/G from another restorer TD-206 ( )/G or Multiplexer TD-204 ( )/U or TD-754()/G.There are two identical panels in the restorer which contain the PCM and orderwire circuitry. Provision is made to bypass cable orderwire signals around the PCM recovery circuits. Fault indicating circuitry is included to operate in conjunction with the fault locating facility in the Multiplexer TD 204 ( )/U or TD-754()/G.The restorer may be operated interchangeably with Cable Assembly, Special Purpose, Electrical CX-4245 ( )/G with suitable cable interface adapters.

6.1.2 System application. The Restorer TD-206 ( )/G is used in cable systems exceeding one mile in length. The restorers are separated by one mile of cable and by one, 3/4, 1/2 or 1/4 mile of cable from a Multiplexer TD-204 ( )/U or TD-754( )/G.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification and any amendment thereto.

b. Levels of preservation, packaging and packing. (See Section 5).

c. When rough handling and functional tests are required.

d. Marking and shipping of samples.

e. Place of final inspection.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

f. Technical literature required.

g. First article inspection.

6.3 Definitions.

6.3.1 Branching. Branching is a connected arrangement of filaments (hyphae) formed by shoots or secondary stems growing from the main stem or filament (hypha).

6.3.2 Equipment divisions. The terms used herein for equipment divisions conform to Standard MIL-STD-280 Definition of Terms for Equipment Definition.

6.3.3 Exfoliation. Exfoliation is corrosion along the grain boundries of the metal resulting in the peeling or separating, or both, of successive layers of the metal. The appearance resembles loose book pages or onion skin peeling.

6.3.4 Growth colonization. Growth colonization is a mass of individual plants, generally of one species, living together; or a group of hyphae which is formed from one spore or cell and may be one individual plant. Colonization which completely covers the surface of the nutrient material constitutes abundant growth.

6.3.5 Inspection terms. The inspection terms used herein conform to Standard MIL-STD-109, Inspection terms and Definitions. The following are abbreviated definitions selected from those given therein for immediate reference.

6.3.5.1 Inspection. Inspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

6.3.5.2 Examination. Examination consists of simple, generally non-destructive determinations of compliance without use of special testing equipment.

6.3.5.3 Testing. Testing consists of determinations of compliance, using technical means.

6.3.6 Microbial growth. Microbial growth is the growth of very minute organisms. Such organisms when present in large numbers may provide a colony visible to the naked eye.

6.3.7 Sporulation. Sporulation is the formation of minute unicellular reproductive or dormant bodies, call spores.

6.3.8 Tubular germination. Tubular germination is partial growth by the production of hyphae, which are tubular shaped fungal filaments. Tubular germination constitutes restricted individual spore growth not proceeding to colonization.

6.4 Group C inspection. Approval to ship may be withheld at the discretion of the Government pending the decision from the Contracting Officer on the adequacy of corrective action. (See 4.5.3.3)

6.4.1 Initial shipments. Initial shipments of end items will be contingent only upon successful completion of all Group C tests. (See 4.5.3)

6.5 Location of operational inspection. It is desirable that the operational test (output signal test 4.9.6) be performed at a location that will minimize handling after this inspection is completed. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the currentversion before use.

6.6 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: TD-206 ( )/G. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.7 Color. The color chip furnished by the procuring agency will be Color Chip No. X24087, and may be obtained upon request to Commanding General, Aberdeen Proving Grounds, ATTN: Coating and Chemical Laboratory, Aberdeen, Maryland 21005.

6.8 Verification inspection. Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

6.9 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.


6.10 Location of operational inspection and air-seal test. It is desirable that the Operational Test (paragraph 4.9.6) and the Air Seal Test (paragraph 4.7) be performed at a location that will minimize handling (which might cause damage to the equipment) after this inspection is completed. Any preparation for shipment which would require breaking of the equipment seal should be accomplished prior to the Air-Seal test so that the seal may remain intact thereafter. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.

Custodian:
Army EL

Preparing Activity:
Army EL
Project No.5805-A233



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.




* 1. DC AND ORDERWIRE MUST PASS THROUGH CIRCUIT.


2. AMPLIFIER GAIN ADJUSTABLE TO PROVIDE 20 THRU 50 MILLIVOLTS PEAK TO PEAK AT TD-206( )/G INPUT THROUGH 1 MILE OF CX-11230( )/G.

CABLE SIGNAL TEST CIRCUIT

FIG. 1



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

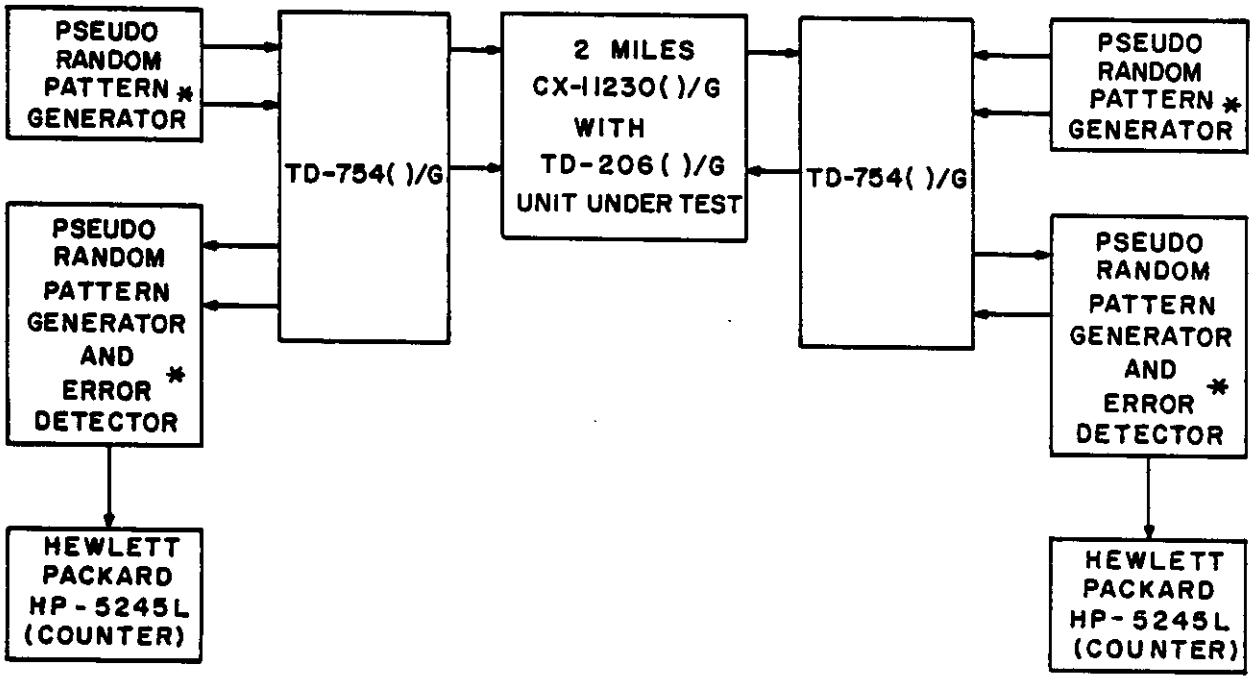



* SME-704782

OUTPUT SIGNAL TEST

FIG. 2



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

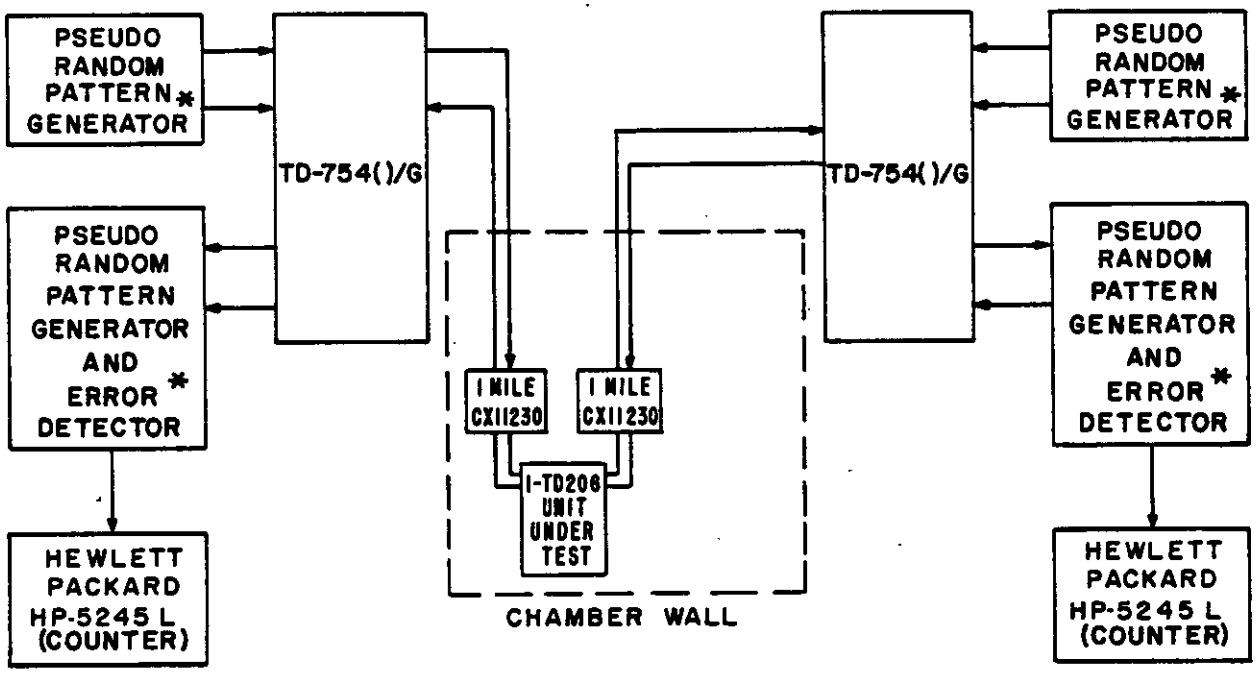


* SME-704762

ENVIRONMENTAL TEST

FIG. 3



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

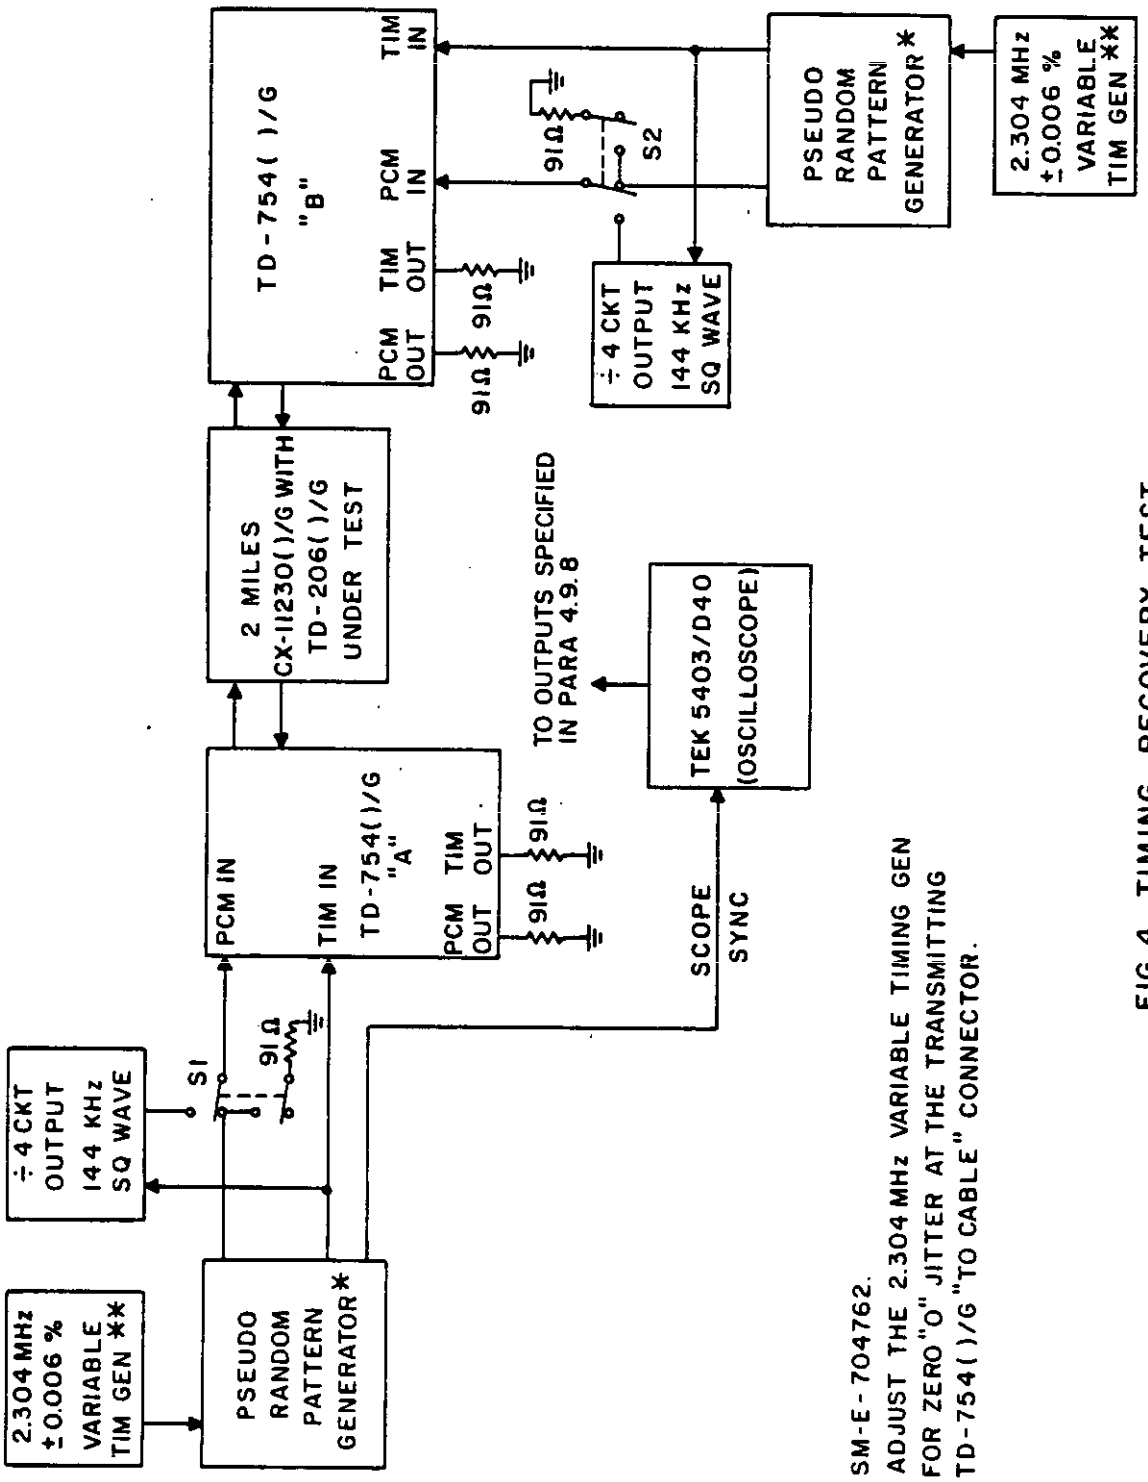




FIG. 4 TIMING RECOVERY TEST

* SM-E-704762.

** ADJUST THE 2.304 MHz VARIABLE TIMING GEN FOR ZERO "O" JITTER AT THE TRANSMITTING TD-754( )/G "TO CABLE" CONNECTOR.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

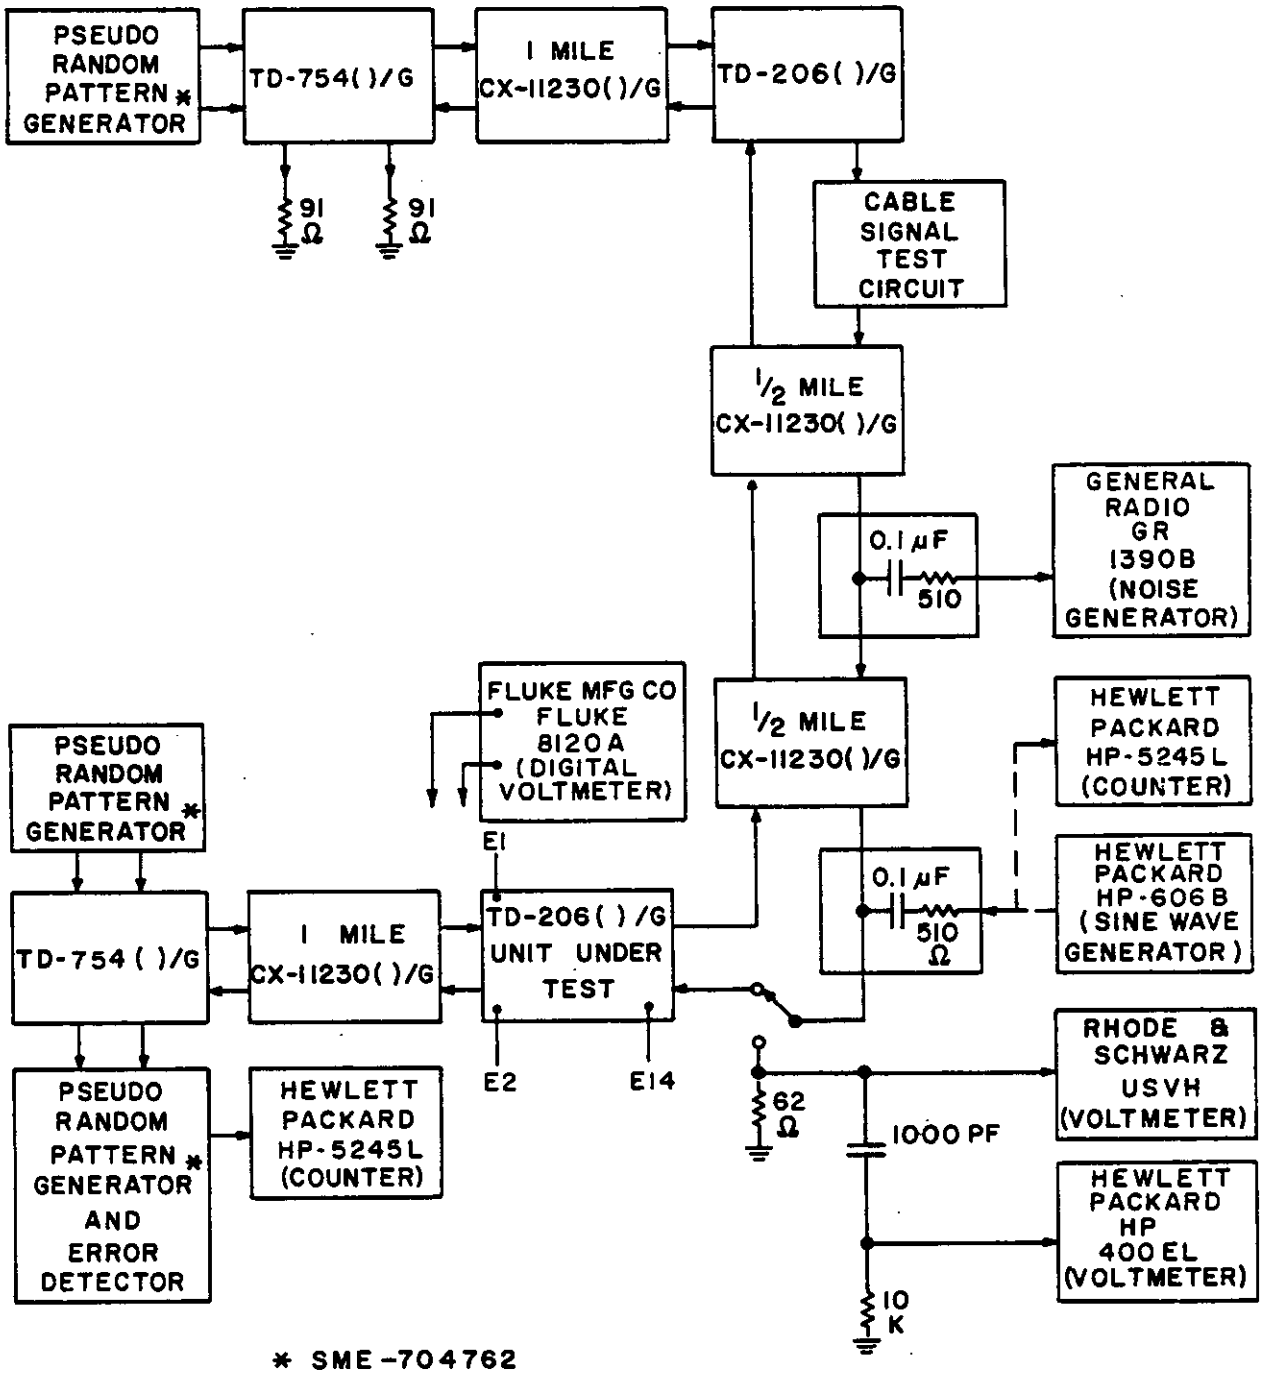



SIGNAL DETECTION TEST & FAULT LOCATION MEASUREMENT TEST

FIG. 5




Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

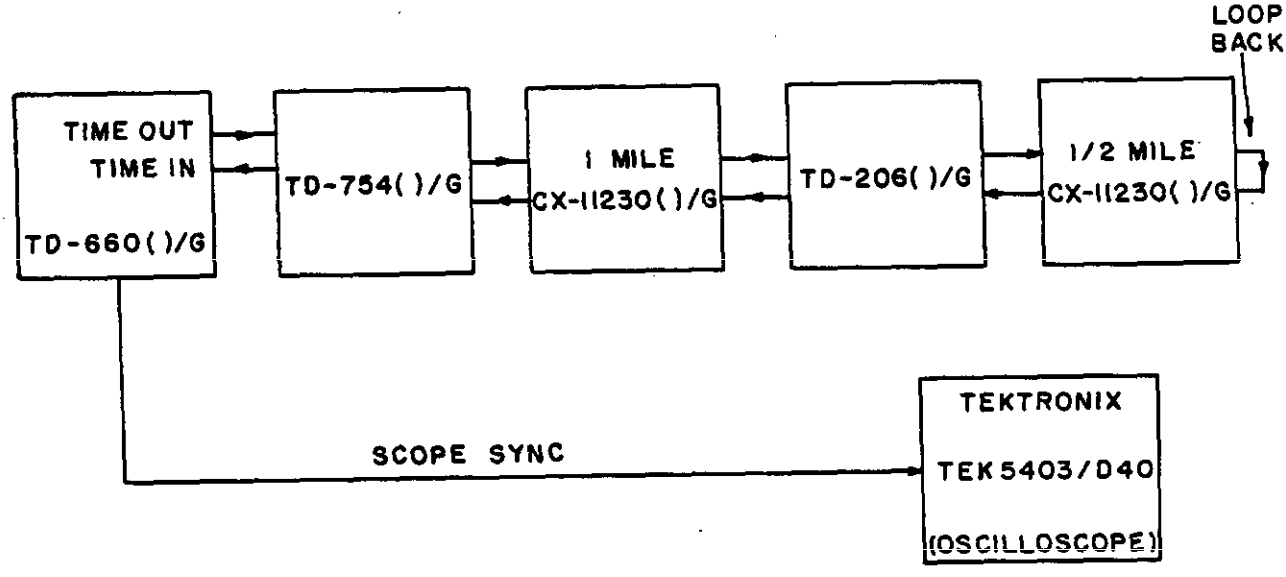


SIGNAL REGENERATION TEST
FIG. 6



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

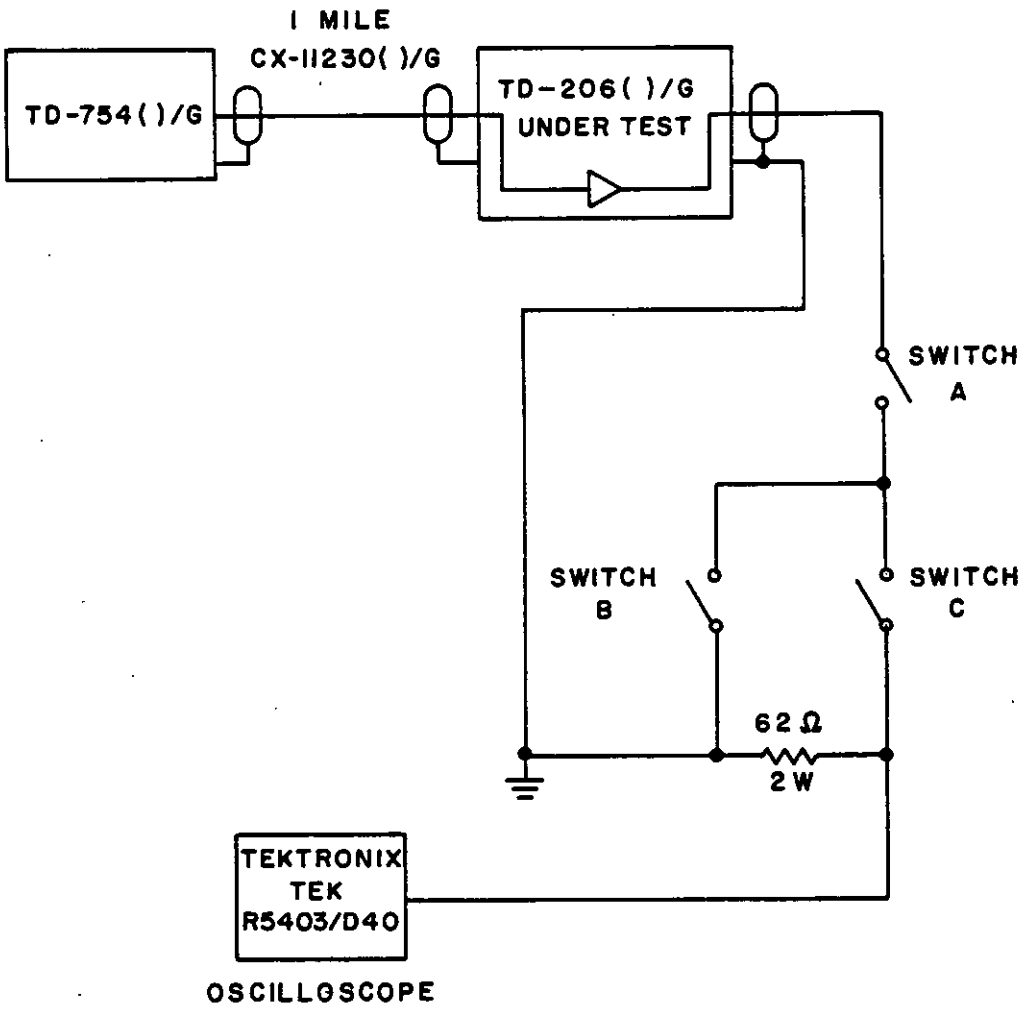



ELECTRICAL CURRENT SURGE AND VOLTAGE TRANSIENT TEST

FIG. 7



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

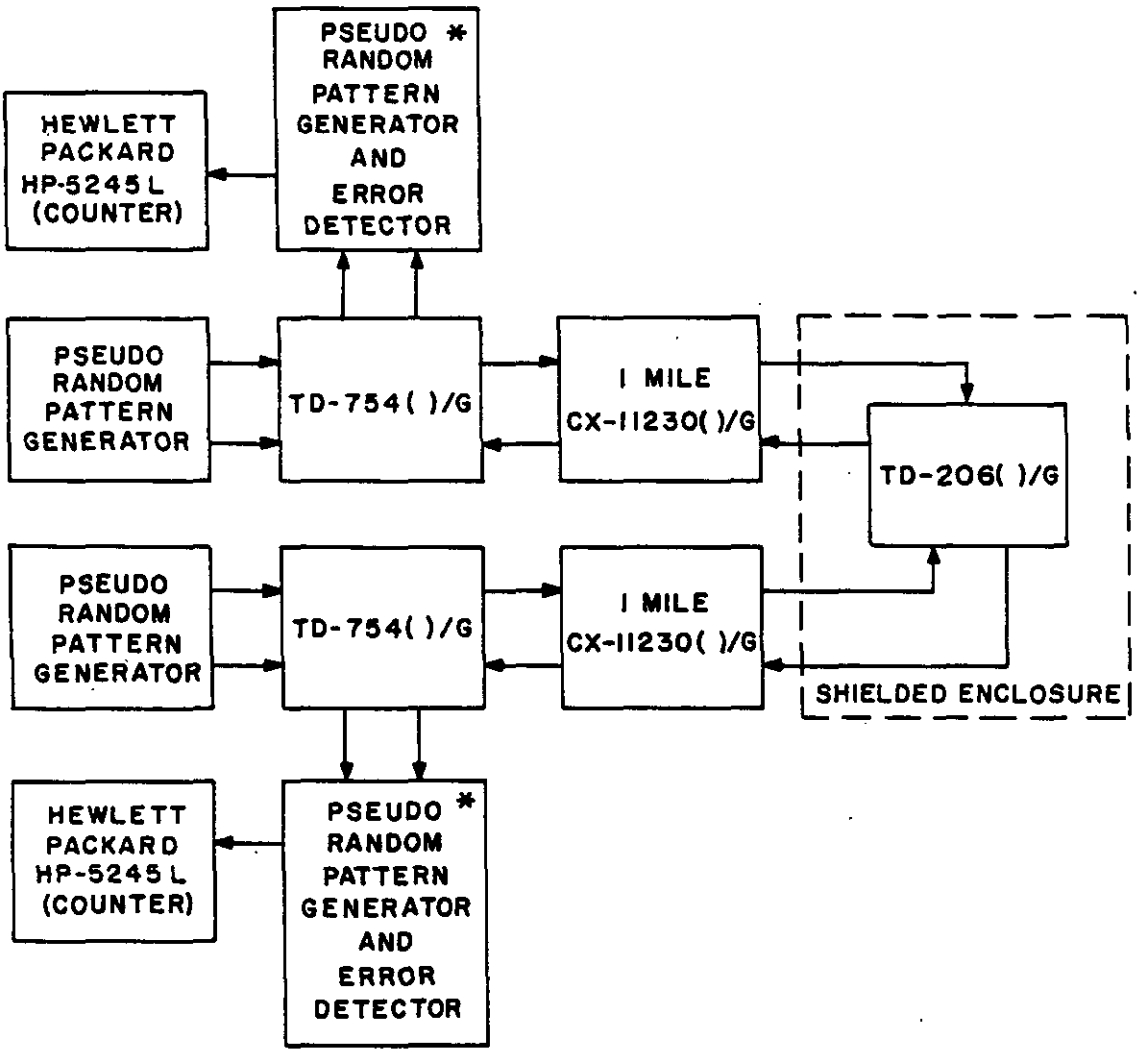



* SME-704762

ELECTROMAGNETIC COMPATIBILITY TEST

FIG. 8



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

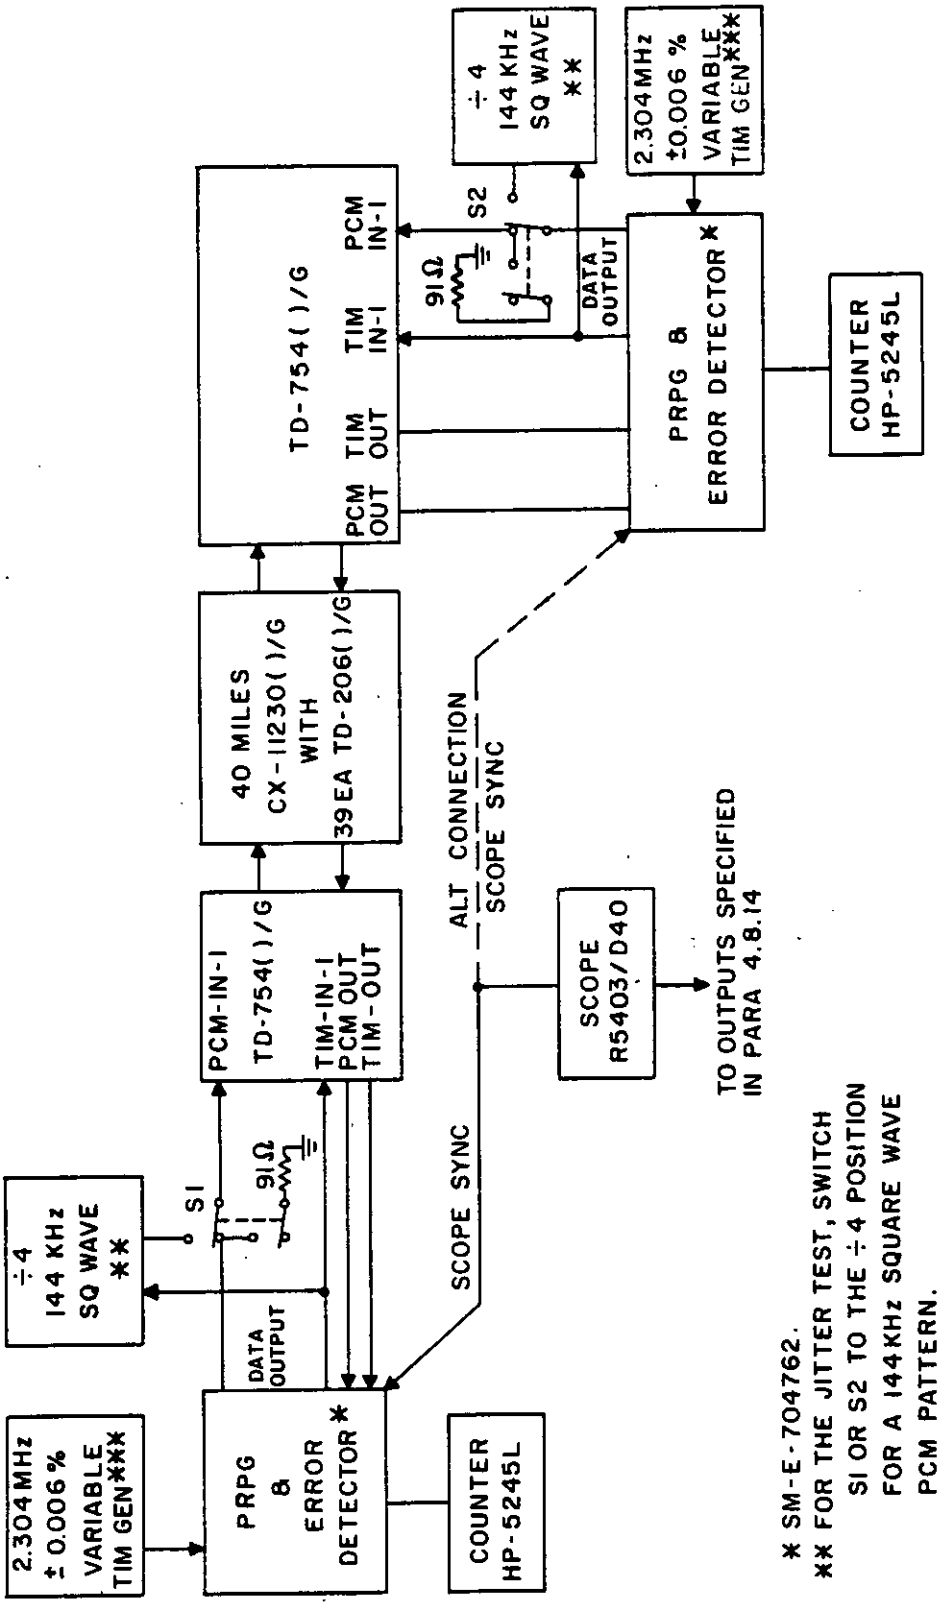


* SM-E-704762.
** FOR THE JITTER TEST, SWITCH
S1 OR S2 TO THE ÷4 POSITION
FOR A 144KHz SQUARE WAVE
PCM PATTERN.
*** EXTERNAL 2.304 MHz TIMING GEN FOR JITTER TEST,
AJUST THE 2.304 MHz TIMING GEN FOR ZERO"O"
JITTER AT THE TD-754( )/G " TO CABLE" CONNECTOR.

FIG. 9 SYSTEM COMPATIBILITY TEST



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-
Fort Monmouth, New Jersey 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, c long this line

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.