MILITARY SPECIFICATION

TRAILER, COMMUNICATION EQUIPMENT
V-415()/TRC-145(V)

1. SCOPE

1.1 Scope.- This specification covers the modification of trailer chassis M-569 and the installation of the applicable equipment and ancillary items thereon to form the facility for radio terminal sets AN/TRC-145(V)9 and AN/TRC-145(V)13. See 6.1 and 6.5)

2. APPLICABLE DOCUMENTS

2.1 Documents.- The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-P-116	Preservation, Methods of
MIL-C-3885	Cable Assemblies & Cord assemblies Electrical (For use in Electronic, Communication & Associated Electrical Equipment)
MIL-W-6858	Welding, Aluminum, Magnesium, Non-Hardening Steels or Alloys & Titanium
MIL-T-7928	Terminals, Lug & Splice, Crimp-Style, Copper
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment

FEDERAL

PPP-T-45	Tape, Gummed, Paper, Reinforced & Plain, for Sealing and Securing
PPP-P-291	Paperboard, Wrapping Cushioning

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures & Tables for Inspection by Attributes
MIL-STD-202	Test Methods for Electronic & Electrical Component Parts
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-281	Automobile, Trucks, Truck-Tractors, Trailers & Trailer Dollies, Preservation & Packaging of
MIL-STD-461	Electromagnetic Interference characteristics Requirements for Equipment
MIL-STD-1235	Single & Multi-level continuous sampling Procedures & Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage.

DRAWINGS

ELECTRONICS COMMAND

DL-SC-B-633452	Trailer, Communication Equipment, V-415()/TRC-145(V)
SC-A-46691B	RF Cable Assembly Test
SC-D-633540	Power Schematic
SC-D-633541	Cable Harness Switches to Binding Posts
SC-D-633542	Cable Harness Connector to Switches
SC-D-633545	Signal Entrance Assembly Wiring Diagram
SC-D-633548	Cable Assembly, Signal
SC-D-633577	Wiring Diagram (Transfer Box)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description.- Trailer, Communication Equipment, V-415()/TRC-145(V) is a palletized facility including two equipment racks and pallet, shelves, brackets, tie-downs, electrical components & wiring and other ancillary items mounted on a modified trailer M-569. When the appropriate radio equipments are installed the facility becomes a single or a dual radio-multiplexer terminal. The palletized facility also may be mounted on a 3/4 ton trailer M-101A or in a 1¼ ton truck M-715.

3.1.1 Transportability.- The facility can be moved over cross country terrain by an M-151 truck or other suitable military vehicle. It is also capable of being transported by railroad, military truck and aircraft.

3.2 Preproduction inspection.- The contractor shall subject the first article of the V-415()/TRC-145(V) equipments on order to the preproduction tests specified and shall submit the test results, in the form of a report, for approval if required by the invitation for bids and by the contract. (See 4.3)

3.3 Construction.-

3.3.1 Trailers.- Unless otherwise specified the unmodified ¼ ton trailer chassis M-569 will be Government furnished.

3.3.1.2 Modifications.- The contractor shall modify the trailer in accordance with relevant drawings listed on DL-SC-B-633452. These modifications include:

a. Reinforce the springs to increase capacity to maintain a 2000 lb load.

b. Add the "overload" spring leafs.

c. Modify length and reinforce front leg assembly.

d. Increase height of rubber snubber blocks by adding an aluminum block under the existing snubber block.

e. Install rear leg support.

f. Provide quick release pin to prevent legs from jarring loose and dropping down.

g. Reinforce front transverse 2 x 2 angle, forming a box section.

h. Reinforce rear transverse channel, forming a box section.

i. Reinforce channels of towing tongue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

j. Relocate convoy and rear lamp assemblies, strengthening support brackets.

k. Drill trailer chassis to receive pallet attachment pins.

3.3.1.3 The contractor shall furnish to the contracting officer written certification of reinforced spring capacity (See 6.2(e)).

3.3.2 Facility installation.- The Trailer, Communications Equipment V-415()/TRC-145(V) shall be built in accordance with drawings listed on DL-SC-B 633452 and the requirements of this specification.

3.4 Electrical installation.-

3.4.1 Power system wiring and components.- Installation of power wires and components (including cable assemblies, receptacles, switches, meters, circuit breakers, distribution assembly system, and wiring components) constituting a three wire electrical power distribution system, shall be installed and wired in accordance with the drawings. The completed in-place power distribution system shall meet the following requirements.

3.4.1.1 Continuity of conductors.- The point-to-point resistance of all power-line conductors shall be less than 3 ohms when tested in accordance with 4.6.1.1.

3.4.1.2 Dielectric strength of insulation.- The insulation of all power-line wires, cables, and components shall withstand a potential of 600 volts DC applied continuously for not less than 30 seconds when tested in accordance with 4.6.1.2.

3.4.1.3 Insulation resistance.- The resistance of insulation between any two of the three power-line conductors and also between each of the two ungrounded power-line conductors and shelter facility ground terminal shall not be less than 100 megohms when tested in accordance with 4.6.1.3.

3.4.2 Power distribution and operational functions.- Main power branch distribution and circuit switching functions thereof shall meet the operational requirements as denoted by power system schematic drawing SC-D-633540 when tested in accordance with 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

3.4.3 Signal (audio) system wiring and components.- Installation of signal (audio) wires, cables and wiring components (including binding posts, connectors, plugs, jacks, receptacles, and wiring devices) shall be installed and connected in accordance with the drawings. The completed in-place signal (audio) system installation shall meet the following requirements: (See drawings SC-D-633541, -542, -545,-548).

3.4.3.1 Continuity and circuit resistance.- There shall be circuit continuity between both end terminations of all signal cable assemblies and the resistance of the continuous circuit shall not exceed 5 ohms when tested in accordance with 4.6.3.1.

3.4.3.2 Dielectric strength of insulation.- The insulation of all wires, cables, and components shall withstand a potential of 600 volts DC continuously applied for not less than 5 seconds when tested in accordance with 4.6.3.2.

3.4.3.3 Insulation resistance.- The resistance between each of the following shall not be less than 100 megohms when tested in accordance with 4.6.3.3:

a. Each wire conductor and all remaining wire conductors.

b. Each wire conductor and facility ground.

3.4.4 Cable assemblies.-

3.4.4.1 Cable assemblies, power and audio frequency.- All power and audio frequency cable and cord assemblies shall be fabricated in accordance with the drawings and meet the requirements and tests of MIL-C-3885.

3.4.4.2 Cable assemblies, radio frequency.- Radio frequencies cable assemblies required for operation of major items of equipment in 6.1 shall be fabricated in accordance with the drawings and meet the requirements and tests as indicated in Drawing SC-A-46691B.

3.4.5 Suppression of radio frequency interference.- The motors in the ventilating equipment and the heaters used in the facility shall meet the emanation limits of MIL-STD-461; if other than those items specified on the drawings.

3.5 System operation.- With all operational equipments of the V-415/TRC-145 assemblage installed, communications shall be established between telephones connected to binding posts of systems 1 and 2 and between headphones on each channel of the multiplexers TD-660/G when tested in accordance with 4.7.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the currentversion before use.

3.6 Vehicular transportation.- The Trailer, Communication Equipment V-415()/TRC-145(V) shall be capable of being driven over cross-country terrain by military vehicle without sustaining any permanent damage. (See 4.8)

3.7 Railroad transportation.- The Trailer, Communication Equipment V-415()/TRC-145(V) shall be capable of being loaded, blocked and braced on a flatcar for shipment by rail. When so loaded, the trailer facility shall be subjected to and withstand the test of paragraph 4.9 without sustaining any permanent damage.

3.8 Air transportation.- The Trailer, Communication Equipment V-415()/TRC-145(V) shall be capable of being picked up and transported by helicopter without sustaining any permanent damage (See 4.10).

3.9 Watertightness.- The trailer facility shall withstand the test of 4.11. After the test there shall be no evidence of water leakage in the area around the operating equipment racks and in the personnel area.

3.10 Lighttightness.- With the trailer facility curtain assembly erected in the operational mode the test of 4.12 shall be performed. No direct rays of light shall be evident.

3.11 Cleaning.- After fabrication, parts shall be cleaned in accordance with good commercial practice or as specified in the applicable portions of Specifications MIL-F-14072. Cleaning processes shall have no deleterious effect. Corrosive material shall be removed completely before the parts are assembled. After assembly units shall be cleaned thoroughly and shall be free from particles of solder, flux, scale, and any other foreign material. In addition, when necessary such cleaning shall also be performed before and after assembly of the units.

3.12 Finish.- The equipment shall be finished in accordance with Specification MIL-F-14072 and the contract drawings.

3.13 Marking.- Marking shall conform to Specification MIL-M-13231 and the contract drawings.

3.13.1 Nameplate.- Each Trailer, Communication Equipment V-415()/TRC-145(V) shall be sequentially serial numbered, starting with number 1, and provided with a nameplate in accordance with the contract drawings. This nameplate shall include the proper assigned nomenclature (See 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

3.13.2 Aircraft loading date plate.- Each Trailer Communication Equipment V-415()/TRC-145(V) shall be provided with a data plate conforming to applicable contract drawing. The plate shall be imprinted with the dimensions locating the center of gravity in the three planes and the gross weight. The information relative to the weight and centers of gravity shall be determined accurately by the contractor.

3.14 Riveting.- Riveted joints shall be tight, the joined parts shall be undamaged and the rivet heads shall be properly seated and tight against their bearing surfaces.

3.15 Securing of Parts.- Brackets, lugs, flanges, inserts, bolts, pins and other mounting arrangements shall retain securely the components of the trailer facility so that loosening, wear of mounting arrangements or permanent separation of parts or components will not occur when the equipment is subjected to the specified service conditions or tests.

3.16 Soldering.-

3.16.1 Solder and flux.- Solder and flux shall be as defined on the drawings.

3.16.2 Acid or acid salts.- No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections and for tinning or soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used where they can come in contact with insulation material. Where acid or acid salts are used, as permitted above they shall be completely neutralized and removed immediately after use.

3.16.3 Process.- There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indicating proper flowing and wetting actions, and shall not be crystallized, overheated, or under heated. The minimum necessary amount of flux and solder shall be used for electrical connections. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remaining in the equipment, flux being spread over a larger area, or damage to the equipment. Insulation material that has been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.17 Tropicalization of material.- Canvas, webbing, wood, etc. shall be treated to be resistant to moisture and fungi as indicated on the drawings and as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

3.17.1 Treating materials.- Treating materials containing a mercury-bearing fungicide shall not be used. The contractor shall determine that the treating material is compatible with the material or surface to be treated. Selection of treating materials shall be such that any increase in flammability of treated material will be held to the practical minimum.

3.17.2 Toxicity.- Treating materials shall cause no skin irritation or other injury to personnel handling the treated material during fabrication, transportation, operation, or maintenance of the equipment, or during use of the finished items when used for the purpose intended.

3.17.3 Flexibility.- Treatment shall not affect the flexibility of treated materials, to the extent that the equipment may fail to meet specified requirements when subjected to specified service conditions.

3.17.4 Statement of treatment.- The contractor shall submit for approval, to the contracting officer, a statement describing in detail the materials to be treated and the treating materials and processes that he proposed to use. (See 6.2 (d).

3.18 Welding.- Welded joints shall be as defined by the drawings and shall be such that grinding on the finished weld will be unnecessary. Spot, stitch, and seam welds shall conform to Specification MIL-W-6858, Class B. All surfaces to be welded shall be cleaned in accordance with good commercial practice and shall be free from scale, paint, grease and other foreign materials. Welds shall have thorough penetration and good fusion and shall be free from scabs, blisters, abnormal pock marks, cracks, voids, slag inclusions, and other harmful defects. Inert-gas-shielded arc welding shall be used for welding of aluminum except where spot welds are used. Welded assemblies shall be cleaned to remove any scale, oxidation products, and excess flux. Any acid used in cleaning shall be completely neutralized and removed. (See 4.4)

3.19 Wiring and cabling.- Wiring and cabling shall be in accordance with the drawings and shall be neat and sturdy. They shall meet the tests of 4.6.

3.19.1 Slack.- Unless otherwise dimensioned wires and cables shall be as short as practicable except that sufficient slack shall be provided:

a. To prevent undue stress on cable forms, wires, and connections.

b. To facilitate field repair of broken or cut wires.

c. To prevent chafing or breaking of wires due to repeated flexing of hinged parts.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

d. To permit installation or removal of equipment.

3.19.2 Protection.- Wires and cables shall be so placed and protected as to avoid contact with rough or irregular surfaces or sharp edges. Wires shall not be bent sharply where they enter insulation material.

3.19.3 Splicing.- Wires in continuous run between two terminals shall not be spliced during the wiring operation.

3.19.4 Crimping of solderless terminal lugs.- Crimping of solderless terminal lugs shall be so accomplished that the connections will meet the resistance (voltage drop) and tensile strength requirements of Specification MIL-T-7928. (See 4.4 and 4.13).

3.19.5 Identification of wiring.- Wiring shall be identified by color-coding and wire pair marking, as indicated on the drawings.

3.20 Interchangeability.- Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable without modification of such items or of the equipment. (See 4.14). Individual items shall not be hand-picked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc.

3.21 Workmanship.- All work described in or shown on the contract documents shall be performed in the best workmanlike manner by mechanics skilled in their respective trades. If any item of labor or material is not specifically described it is to be the best adaptable to the purpose for which it is to be used.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- Inspection shall be classified as follows:

a. Preproduction inspection (does not include preparation for delivery). (See 4.3)

b. Inspection covered by subsidiary documents. (See 4.4)

c. Quality conformance inspection.

(1) Quality conformance inspection of equipment before preparation for delivery. (See 4.5)

(2) Quality conformance inspection of preparation for delivery. (See 4.16).

4.3 Preproduction inspection.- This inspection will be performed by the contractor on the First Article unless otherwise specified in the contract. It shall consist of the preproduction inspection specified in Table I, the inspection specified in the subsidiary documents covering the items listed in 4.4 and the inspection specified for Group A, Group B and Group C (see Tables II,III and IV respectively). The preproduction inspection normally will be performed in this order: (a) Power wiring, (b) Signal Wiring, (c) Systems test, (d) Vehicular transportation, (e) Rail transportation, (f) Air transportation, Simulated, (g) Watertightness, (h) Light tightness. The last tests performed shall be a repeat of the Power Wiring and the Signal Wiring Tests. The other preproduction tests shall be performed in any order satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

Table I - Preproduction Inspection

Inspection (For additional preproduction inspection see 4.3)	Req't Para	Insp Para
System operation	3.5	4.7
Rail transportation	3.7	4.9

4.4 Inspection covered by subsidiary documents.- The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before preparation for delivery:

Item	Where Required
Cable assemblies	3.4.4
Finish	3.12
Marking	3.13
Welding	3.18
Terminals	3.19.4
Interference Suppression	3.4.5

4.5 Quality conformance inspection of equipment before preparation for delivery.- The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspections procedures and examine the contractor's inspection records. In addition the Government--at its discretion--may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements. (See 6.6) Test equipment for Government verification inspection shall be made available by the contractor.

4.5.1 Group A inspection.- This inspection, including sampling, shall conform to Table II and the inspection procedures of Standard MIL-STD-105 using the general inspection levels. Group A inspection shall be performed in any order satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

Table II - Group A Inspection

Inspection	Req't Para	Insp Para	AQL Major	AQL Minor
Visual and Mechanical	3.21	4.15	1.5 dphu*	6.5 dphu
Electrical	3.4 thru 3.4.5	4.6 thru 4.6.3.3	1% for entire group	**

* Defects per hundred units
** All defects are major

4.5.2 Group B Inspection.- This inspection, including sampling, shall conform to Table III and to the procedures for small-sample inspection of MIL-STD-105, using the special inspection levels. Group B inspection normally shall be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection.

4.5.2.1 Group B Sampling plans.- The Group B sampling plans for the AQL's listed in table III shall be as follows:

AQL	Inspection level
4.0%	S-4
6.5%	S-4

4.5.2.2 Order of inspection within Group B.- Group B inspection shall be performed on the same equipment in the order listed in Table III.

Table III. Group B inspection

Inspection	Req't Para	Insp Para	AQL (see 4.5.2.1)
Watertightness	3.9	4.11	6.5%
Lighttightness	3.10	4.12	6.5%
Interchangeability	3.20	4.14	4.0%

4.5.3 Group C inspection.- This inspection shall be as listed in Table IV, and normally shall be performed on sample units that have been subjected to and met Group A and Group B inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

Table IV.- Group C inspection

Inspection	Req't Para	Insp Para
Vehicular transportation	3.6	4.8
Solderless-terminal-lug connection	3.19.4	4.13
Air transportation, simulated	3.8	4.10

4.5.3.1 Sampling for inspection of vehicular transportation and air transportability.- One sample shall be selected at random from the first 50 units or fraction thereof and one sample for each additional 150 units or fraction thereof, produced.

4.5.3.2 Sampling for inspection of solderless terminal lug connection.- Three specimens of each combination of wire and terminal shall be prepared for inspection for each week in which production connections are made. A specimen is a one foot length of wire on which a terminal lug has been applied, using the same materials, tools and procedures used in crimping the terminal lugs in production.

4.5.3.3 Noncompliance.- The contractor shall immediately report in writing each Group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials, as applicable, and (ii) all units of product which were manufactured under the same conditions and which the Government considers subject to the same failure. Reports shall be forwarded to the responsible technical activity designated in the contract through the Quality Assurance Representative. After corrective action has been taken, additional sample units shall be subjected to Group C inspection (all inspections, or the inspections which the sample failed, at the option of the Government) and Groups A and B inspection may be reinstituted. Final acceptance and shipment will be withheld until the Group C reinspection results have shown that the corrective action was effective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.5.4 Reinspection of conforming Group B and Group C sample units.- Unless otherwise specified, sample units which have been subjected to and passed Group B or Group C inspection, or both, may be accepted on contract, provided that they are resubjected to and pass Group A inspection after repair of all visible damage.

4.5.5 Alternate inspection procedures.- Contractor may elect to use a continuous sampling and inspection plan instead of the lot inspection plan stated in 4.5.1 and 4.5.2. If this alternate is selected the procedure of implementation must be in accordance with MIL-STD-1235, "Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes". Before starting production Contractor shall notify the contracting office in writing which method he intends to use. The method may not be changed during production without written approval of the Government.

4.6 Electrical Installation Test.- The tests of 4.6.1 through 4.6.3.3b shall be performed on each palletized trailer prior to installation of other major components comprising the AN/TRC-145. Before applying power to the palletized trailer, an electrical ground at the power entrance box shall be made. Power to the palletized trailer shall be 115 VAC, 60 cycles, single phase.

4.6.1 Power system and components and installation tests.- Prior to conducting power wiring and components tests of 4.6.1.1, 4.6.1.2 and 4.6.1.3, the following shall be accomplished. See Drawing SC-D-633540.-

a. Remove or disconnect the following electrical loads.

(1) Lamp cords from the lights receptacle, J2.

(2) Blower and heater power cord from receptacle, J3.
(3) Indicator lamps XDS1 and XDS2, on transfer box (See dwg. SC-D-633577).

b. Remove power distribution box cover panel and disconnect both conductors from the voltmeter terminals. Position or isolate disconnected leads so that they do not short to each other or to palletized trailer ground.

c. Connect the 15 feet power stub (CX-7705()/U) to the trailer power input connector J1 and the other end to the terminals on the transfer switch assembly as follows:

Black lead to L1

White lead to L2

Ground lead to LO

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the currentversion before use.

d. Connect interconnecting power cable between power cable connectors on each power distribution panel.

4.6.1.1 Continuity of conductors.- Continuity measurements which satisfy the requirements of 3.4.1.1 shall be made as indicated by the following paragraphs using an aural or visual indicating continuity test instrument and suitable test jig.

a. Remove and extend connected power receptacles J2 and J3 from power distribution panel.

b. Place the following circuit controls in the ON position.

(1) Main circuit breaker CB4

(2) Branch circuit breakers, CB1,CB2, and CB3.

c. Place Blower/Heater switch S1 to the heater position.

d. Place switch S1 on the generator transfer box to generator 1 (Gen 1).

e. Measure continuity from the black generator lead L1 of cable W1 of transfer box to the following on both system racks 1 and 2: brass contact on the receptacle of J2, the brass contact of the heater side of J3, the A pins on power connectors P2,P3, and P6, and the C pins on the power connectors P4 and P5. (See dwgs. SC-D-633540 and SC-D-633577).

f. Place Blower/Heater switch S1 to blower position.

g. Measure continuity from lead L1 of transfer box to the brass contact of the blower side of the J3 receptacle.

h. Place branch breakers CB1,CB2, and CB3 in OFF position. Main circuit breaker CB 4 remains on.

i. Measure continuity from the white generator lead L2 of cable W1 of the transfer box to the following, on both system racks 1 and 2: silver contacts on each receptacle J2 and J3, the C pins on the power connectors P2,P3 and P6 and the A pins on the connectors P4 and P5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

j. Measure continuity from the green generator lead LO of cable W1 of the transfer box to each ground terminal on receptacles of J2 and J3, and to the pallet ground terminal located on side of the power distribution panel, for each system 1 and 2.

k. Repeat steps e,f,g,h,i and j for switch,S1,transfer box placed on generator 2 (Gen 2).

l. Measurements made by 4.6.1.1.e,g,i,j and in k shall indicate existance of electrical circuit continuity and meet the requirements of 3.4.1.1.

m. Replace and secure power receptacles J2 and J3.

4.6.1.2 Dielectric strength of insulation.- Dielectric strength of insulation tests which satisfy the requirements of 3.4.1.2, shall be made on each power-line circuit indicated by the following paragraphs. Methods 301 of MIL-STD-202, shall be used utilizing a non-destructive DC dielectric tester.

a. Place all circuit controls listed in procedure 4.6.1.1b in the ON position.

b. Place switch S1 on the generator transfer box to generator 1 (Gen 1). (See Dwg SC-D-633577)

c. Connect tester to black lead L1 and to the white lead L2 and W1 cable, at transfer box. Adjust tester for a value of 600 volts DC and maintain this potential for a period of 30 seconds.

d. Repeat procedure 4.6.1.2c with tester connected between black lead L1 and green lead GRD of W1.

e. Repeat procedure 4.6.1.2c with tester connected between white lead L2 and green lead GRD of W1.

f. Repeat procedures 4.6.1.2c,d and e for transfer box switch S1, placed in the generator 2 (Gen 2) position, using leads of W2.

NOTE: To eliminate danger of shock.- Discharge conductors following each test by connecting a 10-60 ohm wirewound resistor, or equivalent test lamp, to the pins tested.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the current version before use.

4.6.1.3 Insulation resistance.- Insulation resistances which satisfy the requirements of 3.4.1.3, shall be made on each power-line circuit indicated by the following paragraphs. Method 302 of MIL-STD-202 shall be used utilizing a megohmmeter or equivalent tester.

a. Place switch S1 on the generator transfer box to generator 1 (Gen 1) (See Dwg SC-D-633577).

b. Connect tester to black lead L1, and to the white lead L2 of W1 cable, at transfer box. Adjust tester for a value of not less than 100 nor more than 600 volts DC. Maintain this potential for 1 minute or until the indicating meter has ceased fluctuating and indicates a steady or increasing insulation resistance. The requirements of 3.4.1.3 shall be met.

c. Repeat procedure 4.6.1.3b with tester connected between black lead L1 and green lead GRD of W1.

d. Repeat procedure 4.6.1.3b with tester connected between white lead L2 and green lead GRD of W1.

e. Repeat procedures 4.6.1.3b,c, and d for transfer box switch S1, placed in the generator 2 (Gen 2) position, using leads of W2.

NOTE: To eliminate danger of shock.- Discharge conductors following each test by connecting a 10-60 ohm wirewound resistor, or equivalent test lamp, to the pins tested.

4.6.2 Power distribution and operational functions tests.- Power distribution and operational functions tests which satisfy the requirements of 3.4.2 shall be made as indicated by the following paragraphs:

4.6.2.1 Test preparation.- (See SC-D-633540)

a. Replace or reconnect all electrical loads and line voltmeter removed or disconnected by procedure 4.6.1.a and b, except power distribution panel cover.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the currenversion before use.

b. Place circuit breakers CB1 thru CB4 and switch S1, in the OFF position.

c. Place a 115 volt AC test lamp with grounding type plug into each side of receptacle,J2 and Heater side of J3.

d. Insert AC line plug of exhaust blower into blower side of receptacle J3.

e. Place switch S1 in Heater position.

4.6.2.2 Line voltmeter and indicator lamp.-

a. Apply 115 volts AC (nominal), 60 cycles, to power connector J1 in power entrance box. Facility voltmeter in power distribution panel shall indicate power to the facility.

b. Measure specific line voltage by connecting a calibrated external AC voltmeter between neutral bar and black feed terminal before main breaker, CB4 inside the power distribution box, replace power distribution panel cover.

c. Read voltage indicated on facility voltmeter. The voltage read shall be within 3% of the voltage read by 4.6.2.2b.

d. Place main circuit breaker CB4 in ON position.

4.6.2.3 Circuit breakers and switches.-

Circuit No.3 (Circuit breaker #3)

a. Place circuit breaker CB3 in ON position. 115 AC test lamps at J2 & J3 shall light.

b. Place Blower/Heater switch, S1 in the blower position. Blower shall operate and blow air, 115 AC test lamp in J3 shall go out.

c. Place circuit breaker CB3 in OFF position. Blower shall cease to operate. 115 AC test lamp at J2 shall go out.

d. Disconnect all test equipment and secure operational test.

4.6.3 Signal (audio) system wiring and components installation tests.- Referenced Drawing SC-D-633545.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.6.3.1 Continuity and circuit resistance.- Continuity resistance which meets the requirements of 3.4.3.1 shall be performed on each audio circuit as indicated by the following paragraphs. A low resistance continuity tester or equivalent, producing a test current of not more than 0.010 amperes, shall be used.

a. Place all CABLE/BINDING POST channel switches of systems 1 and 2 in the BINDING POST position.

b. Connect tester between terminal A of audio connector P1, system 1, and contact 2B of audio connector J1. No circuit continuity shall exist.

c. Place channel switch S1 of system 1 to CABLE position. Circuit continuity shall exist and meet the requirements of 3.4.3.1. Replace channel switch S1 to BINDING POST position.

d. Repeat procedures 4.6.3.1b and c for each of the remaining terminals of audio connector P1 corresponding to its associated contact of audio connector J1; each time placing to CABLE position the channel switch correlating with the circuit being tested and replacing to BINDING POST position following test.

e. Repeat procedures 4.6.3.1b thru d for each terminal at audio connectors P2 and P3 of system 1.

f. Repeat procedures 4.6.3.1b thru e for system 2.

g. Place all CABLE/BINDING POST channel switches of systems 1 and 2 in the CABLE position.

h. Connect tester between terminal A of audio connector P1, system 1, and Binding Post 2B of system 1. No circuit continuity shall exist.

i. Place channel switch S1 of system 1 to BINDING POST position. Circuit continuity shall exist and meet the requirements of 3.4.3.1. Replace channel switch S1 to CABLE position.

j. Repeat procedures 4.6.3.1h and i for each of the remaining terminals of audio connector P1 corresponding to its associated BINDING POST of system 1; each time placing to BINDING POST position the channel switch correlating with the circuit being tested and replacing to CABLE position following test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

k. Repeat procedures 4.6.3.1h and j for each terminal at audio connectors P2 and P3 of system 1.

l. Repeat procedures 4.6.3.1h thru k for system 2.

m. Circuit continuity that meets the requirements of 3.4.3.1 shall exist between the following points.

(1) From contacts 25A of audio connectors J1 and J2 to Phone A binding posts at signal entrance boxes, sys 1, and sys 2, respectively.

(2) From contacts 25B of audio connectors J1, and J2 to Phone B BINDING POST at signal entrance boxes, sys 1, and sys 2, respectively.

(3) From contacts 26A of audio connectors J1 and J2 to Intercom A BINDING POSTS at signal entrance boxes, sys 1, and sys 2, respectively.

(4) From contacts 26B of audio connectors J1 and J2 to Intercom B BINDING POSTS at signal entrance boxes, sys 1, and sys 2 respectively.

4.6.3.2 Dielectric strength of insulation.- Dielectric strength of insulation tests which meets the requirements of 3.4.3.2 shall be performed on each audio-line circuit as indicated by the following paragraphs. A non-destructive dielectric test instrument and suitable test jigs shall be employed in performing the test (an automatic tester may be used, subject to government approval). (See Dwg. SC-D-633545)

a. Using appropriate test jigs or test fixtures, connect the following to ground terminal:

(1) All contacts, 1A thru 24B, of audio connectors J1 and J2.

(2) All BINDING POSTS, 1A thru 24B of systems 1 and 2.

(3) All phone and intercom BINDING POSTS at signal entrance boxes.

(4) Shields of all audio connectors, P1 thru P3, of systems 1 and 2.

b. Place all CABLE/BINDING POST channel switches of systems 1 and 2 in the CABLE position.

c. Connect tester between ground terminal and terminal A of audio connector P1, system 1. Remove ground connection from contact 2B of audio connector J1.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:18Z
Check the source to verify that this is the current version before use.

d. Adjust tester to 600 volts DC output and maintain this potential for a continuous period of not less than 5 seconds. The requirements of 3.4.3.2 shall be met. Re-establish ground connection(s) to the contact(s) of BINDING POST(s) under test.

e. Repeat procedures 4.6.3.2c and d for each of the remaining terminals of audio connector P1; each time ungrounding the contact of audio connector J1 correlating with the circuit being tested and reconnecting to ground terminal following completion of test.

f. Repeat procedures 4.6.3.2c thru e for each terminal at audio connectors P2 and P3 of system 1.

g. Repeat procedures 4.6.3.2c thru f for system 2.

h. Place all CABLE/BINDING POST channel switches of systems 1 and 2 in the BINDING POST position.

i. Repeat procedures c thru g substituting BINDING POST of system 1 for contacts of audio connector J1 and BINDING POST of system 2 for contacts of audio connector J2.

j. Remove ground connections from contacts 25A of audio connectors J1 and J2; BINDING POSTS 25A of systems 1 and 2; and phone A BINDING POST at power entrance box. Connect tester between facility ground terminal and BINDING POST 25A of sys. 1.

k. Repeat procedure 4.6.3.2d.

l. Repeat procedures 4.6.3.2j and k for BINDING POSTS 25B,26A and 26B, each time ungrounding all contacts and BINDING POSTS correlating with the circuit being tested and reconnecting to facility ground terminal following completion of test.

NOTE: To eliminate danger of shock.- Discharge circuit conductors following each test by connecting a 500 ohm wirewound resistor or equivalent test lamp between the circuit conductor tester and ground.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

4.6.3.3 Insulation resistance.- Insulation resistance which meets the requirements of 3.4.3.3 shall be performed on each audio-line circuit as indicated by the following paragraphs. A megohmmeter tester or equivalent shall be employed in performing the test (an automatic tester may be used, subject to government approval).

a. Repeat procedure 4.6.3.2a thru 1, except 4.6.3.2d, which shall be replaced by 4.6.3.3b.

b. Adjust tester to a value of not less than 100 nor more than 600 volts DC output. Maintain this potential for 1 minute or until the indicating meter has ceased fluctuating and indicates a steady or increasing insulation resistance. The requirements of 3.4.3.3 shall be met.

NOTE: To eliminate danger of shock.- Discharge circuit conductors following each test by connecting a 500 ohm wirewound resistor or equivalent test lamp between the circuit conductor tested and ground.

4.7 System test.- Install operational equipments in their respective rack locations and connect power and signal cables to designated receptacles and connectors.

a. Perform the following cable assemblies interconnections between the operational equipment of systems 1 and 2 as denoted below:

(1) Using Cable Assemblies CX-7870/TCC; connect of systems 1 and 2,

FROM CV-1548()/G	TO TD-660()/U
MUX Audio Channels 1-4	Audio Channels 1-4
MUX Audio Channels 5-8	Audio Channels 5-8
MUX Audio Channels 9-12	Audio Channels 9-12

(2) Using Cable Assemblies CG-1040B/U; Connect

From TD-660()/U, Sys 1	To TD-660()/U, Sys 2
PCM OUT	PCM IN
TIM OUT	TIM IN
PCM IN	PCM OUT
TIM IN	TIM OUT

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the currentversion before use.

b. Operate MODE switch of each TD-660/G to 12 CH; 2 wire - 4 wire switch to 2-wire; and master/slave switch to master.

c. Set signaling mode switch in each CV-1548()/G Converter to AC position and 2-wire 4-wire switch to 2-wire.

d. Operate the AC power switch on each unit to ON position.

e. Set multiplexers for proper operation in accordance with the instruction card on the equipment.

f. Set all channel switches on signal entrance box to BINDING POST position.

g. Connect Telephone Sets TA-312/PT to BINDING POST pair 2WT/R channel 1 for systems 1 and 2.

h. Ring phone 2 from phone 1; ring phone 1 from phone 2; establish communications.

i. Repeat 4.7h with phones connected to 2WT/R BINDING POSTS for the remaining channels of systems 1 and 2.

j. Arrange switches in converters and multiplexers for 4-wire operation.

k. Connect phone 1 to BINDING POST pair 2WT/R, channel 1, system 1; connect phone 2 to BINDING POST pair 4WT, channel 1, system 2. Receive communications at phone 1 from phone 2.

l. Connect phone 1 to BINDING POST pair 4WT, channel 1, system 1; connect phone 2 to BINDING POST pair 2WT/R, channel 1, system 2. Receive communications at phone 2 from phone 1.

m. Repeat 4.7k and l for remaining channels of systems 1 and 2.

n. Replace 2-wire 4-wire switches in converters and multiplexers for 2-wire operation.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:18Z
Check the source to verify that this is the current version before use.

o. Connect Cable Assembly CX-4566/G (25 ft) between signal connector J1 and Distribution Box J-1077A/U.

p. Repeat 4.7o for system 2 using remaining J-1077A/U.

q. Set all channel switches on signal entrance box to CABLE position.

r. Connect telephone sets to BINDING POST pair 1 on each J-1077A/U.

S. Ring phone 2 from phone 1; ring phone 1 from phone 2; establish communications.

t. Repeat 4.7s with phones connected to each odd BINDING POST pair thru pair 23 on each J-1077A/U.

u. Arrange switches in converters and multiplexers for 4-wire operation.

v. Receive communications at phone 1 from phone 2 with each of the following phone connections:

PHONE 1 Binding Post Pair on J-1077A/U	PHONE 2 Binding Post Pair on J-1077A/U
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24

w. Receive Communications at phone 2 from phone 1 with each of the following phone connections;

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

PHONE 1 Binding Post Pair on J-1077A/U	PHONE 2 Binding Post Pair on J-1077A/U
2	1
4	3
6	5
8	7
10	9
12	11
14	13
16	15
18	17
20	19
22	21
24	23

NOTE: Retain the same Distribution Box J-1077A/U with the same Telephone Set TA-312/PT throughout the duration of the systems tests.

4.8 Vehicular transportation test.- The Trailer, Communication Equipment V-415()/TRC-145(V) shall be secured to a Government furnished truck, ¼ ton M-151 by trailer lunette and truck trailer hitch. The trailer facility shall be loaded to simulate the presence of the operational equipments comprising the AN/TRC-145(V). Two (2) 1.5 kw generators shall be strapped in place in the rear of the towing vehicle. The trailer facility shall be towed over the specially prepared course of 4.8.1 for ten laps each at 5,10,15 and 18 to 20 mph. A lap is defined as traversing the course in one direction. The V-415()/TRC-145(V) shall meet the requirements of 3.6 after completion of the tests.


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.


4.8.1 Vehicular transportation course.- The course shall have twelve (12) 4-inch by 8-inch timbers placed 25 feet apart on the 8-inch face and with the 4-inch face fully above ground. The top edges shall have a 1 x 1 inch chamfer. The sixth and twelfth timbers shall be placed at 45 degrees to the direction of travel, and all other timbers shall be placed perpendicular to the direction of travel. The timbers shall be anchored securely by any convenient means. The ground on which the timbers are placed shall be hard and level.

4.9 Railroad transportation test.- The trailer, Communication Equipment V-415()/TRC-145(V) shall be loaded on a railroad flatcar (test car) in accordance with Figure 1. The test shall be conducted on a flat stretch of track. A loaded car totaling 165,000 pounds, traveling at 9 miles per hour (or equivalent impact energy conditions approved by the Government) shall be impacted against the test flat car coupled to two empty cars. These three cars shall be stationary with brakes off. Four impacts shall be performed, two impacts into each end of the test flat car. The tie-downs and blocking holding the trailer in place shall be tight at the start of each impact run. The run shall be repeated if tie-down or blocking is torn loose by the impact. A damage survey shall be made after each impact and the trailer facility shall meet the requirements of 3.7. The simulated operational equipment loads of 4.8 shall be used in the facility.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

FIGURE I

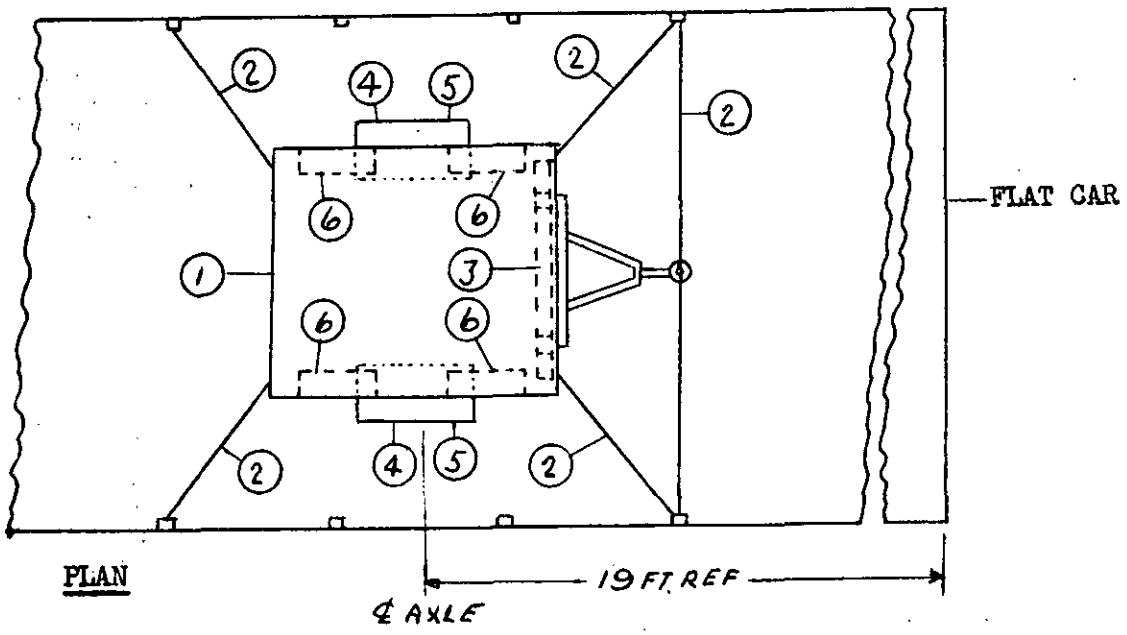

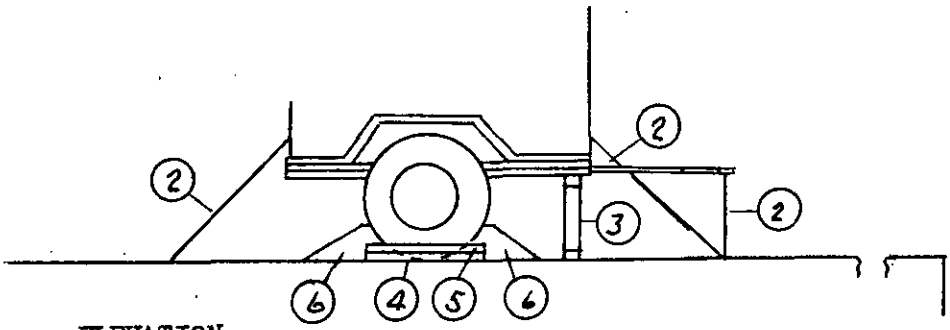

ELEVATION


ITEM	REQ	DESCRIPTION
1	1	Trailer Facility
2	15	Wire #8, solid hard 2,000 lb. test
3	1	Blocking, see detail A
4	2	Lumber 2 x 6 x 30"
5	2	Lumber 2 x 6 x 30
6	4	Wheel chock see detail B

NOTES


a. Blocking lumber shall be rigidly fastened to the floor of the flatcar.
b. Trailer shall be secured by passing wires thru lifting/tie down eyes and lunette to car stake pockets; see detail C.
c. Wire tie down same for all points of contact with stake pockets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.


FIGURE I (cont'd)

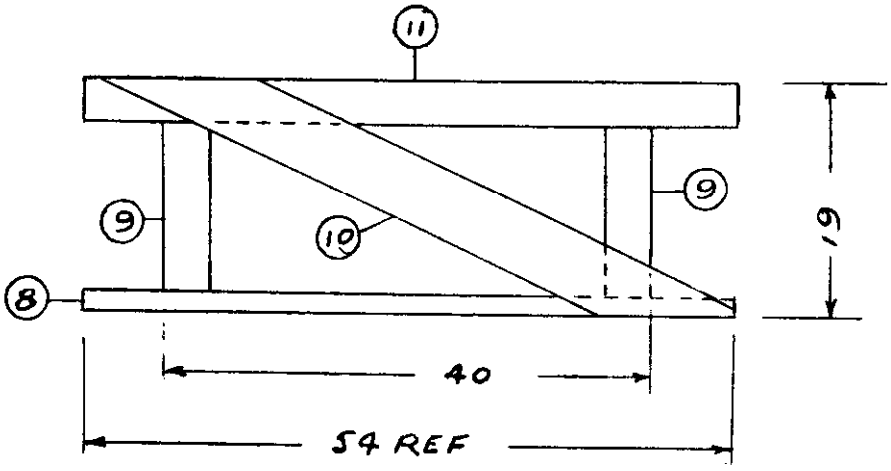

DETAIL A

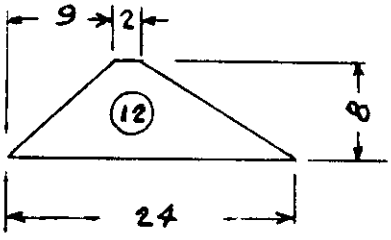


DETAIL B



DETAIL C

ITEM	REQ	DESCRIPTION
7	6	Flexible metal sheeting
8	1	Lumber 2 x 4
9	2	Lumber 4 x 4
10	1	Lumber 1 x 6
11	1	Lumber 4 x 4
12	4	Lumber 6 x 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

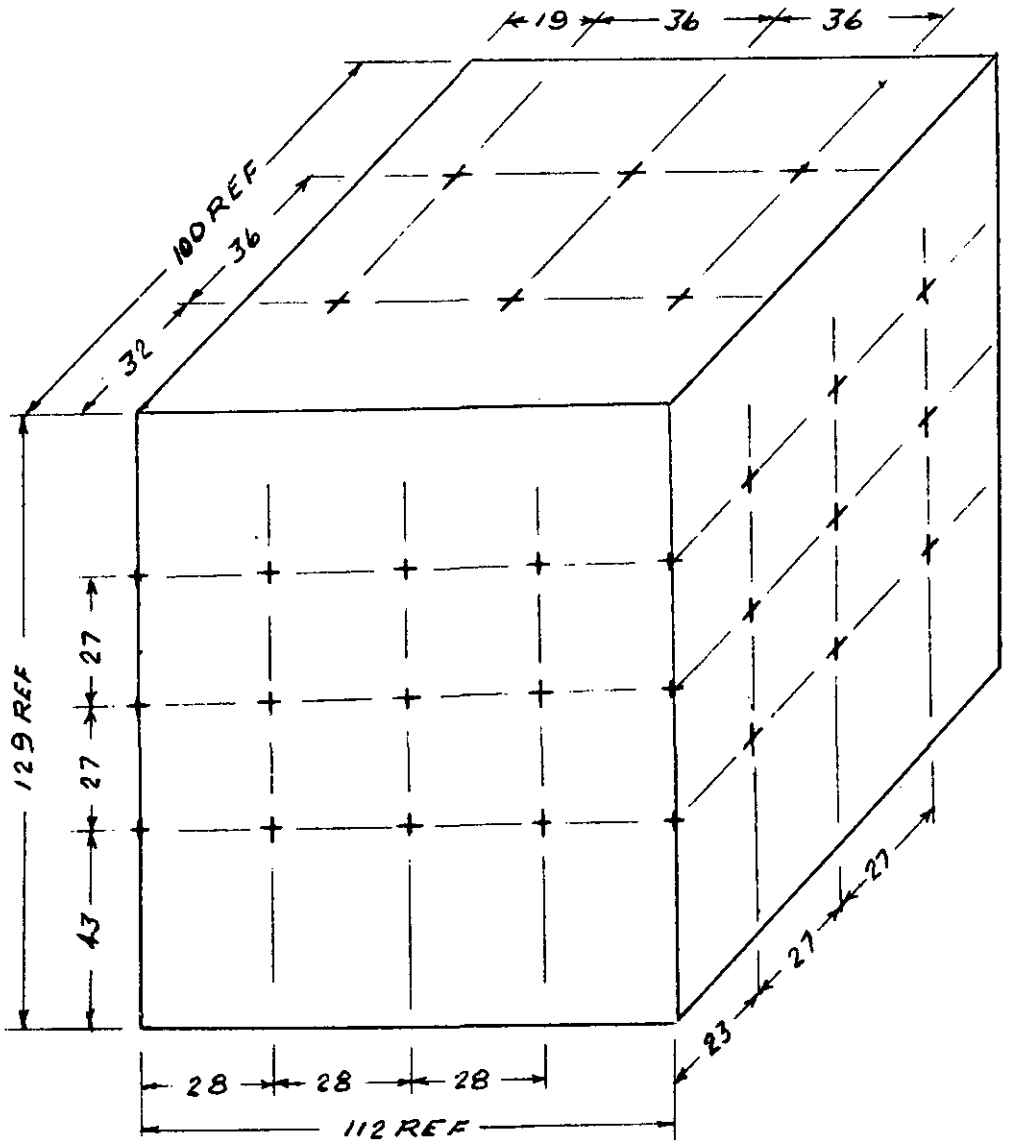

NOTES

1. Nozzle location same on roadside and curbside of trailer.
2. Nozzle location same on front and rear of trailer.
3. Nozzle tips are located at all intersections of dimension lines and per Notes 1 and 2 (54 nozzles).
4. All nozzle axes are perpendicular to the plane on which they are located, with the spray directed inward.
5. Gages shall be permanently installed in piping to indicate pressure at nozzles.

NOZZLE LOCATION FOR TEST PER SPECIFICATION MIL-T-55652(EL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.10 Air Transportation Test.-

a. The trailer facility in transit condition shall be loaded with lead, sand bags or other government approved weights, uniformly distributed over the facility. Total weight of facility and superimposed load shall be 6300 lb. simulating 3g's. The two spreader bars between tops of racks must be in position before starting test.

b. Four (4) pick-up slings, Eastern Rotocraft Corp., Part No. 4212-1, Type CGU-1B, 5,000 lb. capacity, "Tie Down, Cargo, Aircraft", 1 3/4" wide, or other approved equal shall be attached, one to each of the four lifting eyes on the facility. The slings shall be dressed from the eyes, around the sides so that they cross the top rails of the two equipment racks about in line with the two top rack spreader bars.

c. The four (4) slings shall connect to a common ring at the top.

d. The loaded facility shall be lifted clear of the floor and remain suspended for thirty minutes.

e. The facility shall not sustain any permanent deformation as a result of this test.

4.11 Watertightness.- The trailer facility shall be subjected to the following tests:

a. The trailer facility in the transit condition shall be centered under the water spray gage of Figure 2 and sprayed with water from nozzles, model G29SQ or GG 29SQ as made by Spraying Systems Co., Bellwood, Illinois, or equal, pointing directly at the adjacent facility surface. The trailer shall have the front and rear leg props arranged to keep the trailer bed level. Each nozzle shall operate at a pressure of 20 PSIG at the nozzle and the facility surfaces shall be sprayed for a period of 20 minutes. Upon completion of the test the trailer facility shall meet the requirements of 3.9.

b. Raise the cloth enclosure to the operational mode and repeat (a) above.

4.12 Lighttightness.- The trailer facility shall be in the operational mode (curtain and frame erected).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

a. The outside cloth surfaces shall be examined, (around openings, flaps, seams, etc.) with a 25 watt bulb held one foot from inside surfaces of the enclosure. Requirement of 3.10 shall be met.

b. With the portable operational lights installed and on, the requirement of 3.10 shall be met from any angle at a distance of 10 feet.

4.13 Testing of solderless terminal lug connections.- Connections made with solderless terminal lugs shall be tested for conformance to 3.19.4. Three (3) samples, approximately one foot long, of each wire and terminal combination shall be tested. Terminal shall be applied using same tools and procedures as in production.

4.14 Inspection for interchangeability.- The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirements of 3.20. When a dimension is not within specified or design limits it shall be considered a defect.

a. Size and location of attachment holes in trailer chassis and pallet skids.

b. Height and width of equipment compartments in the two racks.

c. Squareness of the equipment compartments.

d. Location of mounting inserts relative to the equipment shelves.

e. Location of the mounting holes and slots in the mounting angles.

f. Location of attachment holes for mounting supports for ground rods reflectors, antenna supports, etc.

g. Mounting dimensions for mounting of five extinguisher, blower, transfer switch and heater.

h. Mounting dimensions common to cloth enclosure frame and racks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

4.15 Visual and mechanical inspection.- Equipment shall be examined for the defects listed in Standard MIL-STD-252, the requirements of 3.21 and Table V.

Table V - Classification of Visual and Mechanical Defects

Classification	Defects
Major	1. Mounting insert missing or mislocated. 2. Welds-cracked or porous. 3. Parts, brackets, equipment loose or missing. 4. Covers, doors inoperative. 5. Blower inoperative or rotates in wrong direction. 6. Cloth enclosure components ripped, torn, misaligned or inoperative. 7. Locking or holding devices missing or inoperative. 8. Power receptacles, switches, cables or other electrical components loose, improperly located or inoperative. 9. Operational labels and data plates missing or incorrect. 10. Color coding not as specified.
Minor	1. Loose hardware 2. Doors, covers, slides not easily operated. 3. Finish has abrasions or scratches. 4. Locking pins or other holding devices difficult to operate. 5. Burrs on components not moved.

4.16 Quality conformance inspection of preparation for delivery.- Preparation for delivery shall be inspected in accordance with Section 5.

4.17 Rough handling test.- When rough handling test in accordance with specification MIL-P-116 is required by the contract, the following functional tests shall be conducted to determine freedom from operational malfunction caused by the rough handling:

Paragraph 4.6 thru 4.6.3.3	Electrical
Paragraph 4.15	Visual and mechanical

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the currentversion before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging.- Preservation and packaging shall be level A or C as specified (see 6.2f)

5.1.1 Level A.-

5.1.1.1 Cleaning.- Trailer, Communication Equipment, V-415()/TRC-145(V), shall be cleaned as follows: Trailer shall be cleaned in accordance with MIL-STD-281. Accessories and ancillary items shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying.- Trailer, Communication Equipment, V-415()/TRC-145(V), shall be dried as follows: Trailer shall be dried in accordance with MIL-STD-281. Accessories and ancillary items shall be dried in accordance with the applicable procedures of MIL-P-116.

5.1.1.3 Preservation Application.- Trailer shall be preserved in accordance with MIL-STD-281. Accessories and ancillary items shall be preserved in accordance with the applicable procedures of MIL-P-116.

5.1.1.4 Unit Packaging.- Each Trailer, Accessories and ancillary items shall be packaged in accordance with the methods prescribed in MIL-P-116 and as follows:

5.1.1.4.1 Accessories and Ancillary items.- Each screwdriver, pliers, first aid kit, lantern, lamp, extension light fixture, ground strap, etc. shall be packaged Method III as follows: Cushion each item individually by wrapping in paperboard type III, Style 2, conforming to PPP-P-291. Secure the wrap with tape conforming to PPP-T-45, Type III.

5.1.1.4.2 Stowage.- Stow the items packaged as specified in 5.1.1.4.1 within the storage boxes of the facility. Close the covers and secure all fastenings. Tie down straps and overflow items that will not fit in the facility stowage boxes shall be secured and tied down within the trailer facility. Close cloth enclosure of facility and secure fastenings.

5.1.2 Level C.- Each Trailer, Communication Equipment V-415()/TRC-145(V) shall be preserved and packaged in a manner that will afford adequate protection against corrosion, deterioration and damage during shipment from the source to the first receiving activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:18Z
Check the source to verify that this is the current version before use.

5.2 Packing.- Packing shall be level A,B or C as specified. (See 6.2(f))

5.2.1 Level A.- Trailer, Communications Equipment V-415()/TRC-145(V) shall be packed for shipment in accordance with MIL-STD-281.

5.2.2 Level B.- Trailer, Communication Equipment V-415()/TRC-145(V) shall be packed for shipment in accordance with MIL-STD-281.

5.2.3 Level C.- Trailer, Communication Equipment V-415()/TRC-145(V) shall be packed for shipment in accordance with MIL-STD-281.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- Trailer, Communication Equipment V-415()/TRC-145(V) is the trailer facility portion of the single Radio Terminal Set AN/TRC-145(V)9 and the dual Radio Terminal Set AN/TRC-145(V)13.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification and any amendment thereto.

b. Testing of the V-415()/TRC-145(V) requires use of contractor fabricated dummy loads for the operational equipments of the AN/TRC-145(V)13 for vehicular and railroad transportation tests, unless otherwise specified in the bid request and contract. The loads shall be configured to be retained by trailer facility hardware.

c. A list of each equipment item to be used in testing the trailer facility.

d. Submission of the statement of treatment referenced in 3.17.4.

e. Submission of the certification cited in 3.3.1.3.

f. Levels of preservation, packaging and packing (see section 5)

g, When rough handling and functional tests are required.

6.3 Inspection.- Inspection is the examination or testing, or both, of supplies to determine compliance with the applicable requirements. Sampling is an element of inspection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

6.3.1 Examination.- Examination consists of simple, generally non-destructive determination of compliance, without use of special testing equipment.

6.3.2 Testing.- Testing consists of determinations of compliance, using technical means.

6.4 Group C inspection.- Approval to ship may be withheld, at the discretion of the government, pending the decision of the contracting officer on the adequacy of corrective action. (See 4.5.3.3)

6.5 Nomenclature.- The parenthesis in the nomenclature will be deleted or replaced by a letter identifying the particular design, for example: V-415R/TRC-145(V). The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.6 Verification inspection.- Verification by the government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

Custodian:
Army (EL)

Preparing Activity:
Army - EL

Project No. 5895-A052

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-TD-SS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:18Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-T-55652(EL) TRAILER, COMMUNICATION EQUIPMENT V-415()/TRC-145(V)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 55 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:18Z
Check the source to verify that this is the current version before use.