MILITARY SPECIFICATION

SHOP EQUIPMENT, BATTERY SERVICING, SHELTER MOUNTED AN/TSM-133

This specification is approved for use by the USA Electronics Research and Development Command, Electronics Technology and Devices Laboratory, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for the construction, installation and testing of a transportable, ground base field maintenance shop which provides a direct support facility for servicing, testing, trouble-shooting, and repair of nickle-cadmium (NI-CAD) storage batteries. This facility is designated as Shop Equipment Battery Equipment Servicing, Shelter Mounted AN/TSM-133.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks,

Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-571	Solder, Tin Alloy, Lead-Tin Alloy and Lead Alloy
TT-E-516	Enamel, Lusterless, Quick-Drying Styrenated Alkyd Type

MILITARY

MIL-P-116	Preservation-Packaging, Methods of
MIL-V-173	Varnishes, Moisture and Fungus Resistant, for the Treatment of Communications, Electronic, and Associated Electrical Equipment

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ELECTRONICS RESEARCH AND DEVELOPMENT COMMAND/ELECTRONICS TECHNOLOGY AND DEVICES LABORATORY/FORT MONMOUTH, NJ 07703.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

MIL-C-3885	Cable Assemblies and Cord Assemblies, Electrical (for use in Electronic, Communication, and Associated Electrical Equipment).
MIL-W-6858	Welding, Resistance, Aluminum Magnesium, Non-Hardening Steels or Alloys, Nickel Alloys, Heat Resisting Alloys and Titanium Alloys, Spot and Seam.
MIL-M-10578	Metal Conditioner and Rust Remover (Phosphoric Acid Base)
MIL-P-11268	Parts, Materials and Processes Used in Electronic Equipment.
MIL-M-13231	Marking of Electronic Items.
MIL-F-14072	Finishes for Ground Electronic Equipment.
MIL-F-14256	Flux, Soldering, Liquid (Resin Base)
MIL-C-22750	Coating, Epoxy Polyamide
MIL-W-45205	Welding, Gas Metal-Arc, and Gas Tungsten-Arc, Aluminum Alloys, Readily Weldable for Structure, Excluding Armor.
MIL-C-46168	Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-S-55286	Shelter, Electrical Equipment, S-280/G
MIL-S-55507	Shelter, Electrical Equipment (With or Without Equipment Packaging of)
MIL-S-55257	Shops, Electronic, Shelter Mounted.

STANDARDS
MILITARY

MIL-STD 21	Weld Joint Designs, Armored Tank Type
MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects.
MIL-STD-454	Standard General Requirements for Electronic Equipment.
MIL-STD-810	Environmental Test Methods.
MIL-STD-965	Parts Control Program.
MIL-STD-1474	Noise Limits for Army Material.
MIL-STD-1857	Grounding, Bonding and Shielding Design Practices.
MS-75027	Cable, Cord, Standard Lengths and Standard Tolerance for Communications, Power and-Radio Frequency Cable and Cord Assemblies.

2.1.2 Other Referenced documents, drawings, and publications.
The following documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

DL-C5079125-Shop Equipment, Battery Servicing, Shelter Mounted AN/TSM-133

SC-C-681272	Sealant, Exterior

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

SC-C-681273 Sealant, Interior

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the Contracting Officer).

2.2 Other publications. The following document (s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

1979 National Fire Code Volume 7 - Electrical

(Application for copies should be addressed to National Fire Protection Association, International, Battery March Park, Quincy, Ma, 02269).

Heating, Ventilating and Air Conditioning Guide

(Applications for copies should be addressed to American Society of Heating and Refrigerating Engineers, 345 East 47th Street, New York, N.Y. 10017).

2.3 Order of Procedure. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First Article of production. Unless otherwise specified in the invitation for bids and contract, the contractor shall furnish one First Article of production of the shelter facility for approval. (See 4.3).

3.2 Construction. The Shelter Facility shall be constructed in accordance with the drawings as listed on DL-C5079125.

3.3 Electrical Installation

3.3.1 Power system wiring and components. Installation and wiring of power wires and components including cable assemblies, receptacles, switches, meters, circuit breakers, neon lamps, flourescent lamps, lighting fixtures, distribution assemble system and wiring components shall be in accordance with the drawings unless otherwise stated. The completed in-place power distribution system shall meet the following requirements:

3.3.1.1 Input power. The shop equipment, battery servicing, shelter mounted AN/TSM-133 shall be capable of meeting the performance requirements of this specification when operated from any power source having a voltage of 120/208 volts ± 10%, three phase, WYE connected, frequency 47 to 63 Hz, 100 ampere service, five (5) wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

3.3.1.2 Insulation resistance. The resistance of insulation between any of the conductors at the main power input connector shall be not less than 100 meghoms when tested per 4.9.2.

3.3.1.3 Power distribution and operational functions. Main power branch distribution and circuit switching functions shall meet the operational requirements when tested per Para. 4.9.

3.4 Cable assemblies

3.4.1 Cable assemblies, power and audio frequency. All power and cable and cord assemblies shall be fabricated in accordance with the drawings and shall meet the electrical and strength test requirements of MIL-C-3885.

3.5 System operation. With all the operational equipment of the AN/TSM-133 assemblage installed, the operational requirements shall be met when tested in accordance with 4.9.1.

3.6 Vehicular transportation. The shelter facility shall be capable of being transported over cross-country terrain, without any extra tiering, taping, etc., by military vehicles without sustaining any damage such as buckling, cracking, delamination, or other permanent deformation. (See 4.7.4 and 4.7.5).

3.7 Railroad transportation. The Shelter facility, without any extra tieing, taping, etc., shall be capable of being loaded, blocked, and withstand the test of 4.7.6 without sustaining any buckling, cracking, delamination, or other permanent deformation.

3.8 Drops, flat and rotational. The shelter facility shall be capable of withstanding drops of 18 inches on concrete. After all drop tests of 4.7.7, there shall be no buckling, cracking, delamination or other permanent deformation.

3.9 Watertightness. The shelter facility shall be capable of withstanding the test of 4.7.3. During and after the test, there shall be no leakage into the facility or its walls, floor, roof or doors.

3.10 Parts, materials and processes. In addition to the requirements of this specification, the requirements of MIL-STD-965 and MIL-P-11268, including the section requirements therein, shall apply.

3.10.1 Wiring. All hook-up wiring in the shelter shall be considered as being sealed enclosures containing heat dissipating parts.

3.10.1.1 Slack. Wires and cables shall be as short as practical except that sufficient slack shall be provided:

a. To prevent undue stress on cable forms, wires and connections.

b. To facilitate field repair of broken or cut wires.

c. To prevent chafing or braking of wires due to repeated flexing of hinged parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

3.10.1.2 Protection. Wires and cables shall be so placed and protected as to avoid contact with rough or irregular surfaces or sharp edges. Wires shall not be bent sharply where they enter insulation material.

3.10.1.3 Splicing. Wires in a continuous run between two terminals shall not be spliced during the wiring operation. All ground wires must be trunk tapped, not daisy chained.

3.10.1.4 Identification of wiring. Wiring shall be identified by color coding and wire pair marking as defined on the drawings.

3.10.2 Finish, protective. Equipment shall be given protective finish in accordance with MIL-F-14072. This includes finish of hardware and touch-up after mounting and installation, as specified in 3.10.2.1 and 3.10.2.2.

3.10.2.1 Shelter Exterior. Touch-up and finish of the shelter exterior paint snail be in accordance with P515 of MIL-F-14072 followed with an application of lusterless olive drab per MIL-C-46168.

3.10.2.2 Shelter Interior. Shelter touch-up paint, where required, shall be in accordance with P513 of MIL-F-14072, followed with an application as listed below where required:

a. Ceiling: White Epoxy Paint per MIL-C-22750

b. Door and door brace: Same as 3.10.2.1 to match exterior.

c. Walls: Lined with corrosion resistant formica, design 360, 30 finish, color: Avocado Gossimar, or equal.

d. Floor: Covered with corrosion resistant linoleum floor covering, Armstrong Vinyl Corlon, Polestra, Catalog #86367 or equal.

3.10.3 Marking

Marking shall conform to MIL-M-13231. For the purpose of marking, the equipment shall be considered air-transportable and air mobile.

Wherever practical, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.10.4 Cleaning.

3.10.4.1 Parts. After fabrication, parts shall be cleaned in accordance with good commercial practice or as specified in drawings. Cleaning process shall have no deleterious effect. Corrosive material shall be removed completely before the parts are mounted.

3.10.4.2 Units. After assembly. the equipment shall be cleaned thoroughly and shall be free from excess solder or flux, loose hardware and other foreign material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

3.10.5 Soldering.

3.10. 5.1 Solder. Solder shall conform to QQ-S-571 for soldering electrical connections, composition SN60, Type AR or S, shall be used for general purposes; and composition SN62 or SN63, Type AR or S, for special purposes, When type S solder is used for soldering electrical connect-ions, the flux shall conform to MIL-F-14256.

3.10.5.2 Acid or acid salts. No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections and for tinning or soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used when they can come in contact with insulation material. Where acid or acid salts are used, as permitted above, they shall be completely neutralized and re-moved immediately after use.

3.10.5.3 Process. There shall be no sharp or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indication proper flowing and wetting actions, and shall not be crystallized, overheated or underheated. The minimum necessary amount of flux and solder shall be used for electrical connections. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remianing in the equipment; flux being spread over a large area; or damage to the equipment. Insulation material that has been subjected to heating during soldering operation shall be undamaged and parts fastened there-to shall not have become loosened.

3.10.6 Welding. Wherever practical, welded joint shall conform to MIL-STD-21, and MIL-W-45205, Class B, and shall be such that grinding on the finished weld will be unnecessary. Spot, stitch, and seam welds shall conform to MIL-M-6858, Class B.

3.10.6.1 Cleaning prior to welding. Surfaces to be welded shall be cleaned in accordance with good commercial practice and shall be free from rust, scale, paint, grease and other foreign material.

3.10.6.2 Process. Preheating shall be employed where distortion is likely to result from welding. Welds shall have thorough penetration and good fusion and shall be free of scabs, blisters, abnormal pockmarks, cracks, voids, slag in-clusions, and other harmful defects.

Inert-gas-shielded arc welding shall be used, when practicable, for welding al-uminum, magnesium or stainless steel.

3.10.6.3 Cleaning after welding. Welded assemblies shall be cleaned to remove rust, scale, oxidation products, and excess flux by sandblasting, wire brushing, or other suitable means. Prior to painting, steel parts that have been arc welded or acetylene welded shall, in addition, be subjected to vat passivation or a phosphoric acid etch in accordance with MIL-M-10578. Acid used for cleaning shall be completely neutralized and removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

3.10.7 Connections, soldered, general. Before being soldered to terminal lugs or fixed terminals, wires shall be mechanically secured so that the connections are not dependent for strength on solder alone. Where practicable, wires soldered to fixed terminals shall be looped at least one-half turn but not more than three-quarter turn around the terminal before soldering. Bared ends of wire leads to be terminated in solder-type terminal lugs shall be tinned, silver plated, or lead alloy coated. Electrical connections shall not be made by clamping between a metallic and non-metallic material. Fraying of textile ends of wires shall be prevented mechanically or by the application of varnish conforming to MIL-V-173. No varnish, lacquer, inspection paint or other coating shall be applied to completed electrical connections.

3.10.8 Grounding. Grounding shall be per MIL-STD-1857. Ground connections to shields and to other mechanical parts, except the chassis frame, shall not be made to complete electrical circuits but only to eliminate high potential AC points. All components within the shelter shall be grounded to the shelter. A shelter terminal stud with a captive wing nut for grounding the shelter shall be provided per drawings.

3.10.0 Securing of parts, general. Brackets, lugs, flanges, inserts, bolts, and other mounting arrangements shall be such as to retain items securely when subjected to specified service conditions. Parts shall be so mounted that loosening, wear or mounting arrangements, or permanent separation of parts will not occur when the items in which they are used are subjected to service conditions. Any permanent deformation resulting from the tests shall not cause degradation of performance below full specification requirements. When practicable, friction between mating surfaces shall not be employed as the sole means of preventing fixed parts from rotating. Parts shall be secured in such a manner that failure of a single rivet or screw will not free the part completely. No self-tapping or sheet metal screws shall be used.

3.10.10 Riveting. Riveting shall not be used for mounting parts such as capacitors. resistors, transformers, inductors, and tube sockets. Thickness of countersunk metal which accepts the heads of flush rivets shall not be less than the height of the rivet heads. The distance from the center rivet holes to the edges of the material in which the holes are formed shall be at least 1-1/2 times the rivet diameter. Rivets shall be used where practical in preference to other means of securing aluminum or magnesium structural parts if the joint is subjected to dynamic tension loads when the equipment is exposed to specified service conditions and if the parts do not require removal when the equipment is serviced. After riveting, the joints shall be tight, the jointed parts shall be undamaged, and the rivet heads shall be properly seated and tight against their bearing surfaces.

3.10.11 Seal, vapor. All joints and raw edges of the framing for the power, signal entrance boxes, air conditioner, and exhaust blowers shall be sealed to prevent entrance of moisture to the core material of the shelter panels and to interior of the shelter. All joints shall be assembled and sealed in a manner to prevent collection and retention of moisture. All exterior rivets, screws, and fasteners shall be dipped in sealer prior to installation, the sealer shall be in accordance with drawing SC-C-681272, Sealant Exterior, and SC-C-681273, Sealant Interior.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

3.11 Interchangeability. Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment. Individual items shall not be hand picked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc.

3.12 Aircraft loading data plate. The Shop equipment, Battery Servicing, Shelter Mounted AN/TSM-133 shall be provided with data plates imprinted with the dimensions which locate the center-of-gravity of the shelter facility and assemblage in the three reference planes; the gross wieght of the Shop Equipment and Assemblage; and the bearing pressure on the bottom of the skids. The Shop Equipment Assemblage is the Shop Equipment with operational equipments or dummy loads in place.

3.13 Nameplate. Each Shop Equipment, Battery Servicing Shelter shall be provided with a nameplate. Each nameplate shall be imprinted with a sequential serial number.

3.14 Shelter weight distribution and mobility. The shelter facility AN/TSM-133 as assembled per DL-C5079125, including 4 each AN/USM-432, Battery Chargers or dummy loads installed, and stowed for shipment, the weight distribution shall be such that approximately an even load is placed on all corners of the shelter. Lateral unbalance, if necessary, will be permitted up to 5% of the gross weight of the assemblage (shelter and payload) with the road side the heavier. Fore and aft unbalance shall not exceed 5% of the payload of the shelter with the front of the shelter heavier. All assemblages shall have adequate roadability and be capable of rapid movement over highways and cross-country type terrain including steep slopes, rough surfaces, mud and snow. The weight of the AN/TSM-133 (shelter and shelter installed components only) shall not exceed 5000 pounds.

3.15 Service Conditions. The shelter facility AN/TSM-133 as assembled per DL-C5079125 shall meet the following service conditions.

3.15.1 Temperature

3.15.1.1 High Temperature. The assembly, AN/TSM-133, shall be subjected to temperatures to 68 degrees C (154 degrees F) for storage. The shelter will be operable in an ambient temperature of 49 degrees C (120 degrees F). (See 4.7.1.1).

3.15.1.2 Low Temperature. The assembly, AN/TSM-133, shall be subjected to temperatures to -45 degrees C (-50 degrees F) for storage. The shelter will be operable in an ambient temperature of -32 degrees C (-25 degrees F). (See 4.7.1.2).

3.15.2 Humidity. The assembly, AN/TSM-133, shall be operable without degradation in specified performance, and shall sustain no physical damage, during and after prolonged exposure to extreme high humidity levels as encountered in tropical areas (See 4.7.2).

3.16 Systems Safety Engineering.

3.16.1 Personnel hazards. Personnel hazards shall be kept to a minimum through compliance of configuration changes and parts selection with Requirements 1 of MIL-STD-454. Compliance with these requirements shall be verified through visual inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

3.16.2 Edge rounding, exposed Exposed edges shall be rounded to a minimum radius of 0.04 inch (1mm), and exposed corners to a minimum of 0.5 inch (13mm).

3.16.3 Radioactive Materials. Radioactive materials shall not be used (e.g. luminous dials/markings, electron tubes, surge arrestors, and lenses).

3.17 Acoustical noise. With the air conditioners operating, the acoustical noise level at the operator's positions shall not exceed the NC-60 criteria as specified in MIL-STD-1474. Table 3 Category F, (See 4.13).

3.18 Technical Literature, tools and running spare parts. Technical literature, tools and running spare parts shall be furnished as specified in the contract.

3.19 First Article. When specified, a sample shall be subjected to first article inspection. (See 4.3).

3.20 Workmanship. The equipment shall be manufactured and assembled in accordance with requirement 9 of MIL-STD-454 and the applicable portions of the following paragraphs:

a) In MIL-P-11268:

General requirements for plastic material and plastic parts.

Wiring and Cabling include:

- Slack
- Protection
- Clearance
- Splicing
- Connections, general
- Grounding, general
- Shielding on wire and cable
- Mechanical operation of controls

b) In MIL-S-49442 (ER)

Wiring	3.10.1
Finish, protective	3.10.2
Marking	3.10.3
Cleaning	3.10.4
Soldering	3.10.5
Welding	3.10.6
Connection, soldered, general	3.10.7
Grounding	3.10.8
Securing of parts, general	3.10.9
Riveting	3.10.10

4. Quality Assurance Provisions.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government preserves the right to perform any of the inspections set forth in the specifications where such inspections are deemed necessary to assure that supplies and conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

(1) Quality conformance inspection of equipment before packaging (See 4.5)

(2) Quality conformance inspection of packaging (See 4.4).

4.3 First Article inspection. First Article inspection shall be performed by the contractor and witnessed by the Government Representative unless otherwise specified in the contract. It shall consist of the First Article inspection specified in Table 1, the inspection specified in the subsidiary documents covering the items listed in 4.4 and the inspection specified for group A, group B and group C (See Table II, III and IV respectively).

4.3.1 First Article data. The First Article test plan and test report (s) shall be as required in the contract or purchase order.

TABLE I FIRST ARTICLE INSPECTION

INSPECTION	REQ. PARA.	INSP. PARA.
Temperature	3.15.1	4.7.1
Humidity	3.15.2	4.7.2
Bounce (Munson Test Course)	3.6	4.7.4
Road Test (Perryman Course)	3.6	4.7.5
Railroad Humping (Shock)	3.7	4.7.6
Shelter Weight Distribution	3.14	4.11
Drop	3.8	4.7.7
Ancillary Items	3.5	4.9
Acoustal Noise	3.17	4.13

4.4 Acceptance inspection covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before packaging:

a) In Specification MIL-P-11268:

Items	Where Required
General requirements for plastic material and plastic parts	3.20
Wiring and Cabling, including Slack	3.20

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

Protection
Clearance
Splicing
Connections, general
Grounding, general
Shielding on wire and cable
Mechanical operation of controls

b) In this Specification:

Items	Where Required
Finish, Protective	3.10.2
Marking	3.10.3
Cleaning	3.10.4
Soldering	3.10.5
Welding	3.10.6
Connection, Soldered, General	3.10.7
Securing of Parts, General	3.10.9
Riveting	3.10.10

4.5 Quality conformance inspection of equipment before packaging. The contractor, to demonstrate compliance with specification requirements, shall perform the inspection specified in 4.4, 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection records. In addition, the Government, at its discretion, may perform all or any part of the specified requirements. Test equipment for Government verification inspection shall be made available by the contractor.

4.51 Group A Inspection. This inspection sampling, shall conform to Table II and the ordinary inspection procedures of MIL-STD-105.

TABLE II - GROUP A INSPECTION

INSPECTION	RQR. PARA.	INSP. PARA.	AQL MAJOR	AQL MINOR
Visual and Mechanical:				
Complete System	3.20	4.4, 4.12	1.5dphu	6.5dphu
*Electrical:			1.0%	
Ancillary Items	3.5	4.9		

*All Electrical Tests are Major

4.5.2 Group B inspection, This inspection, including sampling, shall conform to Table III and to the special procedures for small sample inspection MIL-STD-105. Group B inspection shall normally be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

subjected to and met group A inspection.

TABLE III - GROUP B INSPECTION

INSPECTION	REQ PARA.	INSP. PARA.	AQL
Interchangeability	3.11	4.6	4.0%

4.5.3 Group C inspection. This inspection shall be listed in Table IV and shall normally be performed on sample units that have been subjected to and met group A and group B inspection. Sample units shall be selected in accordance with paragraph

4.5.3.1.

TABLE IV - GROUP C INSPECTION

INSPECTION	REQ. PARA.	INSP. PARA.
Watertightness	3.9	4.7.3

4.5.3.1 Sampling for inspection. One sample unit (excluding pre-production samples) shall be selected at random for Group C inspection in Table IV from the first 50 units produced and from each succeeding 100 units and fraction thereof produced. The samples selected shall be at the start of the contract from the first quality conformance inspection production lot.

4.5.3.2 Non-compliance. If a sample fails to pass group C inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of production which can be corrected, and which are manufactured under essentially the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group C inspection shall be repeated on additional sample units (all tests and examinations, or the test which the original sample failed, at the option of the qualifying activity), Groups A and B may be reinstated; however, final acceptance and shipment shall be witheld until the group C inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

4.5.4 Re-inspection of conforming group B and group C sample units.

Unless otherwise specified, sample units which have been subjected to and passed group B and group C inspection, or both, may be accepted on contract, provided that they are resubjected to and pass group A inspection after repair of all damage.

4.6 Inspection for interchangeability. The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.11. Where a listed dimension is not within specified or design limits, it shall be considered a major defect:

a) External and internal dimensions of cases, covers, and insertable assemblies when such dimensions affect mating of parts.

b) Dimension of cavities, when such dimensions affect insertion of item.

c) Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers and mounting.

d) Location of connections, locking pins, fasteners, slides, and mountings which receive mating parts of plug-in assemblies and major units, and location of the mating parts on the plug-in assembly or major unit.

4.7 Environmental condition tests. The AN/TSM-133 system less the AN/USM-432 Battery Chargers, shall be subjected to the tests of 4.7.1 through 4.7.8. Performance Test per 4.9.1 will be performed before and after each test to determine satisfactory operation of equipment. These tests shall be performed in accordance with a contractor prepared Government approved test procedure. Dummy loads shall be installed in place of the AN/USM-432 Battery Chargers.

4.7.1 Temperature test.

4.7.1.1 High Temperature.

a) The assembly shall be subjected to Procedure II, of MIL-STD-810. During step 7 the internal chamber temperature shall be +49 degrees C (+120 degrees F).

b) During step 8 of Method 501.1, Procedure II of MIL-STD-810 the air conditioning of two ECU's shall be operated to determine whether a dry bulb temperature of 38 degrees C (100 degrees F) can be obtained within four hours of operation. The air intake vents and exhaust fans shall be closed during the cool down period.

c) Full operation shall start after four hours of cool down by air conditioning ECU'S the operational procedure as outlined in MIL-S-49442 (ER) under paragraph 4.9 performance Testing of Ancillary Systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

4.7.1.2 Low Temperature.

a) The assembly shall be subjected to the test of Method 502.1, Procedure 1, of MIL-STD-810. During step 4, the internal chamber temperature shall be -32 degrees C (-25 degrees F).

b) During step 5 of Method 502.1, Procedure 1 of MIL-STD-810C, the two environmental control unit (ECU) heaters and one auxillary heater shall be turned on to determine whether a dry bulb temperature of +2 degrees C (+35 degrees F) can be obtained within four hours of operation. The air intake vents and the exhaust fans shall be closed during the warm-up period.

c) Full operation (except for the battery chargers) shall start after four hours of warm-up by the environmental controls. The operational procedure as outlined in MIL-S-49442 under paragraph 4.9 Performance Testing of Ancillary Systems.

4.7.2 Humidity Test. Humidity testing is required for any part which is not specified in par. 3.2 of the specification. The humidity testing of the part shall be per Method 507.1, procedure II of MIL-STD-810.

4.7.3 Watertightness Test. The shelter facility, without the use of any additional external sealing, caulking, taping, etc., shall be subjected to the following two part test:

NOTE: Perform tests with inside cover of entrance box removed.

a) Each of the five exposed surfaces of the shelter facility, with covers closed, shall be sprayed with water from nozzles, model G29SQ (or GG29SQ) as made by Spraying Systems Company, Bellwood, Illinois, Or equal, pointing directly at the surface and arranged to provide uniform coverage of the surface. Each end panel shall be tested using nine (9) nozzles, each side using fifteen (15) nozzles, and the roof using six (6) nozzles. Each nozzle shall operate at a pressure of forty (40) psig at the nozzle, and shall be located nineteen (19) inches from the panel with the exception of the roof nozzles which shall be at a distance of thiety-two (32) inches. All of the five surfaces shall be simultaneously subjected to the test of this paragraph unless otherwise specified by the contracting officer. (See Figure 1 for nozzle location). Each panel shall be sprayed for a period of twenty (20) minutes. Upon completion of the above test, the shelter facility shall meet the requirements of 3.9. To determine that no water has entered the shelter panels, holes shall be made at points to be determined by the Government at the time of testing, After this determination, the holes shall be sealed with rivets and sealer.

4.7.4 Bounce test; Munson Test Course. A complete AN/TSM-133 with equipment stored for transit, mounted on truck, M-2 1/2 ton, shall be driven 5 times over sections of the Munson Test Course at Aberdeen Proving Grounds, Aberdeen, Maryland or approved equal, in the order at the speeds shown in Table V. Dummy loads shall be used in place of four (4) AN/USM-432 battery chargers.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

TABLE V - BOUNCE TEST

Section of Test Course	MPH
Course Washboard (6 inch waves spaced 72 inches apart)	5
Belgian Block	20
Radial Washboard (2 inch to 4 inch waves)	15
Single Corrugated (4 inch to 6 inch waves)	20
Any Short Sections Between the Above Sections	

The equipment shall show no physical damage and shall meet the operational requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

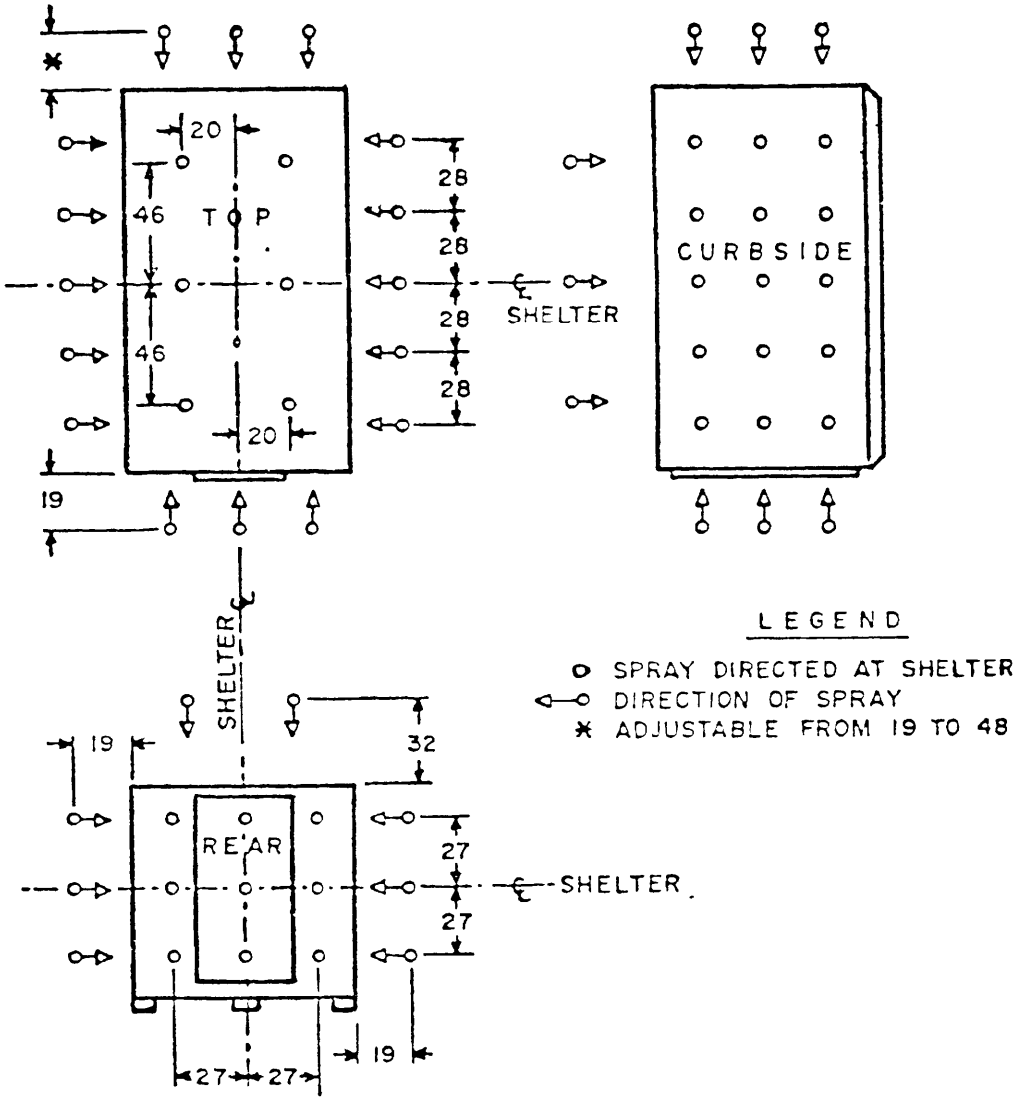

NOTES

1 NOZZLES SHALL BE PERPENDICULAR TO SHELTER.
2 UNLESS OTHERWISE SHOWN ALL DIMENSIONS SHALL BE TAKEN FROM INDICATED CENTER LINES.
3 GAGES SHALL BE PERMANENTLY INSTALLED IN PIPING TO INDICATE PRESSURE AT REMOTE NOZZLES.
4 ROADSIDE NOZZLE LOCATIONS SAME AS CURBSIDE.
5 FRONT NOZZLE LOCATIONS SAME AS REAR.
6 DIMENSIONS ARE IN INCHES.

NOZZLE LOCATIONS

FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

4.7.5 Road Test, Perryman Course. A complete AN/TSM-133 with all equipment stored for transit, mounted on a truck, shall be driven over the Perryman Course, Aberdeen Proving Grounds, Aberdeen, Maryland, or approved equal, for a total of 100 miles. Twenty laps of 5 miles each at 25 to 30 miles per hour; 10 laps counter-clockwise and 10 laps clockwise, -interspersed. After testing, the AN/TSM-133 shall exhibit no physical damage and shall meet the operational requirements. Pay load shall be the same as in para. 4.7.4.

4.7.6 Rail transport, impact test. The shelter facility loaded as specified in paragraph 4.7, secured to a flatcar (the test flatcar) and coupled to two other flatcars shall be impacted by a loaded gondola car. The test shall be performed on a straight and level stretch of track. The test flatcar with its timber blocking and shelter facility tiedown slings, shall be specified in figure 2 and shall meet the provisions of the test as specified in para. 3.7. of this specification.

4.7.6.1 The test flatcar (less the shelter facility) and the two empty flat-cars coupled to it shall each weigh 45,000 to 55,000 pounds. The loaded gondola car shall meet the provisions of the test as specified in para. 4.7.6.2 and shall have a total weight of 155,000 pounds. The loaded gondola car totaling 65,000 pounds traveling 9 miles per hour (or equivalent energy conditions acceptable to the Government technical representative) shall be impacted against the stationary loaded test car coupled to the two empty flatcars all with brakes off. The test shall consist of four (4) impacts. Four (4) impacts with the shelter facility positioned longitudinally On the flatcar, two (2) from each end of the shelter facility. The lashing, blocking and wedges holding the shelter facility in place shall be tight at the start of each run. If the blocking is torn loose or the lashing is broken during impact, the run shall be repeated. After each impact, the shelter facility shall meet the requirements of para. 3.7.


4.7.6.2 Test flatcar. The wooden planking of the test flatcar bed shall be in good condition, All 6x6 inch blocking shall be secured to the bed of the flatcar using 10 inch spikes on ‘he 12 inch centers. The blocking along the door end and opposite end of the shelter shall fit tightly against the corner castings along the full length of the castings except as necessary to clear the towing shackles this shall be accomplished by means of power sawed notches. The blocking along the other two sides of the shelter shall fit tightly against the corner castings, along the full length of the castings. These four (4) blocking members shall not be notched or shirred to contact the trim along the sides of the shelter. The 4x4 inch blocking shall be nailed to the bed of the flatcar as shown in the figure referred above. All other blocking shall be firmly secured as shown in the figure. Lashing shall consist of four (4) wire rope slings, each including 3/8 inch diameter 6x19, flexible steel, performed wire rope (having a breadinn strength of 10,600 pounds minimum), a turnbuckle, two (2) hooks, with thimbles and fasteners as requiredp the breaking strength of the sling shall be 900 pounds minimum. Before each impact, each sling shall be taut (600-800 pounds tension).

4.7.6.3 Loaded gondola car. The load in the loaded gondola car shall be one of the following:

a) A coarse size of either coal, crushed stone, gravel, crushed concrete or metal scrap (other than sheet metal, metal shavings or other springy forms of metal.

b) Chunk, slab, block or plate forms of the preceding acceptable materials, constrained to prevent shifting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

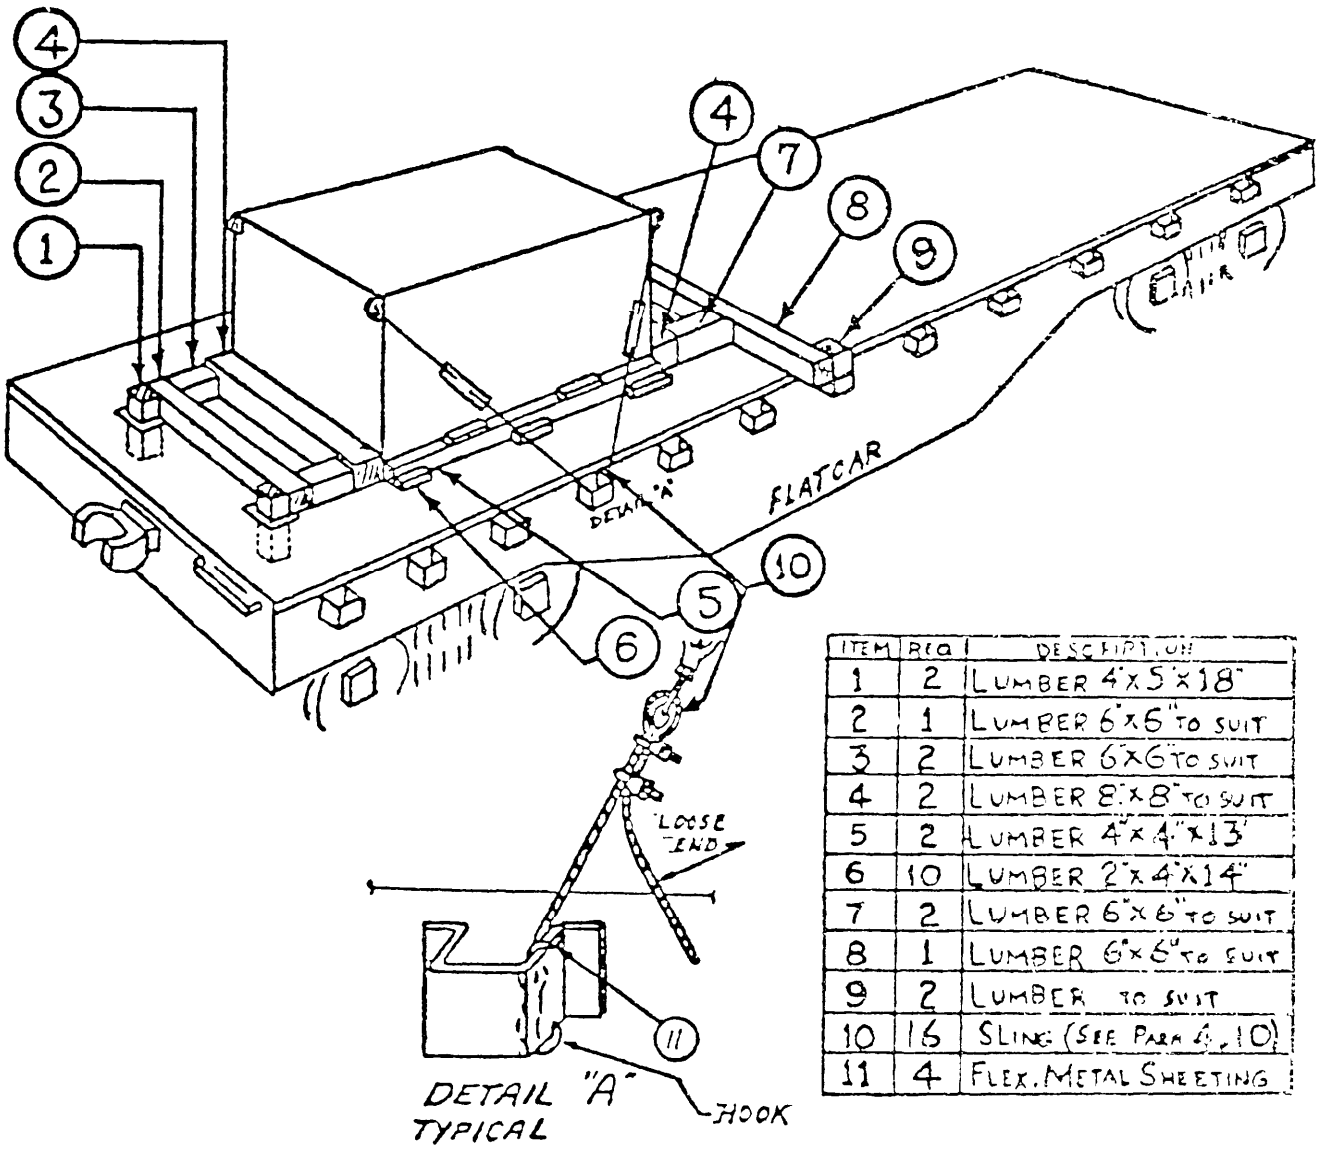

ITEM	REQ	DESCRIPTION
1	2	LUMBER 4"x5"x18"
2	1	LUMBER 6"x6" TO SUIT
3	2	LUMBER 6"x6" TO SUIT
4	2	LUMBER 8"x8" TO SUIT
5	2	LUMBER 4"x4"x13"
6	10	LUMBER 2"x4"x14"
7	2	LUMBER 6"x6" TO SUIT
8	1	LUMBER 6"x6" TO SUIT
9	2	LUMBER TO SUIT
10	16	SLING (SEE PARA 4.10)
11	4	FLEX. METAL SHEETING

NOTES:
a. The blocking lumber shall be notched to accomodate towing eyes, bolts and rivet heads.
b. The blocking lumber shall be rigidly fastened to the floor of the flatcar.

FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

4.7.7 Drop tests.

4.7.7.1 Flat drop. The shelter facility loaded as in par. 4.7, shall be lifted 18 inches from the ground and allowed to fall freely with the skids impacting onto a hard substantial concrete surface. The test shall be performed once. Upon completion of the drop, the facility shall meet the requirements of par 3.8.

4.7.7.2 Rotational drop. The shelter facility loaded as in par 4.7 shall have one skid resting on a normal 4 inch timber. The outer edge of the opposite skid shall be raised 18 inches and the shelter facility shall be allowed to fall freely on a hard substantial concrete surface. This impact shall be performed four (4) times, once for each bottom edge of the shelter facility. On completion of these drops, the shelter facility shall meet the requirements of par. 3.8.

4.8 Telephone Set TA-311/PT. The Telephone Set TA-312/PT shall be tested to ascertain audio-frequency communication between this set and another Telephone Set TA-312/PT by using procedures defined in TM11-5805-201-12.

4.9 Performance Testing. The AN/TSM-133, with all electrical equipment listed in Section 3, less the AN/USM-432 Battery Chargers installed, shall be subjected to performance tests representative to require modification of such procedures, including additional tests deemed necessary.

4.9.1 Performance Testing of Ancillary Systems,

a) Operate all switches and circuit breakers to the “off” position. Open shelter door.

b) Connect power to main power input receptacle. Neon indicator light inside shelter shall light.

c) Phase indicator lamp shall be “off”. Operate line voltmeter switch and “on” Positions 1, 2, and 3 readings of approx. 120 volt ac shall be obtained. Frequency meter shall read 47 to 63 Hz on positions 1, 2, and 3.

d) Disconnect main power input cable from shelter. Reverse any two leads from main power source at connection to main power input. (Leads A, B, or C).

e) Connect power to main power input receptacle. Phase indicator lamp shall be lighted.

f) Disconnect main power input cable from shelter. Reverse two leads previously reversed in step “D” above.

g) Connect power to main power input receptacle. Phase indicator lamp shall be off.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

h) With no water in storage tanks, operate emergency pump circuit breaker to the “on” position. Pump shall not operate and no water indicator light on meter panel (below frequency meter) shall light.

i) Close main circuit breaker, depress emergency button in rear of shelter and main breaker shall open. Reset main breaker to closed position and depress emergency button in front of shelter and main breaker shall open. Reset main breaker to closed position.

j) Close circuit breaker for shelter lights and turn light switches to “on” position.

k) Close sink pump circuit breaker with no water in sink storage tank. Pump shall not operate and no water indicator light on meter panel (below ac voltmeter) shall light.

l) Close all valves (drain, pet cocks, sink, eyewashes, and shower). Remove drain plugs outside of shelter (eyewash - road side, sink - front).

m) Fill emergency water tank with water. When level of water in tank reaches the water sensor, pump will start, water level indicator light will extinguish, bell will ring and continue to ring until water pressure in system activates the water pressure switch. Pump and bells will deactivate. When sight gauge on emergency water tank shows approx. one half tankful, stop filling water tank and screw on outside cap fill inlet pipe.

n) Operate eyewash fountain near sink to a water flow position. Bell shall ring when emergency pressure switch operates. Shut off eyewash fountain and when pressure switch operates bell will stop ringing and emergency pump will stop.

0) Repeat step (n) except use shower- to control water flow.

p) Repeat step (n) except use eyewash fountain to control water flow.

q) Fill sink water tank until tank is approx. 1/3 full as indicated by the sight gauge. When level of water in sink tank reaches the sink water sensor, the sink water pump will start and run until pressure switch operates and deactivates the sink pump motor. “No water” light will go out.

r) Operate sink faucet and when pressure switch operates, sink water pump will run. Close sink faucet and when water pressure switch operates pump motor will stop running.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

s) Open sink water faucet and leave open until water drops below water sensor. Water pump will stop and "no water" indicator light on meter panel will be lighted.

t) Open fan exhaust doors on exterior of shelter. Close both battery charger circuit breakers. Breakers will immediately open.

u) Open exhaust fan doors. Turn "on" exhaust fan switches, close battery charger circuit breakers and power shall be measured at four receptacles for battery chargers. Fans shall operate.

v) Shut off roadside fan and roadside battery charger circuit breaker shall trip. Shut off curbside fan and curbside battery charger circuit breaker shall trip.

w) Open both exhaust fan doors. Turn "on" exhaust fan switches. Close both battery charger circuit breakers. Turn "on" sink eye wash fountain and when pump operates both battery charger circuit breakers will trip and alarm bell will ring. Close sink eye wash faucet and when pressure switch operates, bell will stop ringing and emergency pump will stop. Operate rear eye wash and shower same as above. Open sink eye wash faucet leave water running out of eye wash until water sensor detects no water. Emergency pump will shut down, bell will stop ringing, and emergency pump "no water" light will come "on".

x) Operate light circuit breaker to closed position. Operate blackout by-pass switch to "on" with shelter door open.

y) Operate flourescent light switch to "on" and flourescent lights shall operate. Operate incandescent light switch to "on" and lights shall operate.

z) Operate over-ride switch to "off" position and all lights shall extinguish. Close shelter door and all lights shall operate.

aa) Place dry cells into flashlight and check that proper operation is obtained. Remove dry cells.

bb) Close circuit breaker for curbside receptacles. Emergency light shall be connected to ac curbside receptacle. Connect 2 prong female receptacle to mating 2 prong male receptacle (j-10) located in wire mold adjacent to emergency light wall mounted holder. Close shelter doors. Depress emergency light test button on lower right hand side of light case and emergency light should operate. Release test switch lights shall extinguish. Remove ac plug (3 prong) from ac receptacle and lights shall illuminate from internal batteries in case. Open shelter door and emergency light shall remain off when door is closed or open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

cc) Plug emergency light 3 prong ac plug into ac receptacle with shelter door closed.

dd) Remove ac plug from female receptacle and emergency lights shall operate. Depress momentary toggle switch on top of emergency light box and lights shall extinguish and remain off when toggle switch is released, Plug emergency light 3 prong ac connector into female power receptacle.

ee) Depress emergency stop switch on curbside wall and main circuit breaker shall open extinguishing overhead lights and turning on emergency light. Reset main circuit breaker to closed position.

ff) Plug test lamp into curbside receptacle. Operate circuit breaker marked receptacle curbside to “on” position and test lamp shall light. Operate circuit breaker to “off” position and test lamp shall turn "off."

gg) Repeat previous step except check forward wall circuit breaker and associated receptacles.

hh) Repeat previous step except check roadside circuit breaker and associated receptacles.

ii) Plug heater cord into receptacle heater. Operate heater “off-on” switch to each position and heater will not operate, Close circuit breaker marked heater and heater shall operate when switch is turned to fan position. Air will blow. Turn switch to heat position and thermostat to highest heat position. Warm air will be blowing from heater after one or two minutes operating time.

jj) Operating circuit breaker marked “outside receptacle” test lamp in outside receptacle shall light. Operate circuit breaker to “off” position and test lamp shall extinguish.

kk) Vent Cell Tester - Plug electrical connector into receptacle located under curbside cabinet shelf in forward compartment. Turn valves on vent cap tester to “off” position. Close circuit breaker receptacle under shelf and adjust pressure regulator to 15psi. Open the valves to each of the three lines and check gauges for correct reading. Open CB-12 and relieve pressure by inserting vent cap adapters in quick disconnect couplings and opening valves.

ll) Environmental Units. Close environmental unit circuit breakers and run units on both heating and cooling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

mm) Drain emergency and sink water systems. Open valves D-1 and D-2 (see plumbing schematic on cabinet door). When water empties below tank level sensors pump will shut off. To drain water remaining in tanks use a jumper wire from sensor probe to ground. Run pumps this way until tanks are empty. Do not run pumps dry. Open all valves (sink, eyewashes, shower and all pet cocks) to drain water in pipes.

4.9.2 Insulation Resistance

a) Before testing, remove all fuses, neon lamps, incandescent lamps, ac plugs for air conditioners, battery chargers, and beater; operate meter selector switch to “off” position, both water pump circuit breakers “off” and flourescent light switch to “off” position. Operate all other circuit breakers to “on” position and incandescent light switch to “on” position. Operate “blackout” light switch to"on" position. unplug emergency light ac plug and two prong emergency light interlock connector.

b) Close and lock shelter door.

c) Connect a 500 volt dc insulation resistance tester between pins A and B of the main power input connector. The insulation resistance shall be a minimum of 100 meghoms. Repeat for pins A-C, B-C, A-H, B-N, C-N, N to shelter ground.
NOTE: Capacitance in the lines will require a period of time until the lines have charged, and a steady meter reading is obtained. After reading is obtained, discharge lines with shorting wire. CAUTION: Use care while making measurement and discharging lines to avoid electrical shock!

4.10 System Safety Engineering Inspection. A visual inspection shall be performed to determine that all requirements of 3.16 have been inorporated in the equipment. Inability to meet these requirements shall constitute a failure of the test, Results of this inspection shall be included in the Safety Statement (DI-11-1322A) if required in the contract.

4.11 Shelter Weight Distribution Test.

a) Fore and Aft: Locate shelter on level surface. place a scale under one end and a block under the other end in a line with the center of gravity so shelter balances and is level in both lateral and longitudinal planes, Measure both Fore and Aft weights using the above procedures.

b) Curb and Roadsides: Place a scale under one side and a block under the other side in a line with center of gravity so the shelter balances and is level in both lateral and longitudinal planes. Measure both curb and roadside weights using the above procedures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

c) The shelter shall not exceed requirements in 3.14.

4.12 Visual and Mechanical Inspection. The units shall be examined for the defects listed in MIL-STD-252.

4.13 Acoustical Noise Test. The shelter facility shall be located in an area remote from excessive machinery, vehicle and other noise generating sources to reduce ambient noise to a minimum, with the shelter door closed, Only necessary test personnel shall be present in the shelter. Using Octave Band Analyzer, General Radio Corporation, Model 1558A, or equivalent; record ambient noise levels over the frequency ranges specified in 3.17 at the operators positions. Operate the air conditioners in the cooling, high fan speed mode, and the operational equipment pumps and fans and repeat noise level recordings in the same frequency levels and positions as above. The noise levels, corrected for ambient shall meet the requirements of 3.17.

4.14 Measurement Location. Noise measurements shall be made at the following locations:

a) Center aisle of shelter, 65″ above floor, 42″ from front wall.

b) Center aisle of shelter, 65" above floor, 52" from rear wall.

c) Thirty-six (36) inches from curbside wall, 49″ above floor, 34″ from rear wall.

d) Thirty-six (36) inches from curbside wall, 49″ above floor, 16" from front wall.

4.15 Quality Conformance Inspection of Packaging. Packaging shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

5. Packaging

5.1 Packaging Requirements. The requirements for packaging Shop Equipment, Battery Servicing, Shelter Mounted AN/TSM-133 shall be in accordance with MIL-S-55507.

6. NOTES

6.1 Battery Charger analyzer. The AN/USM-432 is used with the AN/TSM-133, but is not part of the battery servicing shop equipment. The procuring agency should specify the number of Battery Chargers required for installation,

6.2 Ordering Data

a) Title, number and date of this specification and any amendment thereto.

b) A list of Government furnished equipment to be loaned for testing purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

c) Whether first article testing is required.

d) Level of packaging required for shipment, (Level A, Level B or Level C).

e) Number of air conditioners to be installed by contractor.

f) Number of Battery Charger Analyzer AN/USM-432 to be installed by contractor.

6.3 Inspection. Inspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

6.3.1 Examination. Examination consists of simple, general non-destructive determinations of compliance, without use of testing equipment.

6.4 Testing. Testing consists of determinations of compliance, using technical means.

6.4 Group C Inspect Ton. Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action (see 4.5.3.4).

6.5 Nomenclature. The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: S-280 X/G. The contractor should apply for nomenclature in accordance with the applicable clause in the contract (see 1.1).

6.6 Verification of Inspection. Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification Inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

"6.7 First Article. When a first article inspection is required, the item will be tested and should be (a first article sample), (a first production item), (a sample selected from the first production item), [or it may be a standard production item from the contractor’s current inventory as specified in 4.3). The first article should consist of (one), (two), etc. unit (s). The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test approval of the documents first article.”

Custodian
Army - ER

Preparing Activity
Army - ER
Project Nr. 4940-A481

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Electronics Research and Development Command
Electronics Technology and Devices Laboratory
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.