MILITARY SPECIFICATION

CABINET, ELECTRONIC EQUIPMENT (SINGLE BAY)

1. SCOPE

1.1 Scope. This specification covers the functional requirements of a single bay electronic equipment cabinet to house electronic equipment in a shipboard environment.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

TT-C-490	- Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-P-664	- Primer Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.

MILITARY

MIL-S-901	- Shock Tests, H.I. (High-Impact); Shipboard Machinery, Equipment and Systems, Requirements for
MIL-L-3661/21	- Lenses, Indicator-Light, Dripproof, Style LC21.
MIL-L-3661/38	- Housings, Indicator-Light, Style LH80
MIL-C-5541	- Chemical Films and Chemical Film Materials for Aluminum and Aluminmum Alloys
MIL-P-8585	- Primer Coating, Zinc Chromate, Low Moisture-sensitivity
MIL-P-15024	- Plates, Tags and Bands for Identification of Equipment
MIL-E-15090	- Enamel, Equipment, Light-Gray (Formula No. 111)
MIL-P-15328	- Primer (Wash), Pretreatment, Blue (Formula No: 117-B for Metals)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:51Z
Check the source to verify that this is the current version before use.

MIL-E-16400	- Electronic Equipment, Naval Ship and Shore: General Specification
MIL-F-16552	- Filter, Air Environmental Control System, Cleanable, Impingement (High Velocity Type)
MIL-W-16878/4	- Wire Electrical, Type E, 200 C. and 260 C., 600 Volts (Insulated, High Temperature)
MIL-E-17362	- Electronic Repair Parts Requirements, Procedures for Provisioning Technical Documentation and Stock Numbering
MIL-F-19207/20	- Fuseholders, Extractor Post Type, Non-indicating, Types FHN31G1 and FHN31G2.
MIL-B-23071/9	- Blowers, Miniature, for Cooling Electronic Equipment Centrifugal (138 Watts Input Power)
MIL-I-45208	- Inspection System REquirements
MIL-T-55164/9	- Terminal Board, Molded, Barrier, Stud Type, Class 3TB

STANDARDS

~~FEDERAL~~

FED-STD-151	- Metal, Test Methods

MILITARY

MIL-STD-108	- Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-167	- Mechanical Vibrations of Shipboard Equipment
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-461	- Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	- Electromagnetic Interference Characteristics, Measurement of
MIL-STD-740	- Airborne and Structureborne Noise Measurements and Acceptance Criteria of Shipboard Equipment
MS24525	- Switch, Toggle, Four Pole, Environmentally Sealed

DRAWINGS

MILITARY

RE-F2681322	- Cabinet, Electronic Equipment CY-4516
RE-F2683864	- Blower Rack and Front Panel

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:51Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitaiton for bids or request for proposal shall apply.

AIR MOVING AND CONDITIONING ASSOCIATION INC. (AMCA)

Bulletin 210-67 - Standard Test Code for Air Moving Devices

(Application for copies should be addressed to the Air Moving and Conditioning Association, Inc., 30 West University Drive, Arlington Heights, IL 60004.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Fluid Meters, Part II, Interim Supplement 19.5, Instruments and Apparatus, 1972

(Application for copies should be addressed to the American Society of Mechanical Engineers, Order Dept, United Engineering Center, 345 E. 47th St., New York, NY 10017.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article sample. Prior to beginning production, a sample shall be tested as specified in 4.2 (see 6.2).

3.2 General requirements. The cabinet shall be in accordance with the requirements of MIL-E-16400 to the extent specified herein.

3.2.1 Material. Unless otherwise specified the materials used in the construction of the cabinets and the methods of application shall be in accordande with the material paragraph and the magnetic characteristics paragraph of MIL-E-16400 (see 6.1.1).

3.3 Design and construction.

3.3.1 Drawings and sample. Similar electronic equipment cabinets have been previously manufactured by using the fabrication techniques indicated in drawings RE-F2681322 and RE-F2683864. The Government does not

Source: https://assist.dla.mil -- Downloaded: 20260-20T18:51Z
Check the source to verify that this is the current version before use.

assume responsibility for the accuracy of the drawings, nor is a contractor required to use the drawings. No drawings are presently available for the cabinet specified herein. The contractor is encouraged to study and perform operational analyses in order to improve equipment performance and to reduce complexity and price. For example, aluminum alloy honeycomb, cellular extrusions, as well as sheet metal construction may be considered for the cabinet sidewalls. The cabinet assembly need only represent the simplest design consistent with the functional and environmental requirements set forth herein. An electronic cabinet assembly will be loaned to the contractor as a guideline sample only (see 6.3). The contractor shall not be relieved of meeting the performance set forth in this specification regardless of the use of Government furnished drawings, sample, or construction techniques.

3.3.2 Cabinet assembly.

3.3.2.1 The complete cabinet assembly shall consist of a basic cabinet (including front, rear, and top joining strips), blower compartment (see 3.3.5) and a 5-inch (12.7 cm) high steel foundation. A complete list of the contents shall be included in each shipping container.

3.3.3 Dimensions.

3.3.3.1 The cabinet shall be in accordance with the dimensions shown in figure 1.


3.3.3.2 Inside vertical and horizontal members shall not exhibit bowness in excess of 0.020 inches (0.0508 cm) in any plane and panels shall not exceed 0.020 inches (0.0508 cm) bowness in their major plane. Out-of-squareness shall not exceed 0.05 degree for the full internal height dimension of the cabinet. The individual diagonal measurement of the cabinet front, top, bottom or sides shall not differ more than .06 inches (0.1524 cm) from rear, bottom, top or opposite sides respectively.

3.3.4 Weight. The total weight of a complete cabinet assembly (see 3.3.2) shall be a minimum consistent with good engineering design practices and shall not exceed 380 pounds (172.368 kg).

3.3.5 Blower compartment. The blower compartment shall be located at the base of the cabinet and designed to prevent the entrance of unfiltered air. The blower compartment shall contain a terminal board, bracket, and blower chassis assembly.

3.3.5.1 Terminal board location. Location of the board in the blower compartment shall permit easy access when the blower chassis assembly is removed. The terminal board and its marking strip which shall be provided by the contractor shall be 3TB10 in accordance with MIL-T-55164/9.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:51Z
Check the source to verify that this is the current version before use.

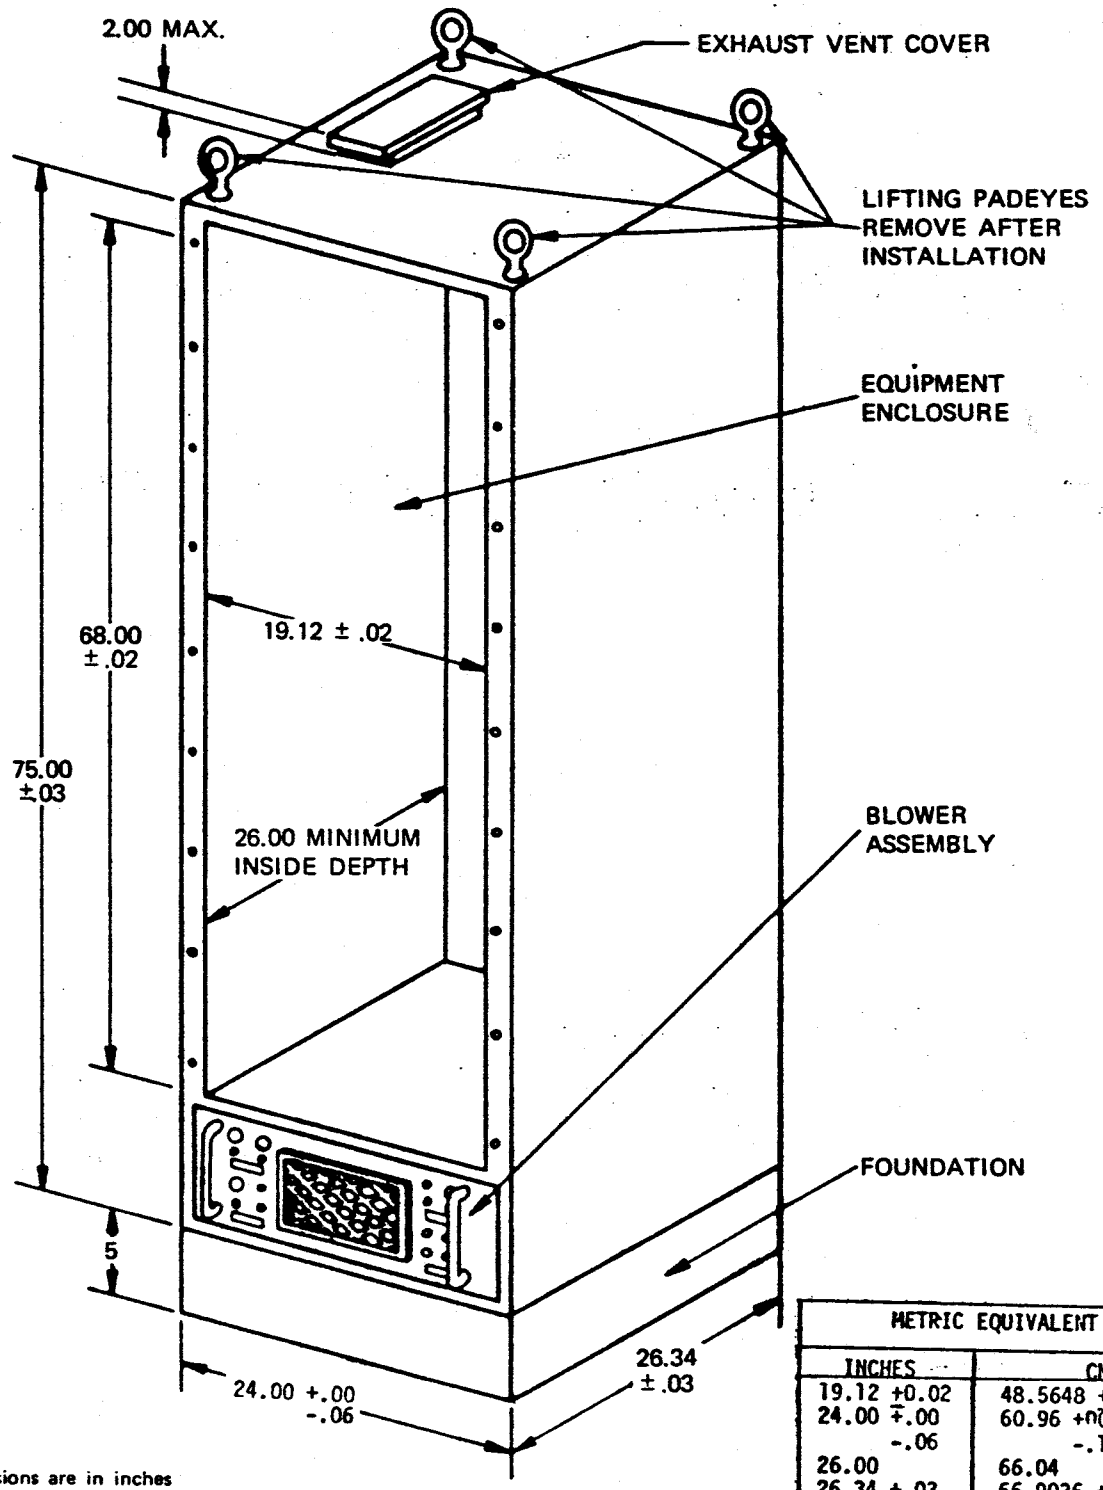

METRIC EQUIVALENT	
INCHES	CM
19.12 ±0.02	48.5648 ±0.0508
24.00 +.00 -.06	60.96 +.00 -.1524
26.00	66.04
26.34 ±.03	66.9036 ±.0762
68.00 ±.02	172.72 ±.0508
75.00 ±.03	190.5 ±.0762
5.00	12.7
2.00	5.08

NOTES:

1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 2.54 cm

Figure 1. Cabinet dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:51Z
Check the source to verify that this is the current version before use.

3.3.5.2 Blower chassis assembly. The blower chassis assembly shall consist of a chassis deck and front panel. Four blowers shall be installed on the chassis deck. Blowers shall operate from 115 volts ± 10 percent, 60 Hertz (Hz) ± 5 percent and shall comply with the environmental, minimum performance, and general configuration requirements of MIL-B-23071/9 and the interference limits for class IC of MIL-STD-461. The blower chassis assembly shall be designed to admit the air supply through an easily removable air filter mounted in the front panel. The filter shall be the same general construction as specified in MIL-F-16552 with the exceptions that no handles will be required and filter thickness shall be 1 inch (2.54 cm). The blowers shall be installed so as to distribute the air to plenums on either the right-hand or left-hand side of the cabinet or any combination of right and left-hand plenums. Every effort shall be made to minimize the loss of cooling air at the blower-duct output and the cabinet-wall interface.

3.3.5.3 Front panel. The front panel of the blower chassis assembly shall provide means for disconnecting blowers and equipment from the power sources. The front panel shall contain an air filter (see 3.3.5.2) and the following electrical devices:

(a) Four power-on, single throw four pole toggle switches in accordance with MS24525-24.

~~(b)~~ Four power-on indicating lights with red jewel, indicator light housing style LH80/1 in accordance with MIL-L-3661/38, lens style LC21RD3 in accordance with MIL-L-3661/21, and lamp, Industry No. 6S6DC-125V or equal.

(c) Eight panel-mounted fuseholders type FHN31G1 or FHN31G2 in accordance with MIL-F-19207/20.

3.3.6 Cabinet sidewalls. The cabinet sidewalls shall serve as primary structural members and within each wall shall be provided four vertical plenums suitable for passing air from the blower compartment to the installed electronic equipment. Each plenum shall have an unrestricted circular discharge port with an area of 2.75 inches in diameter (6.985 cm) which shall be located in the upper 20 percent of the cabinet. A cover for each of the discharge ports which can be mounted flush with the inside walls shall be provided by the contractor. The air flow resistance of the air plenums in the cabinet side walls and blower assemblies shall be such that each blower shall deliver 100 standard cubic feet per minute (scfm) (2.832 cubic meters per minute) to each of the above discharge ports. The internal faces of the cabinets shall be free of any obstructions or projections greater than .06 inches (0.1524 cm).

3.3.7 Cabinet top. The cabinet top shall contain a removable chimney to exhaust the air which has passed through the sidewall air plenums and electronic equipment. The construction of the chimney shall be such that the net exhaust area for airflow is not less than the combined cross sectional area of the sidewall air supply plenums. The cabinet top and chimney shall meet the drip-proof requirements of MIL-STD-108.

Source: https://assist.dla.mil -- Downloaded: 20260-20T18:51Z
Check the source to verify that this is the current version before use.

3.3.8 Cabinet back. The cabinet shall have a removable back panel to facilitate installation of equipment and cabling. The panel shall extend from the top to the base of the cabinet.

3.3.9 Foundation. Unless otherwise specified in the contract or order (see 6.1.1), a welded mild steel foundation shall be provided to support the weight of the cabinet plus 1000 pounds (453.6 kg) of equipment evenly distributed.

3.3.10 Electrical. All internal wiring shall be provided and connected between the control panel, terminal board panel and the blowers. Wiring shall be type E-14 in accordance with MIL-W-16878/4. Mating connectors shall be provided for all receptacles. Fuses shall not be provided.

3.3.11 Hoisting. The cabinets shall contain a removable lifting eye in each corner of the cabinet top. Any single eye installation shall be capable of supporting a complete cabinet (see 3.3.2), "LIFT HERE" shall be marked adjacent to the lifting eyes.

3.3.12 Threaded devices. Threaded devices shall be in accordance with the threaded devices paragraphs of MIL-E-16400.

3.3.13 Thread-locking devices. Thread-locking devices shall be in accordance with the thread-locking devices paragraph of MIL-E-16400.

3.3.14 Welding. Structural welding shall be in accordance with requirement 13 of MIL-STD-454.

3.3.15 Gaskets. Gaskets shall be in accordance with the gasket paragraph of MIL-E-16400.

3.3.16 Safety. Safety shall be in accordance with requirement 1 of MIL-STD-454.

3.3.17 Salt spray. The equipment shall be capable of passing the salt spray test as specified in 4.4.8 without any visible evidence of corrosion.

3.4 Airborne noise. With all blowers in operation, the numerical average of airborne sound power levels of three octave bands representing 500 to 2000 Hz shall not exceed 64 decibels (dB) above 10^{-12} watts (see 4.4.5).

3.5 Shock, vibration and inclination.

3.5.1 Shock and vibration. The cabinet shall be capable of withstanding grade A, class I, medium weight, type A shock tests of MIL-S-901 and type I environmental vibration test of MIL-STD-167 when the cabinet is dummy loaded with 1000 pounds (453.6 kg) of equally distributed weight. The maximum vibration frequency and displacement to be used for conducting the endurance test

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:51Z
Check the source to verify that this is the currentversion before use.

shall be 25 Hz and 0.040 $^{+\ 0.008}_{-\ 0.000}$ inches (.1016 $^{+.02}_{-0.0}$ cm) respectively (see 4.4.6). The dummy loads shall be mounted in seven identical chassis assemblies which are fastened to the front of the cabinet by high strength machine screws. Shear pins shall be used both in the front panel and at the back of the chassis assembly. The shear pins at the rear shall engage a horizontal tie bar which is secured to the sidewalls of the cabinet. Except at the connection points, the chassis assembly and load shall be 1 inch (2.54 cm) or greater from the cabinet sidewalls. See figure 2 for design configuration of chassis assembly and dummy loads. The seven identical chassis assemblies shall be located in the cabinet such that the resulting center of gravity in the vertical axis is at a height of 37.50 inches (95.25 cm) from the base of the cabinet (excluding the foundation). The center of gravity in the front-to-back and side-to-side axes of the cabinet will be determined by the chassis assemblies. The off-center location of the dummy weights in the chassis will introduce eccentric loading to the cabinet in the front-to-back and side-to-side axes to simulate shipboard conditions. The maximum transmissibility ($\frac{\text{vibration output}}{\text{vibration input}}$ = 3.00) of any portion of the cabinet assembly during the vibration test shall not exceed 3 through the frequency range from 4 to 25 Hz.

3.5.2 The cabinet shall meet the requirements as specified during and after the inclination tests of 4.4.7.

3.6 Finishing. After all machining, welding, and grinding operations are completed, the exterior and interior surfaces of the enclosures shall have all rust and other visible corrosion products removed. The enclosures shall also be thoroughly cleaned of all chips, grease, oil, and dirt. Solvents, vapor degreasing, or caustic washing and rinsing may be used. The cabinets shall be given a chemical protective treatment in accordance with MIL-C-5541 and shall be painted as follows:


(a) Primer. Primer shall be applied in accordance with either of the following methods:

(1) One coat of wash pretreatment in accordance with MIL-P-15328, applied as a continuous film 0.0002 to 0.0005 inch (0.00508 to 0.0127 mm) thick.

(2) A hot dip-tank phosphate treatment conforming to type I of TT-C-490 followed by one coat of primer in accordance with TT-P-664 or MIL-P-8585 applied as a continuous film 0.0002 to 0.001 inch (0.00508 to 0.0254 mm) thick.

(b) Enamel. Two coats of gray enamel, conforming to Type III, class 2, of MIL-E-15090, shall be applied as continuous films approximately 0.001 inch (0.00508 mm) thick.

Source: https://assist.dla.mil -- Downloaded: 202610-20T18:51Z
Check the source to verify that this is the current version before use.

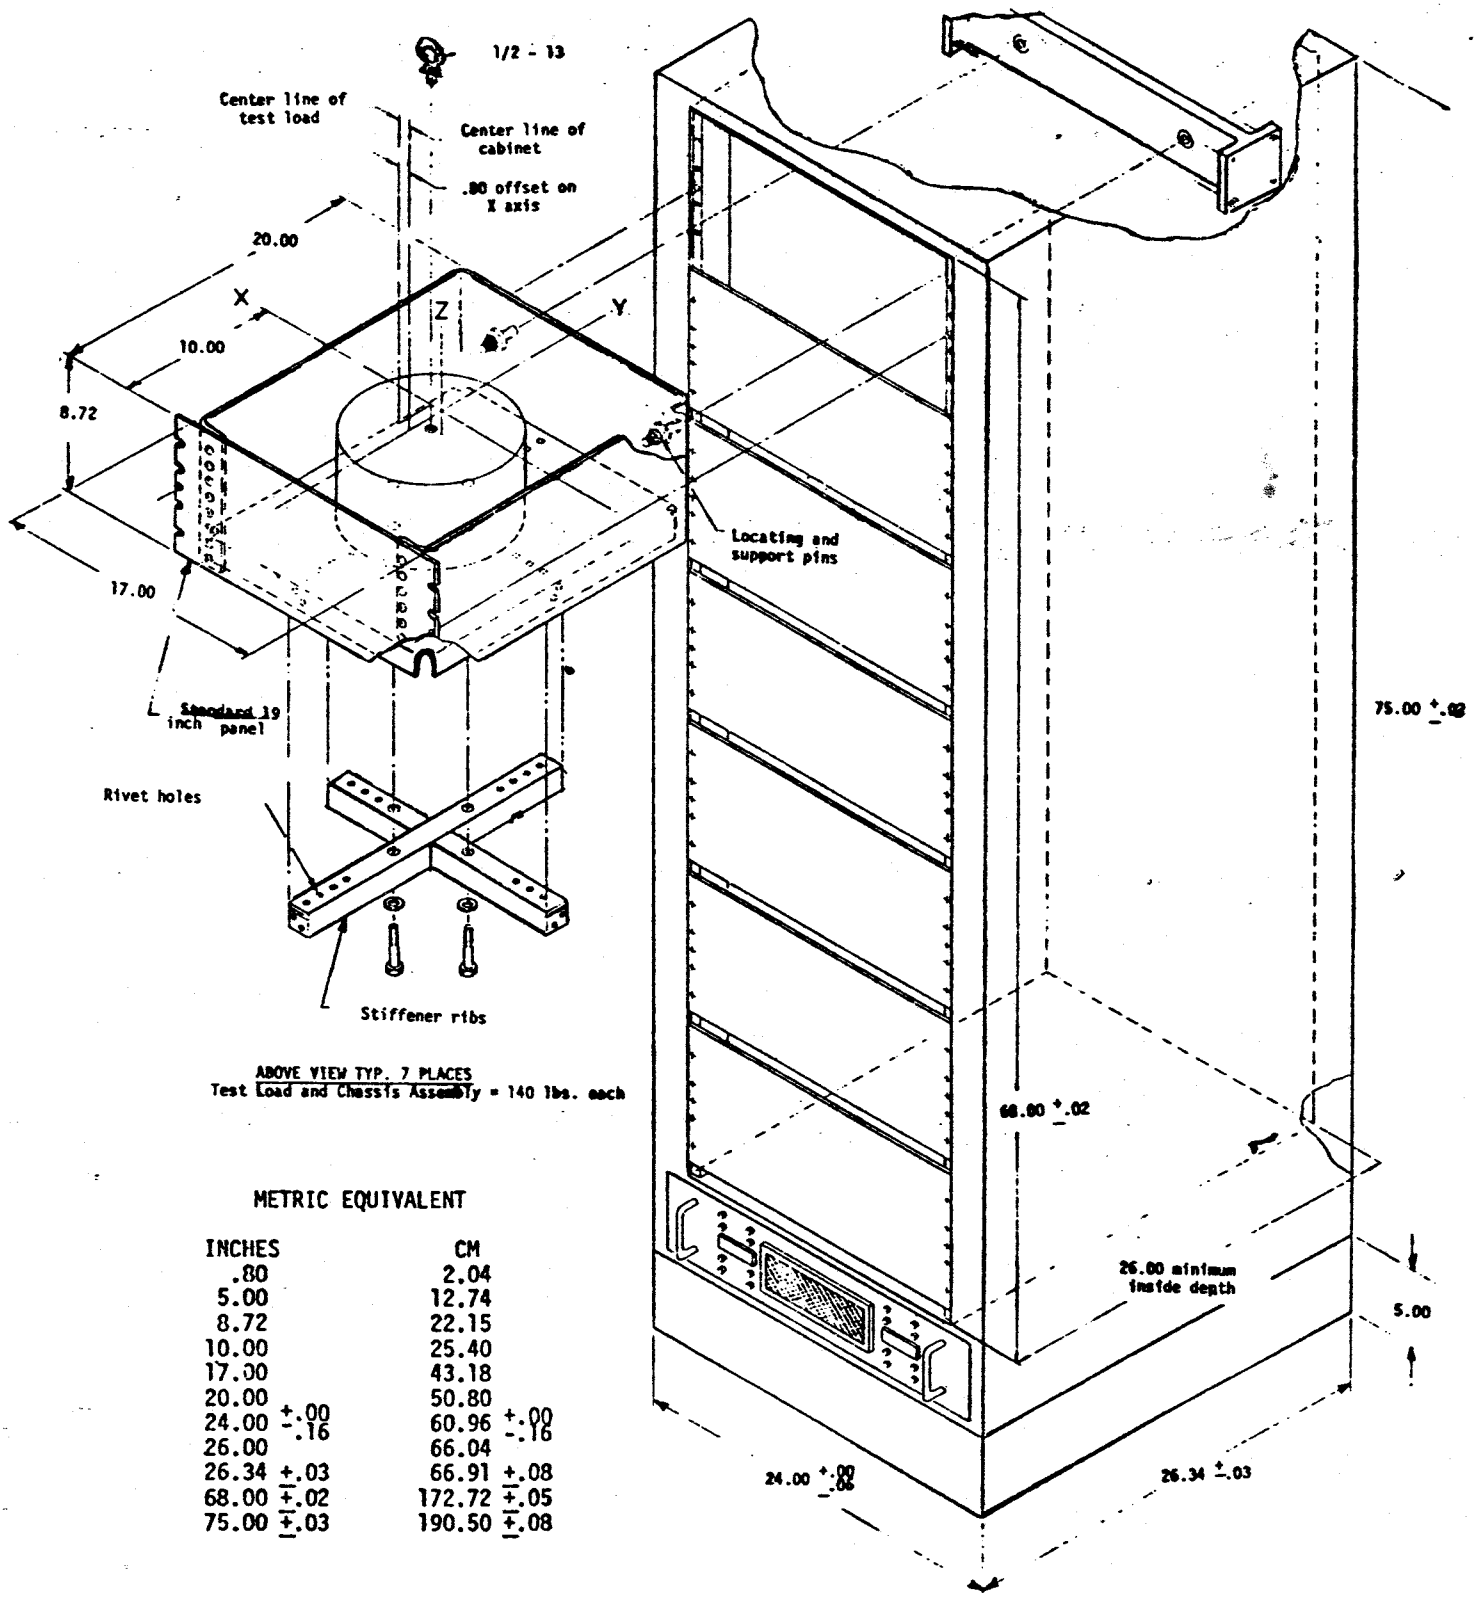

ABOVE VIEW TYP. 7 PLACES
Test Load and Chassis Assembly = 140 lbs. each

METRIC EQUIVALENT

INCHES	CM
.80	2.04
5.00	12.74
8.72	22.15
10.00	25.40
17.00	43.18
20.00	50.80
24.00 $^{+.00}_{-.16}$	60.96 $^{+.00}_{-.16}$
26.00	66.04
26.34 ±.03	66.91 ±.08
68.00 ±.02	172.72 ±.05
75.00 ±.03	190.50 ±.08

Figure 2. Chassis assembly and dummy load configuration

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:51Z
Check the source to verify that this is the current version before use.

4.4.6.2 The cabinet shall then be reoriented 90 degrees to the plane in which it was originally tested and the test of 4.4.6.1 shall be repeated.

4.4.6.3 At the conclusion of the cyclic tests specified in 4.4.6.1 and 4.4.6.2, the cyclic motion shall be stopped and the inclination adjusted to an angle of 15 degrees. The equipment shall then be operated for a period to ensure that continuous operation can be maintained. The equipment shall then be rotated through the vertical to 15 degrees in the opposite direction, and the test for continuous operation shall be repeated.

4.4.7 Salt spray test. The salt spray test shall be made in accordance with method 811.1 of FED-STD-151. It shall be applied to the finishes and coatings on parts and to the frame and enclosure structures as finally assembled for use. It shall not be applied to complete cabinets. Sample corner structures and any other critical section may be used for the test. The sample shall be assembled and treated in the same manner as the complete structure. Duration of the test shall be 200 hours for frame and enclosure structures, and 48 hours for individual parts.

4.4.8 Enclosure (dripproof). The cabinet shall be inclined to an angle of 15 degrees in five different positions and the test conducted in accordance with MIL-STD-108.

4.4.9 Power interruption. With the ventilation blowers operating within the steady state tolerances of voltage and frequency, the external power supply shall be interrupted. After an interval between three and four seconds the power supply, within the steady state tolerances, shall be reapplied. After the blowers have been operated to detect any major performance degradation, the power shall again be interrupted. After an interval between 29 and 30 seconds, the power shall be reapplied. These tests shall be repeated for a total of five times. During and as a result of these tests, no damage to the blowers shall be incurred.

4.4.10 Inspection of preparation for delivery. Sample packages and packs and the inspection of preservation and packaging, packing and marking for shipment and storage shall be in accordance with the requiremtns of section 5.

4.4.11 Electromagnetic compatibility test. Compliance with the interference requirements of 3.3.5.2 shall be verified by test in accordance with MIL-STD-462.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. Preparation for delivery requirements of referenced documents listed in Section 2 do not apply

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:51Z
Check the source to verify that this is the current version before use.

3.7 Identification plates and markings. Unless otherwise specified the cabinet shall carry identification plates and markings in accordance with MIL-P-15024 (see 6.1.1).

3.7.1 Cabinet marking. Each cabinet shall be identified by nomenclature, Federal Stock Number, and serial number.

3.7.2 Instruction plate. An instruction plate describing filter cleaning intervals and methods shall be installed adjacent to the filter.

3.8 Repair parts. Provisioning technical documentation for the determination of repair parts requirements and the obtaining of Federal Stock Numbers shall be furnished by the supplier in accordance with MIL-E-17362 (see 6.1.2).

3.9 Workmanship. The cabinets, including all parts and assemblies, shall be constructed and finished in accordance with requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specfied herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. When Government inspections indicate that a laboratory evaluation is required it shall be performed at a location designated by the Government (see 6.1.1).

4.1.1 Inspection system requirement. The contractor shall provide and maintain a written inspection system acceptable to the Government for supplies and services covered by this specification. The inspection system shall be in accordance with MIL-I-45208.

4.1.2 Quality plan. A quality plan applicable to the equipments covered by this specification shall be developed (see 6.1.2).

4.1.3 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at any time. Verification will include (a) surveillance of the operations to determine that practices, methods, and procedures of the written quality program are being properly applied, (b) Government product inspection to measure the quality of product to be offered for acceptance, and (c) Government product inspection of delivered products to assure compliance with all inspection requirements of this specification. Failure of the contractor promptly to

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:51Z
Check the source to verify that this is the current version before use.

correct deficiencies discovered by him or of which he is notified shall be cause for suspension of acceptance until corrective action has been made or until conformance of product to prescribed criteria has been demonstrated.

4.1.4 Test procedures. The contractor shall develop test procedures covering first article and quality conformance inspection (see 6.1.2).

4.2 First article inspection. Unless otherwise specified (see 6.1.1) one unit shall be required for first article inspection. First article inspection shall consist of all examination and testing necessary to determine compliance with the requirements of this specification. First article inspection shall include the tests and examinations specified in 4.4.

4.2.1 First article inspection report. A first article inspection report shall be prepared containing all the results of the first article inspection (see 6.1.2). The first article inspection report shall indicate specification compliance limits and all inspection results. First article approval will not be granted unless the report is complete.

4.3 Quality conformance inspection. Quality conformance inspection shall be conducted on every cabinet offered for delivery. The inspection shall comprise such examination and testing as will prove the workmanship and reveal the omissions and errors of the production process such as functional testing of the ventilation blowers and examinations which detect deviations from design and hidden defects of material. Quality conformance inspection shall consist of the tests and examinations in accordance with 4.1.4 and shall include the requirements of table I.

Table I. Quality conformance inspection.

Inspection	Test Paragraph
Surface examination	4.4.1
Operating test	4.4.2
Inspection for preparation for delivery	4.4.10

4.4 Tests and examinations.

4.4.1 Surface examination. Each cabinet shall be examined for the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:51Z
Check the source to verify that this is the current version before use.

(a) Workmanship, assembly and fit, mechanical safety, and marking.

(b) Materials, parts and finish.

(c) Treatment for prevention of corrosion.

4.4.2 Operating test. The ventilation blowers shall be energized and subjected to an operating test to ensure qualitatively the proper functioning of the blowers and all electrical devices including adequate air flow and conformance with the safety requirements.

4.4.3 Airflow performance test.

4.4.3.1 Blower test. The blowers shall be tested as specified in the AMCA Bulletin 210.

4.4.3.2 Air flow test. A test shall be performed at the low range of voltage and nominal frequency specified in 3.3.5.2 to determine the delivery of at least 100 scfm (2.832 cubic meters per minute) to the 2.75 inch (6.98 cm) diameter port. The test apparatus shall consist of a venturi-meter and calibrated test section which shall conform to the installation practices and methods recommended in "Fluid Meters, Part II, Interim Supplement 19.5, Instruments and Apparatus, ASME, 1972."

4.4.4 Airborne noise. Noise measurements shall be performed in accordance with grade A of MIL-STD-740.

4.4.5 Shock and vibration. The cabinet shall be tested in accordance with the requirements of grade A, Class I, medium weight, type A shock tests of MIL-S-901 and type I environmental vibration test of MIL-STD-167, with the exception that the endurance test shall be performed at 25 Hz and at a vibratory displacement of $0.040\ ^{+0.008}_{-0}$ inches ($.1016\ ^{+0.02}_{-0.0}$ cm). The cabinet should be loaded with 1000 pounds (4.5.3.6 kg) of equally distributed weight, in accordance with during shock and vibration testing.

4.4.5.1 The vibration test shall be performed followed by the shock test and then revibrated to locate weld failures, cracks, bends and so forth produced by the shock test.

4.4.5.2 The ventilation blowers shall be energized and in the operating condition during and after the shock and vibration tests.

4.4.6 Inclination.

4.4.6.1 The cabinet shall be inclined at the rate of five to seven cycles per minute in one plane to an angle of 45 degrees on either side of the vertical and the ventilation blowers shall be operated for a period of time to ensure that continuous operation can be maintained under such motion or for a minimum of 30 minutes.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:51Z
Check the source to verify that this is the current version before use.

unless specifically stated in the contract or order. Preparation for delivery requirements for products procured by contractors shall be specified in the individual order.)

5.1 Preservation, packaging, packing and marking. Preservation, packaging, packing and marking shall be as specified in the contract or order (see 6.1.1).

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

(a) Title, number and date of this specification
(b) Material, if other than specified (see 3.2.1)
(c) Foundation, if other than specified (see 3.3.9)
(d) Identification plates, if other than specified (see 3.7)
(e) Laboratory evaluation, if required (see 4.1)
(f) Number of first article samples to be submitted if other than specified in 4.2
(g) Marking, levels of preservation, packaging and packing required (see 5.1)

6.1.2 Contract data requirements. Data generated by this document are not deliverable unless specified on the Contract Data Requirements List (DD Form 1423) or the contract schedule. The data required by this specification include, but are not restricted to the following:

(a) Technical documentation for repair parts (see 3.8)
(b) Quality plan (see 4.1.2)
(c) First article and quality conformance test procedures (see 4.1.4)
(d) First article inspection report (see 4.2.1)

6.2 First article. Invitations for bids should provide that the Government reserves the right to waive the requirement for first article samples as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.3 Standard sample. A sample, representative of the cabinet to be supplied by the contractor, will be made available by the procuring activity. The sample will serve as a guideline only, unless otherwise specified in the contract or order.

Preparing activity:
Navy - EC
(Project 5975-N469)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28794 (EC)	CABINET, ELECTRONIC EQUIPMENT (SINGLE BAY)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:51Z
Check the source to verify that this is the current version before use.