INCH-POUND

MIL-PRF-32001

25 July 1997

PERFORMANCE SPECIFICATION

FAN, CIRCULATING - HEAT DISTRIBUTION, SELF-POWERED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance and acceptance requirements for a self-powered fan unit and transport case for use with radiant type, non-electrical powered tent heaters, to distribute heated air in military tents (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Standards. The following standard forms a part of this document to the extent specified herein. Unless otherwise specified, the issue is that listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5018 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426).

AMSC N/A FSC 4140

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-810 Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of the above standards are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to a first article inspection in accordance with 4.1.1.

3.2 Conformance. Items furnished under this specification shall be subjected to conformance inspection in accordance with 4.1.2.

3.3 **Operating requirements.**

3.3.1 Controls and indicators. The fan unit shall not require, nor contain, any user interface device to regulate the operation of the unit.

3.3.2 Internal power system. The fan unit shall contain an internal power supply system that operates silently, contains no moving parts, and requires no adjustments for operation. The internal power system shall provide all necessary power to operate the fan unit from conversion of heat energy from the heater surface. No external power source shall be required. The power system shall require no recharging, refueling, or replacement.

3.3.3 Air flow. The self-powered fan unit shall produce a downward air flow within five minutes of being placed on the surface of an operating tent heater. The fan unit shall produce air flows at the rates specified in Table I when tested as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

TABLE I. Fan unit air flow rates vs. base temperature

Test Base Temperature (°F)	Fan Unit Air Flow (cfm)
300	150
400	250
500	350
600	400

3.3.4 Frame/enclosure. The frame and handle of the fan unit shall remain sufficiently cool to allow safe handling and removal from an operating heater without the need for gloves.

3.3.5 Temperature resistance. All components of the fan unit shall be designed and constructed to operate on the surface of a standard Army tent heater, which is operating at full firing rate, without damage to the fan unit components.

3.3.6 Reliability. The fan unit shall be capable of demonstrating a Mean Time Between Essential Function Failure (MTBEFF) of at least 560 operational hours with 80% confidence. If a motor is used to operate the fan, it shall have a minimum average life rating of 4,000 hours.

3.3.7 Safety. The fan unit shall perform in all conditions of operation in a safe manner.

3.3.7.1 Sharp edges. There shall be no sharp edges that may cause injury to users.

3.3.7.2 Moving parts. All moving parts shall be properly enclosed to prevent injury to operators. Guards shall cover the fan area to prevent injury by accidental insertion of fingers or foreign objects larger than 0.75 inches in diameter.

3.3.7.3 Safety label. A safety label stating “CAUTION: ROTATING FAN” shall be placed in an easily readable location on the fan unit.

3.4. **Support or ownership requirements**.

3.4.1 Weight. The total weight of the fan unit shall not exceed 15 pounds. The total weight of the transport case shall not exceed 10 pounds.

3.4.2 Handles. The fan unit and case shall be equipped with a carrying handle which is

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

rounded for bare-handed use and is large enough to accommodate operators wearing standard military cold weather gloves (NSN 8415-01-310-7338).

3.4.3 Transportability. The fan unit, when configured inside the transport storage case, shall be capable of being transported as loose cargo, carried on ground vehicles as unrestrained cargo, and survive an accidental drop without damage to the unit.

3.4.3.1 Vibration. The fan unit shall survive vibrations encountered during basic transportation.

3.4.3.2 Shock. The fan unit shall survive accidental drops and banging encountered during basic transportation.

3.4.4 Maintenance. The only operator maintenance required shall be Preventive Maintenance Checks and Services (PMCS).

3.4.5 Identification and marking. The fan unit shall have a nameplate marked with the National Stock Number, the contract number, and the manufacturer's name and part number.

3.5 **Environmental requirements**.

3.5.1 Salt fog. The fan unit and transport case shall operate properly after exposure to a salt fog environment.

3.5.2 Wind/rain. The fan unit shall operate properly after being subjected to wind/rain while configured inside the transport storage case. The transport case shall be weather tight.

3.5.3 Storage. The fan unit shall be capable of withstanding storage temperatures of 160°F and -60°F without degradation of performance. The fan unit shall be capable of being placed on an operating heater directly from cold storage without damage or degradation of performance.

3.5.4 Operating temperature range. The fan unit shall be capable of operating in surrounding ambient temperatures of at least 100 °F.

3.6 **Interface and interoperability requirements**.

3.6.1 Dimensions. The dimensions of the fan unit shall be no greater than shown in figure 1 to ensure proper interface with Army tent heaters. The outside dimensions of the storage case shall not exceed 1.85 cu. ft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

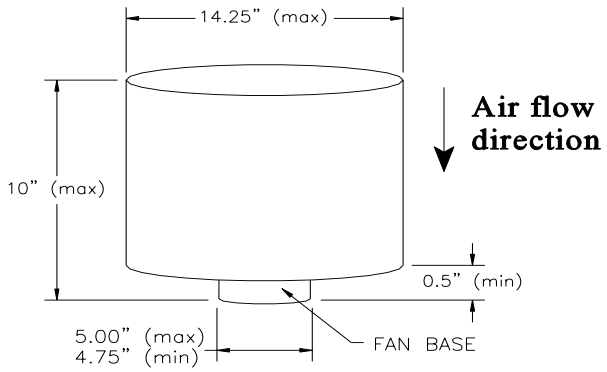


Figure 1. Fan dimensions

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.1.1).
b. Conformance inspection (see 4.1.2).

4.1.1 First article inspection. When a first article inspection is required (see 3.1 and 6.2), the fan unit shall undergo the tests and examinations outlined in Table II. Sampling for the first article inspection shall be as specified in the contract or purchase order.

TABLE II. Requirement and verification outline.

Characteristic	Requirement Paragraph	Verification Paragraph	Characteristic	Requirement Paragraph	Verification Paragraph
Operating Requirements	3.3	4.3	Handles	3.4.2	4.4.2
Controls & Indicators	3.3.1	4.3.1	Transportability	3.4.3	4.4.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

Characteristic	Requirement Paragraph	Verification Paragraph	Characteristic	Requirement Paragraph	Verification Paragraph
Internal power system	3.3.2	4.3.2	Vibration	3.4.3.1	4.4.3.1
Air flow	3.3.3	4.3.3	Shock	3.4.3.2	4.4.3.2
Frame/enclosure	3.3.4	4.3.4	Maintenance	3.4.4	4.4.4
Temperature resistance	3.3.5	4.3.5	Identification and marking	3.4.5	4.4.5
Reliability	3.3.6	4.3.6	**Environmental requirements**	3.5	4.5
Safety	3.3.7	4.3.7	Salt fog	3.5.1	4.5.1
Sharp edges	3.3.7.1	4.3.7.1	Wind/rain	3.5.2	4.5.2
Moving parts	3.3.7.2	4.3.7.2	Storage	3.5.3	4.5.3
Safety label	3.3.7.3	4.3.7.3	Operating temperature range	3.5.4	4.5.4
Support or owner-ship requirements	3.4	4.4	**Interface & inter-operability requirements**	3.6	4.6
Weight	3.4.1	4.4.1	Dimensions	3.6.1	4.6.1

4.1.2 Conformance inspection. Conformance inspections shall include tests 4.3.1, 4.3.2, 4.3.7.1, 4.3.7.2, 4.3.7.3, 4.4.1, 4.4.2, 4.4.5, and 4.6.1. Sampling for conformance inspections shall be as specified in the contract or purchase order.

4.2 Verification methods. Verification methods can include visual examination, measurement, testing, simulation, modeling, engineering evaluation, component properties analysis, certification and similarity to previously approved or previously qualified designs.

4.2.1 Verification alternatives. The contractor may propose alternative test methods, techniques, or equipment, including the application of statistical process control, tool control, or cost effective sampling procedures to verify performance (see 6.4).

4.3 **Operating requirements verification**.

4.3.1 Controls and indicators inspection. Verify there are no user controls or indicators for

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

the unit.

4.3.2 Internal power system inspection. Inspect and verify that the internal power system does not contain moving parts. Operate unit to verify that the power system does not require adjustments for proper performance or produce noise during operation. Verify that the internal power system does not require recharging, refueling or replacement. Verify during operation that there is no external power source used to operate the fan unit.

4.3.3 Air flow test. For the purpose of testing, the "standard test setup" shall refer to a fan unit installed in the setup shown in Figure 2. Unless otherwise specified, all air flow tests shall be conducted in surrounding ambient temperatures of 68° F (+/- 3° F). The setup shall consist of an electric hot plate, a test base, the fan unit, and a top shroud, along with a thermocouple and air velocity transducer. The hot plate shall be a McMaster-Carr Model 3118K88 (see 6.8) or equivalent commercially available, 1500 Watt electric heater. The heating element of the hot plate shall be 8 inches in diameter. The overall size of the hot plate unit shall be a minimum of 15 inches square by 4 to 8 inches high. The test base shall be an 8 inch diameter by 0.5 inch thick aluminum disk as shown in Figure 3. It shall contain a 0.125 inch diameter hole drilled from the outer diameter to the center of the disk, with the drill hole centered between, and parallel to, the faces of the disk. A thermocouple and heat sink compound shall be inserted into the hole. The thermocouple shall be connected to a thermocouple reader. The test base shall be placed over the electric hot plate heating element. The fan unit shall be placed in the approximate center of the test base. The top shroud shall be 14 inches tall and have an inner diameter equal to the outer diameter of the fan unit. The shroud shall have two, 0.25 inch diameter holes, 90 degrees apart and 7 inches down from the top of the unit. The air velocity transducer shall be an Omega model FMA-900 or equivalent (see 6.8) containing a 0.25 inch diameter probe with sufficient length to insert into the center of the shroud.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

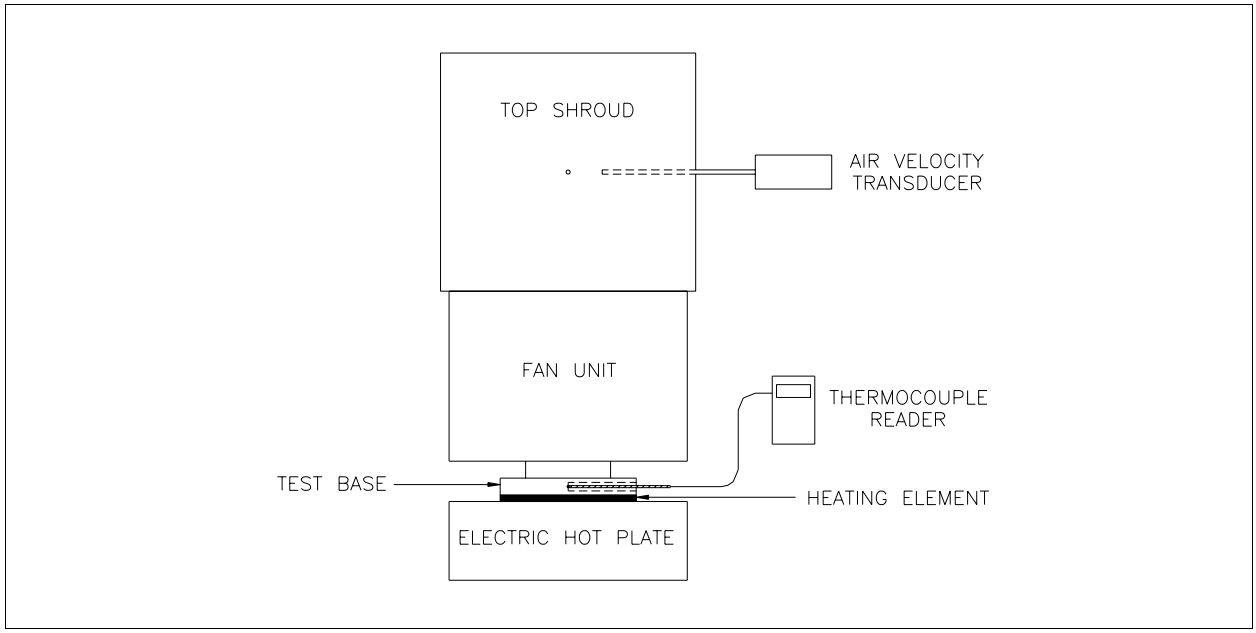


FIGURE 2. Standard test setup

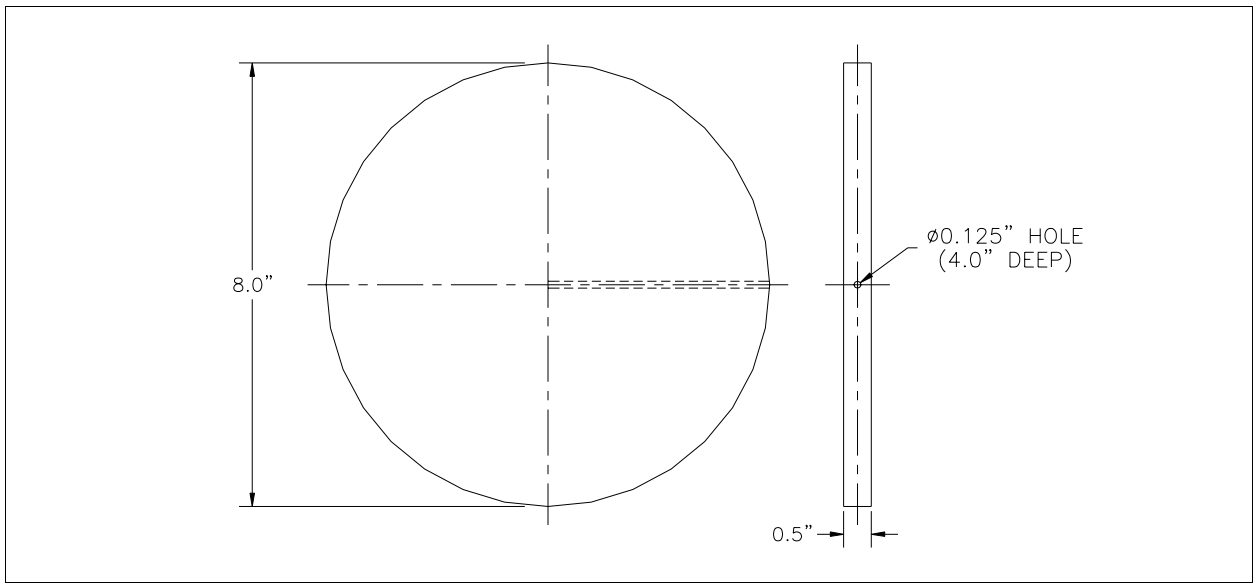


FIGURE 3. Aluminum test base

With the fan unit in the standard test setup as described, adjust the electric hot plate to a setting that produces a test base temperature which is within 5°F but not greater than the lowest temperature in Table I. Once the base temperature has stabilized at the desired setting, allow the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

fan unit operation to stabilize for 10 minutes.

Verify air flow is produced in a downward direction within 5 minutes of reaching the test base temperature. Measure the air velocity and calculate the total air flow produced by the fan unit as follows. The shroud inner area shall be divided into 5 equal areas as shown in Figure 4. The air velocity transducer probe shall be inserted through the holes in the side of the shroud to the middle of each area and a measurement shall be recorded. Since each velocity measured is for an equal area, the measurements shall be averaged and multiplied by the total area to obtain the air flow rate. Insert the probe tip to a depth equivalent to that listed in Table III for point one. Note that this depth is based on the fan unit outer radius or half the diameter (D/2). Record the air velocity at the first point. Repeat for each of the five points listed in Table III. Remove the probe from the shroud and insert it into the hole which is 90 degrees from the first hole. Repeat the five measurements of air velocity at the locations listed in Table III. Add all ten measurements and divide by 10 to obtain the average air velocity in feet per minute. Multiply this number by the area of the fan shroud to obtain the air flow rate in cubic feet per minute (cfm). Note that the diameter in Table III is in inches while the diameter in the area equation is in feet.

Repeat the entire procedure for each of the base temperatures listed in Table I. Air flow rates produced by the fan unit shall be equal or above the minimum values listed in Table I for the corresponding base temperatures.

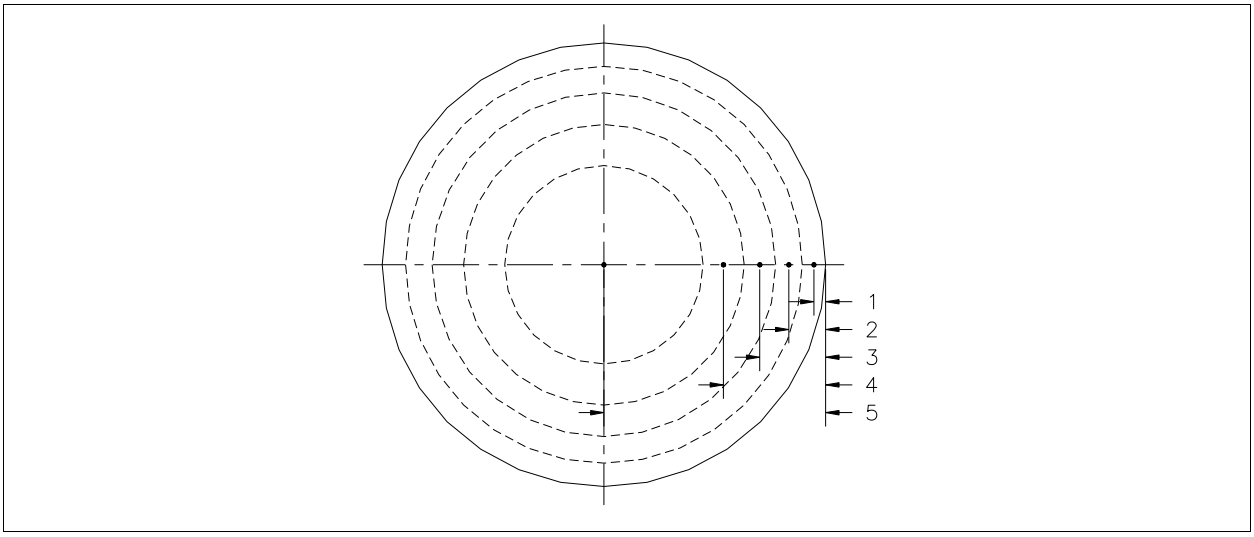


FIGURE 4. Air velocity measurement points

TABLE III. Air velocity transducer probe insertion lengths

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

Point	Depth (inches)
1	.053*D/2
2	.166*D/2
3	.297*D/2
4	.461*D/2
5	1.00*D/2

4.3.4 Frame/enclosure inspection. Place the fan unit in the standard test setup with the top shroud removed. Turn the electric heater on to obtain a base temperature of 580 to 600°F. Allow the fan to operate for 30 minutes. The handle shall remain cool enough for removal with a bare hand without causing burns or discomfort.

4.3.5 Temperature resistance inspection. Place a fan unit in an oven set at 300°F. Maintain the oven at 300°F ± 10°F for 60 minutes. Remove the fan unit and allow it to cool to room temperature. Perform a functional test per 4.3.3 at 600°F test base temperature only. The fan shall meet the air flow requirement of Table I after temperature resistance testing.

4.3.6 Reliability test. Place two fan units in the standard test setup per 4.3.3. Conduct the test by operating each fan unit with the test base temperature between 580 and 600°F for a period of 590 hours each (1,180 cumulative). The test period does not have to be continuous, it may be comprised of any number of operating cycles, however, the total number of operational hours at the specified base temperature shall equal or exceed hours 590 hours for each unit. After 590 hours of operation, perform a functional test per 4.3.3 at 600°F test base temperature only. Failure of the fan unit to meet a minimum 90 percent of the air flow requirements of Table I at 600°F test base temperature (360 cfm) shall constitute a test failure. Verification of motor life shall be accomplished by inspection and approval of manufacturer's test method, data, and certification, and shall be a minimum of 4,000 hours.

4.3.7 Safety inspection. Observe test records and performance of all test and inspections within this performance specification. There shall be no injury to personnel or damage to equipment or property resulting from testing.

4.3.7.1 Sharp edges inspection. Inspect the fan unit and accessories to verify there are no exposed sharp edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

4.3.7.2 Moving parts inspection. Inspect the fan unit and verify that there is no exposure of any moving parts. Visually inspect for presence of finger guards and run a 0.75 inch diameter metal sphere over finger guards. The sphere shall not pass through the finger guards.

4.3.7.3 Safety label inspection. Verify that the fan unit contains an easily readable safety label which states "CAUTION: ROTATING FAN".

4.4 **Support or ownership requirements verification.**

4.4.1 Weight inspection. Weigh the fan unit and transport case. The fan unit shall weigh less than 15 pounds, the case shall weigh less than 10 pounds.

4.4.2 Handle inspection. Verify presence of carrying handle(s) on the fan and case. Verify handles are rounded for bare-handed use and have sufficient clearance for use with cold weather gloves (NSN 8415-01-310-7338).

4.4.3 Transportability.

4.4.3.1 Vibration test. Subject one fan unit configured inside a transport storage case to basic transportation vibration test IAW the requirements and conditions set forth in MIL-STD-810, Method 514.4, Category 1.

Mount the transport storage case with the fan unit inside to the vibration table and instrument with a triaxial accelerometer mounted on the case. Subject the case and fan unit to the vibration environments in all three mutually perpendicular axes (vertical, transverse, and longitudinal).

Test for 32 minutes in the two wheel trailer spectra and 40 minutes for the composite vehicle spectra for a total of 72 minutes of vibration in each of the three axes. Upon completion of the 216 minutes of testing, perform a visual check and a functional test on the fan unit per 4.3.3 at 600°F test base temperature only. Failure to meet the air flow requirement in Table I at 600°F test base temperature shall constitute a test failure. If the fan unit used in the vibration test was previously subjected to reliability testing, then it must produce a minimum 90% of the air flow listed in Table 1 at 600 °F test base temperature.

4.4.3.2 Shock test. Subject a fan unit configured inside of a transport storage case to drop testing IAW the requirements and conditions set forth in MIL-STD-810, Method 516.4, Procedure IV.

Suspend the transport storage case with the fan unit inside by a drop hook 30 inches from the impact surface. Trigger the drop hook allowing the fan unit to free fall to the drop surface. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

drop surface shall be a 2 inch thick plywood surface backed by concrete. A total of three drops from various orientations shall be completed.

Upon completion of the drop test, perform a visual inspection of the case and fan unit. Perform a functional test on the fan unit per 4.3.3 at 600°F test base temperature only. The fan unit shall meet the air flow requirement of Table I. If the fan unit used in the shock test was previously subjected to reliability testing, then it shall produce a minimum 90% of the air flow listed in Table 1. The transport storage case shall open and close properly and continue performing its intended duty after drop testing.

4.4.4 Maintenance inspection. Perform Preventive Maintenance Checks and Services (PMCS) on the fan unit to include observation of the fan blade and verify that if foreign matter were present and in the path of the fan blade, that it could be removed easily without the need for disassembly. A thorough examination shall not exceed 1 minute.

4.4.5 Identification and marking inspection. Verify that the fan unit contains an easily readable nameplate marked with the National Stock Number, the contract number, and the manufacturer's name and part number.

4.5 **Environmental requirements verification.**

4.5.1 Salt fog test. Test a properly functioning fan unit and transport case (separately) IAW the requirements and conditions set forth in MIL-STD-810, Method 509.3. Provide 48 hours of salt fog exposure, followed by 48 hours of dry out. Perform a visual check of the fan unit and case. There shall be no evidence of peeling, blistering paint, possible electrical shorts or impairment due to salt deposits, evidence of deterioration, clogging or binding of moving parts, or change in tolerance limits of any internal or external parts which could prevent the unit from meeting operational and maintainability requirements. Minor oxidation, which can easily be removed is permissible, provided performance of the part is not adversely effected. Perform a functional check of the fan unit per test outlined in 4.3.3 at 600°F test base temperature only. The fan shall meet the airflow requirement of Table I.

4.5.2 Wind/rain test. Subject the fan unit from the salt fog testing (if properly functioning) configured inside a transport storage case to wind/rain testing IAW the requirements and conditions set forth in MIL-STD-810, Method 506.3, Procedure I - Blowing Rain. Provide 4 in/hr of rain along with 40-45 mph winds for 32 minutes (8 minutes per side). Remove the fan unit from the transport storage case and inspect for water penetration. There shall be no more than 1ounce total of water inside the case.

4.5.3 Storage test. Subject one fan unit to testing IAW the requirements and conditions set

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

forth in MIL-STD-810, Method 501, Procedure I - Storage. Bring chamber air temperature up to 160°F (± 3°F) and 75% relative humidity (± 5%), once these conditions are attained, hold for an 8 hour storage period. Remove the fan unit and allow it to stabilize at room temperature then perform a functional test per 4.3.3 at 600°F test base temperature only. The fan unit shall meet the air flow requirement of Table I. Repeat the storage testing at an air temperature of -60°F (± 3°F) for 8 hours. Remove the fan unit from cold storage and perform a functional test per 4.3.3 at 600°F test base temperature, with the exception that the test base shall be brought to 600°F prior to placing the fan unit on and the fan shall be placed on the test base within 1 minute after removal from cold storage. The fan unit shall meet the air flow requirement of Table I.

4.5.4 Operating temperature range test. Provide ambient temperatures of 100°F (± 3°F) and perform a functional test per 4.3.3 at 600°F test base temperature only. The fan shall meet the air flow requirement of Table I.

4.6 **Interface and interoperability requirements verification.**

4.6.1 Dimensional inspection. Measure the outside envelope dimensions of the fan unit. The overall fan unit diameter shall be 14.25 inches or less. The overall height shall be less than 10 inches. The base diameter shall be greater than 4.75 inches and less than 5.00 inches. The base height shall be greater than 0.5 inches. Measure storage case to verify a cube of less than 1.85 cubic feet.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or purchase order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The self-powered fan unit is intended to circulate air to reduce thermal gradients and improve comfort while at the same time improving the efficiency of standard liquid fueled tent heaters (see 6.7). When placed on the horizontal surface of the tent heater, the fan unit generates enough power to move up to 400 cfm of air from the tent peak downward over the heater surface.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.3).
c. When a first article is required (see 3.1).
d. Sampling plan, lot size and sample size (see 4.1.1 and 4.1.2).
e. Packaging requirements (see 5.1).

6.3 First article. When requiring a first article inspection, contracting documents should provide specific guidance to offerors. This guidance should cover whether the first article is a first article sample, a first production item, or the number of test items. The documents should also include specific instructions regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Pre-solicitation documents should provide government waiver rights for samples for first article inspection to bidders offering a previously acquired or tested product. Bidders offering such products who wish to rely on such production testing must furnish evidence with the bid that prior Government approval is appropriate for the pending contract.

6.4 Verification alternatives. Contracting documents should provide guidance to offerors regarding the submission of alternatives to specified verification methods. (See 4.2.1)

6.5 Technical manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, specifications and standards that have been cleared and listed in DOD 5010.12-L, Acquisition Management Systems and Data Requirement Control List (AMSDL) must be listed on a separate Contract Data Requirement List (CDRL) DD Form 1423, which is included as an exhibit to the contract. The technical manuals must be acquired under a separate contract line item in the contract.

6.6 Recycled, recovered, or environmentally preferable materials. Recycled, recovered or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous life cycle costs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.

6.7 Compatable heaters. The following heaters may be used with the fan unit:

Heater, Space, Radiant Type, Portable, 45,000 Btuh, (H45) - NSN 4520-01-329-3451
Heater, Space, Oil-fired, barracks - NSN 4520-00-540-0557
Heater, Space, Radiant, Type II, Liquid Fuel (M41) - NSN 4520-00-927-4214
Heater, Space, M1950 (Yukon) - NSN 4520-00-287-3353
Heater, Space, Radiant, Liquid and Solid Fuel, Type I, SHA - NSN 4520-01-444-2364
Heater, Space, Radiant, Liquid and Solid Fuel, Type II, SHS - NSN 4520-01-444-2375

6.8 Test equipment. The electric hot plate and the air velocity transducer may be obtained from the following sources:

McMaster-Carr Supply Company
P.O. Box 440
New Brunswick, NJ 08903-0440

Model 3118K88, 1500 Watt electric hotplate

OMEGA Engineering Inc.
P.O. Box 4047
Stamford, CT 06907-0047

Model FMA-900 Air Velocity Transducer

6.9 Subject term (key word) listing.

Air circulation
Tent heating

Custodians:

Army - GL
Navy - YD1
Air Force - 99

Preparing activity:

Army - GL

Review activities:

Army - MD1, QM1
Navy - MC
Air Force - 82
DLA - CS

(Project No. 4140-0154)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:16Z
Check the source to verify that this is the current version before use.