3 January 1980

MILITARY SPECIFICATION

SQUIB, ELECTRIC, SINGLE BRIDGEWIRE

This specification is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification establishes the requirements for manufacture and acceptance of a single bridgewire electric squib, referred to herein as the squib.

2. APPLICABLE DOCUMENTS.

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-23659	Initiator, Electric, Design and Evaluation of
MIL-C-45662	Calibration System Requirements.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Engineering Specifications and Standards Department (ESSD), Code 93, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD form 1426) appearing at the end of this document, or by letter.

FSC 1336

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:39Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging, and Packing Levels.

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts.
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests for.
MIL-STD-810	Environmental Test Methods.
MIL-STD-831	Test Reports, Preparation of.

DRAWINGS

Naval Air Systems Command
(Code Ident 30003)

1137AS225	Squib, Electric, Single Bridgewire.

OTHER PUBLICATIONS

Naval Sea Systems Command
(Code Ident 53711)

NAVORD Report 2101	Statistical Method Appropriate for Evaluation for Fuze Explosive Train and Reliability.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specified procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:39Z
Check the source to verify that this is the currentversion before use.

CODE OF FEDERAL REGULATIONS

49 CFR 171-178 Transportation.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. REQUIREMENTS.

3.1 Item definition. The squib is an electrically initiated pyrotechnic device designed to function as the first element in the firing train of a rocket motor. The squib is a single bridgewire type, Class A, as defined in MIL-I-23659.

3.2 Characteristics.

3.2.1 Performance.

3.2.1.1 Electrical.

3.2.1.1.1 Electrostatic discharge. The squib shall not function when subjected to an electrostatic discharge of 25,000 ±500 volts (V).

3.2.1.1.2 Dieletric strength. The squib shall not function with the application of 500 ±25 volts direct current (Vdc) between the shorted leads and the case for 60 seconds (s) minimum.

3.2.1.1.3 Bridgewire sensitivity. The squib shall not function with the application of 1 ampere direct current (Adc) applied through the leads for 5 minutes over a temperature range from -80 to +200 degrees Fahrenheit (°F).

3.2.1.1.4 Bridgewire resistance. Squib bridgewire resistance shall be 1.0 ±0.1 ohm.

3.2.1.2 Seal. The leak rate of the squib shall not exceed 1×10^{-5} standard atmospheric cubic centimeters per second (std atm cm^3/s) with one atmosphere differential pressure.

3.2.1.3 Radiographic. The squib shall show no evidence of loose powder, voids, or fissures in the charge or insulators.

3.2.1.4 Function.

3.2.1.4.1 All-fire sensitivity.

3.2.1.4.1.1 All-fire, 3 amperes (A). The squib shall function with the application of 3.0 ±0.1 A to the leads, and shall produce a pressure output of 170 pounds per square inch (lb/in^2) in a 5 cubic centimeter (cm^3) pressure vessel within 5 milliseconds (ms) maximum after fire switch closure.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:39Z
Check the source to verify that this is the currentversion before use.

3.2.1.4.1.2 All-fire Bruceton. The squib shall have a calculated 3 A maximum, 99 percent all-fire point with a 95 percent confidence level.

3.2.1.4.2 No-fire sensitivity.

3.2.1.4.2.1 No-fire, 1 A/1 Watt (W), 5 minutes. The squib shall not function with the application of 1 A of current and an associated power of 1 W minimum to the leads for 5 minutes minimum.

3.2.1.4.2.2 No-fire Bruceton. The squib shall have a calculated 1 A minimum, 1.0 percent no-fire point with a 95 percent confidence level.

3.2.2 Environmental. The squib shall not be damaged, nor shall safety or subsequent performance be degraded, by exposure to any natural combination of service use environments. These shall include, but shall not be limited to, the following environments.

3.2.2.1 Forty-foot drop. The squib shall meet the requirements of MIL-STD-331, Test 103, Procedures 1 and 2, and shall be safe to handle and dispose of following the test.

3.2.2.2 Shock. The squib shall meet the shock requirements of MIL-I-23659, and shall function and output as specified in 3.2.1.4.1.1 following the test.

3.2.2.3 Temperature-shock/humidity/altitude. The squib shall meet the temperature-shock/humidity/altitude requirements of MIL-I-23659, and shall function and output as specified in 3.2.1.4.1.1 following the test.

3.2.2.4 Vibration. The squib shall meet the requiremnts of MIL-STD-810, Method 514.2, Procedure V, Part 2, Curve AH, and shall function and output as specified in 3.2.1.4.1.1 following the test.

3.2.2.5 Six-foot drop. The squib shall meet the six-foot drop requirements of MIL-I-23659, and shall function and output as specified in 3.2.1.4.1.1 following the test.

3.3 Design and construction.

3.3.1 Production drawings. The squib shall be manufactured and assembled in accordance with Drawing 1137AS225 and as specified herein.

3.3.2 Standards of manufacture. The squib shall be manufactured, inspected, and tested to meet the requirements specified herein.

3.3.3 Workmanship. The requirement for first class workmanship shall not preclude the use of time- and labor-saving techniques, provided that reliability and safety will in no way be jeopardized.

3.3.4 Test equipment calibration. Test equipment shall be calibrated and maintained in accordance with a plan meeting the requirements of MIL-C-45662. When specified in the contract or purchase order, the calibration plan shall be approved by the Government prior to use (see 6.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:39Z
Check the source to verify that this is the current version before use.

3.3.5 Test plan and test procedures. When specified in the contract or purchase order, the contractor shall prepare and submit to the Government for approval prior to testing, a test plan and test procedure in accordance with MIL-STD-831 (see 6.2.2).

3.4 First article.

3.4.1 Preproduction sample. Unless otherwise specified in the contract or purchase order, the contractor shall deliver a preproduction sample of 250 squibs to the testing activity designated in the contract or purchase order for preproduction testing (see 6.2.1). The preproduction sample shall be manufactured using the same methods, materials, processes, and procedures proposed for production. Any production prior to acceptance of the preproduction sample is at the risk of the contractor.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements (see 6.2.1).

4.1.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspections (see 4.1.2.1).

(b) Quality conformance inspections (see 4.2).

(c) In-process inspections (see 4.1.2.1, 4.2, and 4.4.1).

4.1.2 Special tests and examinations.

4.1.2.1 Preproduction sample. Unless otherwise specified in the contract or purchase order, the first 250 squibs produced under any contract shall constitute the preproduction sample (see 3.4.1 and 6.2.1). Prior to environmental testing, the preproduction sample shall be subjected to the in-process inspections of Table I, Group I. The preproduction sample shall then be subjected to the tests of Table I, Groups II through IX, in the sequence shown. Failure of any squib to meet any of the acceptance criteria specified herein shall cause rejection of the preproduction sample.

4.2 Quality conformance inspections. Prior to formation of the inspection lot, the squib shall be subjected to the in-process inspections of Table II, Group A. The inspection lot (see 4.2.1) shall then be subjected to acceptance testing of Table II, Group B through Group E. Failure of any portion of the inspection lot sample to meet the requirements specified herein shall cause rejection of the lot represented.

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:39Z
Check the source to verify that this is the current version before use.

TABLE I. Test sequence for preproduction sample.

Test or examination	Requirement paragraph	Method paragraph
Group I (250 squibs) (in-process)		
Drawing requirements	3.3.1, 3.3.3	4.4.1.1
Electrical	3.2.1.1	4.4.2
Seal	3.2.1.2	4.4.3
Radiographic	3.2.1.3	4.4.4
Group II (6 squibs)		
Shock	3.2.2.2	4.4.6.2
Bridgewire resistance	3.2.1.1.4	4.4.2.4
All-fire, 3 A	3.2.1.4.1.1	4.4.5.1.1
Group III (6 squibs)		
Forty-foot drop	3.2.2.1	4.4.6.1
Group IV (60 squibs)		
Temperature-shock/humidity/altitude	3.2.2.3	4.4.6.3
Group V (20 squibs)		
Vibration	3.2.2.4	4.4.6.4
Group VI (6 squibs)		
Six-foot drop	3.2.2.5	4.4.6.5
Group VII (60 squibs from Group IV, 20 from Group V, and 52 from Group I)		
Bridgewire resistance	3.2.1.1.4	4.4.2.4
Dielectric strength	3.2.1.1.2	4.4.2.2
No-fire, 1 A/1 W	3.2.1.4.2.1	4.4.5.2.1
All-fire, 3 A	3.2.1.4.1.1	4.4.5.1.1
Group VIII (50 squibs)		
No-fire Bruceton	3.2.1.4.2.2	4.4.5.2.2
Group IX (50 squibs)		
All-fire Bruceton	3.2.1.4.1.2	4.4.5.1.2

4.2.1 Inspection lot. An inspection lot of squibs, when ordered, shall contain not less than 151 nor more than 500 squibs, including those squibs required for destructive tests (see 6.2.1). An inspection lot, as defined in MIL-STD-105, shall consist of completed units fabricated from the same materials, using the same processes and procedures under the same conditions, and offered for inspection at the same time. Each squib shall be serialized in order of consecutive assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:39Z
Check the source to verify that this is the currentversion before use.

TABLE II. Inspection lot test sequence.

Test or examination	Requirement paragraph	Method paragraph
Group A (in-process)		
Drawing requirements	3.3.1, 3.3.3	4.4.1.1
Electrical	3.2.1.1	4.4.2
Seal	3.2.1.2	4.4.3
Radiographic	3.2.1.3	4.4.4
Group B (6 squibs)		
Forty-foot drop	3.2.2.1	4.4.6.1
Group C (26 squibs)		
Vibration	3.2.2.4	4.4.6.4
Bridgewire resistance	3.2.1.1.4	4.4.2.4
Dielectric strength	3.2.1.1.2	4.4.2.2
No-fire, 1 A/1 W	3.2.1.4.2.1	4.4.5.2.1
All-fire, 3 A	3.2.1.4.1.1	4.4.5.1.1
Group D (6 squibs)		
Six-foot drop	3.2.2.5	4.4.6.5
Group E (remainder of lot of 151 to 500 squibs)		
Packaging, packing, and marking	Section 5	4.5

4.2.2 Inspection lot sample. Unless otherwise specified herein, a sample of 38 squibs shall be randomly selected from the inspection lot. The inspection lot represented by the sample shall be rejected when any one or more of the following defects occurs in a single squib:

(a) When any squib functions other than when specified in the functional test of 4.4.5.1.

(b) When any squib fails to function on the first firing attempt.

(c) When one or more of the requirements of Section 3 are not met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:39Z
Check the source to verify that this is the current version before use.

4.3 Test conditions and provisions.

4.3.1 Test conditions. Unless otherwise specified herein, the test methods of 4.4 shall be performed under the following conditions:

(a)	Temperature:	Room ambient of 65 ±5 to 95 ±5°F.
(b)	Altitude:	Normal ground elevation.
(c)	Humidity:	Maintained between 10 and 70 percent relative humidity.

4.3.2 Test and inspection equipment facilities. The contractor shall furnish and maintain all necessary test equipment, facilities, and personnel necessary to perform all acceptance tests. The test equipment shall be of sufficient accuracy and quality to permit satisfactory performance of the required tests and examinations.

4.3.3 Test equipment calibration. Test equipment shall be calibrated in accordance with 3.3.4.

4.3.4 Test plan and test procedures. Test plan and test procedures shall be in accordance with 3.3.5.

4.3.5 Gages. The contractor shall provide whatever gages are necessary and adequate to ensure that the material to which this specification applies shall meet the dimensional requirements shown on Drawing 1137AS225. When specified in the contract or purchase order, the Government will furnish drawings of pertinent Navy final inspection gages (see 6.2.1).

4.4 Test methods.

4.4.1 In-process inspections.

4.4.1.1 Drawing inspection. The drawing inspection shall be performed on each lot of squibs in accordance with the sampling plan and Drawing 1137AS225.

4.4.2 Electrical. To determine conformance with 3.2.1.1, the following test shall be performed.

WARNING

The squib is a pyrotechnic-loaded item; suitable safety precautions shall be observed (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:39Z
Check the source to verify that this is the current version before use.

4.4.2.1 Electrostatic discharge. To determine sensitivity to electrostatic discharge, connect a 500 picofarad (pF) ±5 percent capacitor charged to 25,000 ±500 V, and a 5,000 ohm ±5 percent resistor in a series circuit between the two shorted squib leads and the squib case. The series connection shall be maintained for 60 s minimum. Switching on this circuit shall be accomplished by closing a vacuum relay. The squib used for this test shall be temperature-conditioned at 70 ±5°F for 2 hours minimum. To be acceptable, the squib shall meet the requirements of 3.2.1.1.1.

4.4.2.2 Dielectric strength. To determine the dielectric strength, apply a voltage of 500 ±25 Vdc for 60 s minimum between both squib leads shorted together and the squib case. To be acceptable, the squib shall meet the requirements of 3.2.1.1.2.

4.4.2.3 Bridgewire sensitivity. To determine the bridgewire sensitivity, apply 1 Adc through both leads for 5 minutes minimum. To be acceptable, the squib shall meet the requirements of 3.2.1.1.3.

4.4.2.4 Bridgewire resistance. To determine the bridgewire resistance, mount the squib in a physically-shielded fixture and measure the resistance of the bridgewire across both squib leads with an instrument having an accuracy within 0.05 ohm and with the current limited to 10 milliamperes (mA). To be acceptable, the squib shall meet the requirements of 3.2.1.1.4.

4.4.3 Seal. The squib shall be tested in accordance with MIL-STD-202, Method 112, Test Condition C, Procedure IIIa. To be acceptable, the squib shall meet the requirements of 3.2.1.2.

4.4.4 Radiographic. Using radiographic equipment and procedures that will provide detection of loose powder, voids, fissures in compressed charges, and fissures or voids in insulating materials, perform a radiographic inspection on each squib, in groups if desired, along an axis perpendicular to the longitudinal axis. The radiographic plates shall identify the part number, lot number, test date, and each squib serial number. Unless otherwise specified in the contract or purchase order, equipment and procedures shall be approved by the procuring activity prior to use (see 6.2.1). To be acceptable, the squib shall meet the requirements of 3.2.1.3.

4.4.5 Performance tests. Each squib of the preproduction sample, or a randomly selected sample from the production inspection lot, shall be subjected to the tests of Table I or Table II, as applicable. Each squib subjected to the tests of Group II through Group IX in Table I, and of Group B through Group E in Table II, will be fired and shall not be returned to the lot nor forwarded for service use. Initiation of the squib (ruptured closure), except those initiated intentionally in accordance with the test sequence, shall be cause for rejection of the lot represented.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:39Z
Check the source to verify that this is the current version before use.

4.4.5.1 Functional. The squib shall be installed in a 5 cm^3 pressure vessel as shown on Figure 1. The functional tests shall be performed as follows.

4.4.5.1.1 All-fire, 3 A. Connect a 3.0 ±0.1 A power source across the squib leads. To be acceptable, the squib shall meet the requirements of 3.2.1.4.1.1.

4.4.5.1.2 All-fire Bruceton. Subject 50 squibs from the preproduction sample to the all-fire Bruceton methods of NAVORD Report 2101 to determine the least firing stimulus which causes initiation within 50 ms maximum. Squibs used for this test shall be pulsed with a varying current level for 50 ms maximum in a 5 cm^3 pressure vessel. The initiation response shall be determined by an indication of pressure on the oscilloscope trace. To be acceptable, the squib shall meet the requirements of 3.2.1.4.1.2.

4.4.5.2 No-fire sensitivity.

4.4.5.2.1 No-fire, 1 A/1 W, 5 minutes. Apply a direct current of 1 A minimum supplying 1 W minimum to the squib circuit for 5 minutes minimum. The test current shall be regulated throughout the 5-minute period to within 2 percent. This test shall be conducted at a temperature of 70 ±5°F. To be acceptable, the squib shall meet the requirements of 3.2.1.4.2.1.

4.4.5.2.2 No-fire Bruceton. Subject 50 squibs from the preproduction sample to the no-fire Bruceton methods of NAVORD Report 2101 to determine the greatest firing stimulus which does not cause initiation within 5 minutes maximum. Fifteen squibs shall be used for search of the mean, and the remaining 34 shall be used to determine the maximum no-fire current. This test shall be conducted at ambient temperature with no heat sink. To be acceptable, the squib shall meet the requirements of 3.2.1.4.2.2.

4.4.6 Environmental.

4.4.6.1 Forty-foot drop. The squib shall be tested in accordance with MIL-STD-331, Test 103, Procedures 1 and 2. To be acceptable, the squib shall meet the requirements of 3.2.2.1.

4.4.6.2 Shock. The squib shall be tested in accordance with MIL-I-23659. To be acceptable, the squib shall meet the requirements of 3.2.2.2.

4.4.6.3 Temperature-shock/humidity/altitude. The squib shall be tested in accordance with MIL-I-23659. To be acceptable, the squib shall meet the requirements of 3.2.2.3.

4.4.6.4 Vibration. The squib shall be tested in accordance with MIL-STD-810, Method 514.2, Procedure V, Part 2, Curve AH, except the vibration shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:39Z
Check the source to verify that this is the current version before use.

be applied for a period of 2 hours along each of the three mutually perpendicular axes for a total test time of 6 hours. To be acceptable, the squib shall meet the requirements of 3.2.2.4.

4.4.6.5 Six-foot drop. The squib shall be tested in accordance with MIL-I-23659. To be acceptable, the squib shall meet the requirements of 3.2.2.5.

4.5 Packaging, packing, and marking. Prior to shipment, examination shall be made to ensure that packaging, packing, and marking conform to the requirements of Section 5.

5. PACKAGING.

5.1 Preservation-packaging. Preservation and packaging shall be in accordance with FED-STD-102.

5.1.1 Level C. Each squib shall be clean, dry, and individually packaged in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity.

5.2 Packing.

5.2.1 Level C. Squibs, packaged in accordance with 5.1.1 and with lead wires shorted together, shall be packed in shipping containers in a manner which will provide adequate protection from damage during direct shipment from the supply source to the first receiving activity. Packing shall conform to 49 CFR 171-178.

5.3 Marking. In addition to any special marking required by the contract or purchase order (see 6.2.1), all marking shall be in accordance with MIL-STD-129.

6. NOTES AND CONCLUDING MATERIAL.

6.1 Intended use. The squib is intended for use as a component of a rocket motor arming-firing device.

6.2 Ordering data.

6.2.1 Procurement requirements. Procurement documents should specify the following:

(a) Number, title, and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:39Z
Check the source to verify that this is the current version before use.

(b) When a first article is required, it should be tested and approved under the appropriate provisions of 7-104.55 of the Defense Acquisition Regulations (DAR). The first article should be a preproduction sample consisting of 250 squibs as specified in 3.4.1 and 4.1.2.1. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examinations, tests, and approval of the first article.

(c) Responsibility for inspection and inspection facility, if other than as specified in 4.1.

(d) Inspection lot size (see 4.2.1).

(e) Navy final inspection gage drawings (see 4.3.5).

(f) Radiographic equipment and procedures (see 4.4.4).

(g) Special marking (see 5.3).

6.2.2 Data requirements. When this specification is used in a procurement which incorporates a Contract Data Requirements List (DD Form 1423) and invokes the provisions of 7-104.9(n) of the DAR, the data requirements identified below will be developed as specified by an approved Data Item Description (DID) (DD Form 1664) and delivered in accordance with the approved DD Form 1423 incorporated in the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited as follows:

Paragraph	Data Requirement	Applicable DID
3.3.4	Calibration Plan	UDI-T-23742A
3.3.5	Test Plan and Test Procedure	DI-T-5204

(Copies of DIDs required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

6.3 Explosives safety precautions. Minimum explosives safety precautions for use by the contractor are detailed in DoD Instruction 4145.26M, DoD Contractors' Safety Manual for Ammunition, Explosives, and Related Dangerous Material.

Preparing activity:
Navy (AS)


Project Number 1336-N301

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/1024

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:39Z
Check the source to verify that this is the current version before use.

NOTES:

1. The pressure transducer shall be calibrated using a dead weight tester.
2. The pressure vessel shall be capable of withstanding 20,000 psig minimum burst pressure. The vessel shall have a nominal net volume of 5 cm3 with provisions for inserting a pressure transducer and the squib. View A shows a typical cross section of such a pressure vessel.
3. The volume of the pressure vessel shall be certified in a manner acceptable to the procuring activity.

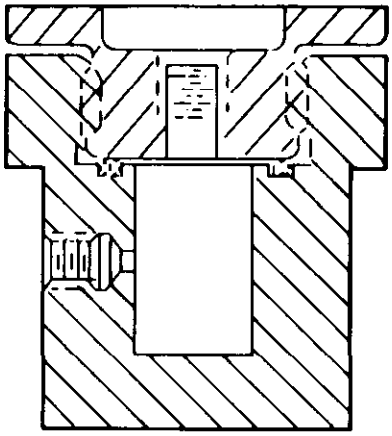

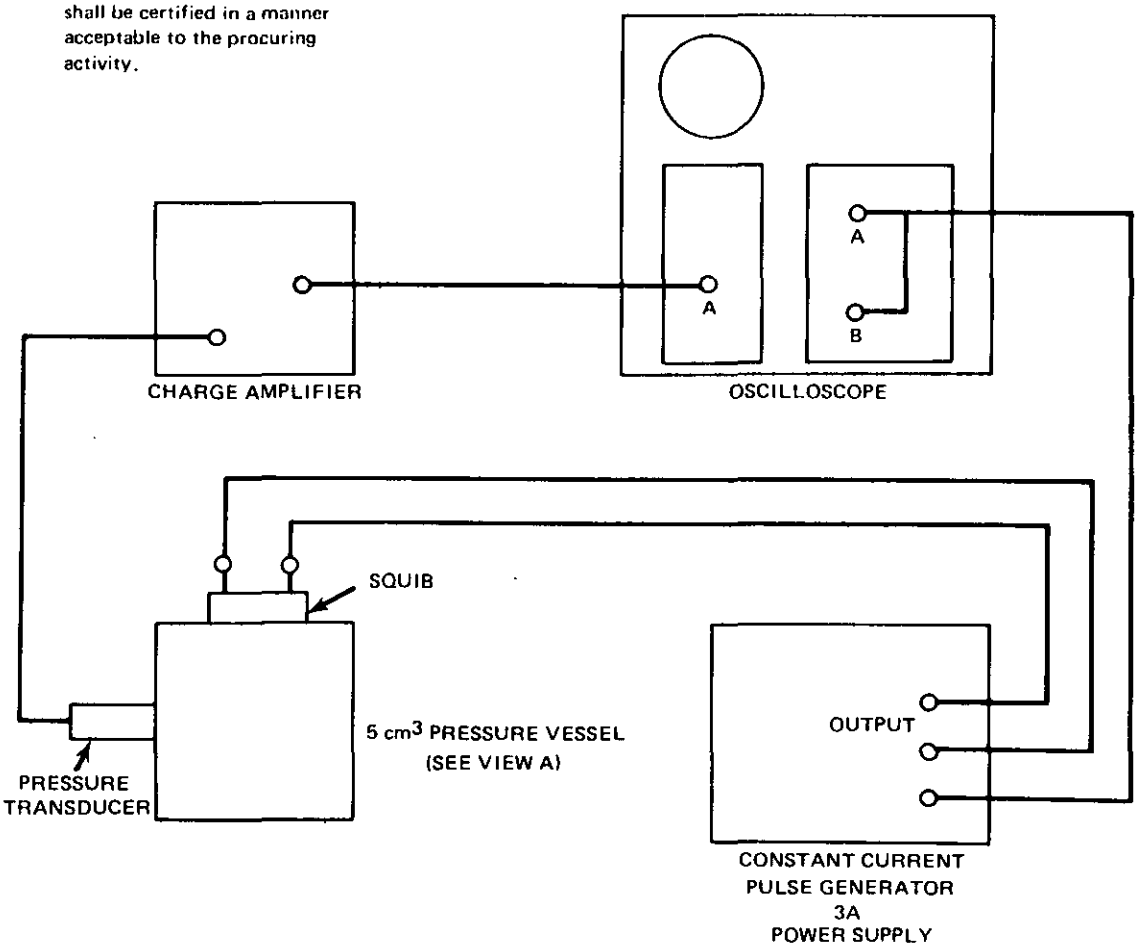


FIGURE 1. Functional test setup.

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:39Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer (Code 93)
Naval Air Engineering Center
Engineering Specifications and
Standards Department (ESSD)
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-85309(AS), "Squib, Electric, Single Bridgewire"

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:39Z
Check the source to verify that this is the current version before use.