MIL-M-81345B
25 June 1968
Superseding
MIL-M-81345A
23 August 1966

MILITARY SPECIFICATION

MATS, LANDING, AIRFIELD, AM2

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope - This specification covers AM2 airfield landing mats, pallet and mat assemblies, and accessories.

1.2 Classification - The mat assemblies, pallet and mat assemblies, or accessories shall be furnished as specified by the applicable part number listed in the contract or order (see 6.2).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-C-5541	Chemicals Films and Chemical Film Materials for Aluminum and Aluminum Alloys
MIL-C-81346	Compound, Deck Covering, Nonslip, Lightweight, for Aluminum Alloy Landing Mats

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

FSC 5680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

STANDARDS

Military (Cont'd)

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking for U.S. Military Property
MIL-STD-248	Qualification Tests for Welders
MIL-STD-278	Welding and Inspection of Machinery, Piping and Pressure Vessels for Ships of the United States Navy
MS-24667	Screw, Cap-Socket Head, Flat Countersunk, 82°, Alloy Steel, Cadmium Plated, UNC-3A

DRAWINGS

Naval Air Engineering Center

320660	Locking Bar
413370	Starter Key Lock
413378	Removal Tool
415040	90° Connector
416557	Tie Downs
416875	Type I Adapter
416876	Type II Adapter
416877	Type III Adapter
417034	Female Key Lock
508386	Replacement Mat Assembly
508389	Typical Key Lock
509862	Mat Assembly (two section extrusion)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

Naval Air Engineering Center - (Continued)

511152	Tie Down Package
610128	Mat Assembly (single section extrusion)
610165	12-Mat Pallet and Mat Assembly
610860	Key Lock and Pallet Assembly
612157	Replacement Mat and Pallet Assembly
612716	Patch Assembly
612717	Ramp
612915	Pallet and Mat Assembly (Half Mat)
612922	Rub Rail Package Assembly
613370	18-Mat Pallet and Mat Assembly
613406	90° Connector Package Assembly
614355	Ramp Pallet Assembly
614589	Package Assy, Blast Deflector Adapters

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Initial Production Inspection - The mat assemblies, pallet and mat assemblies, or accessories furnished under this specification shall be products which have been inspected and passed the initial production inspection specified herein.

3.2 Materials - Materials shall conform to applicable specifications and shall be as specified herein and on applicable drawings. Materials which are not covered by specifications or which are not specifically described herein shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

3.3 Design and Construction -

3.3.1 Mat Assembly - The design and construction of the mat assembly shall be in accordance with either Drawing 610128 (single-section extrusion) or Drawing 509862 (two-section extrusion), as specified. (See 6.2).

3.3.2 Pallet and Mat Assemblies - When specified, 12-Mat Pallet and Mat Assembly (Drawing 610165), 18-Mat Pallet and Mat Assembly (Drawing 613370) or Pallet and Mat Assembly (Half Mat) (Drawing 612915) shall be furnished and shall conform to their respective drawings and subsidiary drawings, specifications, and standards.

3.3.3 Landing Mat Accessories - When specified, Starter Key Lock (413370), Female Key Lock (417034), 90° Connector (415040), Tiedowns (416557), Replacement Mat Assembly (508386), Tiedown Package (511152), Typical Key Lock (508389), Key Lock and Pallet Assembly (610860), Type I Adapter (416875), Type II Adapter (416876), Type III Adapter (416877), Replacement Mat and Pallet Assembly (612157), Rub Rail Package Assembly (612922), Ramp (612717), Patch Assembly (612716), 90° Connector Package Assembly (613406), Ramp Pallet Assembly (614355) or Blast Deflector Adapter Package Assembly (614589) shall be furnished and conform to their respective drawings and subsidiary drawings, specifications, and standards.

3.4 Performance Tests - The mat assemblies and accessories shall pass the tests as specified herein.

3.5 Finish - The cleaning, pre-treating, painting, plating, application of non-skid coating, and drying shall be as specified on applicable drawings and as specified herein. After painting and, where applicable, application of non-skid compound, mat assemblies, pallet components, and accessories shall not be stacked or palletized until paint and non-skid compound are completely dry.

3.5.1 Mat Assemblies, Key Locks, Replacement Mat Assembly, 90° Connector and Ramp -

3.5.1.1 Surface Preparation - Cleaning of the mat assemblies, starter section key lock assembly, replacement mat assembly, key lock, 90° connector, and ramp, shall be by immersion or pressure spray. Cleaning shall be with non-etch alkaline solutions followed by deoxidizing solution of the chromic-sulfuric acid type. A surface chemical conversion coating MIL-C-5541 shall be applied if required for nonskid coating adhesion. Thorough final rinse and between each cleaning step shall be carefully performed prior to application of non skid material. The surface to receive non skid shall not exhibit a residue or surface contamination and shall be completely dry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

3.5.1.2 Painting - Surfaces that require painting shall be the interlocks (upper surface only) of the mat assembly, replacement mat assembly, starter key lock, typical key lock, female key lock, ramp assembly and the upper longitudinal edge of the 90° connector. These surfaces shall be painted with the liquid vehicle of the non-skid coating being used. No aggregate shall be used with this liquid vehicle. The coating shall be applied to the interlock surface, after application of the non-skid coating, to a dry film thickness of 1 to 1.5 mils. Blast deflector adapters shall be painted on all surfaces.

3.5.1.3 Non-Skid Coating - The top surfaces of the mat assemblies, female key lock, starter key lock, 90° connector, replacement mat assembly, typical key lock, and ramp shall have a complete and uniform coverage of non-skid coating. The non-skid coating shall be in accordance with MIL-C-81346. The coating shall be applied by spraying to a wet film thickness of 21 mils minimum. The wet film gage shown in Figure 1 shall be used to determine the thickness of the non-skid coating at time of application. The interlocks and bolt holes shall be shielded to prevent the non-skid coating from adhering to these areas. Any area requiring a touch up after spray coating may be ocrrected by a brush application. Non-skid coating and paint shall be oven dried. Oven drying consists of drying for a sufficient period of time at a temperature recommended by the non-skid coating manufacturer. However, in no instance shall the mat metal temperature exceed 300°F during the process of drying.

3.5.2 Locking Bar - The finish for the aluminum locking bar shall be as specified on Drawing 320660.

3.5.3 Removal Tool and Key Lock Screw - The finish of the removal tool Dwg. 413378 and head of screw No. MS 24667-76 used with key lock sections shall be as specified on applicable drawing.

3.5.4 Pallet Assemblies and Components - The cleaning, pre-treatment and painting or plating, for pallet assemblies and components shall be as specified on applicable drawings.

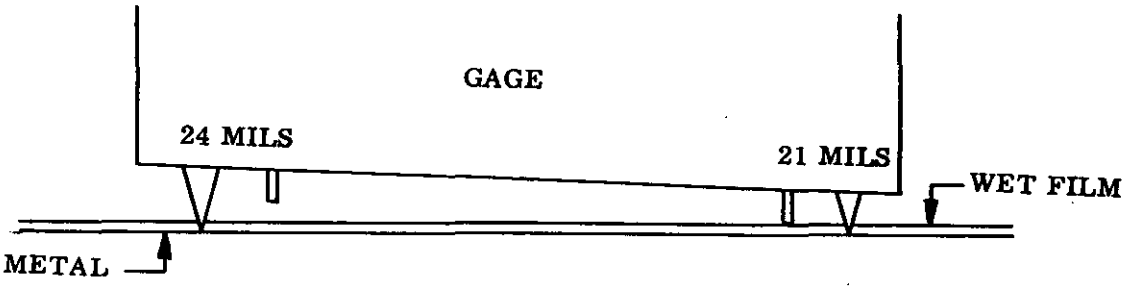


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

3.6 Identification of Product - The pallet and mat assemblies, and accessories shall be marked for identification in accordance with the applicable drawings and MIL-STD-130.

3.7 Workmanship - The workmanship displayed in extruding, fabricating, and assembling the mat assemblies, pallet and mat assemblies, and accessories shall be such as to assure, within design limitations, ability to meet their performance requirements under all applicable environmental conditions. Unauthorized repair, welding, heavy burrs, and parts assembled by introduction of high stresses not prescribed in design, are typical signs of inferior workmanship. The standards of workmanship exhibited in any approved sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

3.7.1 Machining - Mat extrusions shall be firmly clamped to a flat surface for full width of mat with sufficient pressure during machining to insure connector groove and skin thickness within drawing tolerances.

3.7.2 Welders and Welding -

3.7.2.1 Welding Procedures - Welding procedures shall be in accordance with MIL-STD-278 for class "M" weldments or as specified on the applicable drawings.

3.7.2.2 Welder Qualification - Where manual or semi-automatic welding is required, welders shall maintain current qualifications under MIL-STD-248 (Qualification Tests for Welders). The test shall be for "Flat Groove Welding Position" as shown in Figure 3, MIL-STD-248, for qualification test number 1 in the flat position. Bend tests are not required. The weld test specimen shall be sectioned without removal of the backing strip. Examination of the weld section shall be made in at least three (3) areas. The etched section shall show complete fusion, 100 percent penetration, and freedom of gas holes or cracks or both. Where machine welding is required, a machine set-up schedule shall be established as determined by test specimens. Requirements for these tests are:

(a) The test specimens shall show a weld that has full penetration as specified on the drawings.

(b) The test specimen shall be either from a production mat or a simulated sample which represents the mat assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

(c) Weld sections shall be uniform, completely fused, free of cracks, gas holes or other harmful defects. Weld profile shall be flush (plus .015, minus .003) with mat surface for all welding performed on the top surface (non-skid coating side) of the mat and not project more than 1/32" above other surfaces. Concavity of a groove weld will not be permitted. Prior to any production welding each welding machine shall be tested and certified as above. If after certification, the settings of the machine are changed in any way, re-certification is required. Certification of welders and welding machines shall be made by cognizant inspection activity.

3.7.2.3 Welding Practices - All long straight welds such as connector to mat extrusion (or extrusions) weld or the longitudinal weld for the two-piece mat assembly shall be performed by machine welding. Mat extrusions shall be firmly clamped to a flat surface for full width of mat and end connectors shall be securely clamped and aligned prior to and during welding. The edges or surfaces of the parts to be welded shall be free from moisture, grease, paint, or other foreign matter. The weld shall be flush (plus .015, minus .003) on the top surface (non-skid coating side) of the mat and not project more than 1/32-inch above other surfaces. If excess convexity or crown is present, weld metal may be removed to maximum limit. Concavity of the groove weld profile shall not be permitted. Concave groove welds shall be rewelded. There shall be no crater, longitudinal or transverse cracks in the weld metal or extending into the base material. Cracks may be repaired by removing the defective area and rewelding. Welds shall have complete fusion. Insufficiently fused welds may be repaired by removing the weld deposit and rewelding. Pin holes 1/16-inch deep or less and more than 1/2-inch apart are acceptable. Any small continuous concentrated surface defects, such as voids or holes, more than 1/16-inch deep and less than 1/2-inch apart, shall be rewelded. Any surface defects such as voids or holes, more than 1/16-inch deep or more than 1/4-inch in any direction, are not acceptable and shall be rewelded. All surface irregularities, such as non-uniformity of weld ripples, varying widths of weld beads, variation in height of weld-crown due to ripples or starts and stops of weld beads shall not be classified as defects and will remain as deposited when weld deposit is full width of joint and complies with other requirements specified herein. Desired surface or contour of weld bead shall be as specified on detail drawing. Portions of interlocks which mate with adjacent mats shall be free from weld spatter which would interfere with proper fit with adjacent mats and insertion of locking bars.

3.7.2.4 Finishing - Paint shall be free from blisters, pockets, lumps, thin or bare spots, scratches, runs and sags. Bolt holes and portions of interlocks which mate with adjacent mats shall be free from non-skid material and excessive amounts of paint which would interfere with proper fit with mating parts.

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:15Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Components and Material Inspection - The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of Inspection - Inspection shall be classified as follows:

(a) Initial Production Inspection (see 4.3).

(b) Quality Conformance Inspection (see 4.4).

(c) Inspection Comparison (see 4.6).

(d) Inspection of Preparation for Delivery (see 4.7).

4.3 Initial Production Sample - The initial production sample shall consist of nine (9) full landing mats or nine (9) half mats selected at random as early as possible in the production period. The samples shall be subjected to all examinations and tests prescribed herein. The examination and tests will be conducted in the presence of a government representative (see 4.5.2.3).

4.3.1 Inspection Failure - Failure of an initial production landing mat to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 and 4.5 shall be cause for rejection of the initial production landing mat(s) and shall be cause for refusal by the government to continue acceptance of landing mats until evidence has been provided by the supplier that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the supplier at no cost to the government on landing mats previously accepted and produced under the contract. Any deficiencies found as a result of the initial production testing will be considered prima facie evidence that all landing mats accepted prior to the completion of initial production testing are similarly deficient unless evidence to the contrary is furnished by the supplier and such evidence is acceptable to the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

4.4 Quality Conformance Inspection -

4.4.1 Lot - Lot formation shall be in accordance with MIL-STD-105.

4.4.2 Unit of Product - The unit of product for examination and tests shall be one (1) complete landing mat. Samples for adhesive test shall be performed on specimens specified in 4.5.2.2.

4.4.3 Sampling - Sampling for visual characteristics, tests, and dimensions other than those specified herein shall be in accordance with MIL-STD-105, Inspection Level II.

4.4.4 Examination - Samples selected in accordance with 4.4.3 shall be examined for defects specified in 4.5.1. The AQLs shall be 6.5 for visual and 2.5 percent defective for dimensional characteristics.

4.4.5 Tests - Each sample selected in accordance with 4.4.3 shall be tested as specified in 4.5.2.1.

4.5 Inspection Procedure -

4.5.1 Examination - Each sample landing mat and accessories shall be examined for the following defects:

101	Design not as specified
102	Dimensions not as specified.
103	Material not as specified.
104	Surface flatness not within specified tolerance.
105	Welds not sound; not free of voids, porosity, completely fused, free of cracks, or weld profiles exceed specified tolerance.
106	Weld repairs not in accordance with specified procedures.

NOTE: Above characteristics shall be examined prior to application of paint and non-skid compound. (Lot identity shall be maintained).

107	Painted surfaces not properly finished.
108	Excessive paint or non-skid compound on mating surfaces of interlocks.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T05:15Z
Check the source to verify that this is the currentversion before use.

109 Non-skid coating not uniform or applied as specified.

110 Workmanship not as specified.

111 Identification marking not legible or missing.

4.5.1.1 Extrusion Examination - The controlling extrusion dimensions shall be inspected in accordance with the sample formats shown in Figures (2) through (5). The extrusion requirements for AM2 landing mats shall be in accordance with applicable drawing dimension and tolerances. Die welds shall be checked. Each extruder shall incorporate an identifying mark into each basic mat extrusion. An initial production sample of each type extrusion shall be inspected by contractor prior to the production run. Inspection will also be required prior to the use of a new or modified die for a production run. In addition, the extruder shall provide periodic inspections of samples during each production die run which will insure that the contractor has adequate control over all die changes and/or modifications. All samples which are checked dimensionally shall be held together with records until data can be verified by Government Quality Assurance Representatives.

4.5.1.1.1 Failure - Failure of an initial production sample to pass any of the inspections specified herein shall be considered cause for refusal by the Government to conduct further inspection until objective evidence has been provided by the supplier that corrective action has been taken.


4.5.2 Tests -

4.5.2.1 Adhesion Test (Anti-Skid Compound) - Testing of samples selected in accordance with 4.4.3 shall be performed on specimens 6 x 6 x 1/8 inches which conform to the material requirement of the AM2 Landing Mats. After surface treatment, the test specimens shall be coated with the specified non-skid compound and oven-dried along with the mats.

Each specimen shall then be centrally positioned on a 15 by 15 by 2 inch steel horizontal base plate. A 4 by 4 inch centrally located area on the coated side shall be subjected to 25 impacts of a two-pound steel ball dropped from a height of 8 feet. The ball shall be held in a fixed position by means of an electric magnet provided with a centering tip above the specimen and dropped so that each impact area on the specimen shall be 3/4 inch on center from the preceding impact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

MAT EXTRUSION R.H., AM-2 LANDING MAT
NAEL (SI) P/N 509860-1 & -2

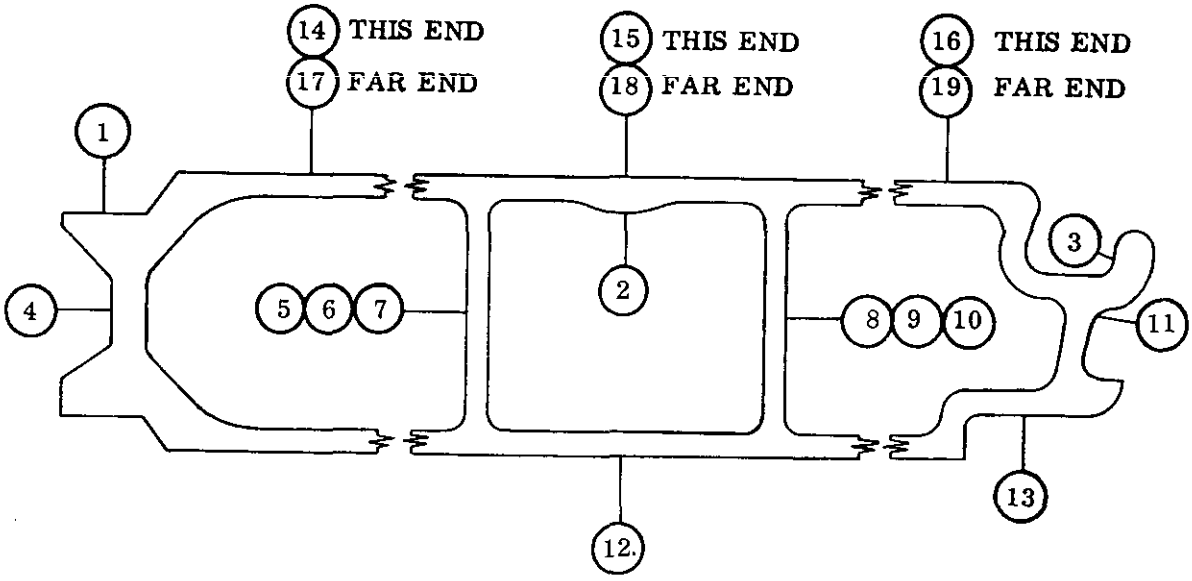


NO.	ACT. DIM	MAX.	MIN.	NO.	ACT. DIM	MAX.	MIN.
1		1.107	1.083	13		.180	.140
2		.192	.152	14		1.530	1.470
3		.207	.167	15		1.530	1.470
4		.207	.167	16		1.530	1.470
5		.150	.110	17		1.530	1.470
6		.150	.110	18		1.530	1.470
7		.150	.110	19		1.530	1.470
8		.150	.110	20			
9		.150	.110	21			
10		.150	.110	22			
11		.180	.140	23			
12		.160	.120	24			

SIGNATURE OF INSPECTOR

Figure (2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

MAT EXTRUSION L.H., AM-2 LANDING MAT
NAEL (SI) P/N 509861-1 & -2

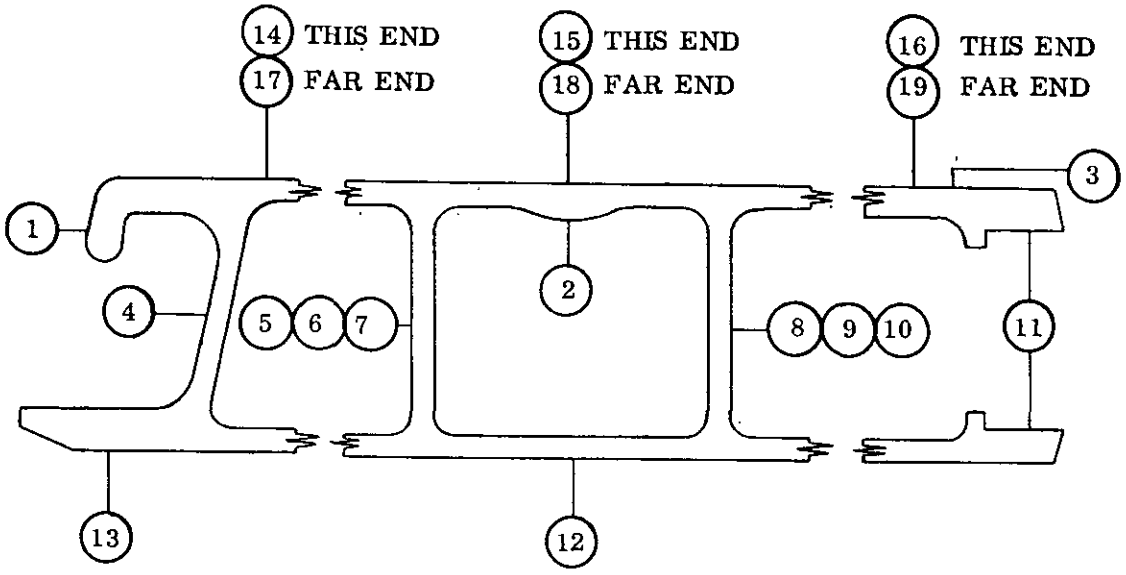


NO.	ACT. DIM.	MAX.	MIN.	NO.	ACT. DIM.	MAX.	MIN.
1		.207	.167	13		.238	.198
2		.192	.152	14		1.530	1.470
3		.176	.136	15		1.530	1.470
4		.180	.140	16		1.530	1.470
5		.150	.110	17		1.530	1.470
6		.150	.110	18		1.530	1.470
7		.150	.110	19		1.530	1.470
8		.150	.110	20			
9		.150	.110	21			
10		.150	.110	22			
11		1.121	1.069	23			
12		.160	.120	24			

SIGNATURE OF INSPECTOR

Figure (3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

MAT EXTRUSION 24 IN. WIDTH, AM-2 LANDING MAT
NAEL (SI) P/N 506389-3 & -4

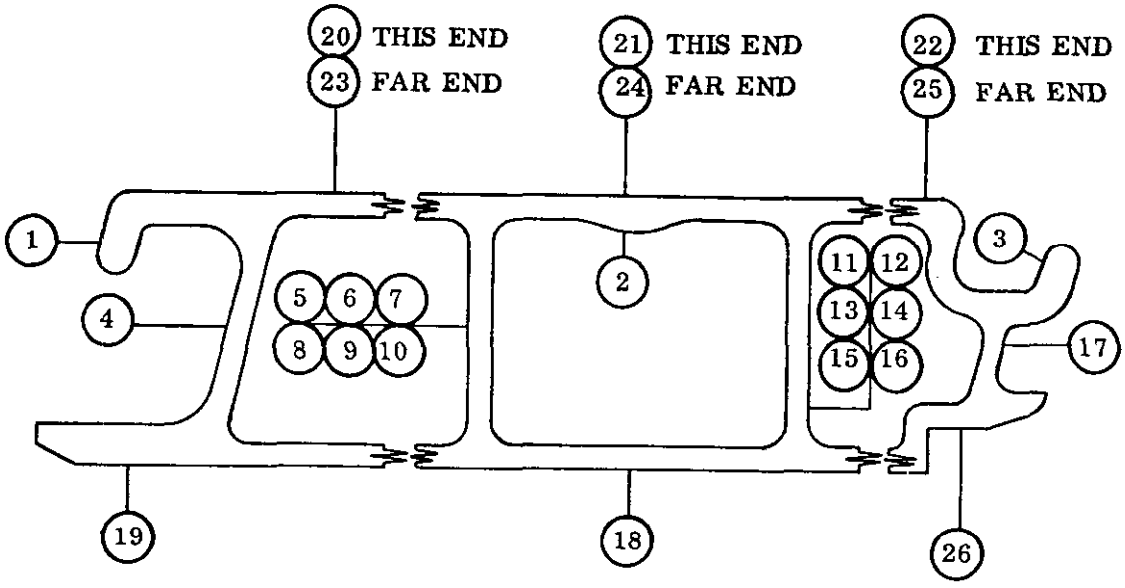


NO.	ACT. DIM.	MAX.	MIN.	NO.	ACT. DIM.	MAX.	MIN.
1		.207	.167	14		.160	.120
2		.192	.152	15		.160	.120
3		.207	.167	16		.160	.120
4		.180	.140	17		.180	.140
5		.160	.120	18		.160	.120
6		.160	.120	19		.238	.198
7		.160	.120	20		1.530	1.470
8		.160	.120	21		1.530	1.470
9		.160	.120	22		1.530	1.470
10		.160	.120	23		1.530	1.470
11		.160	.120	24		1.530	1.470
12		.160	.120	25		1.530	1.470
13		.160	.120	26		.180	.140

SIGNATURE OF INSPECTOR

Figure (4)

Source: https://assist.dla.mil -- Downloaded: 202640-23T05:15Z
Check the source to verify that this is the current version before use.

CONNECTOR, AM-2 LANDING MAT
NAEL (SI) P/N 506388-1 & -2

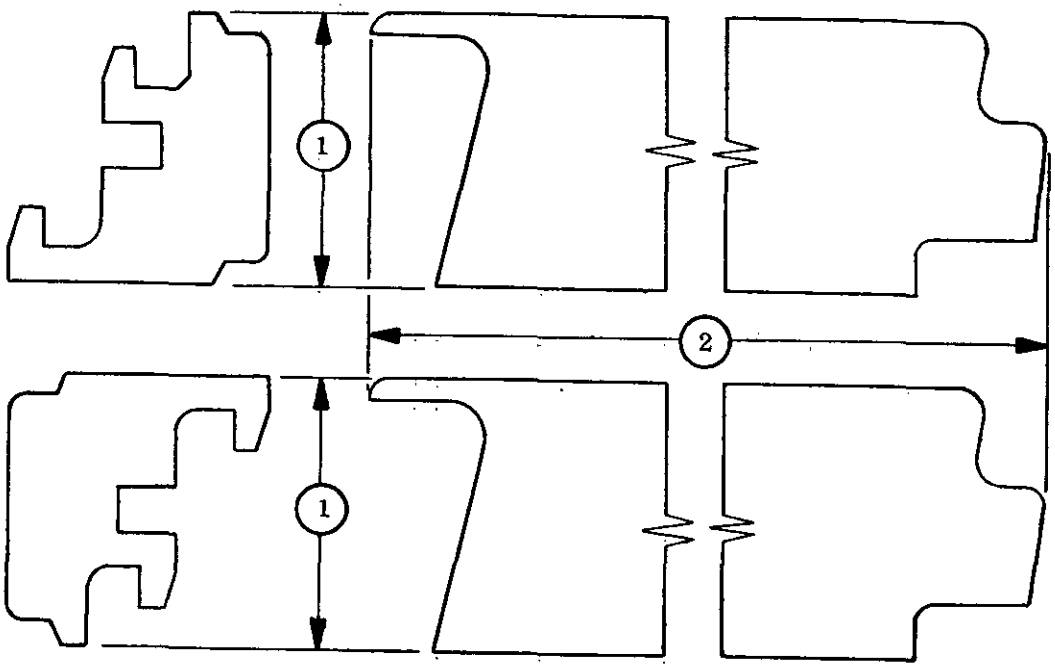

506388-1				506388-2			
NO	ACT.DIM.	MAX.	MIN.	NO.	ACT. DIM.	MAX.	MIN.
1		1.53	1.47	1		1.53	1.47
2		23.15	23.09	2		23.15	23.09

SIGNATURE OF INSPECTOR

Figure (5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:15Z
Check the source to verify that this is the current version before use.

When tested as specified, the compound shall show no more than slight cratering or slight flaking in the area of impact. A test failure shall be reason for immediate corrective action by the contractor. After correction, the test shall be repeated. Final acceptance shall not be made of the landing mats until it is determined that all the specified requirements have been complied with.

4.5.2.2 Assembly Test - The initial production sample, selected in accordance with 4.3, shall be tested by assembling the panels in the following manner: The first nine (9) mat assemblies (full or half) off the fabrication line will be assembled in three (3) rows, three (3) mats across, in a brickwork pattern. Panels shall be assembled with locking bars to insure assembly and interchangeability.

NOTE: The initial production sample shall be delivered as the last units of supply under the contract. During the course of the contract, samples shall be so identified as to prevent inadvertent delivery by the contractor.

4.6 Inspection Comparison - From every 1000 mats (or fewer at the option of the contractor) fabricated thereafter, three (3) mats will be selected at random and assembled as follows: Remove the middle mat from each row of the original configuration (see 4.5.2.2) and install the random selected mats with locking bars. If the random selected mats do not fit, then the mat production lot shall be placed in a hold status until causes for the misfit can be ascertained and a corrective course of action determined.

4.6.1 Inspection Failure - Failure of any landing mat when inspected as specified in 4.6 shall be considered cause for refusal by the government to continue acceptance of landing mats until objective evidence is furnished by the contractor which reveals that corrective action has been taken to eliminate the conditions which caused the rejection.

4.7 Examination of Preparation for Delivery - An examination shall be made to determine compliance with the packing and marking requirements specified in Section 5 of this specification. Defects shall be as scored below. The lot size shall be the number of pallet assemblies fully prepared for delivery. The inspection level shall be II and the acceptable quality level shall be 4.0 defects per 100 units.

Examine	Defects
Marking	Missing, illegible, incorrect or incomplete.
Materials	Any component damaged, affecting serviceability.
Workmanship	Pallets fail to conform to the applicable drawings or as specified in contract or order.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T05:15Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packing, Level A -

5.1.1 Twelve Mat Pallet - Packing shall conform to the requirements as specified in Drawing 610165.

5.1.2 Eighteen Mat Pallet - Packing shall conform to the requirements as specified in Drawing 613370.

5.2 Marking - In addition to any special markings required by the contract, order, or drawing, each pallet and mat assemblies shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended Use - The AM2 airfield landing mats are extruded aluminum alloy panels intended to be surface material to provide the level runway, taxiway, and parking area for expeditionary airfields and other uses as conceived by the using activities. The accessories required for each airfield installation will be different for each application because of varying geographical and geological conditions and launching, recovery, and servicing gear configurations.

6.1.1 The mats and accessories are designed to support normal military operations of a fully loaded F4 airplane (59,000 pounds) exerting a 27,000 pound single-wheel main gear assembly load with a 30-7.7 tire inflated to 400 psi.

6.2 Ordering Data - Contracts or orders should specify the following:

(a) Title, number and date of this specification.

(b) Applicable part number of mat, component, pallet and mat assembly or accessories required (see 3.3).

(c) Whether single-section or two-section mat extrusion shall be furnished (see 3.3.1).

(d) Packing instructions if different than drawing (see 5.2).

(e) Items of data required (see 6.3).

(f) Initial production inspection (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:15Z
Check the source to verify that this is the current version before use.

(g) Shipping instructions - to prepare for shipment to fabricators, the extruder shall assemble the two-piece type matting and shall forward the pieces so assembled, i.e., the male-end fitting into the female end at the welded joints.

6.2.1 Contracts or orders should specify the following provisions for initial production inspection:

6.2.1.1 Whether initial production inspection is required. When a contractor is in continuous production of the items from contract to contract, consideration should be given to waive the initial production inspection. If initial production inspection is required, indicate:

(a) Where inspection or inspections are to be conducted (at the contractor's plant or Government or commercial laboratory).

(b) That the costs including testing and transportation to and from the test facility will be borne by the contractor.

(c) That the approval of initial production sample or the waiver thereof shall not relieve the contractor of his obligation to fulfill all other requirements of the specification and contract.

6.3 Data - For the information of Contractors and Contracting Officers, any of the data specified in (a) applicable documents listed in Section 2 of this specification; or (b) referenced lower-tier documents need not be prepared for the Government and shall not be furnished to the Government unless specified in the contract or order. The data to be furnished shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order. NavWeps Form 4200/15 (Drawings, Lists, and Specifications Required) shall be attached where applicable.

6.3.1 A welding schedule for each welding machine shall be provided in accordance with MIL-STD-278.

CUSTODIANS:

ARMY - ME
NAVY - AS
AIR FORCE - 84

REVIEW:
ARMY -
NAVY - YD
AIR FORCE - 85

PREPARING ACTIVITY:

NAVY - AS
DOD PROJECT NO. 5680-0037

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:15Z
Check the source to verify that this is the current version before use.