MILITARY SPECIFICATION
SWITCH, HYDROSTATIC, MARK 110 MOD 0

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy.

1. SCOPE

1.1 This specification establishes the requirements for the procurement of Switch, Hydrostatic, Mark 110 Naval Ordnance Systems Command, LD 516069. The Switch, Hydrostatic, Mark 110 is of one type and one class.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-7866A	Molybdenum Disulfide Powder, Lubricant

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests for

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:55Z
Check the source to verify that this is the current version before use.

DRAWINGS

NAVAL ORDNANCE SYSTEMS COMMAND

LD 516069	Switch, Hydrostatic, Mark 110 Mod 0
DL 2288057	Container (Inner) for Hydrostatic Switch Mark 110 Mod 0
DL 2288099	Container (Outer) for Hydrostatic Switch Mark 110 Mod 0

CLASSIFICATION OF DEFECTS

NAVAL ORDNANCE SYSTEMS COMMAND

CD 2280044	Switch, Hydrostatic, Mark 110 Mod 0

PUBLICATIONS

(Copies of standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained by the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following publications form a part of this document. Unless otherwise indicated, the issue in effect on the date of invitation for bids shall apply.

NATIONAL BUREAU OF STANDARDS PUBLICATIONS

Handbook H28	Screw thread standards for the Federal Services.

(Copies are available from the Superintendent of Documents, Government Printing Officer, Washington D. C.)

3. REQUIREMENTS

3.1 Description. -The Switch, Hydrostatic, Mark 110 Mod 0 is a pressure responsive switch which closes four (4) electrically independent circuits as a predetermined hydrostatic pressure is applied to a diaphragm of the mechanism. The Hydrostatic Switch includes a multiple conductor cable for connecting the assembly within mine circuitry. The pressure response of the Hydrostatic Switch is such that all circuits remain open under a hydrostatic pressure of less than 6.7 feet of seawater and must have closed at 17.3 feet of seawater or less.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:55Z
Check the source to verify that this is the current version before use.

3.2 General requirements.

3.2.1 Preproduction sample. - A preproduction sample of the switch shall be manufactured using the methods, procedures and processes, and at the same location proposed for full production. This sample shall be inspected as specified in section 4 herein for the purpose of determining compliance with this specification and the design (See 4.3.1).

3.2.2 Fabrication. - The Hydrostatic Switch shall be manufactured in accordance with LD 516069, all documents listed therein, and as specified herein. Inspection and acceptance shall be in accordance with 4.

3.2.3 Conflicting requirements. - Conflicting requirements arising between this specification and any specification, publication, or drawing listed herein shall be referred in writing to the procuring agency or appointed agent for interpretation, clarification and resolution.

3.2.4 Data. - No data is required by applicable documents referenced in Section 2, unless specified in the contract or order.

3.3 Performance requirements and product characteristics. - The hydrostatic switch shall meet the following performance requirements and product characteristics:

3.3.1 Cleanliness. - All components of the switch shall be free of moisture, corrosion, dirt, dust, metal chips, filings or other such foreign matter at the time of assembly and packaging. The assembled device shall be completely free of all lubricants except for the diaphragm which shall be lubricated as called for on the drawings.

3.3.2 Diaphragm lubrication. - Place 25 diaphragms in a one gallon container with 1/2 pound of Molybdenum Disulfide conforming acceptably with the requirements of MIL-M-7866A. The container shall then be sealed and clamped within a suitable paint shaker such as the No. 30 Red Devil Paint Conditioner, manufactured by the Pittsburgh Plate Glass Company, Pittsburgh, Pennsylvania, or equivalent. The container shall be vibrated at maximum amplitude for no less than 5 minutes. Upon removal from the container all excess lubricant shall be lightly shaken from the diaphragm before assembly with the piston. While the above procedure has been found satisfactory, other apparatus and methods may be resorted to by the manufacturer providing equivalent results are obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

3.3.3 Diaphragm, piston and retaining ring assembly. - The lubricated diaphragms shall be assembled on the pistons by pressing the washers down firmly against the diaphragms by means of the retaining rings until the rings snap positively into the piston grooves. After the retaining rings have been securely seated in the grooves, the piston assemblies shall be installed in their proper positions in the housing assembly. The cover assemblies shall then be placed in position over the diaphragms and the housing retaining rings shall be securely seated in the housing grooves. Following assembly, all retaining rings shall be seated in their respective grooves with the proper washers in place.

3.3.4 Switch piston manual operation requirement. - Prior to mounting the cover assembly over the switch piston and diaphragm assembly the switch piston shall move freely within its guide from fully retracted to fully extended position without binding or sticking.

3.3.5 Safety pin. - Following assembly of the switch, the safety pin shall insert to lock the switch piston in retracted position.

3.3.6 Soldering. - All connections shall be soldered using solder and flux as specified on the drawings. All loose and excess solder shall be removed immediately after each soldering operation. All flux shall be removed.

3.3.7 Contact pressure. - Each switch contact prong shall bear against the piston with a force of not less than 60 grams. This requirement shall be met with the piston in either its retracted or extended position.

3.3.8 Contact resistance. - The contact resistance of each closed switch shall not exceed 0.2 ohms when measured at the terminal lugs of the CA-1002 Cable Assembly.

3.3.9 Insulation resistance. - At atmospheric pressure the electrical resistance between each terminal lug and each other lug of the cable as well as between each terminal lug and the body of the device, shall show a resistance of not less than 50 megohms as measured under an applied potential of 500 volts d. c. This insulation resistance value shall be met after conditioning the device for 24 hours at a relative humidity of 75 ± 5 percent and a temperature of 77 degrees ± 2 degrees F and while the device is at this specified condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

3.3.10 Leakage. - The switch with the safety pin removed shall be capable of withstanding without leakage consecutively applied air pressures of 2 and 60 psi when applied to the sea side of the plate and diaphragm as defined in the test of 4.5.9.

3.3.11 Pressure operation. - As a pressure of 3 pounds per square inch is applied to the sea side of the device, none of the switches of the mechanism shall have closed. Upon an increase in pressure to 7.7 pounds per square inch all switches of the mechanism shall have closed. Upon reduction of the pressure to between 1 and 1-1/2 psi, all switches of the device shall be open to meet the test of 4.5.12.

3.3.12 High pressure requirement. - The switch, with the safety pin removed, shall meet all requirements of this specification after a fluid pressure of 600 psi has been applied to the sea side of the mechanism for no less than 3 minutes.

3.3.13 High pressure safety requirement. - The switch, with the safety pin in place, shall withstand without switch closure, a fluid pressure of 600 pounds per square inch applied to the sea side of the mechanism for not less than 3 minutes.

3.4 Durability. requirements.

3.4.1 Vibration.

3.4.1.1 Ready-non-operating. - The switch, with the safety pin in place, shall meet acceptably all performance requirements and product characteristics of this specification after being subjected to the vibration, ready-non-operating test of 4.6.1.

3.4.2 Shock.

3.4.2.1 Shock, ready-non-operating. - The switch, with the safety pin removed, shall meet acceptably all performance requirements and product characteristics of this specification after being subjected to the shock test specified in 4.6.2.

3.4.3 Operating temperature. - The switch shall operate in a manner to meet acceptably all performance requirements and product characteristics of this specification at any temperature between 28 degrees F and 98 degrees F.

3.4.4 Storage temperature. - The switch, packaged and packed as specified in section 5, shall operate in a manner to meet acceptably all performance requirements and product characteristics of this specification after being subjected to the 14 day temperature cycling test defined in MIL-STD-331, Test 105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. - The equipment, including all parts and accessories, shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention shall be paid to neatness and thoroughness of assemblage, and freedom of parts from burrs and sharp edges. The workmanship of the preproduction samples will be carefully evaluated, and will thereafter form a minimum acceptance level of workmanship for the subsequent production hardware. When preproduction samples are waived because of having been submitted on a recent contract, the standards of workmanship exhibited by the previously submitted preproduction sample shall determine the minimum requirement of the current contract relative to workmanship.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. - Inspection of the items covered by this specification shall be classified as follows:

a. Preproduction inspection (See 4.5 and 4.6)
b. Quality conformance inspection (See 4.5)
c. Periodic production inspection (See 4.6)

4.3 Inspection.

4.3.1 Preproduction sample. - A preproduction sample of 20 hydrostatic switches shall be subjected to the examinations and tests detailed in 4.5 and 4.6 at an activity designated by the procuring activity. Acceptance of the sample shall be based on no defects in this sample. Further production of the hydrostatic switches by the supplier, prior to approval of the sample, shall be at the supplier's risk.

4.3.2 Quality conformance.

4.3.2.1 100 percent inspection. - Each unit shall be subjected to the examinations of 4.5.1 and tests designated as 100% in Figure 3. Any unit containing one or more defects shall be cause for regarding the unit as defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

4.3.2.2 Sampling. - Tests designated as sample tests in Figure 3 shall be conducted on a random sample selected from each production lot. No lot shall be shipped until the samples representing the lot have successfully passed the quality conformance sampling tests. Failure of a unit to pass any quality conformance sampling test shall be cause for regarding the lot from which the sample was selected as defective.

4.3.3 Periodic sampling tests. - After successful completion of the quality conformance inspection of 4.5, the periodic sampling tests of 4.6 shall be conducted on a random sample of ten (10) hydrostatic switches selected by the Government from each lot of hydrostatic switches offered for acceptance. When a unit fails to pass any periodic sampling test or specified subsequent quality conformance test, examination of the unit shall be made by the contractor to analyze the cause of the failure and corrective action to be taken. When cause of the failure is determined to be supplier nonconformance to the quality conformance test requirements of this specification and/or its associated drawings, the contractor may be required to screen the lot and repair or replace the discrepant part or material and resubmit the lot for complete retesting.

4.4 Test Equipment. - The following items or test equipment are required to perform the quality conformance inspection specified in 4.5:

a. Test Set Mark 250 Mod 0
b. Accessory Set Mark 20 Mod 0
c. Accessory Set Mark 5 Mod 0
d. Gram gage accurate to within ± 5% and equipped with a suitable probe for performing the test of 4.5.7.
e. Pressure vessel and apparatus capable of exerting 600 pounds per square inch fluid pressure to the sea side of the hydrostatic switch.
f. Pressure gaging equipment capable of measuring pressure up to 600 pounds per square inch.

4.5 Quality conformance inspection.

4.5.1 Examination. - Each hydrostatic switch shall be visually and dimensionally examined in accordance with CD 2280044 to determine compliance with this specification and its applicable drawings as specified in 3.2.2. Examination in accordance with CD 2280044 shall not relieve the contractor of his responsibility to meet all drawing requirements not listed on the CD. Unless otherwise specified the classification for non-

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:55Z
Check the source to verify that this is the current version before use.

conforming unlisted characteristics and workmanship defects shall be determined by the contracting officer.

4.5.2 Cleanliness test. - During assembly, carefully examine all components of the switch for the presence of corrosion, paint, dirt, dust, metal chips, filings, or the like. Any such forms of contamination except painted surfaces as specified on drawings shall be cause for rejection. Examine all parts for grease or oil. The presence of any form of lubricant except for that specified for the diaphragm shall be considered reason for rejection.

4.5.3. Diaphragm lubricant test. - Prior to assembly with the pistons, examine each diaphragm for proper lubrication coverage. Any diaphragm including a surface that is not lubricated shall be regarded defective.

4.5.4 Diaphragm, piston and retaining ring test. - Prior to assembly of the piston and diaphragm within the housing, note that the washer is present and the retaining ring is properly seated in the piston groove. Absence of the washer or an improperly seated retaining ring shall be cause for rejection. Examine the assembled device for an improperly seated retaining ring. Any assembly including such an improperly seated ring shall be rejected.

4.5.5 Piston manual operation test. - During assembly of the switch and prior to assembly of the cover assembly over the switch piston, manually depress the switch piston slowly to its fully extended position and slowly release. Any evidence of binding or sticking shall be cause for rejection.

4.5.6 Safety pin test. - With the switch completely assembled except for the safety pin and at atmospheric pressure, insert the safety pin as required for the pin to extend through the cover assembly to lock the piston in retracted position. Any assembly not permitting insertion of the safety pin as specified shall be regarded defective.

4.5.7 Soldering test. - With the switch cover removed, examine all soldered joints for an improperly secured connection, cold solder joint, flux joint, loose or excess solder. Inspect all wiring for any condition that could result in a short or circuit failure. The presence of any such condition shall be cause for regarding the assembly defective.

4.5.8 Contact pressure test. - With the switch cover removed, insert the probe of a gram gage, as defined in 4.4, beneath switch prong and lift the prong free of the piston. Any instance of a switch prong requiring a force less than 60 grams to deflect the prong from contact with the piston shall be cause for rejection. The device shall be capable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

of meeting the test of this paragraph with the switch piston retracted or extended.

4.5.9 Leakage test.- By means of Accessory Set Mark 20 Mod 0 mount the switch, with safety pin removed, in the Test Set Mark 250 Mod 0 with the sea side of the mechanism exposed to pressure of the pressure chamber. The other side of the mechanism shall be enclosed with the plastic chamber connected to the manometer. The secondary opening in the plastic chamber shall be open when the pressure in the pressure chamber is changing and shall be closed only during the testing interval when the pressure in the pressure chamber is constant. Increase the pressure in the pressure chamber to 2 + .5 - 0 pounds per square inch. Allow 30 seconds for creep of the diaphragm, then close the secondary opening in the plastic chamber. Movement of the oil in the sloping section of the manometer tube at a rate of 1.0 inch or more in 30 seconds shall be cause for regarding the assembly defective. With the device so mounted, increase the pressure in the pressure chamber to 60 ± 5 pounds per square inch. Movement of the oil in the sloping section of the manometer at a rate of 1.0 inch or more in 30 seconds, shall be cause for regarding the mechanism defective. During the foregoing test, the switch and the plastic cover shall be maintained at a constant temperature to prevent erroneous results in the manometer reading.

4.5.10 Insulation resistance test. - For this test the hydrostatic switch shall be mounted in the pressure pot of the Test Set Mark 250 Mod 0 as called for in 4.4 omitting the plastic chamber. The pressure in the pot shall, during first part of this test, remain at atmospheric. Connect numbered leads of the switch cable assembly CA 1002 to the corresponding numbered terminals of the terminal clip board attached to the Mark 250 Test Set. Rotate the selector switch to its "Insulation Resistance" position. Set the station selector switch on station 1 and depress the meter switch. Repeat this operation at stations 2, 3 and 4. In any instance, movement of the meter needle into the red or "Reject" area of the meter dial, shall be cause for regarding the device defective. Now increase the pressure to 7.7 + 0 - 0.4 pounds per square inch and set the station selector switch on station 5. Depress the meter switch. Movement of the meter needle into the "Reject" area shall indicate a defect. Repeat this test on stations 6 through 15. Upon completion of the foregoing test the pressure in the pressure pot shall be reduced to atmospheric. To facilitate production, ambient conditions may exceed the prescribed limits for acceptance but rejection of material shall be based on test conditions specified in 3.3.9.

4.5.11 Contact resistance test. - With the hydrostatic switch mounted in the Test Set Mark 250 Mod 0 as called for in 4.5.10,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

rotate the selector switch to the "Contact Resistance" position. Increase the pressure in the pressure pot to 7.7 + 0 - 0.4 pounds per square inch. At this pressure make the following test: Rotate the station selector switch to station 1 and depress the meter switch. Movement of the meter needle into the red or "Reject" area of the dial, shall be cause for regarding the device defective. Repeat the test with the selector switch at stations 2, 3 and 4. In any instance, a reading of "Reject" shall indicate a defect. Upon completion of the foregoing test the pressure in the pressure pot shall be reduced to atmospheric. A suitable pressure pot and resistance bridge may, if desired, be used for performing the above test.

4.5.12 Pressure operation test. - This test shall be conducted with the hydrostatic switch mounted in the Test Set Mark 250 Mod 0 as called for in 4.5.10. Prior to the test the test set shall be adjusted as follows: Regulate the adjustable solenoid valve to increase pressure from 0 to 10 + 1-0 pounds per square inch in 30 seconds with the control set at "Slow Intake" and to decrease pressure from 10 pounds per square inch to 0 pressure in 30 seconds with the control switch set on "Slow Exhaust." Move the pressure control switch to "Slow Intake" position and allow the pressure to rise to 3 + 0 - .2 pounds per square inch. At this pressure none of the switches shall have closed. Now increase the pressure to 7.7 + 0 - .4 pounds per square inch. All switches shall have closed. Reduce the pressure to between 1 or 1-1/2 psi. All switches shall now be open. Rotate the pressure pot to the inverted position. The switch shall be capable of meeting the above pressure operation requirements. Any instance of a device failing to respond as prescribed shall be cause for rejection.

4.5.13 High pressure test. - With the safety pin removed, mount the switch within a suitable pressure pot and apply a 600 ± 20 pounds per square inch fluid pressure to the seaward face of the mechanism. After a minimum of 3 minutes, release the pressure and examine the mechanism for leakage or such other damage as may conceivably affect proper function of the device. Any indication of leakage or damage shall be cause for regarding the device defective. After completing the above test the device shall be capable of meeting acceptably all performance and product characteristics requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

4.5.14 High pressure safety test. - With the safety pin securing the switch piston, mount the device within a suitable pressure pot and apply to the seaward face of the mechanism a fluid pressure of 600 ± 20 pounds per square inch for a minimum of 3 minutes. Release the pressure and examine the mechanism. A mechanism wherein the switch piston has moved to switch closing position shall be regarded defective. Sampling of the lot shall be in accordance with MIL-STD-105, Inspection Level S2 with rejection of the lot on the occurence of one or more defectives.

4.6 Durability tests.

4.6.1 Vibration, ready-non-operating. - The hydrostatic switch with the safety pin in place shall be rigidly fastened directly to the vibration table by either its normal mounting attachments or by its external case, whichever is appropriate. Simple harmonic excitation shall be applied parallel to each of the three principal axes of the hydrostatic switch for equal periods of time. The frequency range from 10 to 60 cps may be covered either by slowly cycling at a logarithmic rate between the limits, or by at least 24 discrete frequency steps which have a logarithmic distribution. The vibration amplitude shall be maintained at 2 ± .2g vector or 0.10 ± .01 inches (peak-to-peak) whichever is the lesser. The duration of the test in each direction is 4 hours. The total test duration shall be 12 hours. After completing the above test the hydrostatic switch shall be capable of meeting acceptably all performance and product characteristics requirements of this specification.

4.6.2 Shock, ready-non-operating. - The hydrostatic switch with safety pin removed shall be subjected to a continuous two-phase shock applied in any direction with respect to the mechanism.

a. The first (impact) phase shall consist of a change of velocity of 5.5 to 7.0 feet per second taking place in from 0.2 to 0.4 millisecond.

b. During the second (drag) phase, the hydrostatic switch shall be accelerated for a minimum of 15 milliseconds in such a manner that during this time the minimum average acceleration is 90 gravity units. The peak acceleration shall be between 125 and 150 gravity units. Upon completion of the above tests the switch shall be capable of meeting acceptably all performance and other requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

4.6.3 Storage temperature test. - The Hydrostatic Switch, packaged and packed in accordance with Section 5 shall be subjected to one 14 day JAN temperature cycle defined in MIL-STD-331, test method 105 except that the relative humidity in the chamber need not be raised above ambient or ambient as controlled. After completing the temperature cycle, the hydrostatic switch shall meet successfully all performance requirements and product characteristics of this specification. Operational tests shall be performed at ambient temperature.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level A.

5.1.1.1 Unit packaging. - Each hydrostatic switch shall be unit packaged in accordance with DL 2288057.

5.1.2 Level B. - (Not applicable)

5.1.3 Level C. - (Not applicable)

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior containers. - Four (4) hydrostatic switches individually packaged as specified under 5.1.1.1 shall be packed in accordance with DL 2288099.

5.2.2 Level B. - (Not applicable)

5.2.3 Level C. - (Not applicable)

5.3 Marking.

5.3.1 Special marking. - Unless otherwise specified in the contract or order, no special marking required.

5.3.2 Normal packing. - In addition to the markings required by contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129, including serial numbers, if applicable.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

6.1 Ordering data. - Procurement documents should contain the following:

a. Title, number and date of this specification.

b. Preparation for delivery shall be Level A.

c. If the contract or purchase order establishes periodic test sample sizes at variance with those specified herein, the contract or purchase order shall also furnish a new test plan or in some manner designate the desired quality level and sequence for each sample hydrostatic switch.

d. Special markings, if any.

e. If a month's scheduled production is not an acceptable lot size(see 6.3.2) the lot size shall be specified. If this occurs the sample size of 4.3.3 shall be modified accordingly.

f. Test equipment to be loaned by the Government and the terms under which it is loaned.

6.2 Calibration of Test Set Mark 250 Mod 0. - When the Test Set Mark 250 Mod 0 is used as a basis for acceptance for the Switch, Hydrostatic, Mark 110 Mod 0, it shall be the responsibility of the user to ascertain that during such test, the test set is operating in a manner to meet acceptably the requirements of Drawing 1183326, a part of LD 295720.

6.3 Definitions. - The following terms are used throughout this specification and are here defined for clarity.

6.3.1 Hydrostatic switch or switch. - Reference to "hydrostatic switch" or "switch" shall mean Hydrostatic Switch Mark 110 Mod 0.

6.3.2 Lot. - Unless otherwise specified in the contract or purchase order (see 6.1c), a "lot" size shall be one month's scheduled production.

6.4 Asterisks are not used in this revision to identify changes with respect to the previous issues, due to extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

Custodian:
Navy-NAVORDSYSCOM/NMEF GE

Review Activity:
Navy-NAVORDSYSCOM/NMEF GE

User Activity:
Navy-NAVORDSYSCOM/NMEF GE

Preparing Activity:
Navy-NAVORDSYSCOM/NMEF GE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

PREPRODUCTION TESTS FOR SWITCH, HYDROSTATIC, MARK 110 MOD 0
TESTS TO BE CONDUCTED AT CONTRACTOR'S PLANT

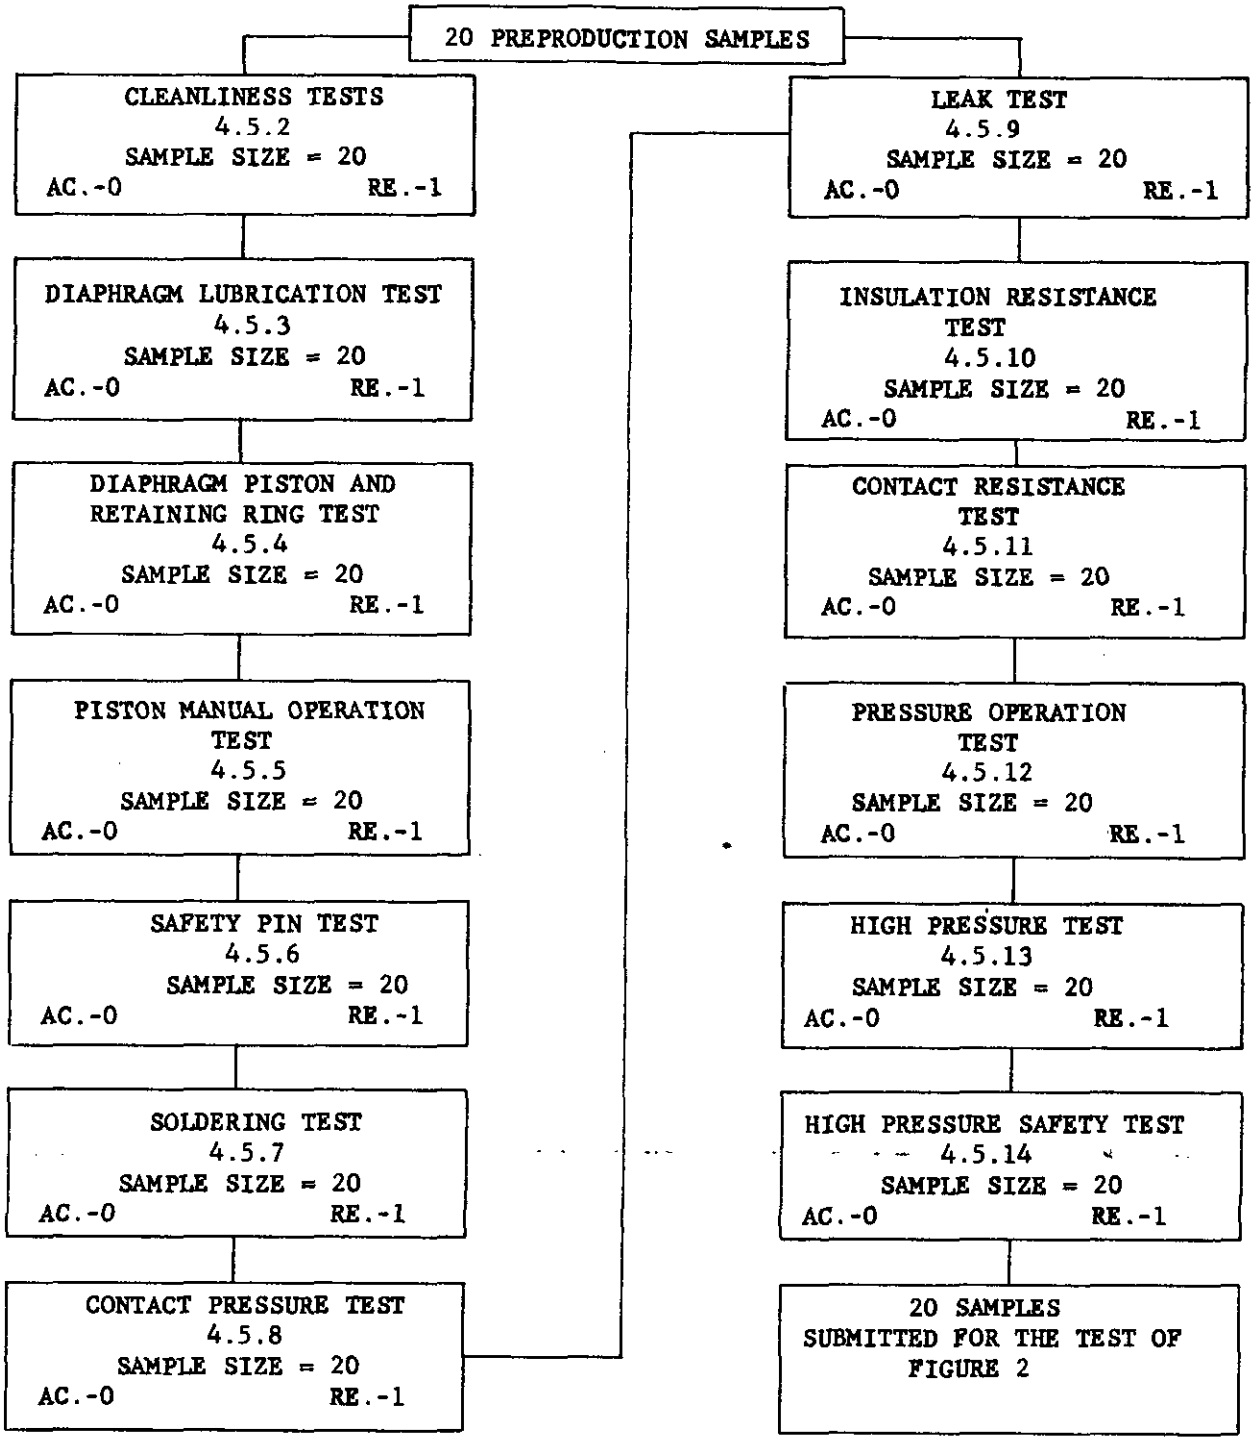


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:55Z
Check the source to verify that this is the current version before use.

PREPRODUCTION TESTS FOR SWITCH, HYDROSTATIC, MARK 110 MOD 0
TESTS TO BE PERFORMED AT GOVERNMENT DESIGNATED FACILITY

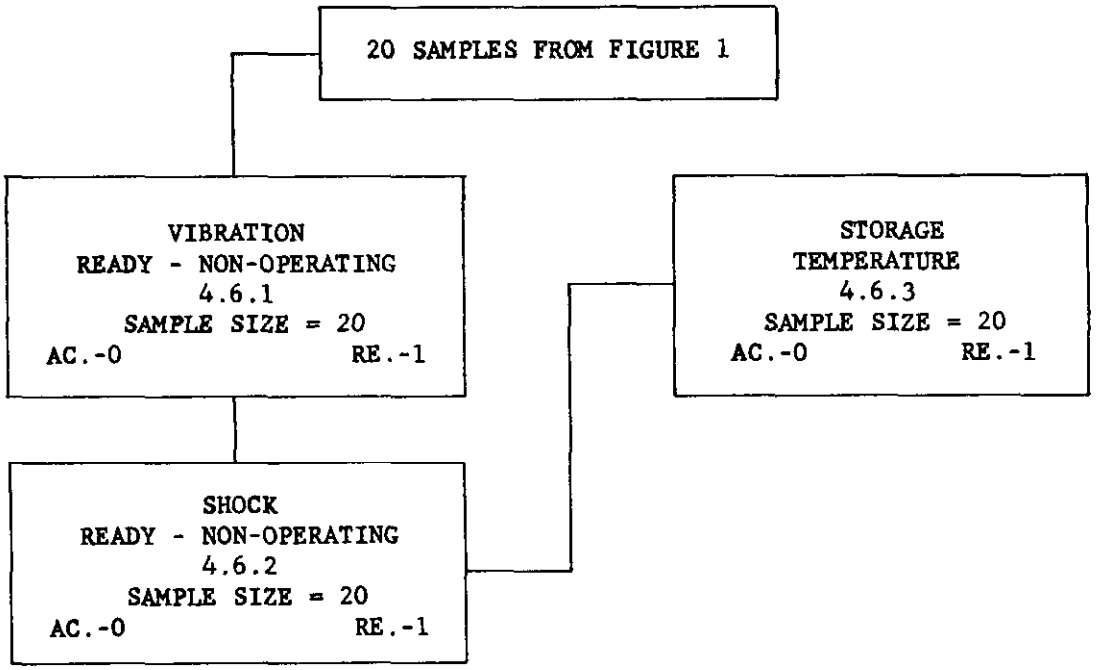


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:55Z
Check the source to verify that this is the current version before use.

ACCEPTANCE TESTS FOR SWITCH, HYDROSTATIC, MARK 110 MOD 0
TEST TO BE CONDUCTED AT CONTRACTOR'S PLANT
(Unless otherwise indicated sampling shall
be in accordance with MIL-STD-105)

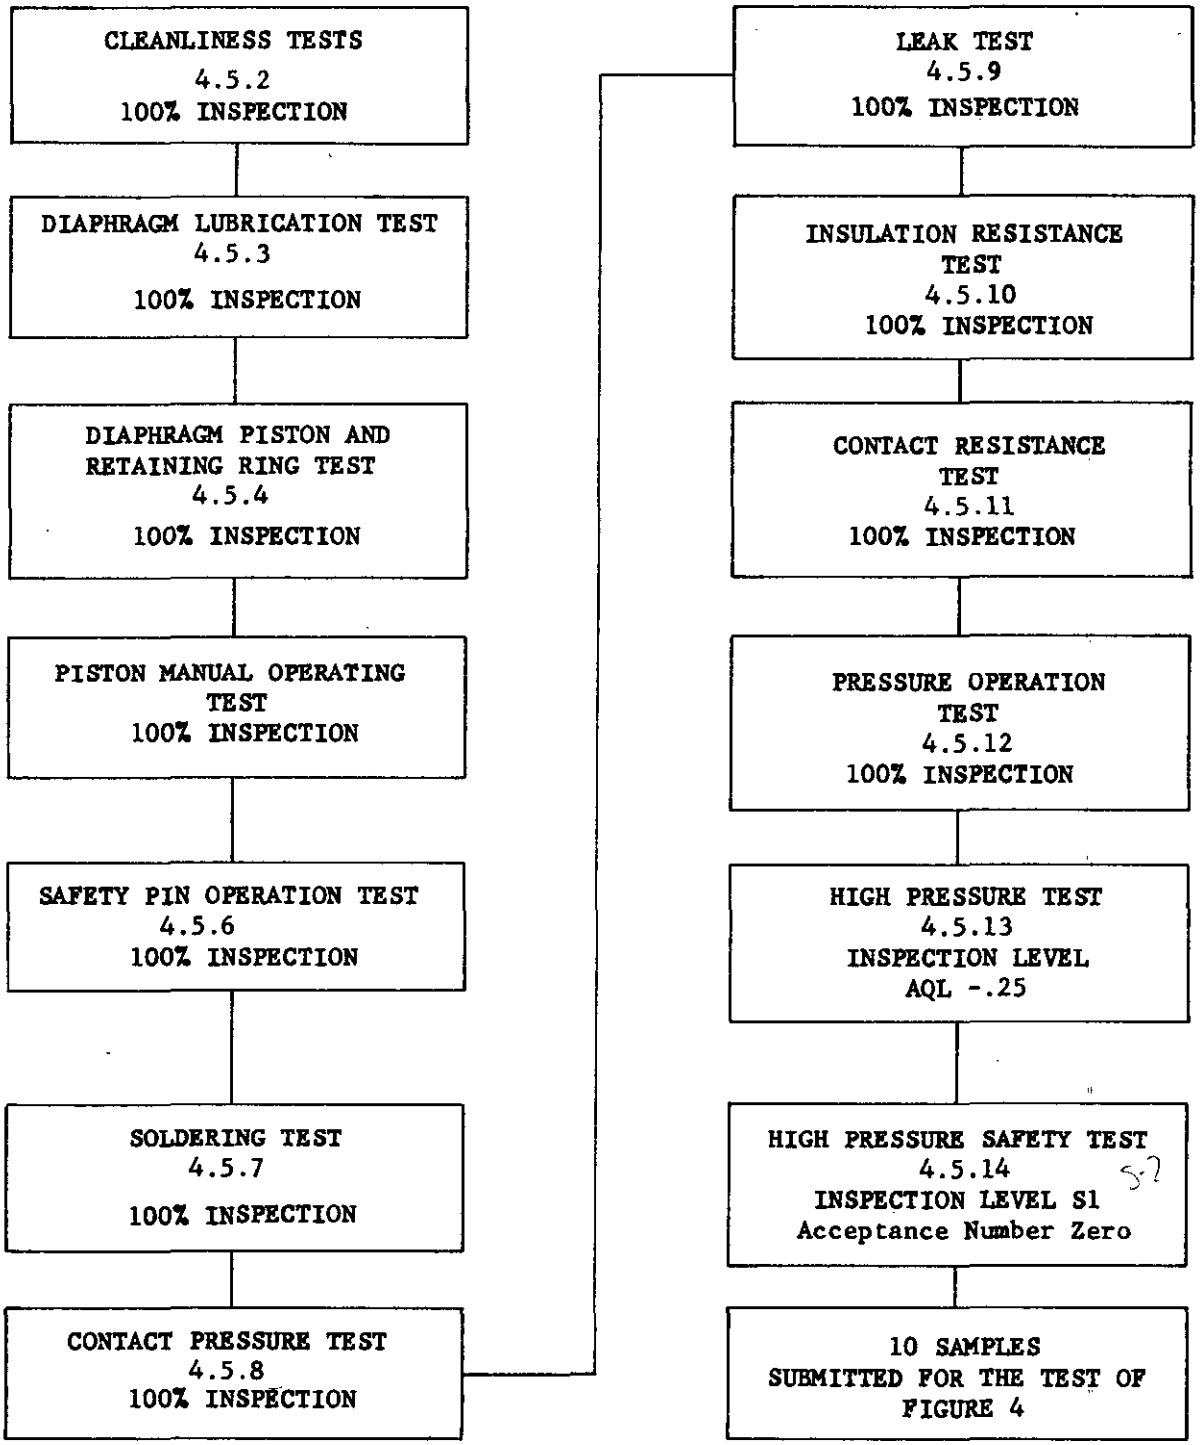


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

PERIODIC PRODUCTION TESTS FOR SWITCH, HYDROSTATIC, MARK 110 MOD 0
TESTS TO BE CONDUCTED AT GOVERNMENT DESIGNATED ACTIVITY

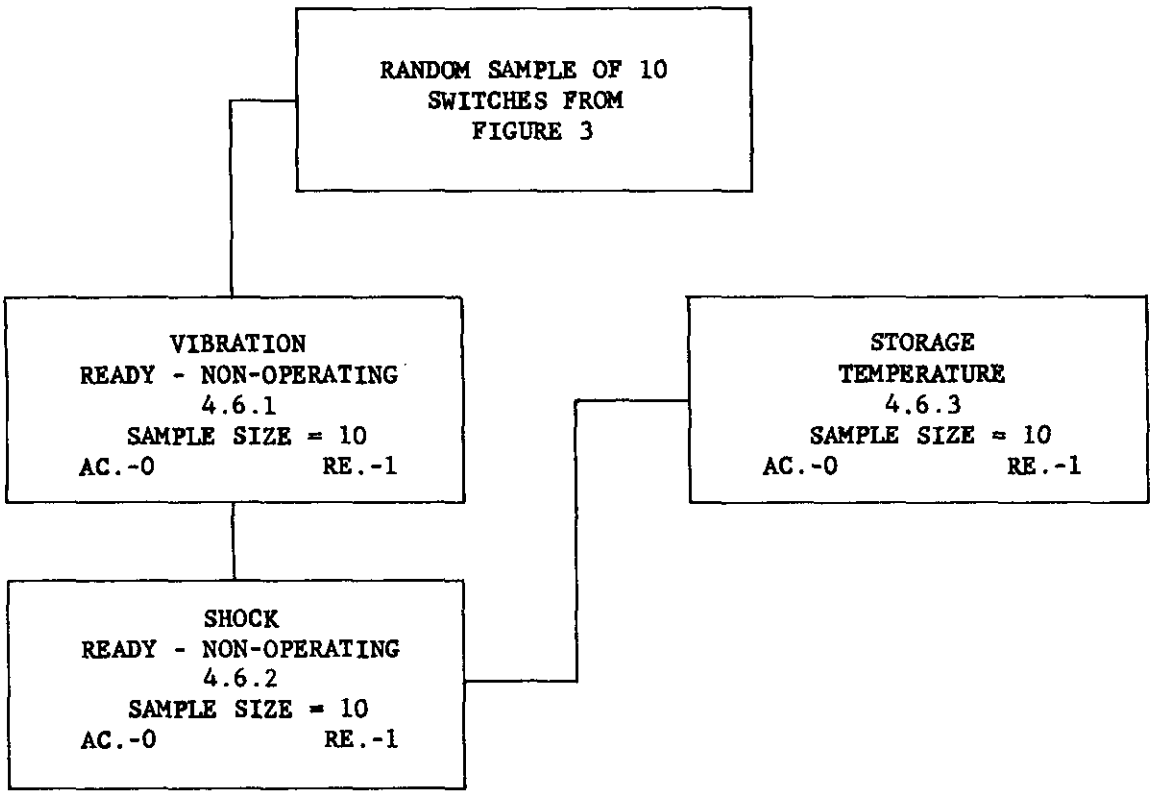


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL-S-81039A(OS) SWITCH, HYDROSTATIC, MARK 110 MOD 0

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-6378

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:55Z
Check the source to verify that this is the current version before use.