MIL-C-48286A (PA)
30 April 1975
Superceding
MIL-C-48286 (PA)
18 March 1974

MILITARY SPECIFICATION

CHARGE, MINE EJECTION ASSEMBLY: M198

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the inspection, tests and loading for the ejection charge used In the M56 Mine, Aircraft dispensing subsystem.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bid or requests for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-2550 - Ammunition, General Specification For
MIL-C-5541 - Chemical Films for Aluminum and Aluminum Alloys

STANDARDS

FEDERAL

FED-STD-151 - Metals; Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105)
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-286 - Propellants, Solid, Sampling, Examination and Testing
MIL-STD-810 - Military Standard Environmental Test Methods for Aerospace and Ground Equipment

FSC: 1345

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

MIL-STD-1168- Lot Numbering of Ammunition
MIL-STD-1235- Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

DRAWINGS

U.S. ARMY PICATINNY ARSENAL

*PRODUCT AND PACKAGING DRAWINGS

9287686 - Packing and Marking for Box, Wood for M198 Charge Assembly
9287690 - Cylinder
9287785 - Charge, Mine Ejection Assembly: M198

INSPECTION EQUIPMENT DRAWINGS

9278645 - Test Fixture for M198 Ejection Charge
9278651 - Test Equipment and Procedures for firing M198 Ejection Charge

(Copies of specifications, standards , and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity *or* as directed by the Contracting Officer).

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids shall apply.

*CODE OF FEDERAL REGULATIONS, TITLE 49 - TRANSPORTATIONS PARTS 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Office, Washington D.C. 20402. Orders shall specify CFR 100-199 (latest revision)).

3. REQUIREMENTS

3.1 Material. - Materials shall be in accordance with the applicable drawings and specifications.

*3.2 Assembly. - The charge assembly shall comply with all requirements specified on drawing (dwg.) no. 9287785, as applicable, all associated drawings and with all requirement specified in applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

*3.3 Performance. - Unless otherwise specified, all tests on the ejection charge shall be performed at ambient temperature.

*3.4 Immersion (Leakage) test. - The charge assembly shall show no evidence. of leakage while completely immersed in water in a sealed chamber, with the pressure in the chamber reduced below atmospheric pressure an amount equivalent to between one and one-half (1 1/2) to two (2) inches of mercury (Hg) for fifteen (15) seconds. After completion of this test, the charge assembly shall be capable of proper functioning.

*3.5 Environmental tests. -The charge assembly shall be capable of' proper functioning after being subjected to the following sequence of tests of MIL-STD-810B:

Temperature Shock - Method 503

Humidity (-Cycling) - Method 507, Procedure 1

Vibration -Method 514.1 Equipment Catalog C.- with.out vibration isolator

3.6 Mechanical Properties. - Cold-working or heat-treating (including quenching-and-tempering, normalizing, normalizing-and-tempering, annealing, and stress-relieving)" operations, shall be performed in such a manner as to produce the specified properties uniformly throughout' the" entire lot. The contractor shall determine the detailed procedures to produce parts meeting.the required mechanical properties. These procedures shall be documented and submitted with the first article sample to the Contracting Officer. Changes in these.procedures shall also be documented and submitted to the Contracting Officer.

3.7 Workmanship - All parts and assemblies shall be fabricated and finished in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any parts, nor shall the parts be contaminated by the cleaning agents. All marking and stamping shall be neat and sharply defined.

3.8 Submission o-f results of contractor-conducted examinations and tests. - **The contractor shall forward copies of the results of** my of his examinations or tests to the designated address as specified in 6.4.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:20Z
Check the source to verify that this is the current version before use.

3.9 Insulator Dielectric Strength Test. - The charge shall indicate no more "than a ten (10) microampere leakage current.

3.10 First article inspection. - This, specification contains technical rovision for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define terms used herein. The provisions of MIL-A-2550 shall apply.

4.1.1 Submission of Product. - At the time each completed lot of items deliverable under the contract is submitted to the Government for acceptance, the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted.

a. A statement that the lot complies with all of the quality assurance provisions specified in this specification.
b. Drawing and specification number and date, together with identification and date of changes thereto.
c. A statement that all material purchased by the contractor meets requirements, when such material is controlled by Government or commercial specifications referenced in any of the contractual documents; and that certificates of conformance are on file and available for review.
d. Number of items in the lot:
e. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:20Z
Check the source to verify that this is the current version before use.

shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agents authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.2 First Article Inspection

4.2.1 Submission. - Prior to the start of' regular production the contractor shall submit a first article sample (see 6.1c) to a Government approved facility as designated by the contracting officer for evaluation in accordance with the provisions of 4.2.2 and 4.2.3. The first article sample shall consist of:

a. Twenty-five (25) sets of Inert assembles.
b. Fifty (50) charge assemblies less propellant and wad.
c. Two hundred and seventy five (275) charge assembles.
d. Ten (10) charge plugs.

All parts and materials'including packaging and packing shall be obtained from the same source of supply as will be used in regular production. Prior to submission, the contractor shall Inspect the sample to the degree necessary to assure that It conforms to the requirements of the contract and submit a record of this inspection with the sample, including a certificate of conformance for materials. A sample containing known defects will not be submitted unless specifically authorized by the Contracting Officer. A first article sample, or portion thereof, as directed by the Contracting Officer, shall be submitted whenever there is a lapse In production for a period In excess of 90 days or whenever a change occurs In manufacturing process, material used, drawing or specification such as to significantly affect product uniformity as determined by the Government..

*4.2.2 Inspection to the performed. - Assemblies and components will be subj**ected by the Government to the** examinations and tests . . as follows:

a. Twenty-five (25) sets of inert parts shall be subjected to all of the applicable examinations and tests specified In 4.3.2 of this specification.

b. Salt spray. - Ten (10) charge plugs shall be subjected to. the test as specified In 4.3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T19:20Z
Check the source to verify that this is the currentversion before use.

Pushout Test of Primer. - Fifty (50) charge assemblies less propellant and wad, shall be subjected to the test as specified in 4.4.1.

d. Internal resistance of charge assembly. - Two hundred and seventy five (275) charge assemblies shall be subjected to the test as specified in 4.4.2. .

e. Immersion (Leakage) test, - Fifty (50) charge assemblies shall be subjected to the test as specified In 4.4.3.

f. Non-functioning. - One hundred and twenty five (125) charge assemblies shall be subjected to the test as specified in 4.4.4.

g. Environmental tests (see 3.5-). - Sixty (60) charge assemblies, after being subjected to and passing the non-function tests of 4.2.2.f, shall be subjected to the environmental tests as specified in 4.4.6. After the environmental tests they shall be functioned as specified in 4.4.5. The charge must function but does not have to comply with the output criteria to be acceptable for this test group.

h. Functioning (wet), (see 4.3.3.6.2). - The fifty (50) charge assemblies, previously subjected to and passing the immersion test, shall be subjected to the test as specified in 4.4.5.

i. Functioning (dry) (see 4.3.3. 6.3) - Eighty (80) charge assemblies that have been previously subjected to and passed the internal resistance test, shall. be subjected to the test as specified in 4.4.5.

j. Insulator Dielectric Strength. - Fifty (50) charge assemblies, less propellant and wad shall be assembled using an inert primer pin and shall be subjected to the test as specified in 4.4.7.

4.2.3 Rejection. - If any component, sub-assembly or assembly fails to comply with any or all of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of' an inert component, sub-assembly or assembly to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

4.3 Inspection provisions

*4.3.1 Lot formation. - The term ‘reinspection lot" as used in this specification Is defined as an essentially homogeneous collection of units of product from which a-representative sample is drawn and inspected to determine conformance with applicable requirements. The sample selected shall represent only that quantity of units from which the sample was “drawn and shall not be construed to represent any prior or subsequent quantities” presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer in one unchanged process using the same materials and methods in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions and complies with the provisions for submission of product as specified in MIL-STD-105. Changes to the process, specifications, or drawings not affecting safety, performance, interchangeability, or storage, as determined by the Government, shall not be deemed to alter the homogeneity of an Inspection lot. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein regardless of the type of sampling procedure which is being applied to determine conformance with requirements. Lot numbering, as required, shall be In accordance with MIL-STD-1168, Each inspection lot of loaded charges shall contain:

a. Primers from one (1) interfix lot from one (1) manufacturer.

b. Propellant from one (1) lot made by one (1) manufacturer.

*4.3.2 Examination. -The examinations listed in the following subparagraphs shall be performed on inspection lots (see 4.3. 1) of the components or assemblies designated in the applicable paragraph headings. Inspection for critical defects (and major defects, when so specified) shall be 100 percent. Samping plans for major and minor defects shall be in accordance with MIL-STD-105. except that. continuous sampling plans in accordante with MIL-STD-1235A may be used if approved by the Government. Instead of applying the AQL's designated herein to the groups of major and minor defects listed, the contractor may elect to apply an AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect. When this method is elected, it shall be applied to all of the major and minor defects listed in

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:20Z
Check the source to verify that this is the currentversion before use.

the applicable sub-paragraph of this section, except where 100 percent inspection is specified, and be documented as part of the contractor's inspection system. Equipment necessary for the performance of the inspections listed shall be In accordance with 4.3.4.

*4.3.2.1 Charge mine ejection assembly: M198 (see dwg. 9287785).

Categories	Defects	Method of Inspection
Critical:		
1.	Shorting clip missing from assembly prior to packaging.....	Visual
Major A:	AQL 1.0 percent	
101.	Length of primer, maximum.....	Gage
102.	Primer diameter.....	Gage
103.	Explosive chamber diameter, max.....	Gage
104.	Seal and gasket improperly assembled or loose.....	Visual
105.	Crimp incomplete.....	Visual
106.	Sealing compound incorrect.....	Gage/Visual
107.	Pitch diameter of thread.....	Gage
108.	Length of charge chamber max...	Gage
109.	Location of wrench holes.....	Gage
Minor:	AQL 1.5 percent	
201.	Diameter of wrench holes.....	Gage
202.	Marking incomplete.....	Visual
203.	Evidence of poor workmanship (see 3.7).....	Visual

4.3.3 Testing

*4.3.3*1 **Charge plug salt spray test (see dwg. 9287785)** Major A Defect, - **Four (4) charge plugs shall be randomly** selected from each lot and tested for the requirements of MIL-C 5541, in accordance with FED- STD-151. A five (5) percent salt spray solution shall be used and the test time shall be ninety six (96) hours. Any sample failing to comply with all of the specified requirements of MIL-C-5541 shall be classed defective. The lot shall be rejected If one (1) or more samples are classed defective. Testing is destructive and test samples shall not be returned to the lot.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:20Z
Check the source to verify that this is the currentversion before use.

*4.3.3,2 Moisture content of propellant (see dwg. 9287785) Major A defect. - The contractor shall provide adequate controls to insure compliance with the applicable requirement. The moisture content of each lot of propellant shall be determined at the loading station at the time of loading the charges. This determination shall be made at least once each eight (8) hours of production. Testing of the propellant shall be in accordance with Standard MIL-STD-286, Method 102.1. In addition, if the moisture content fails to comply with the requirement specified on the applicable drawing and loading has not begun, the lot shall be rejected until corrective action has been taken as verified by repeating the moisture content determination. If loading has begun, charge assemblies loaded with the non-conforming propellant shall be rejected.

*4.3.3.3 Primer Pin Push Test. (see dwg. 9287785) Major A defect - (Destructive Test)

*4.3. 3.3.1 Beginnin with the first lot produced and continuing until three (3) consecutive lots have complied with the acceptance criteria specified, two hundred (200) charge assemblies, less propellant, and wad, shall be selected from each lot and tested In accordance with 4.4.1. The lot shall be rejected if four (4) or more charges are classed defective.

*4.3.3.3.2 After three (3) consecutive lots have cmplied with the criteria of 4.3.3.3.1, eighty (80) charge assemblies, less propellant and wad, shall be selected from each lot for test. The lot shall be rejected if two (2) or more defects occur.

*4.3.3.4 Primer pin to charge case resistance (See dwg, 9287785) Major A Defect, - The lot shall be tested one hundred percent (100%) in accordance with the test procedures specified in 4.4.2. Assembles failing to comply with all of the specified requirements shall be classed defective and removed from the lot.

*4.3.3.5 Immersion Test (see dwg. 9287785) - Major A Defect -

*4.3.3.5.1 Beginning with the first lot produced and continuing until three (3) consecutive lots have ‘complied with the acceptance criteria specified, two hundred (200) charge assemblies shall be selected from each lot and tested in accordance with 4.4.3. The lot shall be rejected is four (4) or more charges are classed defective. (see Note 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

4.3.3.5.2 After three (3) consecutive lots have complied with the criteria Of 4.3.3.5.1, eighty (80) samples shall be selected from each lot for test. The lot shall be rejected If two (2) or more samples are classed defective. (see Note 1)

NOTE 1. The samples, regardless of sample size, that have successfully passed the test shall be held for the functioning (wet) test, 4.3.3.6.2.

*4.3.3.6 Static Functioning of Charge Assembly

*4. 3.3.6.1 Non-Functioning (see dwg. 9287785) - Critical Defect - Three hundred and fifteen (315) charge assembles shall be randomly selected from each lot and tested in accordance With 4.4.4. The lot shall be rejected if one (1) or more samples are classed defective. Testing is destructive and test samples shall not be returned to the lot.

*4.3.3.6.2 Functioning (wet) (see dwg. 9287785) - Major A Defect.

*4.3.3.6.2.1 The samples that have successfully passed the immersion test of 4.3.3.5.1 shall be used for this test. Beginning with the first lot produced and continuing until three (3) consecutive lots have complied with the acceptance criteria specified, the two hundred (200) charge assemblies from 4.3. 3.5.1 shall be tested in accordance with 4.4.5. The lot shall be rejected if four (4) or more charges are classed defective.

*4.3.3.6.2.2. After three (3) consecutive lots have complied with the criteria of 4.3.3.6.2.1, the eighty (80) charge assemblies from 4.3.3.5.2 shall be used for this test. The lot shall be rejected if two (2) or more charges are classed defective.

*4.3.3.6.3 Functioning (dry) (see dwg. 9287785) - Major A Defect.

*4.3.3.6.3.1 Beginning with the first lot produced and continuing until three (3) consecutive lots have complied with the acceptance criteria specified, three hundred fifteen (315) charge assemblies shall be. selected from each lot and tested in accordance with 4. 4. 5. The lot shall be rejected if four (4) or more samples are classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

4.3.3.6,3.2 After three (3) consecutive lots have complied with the criteria of 4.3.3.6.3.1, one hundred twenty-five (125) charge assemblies shall be selected from each lot for test. The lot shall be rejected if two (2) or more samples are classed defective.

4.3,4 Inspection Equipment. - Inspection equipment required to perform the inspections prescribed in this specification is identified in the Examination (4. 3.2) and Test Method (4.4) paragraphs herein. See 6.3 for details concerning responsibilities for Inspection design and approval.

4.4 Test Methods and Procedures

*4.4.1 Primer pin push test. - The charge assembly, less propellant and wad, shall be mounted in an approved fixture and be subjected to the specified load in the required direction. Movement of the primer pin shall be detected by an indicator or other approved measuring system. The test sample shall be classed defective if it falls to comply with the applicable requirements. Testing is non-destructive and only accepted samples shall be-returned to the slot.

*4.4.2 primer pin to charge case resistance test. - The resistance shall be measured using a digital readout ohmmeter that limits the measurement current to a maximum of ten (10) milliamperes d.c. Any test sample failing to comply with the applicable requirements shall be classed defective. Testing is non-destructive and only accepted test samples shall be returned ‘to the lot.

*4.4.3 Immersion test. - The charge assembly shall be completely immersed under water and placed in a vacuum chamber. All sealed areas shall be clearly visible. The pressure In the vacuum chamber shall then be reduced to the required pressure and the charge assembly shall be observed for leakage for the specified time. Any bubbles coming from within the test sample shall be considered leakage. Bubbles which are the result of entrapped air on the exterior surface of the charge assembly shall not be cause for rejection. The test sample shall be classed defective if it fails to comply with the applicable requirement. Disposition of samples shall be in accordance with 4.3.3.5.

*4.4.4 Non-function tests -The charge assembly shall be tested for specified requirements using an approved power-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

source. Any sample failing to comply with applicable require-ments shall be classed defective. Test samples shall not be returned to the lot but shall be destroyed after completing the test.

*4.4.5 Functioning. - The charge assembly with o-ring (MS-28775-115) In place shall be tested using the e uipment on dwg. 9278645 and the test procedures on dwg. 9278651 to record the output and total time requirements. The test sample shall be classed defective if It fails to comply with the requirements of dwg. 9287785 and/or fails to fall within the pressure - time envelope requirements of figure I attached to this specification. Testing is destructive and test samples shall not be returned to the lot.

*4.4.6 Environmental tests. - The charge assembly shall be mounted into a cylinder, dwg. 9287690 and a SUU-13D/A dispenser or an approved test fixture and subjected to the temperature shock, humidity, cycling, and vibration tests as specified in MIL-STD-810 in the sequence 'Indicated. After " conditioning, the charge assemblies. shall be functioned as specified in 4.4.5 and observation made for compliance with the applicable requirements.. (Destructive test)

*4.4.7 Insulator Dielectric Strength. _ The charge assembly shall meet the requirements as specified in paragraph 3.10 and tested in accordance with dwg. 9287785 and using Government approved test equipment. The voltage shall be applied between the extended primer pin and the plug case. Any sample failing to comply with all of the specified requirements shall be classed defective.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging

*5.1.1 Level A. - The charge assembly shall be preserved and packaged in accordance with dwg. 92876 6.

5.1.2 Packaging. - The charge assembly shall be packaged in accordance with the Code of Federal Regulations, Title 49 Parts 100-199.

5.2 Packing

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:20Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. - The charge assemblies shall be packed in accordance with dwgs. 9287686 and CFR 49 parts 0-190.

5.3 Marking. - Marking of the carton shall comply with level A, dwg. 9287686. Markings shall also specify the part nomenclature and Class of Explosive as well as a note, HANDLE CAREFULLY.

5.4 Shipping. - When components of more than one lot are " shipped as a carload, each lot shall be-kept separate, and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

6.1 Ordering data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Data cards. - Data cards shall be prepared for each lot in accordance with the information specified In Standard MIL-STD-1167.
c. Provisions for submission of first article samples.

6.2 Inspection Equipment Designs. - Inspection equipment designs are of two types - Government Special Inspection Equipment (SIE) designs and contractor designs. SIE designs are designated by drawin numbers under the "Method of Inspection" headings in Section 4. Design responsibility for all other inspection equipment is assigned to the contractor. The contractor need not furnish any design when a complete Government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.3.2 and 6.3.3 should he elect to do so.

6.2.1 SIE designs. - SIE designs may consist of any of the following:

a. Det ailed drawings which completely depict all information necessary for the fabrication and use of' the Item of inspection equipment.
b. A source control drawing or a specification control drawing as defined in MIL-STD-100.
c. An envelope drawing, as defined In MIL-STD-100, which establishes the criteria which a detailed design shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

meet. When envelope drawings are specified, the contractor. shall prepare designs which comply with the criteria there-in.

6.2.2 Contractor designs. - Contractor designs are required for all inspection equipment for which SIE design are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public). Contractor designs shall include appropriate operating instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by catalog listings or other means which provide sufficient information to permit identification and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment, or with SIE.designs If not otherwise covered thereby (see 6.2.1c). Designs shall be of the category and form (per MIL-D-1000) specified in the Contract Data Requirements Lists (DD Form 1423). The contractor Is referred to MIL-HDBK-204, "Inspection Equipment Design" for guidance. The specification number and the applicable five digit defect code number (or other specific identifying information) from Section 4 of this specification shall be referenced on each contractor design together with the component *or* assembly drawing number and revision letter to which the specific design applies.

*6.3.3 **Submission of Designs for Approval**. - Contractor design shall **be approved by the Government prior** to fabricating or procuring the equipment. Designs shall be submitted for approval to Picatinny Arsenal, ATTN: SARPA-QA-T-T, Dover, New Jersey 07801 in accordance with the stipulations, time frame and distribution specified In the Contract Data Requirements List (DD Form 1423) or in the contract. The contractor must include in his submission of designs a listing of any and all Government SIE designs which will be utilized. Partial submission of inspection designs is permissible and encouraged. However the completion date for design review will be based on the date of the final submission of designs. Picatinny Arsenal design review will normally be accomplished within one month after receipt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

6.4 Submission of results of' contractor Conducted examinations and tests (see 3.8). - The contractor shall send his results to:

Commander
Picattnny Arsenal
ATTN: SARPA-QA-A-M
Dover, New Jersey 07801

Custodian:
Amy-PA

Preparing Activity:
Army-PA

Project Number: 1345-A-124

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

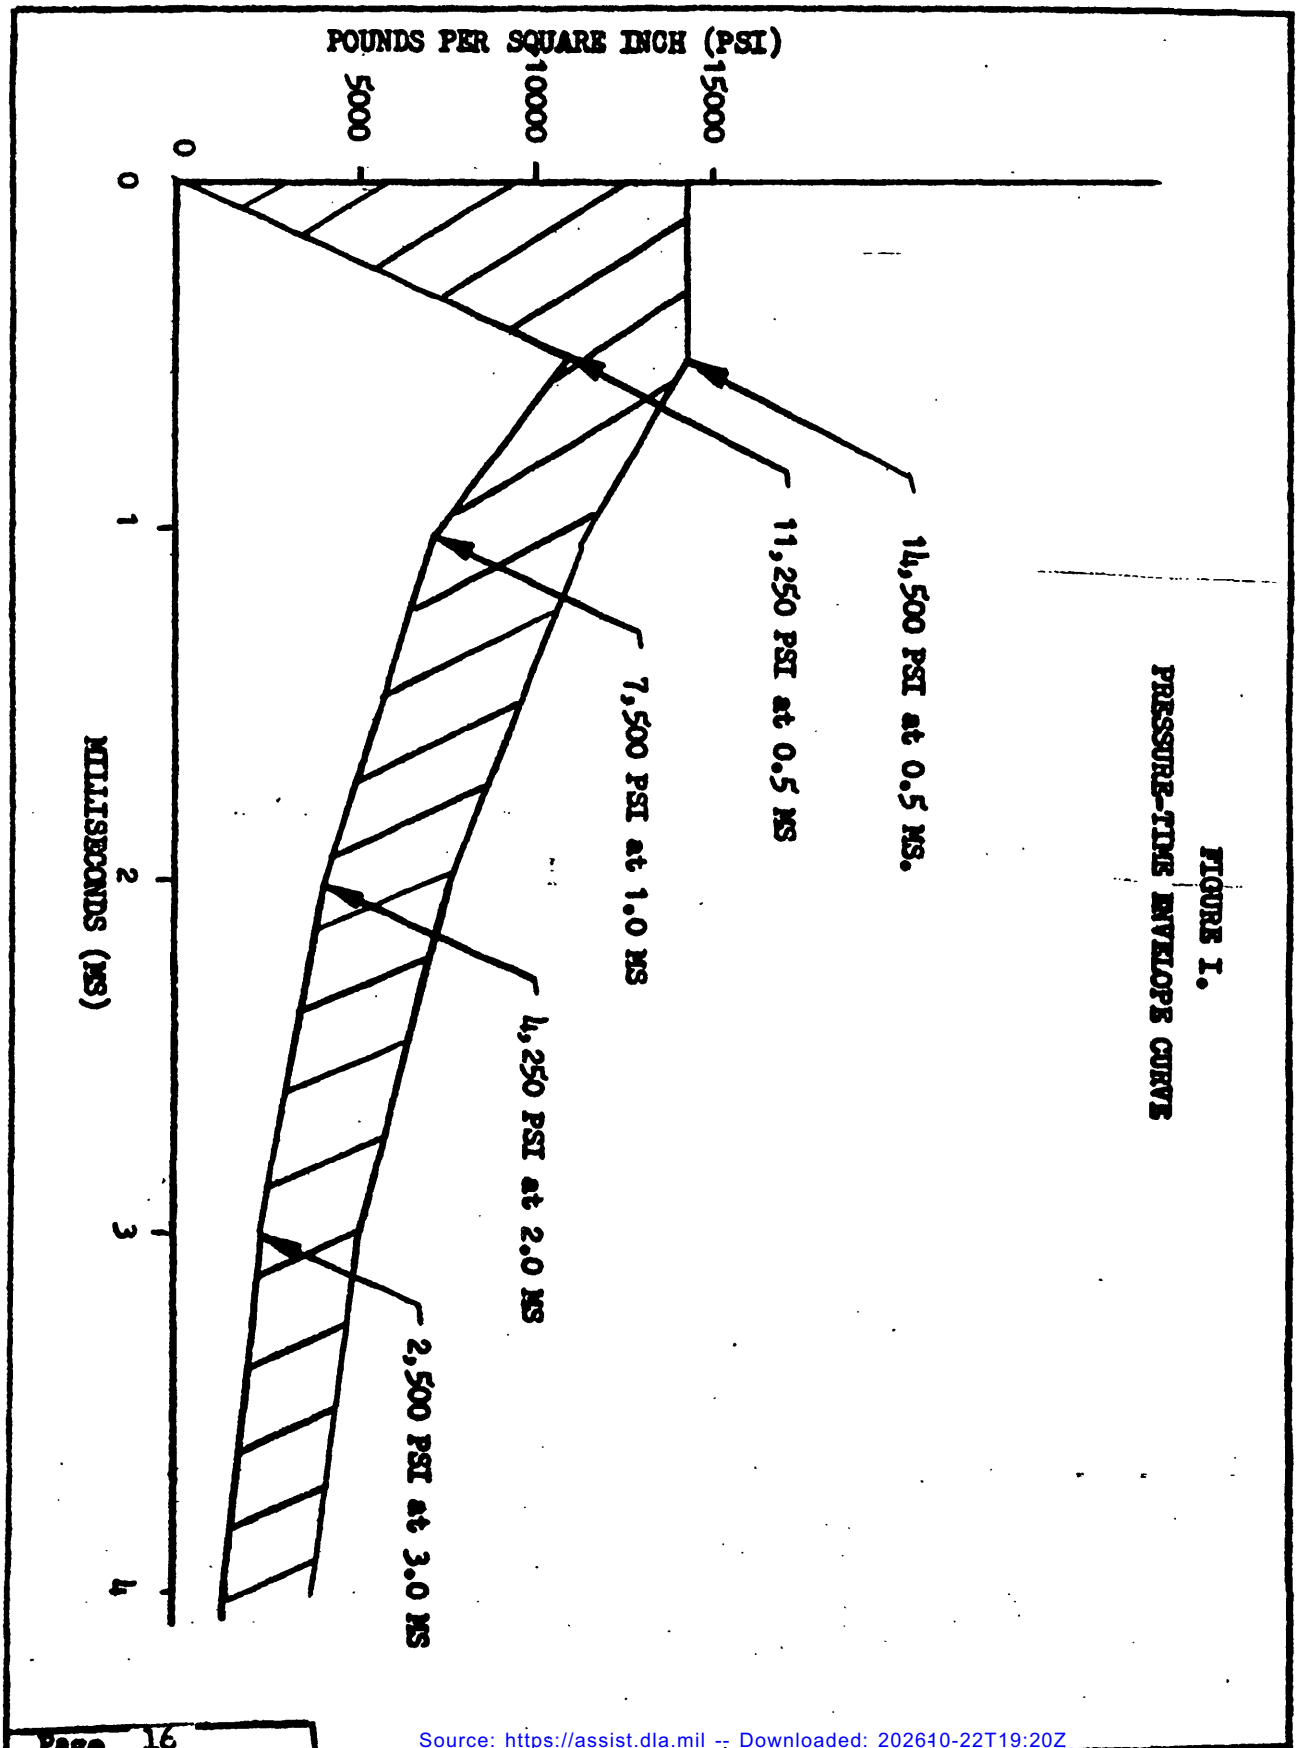


FIGURE 1.
PRESSURE-TIME ENVELOPE CURVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:20Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-A
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:20Z
Check the source to verify that this is the current version before use.