INCH-POUND
MIL-PRF-32041A
w/AMENDMENT 1
23 October 2006
SUPERSEDING
MIL-PRF-32041A
27 September 2004

PERFORMANCE SPECIFICATION

ULTRAFILTRATION SYSTEM, 50-GALLON PER MINUTE OILY WASTE MEMBRANE (OWMS-50)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a fully automated and self-contained oily waste membrane system (OWMS) capable of providing secondary treatment of the effluent (see 6.7.4) from 50-gallon per minute (gpm) oil/water separators (OWS) (see 6.7.9) in Naval shipboard installations. The effluent will contain no more than 15 parts per million (ppm) oil.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-680	-	Degreasing Solvent
MIL-S-901	-	Shock Tests, H.I. (High-Impact) Shipboard Machinery, Equipment, and Systems, Requirements for
MIL-DTL-5624	-	Turbine Fuel, Aviation, Grades JP-4 and JP-5
MIL-PRF-9000	-	Lubricating Oil, Shipboard Internal Combustion Engine, High Output Diesel
MIL-D-16791	-	Detergents, General Purpose (Liquid, Nonionic)
MIL-PRF-16884	-	Fuel, Navy Distillate
MIL-PRF-17331	-	Lubricating Oil, Steam Turbine and Gear, Moderate Service

Comments, suggestions, or questions on this document should be addressed to: Commander, Naval Sea Systems Command, ATTN: SEA 05Q, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard DC 20376-5160 or emailed to CommandStandards@navy.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

MIL-F-24385	-	Fire Extinguishing Agent, Aqueous Film Forming Foam (AFFF) Liquid Concentrate, for Fresh and Seawater
MIL-DTL-24643	-	Cable and Cords, Electric, Low Smoke, for Shipboard Use, General Specification for
MIL-PRF-32097	-	Filtration Module, Oily Waste Membrane Type

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-167-1	-	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited)
MIL-STD-461	-	Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment
MIL-STD-740-1	-	Airborne Sound Measurements and Acceptance Criteria of Shipboard Equipment
MIL-STD-740-2	-	Structureborne Vibratory Acceleration Measurements and Acceptance Criteria of Shipboard Equipment
MIL-STD-777	-	Schedule of Piping, Valves, Fittings, and Associated Piping Components for Naval Surface Ships
MIL-STD-810	-	Environmental Engineering Considerations and Laboratory Tests
MIL-STD-1310	-	Standard Practice for Shipboard Bonding, Grounding, and Other Techniques for Electromagnetic Compatibility and Safety
MIL-STD-1399-300	-	Interface Standard for Shipboard Systems, Section 300, Electric Power, Alternating Current (Metric)

DELETED

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation contract.

DRAWINGS

NAVSEA DWG 803-6983497	-	Membrane Module Interface Drawing

(Copies of this document are available from Commander, Naval Sea Systems Command, ATTN: SEA 05Q, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard DC 20376-5160.)

ENVIRONMENTAL PROTECTION AGENCY (EPA)

EPA Method 1664	-	N-Hexane Extractable Material (HEM; Oil and Grease) and Silica Gel Treated N-Hexane Extractable Material (SGT-HEM; Non-Polar Material) by Extraction and Gravimetry

(Copies of this document are available from the Environmental Protection Agency, Ariel Rios Building, 1200 Pennsylvania Avenue, N.W., Washington DC 20460 or online at www.epa.gov.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY OF SANITARY ENGINEERING (ASSE)

ASSE 1013	-	Performance Requirements for Reduced Pressure Principle Backflow Preventers and Reduced Pressure Fire Protection Principle Backflow Preventers (DoD adopted)

(Copies of this document are available from the International Office, American Society of Sanitary Engineers, 901 Canterbury Road, Suite A, Westlake, OH 44145 or online at www.asse-plumbing.org.)

ASTM INTERNATIONAL

ASTM F1155	-	Standard Practice for Selection and Application of Piping System Materials
ASTM F1166	-	Standard Practice for Human Engineering Design for Marine Systems, Equipment and Facilities (DoD adopted)

(Copies of these documents are available from ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959 or online at www.astm.org.)

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

DELETED

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION (ISO)

ISO 12103-1	-	Road Vehicles -- Test Dust for Filter Evaluation -- Part 1: Arizona Test Dust

(Copies of this document are available from ISO, 1, rue de Varembé, CH-1211 Geneva 20, Switzerland or online at www.iso.org.)

NATIONAL ELECTRONIC MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	-	Enclosures for Electrical Equipment (1000 Volts Maximum) (DoD adopted)

(Copies of this document are available from the National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA 22209 or online at www.nema.org.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specification exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The OWMS-50 consists of a separation system using filtration modules and supporting subsystems to further separate the oil and water from the ship's oil/water separator (OWS) effluent to produce a permeate water for overboard discharge and a waste oil concentrate for discharge to the ship's waste oil tank (WOT). The OWMS-50 shall be an electrically operated, package-type (skid mounted) unit ready for operation with the current ship's architecture (structure, mechanical, electrical, data).

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

3.3 Material. The contractor shall select the materials, but the materials selected shall be capable of meeting all of the requirements specified herein. All materials shall be commercially available and conform to applicable commercial marine standards and practices. No toxic chemicals or hazardous substances shall be used.

3.3.1 Wetted materials. All materials in contact with the oily wastewater and/or processed byproducts shall be compatible, with no evidence of deleterious effect including membrane performance degradation, with the following: seawater; diesel fuel marine fuels specified in MIL-PRF-16884; turbine fuels specified in MIL-DTL-5624, 2190 TEP steam lube oil specified in MIL-PRF-17331, and 9250 diesel lube oil specified in MIL-PRF-9000; and contaminants such as bleach, acetone, paint thinner, degreasing solvent specified in MIL-PRF-680 (Type III), and aqueous film forming foam specified in MIL-F-24385. In addition, all materials in contact with the mixture recirculated through the membrane filtration modules shall be both erosion and corrosion resistant (e.g., glass reinforced plastic, titanium, etc.) and shall not degrade performance of the membranes.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Sacrificial anodes are not permitted.

3.3.3 Material deterioration, prevention, and control. The OWMS-50 shall be fabricated from compatible materials, inherently resistant to or treated to provide protection against corrosion and microbial deterioration for the system's service life and in any shipboard or storage environment specified herein.

3.3.4 Identification of materials and finishes. The contractor shall identify the specific material, material finish, or treatment for use with component and subcomponent.

3.3.5 Electrical cable materials. All electrical cable materials shall meet the low smoke requirements of MIL-DTL-24643 and should be oil proof if they are expected to be installed near or below the deck plate.

3.3.6 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.4 Environmental considerations.

3.4.1 Shock. The module shall meet the requirements of Grade B, Class I, Type A shock in accordance with MIL-S-901.

3.4.2 Environmental vibration. The system shall meet the environmental Type I vibration requirements in MIL-STD-167-1.

3.4.3 Internally excited vibration. All OWMS-50's rotating machinery shall meet the Type II vibration requirements in MIL-STD-167-1.

3.4.4 Airborne noise. The OWMS-50 shall meet the requirements of airborne noise in MIL-STD-740-1 for Grade E equipment.

3.4.5 Structureborne noise. The OWMS-50 shall meet the requirements of generated structureborne noise in MIL-STD-740-2 for Type II equipment.

3.4.6 Electromagnetic interference. The OWMS-50 shall meet the electromagnetic emissions and susceptibility requirements in MIL-STD-461 for auxiliary equipment operating in a machinery space of the intended ship, or class of ship (see 6.2).

3.4.7 Operational temperatures. The OWMS-50 shall meet specified performance requirements when operating in an ambient air temperature environment range of 35 °F to 122 °F.

3.4.8 Storage (non-operating) temperatures. When in a non-operating state, the OWMS-50 shall not be damaged nor shall subsequent operational performance be degraded as a result of being subjected to ambient air temperatures ranging from –40 °F to 158 °F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

3.4.9 Humidity. The OWMS-50 shall not be damaged nor shall subsequent operational performance be degraded when subjected to the combined temperature and relative humidity profiles in MIL-STD-810, Method 507.4.

3.4.10 Inclination. The OWMS-50 shall operate as specified herein and prevent loss of fluid when inclined at the rate of 5 to 7 cycles per minute in one phase to angles of 15 degrees on both sides of the vertical for a period of not less than 30 minutes.

3.4.11 Salt fog. The OWMS-50 shall remain fully operational during and after a 48-hour exposure to salt fog as specified in MIL-STD-810, Method 509.

3.5 Design. The OWMS-50 shall incorporate a feed system (see 6.7.6), a separation system using filtration modules, a potable water distribution system, and a control system including sensors. The OWMS-50 shall be a fully automatic and package-type (skid-mounted) unit ready for operation with the current ship's architecture (structure, mechanical, electrical, data). A pneumatic distribution system shall be required if the contractor design utilizes externally provided compressed air. Guidance for the OWMS-50 system design is provided in Section 6.

3.5.1 Feed system. The feed system shall provide the interface with the ship as specified in 3.7.1 and deliver oily wastewater feed into the separation system as required to support the requirements specified herein.

3.5.2 Separation system. The OWMS-50 separation system shall consist of membrane filtration modules conforming to MIL-PRF-32097 and the interface requirements of NAVSEA DWG 803-6983497, installed in a cross flow recirculation subsystem (see 6.7.14), and connected to a permeate discharge subsystem. The OWMS-50, with the filtration modules installed, shall maintain a 100-to-1 volume reduction factor (see 6.7.16) of the ship's OWS effluent. The filtration module interfaces shall be as specified in 3.7.2.

3.5.3 System connections. The OWMS-50 inlet and outlet ship interface connections shall consist of the following: ship's OWS effluent supply, permeate (see 6.7.12) discharge, concentrate (see 6.7.1) discharge, flushing water discharge, potable water inlet, and if necessary, a compressed air inlet. The OWMS-50 shall be equipped with the necessary electrical connections to receive ship supplied electrical power, transfer data signals, and receive electrical signals from the ship's OWS pump. The OWMS-50 shall also be equipped with sampling ports to allow manual sampling of oily wastewater feed, permeate produced from each individual membrane filter module, combined permeate from all membrane filter modules, and concentrated oil. Pitot tubes shall be used for the sampling of the wastewater feed and combined permeate.

3.5.4 Size and weight. The OWMS-50 shall not exceed 100 square feet and a dry weight of 12,000 pounds when fully assembled.

3.5.5 Power consumption. The OWMS-50 power consumption shall not exceed 90 kilowatts (kW), with a current draw not to exceed 120 amps steady state at 440 volt, 3-phase.

3.5.6 Compressed air consumption. The OWMS-50 compressed air consumption shall not exceed 20 standard cubic feet per minute (scfm). The average air consumption shall not exceed 5 scfm.

3.5.7 Grounding and bonding. Grounding and bonding of the OWMS-50 electrical enclosure, pumps, and system frame to the ship's substructure shall be provided for electrical safety connection and an effective low-impedance RF connection as per MIL-STD-1310.

3.5.8 Markings. The OWMS-50 shall have permanently affixed and legible markings located on the front of the unit that identify the OWMS-50 manufacturer's name, model and serial number, national stock number (NSN), if specified (see 6.2). The electrical enclosure shall have permanently affixed markings that identify the manufacturer's name, model and serial number, voltage, frequency, and maximum horsepower rating, and low noise, if applicable. Additionally the electrical panel shall have an electrical schematic should be posted inside the electrical enclosure. All system piping shall be identified for its specific service (i.e., potable water, etc.), pressure and direction.

3.5.9 Membrane module permeate isolation. The permeate discharge from each individual membrane module shall be capable of being isolated from the OWMS-50 permeate discharge connection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

3.6 Performance characteristics. The OWMS-50 system shall automatically sense operation of the ship's OWS, receive the effluent from the ship's OWS, process it as feed, and generate permeate and concentrate. The OWMS-50 shall deliver permeate for overboard discharge through the permeate discharge interface connection, deliver concentrate for discharge to the ship's waste oil tank (WOT) (see 6.7.10) through the concentrate discharge interface connection, and flush water through the flushing water discharge interface connection. Operation and control of OWMS-50 shall be as specified in 3.6.6. The OWMS-50 performance shall be compatible with the shipboard interfaces defined in 3.7.1 and filtration module interfaces defined in 3.7.2.

3.6.1 Permeate discharge requirements.

3.6.1.1 Permeate discharge flow. The OWMS-50 shall deliver permeate through the permeate discharge interface connection at a design flow rate of 50 gpm against a hydraulic resistance of 15 psi.

3.6.1.2 Oil removal. When operating at rated flow and pressure, the OWMS-50 shall deliver permeate water as specified in 3.6.1.1 containing no greater than 15-ppm free oil, as measured by EPA Method 1664 SGT-HEM, for 95 percent of the time from oily wastewater feed when tested as specified in 4.5.4.

3.6.2 Concentrate discharge requirements.

3.6.2.1 Concentrate discharge flow. The OWMS-50 shall deliver concentrate through the concentrate discharge connection to the ship's WOT at positive flow against a hydraulic resistance range of -3 to 22 psi.

3.6.2.2 Particulate processing. The hydraulic resistance across the membrane modules shall remain within the range specified in MIL-PRF-32097 when the OWMS-50 is processing oily waste mixtures containing fibrous solids consisting of cotton, synthetic fibers including nylons and polyesters, and human hair with the following physical properties: 95 percent of the fibrous solids have an equivalent spherical diameter (see 6.7.5) of less than 1,000 micron; 25 percent of the fibrous solids have an equivalent spherical diameter between 25 and 100 micron; and 50 percent of the fibrous solids have an aspect ratio greater than 3 to 1. If accumulated particles are purged, they shall be automatically discharged to the ship's WOT as specified in 3.6.2.1. Additionally, this purge cycle shall be activated automatically upon system shutdown and/or when the solids retention capacity is reached. Discharges of solid waste shall contain less than 2 gallons of fluid for every gram of solids.

3.6.3 Flushing water discharge requirements.

3.6.3.1 Flushing water discharge flow. The OWMS-50 shall deliver flushing water with residue through the flushing water discharge interface connection to the ship's oily waste holding tank (OWHT). If the OWHT is above the OWMS-50, the OWMS-50 shall deliver positive flow against a hydraulic resistance of 22 psi.

3.6.3.2 Self-cleaning cycles.

3.6.3.2.1 Membrane flush cleaning cycle. If required for the type of membrane used, the OWMS-50 shall conduct a flush cleaning cycle of the filtration membranes as specified in MIL-PRF-32097, using no more than 200 gallons or twice the recirculation loop volume, whichever is smaller, of ship-supplied potable water, discharging the flush water to the ship's OWHT as specified in 3.6.3.1. This cleaning cycle shall be activated automatically upon system shutdown and shall be capable of being manually activated.

3.6.3.2.2 Membrane hot flush cleaning cycle. The OWMS-50 shall be capable of conducting a 6-hour hot flush cleaning cycle of the filtration membranes, using no more than 1,800 gallons of ship-supplied potable water at a self-heated temperature between 120 °F and 150 °F (max) and within the thermal shock conditions defined in MIL-PRF-32097, discharging the flush water to the ship's OWHT as specified in 3.6.3.1. The OWMS-50 shall not be damaged nor shall subsequent operational performance be degraded as a result of being subjected to this procedure. This cleaning cycle shall be manually activated only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

3.6.3.2.3 Membrane regeneration cycle. The OWMS-50 shall be capable of conducting a regeneration cycle of the filtration membranes within a 6-hour period. The regeneration cycle shall allow the use of externally supplied chemical cleaners that are approved for use by the Navy onboard surface ships (see 6.3.4), and compatible with the membranes and other materials of construction. No foaming external to the system shall be permitted during this cycle. The regeneration cycle shall use no more than 1,800 gallons of ship supplied potable water, discharging the flush water and spent cleaners to the ship's WOT as specified in 3.6.2.1. During the cycle, the loop temperature shall not exceed 150 °F and shall be maintained within the thermal shock conditions defined in MIL-PRF-32097. The OWMS-50 shall not be damaged nor shall subsequent operational performance be degraded as a result of being subjected to this procedure. This cleaning cycle shall be manually activated only.

3.6.3.3 System drain. All OWMS-50 system drains shall be capable of draining through the OWMS-50 flushing water discharge interface connection to the ship's OWHT as specified in 3.6.3.1. The time to drain secondary separation recirculation loop shall not exceed 60 minutes. Compressed air may be used to facilitate system dewatering, given appropriate safety precautions. The vendor shall supply suitable hoses and pressure regulators.

3.6.4 Back flow prevention. The OWMS-50 shall prevent back flow of oily wastewater, potable water, and compressed air (if used) into their respective ship supply sources. The OWMS-50 shall also prevent permeate, flushing water and concentrate from backing up into their respective OWMS-50 discharge port. A reduced pressure principle sanitary back flow preventer conforming to ASSE 1013 shall be used to protect the ship's potable water from cross-contamination.

3.6.5 Compressed air moisture removal. If OWMS-50 utilizes dry compressed air, it shall be capable of automatically removing moisture from the supply air and discharging it to a ship-supplied bilge funnel.

3.6.6 Operation and controls. The OWMS-50 control system shall monitor and control operation, report status, activate warning indicators, and sound alarms for all OWMS-50 systems (i.e., separation, pneumatic, potable water, etc.). All OWMS-50 systems shall self-monitor their respective operating parameters (i.e., flow, pressure, etc.). The OWMS-50's control system shall interface with the ship's centralized control system (Integrated Condition Assessment System (ICAS)) to provide remote monitoring and condition assessment. Manual overrides shall be provided for troubleshooting purposes.

3.6.6.1 Normal operation. Once the system has been powered up and valve alignment has been completed, the OWMS-50 shall operate automatically, starting up when the ship's OWS pump is energized and the OWMS-50 senses influent flow. The OWMS-50 shall automatically shutdown when the ship's OWS pump is deenergized or when there is no flow of influent to the OWMS-50 for a period of 15 minutes. The OWMS-50 process rate shall equal the OWS effluent flow rate. Influent flow exceeding the OWMS-50 capacity shall be sent through the flush discharge connection to the ships OWHT. Improper valve alignment (including manual valves) while in any mode of operation shall not cause catastrophic failure of the system. As part of shutdown, the system shall automatically conduct any routine operations such as the flush cleaning cycle specified herein.

3.6.6.2 Controller. The OWMS-50 control system shall automatically adjust the appropriate subsystems to maintain system operation and performance as specified herein and prevent system damage. The controller shall incorporate a programmable logic controller (PLC). The controller shall be capable of being remotely mounted with a cable length of 50 ft unless a shorter length is specified by the procuring activity (see 6.2). Each module shall have removable terminal strips to allow PLC component replacement without disconnecting wiring. The control system shall incorporate a system control switch (OFF, AUTO and CLEAN), main power disconnect switch, emergency stop, and elapsed time meter for system pumps.

3.6.6.3 Warning indicators. A visual warning indicator shall be activated when the filtration module set requires cleaning, regeneration or replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

3.6.6.4 Alarms. Audible and visual alarms shall automatically activate and either shut down the system or provide a warning when an abnormal condition occurs. These alarms shall cover any conditions that can be harmful to either machinery or personnel. These would include abnormal temperatures, pressures, or flows, as well as failure of any sensor. All alarms shall be of the latching variety with reset. A method to silence the alarms shall be installed. All alarms shall employ procedures to prevent inadvertent or nuisance alarms during transient operations (i.e., system start-up, shutdown, etc.) or from transient conditions (i.e., electrical spikes or pulses, electronic noise, sea conditions, etc.). The OWMS-50 shall not be damaged nor shall subsequent operational performance be degraded as a result of any alarm shut-down.

3.6.6.5 Indicator panel. The OWMS-50 shall display current status of the system locally and remotely. Local display shall be via an indicator panel installed on the OWMS-50 unit and remote display shall be via the ship's ICAS. The message display indicators shall be in English standard units.

a. The following status conditions and operating parameters shall be displayed locally and remotely at all times:
   (1) System status (on, off, standby, running, flush, hot flush, regeneration, and alarm and warning conditions).
   (2) Flow rate of permeate delivered by OWMS-50.
b. The OWMS-50 shall be capable of displaying the following status conditions and operating parameters locally:
   (1) DELETED
   (2) Pressure of the fluid in the cross flow recirculation loop.
   (3) DELETED
   (4) Pressure of the permeate discharged by the membrane modules.
   (5) Temperature of the fluid in the cross flow recirculation loop.
   (6) Total gallons of permeate delivered by OWMS-50. Totalizers shall be capable of being reset upon membrane change-out.
   (7) Total gallons of concentrate delivered by OWMS-50. Totalizers shall be capable of being reset upon membrane change-out.
   (8) Operating hours of each system pump.
   (9) The ship's OWS pump status signal.

3.6.6.6 Data logging. The OWMS-50 control system shall monitor and save values of the status conditions and operating parameters defined below and allow retrieval of this information. The control system shall be capable of saving data sets at 1-hour intervals for a period of 200 hours of operation before data retrieval is required. When operated beyond 200 hours, the control system shall save the most recent data sets recorded within the last 200 hours of operation. Provisions shall be made to allow transfer of data from the control system PLC to an Ethernet port on a laptop computer that includes software as required. The physical connection on the OWMS-50 control panel for the laptop computer shall be accessible without opening the control panel. Downloaded data shall be in a format compatible with common spreadsheet programs. Data logging and retrieval shall be provided for at least the following conditions and parameters:

a. Date and time (year, month, day, hour, and minute in Greenwich Mean Time).
b. System status (running, flush, hot flush, regeneration, alarm and warning conditions).
c. DELETED
d. Pressures of the fluid in the cross flow recirculation loop.
e. Pressure and flow rate of permeate delivered by OWMS-50.
f. Temperature of the fluid in the cross flow recirculation loop.
g. Total gallons of permeate delivered by OWMS-50. Totalizers shall be capable of being reset upon membrane change-out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

h. Total gallons of concentrate delivered by OWMS-50. Totalizers shall be capable of being reset upon membrane change-out.

i. Oil content reading from the ship's oil content monitor (OCM).

j. In the event of a loss of ship's power, the following data shall not be lost: total gallons of permeate, total gallons of concentrate, and operating hours of each pump

3.6.6.7 Sensors and instruments. Sensors used in the OWMS-50 shall have minimum ±1 percent accuracy for the system's design operational range. Sensors shall be capable of calibration adjustments and allow replacement without unwiring. A method shall be provided to prevent connectors from being misconnected.

3.7 Interface requirements.

3.7.1 External (ship) interfaces.

3.7.1.1 Functional interface. The OWMS-50's functional interfaces with ship systems shall be compatible with the shipboard electrical, data, hydraulic, and pneumatic functional interfaces defined in Table I. The OWS pump signal shall be electrically isolated from the OWMS-50. In addition, the OWMS-50 shall remove particulates that are 1 micron and greater from ship supplied potable water used for flush.

3.7.1.2 Physical interface. The OWMS-50's interfacing pipe connections shall be compatible with the mating shipboard interface connection defined in Table I. The OWMS-50 shall be skid-mounted with interfacing structural mounts capable of attachment to a steel deck without deforming or damaging the ship's deck. If the OWMS-50 is to be retro-fitted on to an existing ship, it shall also be capable of being disassembled into subassemblies or components that can pass through standard Navy doorways 26 inches wide by 66 inches high, reduced further by round corners on a 8 inch radius, and hatches 30 inches wide by 60 inches long, reduced further by round corners on a 7.5 inch radius, and then being reassembled into an operational system.

3.7.2 Internal (filtration module) interfaces.

3.7.2.1 Functional interface. The OWMS-50 recirculation subsystem shall maintain a maximum pressure of 100 psi or less, and ensure each filtration module operates within the performance requirements specified in MIL-PRF-32097. Permeate flow from each filtration module shall be controlled by the OWMS-50 permeate discharge subsystem to be less than 5 gpm. The OWMS-50 shall support all filtration module requirements specified in MIL-PRF-32097.

3.7.2.2 Physical interface. The physical interface between the filtration module and the OWMS-50 recirculation and permeate subsystems shall be as defined in NAVSEA DWG 803-6983497. In addition, the interface between the filtration module permeate discharge connection and the permeate discharge subsystem shall be a flexible connection. All flexible permeate connections for the individual filtration modules shall connect to a rigid manifold. The recirculation pump shall be installed according to all manufacturers' recommendations, including seal recommendations for concentrate fluid.

3.8 Hydrostatic integrity. The OWMS-50 shall withstand hydrostatic pressure 1.5 times the filtration module's maximum design pressure specified in MIL-PRF-32097 for a period not less than 30 minutes. When pressure is applied and maintained for the specified period, the OWMS-50 shall show no sign of leakage, material deformation or rupture, or other defects that harmfully affect the performance and serviceability of the OWMS-50.

3.9 Reliability and maintainability.

3.9.1 MTBCF. The Mean Time Between Critical Failure (MTBCF) (see 6.7.8) of the system shall be at least 400 hours when the system is operated at rated capacity.

3.9.2 Maintenance ratio. The OWMS-50 shall have a maintenance ratio (see 6.7.7) of not greater than 0.03. The time required to perform any preventive maintenance (see 6.7.13) action should be not greater than two man-hours by an Engineman third class or Electrician's Mate third class with no formal equipment training.

3.9.3 MaxTTR. The maximum time to repair (MaxTTR) of any OWMS-50 system critical failure shall not exceed 6 man-hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

3.9.4 Maintenance access. All major OWMS-50 assemblies and installed attachments shall be accessible for maintenance, repair, and replacement without the removal of other major assemblies and installed attachments not normally installed. The recirculation pump shall be mounted and piped to allow removal of the pump casing without having to move the pump motor and base plate. The membrane modules shall be easily accessible for cleaning and replacement, with removal only requiring the detachment of the membrane structural support brace and piping interfaces.

3.9.5 Maintenance clearance. The clearance required for equipment removal and maintenance shall extend no further than 24 inches in the horizontal plane away from the unit front and adjacent side designed for access, and shall not exceed 106 inches from the unit bottom in the upward vertical direction.

3.10 Safety. The OWMS-50 shall present no uncontrolled hazards to operating or maintenance personnel. All electrical enclosures shall be NEMA 250 or equivalent.

TABLE I. Shipboard interface requirements.

OWMS-50 Interface	Ship Interface (ship side of the interface)
Ship's OWS Effluent Supply	System: Oily Waste Transfer System (from the OWS) Connection: 2.5-inch NPS with flange connection in accordance with (IAW) ASTM F1155 or MIL-STD-777 (see 6.2). Typical supply characteristics: Flow range: 0 to 60 gpm Positive head pressure: 22 psi Particulate contaminant: Max. 0.125 inch Oil concentration: 15 to 1500 ppm (Approx. avg. 150 ppm) Total suspended solids: 10 to 100 ppm Temperature: 30 °F to 120 °F pH range: 4 to 8 Maximum backpressure allowable to OWS is 22 psig.
Permeate Discharge	System: Oily Waste Transfer System (overboard discharge) Connection: 2.5-inch NPS with flange connection IAW ASTM F1155 or MIL-STD-777 (see 6.2).
Concentrate Discharge	System: Oily Waste Transfer System (to the WOT) Connection: 1.5-inch NPS with flange connection IAW ASTM F1155 or MIL-STD-777 (see 6.2).
Flushing Water Discharge	System: Oily Waste Transfer System, (to the OWHT) (see 6.7.10) Connection: 2.5-inch NPS with flange connection IAW ASTM F1155 or MIL-STD-777 (see 6.2).
Potable Water Supply	System: Potable Water System Connection: 0.5-inch NPS with flange connection IAW ASTM F1155 or MIL-STD-777 (see 6.2). Supply characteristics: Pressure: Max. 100 psig, Min. 50 psig Temperature: 35 °F to 90 °F Bromine or chlorine residual: 0.2 mg/L
Compressed Air Supply	System: Compressed Air Service System Connection: 0.5-inch NPS with flange connection IAW ASTM F1155 or MIL-STD-777 (see 6.2). Supply characteristics: Pressure: Max. 155 psig; Min. 60 psig Temperature: Max. 55 °F Moisture content: Max. 0.00085 lb H_2O/ lb dry air (40 °F dewpoint) at 80 psig

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

TABLE I. Shipboard interface requirements – Continued.

OWMS-50 Interface	Ship Interface (ship side of the interface)
Electrical Power Supply	System: Electrical Power Distribution System Connection: see 6.2. Supply characteristics: IAW MIL-STD-1399, Section 300, Type I Power (440/115 Vac, 60 Hz, 3 phase) Note: Electrical power as defined in MIL-STD-1399, Section 300, is significantly different from commercial standards. Some supply characteristics, such as fault currents, harmonic current limits, and voltage variations, are more severe than those seen in a commercial environment.
Data Exchange (Remote Monitoring)	System: Integrated Condition Assessment System (ICAS) Connection: see 6.2. Functional: Fieldbus protocols to be negotiated between the vendor and the procuring activity and chosen from the following: Ethernet/IP, Foundation Fieldbus, LonWorks, Profibus (see 6.2).
Ship OWS Pumps (2)	System: OWS Pump Controls Connection: auxiliary contact on the ship's OWS pump control circuits. Functional: Closed contact signal (pump start) from either OWS pump to start the OWMS-50. Open contact signal (pump stop) from either OWS pump to shutdown the OWMS-50.
Ship OCM	System: OCM Controls Connection: auxiliary contact on the ship's OCM control circuit. Functional: 4-20 mA signal to assist data logging.

3.11 Human factors. All man-to-machine interfaces (i.e., controls, displays, alarms, etc.) shall be suitable for user personnel with applicable fifth through ninety-fifth body dimensions as defined in ASTM F1166.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.2 First article inspection. First article inspection shall be performed on a minimum of one complete OWMS-50 assembly when a first article sample is required (see 3.2). This inspection shall include the examination of 4.4 and the tests of 4.5.5.

4.3 Conformance inspection. Conformance inspection shall include the examination of 4.4 and the tests of 4.5.

4.4 Examination. Each OWMS-50 shall be examined for compliance with the requirements of 3.5, 3.5.1 through 3.5.4, 3.5.7, 3.5.8, 3.5.9, 3.6.4, 3.6.5, 3.7.1.2, 3.7.2.2, 3.9.4, and 3.9.5. This element of inspection shall encompass all visual examinations including verification of physical interfaces, operational parameters and capabilities, system design compliance, and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects shall constitute cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

TABLE II. Requirements and verification methods.

Requirement Title	Requirement Paragraph	1st Article Test Method	Conformance Test Method
Materials	3.3	4.5.1.1	N/A
Wetted materials	3.3.1	4.5.1.1	N/A
Dissimilar metals	3.3.2	4.5.1.1	N/A
Material deterioration, prevention and control.	3.3.3	4.5.1.1	N/A
Identification of materials and finishes	3.3.4	4.5.1.1	N/A
Electrical cable materials	3.3.5	4.5.1.1	N/A
Recycled, recovered, or environmentally preferable materials	3.3.6	4.5.1.1	N/A
Environmental considerations	3.4	4.5.2	N/A
Shock	3.4.1	4.5.2.1	N/A
Environmental vibration	3.4.2	4.5.2.2	N/A
Internally excited vibration	3.4.3	4.5.2.3	N/A
Airborne noise	3.4.4	4.5.2.4	N/A
Structureborne noise	3.4.5	4.5.2.5	N/A
Electromagnetic compatibility	3.5.6	4.5.2.6	N/A
Operational temperatures	3.4.7	4.5.2.7, 4.5.2.8	N/A
Storage (non-operating) temperatures	3.4.8	4.5.2.7, 4.5.2.8	N/A
Humidity	3.4.9	4.5.2.9	N/A
Inclination	3.4.10	4.5.2.10	N/A
Salt fog	3.4.11	4.5.2.11	N/A
Design	3.5	4.4	4.4
Feed system	3.5.1	4.4	4.4
Separation system	3.5.2	4.4	4.4
System connections	3.5.3	4.4	4.4
Size and weight	3.5.4	4.4, 4.5.1	4.4
Power consumption	3.5.5	4.5.4	4.5.5
Compressed air consumption	3.5.6	4.5.4	4.5.5
Grounding and bonding	3.5.7	4.4	4.4
Markings	3.5.8	4.4	4.4
Membrane module permeate isolation	3.5.9	4.4	4.4
Performance characteristics	3.6	4.5.4	4.5.5
Permeate discharge requirements	3.6.1	N/A	N/A
Permeate discharge flow	3.6.1.1	4.5.6	4.5.5
Oil removal	3.6.1.2	4.5.4	4.5.5
Concentrate discharge requirements	3.6.2	N/A	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

TABLE II. Requirements and verification methods – Continued.

Requirement Title	Requirement Para.	1st Article Test Method	Conformance Test Method
Concentrate discharge flow	3.6.2.1	4.5.6	4.5.5
Particulate processing	3.6.2.2	4.5.4	N/A
Flushing water discharge requirements	3.6.3	N/A	N/A
Flushing water discharge flow	3.6.3.1	4.5.6	4.5.5
Self-cleaning cycles	3.6.3.2	N/A	N/A
Membrane flush cleaning cycle	3.6.3.2.1	4.5.4	4.5.5
Membrane hot flush cleaning cycle	3.6.3.2.2	4.5.4	4.5.5
Membrane regeneration cycle	3.6.3.2.3	4.5.4	4.5.5
System drain	3.6.3.3	4.5.4	N/A
Back flow prevention	3.6.4	4.4	4.4
Compressed air moisture removal	3.6.5	4.4	4.4
Operation and controls	3.6.6	4.5.6	4.5.6
Normal operation	3.6.6.1	4.5.4, 4.5.6	4.5.6
Controlling	3.6.6.2	4.5.6	4.5.6
Warning indicators	3.6.6.3	4.5.6	4.5.6
Alarms	3.6.6.4	4.5.6	4.5.6
Indicator panel	3.6.6.5	4.5.6	4.5.6
Data logging	3.6.6.6	4.5.6	4.5.6
Sensors and instruments	3.6.6.7	4.5.6	4.5.6
Interface requirements	3.7	N/A	N/A
External (ship) interfaces	3.7.1	N/A	N/A
Functional interfaces	3.7.1.1	4.5.6	4.5.5, 4.5.6
Physical interfaces	3.7.1.2	4.4	4.4
Internal (filtration module) Interfaces	3.7.2	N/A	N/A
Functional interface	3.7.2.1	4.5.1.2, 4.5.4, 4.5.6	4.5.1.2, 4.5.5, 4.5.6
Physical interface	3.7.2.2	4.4	4.4
Hydrostatic integrity	3.8	4.5.3	4.5.3
Reliability and maintainability	3.9	N/A	N/A
MTBCF	3.9.1	4.5.7	N/A
Maintenance ratio	3.9.2	4.5.8	N/A
MaxTTR	3.9.3	4.5.9	N/A
Maintenance access	3.9.4	4.4	4.4
Maintenance clearance	3.9.5	4.4	4.4
Safety	3.10	4.5.10	4.5.11
Human factors	3.11	4.5.11	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

4.5 Tests.

4.5.1 Material and pump tests.

4.5.1.1 Material test. Conformance to 3.3 shall be determined by inspection of contractor records providing proof or certification that materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.5.1.2 Recirculation pump test. Conformance with the recirculation system flow and pressure requirements specified in 3.7.2.1 and MIL-PRF-32097 shall be verified by inspection of contractor records providing certification, such as a non-witness performance test, that the recirculation pump when normally operated is capable of developing and maintaining a flow rate and pressure within the specified ranges.

4.5.2 Environmental verification tests.

4.5.2.1 Shock test. The OWMS-50 shall be shock tested as a complete assembly (including the heaviest filtration modules allowed in MIL-PRF-32097, valves, strainers, tanks, pumps/motors, inter-connecting piping, etc.) in accordance with MIL-S-901 as specified in 3.4.1. Since this test is often destructive, use of a nonfunctional membrane/housing is allowable.

4.5.2.2 Environmental vibration. The OWMS-50 shall be tested in accordance with MIL-STD-167-1 as specified in 3.4.2.

4.5.2.3 Internally excited vibration. The OWMS-50 shall be tested in accordance with MIL-STD-167-1 as specified in 3.4.3.

4.5.2.4 Airborne noise. The OWMS-50 shall be tested for airborne noise in accordance with MIL-STD-740-1 as specified in 3.4.4.

4.5.2.5 Structureborne noise. The OWMS-50 shall be tested for structureborne noise tests in accordance with MIL-STD-740-2 as specified in 3.4.5.

4.5.2.6 Electromagnetic compatibility. The OWMS-50 shall be tested as specified in 3.4.6 to determine conformance with the applicable electromagnetic emissions and susceptibility requirements in MIL-STD-461.

4.5.2.7 High temperature. The OWMS-50 shall be tested for high temperature storage and operation in accordance with MIL-STD-810, Method 501.4, procedure I and II. The maximum test temperature for operating shall be the upper limit specified in 3.4.7. The maximum test temperature for the storage temperature shall be the upper limit specified in 3.4.8. The operating period for each test shall be one hour at the constant maximum temperature.

4.5.2.8 Low temperature. The OWMS-50 shall be tested for low temperature storage and operation in accordance with MIL-STD-810, Method 502.4, procedure I and II. The lowest test temperature for operating shall be the lower limit specified in 3.4.7. The lowest test temperature for the storage temperature shall be lower limit specified in 3.4.8. The operating period for each test shall be one hour at the constant minimum temperature.

4.5.2.9 Humidity. The OWMS-50 shall be tested for the effects of a warm humid environment in accordance with MIL-STD-810, Method 507.4.

4.5.2.10 Inclination. The OWMS-50 shall be subjected to the inclination test specified in 3.4.10. This test shall be repeated with the OWMS-50 rotated 90 degrees through the vertical to the plane in which it was originally tested.

4.5.2.11 Salt fog. The OWMS-50 shall be tested for corrosion, electrical and physical effects of aqueous salt atmosphere accordance with MIL-STD-810, Method 509.2. Duration of test shall be 48 hours exposure followed by a 48-hour drying time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

4.5.3 Hydrostatic pressure test. All pressurized portions of the OWMS-50 shall be subjected to a hydrostatic pressure test as specified in 3.8 using potable water supplied at temperatures between 140 °F and 150 °F for first article, and between 65 °F and 85 °F for production units. The test shall be performed with the filtration modules installed and a connection made between the permeate connection for each filtration module and the recirculation loop to preclude the development of excessive and potentially damaging trans-membrane pressure. In addition, all remaining shipboard interfaces, air relief valves, and potable water supply valves shall be secured. After the test, the system shall be drained and allowed to air dry.

4.5.4 Operational test (first article). This test shall demonstrate that the first article OWMS-50, with the functioning filtration modules installed, meets the processing capabilities and operational modes specified herein. Prior to this test, documentation shall be provided that provides proof that the membrane filtration modules conform to the requirements of and passed the performance tests specified in MIL-PRF-32097. The following shall be performed:

a. Operate the system for 134 runs at 3 hours per run for a total of approximately 400 hours of operation. The OWMS-50 shall remain OFF for at least 1 hour between operating cycles.

b. During all test runs, the system shall process 50 gpm of oily waste influent containing a test mixture, as defined in 4.5.4.1, in potable water connected at the ship's OWS effluent supply interface, at a volume reduction factor of 100 to 1 for all 134 test runs. During each 3-hour test run, the feed stream to the OWMS-50 shall be secured for 3 to 10 minutes, at randomly selected times, to simulate OWS effluent behavior. Samples shall be collected and analyzed during each 3-hour test run in accordance with 4.5.4.2 to verify the oil removal capabilities in 3.6.1.2. Verification of the particulate processing requirement in 3.6.2.2 shall be verified by visual observation of the system during operation and shutdown, including inspection of the system pressure gauges to verify membrane hydraulic resistance.

c. During each 3-hour test period, verify the system performs an automatic membrane flush-cleaning mode as specified in 3.6.3.2.1 at the end of each run (as a result of a predetermined time set as defined in 3.6.6.1 when feed inflow is zero). The test setup shall have a meter installed at the potable water supply connection to verify consumption of water does not exceed that specified in 3.6.3.2.1.

d. During the 400 hour test, perform a 6-hour membrane hot flush cleaning after completing 100, 200, and 300 hours of operation to demonstrate the self-cleaning capabilities specified in 3.6.3.2.2. No more than three hot flush procedures shall be performed during the operational test. The test setup shall have a meter installed at the potable water supply connection to verify consumption of water does not exceed that specified in 3.6.3.2.2. Verification of the recirculation loop maximum temperature shall be by visual observation of the system temperature gauge.

e. Upon completion of the 400-hour test above, perform a membrane regeneration test of the filtration membranes to demonstrate the regeneration capabilities specified in 3.6.3.2.3. The test setup shall have a meter installed at the potable water supply connection to verify consumption of water does not exceed that specified in 3.6.3.2.3. Verification of the recirculation loop maximum temperature shall be by visual observation of the system temperature gauge.

f. If the system uses externally provided compressed air, the test setup shall have a meter installed at the air supply connection to verify the amount of compressed air consumed by OWMS-50 after twenty-four hours of operation does not exceed that specified in 3.5.6.

g. Power consumption shall be measured on a periodic basis during the testing to verify consumption rates do not exceed that specified in 3.5.5.

h. Upon completion of the tests above, the system shall be drained through the flushing water discharge interface connection to verify the drain capabilities specified in 3.6.3.3. The filtration modules shall be removed and replaced.

4.5.4.1 Test mixture. The test mixture shall be fed into the system in such a way as to ensure complete mixing is reached. Discharges as defined in 3.6.2 shall not be reused in the system feed. The test mixture shall consist of the following:

a. 100 ppm of Naval distillate fuel conforming to MIL-PRF-16884.

b. 25 ppm of detergent conforming to MIL-D-16791 (Type I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

c. Solids mixture consisting of following:

(1) 20 ppm of test dust conforming to ISO 12103-1, A2 Fine (fine test dust).

(2) 1.25 ppm of fibrous solids as defined in 3.6.2.2.

4.5.4.2 Oil sampling. A minimum of 30 permeate samples and 5 feed samples shall be obtained at random times throughout the test with at least one-half the samples taken after 250 hours of operation. The samples shall be collected and analyzed in accordance with EPA Method 1664 SGT-HEM. A minimum of 3 quality control (QC) standard samples containing 10-ppm Naval distillate fuel conforming to MIL-PRF-16884 and 3 QC standards containing 100-ppm Naval distillate fuel conforming to MIL-PRF-16884, prepared by an independent laboratory, shall be inserted randomly into the analysis matrix to evaluate the analysis laboratory's accuracy. The performance test shall not be accepted if the mean feed oil content of the actual feed samples is 60 ppm or less.

4.5.5 Operational test (production units). The OWMS-50 shall be operated at rated flow and pressure for 2 hours to demonstrate system operates within operating parameters specified 3.6 and safety requirements in 3.10.

4.5.6 Functional test. The OWMS-50 shall be operated under all interface conditions for a period of not less than 1 hour to verify the control system's functional operation in 3.6.6 and all subparagraphs, permeate discharge flow capability in 3.6.1.1, concentrate discharge flow capability in 3.6.2.1, and flushing water discharge flow capability in 3.6.3.1, ship functional interface requirements in 3.7.1.1, and filtration module functional interface requirements in 3.7.2.1. All warning and alarm conditions described herein shall be simulated to verify all OWMS-50 warning indicators, alarms and data logging capabilities function correctly. All sensors and instruments shall be supplied a source to verify sensor calibration and displayed value on the system's message display unit.

4.5.7 MTBCF. The operational test in 4.5.4 shall demonstrate the OWMS-50 complies with the MTBCF requirement in 3.9.1.

4.5.8 Maintenance ratio. The scheduled and unscheduled maintenance shall be timed, accumulated and converted to a maintenance ratio during first article testing to verify compliance with the requirement in 3.9.3. Only scheduled maintenance in the manufacturers recommended maintenance schedule shall be permitted.

4.5.9 MaxTTR. Compliance with the MaxTTR in 3.9.3 shall be verified by analysis using test data obtained for corrective maintenance performed during operational testing, or if necessary, during a maintainability demonstration where faults are simulated (i.e. introduction of faulty parts, deliberate misalignment, open leads, shorted parts) to induce failures for repair. The observed MaxTTR shall include time for maintenance preparation, fault location and isolation, fault correction, adjustment and calibration, as well as follow-up check-out time. The observed MaxTTR shall not include the time required to shutdown and start-up the system or time lost due to administrative or logistical delays.

4.5.10 Safety. The OWMS-50 shall be evaluated throughout testing for safety requirements in 3.10.

4.5.11 Human factors. The OWMS-50 shall be inspected and evaluated throughout testing for human factor requirements in 3.11.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The OWMS-50 described in this specification is intended for use onboard Naval ships to process effluent from an OWS, to consistently produce an effluent containing no greater than 15-ppm oil content. The overall intended service life of the OWMS-50 is 30 years minimum with an operating life expectancy of 40,000 hours minimum.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When first article is required (see 3.2).

c. Ship or class of ship, or specific application for which the OWMS-50 is intended, electromagnetic emissions and susceptibility requirements (see 3.4.6), maximum cable length under 50 feet for remotely mounted controllers (see 3.6.6.2), interface connection specifications (see Table I), and ICAS interface specifications (see Table I).

d. Material certificates (see 4.5.1)

e. Packaging requirements (see 5.1).

6.3 System recommendations. Additional information regarding the Navy studies in the field of ultrafiltration may be found on the Internet. Website URLs will be provided by the procuring activity upon request. Developmental information originates from Naval Surface Warfare Center, Code 634, West Bethesda, MD. The system incorporates an open system architecture (OSA) strategy as defined in 6.7.11.

6.3.1 Recommended test material. Test conducted at Naval Surface Warfare Center used commercial dryer lint to simulate fibrous matter found onboard Navy surface ships.

6.3.2 50 gpm OWMS design example. Figure 1 shows a basic feed/ membrane recirculation loop system and its relation to other ship components. The arrangement of the filtration modules is not limited to the 3 by 5 configuration in the example.

6.3.3 Recommended water heating method. Heating of the ship provided potable water during a membrane hot flush is recommended to be entirely by the action of the recirculation pump.

6.3.4 Navy approved cleaners. Laboratory test conducted at Naval Surface Warfare Center used Ship's Hazardous Material List (SHML) National Item Identification Number (NIIN) 014469489 as the membrane-cleaning agent. Other cleaning products authorized by the Naval Sea Systems Command for use onboard U.S. Navy surface ships can be found on the Internet at http://www.nll.navsup.navy.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

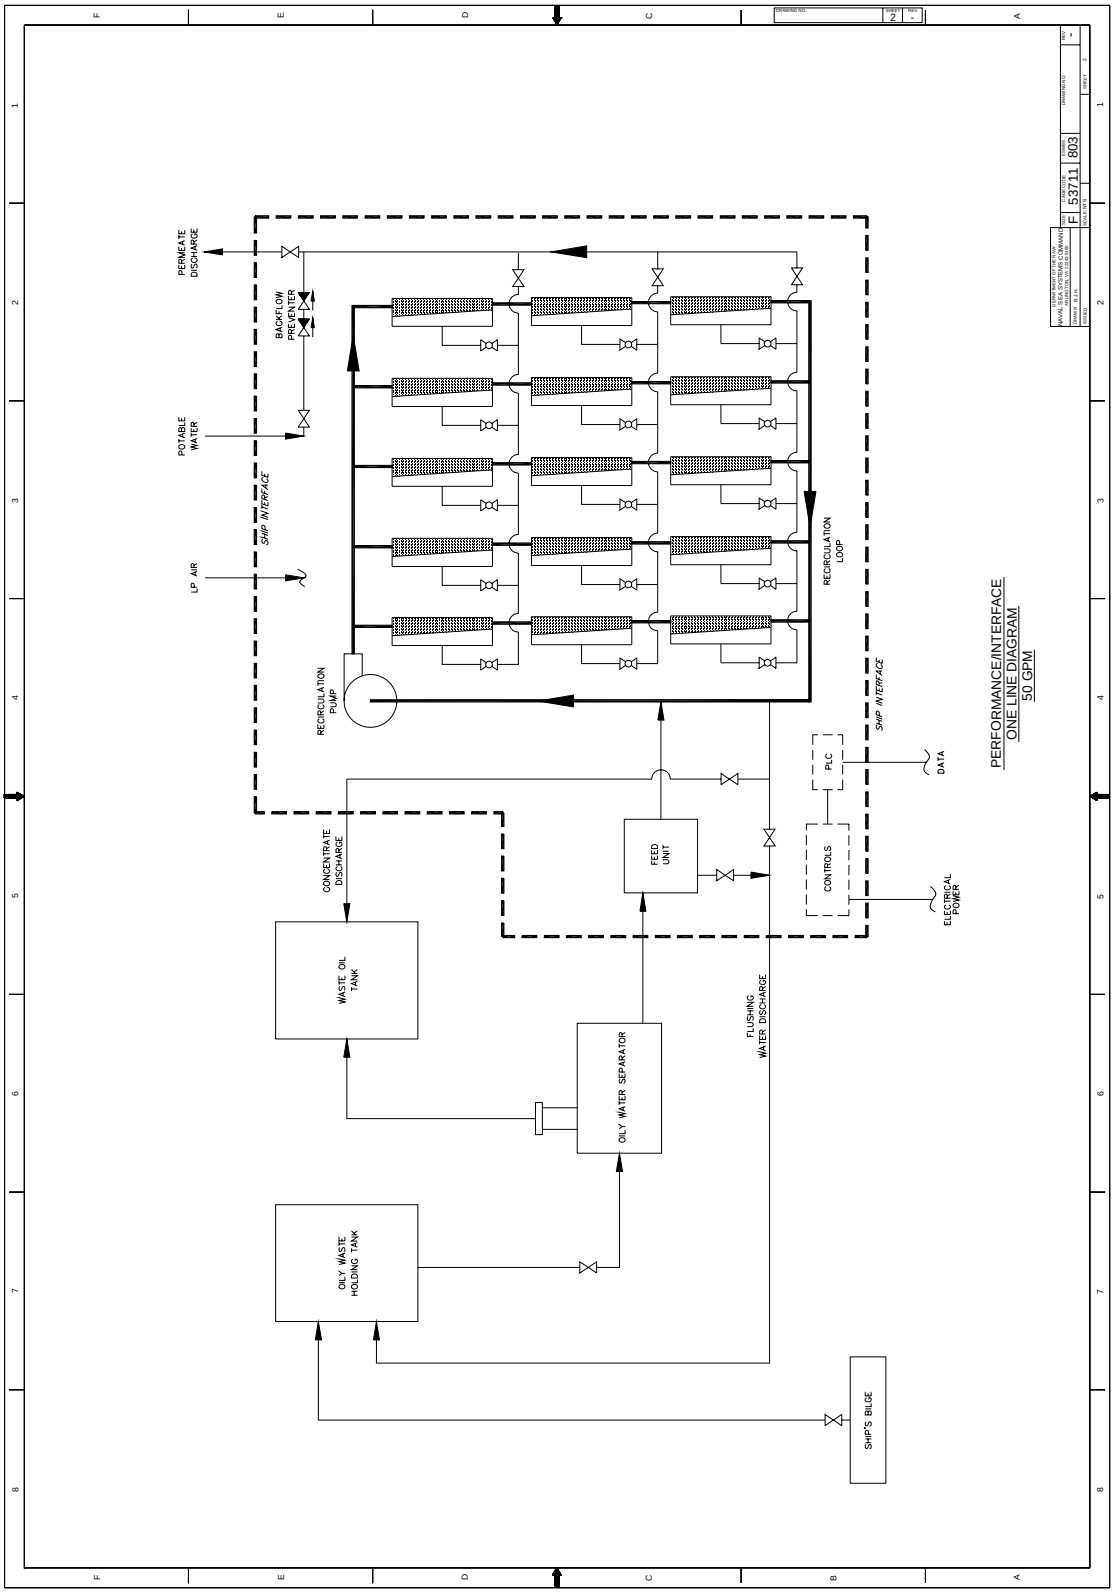


FIGURE 1. OWMS-50 prototype system design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

6.4 Technical manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, specifications and standards that have been authorized and assigned an Acquisition Management Systems Control (AMSC) number must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under separate contract line item in the contract.

6.5 Design and fabrication guidelines. The component design guidelines provided in this section are based upon past Navy shipboard experience with the OWMS. Oily waste membrane systems designed under those guidelines, have successfully met the performance requirements specified herein. These guidelines are intended to assist the contractor in ensuring that the OWMS-50 fully meets those performance requirements.

6.5.1 Membrane module mounting. For systems with inline membrane modules, sharing the mounting bolt between modules will likely minimize overall system size.

6.5.2 Pre-filtration method. Auto strainers with a 25 micron pore diameter have been successfully used in Navy prototype units to remove fibrous solids in order to reduce the potential of membrane face plugging. Slotted style auto strainers with a minimum dimension of 25 micron have been shown to be ineffective in Navy prototype units.

6.6 Oil/water separator (OWS) effluent behavior characteristics. Supply to the OWMS-50 comes from the C-50 OWS. The OWS has one inlet (bilge water) and two outlets (light phase/oil and heavy phase/water). The OWS inlet is a continuous feed, with its discharge cycling between the light phase and heavy phase. The effluent frequency is unpredictable. When the effluent is flowing from the C-50 OWS, the flow rate can vary from 0 to 60 gpm. Typical feed characteristics to the oily waste membrane system are described in 4.5.4. Additionally, numerous contaminants are found in bilge water. Constituents of the contaminants would most likely be, but not limited to, the chemicals identified in Phase I of Uniform National Discharge Standards (UNDS) project plus seawater.

6.7 Definitions.

6.7.1 Concentrate. Contaminant-laden fluid that has not passed through the membrane as permeate, also known as retentate.

6.7.2 Corrective maintenance. All actions performed as a result of failure to restore an item to a specified condition. Corrective maintenance can include any or all of the following steps: localization, isolation, disassembly, interchange, re-assembly, alignment, and checkout.

6.7.3 Critical failure. For testing purposes, a critical failure is defined as any fault, failure or malfunction which causes or may cause:

a. Failure to commence operation, cessation of operation or degradation of performance below specified levels.

b. Damage to the OWMS by continued operation.

c. Safety hazard to personnel.

6.7.4 Effluent. Clean water output from either the OWS or the oily waste membrane system. May be used interchangeably with permeate to describe clean water produced by the oily waste membrane system.

6.7.5 Equivalent spherical diameter. The diameter assigned to a nonspherical particle, which is equal to the diameter of a sphere with equal volume.

6.7.6 Feed. The influent stream to be processed by the oily waste membrane system.

6.7.7 Maintenance ratio. A maintenance ratio is a measure of the total maintenance manpower burden required to maintain an item. It is expressed as a ratio of the total active maintenance man-hours (scheduled and unscheduled) to the total operating time.

6.7.8 Mean time between critical failures (MTBCF). The total amount of mission time divided by the total number of critical failures (see 6.7.3) during a stated series of missions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

6.7.9 Oil/water separator (OWS). Generally used to refer to any primary separation device that separates relatively large concentrations of oil and water. The OWS processes oily waste before secondary treatment by the oily waste membrane system.

6.7.10 Oily waste holding tank (OWHT). The OWHT receives oily waste from the ship's bilges. It serves as a settling tank and as the source from which the OWS draws influent.

6.7.11 Open system architecture (OSA). The resulting open system design should optimize predicted life cycle cost and performance, allow advances in technology to be readily incorporated, and provide for rapid reconfiguration of systems to respond to mission or operational requirement changes. The open system design should favor modularity and compatibility with other Fleet assets and should use standard and/or publicly available, nonproprietary interfaces such that new or upgraded functionality can be incorporated from multiple suppliers over the ship's life cycle. The open system design should facilitate operations in combined missions with other services and interagency, multi-national, and non-Government organizations.

6.7.12 Permeate. Clean fluid obtained by membrane filtration.

6.7.13 Preventive maintenance. All actions performed in an attempt to retain an item in specified condition by providing systematic inspection, detection, and prevention of incipient failures.

6.7.14 Subsystem. A subsystem is a system within one of the defined systems.

6.7.15 Trans membrane pressure. Trans membrane pressure is the differential pressure between the filtration module's average concentrate pressure and permeate pressure.

6.7.16 Volume reduction factor. Volume reduction factor is the amount of membrane system influent compared to the amount of concentrate discharged (i.e., 100:1 equals 1 gallon of concentrate for 100 gallons of influent).

6.8 Subject term (key word) listing.

Bilge water
Filtration
Membrane
Membrane module
Oil pollution abatement
Oil/water separator
Oily waste holding tank
Open system architecture
OSA
OWHT
OWS
Ultrafiltration
Waste oil tank
WOT

6.9 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army – AT
Navy – SH
Air Force – 99

Review Activities:
Army – GL, GL4
Air Force – 03, 84
DLA – CC

Preparing Activity:
Navy – SH
(Project 4610-2006-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:26Z
Check the source to verify that this is the current version before use.