MILITARY SPECIFICATION

TEST SET, AFTERBODY, TORPEDO, MARK 442 MOD 0

(For Torpedo Mk 46 Mod 0)

This specification has been approved by the
Bureau of Naval Weapons, Department of the Navy

1. SCOPE

1.1 Scope.- This specification covers the Torpedo Afterbody Test Set Mark 442 Mod 0, referred to herein as the "Test Set," (see 6.1 for description and intended use).

2. APPLICABLE DOCUMENTS

2.1 Government documents.- The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-636 Boxes, Fiber

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation, Methods of
MIL-S-901	Shockproof Equipment, Class HI (High Impact), Shipboard Application, Tests for
MIL-E-16400	Electronic Equipment, Naval Ship and Shore: General Specification

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment

DRAWINGS

Bureau of Naval Weapons

BuWeps LD 535768 (List of Drawings)	Test Set, Afterbody, Torpedo, Mk 442 Mod 0

(Copies of documents required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

Consolidated Classification Committee

Uniform Freight Classification Rules

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois.)

3. REQUIREMENTS

3.1 Preproduction sample.- Unless otherwise specified in the contract or order, the preproduction sample shall:

(a) Be manufactured using the procedures proposed for production

(b) Consist of one Afterbody Test Set

(c) Be tested as specified in section 4 herein and is for the purpose of determining that, prior to starting production, the supplier's production methods are capable of yielding items that comply with the technical requirements of the contract.

3.2 Basic requirements.-

3.2.1 Materials and treatments of materials and parts.- Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the Test Set shall be in accordance with the requirements specified herein, and with the applicable documents listed in BuWeps LD 535768. Fungus nutrient material shall not be used.

3.2.1.1 Selection of materials.- Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein, and which are necessary for the execution of this specification, shall be selected in accordance with the requirements specified herein, and with the applicable documents listed in BuWeps LD 535768.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

3.2.2 Gages.- The supplier shall provide whatever gages are necessary and adequate to ensure that the material and parts of the Test Set will meet dimensions and requirements shown on applicable documents. When requested by the supplier, the procuring activity will furnish existing drawings of pertinent Naval final inspection gages for use only in the designing of the supplier's gages. This action does not relieve the supplier of the responsibility for designing and manufacturing the gages needed for satisfactory fulfillment of the contract requirements.

3.2.3 Inspection and test equipment and facilities.- The supplier shall furnish and maintain all necessary inspection and test equipment and facilities, and provide personnel for performing all acceptance tests specified herein. The test equipment shall be adequate in quantity to permit performance of the required acceptance tests for the Test Set.

3.3 Performance requirements and physical characteristics.-

NOTE: Designations appearing on the control panel of the Test Set are indicated in the text in all capital letters.

3.3.1 Power circuits.- When the POWER switch is in the ON position, the internal power circuits shall be energized and POWER lamp shall light. When TEST TYPE switch is at FUNCTIONAL, and the test set energized, the UP-PORT-OPEN and DOWN STBD-CLOSE lamps shall light and the TEST NUMBER indicator shall be red and indicate "00".

3.3.2 Test timer.- The timer shall start timing when 40 ± 4 volts direct current (vdc) is applied across connector pins J1-46 (+) and J1-10 (-). At the end of 60 ± 20 seconds, the STOP TEST lamp shall light.

3.3.3 ADVANCE switch.- Depressing the ADVANCE switch shall cause the stepping switch and TEST NUMBER to advance to the next test position.

3.3.4 Test response.- The Test Set shall indicate a "satisfactory" or "unsatisfactory" test response for each test position. Satisfactory and unsatisfactory responses are shown in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

Table I
Test Responses

TEST TYPE Switch Position	TEST MODE Switch Position	TEST NUMBER Indicator			
		Satisfactory Response		Unsatisfactory Response	
		Operation	Color	Operation	Color
FUNC-TIONAL	AUTO	Steps to next test position automatically	Green	Stops at test position	Green changes to Red
	MANUAL	Remains at test position	Green	Remains at test position	Green changes to Red
STATIC	AUTO	Steps to next test position automatically	Green	Remains at test position	Red
	MANUAL	Remains at test position	Green	Remains at test position	Red

3.3.5 Function monitoring.- The FUNCTION MONITOR meter shall monitor two external circuit voltages, two internal voltages, or the current in an external circuit, as selected by the METER SELECT switch. The meter shall have an accuracy of ± 2 percent of full scale. The meter readings shall be as shown in table II for each position of the METER SELECT switch. The AC VOLTS signal lamp shall light when 32 ± 4 volts, root-mean-square (vrms) alternating current at 2000 ± 100 cps is applied to pins J1-22 and J1-28. The WATER PUMP lamp shall light when an external switch is closed between pins J5-P and J5-N.

Source: https://assist.dla.mil -- Downloaded: 202640-23T04:58Z
Check the source to verify that this is the currentversion before use.

Table II
Function Monitor Circuits

METER SELECT Switch Settings	Meter Reading	Circuit Description
+30 V	30.0 ± 1.5 vdc	Internal calibration circuit voltage
-36 V	36.0 ± 1.8 vdc	Signal voltage for FUNCTIONAL TESTS
SHUNT FIELD CURRENT	1.05 ± .10 amp	J1-34 (+) to J1-40 (-) thru 10.2 ohms
+40 V	40 vdc nominal	External supply: J1-46 (+), J1-10(-)
-40 V	40 vdc nominal	External supply: J1-10 (+), J1-53 (-)

3.3.5.1 Shunt field current circuit.- The shunt field current shall be supplied by an internal power supply providing 1.05 ± 0.10 ampere through a 10.2 ohm resistance, which is connected between J1-34 (+) and J1-40 (-).

3.3.6 Static tests.- When the TEST TYPE switch is set for STATIC, the test sequence shall consist of 48 tests.

3.3.6.1 Self tests.- TEST NUMBERS 01 through 07 and 42 through 48 automatically check the test thresholds of the Test Set by applying (to the internal circuits of the Test Set) calibrated voltages which simulate satisfactory and unsatisfactory external circuit conditions. Numbers 01, 03, 05, 07, 42, 44, 46, and 48 shall indicate "unsatisfactory" (see 3.3.4).

3.3.6.2 Resistance threshold.- TEST NUMBER's 08 through 16 shall indicate "satisfactory" when the external circuit resistance is within the ranges specified in table III, and "unsatisfactory" when the external circuit resistance is outside of these ranges (see 3.3.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

Table III

External Circuit Resistance Values

TEST NUMBER	Resistance Threshold (ohms)		Connector J1 Pins
	Lower ± 10%	Upper ± 10%	
08	8	12	34 to 40
09	288	432	6 to 24
10	288	432	12 to 24
11	288	432	18 to 24
12	1600	2400	42 to 48
13	4000	6000	1 to 13
14	4000	6000	7 to 13
15	4000	6000	20 to 26
16	4000	6000	20 to 38

3.3.6.3 Insulation resistance.- TEST NUMBER's 17 through 25 shall indicate "satisfactory" (see 3.3.4) when the external circuit resistance is greater than 1 megohm ± 10 percent between pin J1-4 and each of the following pins (in electrical connector J1): 7, 10, 17, 24, 26, 30, 32, 40, 44, 48, 50, 53, and 54.

3.3.6.4 Continuity.- TEST NUMBER's 26 through 41 shall indicate "satisfactory" (see 3.3.4) when the external circuit resistance is less than 1 ohm ± 10 percent between the pairs of pins (in electrical connector J1) listed in table IV.

3.3.6.5 Direct measurement.- The resistance in the external circuit corresponding to any TEST NUMBER shall be measurable across the TEST JACKS when the TEST MODE switch is set to the TEST JACKS position.

3.3.7 Functional tests.- When the TEST TYPE switch is set for FUNCTIONAL, the test sequence shall consist of ten tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

Table IV

Continuity Circuits

TEST NUMBER	Connector J1-Pins
26	50 to 56
27	3 to 62
28	9 to 15
29	45 to 51
30	57 to 63
31	46 to 52
32	52 to 58
33	11 to 64
34	5 to 35
35	5 to 60
36	29 to 53
37	29 to 41
38	36 to 47
39	59 to 65
40	59 to 66
41	10 to 23

3.3.7.1 Signal output.- With the FUNCTIONAL TEST MODE switch at A or B, the output voltages shall be continuous and shall be in accordance with table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

Table V

Signal Outputs

ATTITUDE Switch	TEST MODE Switch	TEST NUMBER	Signal (vdc)	Connector Pins (+)	Connector Pins (-)
ROLL	B	01-	34.0 ± 2.8	J1-6	J1-24
ROLL	A		0.0 +0.4 -0.0	J1-6	J1-24
PITCH	B	through	34.0 ± 2.8	J1-12	J1-24
PITCH	A		0.0 +0.4 -0.0	J1-12	J1-24
YAW	B	-09	34.0 ± 2.8	J1-18	J1-24
YAW	A		0.0 +0.4 -0.0	J1-18	J1-24
Any	A	10	6.0 ± 0.6	J1-48	J1-42
Any	B	10	6.0 ± 0.6	J1-42	J1-48

(a) The 3 cps thru 8 cps settings of the TEST MODE switch shall provide cyclic switching of the test voltages indicated for tests 01 through 09 in table V at the indicated cycling rate within ± 10 percent.

(b) The AUTO and MANUAL settings of the TEST MODE switch shall provide programmed tests in accordance with table VI. In AUTO mode, tests 01 through 09 shall be a minimum of 2 seconds duration and test 10 shall be a minimum of 8 seconds. In MANUAL mode the signals shall cycle continuously.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

Table VI

Programmed Signal Duration

TEST NUMBER	Signal Voltage	Connector (+) Pins	(-)	Limits
01	34 ± 2.8	J1-6	J1-24	163 +16 -0 ms
	0	J1-6	J1-24	163 +16 -0 ms
02	34 ± 2.8	J1-6	J1-24	25 +3 -0 ms
	0	J1-6	J1-24	163 +16 -0 ms
03	34 ± 2.8	J1-6	J1-24	163 +16 -0 ms
	0	J1-6	J1-24	25 +3 -0 ms
04	34 ± 2.8	J1-12	J1-24	100 +10 -0 ms
	0	J1-12	J1-24	100 +10 -0 ms
05	24 ± 2.8	J1-12	J1-24	25 +3 -0 ms
	0	J1-12	J1-24	100 +10 -0 ms
06	34 ± 2.8	J1-12	J1-24	100 +10 -0 ms
	0	J1-12	J1-24	25 +3 -0 ms
07	34 ± 2.8	J1-18	J1-24	100 +10 -0 ms
	0	J1-18	J1-24	100 +10 -0 ms
08	34 ± 2.8	J1-18	J1-24	25 +3 -0 ms
	0	J1-18	J1-24	100 +10 -0 ms
09	34 ± 2.8	J1-18	J1-24	100 +10 -0 ms
	0	J1-18	J1-24	25 +3 -0 ms
10	6 ± 0.6	J1-42	J1-48	350 +35 -0 ms
	6 + 0.6	J1-48	J1-42	410 +41 -0 ms

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

3.3.7.2 Position indicator lamps.- The lamps labeled DOWN STBD CLOSE and UP PORT OPEN shall be controlled in accordance with the conditions shown in table VII.

Table VII

Position Lamp Response

ATTITUDE Switch Position	TEST NUMBER	Circuit Closed to Ground	UP PORT OPEN Lamp	DOWN STBD CLOSE Lamp
ROLL	01, 02, or 03	J5-A	Off	On
ROLL	01, 02, or 03	J5-E	On	Off
PITCH	04, 05, or 06	J5-B	Off	On
PITCH	04, 05, or 06	J5-F	On	Off
YAW	07, 08, or 09	J5-C	Off	On
YAW	07, 08, or 09	J5-G	On	Off
ANY	10	J5-D	Off	On
ANY	10	J5-H	On	Off

3.3.7.3 Test failure timing.- At each test number of table VIII the Test Set shall indicate "satisfactory" (see 3.3.4) when either a ground is connected to the indicated pin or the RESET switch is depressed prior to the end of the indicated time duration, and shall indicate "unsatisfactory" when these conditions are not met. The time-to-failure timer shall stop when the indicated pin is connected to ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

Table VIII

Timing Circuit Requirements

TEST NUMBER	Connector Pin	Time to Failure Indication (ms)
01	J5-J	240 +0 -12
02	J5-A	240 +0 -12
03	J5-E	240 +0 -12
04	J5-K	140 +0 -7
05	J5-B	140 +0 -7
06	J5-F	140 +0 -7
07	J5-L	140 +0 -7
08	J5-C	140 +0 -7
09	J5-G	140 +0 -7
10	J5-M	620 +0 -30

3.3.8 Power requirements.- The Test Set shall operate on 115 ± 10 volts alternating current, at 60 ± 3 cycles per second.

3.3.9 Insulation resistance.- The insulation resistance between separate circuits, and between each separate circuit and the panel and housing of the Test Set shall be greater than 100 megohms at 50 vdc. Connector pin J6-B shall be grounded to the Test Set housing.

3.3.10 Weight.- The weight of the Test Set shall be 100 pounds maximum.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T04:58Z
Check the source to verify that this is the current version before use.

3.4 Environmental requirements.- Unless otherwise specified, the Test Set shall conform to the performance requirements and physical characteristics of this specification during and after exposure to the following environments.

3.4.1 Temperature.- The Test Set shall be capable of conforming to the temperature requirements of Specification MIL-E-16400, Class 4.

3.4.2 Humidity.- The Test Set shall be capable of conforming to the humidity requirements of Specification MIL-E-16400.

3.4.3 Shock.- The Test Set shall be capable of conforming to the shock requirements of Specification MIL-S-901, Grade I, Type A, lightweight equipment, except that the Test Set shall be in the nonoperating condition, and the hammer drops shall be from 1 foot, 1-1/2 feet, and 3 feet.

3.4.4 Vibration.- The Test Set shall be capable of conforming to the vibration requirements of Standard MIL-STD-167, except that the Variable Frequency and Endurance requirements are replaced by the following frequency requirements (3.4.4.1).

3.4.4.1 Vibration frequency (variable).- The Test Set in the operating condition, shall withstand vibration from 5 to 15 cps at an amplitude of 0.030 $\pm$ 0.006 inch and from 16 to 25 cps at an amplitude of 0.020 $\pm$ 0.004 inch. The vibrations shall be applied in discrete frequency intervals of 1 cps, and shall be applied for 1 minute at each interval.

3.4.5 Inclination.- The Test Set shall be capable of conforming to the inclination requirements of Specification MIL-E-16400.

3.5 Service life.- The service life of the Test Set shall be 5 years of normal service with a minimum of 60 days between calibration.

3.6 Identification.- The Test Set shall be permanently identified in accordance with Standard MIL-STD-130 and the applicable documents in BuWeps LD 535768.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

3.7 Workmanship.- The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved pre-production sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- Inspection of the Test Set shall be classified as follows:

(a) Preproduction inspection

(1) Preproduction sample (see 4.3.1)

(2) Preproduction tests (see 4.5)

(b) Periodic production inspection

(1) Periodic production sampling (see 4.3.2)

(2) Periodic production tests (see 4.6)

(c) Acceptance inspection

(1) Acceptance sampling (see 4.3.3)

(2) Acceptance tests and examinations (see 4.7)

Source: https://assist.dla.mil -- Downloaded: 20261O-23T04:58Z
Check the source to verify that this is the current version before use.

4.3 Sampling.-

4.3.1 Preproduction sample.- The preproduction sample, manufactured in accordance with 3.1, shall be subjected to the preproduction tests detailed in 4.5 at an activity designated by the procuring activity. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the Test Set by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

4.3.2 Periodic production sampling.- Periodic production tests detailed in 4.6 shall be performed at an activity designated by the procuring activity. Samples shall consist of Test Sets that have satisfactorily passed the acceptance tests and examinations detailed in 4.7, and shall be selected as follows:

(a) Step 1.- Upon initiation of production, randomly select 1 unit from each group of 20 units. Upon satisfactory compliance of samples selected from three consecutive groups, proceed to step 2.

(b) Step 2.- Randomly select 1 unit from each group of 50 units. Continue with step 2 for the balance of the contract or until a defective unit is found.

4.3.2.1 Defective units.- When a defective unit is found in any group the supplier shall:

(a) Determine the cause of the defects

(b) Determine if the defect is an isolated case

(c) Take the necessary action to eliminate the defects from units on hand, and if so directed by the procuring activity, from those units previously shipped.

(d) Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect

(e) Return to step 1 (4.3.2(a)) and proceed as indicated for inspection of units subsequently produced

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

4.3.3 Acceptance sampling.- The tests and examinations detailed in 4.7 shall be conducted on each Test Set to be delivered; therefore, there is no sampling plan for acceptance. Defective units shall be rejected.

4.4 Test conditions.- Unless otherwise specified, the Test Sets shall be subjected to tests under the following conditions:

(a)	Temperature	60 to 95 degrees F, (Room ambient)
(b)	Humidity (Relative)	Room ambient, up to 95 percent
(c)	Altitude	Normal ground atmospheric pressure

4.5 Preproduction tests.- The preproduction sample, after satisfactorily passing the acceptance tests and examinations (4.7), shall be subjected to the preproduction tests (4.5.2 and 4.5.3). Certified inspection data covering the results of preproduction tests shall be forwarded to the Bureau of Naval Weapons. Certified inspection data shall consist of the following:

(a) Date of tests and names of persons conducting tests

(b) Run or test plan used

(c) Serial number of the Test Set

(d) Test results of preproduction tests (4.5.2 through 4.5.3)

4.5.1 Preproduction test equipment.- The following items of test equipment, or equivalent items, will be required to perform the tests specified herein:

	Item	Identification
(a)	Power supply; (115 vac, 60 cps, 100 watts minimum)	Commercial power service
(b)	Stopwatch	Commercial

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

	Item	Identification
(c)	Power supply; (0 to 40 vdc, 5 amps minimum)	Sorensen VMD60-5
(d)	Resistance, 10.2 ohms (± 0.5% accuracy: 25 watt rating)	Dale Electronics RH-25
(e)	Electronic counter (± 0.1% accuracy)	Hewlett-Packard 522B
(f)	Audio Oscillator (35 vac, 2000 cps)	Hewlett-Packard 233A
(g)	Vacuum Tube Voltmeter Direct Current (DC VTVM) ± 2% accuracy	Hewlett-Packard 412A
(h)	Vibration test fixture capable of applying vibration as specified in 3.4.4 and 3.4.4.1	
(i)	Shock test fixture capable of applying shock as specified in 3.4.3	
(j)	Temperature-humidity chamber capable of providing environment as specified in 3.4.1 and 3.4.2	
(k)	Inclination test fixture capable of providing inclination attitudes as specified in 3.4.5	
(l)	Response simulator (see figure 1 for schematic)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

4.5.2 Environmental tests.- The Test Set shall be subjected to the following environmental tests. Unless otherwise specified, inability of the Test Set to satisfactorily pass the acceptance tests and examination, subsequent to the environmental tests, shall constitute a failure.

4.5.2.1 Temperature.- Mount the Test Set in the temperature-humidity test chamber (4.5.1(j)).

(a) Nonoperating condition.- Subject the Test Set in the nonoperating condition, to the nonoperating condition temperature test specified in Specification MIL-E-16400.

(b) Operating condition.- Subject the Test Set, in the operating condition, to operating condition temperature test specified in Specification MIL-E-16400.

4.5.2.2 Humidity.- Mount the Test Set in the temperature-humidity chamber (4.5.1(j)) and subject it to the humidity test specified in Specification MIL-E-16400.

4.5.2.3 Shock.- Mount the Test Set as specified in the shock test in Specification MIL-E-16400, and secure it to the shock test fixture (4.5.1(i)). Subject the Test Set to the shock tests specified in Specification MIL-S-901, Grade I, Type A, lightweight equipment, with the exceptions specified in paragraph 3.4.3 herein.

4.5.2.4 Vibration.- Mount the Test Set on the vibration test fixture (4.5.1(h)) as specified in Standard MIL-STD-167. Subject the Test Set to vibration at the amplitudes and for the time periods specified in paragraph 3.4.4.1 herein.

4.5.2.5 Inclination.- Mount the Test Set on the inclination test fixture (4.5.1(k)) for the inclination test as specified in Specification MIL-E-16400, and subject the Test Set to the inclination test as specified therein.

4.5.3 Accelerated life.- Subject the Test Set to the accelerated life tests specified in Specification MIL-E-16400. Degradation of performance below specified requirements during this test, or inability to pass the acceptance test subsequent to this test, shall constitute a failure.

Source: https://assist.dla.mil -- Downloaded: 202640-23T04:58Z
Check the source to verify that this is the current version before use.

4.6 Periodic production tests.- The periodic production sample, selected in accordance with 4.3.2, shall be subjected to the following tests (4.6.2). Certified inspection data covering the results of periodic production tests shall be forwarded to the Bureau of Naval Weapons. Certified inspection data shall consist of the following:

(a) Items 4.5(a) through 4.5(c)

(b) Test results of periodic production tests (4.6.2)

4.6.1 Periodic production test equipment.- A vibration test fixture capable of applying vibration over a frequency band of 50 to 2000 cps at an amplitude up to 5 g RMS is required to perform the periodic production tests.

4.6.2 Periodic production test.- The Test Set shall be subjected to a 5-minute period of vibration at a 1 to 3 g RMS level. The frequency of vibration shall cover the band from 50 to 2000 cps and shall have a uniform acceleration density over this band. There shall be no single frequency component of greater than 4.5 g peak in the band of frequency from 50 to 2000 cps. The Test Set shall be inspected for vibration damage and to verify the quality of workmanship. Any evidence of broken connections; loose parts, structural failure or other vibration damage shall be considered cause for rejection.

4.7 Acceptance tests and examinations.- The following tests and examinations (4.7.2 through 4.7.5) shall be conducted on each Test Set to be delivered. Failure to pass any test specified herein shall be considered cause for rejection of the unit.

4.7.1 Acceptance test equipment.- The following items of test equipment are required to perform the acceptance tests specified herein:

(a) Power supply (see 4.5.1(a))

(b) Stop Watch (see 4.5.1(b))

(c) Power supply (see 4.5.1(c))

Source: https://assist.dla.mil -- Downloaded: 202640-23T04:58Z
Check the source to verify that this is the currentversion before use.

(d) Resistance (see 4.5.1(d))

(e) Electronic counter (see 4.5.1(e))

(f) Audio oscillator (see 4.5.1(f))

(g) DC VTVM (see 4.5.1(g))

(h) Response Simulator (see 4.5.1(l))

4.7.2 Acceptance test set up.- Connect the power supply (4.7.1(a)) to connector plug J2 on the test set.

4.7.3 Function monitor.-

4.7.3.1 Power check.- Set TEST TYPE switch to FUNCTIONAL, and the POWER switch to ON. The POWER, UP-PORT-OPEN, and the DOWN-STBD-CLOSE lamps shall light.

4.7.3.2 Meter check.-

(a) Rotate METER SELECT control to +30 V; connect DC VTVM (4.7.1(g)) to J5-P (+) and J5-R (-). CAUTION: Do not allow pins J5-P and J5-R to be shorted. External voltage shall be 30 ± 1.5 vdc and FUNCTION MONITOR METER shall indicate within 1 vdc of the external voltmeter reading.

(b) Disconnect external voltmeter from J5-P and J5-R, and connect to J1-40 (+) and J1-24 (-): rotate METER SELECT control to -36 V. External voltage shall be -36 ± 1.8 vdc and FUNCTION MONITOR METER shall indicate within 1 vdc of the external voltmeter reading.

(c) Disconnect external voltmeter.

4.7.3.3 AC volts lamp check.-

(a) Connect audio oscillator (4.7.1(f)) to pins J1-22 and J1-28. On oscillator, set Frequency to 2000 ± 100 cps and Output Level to 24 vac rms; AC VOLTS lamp on Test Set shall not light

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

(b) Increase Output Level to 32 vac rms; AC VOLTS lamp shall light

(c) Disconnect oscillator

4.7.3.4 Water pump lamp check.- Connect response simulator (4.7.1(h)) to J5 and depress Water Pump Switch on response simulator; WATER PUMP lamp on test set shall light.

4.7.3.5 Stop-test timer check.- Rotate METER SELECT control to +40 V. Apply +40 ± 1 vdc (4.7.1(c)) to pins J1-46(+) and J1-10 (-) and at the same time start the stopwatch (4.7.1(b)). FUNCTION MONITOR METER shall indicate within 1 vdc of applied voltage. STOP TEST lamp shall light in 60 ± 20 seconds. Disconnect +40 vdc power.

4.7.3.6 Shunt field current.- Connect 10.2 ± 0.1 ohm resistor (4.7.1(d)) across J1-34 and J1-40; connect DC VTVM (4.7.1(g)) across resistor; rotate METER SELECT control to SHUNT FIELD CURRENT. External voltmeter shall indicate 10.7 ± 1.2 vdc and FUNCTION MONITOR METER shall indicate within:

$$\frac{\text{VTVM Reading} \pm 0.6 \text{ vdc}}{10.2 \text{ ohms}} = \text{True current} \pm 0.04 \text{ amperes}$$

4.7.4 Static tests.- Set TEST TYPE switch to STATIC, TEST MODE switch (STATIC TESTS) to AUTO, and TEST MODE switch (FUNCTIONAL TESTS) to AUTO.

4.7.4.1 Self tests.- Depress ADVANCE button, as required, until 08 is indicated in TEST NUMBER monitor. Test set shall perform the sequence given in table IX.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

Table IX
Sequence of Self Tests

From	To	Automatically Steps	Steps When ADVANCE Switch Depressed	Stops/Continues	Indication
00	01	No	Yes	Stops on 01	Red
01	02	No	Yes	Continues	Green
02	03	Yes	N/A	Stops on 03	Red
03	04	No	Yes	Continues	Green
04	05	Yes	N/A	Stops on 05	Red
05	06	No	Yes	Continues	Green
06	07	Yes	N/A	Stops on 07	Red
07	08	No	Yes	Stops on 08	Red

4.7.4.2 Resistance tests.-

(a) Set TEST MODE switch (STATIC TESTS) to MANUAL. Connect the resistors, specified in table X, across the pins indicated for the specific TEST NUMBERS; the color appearing in the TEST NUMBER window shall be in accordance with table X.

(b) Connect an 0.8-ohm resistor between each of the pairs of pins listed in table IV, and set TEST MODE switch (STATIC TESTS) to AUTO. Unit shall automatically advance one step at a time (with a green indication at each step) from TEST NUMBER 26 to 42. Step 42 shall indicate red.

(c) Depress the ADVANCE button, as required, to cause the Test Set to perform the sequence given in table XI.

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

Table X

TEST NUMBER *	Resistance (ohms ± 1%)	Connector Pins		Color Indication
08	7.2	J1-34	J1-40	Red
	8.8			Green
	10.8			Green
	13.2			Red
09	260	J1-6	J1-24	Red
	317			Green
	389			Green
	475			Red
12	1440	J1-42	J1-48	Red
	1760			Green
	2160			Green
	2640			Red
13	3600	J1-1	J1-13	Red
	4400			Green
	5400			Green
	6600			Red
17	1.32 (Megohm)	J1-4	J1-24	Green
	0.72 (Megohm)			Red
26	1.2	J1-50	J1-56	Red
	0.8			Green

* Depress the ADVANCE button as required to step the unit to the indicated TEST NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

Table XI

From	To	Automatically Steps	Steps When ADVANCE Switch Depressed	Stops/Continues	Indication
42	43	No	Yes	Continues	N/A
43	44	Yes	N/A	Stops on 44	Red
44	45	No	Yes	Continues	N/A
45	46	Yes	N/A	Stops on 46	Red
46	47	No	Yes	Continues	N/A
47	48	Yes	N/A	Stops on 48	Red
48	49	No	Yes	Continues	N/A
49	00	Yes	N/A	Stops on 00	Red

4.7.5 Functional tests.-

4.7.5.1 Command voltage test.- Set TEST TYPE switch to FUNCTIONAL and ATTITUDE switch to ROLL; depress ADVANCE switch, as required, to advance TEST NUMBER monitor to 01. Connect a 350 ohm ± 5 percent resistor between J1-6 and J1-24, and connect an isolated DC VTVM (4.7.1(g)) across the resistor.

(a) Set TEST MODE switch (FUNCTIONAL TESTS) to A; VTVM shall indicate 0.0 +0.4 -0.0 vdc

(b) Set TEST MODE switch (FUNCTIONAL TESTS) to B; VTVM shall indicate 34.0 ± 2.8 vdc

4.7.5.1.1 Connect a 2000 ohm ± 5 percent resistor between J1-42 and J1-48; and connect the DC VTVM (4.7.1(g)) across the resistor; depress ADVANCE switch to advance TEST NUMBER monitor to 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

(a) Set TEST MODE switch (FUNCTIONAL TESTS) to A; DC VTVM shall indicate 6 ± 0.6 vdc

(b) Set TEST MODE switch (FUNCTIONAL TESTS) to B; DC VTVM shall indicate -6 ± 0.6 vdc

(c) Disconnect DC VTVM

4.7.5.2 Fixed frequencies.-

(a) Connect an isolated counter (4.7.1(e)) (Frequency Input Jack) across a 350 ohm resistor connected between J1-6 (Signal) and J1-24 (Common). Set Counter FUNCTION SELECTOR to FREQUENCY, depress ADVANCE switch to advance TEST NUMBER monitor to 01.

(b) Rotate TEST MODE switch (FUNCTIONAL TESTS) from 3 cps position to 8 cps position; frequency at each position shall be within 10 percent of the frequency selected.

4.7.5.3 Programmed time functions.- Set the TEST MODE switch (FUNCTIONAL TESTS) to MANUAL. Set counter COM/SEP switch to COM, START POLARITY switch to (+), STOP switch to (-), FUNCTION SELECTOR to TIME INTERVAL, and connect input to START JACK. Adjust counter for stable triggering.

(a) Connect 350 ohm ± 5 percent resistors across pins J1-6 and J1-24, and J1-18 and J1-24. Connect a 2000 ohm ± 5 percent resistor across pins J 1-42 and J1-48.

(b) At TEST NUMBER 01, verify that times (with POLARITY switches positioned as above, and again with positions reversed) are in accordance with table VI.

(c) Repeat tests at each test number with the START INPUT connected to the applicable pins specified in table VI.

4.7.5.4 Functional response.- Set TEST TYPE switch to FUNCTIONAL, and TEST MODE switch (FUNCTIONAL TESTS) to AUTO. Connect response simulator (4.7.1(h)) to J5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

(a) Set selector switch (on response simulator) to ROLL. Depress and hold DOWN/STBD/CLOSE switch (on response simulator) and advance TEST NUMBER to 02. TEST NUMBER shall be green at 02 and automatically step to 03. TEST NUMBER shall turn red and stop at 03.

(b) Release DOWN/STBD/CLOSE switch and set TEST MODE switch (FUNCTIONAL TESTS) to MANUAL.

4.7.5.5 Position lamp responses.- Advance TEST NUMBER to 01.

(a) Depress down/STBD/CLOSE switch: DOWN/STBD/CLOSE lamp shall light

(b) Depress UP/PORT/OPEN switch; UP/PORT/OPEN amp shall light

(c) Advance TEST NUMBER to 02 and repeat steps (a) and (b)

(d) Advance TEST NUMBER to 03 and repeat steps (a) and (b)

(e) Set selector switch (on response simulator) to PITCH

(f) Advance TEST NUMBER to 04 and repeat steps (a) and (b)

(g) Advance TEST NUMBER to 05 and repeat steps (a) and (b)

(h) Advance TEST NUMBER to 06 and repeat steps (a) and (b)

(i) Set selector switch (on response simulator) to YAW

(j) Advance TEST NUMBER to 07 and repeat steps (a) and (b)

(k) Advance TEST NUMBER to 08 and repeat steps (a) and (b)

(l) Advance TEST NUMBER to 09 and repeat steps (a) and (b)

(m) Set selector switch (on response simulator) to HOT GAS CONTROL VALVE

(n) Advance TEST NUMBER to 10 and repeat steps (a) and (b)

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

4.7.5.6 Time-to-failure-durations.- On counter (4.7.1(e)), set COM/SEP switch to SEP, START POLARITY to (-), and STOP to (-). Connect counter STOP jack to TP-2 on test set timing module and START jack to TP-3 on test set. Advance TEST NUMBER to 01.

(a) Depress RESET switch (on test set) and hold

(b) Reset the counter

(c) Release RESET switch; counter shall count for 240 +0 -12 ms and stop

(d) Advance TEST NUMBER to 04 and repeat steps (a), (b), and (c); counter shall count for 140 +0 -7 ms and stop

(e) Advance TEST NUMBER to 07 and repeat steps (a), (b), and (c), counter shall count for 140 +0 -7 ms and stop

(f) Advance TEST NUMBER to 10 and repeat steps (a), (b), and (c); counter shall count for 620 +0 -30 ms and stop

4.7.5.7 Timing of programmed tests.- Ground either side of resistor R43 with a short clip lead. Set TEST MODE switch (FUNCTIONAL TESTS) to AUTO. Advance TEST NUMBER to 01, and, with the stopwatch, time the duration of each sequence. Tests 01 through 09 shall not be less than 2 seconds and test 10 shall not be less than 8 seconds.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C, as specified (see 6.2). Unit package shall consist of one Test Set.

5.1.1 Level A.- Preservation and packaging of equipment for Level A shipment shall be in accordance with Specification MIL-P-116. Cleaning shall be accomplished in accordance with Process C-1, and drying, if required, shall be accomplished in accordance with Process D-1 or D-4. Preservation and packaging shall be in accordance with Method IId. Equipment case shall serve as rigid metal container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

5.1.2 Level B.- Not applicable.

5.1.3 Level C.- Cleaning, drying, preservation and packaging shall be accomplished in accordance with the supplier's own commercial practice when such practices have been approved by the procuring activity.

5.2 Packing.- Packing shall be level A or C, as specified (see 6.2). Shipping container shall contain one unit package.

5.2.1 Level A.- The equipment when preserved and packaged in accordance with 5.1.1, shall be overpacked in containers complying with Specification PPP-B-636, type I, class 2.

5.2.2 Level B.- Not applicable.

5.2.3 Level C.- The equipment when preserved and packaged in accordance with 5.1, shall be overpacked in compliance with Uniform Freight Classification Rules or other common carrier regulations applicable to the mode of transportation.

5.2.4 Cushioning or dunnage.- To assure safe delivery to receiving activity, the supplier shall provide sufficient cushioning or dunnage material to adequately protect equipment from damage due to shock and vibration loads encountered during handling and transportation.

5.3 Marking.- In addition to the markings required by the contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of Standard MIL-STD-129.

6. NOTES

6.1 Description and intended use.- The Torpedo Afterbody Test Set MK 442 Mod 0 is a portable, special purpose test equipment used to check out the afterbody of the Torpedo Mk46 Mod 0 at Fleet level.

6.2 Ordering data.- Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

(a) Title, number and date of this specification

(b) Serialization requirements

(c) Required level of preservation

(d) Assigned activity for preproduction and periodic tests

(e) Any exceptions to this specification

(f) All additional samples required shall be provided and inspected at the expense of the supplier, when such additional samples are required because of failure of any sample(s) to pass the prescribed periodic production inspections

6.3 Definitions.-

6.3.1 Temperature.- Temperature is the temperature of the environment to which the Test Set is exposed, expressed in degrees Fahrenheit (F).

6.3.2 Humidity.- The humidity is the relative humidity of the environment, expressed in percent, to which the Test Set is exposed.

6.3.3 Shock.- Shock is an abrupt change in the motion of a body resulting from the sudden application of a large external force of short duration. Shock is described as a pulse in units of gravitational acceleration (g's), duration in units of time (milliseconds), and a shock pulse approximating a one-half sine wave. The time duration shall be measured between two points where two lines tangent at maximum slope intersect the zero g line.

6.3.4 Vibration.- Vibration is a sinusoidal motion defined by amplitude and frequency. The amplitude may refer to displacement or acceleration. Displacement (one-half the total excursion) is given in inches, acceleration is given in multiples of gravitational acceleration (g's), and frequency is given in cycles per second (cps).

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

6.4 Preparation for delivery criteria.- Criteria for use of the proper level of preservation, packaging, and packing shall be as follows:

Level A.- This level shall be used for those items which are to be shipped to indeterminate destinations or stored under indeterminate conditions for redistribution anywhere.

Level B.- Not applicable

Level C.- This level shall be used only when it is definitely known that the packaged item is to be shipped to domestic installations for immediate use at the first receiving activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

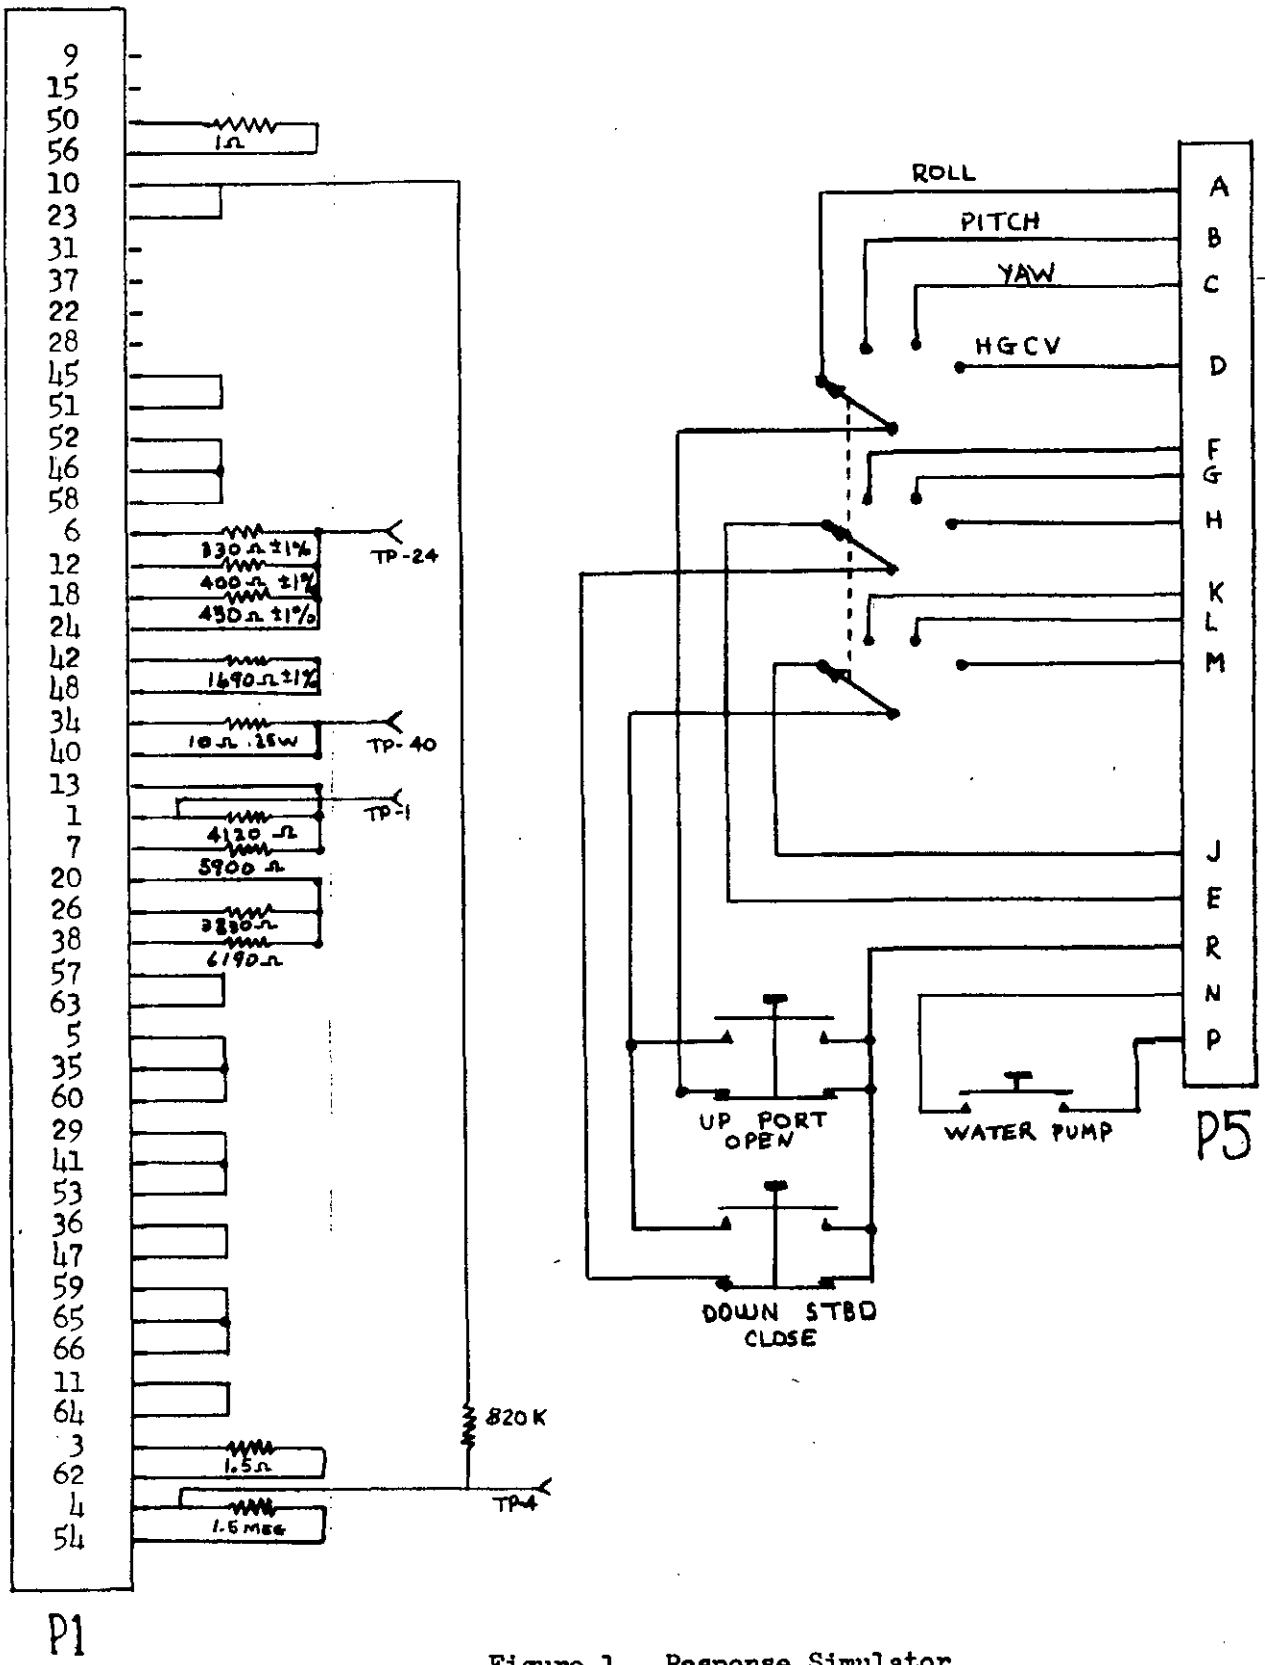


Figure 1. Response Simulator

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

APPENDIX

10.0 ACCEPTANCE TEST DATA SHEETS

10.1 Scope.- This Appendix shall be used to record the acceptance inspections (specified in 4.7) conducted on each Torpedo Afterbody Test Set Mk 442 Mod 0. The values recorded herein shall be used to verify whether or not the item tested has successfully passed the acceptance tests.

10.2 Verification of inspection.- Where space is provided in the data sheet to indicate the value or specific reading obtained, the specific reading shall be recorded if a limit or limits are given in the "limits" column. The individual performing the test shall insert his initials above the value observed and recorded. If limits are not given in the "limits" column, the individual performing the test shall certify that the requirements were satisfactorily met, by inserting his initials in the "reading" column.

Afterbody Test Set No. _____

Tested by: _____ _____ _____
Operator Date

Witnessed by: _____ _____
Contractor Inspection Date

Witnessed by: _____ _____
BuWeps QC Rep Date

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

APPENDIX

Inspection	Reference	Limits	Reading
10.3 Test Data			
10.3.1 Power check			
(a) POWER lamp lights	4.7.3.1		_____
(b) UP PORT OPEN lamp lights	4.7.3.1		_____
(c) DOWN STBD CLOSE lamp lights	4.7.3.1		_____
10.3.2 Meter check			
(a) External voltage indication	4.7.3.2(a)	30 ± 1.5 vdc	_____ vdc
(b) FUNCTION MONITOR METER voltage	4.7.3.2(a)	10.3.2(a) ± 1 vdc	_____ vdc
(c) External voltage indication	4.7.3.2(b)	36 ± 1.8 vdc	_____ vdc
(d) FUNCTION MONITOR METER voltage	4.7.3.2(b)	10.3.2(b) ± 1 vdc	_____ vdc
10.3.3 AC VOLTS lamp check			
(a) AC VOLTS lamp does not light	4.7.3.3(a)		_____
(b) AC VOLTS lamp lights	4.7.3.3(b)		_____
10.3.4 Water pump lamp check			
(a) Water pump lamp lights	4.7.3.4		_____
10.3.5 Stop-test timer check			
(a) FUNCTION MONITOR METER voltage	4.7.3.5	Applied Voltage ± 1 vdc	_____ vdc

Source: https://assist.dla.mil -- Downloaded: 202640-23T04:58Z
Check the source to verify that this is the current version before use.

APPENDIX

Inspection	Reference	Limits	Reading
10.3.5 Stop-test timer check (Cont.)			
(b) Time required for STOP TEST lamp to light	4.7.3.5	60 ± 20 sec	_____sec
10.3.6 Shunt field current check			
(a) External voltage indication	4.7.3.6	10.7 ± 1.2 vdc	_____vdc
(b) FUNCTION MONITOR METER voltage	4.7.3.6	True Current ± 0.04 Amperes	_____amperes
10.3.7 Static Test.- Test Set proper indication, and advances as required			
(a) Self tests (from 00 to 08)	4.7.4.1(b)		_____
(b) Resistance tests (from 08 to 26)	4.7.4.2(a)		_____
(c) Continuity tests (from 27 to 42)	4.7.4.2(b)		_____
(d) Self tests (from 42 to 00)	4.7.4.2(c)		_____
10.3.8 Command voltage test			
(a) External voltage indication	4.7.5.1(c)	0.0 $^{+0.4}_{-0.0}$ vdc	_____vdc
(b) External voltage indication	4.7.5.1(d)	34 ± 2.8 vdc	_____vdc
(c) External voltage indication	4.7.5.1(i)	6 ± 0.6 vdc	_____vdc

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

APPENDIX

Inspection		Reference	Limits	Reading
10.3.8 Command voltage test (Cont.)				
(d) External voltage indication		4.7.5.1(j)	-6 ± 0.6 vdc	_____vdc
10.3.9 Fixed frequencies tests				
(a) 3 cps		4.7.5.2(b)	2.7 to 3.3 cps	_____cps
(b) 4 cps		4.7.5.2(b)	3.6 to 4.4 cps	_____cps
(c) 5 cps		4.7.5.2(b)	4.5 to 5.5 cps	_____cps
(d) 6 cps		4.7.5.2(b)	5.4 to 6.6 cps	_____cps
(e) 7 cps		4.7.5.2(b)	6.3 to 7.7 cps	_____cps
(f) 8 cps		4.7.5.2(b)	7.2 to 8.8 cps	_____cps
10.3.10 Programmed time function				
(a) Test Number 01	Time 1	4.7.5.3(a)	163 +16 -0	_____ms
	Time 2		163 +16 -0	_____ms
(b) Test Number 02	Time 1	4.7.5.3(b)	25 +3 -0	_____ms
	Time 2		163 +16 -0	_____ms
(c) Test Number 03	Time 1	4.7.5.3(b)	163 +16 -0	_____ms
	Time 2		25 +3 -0	_____ms
(d) Test Number 04	Time 1	4.7.5.3(b)	100 +10 -0	_____ms
	Time 2		100 +10 -0	_____ms

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

APPENDIX

Inspection		Reference	Limits	Reading
10.3.10 Programmed time function (Cont.)				
(e) Test Number 05	Time 1	4.7.5.3(b)	25 +3 -0	_____ ms
	Time 2		100 +10 -0	_____ ms
(f) Test Number 06	Time 1	4.7.5.3(b)	100 +10 -0	_____ ms
	Time 2		25 +3 -0	_____ ms
(g) Test Number 07	Time 1	4.7.5.3(b)	100 +10 -0	_____ ms
	Time 2		100 +10 -0	_____ ms
(h) Test Number 08	Time 1	4.7.5.3(b)	25 +3 -0	_____ ms
	Time 2		100 +10 -0	_____ ms
(i) Test Number 09	Time 1	4.7.5.3(b)	100 +10 -0	_____ ms
	Time 2		25 +3 -0	_____ ms
(j) Test Number 10	Time 1	4.7.5.3(b)	350 +35 -0	_____ ms
	Time 2		410 +41 -0	_____ ms
10.3.11 Function response				
(a) Test set advances to TEST NUMBER 03		4.7.5.4(a)		_____
(b) TEST NUMBER color indication is green at 02 and red at 03		4.7.5.4(a)		_____
10.3.12 Position lamp responses				
(a) DOWN STBD CLOSE lamp lights at each TEST NUMBER position		4.7.5.5		_____
(b) UP PORT OPEN lamp lights at each TEST NUMBER position		4.7.5.5		_____

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.

APPENDIX

Inspection	Reference	Limits	Reading
10.3.13 Time-to-failure duration checks			
(a) TEST NUMBER 01	4.7.5.6(c)	240 $^{+0}_{-12}$ ms	_____ ms
(b) TEST NUMBER 04	4.7.5.6(d)	140 $^{+0}_{-7}$ ms	_____ ms
(c) TEST NUMBER 07	4.7.5.6(e)	140 $^{+0}_{-7}$ ms	_____ ms
(d) TEST NUMBER 10	4.7.5.6(f)	620 $^{+0}_{-30}$ ms	_____ ms
10.3.14 Timing of programmed tests.-			
(a) TEST NUMBERS 01 through 09		t = time > 2 sec	_____ sec
(b) TEST NUMBER 10		t = time > 8 sec	_____ sec

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-T-81078(Wep) TEST SET, AFTERBODY, TORPEDO MK 442 MODO (For Torpedo Mk 46 Mod 0)

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-8279

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:58Z
Check the source to verify that this is the current version before use.