MILITARY SPECIFICATION

POWER PLANT, ELECTRIC, TRAILER MOUNTED: DIESEL ENGINE, 60KW, 50/60 HERTZ, AN/MJQ-12A

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an electric power plant designated AN/MJQ-12A. The power plant consists of Department of Defense design, diesel-engine-driven, 60KW, 50/60 Hertz generator sets, various auxiliary equipment, brackets, and hardware mounted on a modified Government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge Polyolefin.
FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-P-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power; Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailer Dollies, Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-705	- Generator Sets, Engine-Driven, Methods of Tests and Instructions.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS16992	- Bolt (Screw). Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated General Purpose (In/MM).
MS35355	- Bolt, Machine, Square Head, Steel, Cadmium or Zinc Plated, UNC-2A.
MS51922	- Nut, Self Locking, Hexagon Prevailing Torque, General Purpose, 250°F, UNC 2B, UNF-2B (In/MM).

DRAWINGS

ME

TA13221E7350	- Power Plant. Electric. AN/MJQ-12A

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S DEPARTMENT OF COMMERCE

Product Standard

PS1 - Softwood Plywood; Construction and Industrial.
PS51 - Hardwood and Decorative Plywood.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The power plant AN/MJQ-12A shall be in accordance with Top Assembly TA13221E7350 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g, shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacturer of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power plant for examination within the time frame specified (see 6.2), to prove prior to starting production that his production methods will produce power plants that comply with the requirements of this specification. Examinations shall be as specified in Section 4; and unless otherwise specified herein, all examinations shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examinations.

3.3 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.4 Government-furnished property. The following property in quantities indicated will be furnished by the Government (see 6.4):

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:45Z
Check the source to verify that this is the current version before use.

Item No.	Description	Identification	Quantity for each AN/MJQ-12A
1	Chassis, trailer, 2-1/2 ton, 2 wheel, Model M200A1.	MIL-C-45150	2
2	Generator Set, diesel-engine-driven, 60 KW 50/60 Hertz DOD Model MEP-006A	NSN 6115-00-118-1243	2

3.5 Workmanship. Workmanship shall be of a quality to assure that the power plants are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Disassembly inspection. Failure of any examination or test by the preproduction model shall be cause for disassembly in the presence of a Government representative, of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected and shall be cause for rejection of the preproduction model. Reassembly with replacement parts and retesting shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.3 Acceptability criteria. Power plants which conform to all requirements in Section 3 and 5 of this specification and pass all applicable examinations and tests in Section 4 of this specification will be considered acceptable by the Government.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the currentversion before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power plant shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection or shall be cause for performing the inspection specified in 4.1.1.

4.3.2 Tests. The preproduction power plant shall be tested as specified in 4.5.2. Failure of the test shall be cause for performing the inspection specified in 4.1.1.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power plant shall be examined as specified herein, for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each power plant shall be tested as specified in 4.5.2. Failure of any the tests shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power plants shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.
106. Vehicle registration marking and identification plate, missing, incomplete, improper location or size.

4.5.2 Tests.

4.5.2.1 Test conditions. The following preparations shall be made prior to testing the switch box assembly:

(a) Power input cables shall be connected to the switch box assembly.
(b) The free ends of the power input cables shall be attached to a commercial power source as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the current version before use.

(1) Cable wire marked L_1 shall be attached to Phase A.
(2) Cable wire marked L_2 shall be attached to Phase B.
(3) Cable wire marked L_3 shall be attached to Phase C.
(4) Cable wire marked L_0 shall be attached to neutral.

4.5.2.2 Test procedures. Tests shall be conducted in accordance with MIL-STD-705 and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days prior to the start of testing and at intervals not more than 6 months thereafter.

4.5.2.3 Operation. Switch box circuit breakers No. 1 and No. 2 shall be in the "OFF" position. Commercial power equivalent to the rated load of the generator set shall be supplied to the switch box through generator set No. 1 power input cable assembly. Circut breaker No. 1 shall be turned to the "ON" position and load measured at the load terminals for a period of not less than 5 minutes. During this period phase sequence (rotation) shall be tested in accordance with MIL-STD-705, Method 507.1. Phase rotation shall be L_1, L_2, and L_3. At the conclusion of the No. 1 cable and circuit breaker test, the circuit breaker shall be turned to the "OFF" position. The test shall be repeated for No. 2 cable and circuit breaker. Input and output indicator lights shall operate during tests. Inability of the switch box assembly to maintain or transfer rated load shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a complete pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107.	Materials, containers, or procedures not as specified. Each incorrect material, container or procedure shall constitute one defect.
108.	Generator set not preserved as specified.
109.	Fire extinguisher not removed and preserved as specified.
110.	Control and ground cable not disconnected and secured and the cable and terminals not match marked as specified.
111.	Repair parts and maintenance tools not preserved as specified.
112.	Trailer chassis components not preserved as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

113. Preservation of power plants and components not as shown on figures or as specified herein.
114. Packing not in accordance with table I and Figures 1, 2, and 3, for the level required.
115. Depreservation guides not prepared and attached to the power plant as specified.
116. Technical publications not preserved and secured as specified.
117. Marking illegible, incomplete, incorrect, or missing.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnished a preproduction pack for examination within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power plant or a production power plant. If the preproduction model power plant is utilized, and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparision between the preproduction model power plant and production plants.

5.2 Preservation . Preservation shall be level A, level B, or Commercial as specified (see 6.2). Preservation and consolidation of power plant components shall be in accordance with table I, Figures 1, 2, and 3, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator set. The generator set shall be preserved in accordance with MIL-G-28554, level A, method IIa. The generator sets shall be secured directly through the barrier material to the trailer, using the required bolts, in lieu of the wood base specified in the packaging requirements of MIL-G-28554. The humidity indicator and inspection port shall be installed on an end or side in a location convenient for inspection of the humidity indicator.

5.2.1.2 Fire extinguisher. Each fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, type CF, variety SW, grade 125, style optional.

5.2.1.3 Ground cable. The ground cable shall be disconnected from the generator sets. The disconnected ground cables and terminals on the power plant shall be matchmarked with cloth tags conforming to UU-T-81, type A, to facilitate reinstallatin of the cables.

5.2.1.4 Repair parts. The preservation application criteria and applicable submethods of MIL-P-116 shall be used to preserve the repair parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, level A.

5.2.1.6 Technical publications. Techinical publications shall be preserved in accordance with MIL-P-116, method IC-1 and shall be secured to the generator set outside the method II barrier.

5.2.1.7 Ground rods, fuel drum adapter, and flexible spout. The ground rods, fuel drum adapter, and flexible spout shall be placed in the accessory box.

5.2.1.8 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A as specified for mobile vehicles.

5.2.2 Level B.

5.2.2.1 Generator sets. The generator sets shall be preserved in accordance with MIL-G-28554, level B.

5.2.2.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved as specified for level A.

5.2.2.3 Ground cables. The ground cables shall be disconnected and matchmarked as specified for level A.

5.2.2.4 Repair parts, maintenance tools, and technical publications. The repair parts, maintenance tools, and techincal publications shall be preserved as specified for level A.

5.2.2.5 Ground rods, fuel drum adapter, and flexible spout. The ground rods, fuel drum adapter, and flexible spout shall be placed in the accessory box.

5.2.2.6 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level B as specified for mobile vehicles.

5.2.3 Commercial. The components of each complete AN/MJQ-12A shall be preserved in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be level A, level B, or Commercial as specified (see 6.2).

5.3.1 Level A or B. Packing shall be in accordance with table I, and Figures 1, 2, and 3 and as specified herein.

5.3.2 Commercial. The components of each complete AN/MJQ-12A shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the current version before use.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide." One copy shall be secured on the generator set and a second copy shall be secured in a conspicuous location on the power plant. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved and packed as specified herein, regardless of the preservation and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power plant is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model (see 3.2).
(c) When the Government will conduct any or all of the preproduction model examinations. When the Government will conduct some but not all of the preproduction examinations, the contracting officer should specify which examinations will be conducted by the Government and which examinations shall be conducted by the contractor (see 3.2).
(d) Time frame required for submission of the preproduction pack (see 5.1).
(e) Whether level A, level B or Commercial preservation, and level A, level B or Commercial packing is required (see 5.2 and 5.3).
(f) When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power plants from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power plants conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power plants in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6115-A452

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.


TABLE I. PACKAGING MATERIAL

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B	
1	PPP-B-601, OVERSEAS TYPE, STYLE 2 MODIFIED (NOTES 1 AND 2)	BOX, CLEATED PLYWOOD 1/4 THK.	2	2	
2	MIL-B-131, CLASS 1	BARRIER MATERIAL	AR		
3	PPP-F-320, TYPE SF, GRADE V3S	FIBERBOARD 1/2 THK. MINIMUM	AR		
4	MIL-G-12803, TYPE 1, RUBBER, CORDER H-1/2 X H-1/2 X 1/8	GASKET, 11/16 DIA. HOLE IN CENTER	16		
5	WEDGE	LUMBER, SOFTWOOD	4	4	
6	SPACER	LUMBER, SOFTWOOD 1 X 8 NOMINAL	4		
7	MS27183-11, 3/2 ID X .734 OD X .065 THK.	WASHER, PLAIN, CS, CAD. PL.	24	16	
8	MS16992-505, 1/4-10, 2 LG.	BOLT, LAG, HEX HD, GIMLET PT, STL, GALV.	16	16	
9	NN-P-530 (NOTE 2)	PLYWOOD 3/8 THK.	2		
10	MS35355-8, 1/4-20 UNC-2A, 3-1/2 LG.	BOLT, SQ HD, STL, CAD. PL.	8		
11	MS51022-1, 1/4-20 UNC-2B	NUT, SELF LOCKING	8		
12	BLOCKING	LUMBER, SOFTWOOD, 2 X 4 NOMINAL	AR		
13	FF-N-105, TYPE II, STYLE 4	NAIL, 4d	AR		
14	PPP-T-60, TYPE III	TAPE, PRESSURE SENSITIVE	AR	AR	
15	PPP-T-97, TYPE III	TAPE, PRESSURE SENSITIVE 3/4 W	AR	AR	
16	QQ-S-781, TYPE I OR II, FINISH D	STEEL STRAPPING, FLAT, .020 X 3/4	AR		
16	QQ-S-781, TYPE I OR II, FINISH A	STEEL STRAPPING, FLAT, .020 X 3/4		AR	
17	PPP-B-636, TYPE CF, CLASS DOMESTIC, VARIETY SW, GRADE 125	BOX, FIBERBOARD	2	2	
18	PPP-B-601, OVERSEAS TYPE, STYLE 1, (NOTE 1)	BOX, CLEATED PLYWOOD 1/4 THK	1	1	
19	L-P-378, TYPE I, CLASS 1, GRADE A 4-6 MIL	PLASTIC FILM, POLYETHYLENE	AR	AR	

NOTES:
1. NO CONTENT WEIGHT, WITHOUT BOTTOM.
2. GROUP A CONFORMING TO PS1, TYPE 1, GRADE B-4 OR GROUP 0 CONFORMING TO PS 1, GRADE C-D INTERIOR WITH EXTERIOR GLUE.
3. TOP TO BE ONE PIECE, 1/2 INCH THICKNESS AND SHALL COMPLETELY COVER ALL EDGES.

X-2367A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

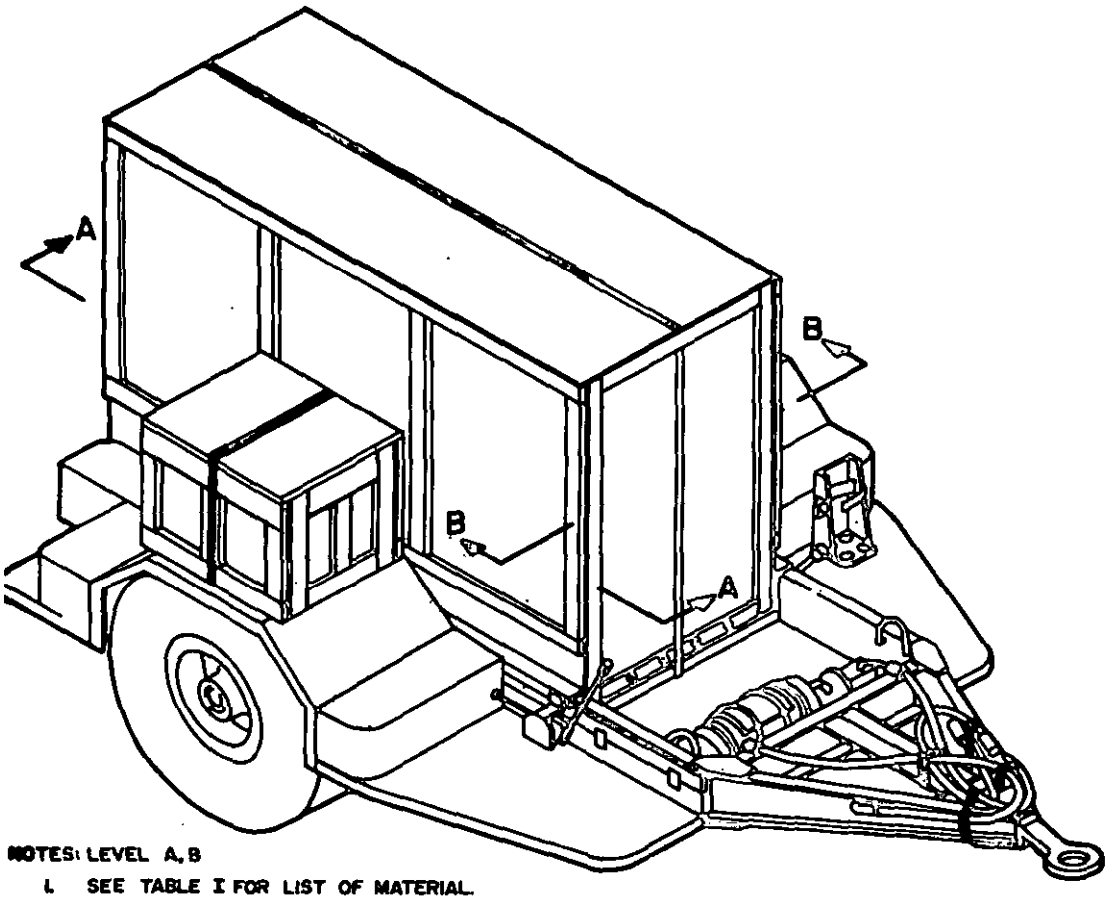


NOTES: LEVEL A, B

1. SEE TABLE I FOR LIST OF MATERIAL.
2. UNIT B AS SHOWN.
3. UNIT A AS SHOWN LESS DISTRIBUTION BOX AND PACK.
4. CONTROL CABLE ENDS SHALL BE WRAPPED IN FILM, FIND NO. 19, AND SECURED WITH TAPE, FIND NO. 15.
5. CABLES TO BE SECURED WITHIN THE CONFINES OF GENERATOR SET.
6. PRESERVED FIRE EXTINGUISHER SHALL BE STOWED WITHIN CONFINES OF GENERATOR.
7. SEE FIGURE 3 FOR SECTION AND VIEWS.

FIGURE 1. Packaging arrangement and detail (assembled).

X-2368A

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the current version before use.

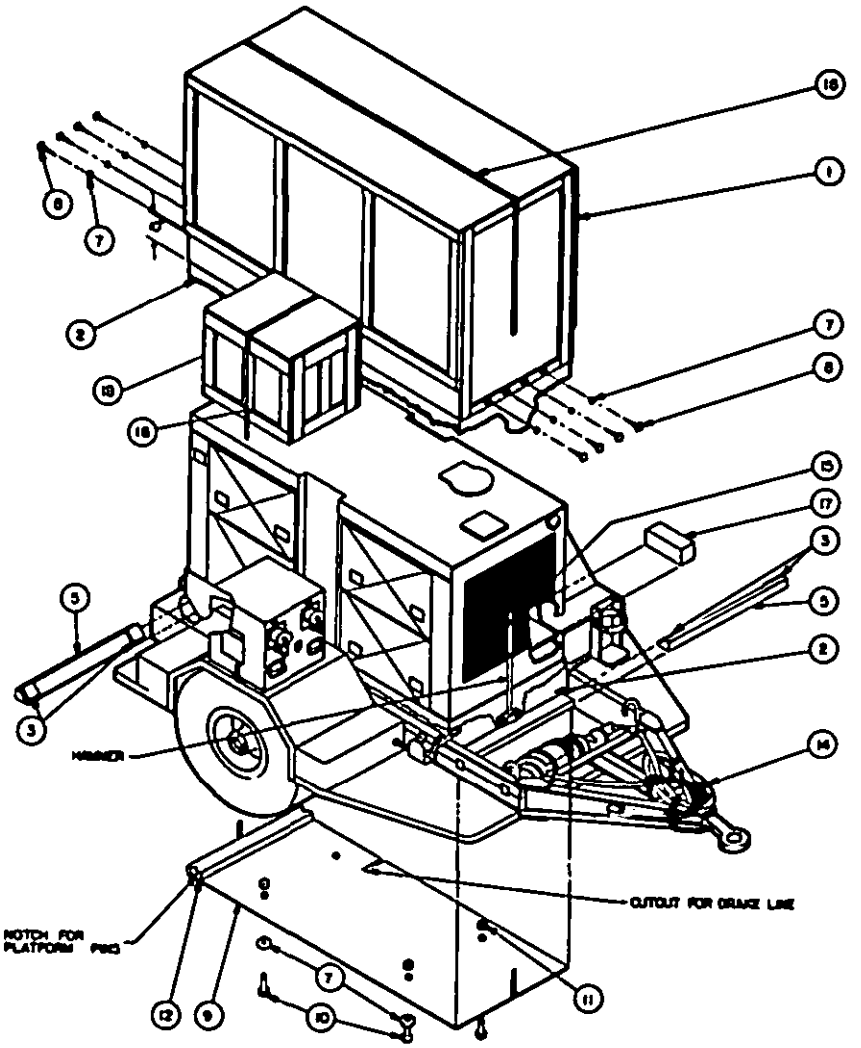

NOTES:
1. SEE TABLE I FOR LIST OF MATERIALS.
2. UNIT B, AS SHOWN UNIT A, AS SHOWN LESS DISTRIBUTION BOX AND PACK.

FIGURE 2. Packaging arrangement and detail (exploded).

X-2369A

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:45Z
Check the source to verify that this is the current version before use.

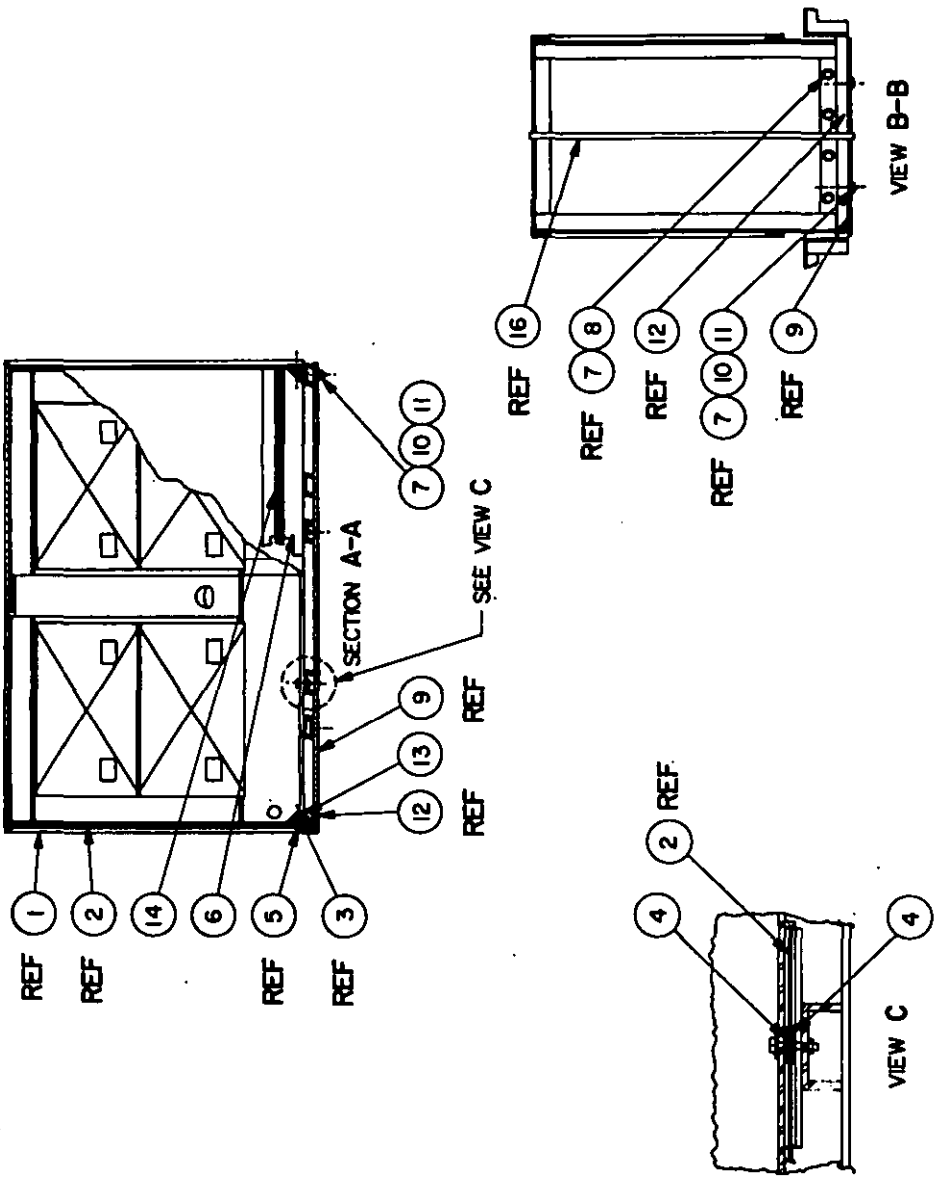


FIGURE 3. Packaging arrangement and detail (views). X-2370A

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-P-52979(ME) Power Plant, Electric, Trailer Mounted: Diesel Engine, 60 KW, 50/60 Hertz, AN/MJQ-12A

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:45Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DE/DS
Ft. Belvoir, VA 22060

FOLD

★ U.S.GOVERNMENT PRINTING OFFICE: 1980—603-131/3227 3-1

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:45Z
Check the source to verify that this is the current version before use.