NOT MEASUREMENT SENSITIVE

MIL-STD-2525E
w/Change 1
2 March 2025

SUPERSEDING
MIL-STD-2525E
31 December 2022

DEPARTMENT OF DEFENSE INTERFACE STANDARD

JOINT MILITARY SYMBOLOGY

Distribution A: Approved for public release, distribution is unlimited.

AMSC N/A AREA INST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

FOREWORD

1. This standard is approved for use by all departments and agencies of the Department of Defense (DOD) and available for use by non-DOD entities (e.g., first responders, United Nations, and multinational partners).

2. This standard provides a standardized, structured set of graphical symbols for the display of information in command and control (C2) systems and applications. A standard method for symbol construction is provided, using common building block concepts to create current symbol sets as well as for creating sets that may be needed in the future. This includes frame, icon, modifier, and amplifier using color, graphical, and alphanumeric representations. It provides requirements for symbol construction and composition with flexibility for special user's needs.

3. In joint military operations, it is imperative to have a common language clearly understood among all users. Graphical representation of objects of interest (e.g., units, installations, equipment, control measures, activities, and meteorological occurrences) are observed and readily understood faster than merely text alone. This is valid even more for a user population with a widely different background of language, component, knowledge, and experience. A common standard of joint military symbols is therefore an important element to enhance efficiency and to contribute to success in joint operations.

4. This revision has resulted in many changes (SCP incorporation list) to the standard, but the most significant ones are as follows:

a. Renamed the Control Measures appendix to Control Measures and Planning Symbols

b. Updated amplifier placement and usage within each appendix.

c. Consolidated several control measure and planning symbol draw rules for better interoperability and clarification.

d. Moved several modifiers to the common modifiers section to improve interoperability and flexibility.

e. Converted many full octagon symbols to main icons for efficiency and to allow use of modifiers.

f. Updated the cyberspace appendix to better represent current needs.

5. Comments, suggestions, or questions on this document should be addressed to Defense Information Systems Agency (DISA) Military Message Standards Branch (EM7), P.O. Box 549, Ft. Meade, MD 20755-0549, or emailed to disa.meade.EE.mbx.symbology@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST [Acquisition Streamlining and Standardization Information System] online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CONTENTS

PARAGRAPH PAGE

1 SCOPE 1
1.1 Scope 1
2 APPLICABLE DOCUMENTS 1
2.1 General 1
2.2 Government documents 1
2.2.1 Specifications, standards, and handbooks 1
2.2.2 Other Government documents, drawings, databases and publications 1
2.3 Order of precedence 3
3 DEFINITIONS 3
3.1 Acronyms and abbreviations used in this standard 3
3.2 Definitions used in this standard 4
3.2.1 Amplifier 4
3.2.2 Area 4
3.2.3 Assumed friend 4
3.2.4 Atmospheric environment phenomena 4
3.2.5 Attribute 4
3.2.6 Boundary 4
3.2.7 C2 (Command and Control) 5
3.2.8 Combat effectiveness 5
3.2.9 Commission Internationale de l'Eclairage (CIE) 5
3.2.10 Contact 5
3.2.11 Control measures and planning symbols 5
3.2.12 Cyberspace 5
3.2.13 Defended area 5
3.2.14 Defense support of civil authorities 5
3.2.15 Faker 5
3.2.16 Field 5
3.2.17 Frame 5
3.2.18 Friend 5
3.2.19 Frontogenesis 6
3.2.20 Frontolysis 6
3.2.21 Graphic 6
3.2.22 Hostile 6
3.2.23 Icon 6
3.2.24 Icon-based symbol 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.25 Installation 6
3.2.26 Interoperability 6
3.2.27 Joint military symbology 6
3.2.28 Joker 6
3.2.29 Lollipopping 6
3.2.30 Meteorological symbology 6
3.2.31 Modifier 6
3.2.32 Neutral 6
3.2.33 Operational environment 7
3.2.34 Own ship 7
3.2.35 Pending 7
3.2.36 Point 7
3.2.37 Signals intelligence (SIGINT) 7
3.2.38 Suspect 7
3.2.39 Symbol 7
3.2.40 Symbol identification code (SIDC) 7
3.2.41 Text 7
3.2.42 Track 7
3.2.43 Unknown 7
4 GENERAL REQUIREMENTS 7
4.1 Joint military symbology 7
4.2 Command and control symbols 8
4.3 Other symbols 8
4.4 Monochromatic and hand-drawn symbols 8
4.5 Symbol recognition and legibility 8
4.6 Availability of scalable vector graphics (SVG) format symbol components 8
4.7 Application and implementation of approved symbology change proposals (SCP) 9
4.7.1 Requirements and advantages of implementing approved SCPs 9
4.7.2 Obtaining approved SCPs 9
4.7.3 Receipt of unrecognized symbol identification codes 9
5 DETAILED REQUIREMENTS 9
5.1 Objective 9
5.2 Organization 10
5.3 Icon-based symbols 10
5.3.1 Bounding octagon 10
5.3.1.1 Bounding octagon and frames 10
5.3.1.2 The bounding octagon and icons/modifiers 12
5.3.2 Frame 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.2.1 Standard identity 16
5.3.2.2 Domain 17
5.3.2.3 Status 17
5.3.3 Fill 18
5.3.3.1 Fill color 18
5.3.4 Icons 19
5.3.4.1 Main icons 19
5.3.4.2 Full octagon icons 19
5.3.4.3 Full frame icons 20
5.3.5 Invalid symbols 20
5.3.6 Modifiers 20
5.3.7 Amplifiers 21
5.3.7.1 Headquarters staff amplifier 32
5.3.7.2 Echelon amplifier 32
5.3.7.3 Task force amplifier 33
5.3.7.4 Feint/decoy/dummy amplifier 33
5.3.7.4.1 Construction 33
5.3.7.4.2 Line style 34
5.3.7.4.3 Position 34
5.3.7.4.4 Position for icon-based symbols 34
5.3.7.4.4.1 Unframed icon-based symbol position 34
5.3.7.5 Offset/precise location amplifier 36
5.3.7.5.1 Offset/precise location extension line amplifier 36
5.3.7.6 Altitude/depth amplifier 36
5.3.7.6.1 Altitude base reference point 36
5.3.7.6.2 Relative altitude 36
5.3.7.6.3 Flight level 37
5.3.7.6.4 Multiple instances of altitude/depth amplifiers 37
5.3.7.7 Speed amplifier 37
5.3.7.8 Date-time group 38
5.3.7.9 Direction of movement amplifier 38
5.3.7.10 Mobility amplifier 38
5.3.7.11 Auxiliary equipment amplifier 40
5.3.7.12 Text amplifiers 40
5.3.7.13 Dynamic graphic amplifiers 40
5.3.7.13.1 Area of uncertainty amplifier 41
5.3.7.13.2 Dead reckoning trailer amplifier 41
5.3.7.13.3 Speed leader amplifier 42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.13.4 Pairing line amplifier 42
5.3.7.13.5 Dynamic towed sensor array amplifier 42
5.3.7.14 Operational condition amplifier 42
5.3.7.15 Engagement amplifier bar 43
5.3.7.15.1 Engagement designation using the engagement amplifier bar 43
5.3.7.15.2 Target designation using the engagement amplifier bar 44
5.3.7.15.3 Engagement amplifier bar structure 45
5.3.7.15.3.1 Remote and local engagements 45
5.3.7.15.3.2 Engagement stage 45
5.3.7.15.3.3 Weapons assignment or deployment 46
5.3.8 Manually-generated tracks 47
5.3.9 Dismounted individual leadership 47
5.3.10 Composition of icon-based symbols 48
5.3.10.1 Symbol display hierarchy 48
5.3.11 Symbol size 49
5.3.12 Line width 50
5.3.13 Plotting 50
5.3.14 Orientation 50
5.4 Compliance criteria 50
5.4.1 Appearance of tactical symbols 50
5.4.2 Assembling and parsing of SIDC 51
5.5 Color 51
6 NOTES 53
6.1 Intended use 53
6.2 Subject term (key word) listing 53
6.3 International standardization agreement implementation 53
6.4 Changes from previous issue 54
6.5 Symbology change proposal incorporation 54
SYMBOL IDENTIFICATION CODES 57
A.1 SCOPE. 57
A.1.1 Scope 57
A.2 APPLICABLE DOCUMENTS 57
A.3 DEFINITIONS 57
A.4 GENERAL REQUIREMENTS 57
A.4.1 Organization 57
A.5 DETAILED REQUIREMENTS 57
A.5.1 Symbol identification code 57
A.5.2 Elements of the symbol identification code 57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.2.1 Set A - First ten values. 57
A.5.2.2 Set B - Second ten values. 58
A.5.2.3 Set C - Third ten values. 58
A.5.3 Set A. The first set of ten values: 59
A.5.3.1 Version 59
A.5.3.2 Standard identity 59
A.5.3.2.1 Context implementation guidance 60
A.5.3.2.2 Standard identity implementation guidance 60
A.5.3.3 Symbol set 60
A.5.3.3.1 Symbol set implementation guidance 61
A.5.3.4 Status 62
A.5.3.4.1 Status implementation guidance 62
A.5.3.5 Headquarters/task force/dummy 62
A.5.3.6 Amplifying Descriptor 63
A.5.4 Set B. The second set of ten values: 64
A.5.4.1 Common Modifiers 67
A.5.4.2 Air (01) 69
A.5.4.3 Air missile (02). 71
A.5.4.4 Space (05). 72
A.5.4.5 Space missile (06). 74
A.5.4.6 Land unit (10). 75
A.5.4.7 Land civilian unit/organization (11). 83
A.5.4.8 Land Equipment (15). 84
A.5.4.9 Land installations (20). 90
A.5.4.10 Control measures and planning symbols (25). 94
A.5.4.11 Dismounted individual (27). 112
A.5.4.12 Sea surface (30). 114
A.5.4.13 Sea subsurface (35). 117
A.5.4.14 Mine warfare (36). 119
A.5.4.15 Activities (40). 120
A.5.4.16 Atmospheric (45) 125
A.5.4.17 Oceanographic (46) 131
A.5.4.18 Meteorological space (47) 136
A.5.4.19 Signals intelligence equipment (50) 137
A.5.4.20 Cyberspace (60) 138
A.5.5 Set C. The third set of ten values 140
A.5.5.1 Sector 1 common modifier identifier 140
A.5.5.2 Sector 2 modifier identifier 140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.3 Frame shape identifier 141
A.5.5.4 Nationality/country/geopolitical/geographic name or entity 141
COMMON MODIFIERS 143
B.1 SCOPE 143
B.1.1 Scope 143
B.2 APPLICABLE DOCUMENTS 143
B.3 DEFINITIONS 143
B.4 GENERAL REQUIREMENTS 143
B.4.1 Organization 143
B.5 DETAILED REQUIREMENTS 143
B.5.1 Technical specifications 143
B.5.2 Symbol identification coding scheme 143
B.5.3 Composition of common modifiers 143
B.5.3.1 Symbol building process 143
B.5.3.3 Common modifiers 144
SPACE SYMBOLS 157
C.1 SCOPE 157
C.1.1 Scope 157
C.2 APPLICABLE DOCUMENTS 157
C.3 DEFINITIONS 157
C.4 GENERAL REQUIREMENTS 157
C.4.1 Organization 157
C.5 DETAILED REQUIREMENTS 157
C.5.1 Technical specifications 157
C.5.2 Symbol identification coding scheme 157
C.5.3 Composition of space symbols 157
C.5.3.1 Symbol building process 158
C.5.3.2 Icons and modifiers 159
C.5.3.3 Amplifiers 159
C.5.3.3.1 Text amplifiers 159
C.5.3.3.2 Graphic amplifiers 159
C.6 SPACE EQUIPMENT AND PLATFORM SYMBOLS 161
C.6.1 Space equipment and platform symbols 161
C.6.2 Space equipment and platform icons 161
C.6.3 Space equipment and platform sector 1 modifiers 167
C.6.4 Space equipment and platform sector 2 modifiers 168
C.7 SPACE MISSILE SYMBOLS 169
C.7.1 Space missile symbols 169

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

C.7.2 Space missile icons 169
C.7.3 Space missile sector 1 modifiers 170
C.7.4 Space missile sector 2 modifiers 170
AIR SYMBOLS 173
D.1 SCOPE 173
D.1.1 Scope 173
D.2 APPLICABLE DOCUMENTS 173
D.3 DEFINITIONS 173
D.4 GENERAL REQUIREMENTS 173
D.4.1 Organization 173
D.5 DETAILED REQUIREMENTS 173
D.5.1 Technical specifications 173
D.5.2 Symbol identification coding scheme 173
D.5.3 Composition of air symbols 173
D.5.3.1 Symbol building process 174
D.5.3.2 Icons and modifiers 175
D.5.3.3 Amplifiers 175
D.5.3.3.1 Text amplifiers 175
D.5.3.3.2 Graphic amplifiers 175
D.6 AIR EQUIPMENT AND PLATFORM SYMBOLS 177
D.6.1 Air equipment and platform symbols 177
D.6.2 Air equipment and platform icons 177
D.6.3 Air equipment and platform sector 1 modifiers 185
D.6.4 Air equipment and platform sector 2 modifiers 188
D.7 AIR MISSILE SYMBOLS 188
D.7.1 Air missile symbols 188
D.7.2 Air missile icons 189
D.7.3 Air missile sector 1 modifiers 189
D.7.4 Air missile sector 2 modifiers 190
LAND SYMBOLS 193
E.1 SCOPE 193
E.1.1 Scope 193
E.2 APPLICABLE DOCUMENTS 193
E.3 DEFINITIONS 193
E.4 GENERAL REQUIREMENTS 193
E.4.1 Organization 193
E.5 DETAILED REQUIREMENTS 193
E.5.1 Technical specifications 193

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

E.5.2 Symbol identification coding scheme 193
E.5.3 Composition of land symbols 193
E.5.3.1 Symbol building process 194
E.5.3.2 Icons and modifiers 195
E.5.3.3 Amplifiers 195
E.5.3.3.1 Text amplifiers 195
E.5.3.3.2 Graphic amplifiers 195
E.6 LAND UNIT SYMBOLS 195
E.6.1 Land unit symbols 195
E.6.2 Land unit amplifiers 195
E.6.3 Land unit icons 199
E.6.4 Land unit sector 1 modifiers 228
E.6.5 Land unit sector 2 modifiers 237
E.7 LAND CIVILIAN INDIVIDUALS/ORGANIZATION SYMBOLS 244
E.7.1 Land civilian individuals/organization symbols 244
E.7.2 Land civilian individuals/organization icons 245
E.7.3 Land civilian unit/organization sector 1 modifiers 247
E.7.4 Land civilian unit/organization sector 2 modifiers 248
E.8 LAND EQUIPMENT SYMBOLS 249
E.8.1 Land equipment symbols 249
E.8.2 Land equipment icons 251
E.8.3 Land equipment sector 1 modifiers 281
E.8.4 Land equipment sector 2 modifiers 282
E.9 LAND INSTALLATION SYMBOLS 283
E.9.1 Land installation symbols 283
E.9.2 Land installation icons 285
E.9.3 Land installation sector 1 modifiers 306
E.9.4 Land installation sector 2 modifiers 307
DISMOUNTED INDIVIDUAL SYMBOLS 309
F.1 SCOPE 309
F.1.1 Scope 309
F.2 APPLICABLE DOCUMENTS 309
F.3 DEFINITIONS 309
F.4 GENERAL REQUIREMENTS 309
F.4.1 Organization 309
F.5 DETAILED REQUIREMENTS 309
F.5.1 Technical specifications 309
F.5.2 Symbol identification coding scheme 309

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

F.5.3 Composition of land symbols 309
F.5.3.1 Symbol building process 310
F.5.3.2 Icons and modifiers 311
F.5.3.3 Amplifiers 311
F.5.3.3.1 Text amplifiers 311
F.5.3.3.2 Graphic amplifiers 311
F.6 DISMOUNTED INDIVIDUAL SYMBOLS 314
F.6.1 Dismounted individual symbols 314
F.6.2 Dismounted individual icons 314
F.6.3 Dismounted individual sector 1 modifiers 320
F.6.4 Dismounted individual sector 2 modifiers 322
SEA SURFACE SYMBOLS 327
G.1 SCOPE 327
G.1.1 Scope. 327
G.2 APPLICABLE DOCUMENTS 327
G.3 DEFINITIONS 327
G.4 GENERAL REQUIREMENTS 327
G.4.1 Organization 327
G.5 DETAILED REQUIREMENTS 327
G.5.1 Technical specifications 327
G.5.2 Symbol identification coding scheme. 327
G.5.3 Composition of sea surface symbols 327
G.5.3.1 Symbol building process 328
G.5.3.2 Icons and modifiers 328
G.5.3.3 Amplifiers 328
G.6 SEA SURFACE UNIT, EQUIPMENT AND INSTALLATION SYMBOLS 330
G.6.1 Sea surface unit, equipment and installation symbols 330
G.6.2 Sea surface unit, equipment and installation icons 330
G.6.3 Sea surface unit, equipment and installation sector 1 modifiers 345
G.6.4 Sea surface unit, equipment, and installation sector 2 modifiers 346
G.6.5 Sea surface local tracks 347
G.6.5.1 Fused tracks 347
SEA SUBSURFACE SYMBOLS 349
H.1 SCOPE 349
H.1.1 Scope 349
H.2 APPLICABLE DOCUMENTS 349
H.3 DEFINITIONS 349
H.4 GENERAL REQUIREMENTS 349

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.4.1 Organization 349
H.5 DETAILED REQUIREMENTS 349
H.5.1 Technical specifications 349
H.5.2 Symbol identification coding scheme 349
H.5.3 Composition of sea subsurface symbols 349
H.5.3.1 Symbol building process 350
H.5.3.2 Icons and modifiers 350
H.5.3.3 Amplifiers. 351
H.5.3.3.1 Text amplifiers 351
H.5.3.3.2 Graphic amplifiers 352
H.6 SEA SUBSURFACE UNIT, EQUIPMENT and INSTALLATION SYMBOLS 352
H.6.1 Sea subsurface unit, equipment and installation symbols 352
H.6.2 Sea subsurface unit, equipment and installation icons 352
H.6.3 Sea subsurface unit, equipment and installation sector 1 modifiers 355
H.6.4 Sea subsurface unit, equipment, and installation sector 2 modifiers. 356
H.6.5 Sea subsurface local tracks 358
H.6.5.1 Fused tracks 358
H.7 MINE WARFARE SYMBOLS 359
H.7.1 Mine warfare symbols 359
H.7.2 Mine warfare icons 359
ACTIVITIES SYMBOLS 371
I.1 SCOPE 371
I.1.1 Scope 371
I.2 APPLICABLE DOCUMENTS 371
I.3 DEFINITIONS 371
I.4 GENERAL REQUIREMENTS 371
I.4.1 Organization 371
I.5 DETAILED REQUIREMENTS 371
I.5.1 Technical specifications 371
I.5.2 Symbol identification coding scheme 371
I.5.3 Composition of activities symbols 371
I.5.3.1 Symbol building process. 372
I.5.3.2 Icons and modifiers 372
I.5.3.3 Amplifiers. 372
I.5.3.3.1 Text amplifiers 372
I.5.3.3.2 Graphic amplifiers 374
I.6 ACTIVITIES SYMBOLS 374
I.6.1 Activities symbols 374

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

I.6.2 Activities icons 374
I.6.3 Activities sector 1 modifiers 397
I.6.4 Activities sector 2 modifiers 399
SIGNALS INTELLIGENCE SYMBOLS 401
J.1 SCOPE 401
J.1.1 Scope 401
J.2 APPLICABLE DOCUMENTS 401
J.3 DEFINITIONS 401
J.4 GENERAL REQUIREMENTS 401
J.4.1 Organization 401
J.5 DETAILED REQUIREMENTS 401
J.5.1 Technical specifications 401
J.5.2 Symbol identification coding scheme 401
J.5.3 Composition of SIGINT symbols 401
J.5.3.1 Symbol building process 402
J.5.4 Icons and modifiers 402
J.5.5 Amplifiers 402
J.6 SIGINT SYMBOLS 403
J.6.1 SIGINT symbols 403
J.6.2 SIGINT icons 403
J.6.3 SIGINT sector 1 modifiers 403
J.6.4 SIGINT sector 2 modifiers 411
CYBERSPACE SYMBOLS 413
K.1 SCOPE 413
K.1.1 Scope 413
K.2 APPLICABLE DOCUMENTS 413
K.3 DEFINITIONS 413
K.4 GENERAL REQUIREMENTS 413
K.4.1 Organization 413
K.5 DETAILED REQUIREMENTS 413
K.5.1 Technical specifications 413
K.5.2 Symbol identification coding scheme 413
K.5.3 Composition of cyberspace symbols 413
K.5.3.1 Symbol building process 414
K.5.3.2 Icons and modifiers 414
K.5.4 Amplifiers 414
K.5.4.1 Text amplifiers 414
K.5.4.3 Graphic amplifiers 416

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.6 CYBERSPACE SYMBOLS 417
K.6.1 Cyberspace symbols 417
K.6.2 Cyberspace icons 417
K.6.3 Cyberspace sector 1 modifiers 423
K.6.4 Cyberspace sector 2 modifiers 424
CONTROL MEASURES AND PLANNING SYMBOLS 427
L.1 SCOPE 427
L.1.1 Scope 427
L.2 APPLICABLE DOCUMENTS 427
L.3 DEFINITIONS 427
L.4 GENERAL REQUIREMENTS 427
L.4.1 Organization 427
L.5 DETAILED REQUIREMENTS 427
L.5.1 Control measures and planning symbols 427
L.5.1.1 Composition of control measures and planning symbols 428
L.5.1.1.1 Standard identity (color rules) for control measures and planning symbols 428
L.5.1.1.2 Point control measures and planning symbols height 428
L.5.1.1.3 Status 428
L.5.1.1.4 Amplifiers 429
L.5.1.1.5 Direction of movement amplifier 431
L.5.1.1.6 Echelon amplifier 431
L.5.1.1.7 Offset location amplifier 432
L.5.1.1.8 Text amplifier 432
L.5.1.1.9 Altitude/depth amplifier 432
L.5.1.1.10 Altitude base reference point 432
L.5.1.1.10.1 Relative altitude 432
L.5.1.1.10.2 Flight level 432
L.5.1.1.10.3 Multiple instances of altitude/depth amplifiers 432
L.5.1.1.11 Date-time group 433
L.5.1.1.12 Location of control measures and planning symbols sector modifiers 433
L.5.1.1.12.1 Control measures and planning symbols sector 1 modifier 433
L.5.1.1.12.2 Mine types 433
L.5.1.1.12.3 Default mine type 433
L.5.1.1.12.4 Mine type(s) as a fill pattern 434
L.5.1.1.13 Feint/decoy/dummy amplifier 434
L.5.2 Construction of control measures and planning symbols 437
L.5.2.1 Point control measures and planning symbols 437
L.5.2.2 Line and area control measures and planning symbols 437

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.3 Coloring 438
L.5.4 Labeling 438
L.5.4.1 Fonts 438
L.5.5 Command and control 438
L.5.5.1 Boundaries 438
L.5.5.2 Boundary line segment orientation determination 439
L.5.5.2.3 Boundary line operational examples 439
L.5.5.2.4 Control measures and planning symbol draw rules 440
L.5.6 Points 448
L.5.7 Lines 449
L.5.8 Areas 449
L.5.9 Area of operations 450
L.5.10 Command and control symbols 452
L.5.11 Maneuver control measures and planning symbols 460
L.5.12 Defensive maneuver 470
L.5.12.1 Areas 470
L.5.12.2 Observation post 472
L.5.13 Offensive maneuver 475
L.5.14 Airspace coordinating measures 481
L.5.14.1 Airspace coordinating measures 481
L.5.15 Maritime control measures and planning symbols 495
L.5.16 Fire support coordination measures 531
L.5.17 Targets 538
L.5.18 Target acquisition 547
L.5.19 Obstacles 556
L.5.20 Field fortification symbols 574
L.5.21 CBRN defense control measures and planning symbols 576
L.5.22 Sustainment symbols 583
L.5.23 Supply points 590
L.5.24 Mission and operational tasks. 601
L.5.25 Intelligence symbols. 611
L.5.26 Control measures and planning symbol sector 1 modifiers 612
L.5.27 Abbreviations and acronyms used with control measure and planning symbols. 617
L.5.27.1 Boundary abbreviations and acronyms 617
L.5.27.2 Unit functions abbreviation and acronyms 619
METEOROLOGICAL AND OCEANOGRAPHIC SYMBOLOGY 621
M.1 SCOPE 621
M.1.1 Scope 621

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

M.2 APPLICABLE DOCUMENTS 621
M.3 DEFINITIONS 621
M.4 GENERAL REQUIREMENTS 621
M.4.1 Organization 621
M.5 DETAILED REQUIREMENTS 621
M.5.1 Technical specifications 621
M.5.2 Symbology identification coding scheme 621
M.5.3 Symbology set 621
WARFIGHTING SYMBOLS IN PSEUDO-THREE-DIMENSIONAL DISPLAYS 719
N.1 SCOPE 719
N.1.1. Scope 719
N.2 REFERENCES 719
N.3 DEFINITIONS 719
N.3.1. Billboarding 719
N.3.2. Cubing 719
N.3.3. Curve (line) 719
N.3.4. Geospatial 719
N.3.5. Glyph 719
N.3.6. Icon 719
N.3.7. Image 720
N.3.8. Marker post (lollipop) 720
N.3.9. Model 720
N.3.10. Pictograph 720
N.3.11. Point 720
N.3.12. Solid (volume) 720
N.3.13. Surface (area) 720
N.3.14. Symbicon 720
N.3.15. Symbol 720
N.3.16. Terrain draping 720
N.3.17. Three-dimensional 720
N.3.18. Two-dimensional 720
N.4 PSEUDO-THREE-DIMENSIONAL (2.5D) SYMBOLIZATION 720
N.4.1. Introduction 720
N.4.2. When to use 2.5D displays 721
N.4.3. Taxonomy of symbols and displays 722
N.4.3.1. Subject area 722
N.4.3.2. Delineation type 722
N.4.3.3. Degree of Abstraction 722

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

N.4.3.4. Dimensionality 722
N.4.3.5. Relative to terrain 723
N.4.4. Geospatial (map) symbols 723
N.4.4.1. Raster data 723
N.4.4.2. Vector data 723
N.4.5. Imagery 723
N.4.6. Optimum display method 723
N.5 GUIDANCE AND PORTRAYAL CONSIDERATIONS IN PSEUDO-THREE-DIMENSIONAL (2.5D) DISPLAYS 724
N.5.1. Use of 2D symbols in 2.5D display 724
N.5.1.1. Visualization of icons 724
N.5.1.1.1. Terrain draping 724
N.5.1.1.2. Billboarding 724
N.5.1.1.3. Cubing 725
N.5.1.1.4. Marker post 725
N.5.1.2. Visualization of control measure symbols 726
N.5.1.3. Symbicon 727
N.5.2. Pseudo-three-dimensional models 727
N.5.2.1. Modeling and simulation (M&S) standards 728
N.5.2.2. Model libraries 728
N.5.3. Design considerations for symbology in a 2.5D display 728
N.5.3.1. Symbol location 728
N.5.3.1.1. Submergence of symbols 728
N.5.3.1.2. Height above/below terrain surface 728
N.5.3.1.3. Estimating track position. 729
N.5.3.2. Perspective 729
N.5.3.3. Direction indicators 729
N.5.4. Text amplifiers for symbols 730
N.5.5. Speed vectors and trailing lines. 730
N.5.6. Incomplete data 730
N.5.7. Vertical exaggeration of terrain and tactical symbols 731
N.5.8. Implications for training and doctrine 731
N.6 NOTES 731
CONCLUDING MATERIAL 732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

1 SCOPE

1.1 Scope. This military standard (MIL-STD) establishes the rules and requirements to develop and display joint military symbology within the Department of Defense (DOD) and non-DOD entities.

2 APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this standard. This section does not include documents cited in other sections of this standard or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in this standard, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

INTERNATIONAL (NATO) STANDARDIZATION AGREEMENTS (STANAG)

STANAG 1166/APP-20	-	Standard Ship Designator System
STANAG 1241	-	Standard Identity Description Structure for Tactical Use
STANAG 2019/APP-06	-	Joint Military Symbology
STANAG 2511	-	Uncertainty Representation and Reasoning Evaluation Framework (URREP) Reliability Versus Credibility in Information Fusion
STANAG 2961	-	Classes of Supply of NATO Forces

DEPARTMENT OF DEFENSE (DOD) STANDARDS

MIL-STD-1472	-	Design Criteria Standard: Human Engineering
MIL-STD-6016	-	Interoperability Standard: Tactical Data Link (TDL) Link-16 Message Standard
MIL-STD-6017	-	Interoperability Standard: Variable Message Format (VMF) Message Standard
NGA.STND.0033	-	Geopolitical Entities, Names and Codes (GENC) Standard

(Copies of these documents are available online at https://assist.dla.mil/, https://quicksearch.dla.mil/, https://nsgreg.nga.mil/genc/registers.jsp)

2.2.2 Other Government documents, drawings, databases and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE PUBLICATIONS

Department of Defense Dictionary of Military and Associated Terms

MULTISERVICE PUBLICATIONS

ATP 2-01.3/ MCRP 2-10B.1	-	Intelligence Preparation of the Battlefield/Battlespace
ATP 3-17.2 (MCRP 3-20B.1[3-21-1B], NTTP 3-02.18, AFTTP 3-2.68)	-	Multiservice Tactics, Techniques and Procedures for Airfield Opening
ATP 3-37.10/MCRP 3-17.7N		Base Camps

JOINT PUBLICATIONS (JP)

AArtyP-1	-	NATO – Land-Based Fire Support Procedures
AArtyP-5/ STANAG 2484	-	NATO Fire Support Doctrine
AJP-3.3.5	-	Allied Joint Doctrine for Airspace Control
JP 2-01.3	-	Joint Intelligence Preparation of the Operation Environment
JP 3-09	-	Joint Fire Support
JP 3-09.3	-	Close Air Support
JP 3.13	-	Information Operations
JP 3-52	-	Joint Airspace Control

(Copies of these documents are available at https://jdeis.js.mil/jdeis/.)

ONLINE DATABASES

NATOTERM	-	NATO Terminology Database

(Link to NATOTerm database: https://nso.nato.int/natoterm/)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

ARMY PUBLICATIONS

FM 1-02.1	-	Operational Terms
FM 1-02.2	-	Military Symbols
FM 3-34	-	Engineer Operations
FM 3-90	-	Tactics
ADP 3-90	-	Offense and Defense
ATP 2-33.4	-	Intelligence Analysis
ATP 3-05.1	-	Unconventional Warfare at the Combined Joint Special Operations Task Force Level
ATP 3-09.30	-	Observed Fires
ATP 4-02.2	-	Medical Evacuation

(Copies of these documents are available at https://armypubs.army.mil/.)

UNITED STATE MARINE CORPS PUBLICATIONS

MCWP-16	-	Fire Support Coordination in the Ground Combat Element

(A copy of this document is available at https://www.marines.mil/News/Publications/MCPEL/Tag/95321/doctrine/)

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

STANAG 1059	-	Letters Codes for Geographical Entities

(A copy of this document is available at https://nso.nato.int/nso/home#)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3 DEFINITIONS

3.1 Acronyms and abbreviations used in this standard. The acronyms used in this standard are defined as follows:

AAP	allied administrative publication
ADP	Army doctrine publication
ADRP	Army doctrine reference publication
AFH	Air Force handbook
AIS	automated information system
AJP	allied joint publication
AOU	area of uncertainty
APP	allied procedural publication
ASSIST	Acquisition Streamlining and Standardization Information System
ATP	Army Training Publication

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

C2	command and control
CBRN	chemical, biological, radiological, and nuclear
CIE	Commission Internationale de l'Eclairage
DISA	Defense Information Systems Agency
DOD	Department of Defense
DR	dead reckoning
FM	field manual
HSL	hue, saturation and luminance
IFF	identification friend or foe
ISO	International Organization for Standardization
JP	joint publication
MCRP	Marine Corps reference publication
METOC	meteorological and oceanographic
MGRS	military grid reference system
MIL-STD	military standard
NATO	North Atlantic Treaty Organization
RGB	red, green, blue
SIF	selective identification feature
SIGINT	signals intelligence
STANAG	standardization agreement NATO
USMTF	United States message text format
VMF	variable message format
WGS 84	World Geodetic System 1984

3.2 Definitions used in this standard. Terms used in this document are defined as follows. When applicable, the source of the definition is cited in parentheses. Unless otherwise annotated, this publication is the proponent for all terms and definitions found in the index.

3.2.1 Amplifier. Optional text or graphics that provide additional information about a symbol and are always located outside the frame area.

3.2.2 Area. 1. A flat piece of ground or open space. 2. A distinct space or surface, or one having a special function. (Refer to FM 1-02.1 for the definition of specific types of areas.)

3.2.3 Assumed friend. "In identification, the designation given to a track, object or entity whose characteristics, behavior or origin indicate that it is a probable friend." (NATOTerm)

3.2.4 Atmospheric environment phenomena. A term used to describe natural phenomena occurring in the envelope of air surrounding the Earth, including its interfaces and interactions with the Earth's solid or liquid surface.

3.2.5 Attribute. A distinctive feature or characteristic such as line, shape, color, texture (fill), edge, mass and value.

3.2.6 Boundary. A line that delineates surface areas for the purpose of facilitating coordination and deconfliction of operations between adjacent units, formations, or areas. (DOD Dictionary)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.7 C2 (Command and Control). The exercise of authority and direction by a properly designated commander over assigned and attached forces in the accomplishment of the mission. Command and control functions are performed through an arrangement of personnel, equipment, communications, facilities, and procedures employed by a commander in planning, directing, coordinating, and controlling forces and operations in the accomplishment of the mission.

3.2.8 Combat effectiveness. The ability of a unit to perform its mission. Factors such as ammunition, personnel, fuel status, and weapon systems are evaluated and rated. (FM 1-02.1)

3.2.9 Commission Internationale de l'Eclairage (CIE). A color space chart widely used to describe the range of color seen by the human eye.

3.2.10 Contact. In air intercept, a term meaning, "Unit has an unevaluated target."

3.2.11 Control measures and planning symbols. A category of joint military symbology that provides information about objects necessary for battlefield planning and management.

3.2.12 Cyberspace. Cyberspace is a global domain within the information environment consisting of interdependent networks of information technology infrastructures and resident data, including the internet, telecommunications networks, computer systems, and embedded processors and controllers (JP 3-12).

3.2.13 Defended area. An area the Source Track Number (STN) is capable of defending against ballistic missiles, etc., (i.e., the Source TN is operational with ready weapons and has designated the area for defense). (MIL-STD-6016)

3.2.14 Defense support of civil authorities. Support provided by US Federal military forces, Department of Defense civilians, Department of Defense contract personnel, Department of Defense component assets, and National Guard forces (when the Secretary of Defense, in coordination with the governors of the affected states, elects and requests to use those forces in Title 32, United States Code, status) in response to requests for assistance from civil authorities for domestic emergencies, law enforcement support, and other domestic activities or from qualifying entities for special events. (DOD Dictionary)

3.2.15 Faker. A friendly track acting as a hostile for exercise purposes. (STANAG 1241)

3.2.16 Field. A defined area in which a limited combination of alphanumeric and other characters, amplifiers and/or abbreviations are grouped/situated in an established way around a symbol/icon, line, area, point, or boundary and used for the purpose of providing additional information about the associated object or operational environment geometry.

3.2.17 Frame. The geometric border of a symbol that provides an indication of the standard identity, dimension and status of a joint military object.

3.2.18 Friend. In identification, the designation given to a track, object or entity belonging to a declared, presumed or recognized friendly nation, faction or group (NATOTerm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.19 Frontogenesis. The process where a frontal boundary is developing.

3.2.20 Frontolysis. The process where a frontal system is dissipating/weakening.

3.2.21 Graphic. Any and all products of the cartographic and photogrammetric art. A graphic may be either a map, chart, or mosaic or even a film strip that was produced using cartographic techniques.

3.2.22 Hostile. In identification, the designation given to a track, object or entity whose characteristics, behavior or origin indicate that it is a threat to friendly forces. Designation as hostile does not necessarily imply clearance to engage. (NATOTerm)

3.2.23 Icon. The innermost part of a symbol that provides a graphic representation of an object.

3.2.24 Icon-based symbol. A category of joint symbology that provides information about the standard identity, dimension, status and mission of an object.

3.2.25 Installation. A grouping of facilities which support particular functions. Installations may be elements of a base.

3.2.26 Interoperability. The condition achieved among communications-electronics systems or items of communications-electronics equipment when information or services can be exchanged directly and satisfactorily between them and/or their users. The degree of interoperability should be defined when referring to specific cases. (DOD Dictionary)

3.2.27 Joint military symbology. Symbology used to plan and execute joint military operations in support of C2 functions. These symbols fall into two basic categories: icon-based symbols and control measure symbols.

3.2.28 Joker. A friendly track acting as a suspect for exercise purposes. (STANAG 1241)

3.2.29 Lollipopping. The placing of a symbol above the ground surface on a map using a marker post. The user can set an arbitrary height above the ground surface and drop down lines connecting the symbol to its ground location without having the symbol actually cover the location on the map.

3.2.30 Meteorological symbology. Symbology used in weather/climatic forecasting.

3.2.31 Modifier. A pictorial or alphanumeric component that provides additional information about the icon and is always located inside the frame area.

3.2.32 Neutral. 1. In combat and combat – support operations, an identity applied to a track whose characteristics, behavior, origin, or nationality indicate that it is neither supporting nor opposing friendly forces. (DOD Dictionary) 2. In identification, the designation given to a track, object or entity whose characteristics, behavior, origin or nationality indicate that it is neither supporting nor opposing friendly forces (NATOTerm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3.2.33 Operational environment. A composite of the conditions, circumstances, and influences that affect the employment of capabilities and bear on the decisions of the commander. (DOD Dictionary)

3.2.34 Own ship. The visual representation of the ship that the operator is currently occupying.

3.2.35 Pending. Tracks which have not been subject to the identification process but which are available for reporting may be reported with a status of pending. (STANAG 1241)

3.2.36 Point. A position, place, spot, or locality. (Refer to FM 1-02 for the definition of specific types of points.) A symbol that has only one set of coordinates.

3.2.37 Signals intelligence (SIGINT). 1. A category of intelligence comprising either individually or in combination all communications intelligence, electronic intelligence, and foreign instrumentation signals intelligence, however transmitted. 2. Intelligence derived from communications, electronics, and foreign instrumentation signals. (DOD Dictionary)

3.2.38 Suspect. In identification, the designation given to a track, object or entity whose characteristics, behavior or origin indicate that it is a potential threat to friendly forces. (STANAG 1241)

3.2.39 Symbol. A graphic object that presents information.

3.2.40 Symbol identification code (SIDC). A numeric code based on a hierarchical structure that provides the elements required to construct the basic symbol.

3.2.41 Text. Words, alphanumeric information and other American Standard Code for Information Interchange (ASCII) characters used to define or further designate the meaning of a symbol.

3.2.42 Track. 1. A series of related contacts displayed on a data display console or other display device. 2. To display or record the successive positions of a moving object. 3. The actual path of an aircraft above or a ship on the surface of the earth. (DOD Dictionary) The course is the path that is planned; the track is the path that is actually taken.

3.2.43 Unknown. In identification, the designation given to an evaluated track, object or entity that has not been identified. (NATOTerm) An identity applied to an evaluated track that has not been identified. (DOD Dictionary)

4 GENERAL REQUIREMENTS

4.1 Joint military symbology. Figure 1 shows the appendices that contain the joint military symbology sets available for planning and conducting joint operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

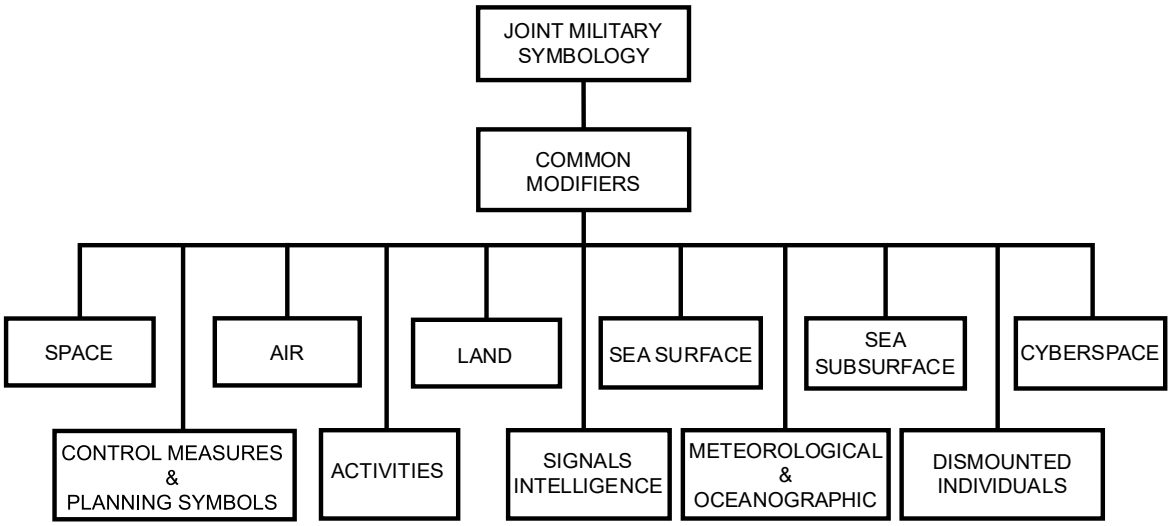


FIGURE 1. Joint military symbology appendices.

4.2 Command and control symbols. The symbol sets encompass the graphic representation of units, equipment, installations and other elements and activities relevant to joint military operations. They contain the building blocks for joint symbols from the air, land, maritime (sea surface and sea subsurface), space and cyberspace domains.

4.3 Other symbols. This standard also contains standardized symbols and figures for control measures and planning symbols, meteorological and oceanographic (METOC), signals intelligence (SIGINT), activities and dismounted individuals.

4.4 Monochromatic and hand-drawn symbols. While the focus of this publication is the display of symbols in modern multi-chromatic electronic systems, all symbols should be usable in monochromatic systems and as hand-drawn symbols.

4.5 Symbol recognition and legibility. When engineering and designing symbols and composing their building blocks, consider human factors; such as, symbol recognition and legibility across a variety of illumination conditions, map backgrounds, symbol sizes, display types and resolutions, and mental and physical fatigue.

4.6 Availability of scalable vector graphics (SVG) format symbol components. The Symbology Standard Management Committee (SSMC) has created symbol building blocks in scalable vector graphics (SVG) format. These symbol components are Scalable Vector Graphics (SVG) 1.1 (Second Edition), 16 August 2011 compliant and can be used as examples of control measures and planning symbols, can be used to assemble and/or parse symbols in all other appendices, and can be used as input in creating MIL-STD-2525 compliant symbols in other formats by implementers of the standard. Requests for these files (please specify MIL-STD-2525 version) should be addressed to Defense Information Systems Agency (DISA) Military Message Standards Branch (EM7), P.O. Box 549, Ft. Meade, MD 20755-0549, or emailed to disa.meade.EE.mbx.symbology@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST [Acquisition Streamlining and Standardization Information System] online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

4.7 Application and implementation of approved symbology change proposals (SCP). symbology change proposals (SCPs) written against the current version of MIL-STD-2525 and approved by the SSMC, unless specifically stated otherwise in the approved SCP document, can be immediately implemented and fielded upon approval of the SCP by the SSMC on any system or platform prior to that SCP being incorporated into the next formal release of MIL-STD-2525.

4.7.1 Requirements and advantages of implementing approved SCPs. There are many reasons why a Service, system, system of systems or application would immediately implement SSMC SCPs that were approved for implementation vice waiting for an updated version of the standard to be published. Many new symbol requirements have originated with deployed warfighters engaged in combat operations for new symbol to depict things not supported in the (at that time) current version of the standard – things such as improvised explosive devises (IED), IED suicide bombers, IED explosions, emergency distress call points, terrorist organizations, raids on houses, etc. Other new symbol requirements originate from a Service when their doctrine changes and new symbols are identified in those documents. As these documents are used in training, it is often imperative to get these new symbols approved and into fielded systems so the warfighter will have all the tools available to them that they were trained to use. Waiting for an updated version of the standard to be published can take years and is often an unacceptable delay to the warfighters we support.

4.7.2 Obtaining approved SCPs. Copies of SCPs are available for download from the SSMC website: (https://intelshare.intelink.gov/sites/datalinks/Symbology/SitePages/Community%20Home.aspx). Requests should be addressed to Defense Information Systems Agency (DISA) Military Message Standards Branch (EM7), P.O. Box 549, Ft. Meade, MD 20755-0549, or emailed to disa.meade.EE.mbx.symbology@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST [Acquisition Streamlining and Standardization Information System] online database at https://assist.dla.mil/.

4.7.3 Receipt of unrecognized symbol identification codes. The ability to implement SSMC approved SCPs immediately upon approval could cause fielded systems to receive a symbol identification code (SIDC) that the system does not recognize. If a system receives an unrecognized SIDC, the system should handle exception to the best of its ability and based upon its specific system/user requirements. This could include, for example, discarding the unrecognized SIDC, displaying an Unknown symbol (see table I) at the unrecognized SIDC location, or displaying the portions of the unrecognized SIDC that can be understood; such as, an empty frame (affiliation based/shaped) when SIDC Set A is recognized and understood but Set B is not recognized or understood.

5 DETAILED REQUIREMENTS

5.1 Objective. To promote interoperability at the information level within the area of joint military symbology, it is necessary to define a standard set of rules for symbol construction and generation to be implemented in C2 systems. The rules in this standard are considered to be the minimum necessary to ensure that information about joint military symbology is exchanged successfully across service and organizational boundaries. These rules are not intended to constrain the manner in which the symbology is used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.2 Organization. This section provides the detailed requirements concerning the composition, construction, display and transmission of tactical symbols and control measures and planning symbols considered essential to achieve interoperability. Display rules are provided which allow the degree of complexity of the resulting symbology to be tailored to operational requirements and system capabilities. Additional implementation guidance is provided in each appendix as it applies to the particular symbology set.

5.3 Icon-based symbols. Icon-based symbols represent units, individuals, equipment, installations, activities, cyberspace and meteorological occurrences. An icon-based symbol can be composed of a frame, fill, icon, modifiers and amplifiers (see figure 2) and optionally may be rotated on its anchor point. These elements are located within and around a virtual bounding octagon. Unless otherwise noted all main icon and modifier fills shall be transparent. Icons and modifiers that are non-civilian and are to be white filled for visual clarity shall be noted that it is white filled. The symbol anchor point shall be the center point of the virtual bounding octagon. The components of an icon-based symbol provide information about the standard identity, dimension, status and mission of an operational object. The placement and display options of the various elements are explained in the following paragraphs. When representing unorthodox platforms, select the most appropriate icon from the standard.

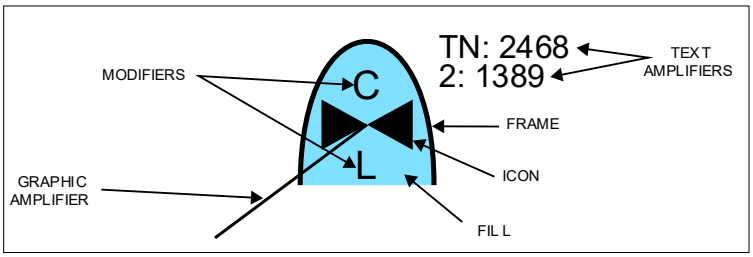


FIGURE 2. Icon-based symbol components.

5.3.1 Bounding octagon. The bounding octagon serves as the spatial reference for the relative sizing and placement of frames, icons and modifiers. The default length and height of the bounding octagon is L (see figure 3). L is measured from point to opposite point in the octagon. The bounding octagon shall not be displayed in a symbol. The bounding octagon appears in example symbols throughout this document for clarification purposes only.




FIGURE 3. The bounding octagon.

5.3.1.1 Bounding octagon and frames. The size and placement of frames shall be determined by the size of the bounding octagon. Frame length and height shall vary from 1L to 1.5L depending on the particular frame. See figure 4 for extracted examples of sizing requirements of the basic frames relative to the bounding octagon. See 5.3.2 for more information on frames.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

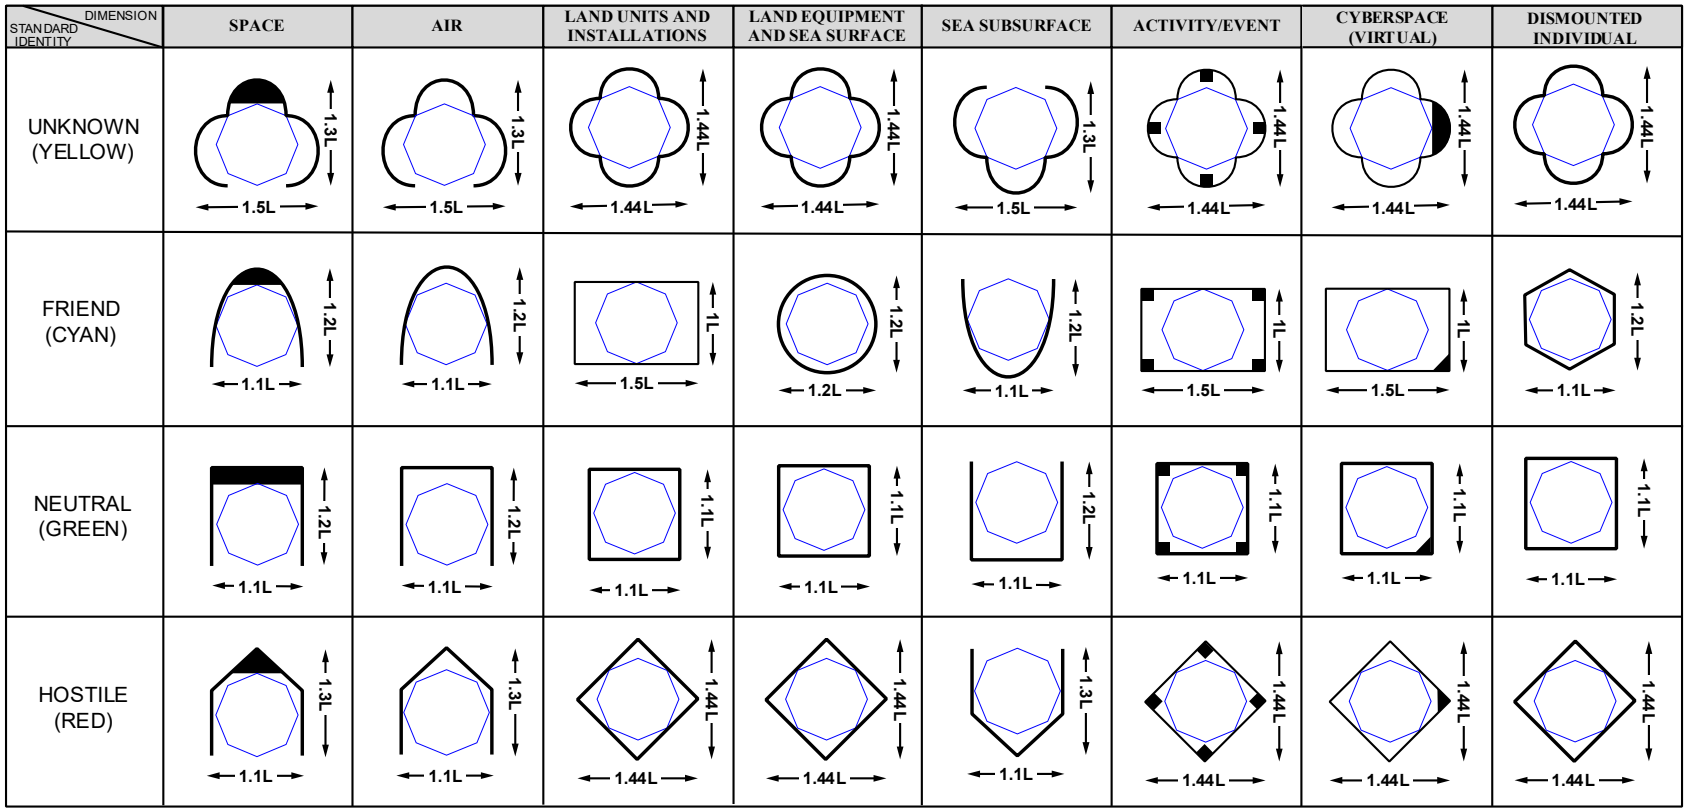


FIGURE 4. The bounding octagon and frame sizes (illustrative examples).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.1.2 The bounding octagon and icons/modifiers. The bounding octagon is divided into three horizontal sectors (main, 1 and 2) to specify positioning and sizing of icons and modifiers. Main icons shall be placed in the main sector, unless expressly noted within a specific symbol draw rule, while modifiers are placed in sectors 1 and 2. To optimize legibility, icons may be enlarged within the constraints of the bounding octagon when one or no modifiers are displayed. Specific icons/symbols, as identified in the standard, require the sectored bounding octagon to be rotated 90 degrees counterclockwise to create vertical sectors. Figure 5 shows the horizontal and vertical sectored bounding octagons. The dimensions of unframed icons shall be the same as framed icons. See 5.3.4 for more information on icons. Modifiers shall not exceed the dimensions of sectors 1 and 2, unless expressly noted within a specific symbol. See 5.3.6 for more information on modifiers.

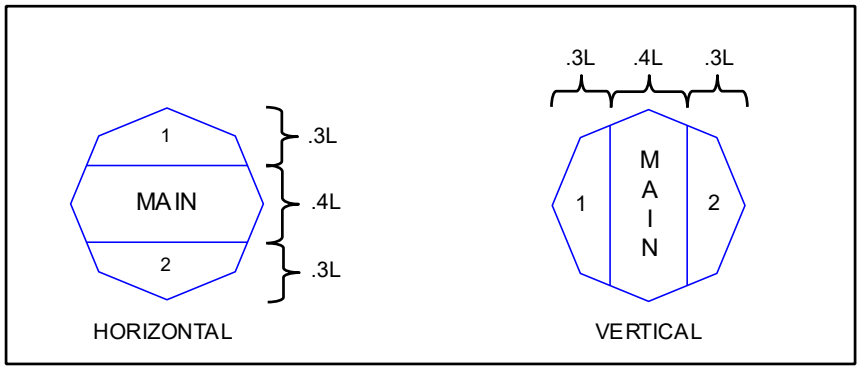



FIGURE 5. The bounding octagon with horizontal and vertical sectors.

5.3.2 Frame. The frame is the border of a symbol. A frame shall be optionally depicted in only two cases: land equipment and sea surface civilian vessels. Natural event symbols are unframed. When a frame is included in a symbol, its shape indicates the standard identity, dimension and status of the object. A frame can be black or white depending on display background. Table I provides the frame shapes that shall be used during real-world, non-exercise situations. Table II provides the frame shapes that shall be used during exercises. Table III provides the frame shapes that shall be used during simulations. If training tracks are displayed, they shall be identified by adding "-T" to the "X" in the exercise frame (see figure 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.








TABLE I. Frames depicting standard identities and dimensions.

STANDARD IDENTITY \ DIMENSION	UNKNOWN	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE (VIRTUAL)	DISMOUNTED INDIVIDUAL
PENDING (YELLOW)										
UNKNOWN (YELLOW)										
FRIEND (CYAN)										
NUETRAL (GREEN)										
HOSTILE (RED)										
ASSUMED FRIEND (CYAN)										
SUSPECT (ORANGE)										

Note: Frames displayed with solid lines or alternating black and white dotted lines, as shown above, indicate status as present, i.e., the object exists at the location identified. See table IV for examples of frames depicting planned or anticipated status.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.















TABLE II. Exercise frames.

STANDARD IDENTITY \ DIMENSION	UNKNOWN	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE (VIRTUAL)	DISMOUNTED INDIVIDUAL
EXERCISE PENDING (YELLOW)										
EXERCISE UNKNOWN (YELLOW)										
EXERCISE FRIEND (CYAN)	N/A									
EXERCISE NEUTRAL (GREEN)	N/A									
FAKER (RED)	N/A									
EXERCISE ASSUMED FRIEND (CYAN)	N/A									
JOKER (ORANGE)	N/A									

Note: Frames displayed with solid lines or alternating black and white dotted lines, as shown above, indicate status as present, i.e., the object exists at the location identified. See table IV for examples of frames depicting planned or anticipated status.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE III. Simulation frames.

STANDARD IDENTITY \ DIMENSION	UNKNOWN	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE (VIRTUAL)	DISMOUNTED INDIVIDUAL
SIMULATED PENDING (YELLOW)										
SIMULATED UNKNOWN (YELLOW)										
SIMULATED FRIEND (CYAN)										
SIMULATED NEUTRAL (GREEN)										
SIMULATED HOSTILE (RED)										
SIMULATED ASSUMED FRIEND (CYAN)										
SIMULATED SUSPECT (ORANGE)										

Note: Frames displayed with solid lines or alternating black and white dotted lines, as shown above, indicate status as present, i.e., the object exists at the location identified. See table IV for examples of frames depicting planned or anticipated status.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.



FIGURE 6. Friend and neutral exercise training tracks.

5.3.2.1 Standard identity. In imagery interpretation, identity is the discrimination between objects within a particular type or class. Standard identity reflects the relationship between the viewer and the operational object being monitored.

a. The Standard Identity categories are Unknown, Assumed Friend, Friend, Neutral, Suspect, and Hostile (see tables I, II, and III). In addition, Pending is a valid condition but not considered a standard identity. Figure 7 shows assumed friend and suspect frames on various backgrounds.

b. A closed frame is used to denote the Land and Sea Surface Dimensions, a frame open at the bottom to denote the Air and Space Dimensions, and a frame open at the top to denote the Sea Subsurface Dimension.

c. A solid line is used when the identity of an entity is certain. A solid line can be used with the standard identifiers of Friend, Hostile, Neutral and Unknown.

d. A dotted line of alternating black and white dots is used when the identity of an entity is uncertain. A dotted line can be used with the standard identifiers of Assumed Friend, Suspect, or the category of Pending. Figure 7 shows assumed friend and suspected frames on various backgrounds.

e. Standard Identity is not applicable to Meteorological Oceanographic (METOC) symbols.

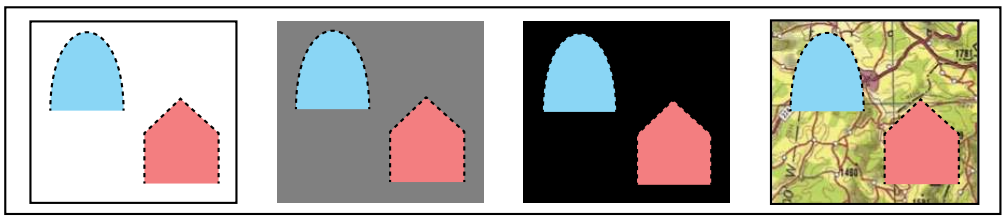


FIGURE 7. Assumed friend and suspect frames on various backgrounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.2.2 Domain. A domain commonly reflects the physical environment where either the entity's primary function is conducted or where the entity is located on, above or below the Earth's surface (space, air, land, or maritime). Additionally, within the information environment, cyberspace is a global domain that permeates all physical domains and includes a virtual dimension. A dimension is a subset or aspect of a particular domain.

- The land domain includes only those graphical representations that are physically located on the land surface or close to the surface. Units, equipment, and installations are dimensions of the land domain.
- The maritime domain includes only those objects that are physically located on or below the sea surface. Sea surface and sea subsurface are dimensions of the maritime domain.
- The air domain is unidimensional and includes those objects that are physically located beginning at the Earth's surface and extending to the altitude where atmospheric effects upon operations become negligible. Aircraft, regardless of Service ownership, shall be depicted in the air domain, while air facilities shall be depicted as land installations. Air-related ground equipment and installations shall be depicted in the land equipment or installation dimensions.
- The space domain is unidimensional and includes the environment above the exosphere. Space-related ground equipment and installations shall be depicted in the land equipment or installation dimensions.
- The virtual cyberspace domain is a part of the information environment consisting of computer networks characterized by the use of electronics and the electromagnetic spectrum. Within the physical domains and the associated dimensions (i.e., units, equipment, installations, sea surface, and sea subsurface), cyberspace entities and their physical presence are depicted using the existing physical domains and dimensions symbology.
- Activity/event, dismounted individuals and unknown are categorized as dimensions. They do not have a direct relationship to a specific domain.

5.3.2.3 Status. Status depicts whether an object exists at the location identified (status is "present" or "confirmed"), will in the future reside at that location (status is "planned" or "anticipated"), or is thought to reside at that location ("suspected"). See table IV.

- The symbol frame shall be a solid or black and white dotted line when indicating a present or confirmed status and a dashed line when indicating anticipated, planned, or suspected status.
- When the frame is assumed friend, suspect, or pending, the status shall not be displayed. In these cases, the frame is depicted as a dotted line.
- For icons that can be framed or unframed, and icons where framing is optional, icons shall be framed when showing status. Status other than "present" or "confirmed" shall not be shown when the symbol icon is unframed or is displayed as a dot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE IV. Friend frames shown in present and planned status.

DIMENSION / STANDARD IDENTITY	UNKNOWN	SPACE	AIR	LAND UNIT	LAND EQUIPMENT AND SEA SURFACE	LAND INSTALLATION	SEA SUBSURFACE	ACTIVITY/ EVENT	CYBERSPACE	DISMOUNTED INDIVIDUAL
FRIEND (CYAN)										
ASSUMED FRIEND (CYAN)										

5.3.3 Fill. The fill is the interior area within a frame. In framed symbols, color shall provide a redundant indicator with regard to standard identity. If color is not used, the fill is transparent (see figure 8 below).

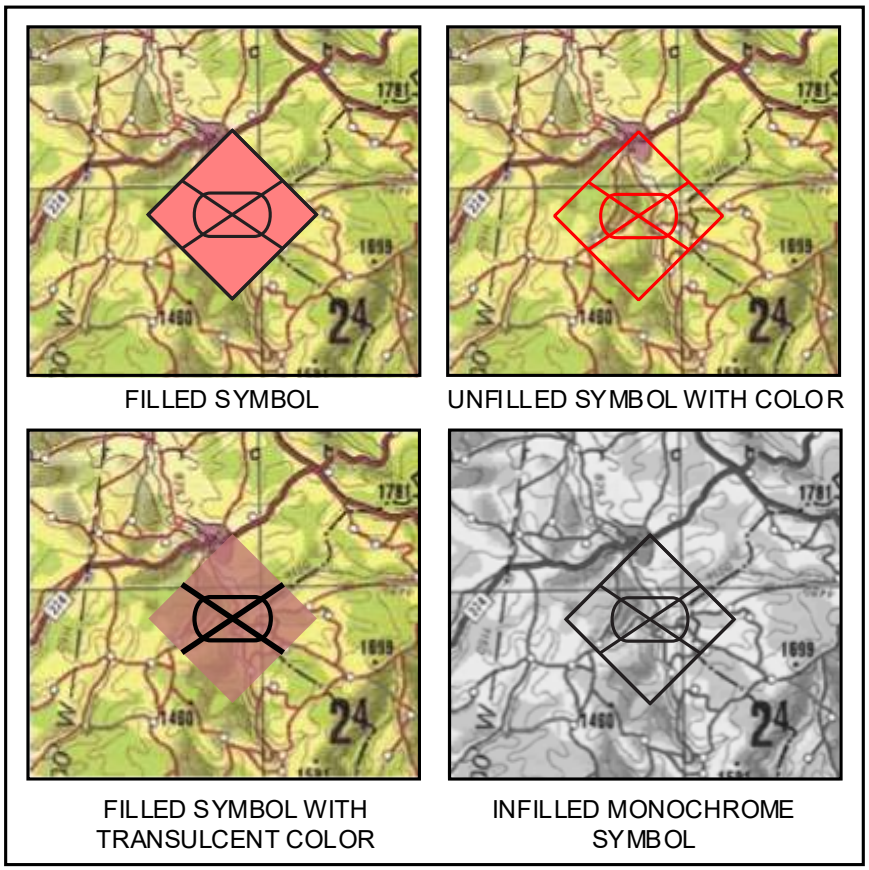


FIGURE 8. Examples of filled and unfilled symbols.

5.3.3.1 Fill color. In unframed symbols, color shall be the sole indicator of standard identity, excluding text amplifiers. Table I depicts the default colors that shall be used to designate standard identity when colored symbols are either hand-drawn or displayed electronically. See 5.5 for additional information on how color is to be displayed in a symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.4 Icons. The icon is the innermost part of a symbol which provides an abstract pictorial or alphanumeric representation of units, equipment, installations, activities, or operations. This standard distinguishes between icons that must be framed or unframed and icons where framing is optional. See table V for examples of framed and unframed icons. Text icons shall be no more than four characters.

TABLE V. Framed and unframed icons shown in present and planned status.

SYMBOL	FRAMED ICON (PRESENT)	UNFRAMED ICON (PRESENT)	FRAMED ICON (PLANNED)
FRIEND MORTAR			
HOSTILE TANK			

5.3.4.1 Main icons. Main icons are icons that are placed in the main sector of the bounding octagon and normally do not exceed the dimensions of the main sector (see figure 9). For better readability, main icons may be “enlarged” to extend into any unused modifier sector.

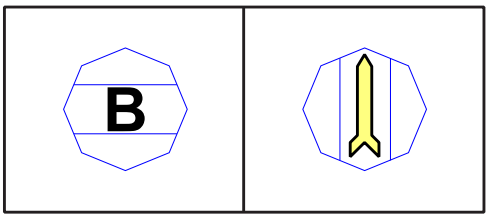


FIGURE 9. Examples of main icons.

5.3.4.2 Full octagon icons. Full octagon icons are icons that fill the main and both modifiers do not adhere to the sectors of the bounding octagon and thus do not allow modifiers. They shall not exceed the dimensions of the bounding octagon (see figure 10).




FIGURE 10. Example of full octagon icon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.4.3 Full frame icons. Full frame icons are main icons that exceed the dimensions of the bounding octagon and touch the interior border of the frame (see figure 11). Modifiers may be used as long as the full frame icon does not require the use of that sector.

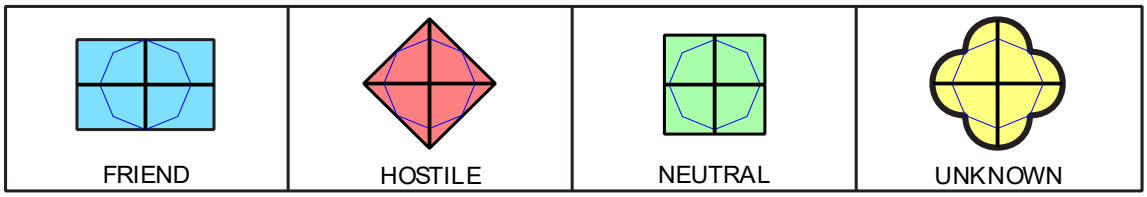


FIGURE 11. Examples of full frame icons (medical unit).

5.3.5 Invalid symbols. When migrating between standards, if a system's software encounters a SIDC and is unable to translate that into a 2525E symbol code because of a disconnect between the two codes, an inverted question mark within a yellow clover frame shape shall be used (see figure 12).




FIGURE 12. Example of invalid symbol.

5.3.6 Modifiers. A modifier provides an abstract pictorial or alphanumeric representation that is displayed in conjunction with an icon inside the symbol frame or frame area when the frame is not shown. The modifier provides additional information about the object, such as unit, equipment, installation, or activity being displayed. Text modifiers shall be no more than four characters. Any modifier in a symbol that would overlap a main icon, the modifier shall be offset, within its sector, to the main icon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7 Amplifiers. An amplifier provides additional information about the symbol and is displayed outside the frame (see table VI). Not all amplifiers are applicable to all symbols. Mine Warfare (MIW) symbols do not use amplifiers. The amplifier field descriptions vary by dimension and are detailed within the respective appendices. The default placement of amplifiers around symbols are shown in figure 13 and in each of the dimensions. When an amplifier is displayed, it shall be defined in accordance with the appropriate standard identity, control measure or planning symbol. For the purposes of de-cluttering the display, only essential amplifiers should be used. When multiple text amplifiers are displayed in a single field, only the most critical amplifier should be used. Amplifiers on the left shall be right aligned, amplifiers on the right shall be left aligned and top and bottom amplifiers shall be centered. All text shall be presented in upper case sans serif font. Font size and color should be tested to determine display legibility. Amplifier fields should be used, even if all amplifiers on a particular side of the symbol are not displayed; the order of the amplifier fields shall remain unchanged.

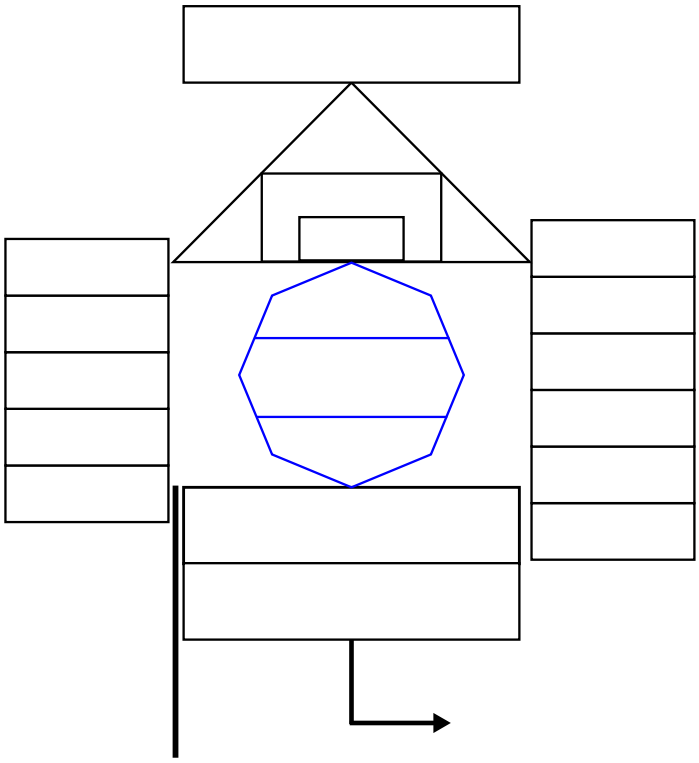


FIGURE 13. Standard amplifier field locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	Graphic	All	Determined by SIDC positions 11-20.
B	Echelon	An amplifier in a unit symbol that identifies command level (see 5.3.7.1 and table VII).	Graphic	10, 25, 60	
C	Quantity	An amplifier in an equipment symbol that identifies the number of items present. Examples include: 350 Beds 50 Gallons	Alphanumeric - {1,19} [#########] [XXXXXXXXXX]	10, 11, 15, 25, 27, 60	Two-part composite field. Where # is the numeric value [1-999999999], and X is the unit of measure. **Note**: There should be a space between the numeric and the unit of measure values.
D	Task Force Amplifier	An amplifier that identifies a unit or activities symbol as a task force (see 5.3.7.2 and figure 14).	Graphic	10	Determined by SIDC position 8.
F	Reinforced or Reduced	An amplifier in a unit symbol that displays (+) for reinforced, (-) for reduced, (±) reinforced and reduced.	Alphanumeric - {1,1}	10	
G	Staff Comments	An amplifier for units, equipment and installations; content is implementation specific.	Alphanumeric - {1,20}	01, 05, 10, 15, 20, 27, 30, 35, 40	
H	Additional Information	An amplifier for units, equipment and installations; content is implementation specific.	Alphanumeric - {1,20}	All[1]	
H1	Unlisted Point Information	An alphanumeric text amplifier used to provide an up to a three-character letter field acronym to describe a point that is not already listed.	Alphanumeric - {1,3}	25	Only used with Action Points (General) control measure. SIDC 130100.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
J	Evaluation Rating	An amplifier that consists of a one-letter reliability rating and a one-number credibility rating. (See ATP 2-33.4)	Alphanumeric - {2,2} [X][#]	10, 15, 20, 27, 40	**Reliability Ratings:** A-completely reliable B-usually reliable C-fairly reliable D-not usually reliable E-unreliable F-reliability cannot be judged --- **Credibility Ratings:** 1-confirmed by other sources 2-probably true 3-possibly true 4-doubtfully true 5-improbable 6-truth cannot be judged
K	Combat Effectiveness	An amplifier for units and installations that indicates unit effectiveness or installation capability.	Alphanumeric - {2,3}	10, 15, 27	**List of Values**: FO - Fully Operational SO - Substantially operational MO - Marginally operational NO - Not operational UNK - Unknown
L	Signature Equipment	An amplifier for hostile equipment; “!” indicates detectable electronic signatures.	Alphanumeric - {1,1}	15	The amplifier displayed is the exclamation mark "!".
M	Higher Formation	An amplifier for units that indicates number or title of higher echelon command (corps are designated by Roman numerals).	Alphanumeric - {1,21}	10	
N	Hostile (Enemy)	An amplifier for equipment; letters "ENY" denote hostile symbols.	Graphic	15, 25	Determined by SIDC position 4. **Note**: This amplifier must be used when displaying enemy/hostile control measures and planning symbols on monochromatic displays

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
P	IFF/SIF/AIS	An amplifier displaying identification modes and codes: Identification Friend or Foe (IFF) Selective Identification Feature (SIF) Automatic Identification System (AIS)	Alphanumeric - {4,4} MODE 1:##, where ## is a two-digit octal number (0-7). **The rightmost digit is limited to 0-3.** [1:##]	01, 10, 15, 27, 30, 35	Note: 'MODE' is not required when displaying.
			Alphanumeric - {6,6} MODE 2:####, where #### is a four-digit octal number (0-7). [2:####]		
			Alphanumeric - {6,6} MODE 3:####, where #### is a four-digit octal number (0-7). [3:####]		
			Alphanumeric - {6,6} MODE 5:####, where #### is a 4-digit hexadecimal number (0-F). **The leftmost digit is limited from 0 to 3.** [5:####]		
			Alphanumeric - {8,8} MODE S:XXXXXX [S:XXXXXX]		
			Alphanumeric - {x,x} AIS IMO:XXXXXX [S:XXXXXX]		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
Q	Direction of Movement	An amplifier consisting of a line with arrow that identifies the direction of movement or intended movement of an object (see 5.3.7.9 and figure 15).	Graphic (Alphanumeric for exchange only)	10, 15, 20, 25, 27	If the exchanged value has a length of 7 characters, the value will be parsed as degrees. The allowed range is 000-360. The “DDD” DGT (True North) DGM (Magnetic north) and DGG (Grid North). The degrees must be prefixed with 0 to form a 3-digit number. e.g. “026 DGT”. 2. If the exchanged value has a length of 8 characters, the value will be parsed as mils. The “MMM” is the north reference: MGT (True North) MGM (Magnetic north) and MGG (Grid North). The mils must be prefixed with 0 to form a 4-digit number. e.g.: “0150 MGT”
R	Mobility Amplifier	An amplifier that depicts the mobility of an object not intrinsic to the entity itself (see 5.3.7.9, figure 15and table VIII).	Graphic	10	Determined by SIDC positions 9-10
S	Headquarters Staff	An amplifier for units, installations and activities that identifies them as a headquarters (see figure 14 and figure 15).	Graphic	10, 20, 60	Determined by SIDC position 8.
T	Unique Designation	An amplifier that uniquely identifies a particular symbol or track number. Identifies acquisitions number when used with SIGINT symbology.	Alphanumeric - {1,30}	All	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
T1	Lines - Unique Identifier or Primary Purpose	Lines - Second unique identifier for boundaries.	Alphanumeric - {1,30}	25	Only for use with Boundary Control measure symbols.
		Lines - Other than phase lines that have a specific purpose, (for example, restrictive fire line RFL), should have the primary purpose labelled on top of the line at both ends of the line inside the lateral boundaries or as often as necessary for clarity.			
	Points/Areas - Purpose or Servicing Unit	Points/Areas - Provides the unit servicing the point/area	Alphanumeric - {1,7}		For use with point symbols.
T2	Controlling Headquarters	An amplifier used to provide the designation of the Establishing Headquarters.	Alphanumeric - {1,7}	25	Used with Fire Support Control Measures only.
V	Type	An amplifier for equipment that indicates types of equipment.	Alphanumeric - {1,24}		**Example**: AH-64 for Attack Helicopter
W	Date/Time Group (DTG)	An amplifier for displaying a date-time group (DDHHMMSSZMONYYYY) or (DDHHMMZMMMYYYY) or “O/O” for On Order. Field "W" is used to provide DTG or if used with field "W1" the start of a period of time. Field "W1" is used to provide the end of a period of time.	Alphanumeric - {3,16}	10, 15, 20, 25, 27, 40, 45	The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).
W1				25	
X	Altitude/Depth	An amplifier that displays either altitude, flight level, depth for submerged objects or height of equipment or structures on the ground, the minimum, maximum and/or specific altitude (in feet or meters in relation to	Alphanumeric - {3,16} Three formats are allowed: (e.g. MSL, 9000FTAMSL, FL280.)	14	SM = Statute Miles DM = Data Miles

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
		a reference datum) or depth (for submerged objects in feet below sea level). See 5.3.7.6 for content.	1. Base reference point - [XXX]: “MSL” (Mean Sea Level) or “GL” (Ground Level).		
			2. Flight level - [FL###]. FL is fixed text, "###" is the flight level (range 0-999).		
			3. Height from a reference point. [###### UU BBBB] "######" is the value, (Range 0-999999) "UU" is the unit of measurement, (FT, M, KM, SM,DM). "BBBB" is the reference point, (AGL, AMSL, BMSL and HAE).		
Y	Location	An amplifier that displays a symbol’s location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	Alphanumeric - {3,16}	10, 15, 20, 25, 27, 30, 40	Exchange format is implementation specific.
Z	Speed	An amplifier that displays velocity (see 5.3.7.7).	Alphanumeric - {5,9} [#####] [XXX]	8	Two-part composite field. Where # is the numeric value [1-999999999], and XXX is the unit of measure (KPH, KPS, MPH, NMH, KTS). **Note**: There should be a space between the numeric and the unit of measure values.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
AA	Special C2 Headquarters	A amplifier that is contained inside the frame in place of the main icon and contains the name of the special C2 Headquarters.	Alphanumeric - {1,9}	10	Examples: Named command such as SHAPE, PACOM, and joint, multinational, or coalition commands such as CJTF, JTF, or MJTF.
AB	Feint/Dummy Amplifier	An amplifier that identifies an offensive or defensive unit, intended to draw the enemy's attention away from the area of the main attack.	Graphic	10, 15, 20, 27	Determined by SIDC position 8.
AD	Platform Type	An amplifier that identifies the electronic identification for a pulsed or non-pulsed electromagnetic emission.	Alphanumeric - {5,5}	10, 15	**List of Values**: ELNOT = Electronic intelligence notation CENOT = Communications emitter notation
AE	Equipment Teardown Time	An amplifier that identifies equipment teardown time in minutes.	Numeric – {1,3}	15,52	
AF	Common Identifier	An amplifier to provide a common name used to identify an entity.	Alphanumeric - {1,12}	10, 15, 27	Example: "Hawk" for Hawk SAM system.
AG	Auxiliary Equipment Amplifier	An amplifier for equipment that indicates the presence of a towed sonar array (see 5.3.7.11, figure 15 and table IX).	Graphic	35	Determined by SIDC positions 9-10.
AH	Area of Uncertainty	An amplifier that indicates the area where an object is most likely to be, based on the object's last report and the reporting accuracy of the sensor that detected the object (see 5.3.7.13.1 and figure 21).	Graphic (Alphanumeric for exchange only)	01, 05 10, 15, 20, 25, 27, 30, 35, 40	The amplifier can be displayed as an ellipse, a bearing box, or a line of bearing, depending on the report received for the object.
AI	Dead Reckoning Trailer	An amplifier that identifies where an object should be located at present, given its last reported course and speed (see 5.3.7.13.2).	Graphic	01, 05, 10, 15, 20, 25, 27, 30, 35, 40	Locally derived information. This datum is not exchanged.
AJ	Speed Leader	An amplifier that depicts the speed and direction of movement of an object (see 5.3.7.13.3 and figure 21).	Graphic	01, 02, 30, 35	Land units and equipment use the Direction of Movement and Speed amplifiers for this information.
AK	Pairing Line	An amplifier that connects two objects and is updated dynamically as the positions of the two objects change (see 5.3.7.13.4 and figure 21).	Graphic	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
AL	Operational Condition	An amplifier that indicates operational condition or capacity.	Graphic	01, 05,10, 15, 20, 30, 35	Determined by SIDC position 7.
AM	Distance	An amplifier that displays a minimum, maximum, or a specific distance (range, radius, width, length, etc.), in meters or feet.	Alphanumeric - {3,9} [#] [X]	25	"#" is the value (range 0-99999) XXX is the distance unit. Note: there should be a space between the integer and the unit of measure values. Where more than one distance is specified the AM amplifier will be suffixed with a numeric entry, e.g. AM1, AM2.
AN	Azimuth	An amplifier that displays an angle measured from true north to any other line in degrees.	Alphanumeric - {7,8} [#####] [XXX]	25	For Degrees entries. XXX DGT, where XXX is degrees from 000-359 and DGT is referenced to TRUE North. For Mils entries. XXXX MGT, where XXXX is MILS from 0000-6399 and MGT is referenced to TRUE North. Where more than one angle is specified the AN amplifier will be suffixed with a numeric entry, e.g. AN1, AN2.
AO	Engagement Bar	An amplifier placed immediately atop the symbol. May denote: 1) local/remote status 2) engagement status 3) weapon type.	Composite list of values Alphanumeric - {6,10} A:BBB-CC	01, 05, 10, 30, 35	See 5.3.7.15.3 for explanation of engagement bar structure and codes. A - Type of Engagement BBB - Engagement Stage CC - Type of Weapon Assignment
AP	Target Number	An amplifier used in Fire Support operations to uniquely designate targets in accordance with STANAG 2934.	Alphanumeric - {6,6} [XX][####]	25	Two-part composite field. Where positions 1-2 are text, and positions 3-6 are numeric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
AP1	Target Number Extension	An amplifier used to identify a target number extension which is a sequentially assigned number identifying the individual elements in a target (MIL-STD-6017),	Numeric – {2,3} [-##]	25	Position 1 is a dash (-) and positions 2-3 are numbers, from 1 through 15. It is applicable only to the "Point or Single Target" symbol. It is conditional upon the presence of the Target Number amplifier and is visually displayed appended to the Target Number amplifier.
AQ	Guarded Unit	An amplifier used during ballistic missile defense. Some tracks are designated as guarded by a particular unit.	Alphanumeric - {6,6} [XX]	30	**Single value:** BG - Guarded Unit
AR	Special Designator	An amplifier that identifies special track designators.	Alphanumeric - {3,3}	10, 30, 35	**List of values:** NRT - Non-Real Time. SIG - Tactically Significant Tracks.
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	Alphanumeric - {3,3}	All	Determined by SIDC positions 28-30.
AV	Leadership	Identifies Leadership (ONLY IN DISMOUNTED INDIVIDUAL)	Graphic		Determined by SIDC positions 9-10.
AW	Headquarters Element	An amplifier that indicates what type of element of a headquarters is being represented, such as TOC, MAIN2.	Alphanumeric {0,8}	10	
AX	Installation Composition	Indicates the component type of the installation	Alphanumeric {3,7}	20	**List of Values:** DEVELOP - Development. RSRCH - Research. PROD - Production. SVC - Service. STORE - Storage. UTIL - Utility.
AY	Network Identifier	Indicates the network the entity has privileges within.	Alphanumeric		The color of the graphic shall be assignable by the operator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VI. Amplifier field definitions and maximum display lengths - Continued.

FIELD	FIELD TITLE	DESCRIPTION	Format - Min/Max Data Length and Display Values **# - Numeric, X - Alphanumeric**	Symbol Set	Remarks
BA	Offset Location	An amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.5, 5.3.12, and figure 15).	Graphic	10, 20, 25, 27, 40	Determined by individual system implementations.
BA2	Offset Location Amplifier Extension Line	An amplifier used to extend the offset indicator amplifier	Graphic	10, 20, 25, 27, 40	Determined by individual system implementations.

1. Mine Warfare symbols do not use amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.1 Headquarters staff amplifier. The headquarters staff amplifier is a line extending downward from the left side of the frame that identifies units, equipment and installations as headquarters. The headquarters staff amplifier shall extend a distance of one octagon height below the bottom of the frame. See figure 14.




FIGURE 14. Headquarters staff amplifier.

5.3.7.2 Echelon amplifier. The echelon amplifier provides a graphic representation of command level and is used to show the element echelon on units, cyberspace, control measures and planning symbols. Echelon amplifier codes are listed in table VII. The indicator is represented in field B as defined in table VI.

TABLE VII. Echelon amplifiers.

DESCRIPTION	AMPLIFIER
TEAM/CREW	Ø
SQUAD	•
SECTION	••
PLATOON/DETACHMENT	•••
COMPANY/BATTERY/TROOP	I
BATTALION/SQUADRON	I I
REGIMENT/GROUP	I I I
BRIGADE	X
DIVISION	X X
CORPS/MEF	X X X
ARMY	X X X X
ARMY GROUP/FRONT	X X X X X
REGION/THEATER	X X X X X X
COMMAND	+ +[1]

Note: 1. Command is a unit or units, an organization, or an area under the command of one individual. It does not correspond to any of the other echelons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

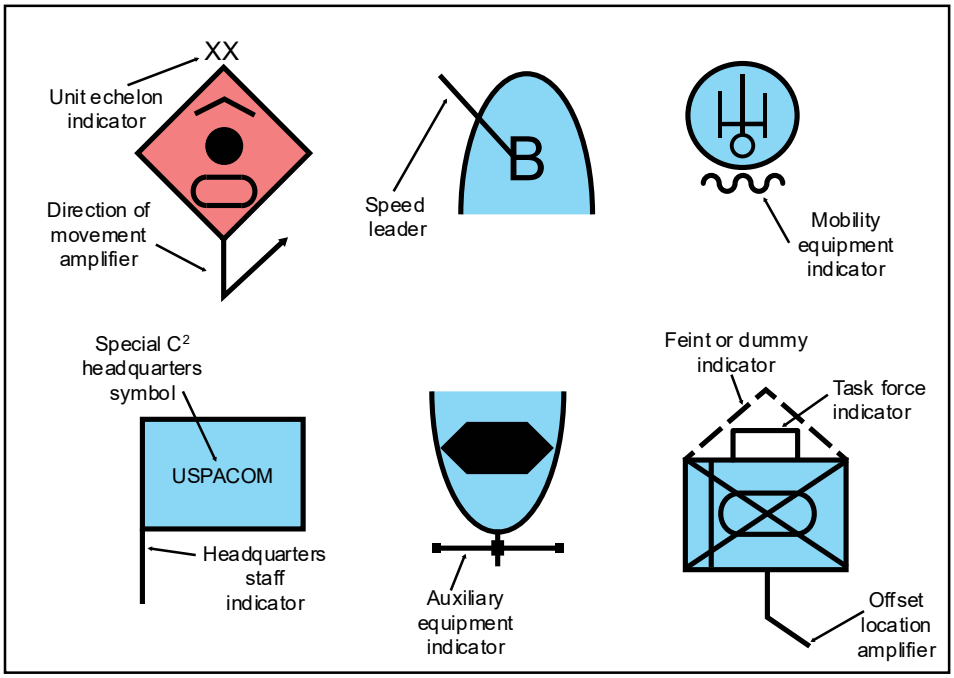


FIGURE 15. Graphic amplifiers for military symbols.

5.3.7.3 Task force amplifier. The task force amplifier is a bracket that identifies a unit or activities symbol as a task force. The amplifier is represented in field D as defined in table VI and is positioned as shown in figure 15.

5.3.7.4 Feint/decoy/dummy amplifier. The feint, decoy or dummy amplifier is a dashed inverted “V” that identifies offensive or defensive units, equipment and installations, signal intelligence, activities, control measures and planning symbols. It is intended to draw the enemy's attention away from the area of the main attack, and/or an imitation of a person, object or phenomenon, which is intended to deceive hostile surveillance or detection systems or mislead the adversary. The amplifier is represented in SIDC set A, position 8 "HQ/Task Force/Dummy when populated with “1” to specify the symbol is a “Feint/Decoy/Dummy”. This can apply to the SIDC for any symbol in MIL-STD-2525E as shown in figure 15 and is constructed and positioned as follows.

5.3.7.4.1 Construction. The feint, decoy, or dummy amplifier shall be rendered as an isosceles triangle (two equal length sides and two equal angles), where angles “A” and “C” (the two base angles) = 45°, angle “B” (the top angle) = 90°, and the length of line AB is equal to the length of line BC (see figure 16). Line AC (gray) in figure 16 shall not be rendered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

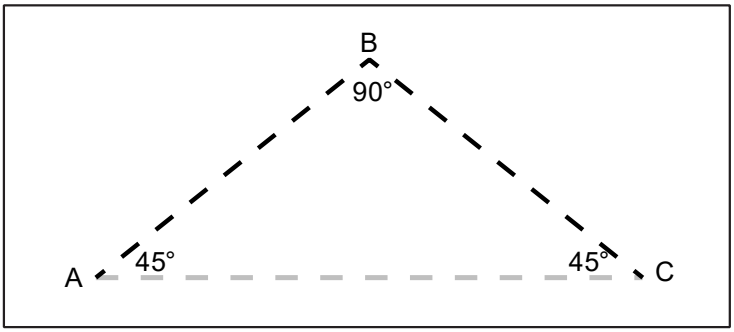


FIGURE 16. Feint, decoy, or dummy amplifier construction.

5.3.7.4.2 Line style. The line style of the feint, decoy, or dummy amplifier when used with control measures and planning symbols shall always be rendered as dashed lines, even when the status of the symbols is present, and the symbol line style is solid.

5.3.7.4.3 Position. On a geographically referenced system display, the feint, decoy, or dummy amplifier shall always be rendered on top of the symbol when the display is oriented north up. If the system display has the capability to rotate (i.e., a moving map display inside a vehicle in motion), the feint, decoy, or dummy amplifier shall rotate with the base symbol.

5.3.7.4.4 Position for icon-based symbols. See 5.3.2 that describes which types of icon-based symbols can be rendered unframed.

5.3.7.4.4.1 Unframed icon-based symbol position. The feint, decoy, or dummy amplifier when used with unframed icon-based symbols shall be positioned as shown below in figure 17. Point “A” shall be rendered 0.4L above the top edge of the bounding octagon and aligned with the left edge of the bounding octagon. Point “C” shall be rendered 0.4L above the top edge of the bounding octagon and aligned with the right edge of the bounding octagon. The spacing above the top of the bounding octagon will support any authorized amplifier(s) to be applied to the unframed icon-based symbol without overlapping the amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

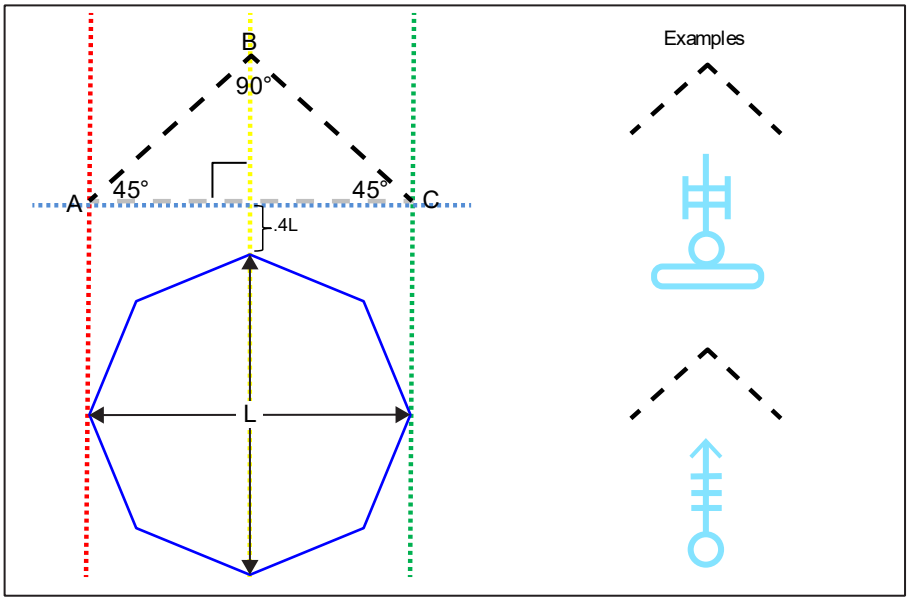


FIGURE 17. Position of the feint, decoy, or dummy amplifier for unframed icon-based symbols.

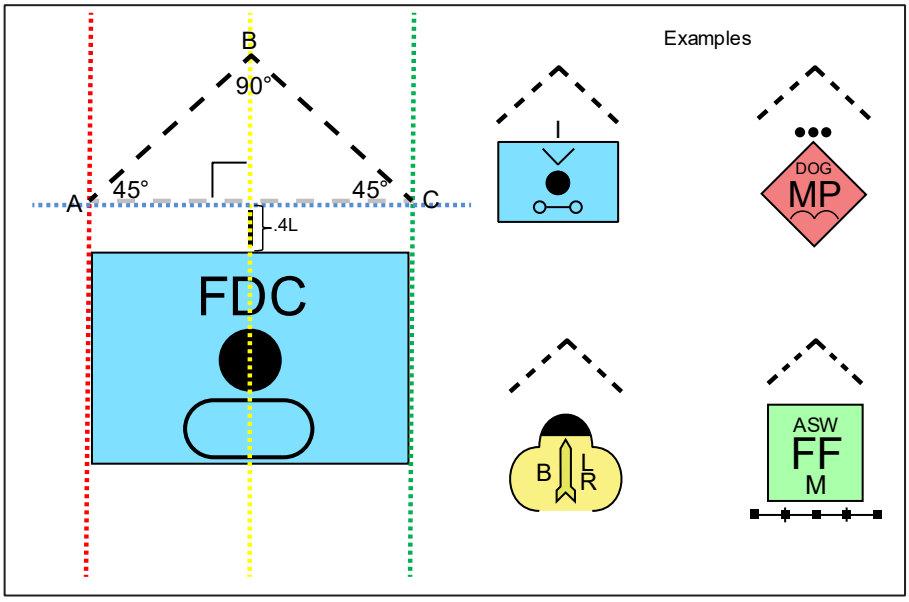


FIGURE 18. Position of the feint, decoy, or dummy amplifier for framed icon-based symbols.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.5 Offset/precise location amplifier (BA). The offset/precise location amplifier is used when placing an object away from its actual location. The offset/precise location amplifier is a system display de-cluttering technique (see 5.3.13); it is not exchanged between or shared among systems. See figure 19.

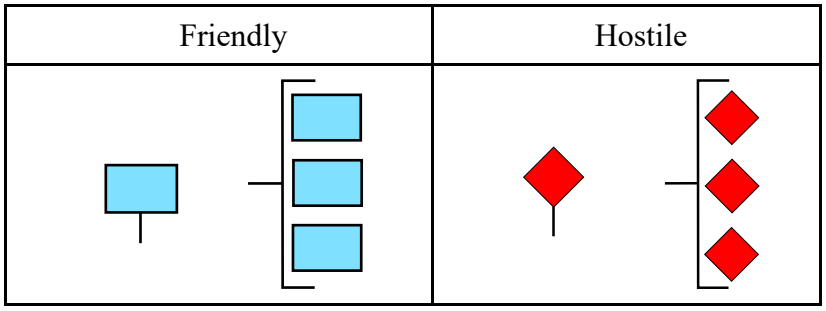


FIGURE 19. Non-headquarters offset location indicators.

5.3.7.5.1 Offset/precise location extension line amplifier (BA2). The Offset/precise location extension line amplifier is a line that extends at an angle from the end of the offset location indicator amplifier "Field BA" or from the headquarters location indicator "Field S" to the desired location point. This offset location extension line has no length or direction restriction. Figure 20 shows examples of how to use the offset location indicator extension line for friendly and hostile units that are not headquarters.

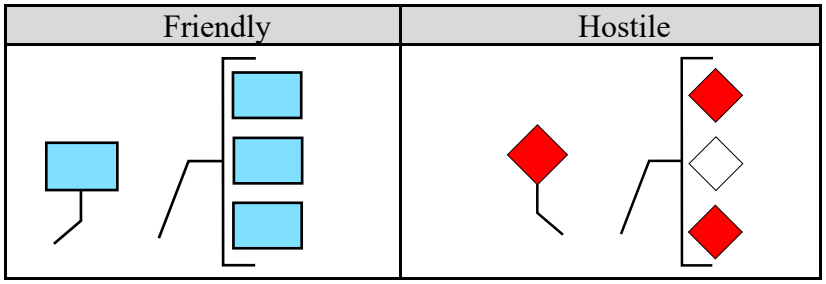


FIGURE 20. Non-headquarters offset location indicator with extension line.

5.3.7.6 Altitude/depth amplifier. This field may contain alternate value formats. Enter a description of the altitude/depth (X) using one of the following.

5.3.7.6.1 Altitude base reference point. Legal values are "GL" at ground level, "MSL" at mean sea level, "QNE" height above the standard datum, and "HAE" height above the referenced ellipsoid.

5.3.7.6.2 Relative altitude. The relative altitude is a composite field consisting of multiple parts: the numeric altitude, the altitude unit of measurement and the altitude unit of measurement indicator. Legal range of values for the numeric altitude are (minus) -99999 through 99999 in increments of 1. Legal values for altitude units of measure are "FT" feet, "M" meters, "KM" kilometers, and "SM" statute miles. Depth measurements are negative numeric altitude values. Legal values for the altitude unit of measurement indicator are "AGL" above ground level, "AMSL" above mean sea level, "QNE" height above the standard datum, "HAE"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

height above ellipsoid, “QFE” height is zero on field, and “QNH height above mean sea level. A space may be added between the values in the field to make it easier to read.

Examples: 1250 FT AGL
1000 FT AMSL
1524 M HAE
-3576FT AMSL

5.3.7.6.3 Flight level. By definition, flight level (FL) is, “Surfaces of constant atmospheric pressure which are related to a specific pressure datum, 1013.2 mb (29.92 in) and are separated by specific pressure intervals. (flight levels are expressed in three digits that represent hundreds of feet, e.g., flight level 250 represents a barometric altimeter indication of 25,000 feet and flight level 255 is an indication of 25,500 feet)”. The legal value for flight level amplifier is “FL.” A space may be added between the values in the field to make it easier to read. The legal value for context quantity is 000-999, in increments of one.

Example: FL 290

5.3.7.6.4 Multiple instances of altitude/depth amplifiers. When multiple instances of the “X” amplifier are present in a single instance of a symbol or graphic (ex., Minimum Altitude “X,” Maximum Altitude “X1”), for display purposes, the fields may be separated by a hyphen “-,” or a space, hyphen and space “ - .”

Examples: 500-FT AGL – 1250-FT AGL
25-FT AMSL – 150-FT AMSL
FL 250 – FL 290
MSL – 35760-FT AMSL

5.3.7.7 Speed amplifier. The speed amplifier is used to display a unit or equipment velocity. The amplifier has a specific format as follows.

The first part of this eight-character (maximum length) amplifier shall be a numeric value (quantity) in the range 0 through 99999 or any combination of four or fewer digits and a significant decimal point. There is a 5-character maximum for the numeric portion of this amplifier. The allowable entries for the numeric portion of this amplifier are as follows. The legal entries are a decimal point and numbers. The legal range of values for the numeric portion are zero (0) through 99999. The minimum length of this portion of the amplifier is 1; the maximum is 5. The minimum decimal place is zero (0); the maximum decimal place is four (4).

The second part of this eight-character (maximum length) amplifier shall be the speed/velocity unit of measure. Legal entries for this portion of the amplifier shall be “KPH” (kilometers per hour), “MPS” (meters per second), “KTS” (knots per hour), or “MPH” (miles per hour).

Examples: 220KPH = 220 kilometers per hour
974.5MPS = 974.5 meters per second
18.75KTS = 18.75 knots per hour
5MPH = 5 miles per hour

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.











5.3.7.8 Date-time group. Date-time group (DTG) is defined as the date and time expressed in an alphanumeric combination. The alphanumeric combination used is day-time-time zone-month-year. The alphanumeric combination can be displayed in a number of ways. In its longest form, sixteen characters, it is composed of eight digits (first pair of digits denotes the date, second pair denotes the hours, third pair denotes the minutes, and fourth pair denotes the seconds) followed by the time zone suffix, followed by a three-letter month abbreviation and four digits for the year: DDHHMMSSZMONYYYY. It can also be expressed in shorter forms by removing characters, such as DDHHMMZMONYY. On order (O/O) is a valid substitute for DTG.

5.3.7.9 Direction of movement amplifier. The direction of movement amplifier is an arrow or staff identifying the direction of movement or intended movement of an object. For land symbols, the amplifier is an angled arrow extending downward from the bottom center of the frame or icon and pointing in the direction of movement. For all other symbols, the amplifier is an arrow extending from the center of the frame or icon and pointing in the direction of movement (see figure 15).

5.3.7.10 Mobility amplifier. The mobility amplifier, which is only used for equipment, depicts the mobility feature of an object, as shown in table VIII. This amplifier identifies mobility other than that intrinsic to the equipment itself. For example, the symbol for a self-propelled howitzer moving by train would include a railway mobility amplifier, while the symbol for a self-propelled howitzer, a tank or other tracked vehicle would not have a mobility amplifier. The amplifier is represented in field R as defined in table VI and is positioned as shown in figure 15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE VIII. Equipment mobility amplifiers.

DESCRIPTION	MOBILITY SYMBOL	UNFRAMED	UNKNOWN	FRIEND	NEUTRAL	HOSTILE
WHEELED (LIMITED CROSS-COUNTRY)						
WHEELED (CROSS-COUNTRY)						
TRACKED						
WHEELED AND TRACKED COMBINATION						
TOWED						
RAILWAY						
OVER-SNOW (PRIME MOVER)						
SLED						
PACK ANIMALS						
BARGE						
AMPHIBIOUS						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.7.11 Auxiliary equipment amplifier. The auxiliary equipment amplifier, which is only used for towed equipment, depicts the mobility feature of an array, as shown in table IX. The amplifier is represented in field AG as defined in table VI and is positioned as shown in figure 15.

TABLE IX. Auxiliary equipment amplifiers.

DESCRIPTION	MOBILITY SYMBOL	UNFRAMED	UNKNOWN	FRIEND	NEUTRAL	HOSTILE
TOWED SONAR ARRAY (SHORT)						
TOWED SONAR ARRAY (LONG))						

5.3.7.12 Text amplifiers. Table VI defines the specific content, length and type of each text amplifier . Not all text amplifiers are applicable to all symbols. However, when any such amplifier is displayed, it shall be defined in accordance with the contents of table VI and positioned in accordance with individual appendices. Air/space and sea track numbers are included in field T. Staff comments and additional information are contained in fields G and H, with the content of these fields being implementation specific so long as the maximum number of characters in each field is not exceeded. Although text amplifiers are normally displayed around the symbol, the special C2 headquarters amplifier (field AA as defined in table VI) is contained inside the frame, as seen in figure 14.

5.3.7.13 Dynamic graphic amplifiers. A dynamic amplifier is a line or area graphic whose size and placement are based on the attributes of the object represented by the symbol and can change as these attributes and the scale of the background change. An example of each dynamic graphic amplifier is shown in figure 21. These examples are notional; the size and placement of each amplifier will vary based on the attributes of the object.

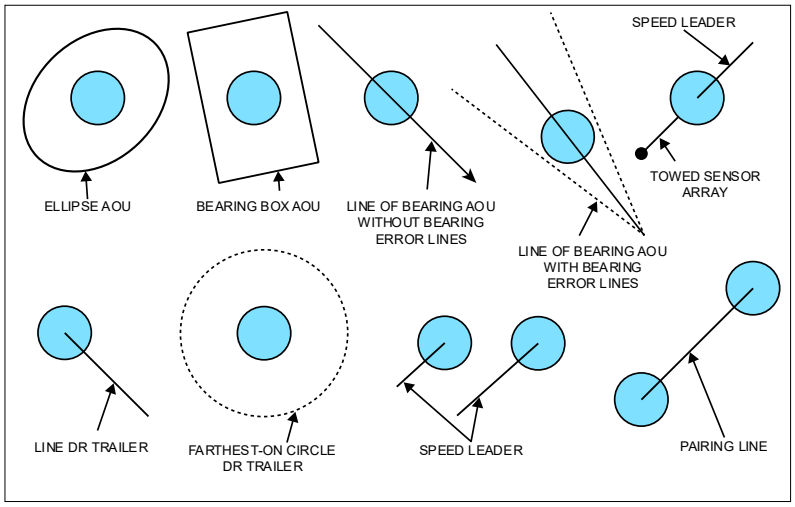


FIGURE 21. Dynamic graphic amplifiers for icon-based symbols.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Dynamic graphic amplifiers may be color-coded based on the attributes of the symbol. In cases such as ballistic missile target status as indicated in the Engagement/Target Bar (field AO), the symbol's track history, projected trajectory (similar to dead reckoning), threat fan and its projected impact ellipse should reflect target status of the ballistic missile. Likewise, if threat is denoted by color via the operational condition/status bar (field AL), associated symbols amplifier graphics should reflect the color status indicated in the operational condition/status field. Figure 22 illustrates an example of dynamic amplifiers being color coded.

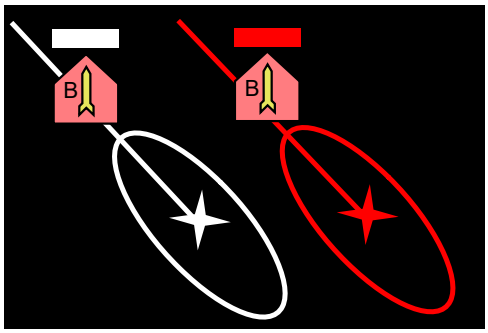


FIGURE 22. Color coded dynamic amplifiers.

5.3.7.13.1 Area of uncertainty amplifier. The area of uncertainty (AOU) amplifier displays the area where an object is most likely to be located, based on the object's last report and the reporting accuracy of the sensor that detected the object. The AOU amplifier can be displayed as an ellipse, a bearing box, or a line of bearing, depending on the report received for the object.

5.3.7.13.1.1 Ellipse AOU amplifier. The ellipse AOU amplifier is a rotated ellipse whose center is the last reported position for the object. The ellipse is shown as a solid line whose draw parameters are based on the attributes of the sensor that detected the object. The symbol for the object is displayed at the center of the ellipse.

5.3.7.13.1.2 Bearing box AOU amplifier. The bearing box AOU amplifier is a rotated rectangle whose center is the last reported position for the object. The rectangle is shown as a solid line whose draw parameters are based on the attributes of the sensor that detected the object. The symbol for the object is displayed at the center of the box.

5.3.7.13.1.3 Line of bearing AOU amplifier. The line of bearing AOU amplifier is a solid line whose rotation represents the bearing of the object and whose length is determined by its range estimate. The amplifier has a single bearing "center" line and may include bearing error "V" lines. The bearing error determines the placement of the "V" lines and is the angle from the bearing line to one of the bearing error lines. The bearing error lines are dotted and symmetric on either side of the bearing line. The length of the bearing error lines is equal to the bearing length.

5.3.7.13.2 Dead reckoning trailer amplifier. An object can be displayed at its last reported position, or it can be displayed at its dead reckoned position. Dead reckoning (DR) uses the course and speed of an object from the last report and calculates where the object should be at present. The object is then plotted where it should be at the present time, assuming the course

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

and speed are unchanged. The DR trailer amplifier can be displayed as a line or circle, depending on the report received for the object. Because DR calculates where the object should be at present, the status of the symbol for the object is shown as “present,” rather than “planned.”

5.3.7.13.2.1 Line DR trailer amplifier. The line DR trailer amplifier is a dotted line that extends from the last reported position for the object to its dead reckoned position. The dotted line is a series of uniformly sized and shaped dots, with the symbol for the object displayed at its dead reckoned position.

5.3.7.13.2.2 Farthest-on circle DR trailer amplifier. The farthest-on circle DR trailer amplifier is a dotted circle indicating the furthest an object could be after a given time traveling at its top speed in any direction. The center of the circle is the last reported position for the object, and the radius is the maximum distance the object could travel based on its last reported position and speed; the symbol for the object is displayed at the center of the circle.

5.3.7.13.3 Speed leader amplifier. The speed leader amplifier is a line extending from the center of the frame or icon and pointing in the direction of movement; the length of the line is based on a combination of actual speed and object type. For example, the length of the speed leader for a submarine might be 1/4 inch if its speed is less than 15 knots, 1/2 inch if its speed is between 15 and 30 knots and 3/4 inch if its speed is more than 30 knots, while the length of the speed leader for an aircraft might be 1/4 inch if its speed is less than 300 knots, 1/2 inch if its speed is between 300 and 600 knots and 3/4 inch if its speed is more than 600 knots. The speed leader represents both speed and direction of movement information in a single amplifier; by contrast, the static direction of movement amplifier is a fixed length and identifies only the direction of movement of the object.

5.3.7.13.4 Pairing line amplifier. The pairing line amplifier is a line that connects two objects and is updated dynamically as the positions of the two objects change. For example, a pairing line might connect an active missile to the associated hostile aircraft. A pairing line is drawn from the center of the frame or icon for the first object to the center of the frame or icon for the second object. The color and style (e.g., solid, dotted) of the line can vary based on the specific context in which the amplifier is used.

5.3.7.13.5 Dynamic towed sensor array amplifier. The dynamic towed sensor array amplifier is a line extending from the center of a symbol to the center of towed acoustic array. The length of the line is based upon the distance between the stern of the towing ship and the center of the towed acoustic array. The orientation of the towed sensor array amplifier shall be 180 degrees from the speed leader of the object. A solid circle, representing the center of the acoustic array, shall be at the terminus of the towed sensor array amplifier.

5.3.7.14 Operational condition amplifier. The operational condition amplifier provides a graphic representation of an entity’s (equipment or installation) operational condition. Operational condition amplifiers are shown in table X and defined in the appendix for each symbology set. An alternative color representation is shown in table XI.







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE X. Operational condition amplifiers for icon-based symbols.

DIMENSION / OPER. CONDITION	AIR/SPACE	SURFACE					SEA SUBSURFACE	CYBERSPACE (Virtual)
		LAND			DISMOUNTED INDIVIDUAL	SEA SURFACE		
		UNITS	EQUIPMENT	INSTALLATIONS				
FULLY CAPABLE								
DAMAGED/ RENDERED INEFFECTIVE[1]								
DESTROYED								

Notes: 1. The “Rendered Ineffective” operational condition amplifier shall be used when equipment capable of inflicting injury and/or death (IEDs or mines) is known to have been defused or rendered inoperable while under the control of friendly forces. The “Damaged” operational condition amplifier shall be used where “Rendered Ineffective” does not apply.

TABLE XI. Alternate operational condition amplifiers for icon-based symbols.

DIMENSION / OPER. CONDITION	AIR/SPACE	SURFACE					SEA SUBSURFACE	CYBERSPACE (Virtual)
		LAND			DIMOUNTED INDIVIDUAL	SEA SURFACE		
		UNITS	EQUIPMENT	INSTALLATIONS				
FULLY CAPABLE								
DAMAGED/ RENDERED INEFFECTIVE[1]								
DESTROYED								
FULL TO CAPACITY[2]								

Notes: 1. The “Rendered Ineffective” operational condition amplifier shall be used when equipment capable of inflicting injury and/or death (IEDs or mines) is known to have been defused or rendered inoperable while under the control of friendly forces. The “Damaged” operational condition amplifier shall be used where “Rendered Ineffective” does not apply.

2. Associated with a symbolized object where its capacity can be measured and the status of that capacity is relevant.

5.3.7.15 Engagement amplifier bar. The engagement amplifier bar may be used to designate engagements and/or to indicate targets. Both may be done in conjunction where depicted targets contain engagement information.

5.3.7.15.1 Engagement designation using the engagement amplifier bar. Engagement bars are positioned immediately atop the hostile target and its assigned friendly track. Example depictions of engagement bars are illustrated in figure 23 and figure 24.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

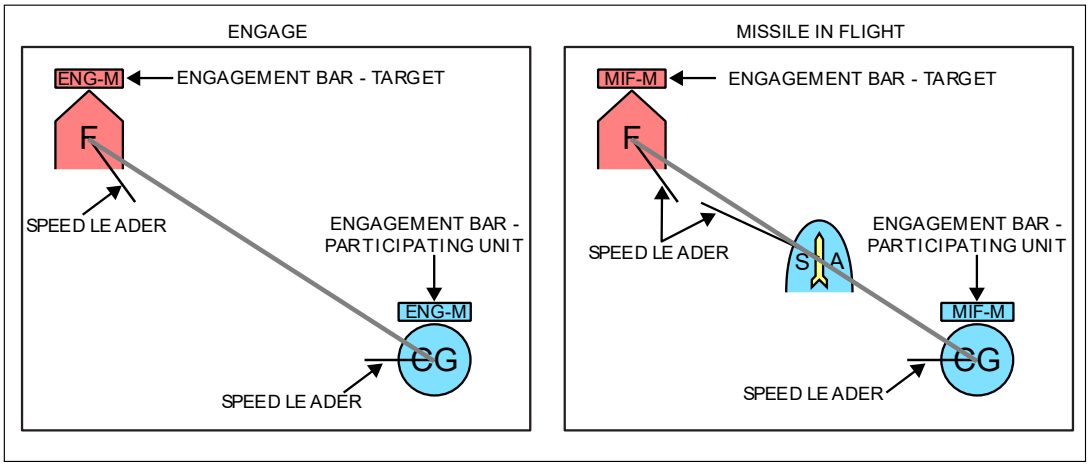


FIGURE 23. Example local engagement scenarios: engage (left), missile in flight (right).

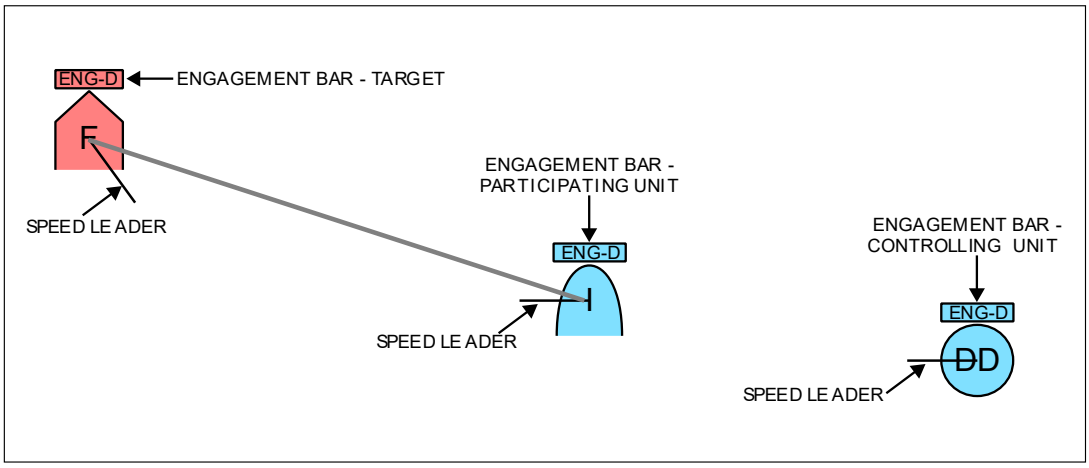


FIGURE 24. Example engagement scenario: participating units.

The engagement bar may contain information on 1) remote/local engagement; 2) stage of the engagement (i.e., assign/cover, engage, hold fire, cease fire, cease engage, break engagement, missile in flight); and 3) type of weapon assignment (i.e., missile, gun, torpedo). The color of the engagement bar should be identical to its symbol's standard identity. Therefore, engagement bars for a hostile target and a friendly participating unit would have red and blue engagement bars, respectively (see figure 25 and figure 26). The colors of the engagement bars should have the same RGB value as its respective symbol. All engagement bars should have a black or white frame based on providing optimal contrast between the colored amplifier bar and the map background.

5.3.7.15.2 Target designation using the engagement amplifier bar. If the engagement amplifier bar is used to designate targets, non-targets or expired targets, a different coloring schema shall be used. Hostile tracks which are deemed targets shall have a red bar (RGB: 255, 0, 0) to indicate target. For hostile tracks deemed to be non-targets, white (RGB: 255, 255, 255) should be used to indicate non-target. Finally hostile tracks which have

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

expired shall be colored orange (RGB: 255, 120, 0). Figure 25 depicts the three target designations.

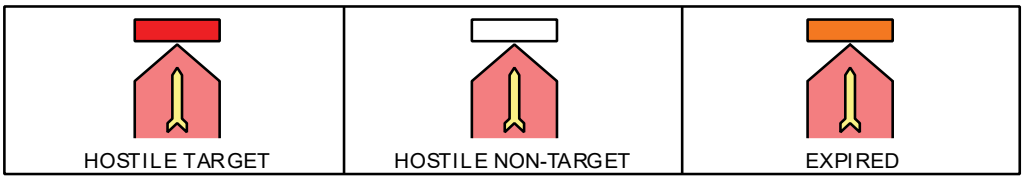


FIGURE 25. Engagement amplifier bar colors for target designation.

5.3.7.15.2.1 For hostile targets. If engagement text is incorporated, either white (RGB: 255, 255, 255) or black (RGB: 0, 0, 0) may be used to denote engagement status. Otherwise, for non-targets and expired tracks, engagement status within the engagement amplifier bars shall remain black (see figure 26).

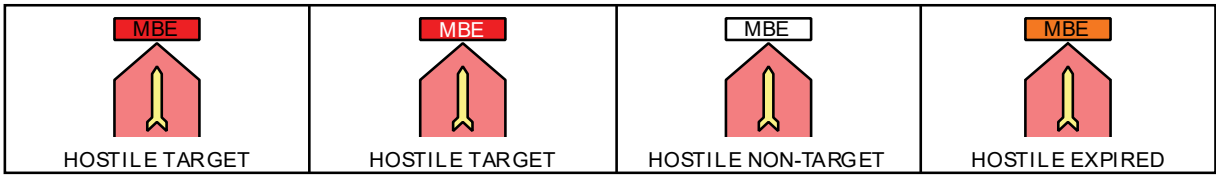


FIGURE 26. Engagement amplifier bar text colors for target designation.

5.3.7.15.3 Engagement amplifier bar structure. The engagement amplifier shall be arranged as follows: A:BBB-CC, where A (1 character) denotes a local versus remote engagement, BBB (up to 3 characters) denotes engagement state and CC (up to 2 characters) denotes weapon deployment/asset control.

5.3.7.15.3.1 Remote and local engagements. Remote and local engagements may be identified in the engagement amplifier (part A of A:BBB-CC). A remote engagement is defined as an engagement assigned outside of own ship control. A local engagement is defined as an engagement assigned to own ship. Local engagements shall have no letter assignment in the A:BBB-CC engagement bar, whereas remote engagements shall be denoted as “R” in the engagement bar. In the case of multiple engagements, there may be a mixture of both local and remote engagements. In such cases, “B” shall be denoted to indicate both local and remote engagements and shall be used in conjunction with the multiple engagements amplifier (MLT).

5.3.7.15.3.2 Engagement stage. Engagement stage may be identified by up to a three-character code (part BBB of A:BBB-CC). Typical engagement stages to depict include assign/cover, engage and missile(s) in flight. Other engagement events such as hold fire, cease fire, cease engage, break engagement, terminate engagement, management by exception, management by exception less than threshold and others may be depicted in the engagement amplifier. In the case of multiple engagements where no one specific engagement is highlighted, “MLT” may be used to indicate multiple engagements. In conjunction with the MLT designation, the number of engagements shall be listed in the subsequent CC field (see 5.3.7.15.3.3). Table XII depicts engagement stage codes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XII. Engagement[1] stage codes.

ENGAGEMENT STAGE	CODE
ASSIGN/COVER	ASN
ENGAGE	ENG
MISSILE IN FLIGHT	MIF
CEASE FIRE	CF
CEASE ENGAGE	CE
HOLD FIRE	HF
TERMINATE ENGAGEMENT	TE
BREAK ENGAGEMENT	BE
MANAGEMENT BY EXCEPTION (MBE)	MBE
MBE LESS THAN THRESHOLD	M<T
MULTIPLE ENGAGEMENTS[2]	MLT

Notes: 1. The term "Engagement" as used in 5.3.7.15.3.2 denotes both air-to-air and air-to-ground/air-to-surface activities.
2. Number of engagements shall be represented in CC field (see 5.3.7.15.3.3).

5.3.7.15.3.3 Weapons assignment or deployment. Weapons assignment or deployment may also be presented in the engagement amplifier (part CC of A:BBB-CC). Either deployed weapons such as missiles, guns and torpedoes or controlled assets such as unmanned systems, interceptor aircraft and attack aircraft may have representation in the engagement bar. In the case where multiple engagements are represented within a single engagement amplifier bar, the number of engagements starting from "02" shall be used in the CC field. Table XIII depicts weapon and asset codes.

TABLE XIII. Weapon and asset codes.

WEAPON/ASSET	CODE
MISSILE	M
BALLISTIC MISSILE	BM
CRUISE MISSILE	CM
GUN	GN
TORPEDO	T
ATTACK AIRCRAFT	A
COMBAT AIR PATROL (DEFENSIVE COUNTER AIR)	C
DEFENSIVE COUNTER AIR (COMBAT AIR PATROL)	D
UNDERSEA WARFARE (USW)/ ANTISUBMARINE WARFARE (ASW) ENGAGEMENT	UW
MINE WARFARE (MIW) ENGAGEMENT	MW
SURFACE WARFARE (SUW) ENGAGEMENT	SW
ELECTROMAGNETIC ATTACK	EA
ELECTRONIC DEFENSE	ED
UNMANNED VEHICLE	UV
CLOSE-IN WEAPON SYSTEM	CW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XIII. Weapon and asset codes - Continued.

WEAPON/ASSET	CODE
LAMPS	L3
VERTICAL LAUNCH ASROC[1]	VA
NUMBER OF ENGAGEMENTS[2]	## (02-99)

Notes: 1. Some non-US ships still use non-vertical launch ASROC
2. Shall only be used in conjunction with multiple engagements. Valid numbers are 02-99.

5.3.8 Manually-generated tracks. Manually-generated tracks are those symbols which have not been received through messaging systems, such as Link 16, but rather have been created locally for display. Manually-generated (or manual) tracks are denoted by the “MAN” icon placed within the symbol. Manual tracks can be created across all standard identities and dimensions by adding the “MAN” icon to the center of the frame. In addition, manual tracks can be created for tracks with a known standard identity but unknown dimension by adding the “MAN” icon under the “?” icon. See figure 27 for examples of manual tracks. Manual tracks are only local symbols and not transmitted.

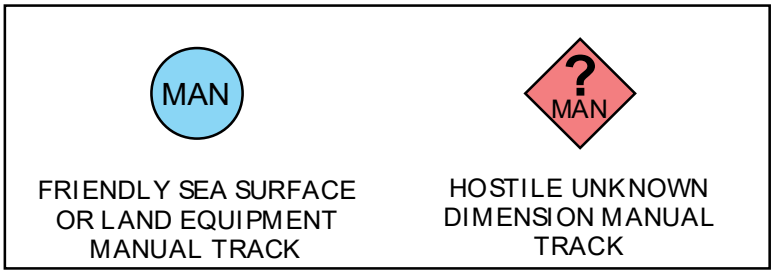


FIGURE 27. Manually-generated tracks.

5.3.9 Dismounted individual leadership. This leadership amplifier is used with dismounted individual symbols only. The leadership amplifier is an inverted "V" placed over the symbol and extending the width of the frame. See figure 28.

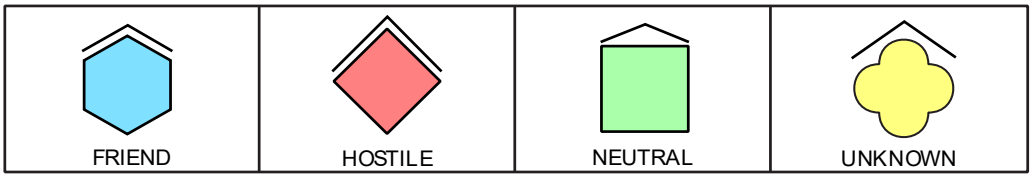


FIGURE 28. Dismounted individual leadership amplifier examples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.10 Composition of icon-based symbols. The purpose of icon, modifier and amplifier placement is to standardize the location of information that graphically describes a unit, equipment, or installation and provides additional information on capability, status and location. Figure 29 shows the composition and placement of a frame, fill, icon, modifiers and amplifiers to form a hostile land unit symbol. The placement of icons, modifiers and amplifiers is the same regardless of frame shape or standard identity.

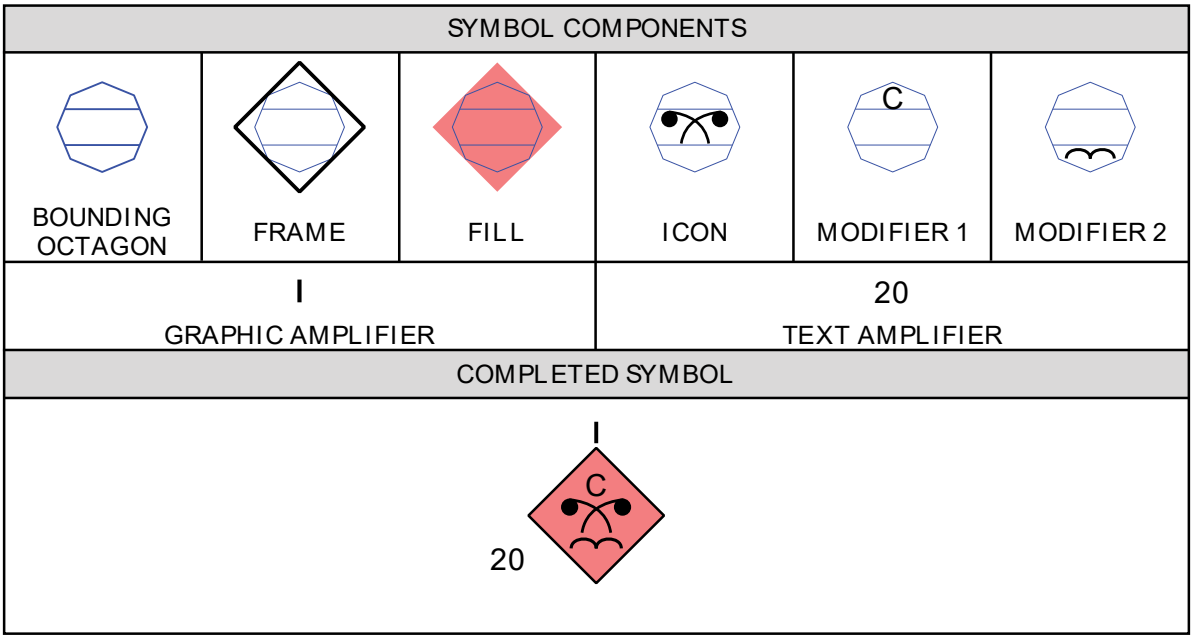



FIGURE 29. Composition of an icon-based symbol.

5.3.10.1 Symbol display hierarchy. C2 systems differ in their operational requirements concerning the amount of information about an object to be displayed. As a result, this document standardizes those symbology elements required to achieve interoperability in information presentation and allows flexibility in the symbol components that are displayed to the warfighter. Display options range from complex, such as a symbol displaying a frame, fill, icon and modifiers, to primitive, such as a symbol rendered as a dot that denotes the presence of an object at a specific location. Table XIV provides examples of display options that can be used in color and monochrome displays and can be either hand-drawn or computer generated. The examples in the table depict some of the display options for the two symbols. Based on operational requirements, systems may be implemented with a fixed set of display options or with the ability to allow warfighters to select one or more display options. If the amplifying information provided by internal icons and modifiers is not required by the warfighter, the symbols may be displayed with frame or frame and fill only, omitting the icons and modifiers. Any display options in table XIV are compliant with this standard. If a system is implemented with multiple display options, the warfighter may be allowed to select a single option for rendering all symbols or to select different options based on the standard identity or dimension of the object and the amount of information required. For example, the warfighter may choose to display minimal information about friendly objects (displaying these symbols as dots) and maximal information about potential threats (displaying these symbols with frame, fill, icon and modifiers).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XIV. Symbol display options.

EXAMPLES		DISPLAY OPTION DESCRIPTIONS
CARRIER	FERRY	
		Frame: ON (black or white depending on background) Fill: ON (use default color indicating standard identity) Icon: ON (black or white) Modifiers: ON (civilian sea surface symbols do not permit modifiers) Note: The first column example is a Military Combatant, Carrier with modifiers for Helicopter Equipped and Nuclear Powered. The second column example is a Civilian, Ferry Merchant Ship.
		Frame: ON (black or white depending on background) Fill: OFF Icon: ON (black or white) Modifiers: ON
		Frame: ON (use default color indicating standard identity) Fill: OFF Icon: ON (use default color indicating standard identity) Modifiers: ON
N/A		Frame: OFF Fill: ON Icon: ON (use default color indicating standard identity) Modifiers: N/A (civilian sea surface symbols do not permit modifiers) Note: Normally only land equipment and civilian sea surface symbols can be displayed without a frame. For civilian, white-filled icons, the white-fill should be changed to the color indicating its standard identity.
		Frame: ON (black or white depending on background) Fill: ON (use default color indicating standard identity) Icon: OFF Modifiers: OFF Note: The examples show the dimension level display of Carrier and Ferry. The Carrier and Ferry icons, including their parent icons, are not displayed.
		Frame: ON Fill: ON Icon: ON Modifiers: OFF Note: The examples show the entity type level display of Carrier and Ferry (Merchant Ship).
		Frame: OFF Fill: ON (use default color indicating standard identity) Icon: OFF Modifiers: OFF
		Frame: OFF Fill: OFF Icon: OFF Modifiers: OFF Note: Use only to indicate the location of a symbol.

Note: This table shows frame and fill color when displayed on a color monitor.

5.3.11 Symbol size. The relative size of each symbol and symbol component shall be consistent within a given implementation (see "Alphanumeric character and symbol sizes of MIL-STD-1472 for guidance"). Each of these sizes shall be related to length L as described in 5.3.1. The minimum diameter of a symbol displayed as a dot should be 0.15L.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

5.3.12 Line width. Because the symbol frame indicates both the standard identity and dimension of an object, it is critical that line width is sufficient to ensure frame legibility and discriminability at normal viewing distance (see "Symbol line width of MIL-STD-1472 for guidance"). The optimum line width may differ depending on frame size and be affected by whether the frame is filled or unfilled and displayed in color or black/white. Usability testing should be performed to identify the optimum rendering for a given implementation.

5.3.13 Plotting. The plotting of most single point symbols shall be based on the geometric center of the symbol. The geometric center indicates the general vicinity of the center of mass of an object. Single point symbols that do not use their geometric center for plotting shall be positioned based on their anchor point. If an offset/precise location amplifier is displayed with a symbol, the endpoint of the amplifier shall show the object's location. If a group of symbols are displayed at one location, the group may be enclosed with a bracket and the location of that group identified with an offset/precise location amplifier . An offset/precise location amplifier is one option for reducing clutter when symbols overlap or are collocated. Other options for reducing visual clutter include (1) repositioning or turning off labels so that they are not obscured by other objects, with a line connecting each label to its object and/or (2) supporting variable coding of objects (e.g., high-interest objects are rendered as symbols and low-interest objects as dots). The choice of display options for addressing clutter is considered to be user specific. The positional accuracy of symbology plotting is also considered user specific.

5.3.14 Orientation. The frame and icon in framed tactical symbols shall be displayed in the orientation shown in the appendices. Equipment in the land dimension can be rotated to face the direction of movement only when the symbol is unframed. Control measure symbols shall be displayed in the orientation shown in appendix L. Point graphics that are positioned based on their anchor point can be rotated 90 degrees when necessary to minimize interference with other symbology or terrain features.

5.4 Compliance criteria. If common joint military symbology is implemented to visually display or present symbology, the implementation shall comply with the provisions of this standard. To be considered MIL-STD-2525 compliant, implementations must satisfy criteria related to the appearance of tactical symbols and graphics, the assembling and parsing of SIDC and the interpretation and generation of symbol representations. Each category of compliance criteria is described below:

5.4.1 Appearance of tactical symbols. The following compliance criteria apply to the appearance of tactical symbols:

a. The frame shape in a tactical symbol indicates the standard identity, dimension and status as defined in this MIL-STD.

b. If color is used in a tactical symbol, it indicates the standard identity as defined in this MIL-STD.

c. The icon in a tactical symbol is displayed as framed or unframed in accordance with framing requirements defined in this MIL-STD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

d. The icons in this MIL-STD are used to provide role or mission information whenever the objects for which icons are provided are displayed in a tactical symbol.

e. If text and/or graphic amplifiers are included in a tactical symbol, they conform to the field definitions and display lengths defined in this MIL-STD.

f. Tactical symbol components and modifiers are sized and positioned as defined in this MIL-STD.

g. The rendering of tactical symbols and modifiers conform to the display options defined in table XIV.

h. Any temporary features added to a tactical symbol conform to the display rules in this MIL-STD.

5.4.2 Assembling and parsing of SIDC. The following compliance criteria apply to the assembling and parsing of SIDC:

a. An implementation can assemble the correct tactical symbol or graphic and its modifier(s) from a SIDC.

b. An implementation can generate the SIDC that will produce the correct tactical symbol or graphic when transmitted to another MIL-STD-2525 compliant system.

5.5 Color. It is important that implementations maximize the contrast between symbology and the display background in order to provide optimum discriminability.

a. Implementers should include sufficient usability testing to ensure effective operator performance when selecting colors to render the symbology. Color luminance (or brightness) may need to vary depending on the display option(s) selected for symbols. For example, different shades of red may be needed for both filled and unfilled symbols to heighten its contrast upon its map background or display.

b. For filled symbols, this contrast can be provided by using black (RGB: 0, 0, 0) for the frame, icon, modifiers and amplifiers when filled symbols are displayed on a light background and using white (RGB: 255, 255, 255) for these elements when filled symbols are displayed on a dark background. Implementers should select specific values (e.g., in CIE, RGB, or UV terms) for the default symbol colors based on considerations such as operational requirements, hardware configuration, display background and viewing conditions (e.g., ambient lighting). Table XV lists a range of acceptable symbol colors that have been empirically validated across a variety of viewing backgrounds. Table XV lists the symbol colors in terms of RGB and their corresponding hue, saturation and luminance (HSL) values. Three sample color sets are displayed in table XV. The colors for each standard identity shall vary only in terms of their luminance values (luminance values are **in bold** in table XV). Implementers may use any of the example color sets or may choose an alternative set whose luminance values fall within the range of the light and dark color sets. Filled symbols may be depicted as translucent. In such cases, opacity should be set at 35% (65% transparency).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

c. For unfilled symbols, implementers should use the default symbol colors in table XVI unless considerations such as operational requirements, hardware configuration, display background and viewing conditions (e.g., ambient lighting) necessitate an alternate symbol color set. In the case of an alternative symbol color set, implementers should select specific values (e.g., in Commission Internationale de I'Elcairage (CIE), Red, Green, Blue (RGB), or Ultraviolet (UV) terms) for unfilled symbols based on sufficient usability testing.

d. For control measures and planning symbols, this contrast can be provided by using black (RGB: 0, 0, 0) for the graphic when it is displayed on a light background and by using white (RGB: 255, 255, 255) when it is displayed on a dark background. If color is used in a graphic, implementers should select specific values for the default colors in table XVI based on the same considerations as for icon-based symbols.

TABLE XV. Color range values for filled symbols.

IDENTITY	COLOR	COMPUTER GENERATED		
		DARK	MEDIUM	LIGHT
UNKNOWN, PENDING	YELLOW	RGB (225, 220, 0) HSL (42, 255, **110**)	RGB (255, 255, 0) HSL (42, 255, **128**)	RGB (255, 255, 128) HSL (42, 255, **192**)
FRIEND, ASSUMED FRIEND	BLUE	RGB (0, 107, 140) HSL (138, 255, **70**)	RGB (0, 168, 220) HSL (138, 255, **110**)	RGB (128, 225, 255) HSL (138, 255, **192**)
NEUTRAL	GREEN	RGB (0, 160, 0) HSL (85, 355, **80**)	RGB (0, 226, 0) HSL (85, 255, **113**)	RGB (170, 255, 170) HSL (85, 255, **213**)
SUSPECT	ORANGE	RGB (255, 188, 1) HSL (31, 255, **128**)	RGB (255, 217, 107) HSL (31,255, **181**)	RGB (255, 229, 153) HSL (31, 255, **204**)
HOSTILE	RED	RGB (200, 0, 0) HSL (0, 255, **100**)	RGB (255, 48, 49) HSL (0, 255, **152**)	RGB (255, 128, 128) HSL (0, 255, **192**)

TABLE XVI. Default colors for unfilled symbols.

DESCRIPTION	HAND DRAWN	COMPUTER GENERATED	
		ICON (RGB VALUE)	ICON COLOR
UNKNOWN, PENDING	YELLOW	YELLOW (255, 255, 0)	
FRIEND, ASSUMED FRIEND	BLUE	CYAN (0, 255, 255)	
NEUTRAL	GREEN	NEON GREEN (0, 255, 0)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XVI. Default colors for unfilled symbols Continued.

DESCRIPTION	HAND DRAWN	COMPUTER GENERATED	
		ICON (RGB VALUE)	ICON COLOR
SUSPECT	ORANGE	ORANGE (255, 188, 1)	
HOSTILE	RED	RED (255, 0, 0)	

6 NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. MIL-STD-2525 is designed to enhance DOD's joint interoperability by providing sets of C2 symbols, a coding scheme for symbol automation and information transfer, and technical details to support symbology for C2 systems.

6.2 Subject term (key word) listing.

Activities
Amplifier
Civil support
Command and control
Control measures
Emergency management
Graphic
Icon
Interoperability
Meteorological
Modifier
Oceanographic
Operations
Planning Symbols
Signals intelligence
Symbol
Symbol identification code
Warfighter

6.3 International standardization agreement implementation. This standard implements NATO STANAG 2019/APP-06, NATO Joint Military Symbology. When changes to, revision, or cancellation of this standard are proposed, the preparing activity must coordinate the action with the US National Point of Contact for the international standardization agreement as identified in the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.5 Symbology change proposal incorporation.

6.5.1 Table XVII contains the symbology change proposals (SCPs) that have been incorporated into this update of MIL-STD-2525.

TABLE XVII. Incorporated symbology change proposals.

SCP Number	SCP Title
22-021-C01-NV	Remove Rectangular Single Target Control Measure
23-002-MC	Add mission task symbol verb Defeat
23-003-MC	Add mission task symbol verb Demonstration-Demonstrate
23-004-MC	Add mission task symbol verb Disengage
23-005-MC	Add mission task symbol verb Evacuate-Evacuation
23-006-MC	Add mission task symbol verb Exploit-Exploitation
23-007-MC	Add mission task symbol verb Turn
23-008-NV	Remove Kingfisher Mine Symbol
23-009-DS	Remove Hierarchical Telecommunications Graphic
23-010-AR	Add Clear to sector 1 common modifier
23-011-DS	Add Civilian and Military Camp as a main icon
23-012-DS	Add DPRE and TNG Sector 1 Modifiers to Installations
23-013-DS	Add Electric Generation sector 1 modifier for land units
23-014-DS	Add Electromagnetic Warfare as a sector 1 Common Modifier
23-015-DS	Add Interception Sector 1 and 2 modifier for units
23-016-DS	Add Intermodal Sector 1 Modifier for Land Units
23-017-DS	Add Jamming as a Sector 1 & 2 common modifier
23-018-DS	Add Laboratory as a Sector 1 and 2 Common Modifier
23-019-DS	Add Meeting Sector 1 and 2 modifiers in Activities
23-020-DS	Add Noncombatant Generic Vessel Sector 1 Modifier for Land Units
23-021-DS	Add Non-Governmental (NGO) Main and Sector 1 Common Modifier
23-022-DS	Add Over-snow prime mover sector 2 common modifier
23-023-DS	Add Search sector 1 & 2 modifier for Land Units
23-024-DS	Add Railway to Sector 1 Common Modifier
23-025-DS	Add Supply as a sector 2 common modifier
23-026-DS	Modify Rape Sector 1 modifier in Common Modifier Table
23-027-MC	Add LA Sector 1 Modifier for Land Units
23-028-MC	Add MA Sector 1 Modifier for Land Units
23-029-MC	Add Combined Combat Unit Main Icon to Land Units
23-030-MC	Add Fire Direction Center Sector 2 Modifier

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XVII. Incorporated symbology change proposals – Continued.

SCP Number	SCP Title
23-031-AR	Add Area Defense defensive operation planning symbol
23-032-AR	Modify Counterattack operation planning symbol
23-033-AR	Add Envelopment maneuver planning symbol
23-035-AR	Add Frontal Attack form of maneuver planning symbol
23-036-AR	Add Infiltration form of maneuver planning symbol
23-037-AR	Add Kill Zone control measure
23-038-AR	Add Mobile Defense defensive operation planning symbol
23-039-AR	Add Movement to Contact offensive operation planning symbol
23-041-AR	Add Pursuit offensive operation planning symbol
23-042-AR	Add Turning Movement maneuver planning symbol
23-043-DS	Change Sea Surface Frame Shape Value
23-044-DS	Remove Illegal Drug Lab
23-045-DS	Remove METOC Wind Plots
24-003-DS	Add Encirclement Control Measure template
24-004-DS	Change Activities Extortion Graphic
24-005-AR	Add Construction Sector 2 Land Unit Modifier
24-006-DS	Add Master Amplifier Template
24-007-DS	Add Amplifier Language for Mine Warfare symbols
24-008-DS	Correct Forward Line of Own Troops examples
24-009-DS	Add Clarifying Language for HQ and Offset Amplifiers
24-011-DS	Clarify Common Modifiers SIDC Positions
24-012-DS	Correct Airspace Coordination Area Amplifiers
24-013-DS	Change Activities Icons from Full Octagon Icons to Main
24-014-DS	Change Land Icons from Full Octagon Icons to Main
24-016-DS	Change Maritime Icons from Full Octagon Icons to Main
24-017-AR	Add Field Feeding Main for Units
24-018-DS	Fix Clerical Error for SCP 20-037-DS Remove Fire Station Activities symbol
24-019-DS	Move Wireless and Wired Modifiers to Common Modifiers
24-020-DS	Change isolated personnel location draw rule
24-021-MC	Remove Higher Formation Amplifier in Land Equipment
24-022-DS	Move AO Amplifier in Air appendix template
24-024-DS	Change LA and MA to common modifiers
24-029-DS	Add Altitude Amplifier to Weapons Free Zone Template
24-032-CSWG	Change Router Symbol
24-033-CSWG	Change Switch Symbol
24-034-CSWG	Change Threat Actor Symbol
24-035-AR	Add Sector 2 Modifier for DOG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE XVII. Incorporated symbology change proposals – Continued.

SCP Number	SCP Title
24-037-DS	Remove Non Governmental Land Civilian Sector 1 Modifier
24-038-DS	Correct Rectangular2 Draw Rule
24-039-AR	Update X Amplifier
24-040-DS	Correct Line1 Control Measure Draw Rule
24-041-JS	Add Service Main Icon in Cyberspace Appendix
24-042-JS	Change Firewall Symbol
24-043-JS	Change Threat Actor Symbol
24-044-JS	Remove Operating System Sector 1 Modifier
24-045-JS	Modify Phishing Symbols
24-047-DS	Change Descriptor SIDC field name
24-048-DS	Consolidate Area Control Measures Draw Rules
24-049-DS	Consolidate Point Control Measures Draw Rules
24-050-DS	Change Control Measures Appendix Name
24-051-DS	Add language about icons that transparent vs white filled
24-052-AR	Change Exploit-Exploitation Drawing Rule
24-053-DS	Consolidate Line Control Measures Draw Rules
24-054-DS	Remove Duplicate Control Measures Draw Rules
24-055-DS	Correct Trip Wire template and Example
24-056-MC	Add Reconnaissance (FIST) Land Unit Main Icon
24-057-MC	Add Reconnaissance Artillery, Mounted Operation Land Unit Main Icon
24-058-MC	Add RES Sector 1 & 2 Common Modifier
24-060-AR	Modify Motorized Term for related Land Unit Main Icons
24-061-AF	Add New TACAN Graphic
25-005-MC	Add Principal Direction of Fire
25-006-MC	Add Secondary Sector of Fire
25-008-MC	Change Military symbol and make a Main Icon
25-009-MC	Add MIL as Sector 1 & 2 Common Modifier
25-010-MC	Remove Military Armory
25-011-MC	Remove Military Base
25-013-MC	Add Final Protective Lines
25-014-MC	Rename Principal Direction of Fire Entity

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SYMBOL IDENTIFICATION CODES

A.1 SCOPE.

A.1.1 Scope. This appendix outlines the procedures for developing symbol identification codes (SIDC) for symbols in MIL–STD–2525E. The use of these codes is optional but highly recommended.

A.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

A.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

A.4 GENERAL REQUIREMENTS

A.4.1 Organization. This appendix contains SIDC and their elements.

A.5 DETAILED REQUIREMENTS

A.5.1 Symbol identification code. A symbol identification code (SIDC) is a 30-position code that uniquely identifies the core elements needed to build a joint military compliant symbol. The SIDC shall only use the hexadecimal range of values (0-9 and A-F). This range provides the capability to exchange symbol information in a bandwidth-efficient manner, when converting to other format such as binary, by treating the SIDC as a hexadecimal number. When processing and storing the SIDC within implementations, it may be treated as a string with no loss of information. Values within the SIDC are given to an established symbol by the SSMC only.

A.5.2 Elements of the symbol identification code**.** The SIDC is composed of fourteen elements of information which are presented in three sets of ten values. See figure A–1.

Note: SIDC values shall only be assigned by DISA and only values listed in this MIL-STD or approved SCPs shall be used. Other SIDC values may be assigned to other organizations such as values used in STANAG 2019 (APP-06).

For more information or a complete list of all SIDC values, contact Defense Information Systems Agency (DISA) Military Message Standards Branch, P.O. Box 549, Ft. Meade, MD 20755-0549, or email to disa.meade.EE.mbx.symbology@mail.mil.

A.5.2.1 Set A - First ten values.

Version
Standard identity
Symbol set
Status
HQ/Task Force/Dummy
Amplifying Descriptor

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.2.2 Set B - Second ten values.

Entity
Entity type
Entity subtype
Sector 1 modifier
Sector 2 modifier

A.5.2.3 Set C - Third ten values.

Sector 1 Common Modifier Identifier
Sector 2 Common Modifier Identifier
Frame Shape
Nationality/country/geopolitical/geographic name or Entity numeric code

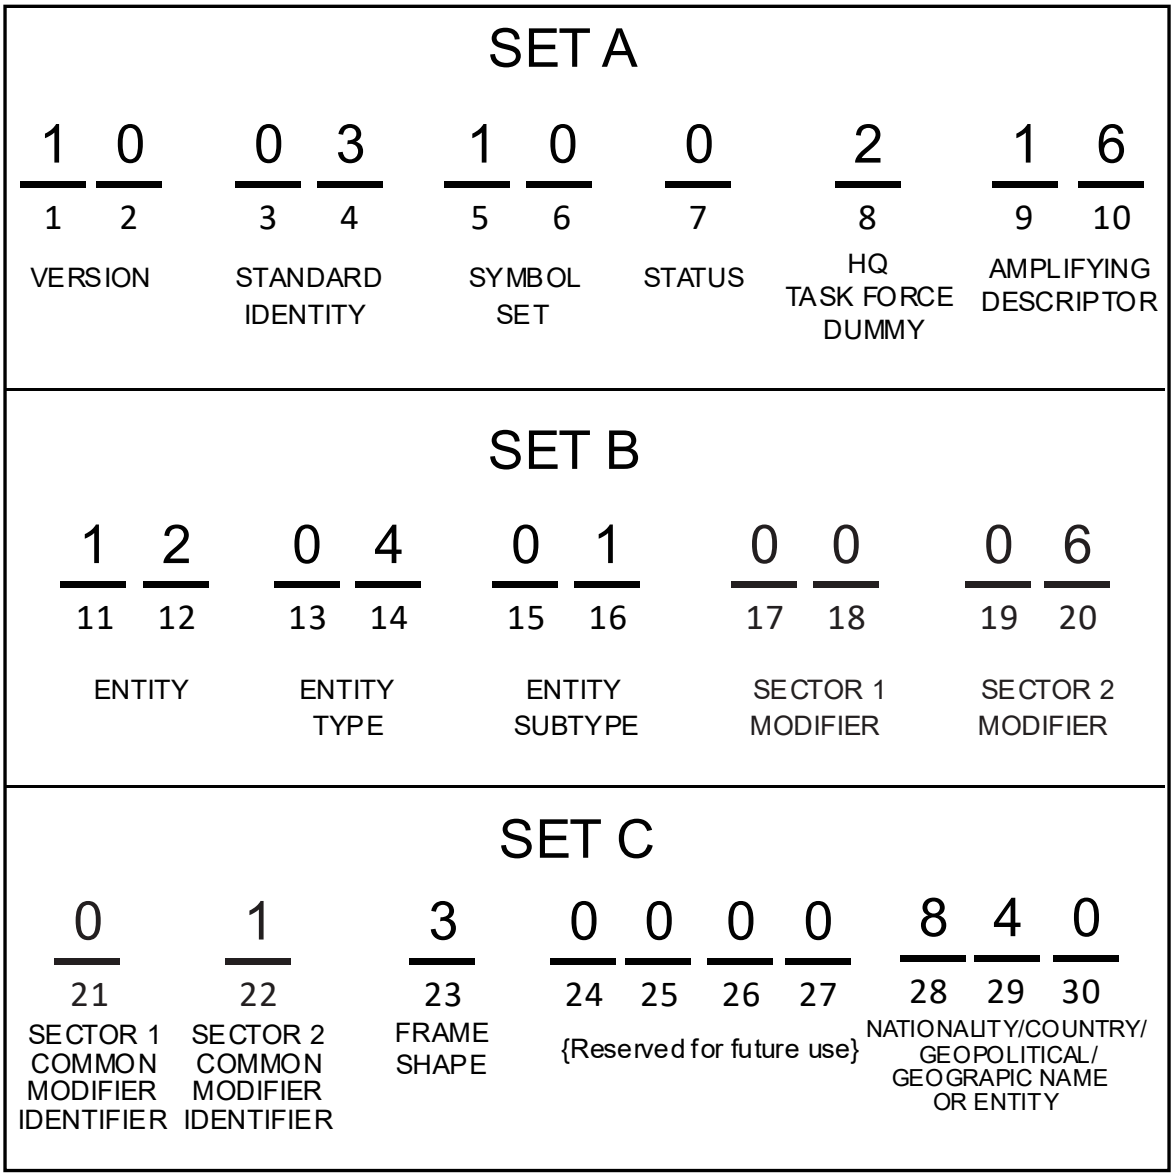


FIGURE A-1. Elements of the symbol identification code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.3 Set A. The first set of ten values:

Values 1 and 2 is the Version.
Values 3 and 4 is the Standard Identity.
Values 5 and 6 is the Symbol Set.
Value 7 is the Status.
Value 8 is the Headquarters/Task Force/Dummy.
Values 9 and 10 is the Amplifying Descriptor.

A.5.3.1 Version. The version is comprised of two values and identifies an edition or version change within the harmonized symbology standards APP-06 and MIL-STD-2525. The version number will increment by one each time either of the standards is promulgated. This provides accounting for further updates to the standards.

TABLE A-I. Version.

Value	Description	Released
10	MIL-STD-2525D	June 2014
10	APP-06(D)(1)	October 2017
11	MIL-STD-2525D(1)	August 2, 2018
12	APP-06(D)(2)	Withdrawn
13	MIL-STD-2525E	December 31, 2022
14	APP-06(E)(1)	October 2023
15	MIL-STD-2525E(1)	March 2, 2025
16	APP-06(E)(2)	October 14, 2025
17-3F	Reserved for future Editions/Versions	N/A
40-FF	N/A	N/A

Note: MIL-STD-2525D and APP-06(D)(1) are the extant standards and should have the same versioning due to the omission of any changes between the two standards.

A.5.3.2 Standard identity. Standard identity is comprised of two values. The first value represents the context of the symbol, and the second value reflects the standard identity. The following are the entries for standard identity:

TABLE A-II. Standard identity.

Description	1st Position Value	2d Position Value
Context		
Reality	0	
Exercise	1	
Simulation	2	
Restricted Target – Reality	3	
No-Strike Entity – Reality	4	
Restricted Target – Exercise	5	
No-Strike Entity – Exercise	6	
Restricted Target – Simulation	7	
No-Strike Entity – Simulation	8	
Standard Identity		
Pending		0
Unknown		1
Assumed Friend		2
Friend		3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-II. Standard identity - Continued.

Description	1st Position Value	2d Position Value
Neutral		4
Suspect/Joker		5
Hostile/Faker		6

A.5.3.2.1 Context implementation guidance. The three contexts listed here are reality, exercise, and simulation, and these are directly related to frames depicted in each of tables I, II, and III, respectively. The graphic (svg) files provided for frames include complete sets of those that need "X" for exercise or "S" for simulation text amplifiers, however graphic (svg) files for training are not currently available. These amplifiers are built into the exercise and simulation frame graphic (svg) files themselves, rather than supplied as separate text amplifier graphic (svg) files.

A.5.3.2.2 Standard identity implementation guidance. The standard identities are documented, and examples of the various frames used for each of the standard identities illustrated, in tables I, II, and III. The standard identities themselves are also listed in 5.3.2.1. The seven standard identities are grouped into four standard identity groups each of which has an associated frame shape for each dimension. The standard identity groups are Unknown, Friend, Neutral and Hostile and the mapping between them and the standard identities are as shown in table A-III.

TABLE A-III. Standard Identity Mapping.

Standard Identity Group	Standard Identities
Unknown	Pending and Unknown
Friend	Friend and Assumed Friend
Neutral	Neutral
Hostile	Hostile/Faker and Suspect/Joker

When a symbol component is variable according to frame shape, the standard identity group can be used to determine which of the available graphic (svg) files should be used for symbol construction.

A.5.3.3 Symbol set. The symbol set is comprised of two positions.

TABLE A-IV. Symbol sets.

Description	Value
Unknown	00
Air	01
Air Missile	02
Space	05
Space Missile	06
Land Unit	10
Land Civilian Unit/Organization	11
Land Equipment	15
Land Installation	20
Control Measures and Planning Symbols	25
Dismounted Individuals	27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-IV. Symbol sets - Continued.

Description	Value
Sea Surface	30
Sea Subsurface	35
Mine Warfare	36
Activities	40
Atmospheric	45
Oceanographic	46
Meteorological Space	47
Signals Intelligence	50
Cyberspace - Virtual	60

A.5.3.3.1 Symbol set implementation guidance. A symbol set represents a collection of symbol entities, sector one modifiers, and sector two modifiers. One or more symbol sets are grouped into a given dimension. A dimension is a collection of symbols that all share the same basic frame shape and amplifier placement specifications. The various dimensions are further illustrated as columns in tables I, II, and III. Multiple dimensions may combine to form domains (see 5.3.2.2). For any given symbol's SIDC, its context, standard identity, dimension, and status codes assist in determining which frame and associated fill (see 5.3.2, 5.3.3, and tables I, II, and III) is used to depict that symbol. Typically, given a collection of available filled frame graphic (svg) files, a given "affiliation" or "relationship" between a single context, single standard identity, single dimension, together with status, will permit the identification and selection of a single best choice for a frame graphic (svg) file. The optional choice of drawing a frame using the magenta fill for "civilian" provides a further opportunity to choose a particularly appropriate graphic (svg) file for frame depiction.

See table A-V for a mapping of the relationships between dimensions and symbol sets. Domains (5.3.2.2) cut across dimensions. MIL-STD-2525C also referred to the concept of a Battle Dimension (Air, Space, Ground, Sea Surface, Sea Subsurface, SOF, Other, and Unknown), and so, for clarity, table A-V also shows the relationships between the older concept of Battle Dimension and the newer concepts of Dimension, Domain, and Symbol Set.

TABLE A-V. Domain/dimension/symbol set mappings.

Battle Dimension (MIL-STD-2525C)	Dimension (MIL-STD-2525E)	Domain	Symbol Sets	Symbol Set Value
Unknown	Unknown	Unknown	Unknown	00
Air	Air	Air	Air Air Missile	01 02
Space	Space	Space	Space Space Missile	05 06
Ground	Land Unit	Land	Land Unit Land Civilian Unit/Organization	10 11
	Land Equipment		Land Equipment	15
	Land Installation		Land Installation	20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

Sea Surface	Sea Surface	Maritime	Sea Surface	30
Sea Subsurface	Sea Subsurface		Sea Subsurface Mine Warfare	35 36
--	Dismounted Individual	By Location	Dismounted Individual	27
--	Cyberspace	Cyberspace	Cyberspace (Virtual)	60
--	Activities	By Location	Activities	40
--	Control Measure	By Location	Control Measures and Planning Symbols	25
--	METOC	Air	Atmospheric	45
		Sea	Oceanographic	46
		Space	Meteorological Space	47

A.5.3.4 Status. The status is comprised of one value.

TABLE A-VI. Status.

Description	Value
Present	0
Planned/Anticipated/Suspect	1
Present/Fully capable	2
Present/Damaged	3
Present/Destroyed	4
Present/Full to capacity	5

A.5.3.4.1 Status implementation guidance. Status is defined under 5.3.2.3. The status code in an SIDC can, alternatively, represent a given symbol's operational condition (5.3.7.14), since the operational condition and status (5.3.2.3) are mutually exclusive. Graphic (svg) files are available for each frame shape to enable a location Status of Present (solid frame) or Anticipated/Planned/Suspected (dashed frame) to be indicated for the relevant standard identities. Similarly, graphic (svg) files (differentiated by context, standard identity, dimension, and status) are available to ensure that when the operational condition of an entity is expressed using the colored bar approach shown in table XI, the bars are properly aligned when drawn beneath various frame shapes.

A.5.3.5 Headquarters/task force/dummy. The headquarters/task force/dummy is comprised of one value.

TABLE A-VII. Headquarters/task force/dummy.

Description	Value
Unknown	0
Feint/Decoy/Dummy	1
Headquarters	2
Feint/Dummy Headquarters	3
Task Force	4
Feint/Dummy Task Force	5
Task Force Headquarters	6
Feint/Dummy Task Force Headquarters	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.3.5.1 Headquarters/task force/dummy implementation guidance. Task force and feint/dummy amplifiers are described in 5.3.7.3 and 5.3.7.4, respectively. The headquarters staff amplifier is mentioned in 5.3.7.1 and figure 14. Code values exist for each of the eight possible combinations of these three graphic amplifiers including the case where none of the amplifiers are used. Graphic (svg) files exist for each combination of standard identity group, dimension, and the aforementioned Headquarters/Task Force/Dummy codes.

A.5.3.6 Amplifying Descriptor. The amplifier is comprised of two values.

TABLE A-VIII. Amplifying Descriptor.

Description	1st Position Value	2nd Position Value
Unknown	0	0
Echelon at brigade and below	1	
Team/Crew		1
Squad		2
Section		3
Platoon/Detachment		4
Company/Battery/Troop		5
Battalion/Squadron		6
Regiment/Group		7
Brigade		8
Echelon at division and above	2	
Division		1
Corps/MEF		2
Army		3
Army Group/Front		4
Region/Theater		5
Command		6
Equipment mobility on land	3	
Wheeled limited cross country		1
Wheeled cross country		2
Tracked		3
Wheeled and tracked combination		4
Towed		5
Rail		6
Pack animals		7
Equipment mobility on snow	4	
Over-snow (prime mover)		1
Sled		2
Equipment mobility on water	5	
Barge		1
Amphibious		2
Naval towed array	6	
Short towed array		1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-VIII. Amplifying Descriptor. - Continued.

Description	1st Position Value	2nd Position Value
Long towed Array		2
Leadership Amplifier	7	
Leader Individual		1

A.5.3.6.1 Echelon/mobility/towed array amplifier implementation guidance. An amplifier can either be textual or graphical. Documented in 5.3.7, with further echelon amplifier details in 5.3.7.2, mobility amplifier details in 5.3.7.10, towed array amplifier details in 5.3.7.13.5, and leadership amplifier details in 5.3.9, these codes allow, within the contents of an SIDC, for the inclusion of three of the most commonly used graphic amplifiers. An individual graphic (svg) file can be identified for use for a given amplifier based on an SIDC's standard identity group and its two amplifier values.

A.5.4 Set B. The second set of ten values:

a. These values define the icon and modifier contents of each symbol set

Positions 11 and 12 is the entity.
Positions 13 and 14 is the entity type.
Positions 15 and 16 is the entity subtype.
Positions 17 and 18 is the first modifier.
Positions 19 and 20 is the second modifier.

If an entity is "Unspecified", then the remainder of the second set of ten values shall be set to 0.

The tables in this section are organized by symbol sets.

b. Icons are the innermost part of a symbol. A symbol is, at most, composed of one and only one icon or compound icon. Icons are fully defined in 5.3.4. The SIDC structure is organized using a logical three-tier hierarchy based on first, second and third order military functions; each tier (military function level) is expressed using a pair of values. A first order military function is expressed as an Entity. Where there are second order military functions associated with a first order military function, these are expressed as Entity Types. Similarly, if a second order military function has related third order military functions; these are expressed as Entity Subtypes. The placement of the values representing Entity, Entity Type and Entity Subtype can be seen in figure A-1. Some entities and entity types are used purely for hierarchical purposes; these are never associated with an actual physical icon (an individual svg graphic file) and thus are never intended to be displayed. Most entities and entity types, however, and all entity subtypes, are associated with a single physical icon (an individual svg file). The icon used to represent a concept should be associated with the highest level of detail available i.e. the one that reflects a non-zero-zero value at the most discriminating (i.e., lowest order) of the Entity, Entity Type and Entity Subtype values. When the icon to be used is a full frame icon (see 5.3.4.3), so by definition it touches the edge of the frame it is drawn within, one of four graphic (svg) files needs to be used, based on the standard identity group of the given SIDC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

c. A symbol set is also comprised of up to two sets of sector modifiers (sector 1 and sector 2). Sector modifiers are defined in 5.3.6, and their placement in 5.3.1.2. The graphic (svg) file for a given sector 1 modifier can be determined through an SIDC's symbol set and sector 1 modifier value or by the use of the sector 1 modifier indicator and sector 1 modifier values. The graphic (svg) file for a given sector 2 modifier can be determined through a SIDC's symbol set and sector 2 modifier values or using the sector 1 modifier indicator and sector 2 modifier values.

d. For example, SIDC of 13031002161204010006013000840 would be interpreted as:

- 10 = Version of standard used for this symbol (no effect on how this symbol is built/drawn)
- 03 = Reality context, friend standard identity, friend standard identity group
- 10 = Land unit symbol set, which belongs to the land unit dimension
- 0 = Status of present
- 2 = Headquarters/task force/dummy amplifier of headquarters
- 16 = Echelon at brigade and below, specifically a battalion/squadron echelon



- 12 = within the land unit symbol set, the movement and maneuver entity
- 04 = within the movement and maneuver entity, an antitank/antiarmor entity type
- 01 = within the antitank/antiarmor entity type, an armored unit
- 00 = within the land unit symbol set, no sector one modifier
- 06 = within the land unit symbol set, the wheeled sector two modifier

- 0 = no sector 1 common modifier used
- 1 = Sector 2 common modifier used
- 3 = Land unit frame shape
- 0000 = not used
- 840 = United States GENC code

e. The above example would be drawn as:

Values Used	Graphic (svg)
03 = Reality friend **10** = Land unit symbol set (and dimension) **0** = status of present **3** = Land unit frame shape All of the above values must be noted, in order to select the single best graphic for the frame and fill.	
3 = Friend **10** = Land unit **2** = Headquarters All of the above values must be noted, in order to select the single best graphic for the headquarters/task force/dummy amplifier.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

3 = Friend **16** = Echelon at brigade or below, battalion/squadron The friend standard identity belongs to the friend standard identity group, which in turn helps determine which graphic (svg) to use.	
10 = Land unit symbol set **12** = Entity is movement/maneuver	No icon is associated with this entity (hierarchical purposes only)
3 = Friend **04** = Entity type within land unit movement/maneuver entity is antitank/antiarmor. Since this is a full frame icon, the standard identity of friend determines the specific graphic (svg) needed. This icon would be used if this were the highest order non-zero-zero military function code in this SIDC. But it is not, in this example, the icon we desire.	
3 = Friend **01** = Entity subtype within land unit movement/maneuver entity and antitank/antiarmor entity type is armored. Since this is a full frame icon, the standard identity of friend determines the specific graphic (svg) needed. Since this is the highest (3rd) order non-zero-zero military function code in this particular SIDC, this icon IS used, NOT the previous icon for antitank/antiarmor.	
00 = Sector one modifier code is zero.	Nothing is drawn in sector one.
06 = Sector two modifier code is the second and third values of the sector two common modifier, wheeled	
0 = Sector one common modifier indicator is zero.	Nothing is drawn.
1 = Sector two common modifier indicator is first value of sector two common modifier. In this example, the common modifier value is **106**.	Nothing is drawn. It identifies the use of a common modifier
3 = Land unit frame shape	
0000 = not used	Nothing is drawn. Values are not used
840 = United States	USA
When composed and drawn, the final result is… 1003100216, 1204010006, 0130000840	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.1 Common Modifiers

TABLE A-IX. Sector 1 common modifier.

Sector 1 Modifier	Category	Value	Remarks
Unmanned Aircraft (UA)/ Unmanned Aerial Vehicle (UAV)/Unmanned Aircraft System (UAS)/Drone	Mobility	100	
Robotic	Mobility	101	
Fixed Wing	Mobility	102	Not used by USAF
Rotary Wing	Mobility	103	
Tilt-Rotor	Mobility	104	
VSTOL/VTOL or Helicopter Equipped	Mobility	105	
Attack/Strike	Capability	106	
Armored	Capability	107	
Ballistic Missile/Ballistic Missile Defense Shooter	Capability	108	
Bridge/Bridging	Capability	109	
Cargo	Capability	110	
Utility	Capability	111	
Light	Capability	112	
Medium	Capability	113	
Heavy	Capability	114	
Cyberspace	Capability	115	
Command Post Node	Capability	116	
Joint Network Node	Capability	117	
Retransmission Site	Capability	118	
Brigade	Support Level	119	
Close Protection	Capability	120	
Combat	Capability	121	
Command and Control	Capability	122	
Crowd and Riot Control	Capability	123	
Explosive Ordnance Disposal	Capability	124	
Intelligence Surveillance Reconnaissance	Capability	125	
Maintenance	Capability	126	
Medevac/Medic/Medical	Capability	127	
Search and Rescue	Capability	128	
Security	Capability	129	
Sniper	Capability	130	
Special Operations Forces	Capability	131	
Special Weapons and Tactics (SWAT)	Capability	132	
Guided Missile	Capability	133	
Other Guided Missile	Capability	134	
Petroleum/Petroleum Oil and Lubricants	Capability	135	
Water	Capability	136	
Weapon(s)	Capability	137	
Chemical	CBRN	138	
Radiological	CBRN	140	
Nuclear	CBRN	141	
Decontamination	CBRN	142	
Civilian	Organization	143	
Government Organization/ Government Organization Member	Organization	144	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-IX. Sector 1 common modifier - Continued.

Sector 1 Modifier	Category	Value	Remarks
Accident	Composite Loss or Incident Qualifier	145	
Assassination	Crime	146	
Execution	Crime	147	
Kidnapping	Crime	148	
Piracy	Crime	149	
Rape	Crime	150	
Antisubmarine Warfare	Mission Area	151	
Escort	Mission Area	152	
Mine Countermeasures	Mission Area	153	
Mine Warfare	Mission Area	154	
Surface Warfare	Mission Area	155	
Command	Support Level	156	
Company	Support Level	157	
Platoon/Detachment	Support Level	158	
Regiment/Group	Support Level	159	
Section	Support Level	160	
Squad	Support Level	161	
Team/Crew	Support Level	162	
Battalion	Support Level	163	
Directed Energy	Capability	164	
Hijacker	Crime	165	
Electromagnetic Warfare	Capability	166	
Laboratory	Capability	168	
Non-Governmental Organization	Organization	170	
Railway	Capability	171	
Clear	Capability	174	
Jamming	Capability	175	
Wired	Capability	176	
Wireless	Capability	177	
Low Altitude	Capability	178	
Medium Altitude	Capability	179	
Reserve	Support Level	182	
Military	Organization	183	

TABLE A-X. Sector 2 common modifier.

Sector 2 Modifier	Category	Value	Remarks
Airborne	Mobility	100	
Bicycle Equipped	Mobility	101	
Railway	Capability	102	
Ski	Mobility	103	
Tracked	Mobility	104	
Wheeled (Limited Cross Country)	Mobility	105	
Wheeled X (Cross Country)	Mobility	106	
Fixed Wing	Mobility	107	
Rotary Wing	Mobility	108	
Robotic	Mobility	109	
Autonomous Control	Capability	110	
Remotely Piloted	Capability	111	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-X. Sector 2 common modifier - Continued.

Sector 2 Modifier	Category	Value	Remarks
Expendable	Capability	112	
Mountain	Capability	113	
Long Range	Capability	114	
Medium Range	Capability	115	
Short Range	Capability	116	
Close Range	Capability	117	
Heavy	Capability	118	
Medium	Capability	119	
Light and Medium	Capability	120	
Light	Capability	121	
Cyberspace	Capability	122	
Security Force Assistance	Capability	123	
Medical Bed	Capability	124	
Multifunctional	Capability	125	
Laboratory	Capability	127	
Over-snow (prime mover)	Capability	129	
Supply	Capability	131	
Electromagnetic Warfare	Capability	133	
Jamming	Capability	134	
Reserve	Support Level	135	
Military	Organization	136	

A.5.4.2 Air (01)

TABLE A-XI. Air entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Military			**11**0000
	Fixed Wing		11**01**00
		Medical Evacuation (MEDEVAC)	1101**01**
		Attack/Strike	1101**02**
		Bomber	1101**03**
		Fighter	1101**04**
		Fighter/Bomber	1101**05**
		Cargo	1101**07**
		Electronic Combat (EC)/Jammer	1101**08**
		Tanker	1101**09**
		Patrol	1101**10**
		Reconnaissance	1101**11**
		Trainer	1101**12**
		Utility	1101**13**
		Vertical or Short Take-off and Landing (VSTOL)	1101**14**
		Airborne Command Post (ACP)	1101**15**
		Airborne Early Warning (AEW)	1101**16**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XI. Air entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Antisurface Warfare	1101**17**
		Antisubmarine Warfare	1101**18**
		Communications	1101**19**
		Combat Search and Rescue (CSAR)	1101**20**
		Electronic Support (ES)	1101**21**
		Government	1101**22**
		Mine Countermeasures (MCM)	1101**23**
		Personnel Recovery	1101**24**
		Search and Rescue	1101**25**
		Special Operations Forces	1101**26**
		Ultra Light	1101**27**
		Photographic Reconnaissance	1101**28**
		Very Important Person (VIP)	1101**29**
		Suppression of Enemy Air Defense	1101**30**
		Passenger	1101**31**
		Escort	1101**32**
		Electromagnetic Attack (EA)	1101**33**
	Rotary Wing		11**02**00
	Unmanned Aircraft (UA) / Unmanned Aerial Vehicle (UAV) / Unmanned Aircraft System (UAS)		11**03**00
	Vertical–Takeoff UAV (VT–UAV)		11**04**00
	Lighter Than Air		11**05**00
	Airship		11**06**00
	Tethered Lighter than Air		11**07**00
Civilian			**12**0000
	Fixed Wing		12**01**00
	Rotary Wing		12**02**00
	Unmanned Aircraft (UA) / Unmanned Aerial Vehicle (UAV) / Unmanned Aircraft System (UAS)		12**03**00
	Lighter Than Air		12**04**00
	Airship		12**05**00
	Tethered Lighter than Air		12**06**00
Weapon			**13**0000
	Bomb		13**01**00
	Decoy		13**02**00
Manual Track			**14**0000
Equipment			**15**0000
	Tactical Air Navigation (TACAN)		15**01**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XII. Air sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Bomber	Military Aircraft Type	02	
Fighter	Military Aircraft Type	04	
Tanker	Aircraft Type	06	
Passenger	Aircraft Type	09	
Ultra Light	Aircraft Type	10	
Airborne Command Post (ACP)	Military Aircraft Type	11	
Airborne Early Warning (AEW)	Military Aircraft Type	12	
Electronic Combat (EC)/Jammer	Military Mission Area	16	
Patrol	Mission Area	17	
Reconnaissance	Mission Area	18	
Trainer	Mission Area	19	
Photographic (Reconnaissance)	Mission Area	20	
Personnel Recovery	Mission Area	21	
Communications	Mission Area	23	
Electronic Support (ES)	Military Mission Area	24	
Very Important Person (VIP) Transport	Mission Area	29	
Combat Search and Rescue (CSAR)	Military Mission Area	30	
Antisurface Warfare	Military Mission Area	32	
Fighter/Bomber	Military Aircraft Type	33	
Intensive Care	Mission Area	34	
Electromagnetic Attack (EA)	Military Mission Area	35	
Multi-Mission	Mission Area	36	
ASW Helo - LAMPS	Mission Area	38	
ASW Helo - SH-60R	Mission Area	39	

TABLE A-XIII. Air sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Boom–Only	Re-Fueling Capability	04	
Drogue–Only	Re-Fueling Capability	05	
Boom and Drogue	Re-Fueling Capability	06	
Downlinked	Track Link Availability	11	

A.5.4.3 Air missile (02).

TABLE A-XIV. Air missile entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Missile			**11**0000

TABLE A-XV. Air missile sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Air	Launch Origin	01	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XV. Air missile sector 1 modifier - Continued.

Sector 1 Modifier	Category	Value	Remarks
Surface	Launch Origin	02	
Subsurface	Launch Origin	03	
Space	Launch Origin	04	
Anti–Ballistic	Missile Class	05	
Ballistic	Missile Class	06	
Cruise	Missile Class	07	
Interceptor	Missile Class	08	
Hypersonic	Missile Class	09	

TABLE A-XVI. Air missile sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Air	Missile Destination	01	
Surface	Missile Destination	02	
Subsurface	Missile Destination	03	
Space	Missile Destination	04	
Launched	Missile Status	05	
Patriot	Missile Type-BMD	07	
Standard Missile-2 (SM-2)	Missile Type-AAW	08	
Standard Missile-6 (SM-6)	Missile Type-AAW	09	
Evolved Sea Sparrow Missile (ESSM)	Missile Type-AAW	10	
Rolling Airframe Missile (RAM)	Missile Type-AAW	11	
Short Range	Missile Range	12	
Medium Range	Missile Range	13	
Intermediate Range	Missile Range	14	
Long Range	Missile Range	15	
Intercontinental	Missile Range	16	

A.5.4.4 Space (05).

TABLE A-XVII. Space entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Military			**11**0000
	Space Vehicle		11**01**00
	Re–Entry Vehicle		11**02**00
	Planet Lander		11**03**00
	Orbiter Shuttle		11**04**00
	Capsule		11**05**00
	Satellite		11**07**00
	Antisatellite Weapon		11**08**00
	Astronomical Satellite		11**09**00
	Biosatellite		11**10**00
	Communications Satellite		11**11**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XVII. Space entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Earth Observation Satellite		111**2**00
	Miniaturized Satellite		111**3**00
	Navigational Satellite		111**4**00
	Reconnaissance Satellite		111**5**00
	Space Station		111**6**00
	Tethered Satellite		111**7**00
	Weather Satellite		111**8**00
	Space Launched Vehicle (SLV)		111**9**00
Civilian			**12**0000
	Orbiter Shuttle		12**01**00
	Capsule		12**02**00
	Satellite		12**03**00
	Astronomical Satellite		12**04**00
	Biosatellite		12**05**00
	Communications Satellite		12**06**00
	Earth Observation Satellite		12**07**00
	Miniaturized Satellite		12**08**00
	Navigational Satellite		12**09**00
	Space Station		12**10**00
	Tethered Satellite		12**11**00
	Weather Satellite		12**12**00
	Planetary Lander		12**13**00
	Space Vehicle		12**14**00
Manual Track			**13**0000

TABLE A-XVIII. Space sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Low Earth Orbit (LEO)	Orbit	01	
Medium Earth Orbit (MEO)	Orbit	02	
High Earth Orbit (HEO)	Orbit	03	
Geosynchronous Orbit (GSO)	Orbit	04	
Geostationary Orbit (GO)	Orbit	05	
Molniya Orbit (MO)	Orbit	06	

TABLE A-XIX. Space sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Optical	Sensor	01	
Infrared	Sensor	02	
Radar	Sensor	03	
Signals Intelligence (SIGINT)	Sensor	04	
High Power Microwave (ASAT)	Capability	07	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XIX. Space sector 2 modifier - Continued.

Laser (ASAT)	Capability	08	
Mine (ASAT)	Capability	09	
Maintenance	Capability	10	
Refuel	Capability	11	
Tug	Capability	12	

A.5.4.5 Space missile (06).

TABLE A-XX. Space missile entity/entity type/entity subtype.

Entity **(Positions 11 and 12)**	**Entity Type** **(Positions 13 and 14)**	**Entity Subtype** **(Positions 15 and 16)**	**Value**
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Missile			**11**0000

TABLE A-XXI. Space missile sector 1 modifier.

Sector 1 Modifier	**Category**	**Value**	**Remarks**
Unspecified		00	
Ballistic	Missile Class	01	
Space	Launch Origin	02	
Interceptor	Missile Class	03	
Hypersonic	Missile Class	04	

TABLE A-XXII. Space missile sector 2 modifier.

Sector 2 Modifier	**Category**	**Value**	**Remarks**
Unspecified		00	
Short Range	Missile Range	01	
Medium Range	Missile Range	02	
Intermediate Range	Missile Range	03	
Long Range	Missile Range	04	
Intercontinental	Missile Range	05	
Arrow	Missile Type-BMD	06	
Ground-Based Interceptor (GBI)	Missile Type-BMD	07	
Patriot	Missile Type-BMD	08	
Standard Missile Terminal Phase (SM-T)	Missile Type-BMD	09	
Standard Missile – 3 (SM-3)	Missile Type-BMD	10	
Terminal High Altitude Area Defense (THAAD)	Missile Type-BMD	11	
Space	Launch Origin	12	
Close Range (CRBM)	Missile Range	13	
Debris	Missile Type-BMD	14	
Unknown	Missile Type-BMD	15	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.6 Land unit (10).

TABLE A-XXIII. Land unit entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Command and Control			**11**0000
	Broadcast Transmitter Antennae		11**01**00
	Civil Affairs		11**02**00
	Civil–Military Cooperation		11**03**00
	Information Operations		11**04**00
	Liaison		11**05**00
	Military Information Support Operations (MISO)		11**06**00
		Broadcast Transmitter Antennae	1106**01**
	Radio		11**07**00
	Radio Relay		11**08**00
	Radio Teletype Center		11**09**00
	Signal		11**10**00
		Radio	1110**01**
		Radio Relay	1110**02**
		Teletype	1110**03**
		Video Imagery (Combat Camera)	1110**05**
	Video Imagery (Combat Camera)		11**12**00
	Space		11**13**00
	Special Troops		11**14**00
	Multi-Domain		11**15**00
Movement and Maneuver			**12**0000
	Air Assault with Organic Lift		12**01**00
	Air Traffic Services/Airfield Operations		12**02**00
	Antitank/Antiarmor		12**04**00
		Armored	1204**01**
		Motorized/Mounted Operation	1204**02**
	Armor /Mechanized		12**05**00
		Reconnaissance/Cavalry/Scout	1205**01**
		Amphibious	1205**02**
	Army Aviation/Aviation Rotary Wing		12**06**00
		Reconnaissance	1206**01**
	Aviation Composite		12**07**00
	Aviation Fixed Wing		12**08**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIII. Land unit entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Reconnaissance	1208**01**
	Combat		12**09**00
	Combined Arms		12**10**00
	Infantry		12**11**00
		Amphibious	1211**01**
		Armored/Mechanized/Tracked	1211**02**
		Main Gun System, Infantry	1211**03**
		Motorized/Mounted Operation	1211**04**
		Infantry Fighting Vehicle	1211**05**
		Main Gun System	1211**06**
		Marine Air-Ground Task Force (MAGTF)	1211**07**
	Observer		12**12**00
	Reconnaissance/Cavalry/Scout		12**13**00
		Reconnaissance and Surveillance	1213**01**
		Marine	1213**02**
		Motorized/Mounted Operation	1213**03**
		Reconnaissance Artillery, Mounted Operation	1213**04**
	Sea Air Land (SEAL)		12**14**00
	Sniper		12**15**00
	Surveillance		12**16**00
	Special Forces		12**17**00
	Special Operations Forces (SOF)		12**18**00
		Fixed Wing MISO	1218**01**
		Ground	1218**02**
		Underwater Demolition	1218**05**
	Unmanned Aerial Systems		12**19**00
	Ranger		12**20**00
	Combined Combat		12**21**00
Fires			**13**0000
	Air Defense		13**01**00
		Main Gun System	1301**01**
		Missile	1301**02**
		Air and Missile Defense	1301**03**
	Air/Land Naval Gunfire Liaison		13**02**00
	Field Artillery		13**03**00
		Reconnaissance (FIST)	130303
	Field Artillery Observer		13**04**00
	Joint Fire Support		13**05**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIII. Land unit entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Meteorological		13**06**00
	Missile		13**07**00
	Mortar		13**08**00
		Self-Propelled Wheeled	1308**02**
	Survey		13**09**00
Protection			**14**0000
	Chemical Biological Radiological Nuclear Defense		14**01**00
		Motorized/Mounted Operation	1401**02**
		Reconnaissance	1401**03**
		Reconnaissance Motorized/Mounted Operation	1401**05**
		Chemical, Biological, Radiological, Nuclear, and High-Yield Explosives	1401**06**
	Combat Support (Maneuver Enhancement)		14**02**00
	Criminal Investigation Division		14**03**00
	Diving		14**04**00
	Dog		14**05**00
	Drilling		14**06**00
	Engineer		14**07**00
		Mechanized	1407**01**
		Motorized/Mounted Operation	1407**02**
		Reconnaissance	1407**03**
	Explosive Ordnance Disposal (EOD)		14**08**00
	Field Camp Construction		14**09**00
	Fire Fighting/Fire Protection		14**10**00
	Geospatial Support/Geospatial Information Support		14**11**00
	Military Police		14**12**00
	Mine		14**13**00
	Mine Clearing		14**14**00
	Mine Launching		14**15**00
	Mine Laying		14**16**00
	Security		14**17**00
		Motorized/Mounted Operation	1417**02**
	Search and Rescue		14**18**00
		Isolated Personnel	1418**01**
	Shore Patrol/Security Police		14**20**00
	Topographic/Geospatial		14**21**00
	Missile Defense		14**22**00
Intelligence			**15**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIII. Land unit entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Analysis		15**01**00
	Counterintelligence		15**02**00
	Direction Finding		15**03**00
	Electronic Ranging		15**04**00
	Electromagnetic Warfare		15**05**00
		Analysis	15050**1**
		Direction Finding	15050**2**
		Intercept	15050**3**
	Intercept (Search and Recording)		15**06**00
	Interrogation		15**07**00
	Jamming		15**08**00
	Joint Intelligence Center		15**09**00
	Military Intelligence		15**10**00
	Search		15**11**00
	Sensor		15**12**00
	Military History		15**13**00
Sustainment			**16**0000
	Administrative		16**01**00
	All Classes of Supply		16**02**00
	Ammunition		16**04**00
	Band		16**05**00
		Army Music	16050**1**
	Combat Service Support		16**06**00
	Finance		16**07**00
	Judge Advocate General		16**08**00
	Labor		16**09**00
	Laundry/Bath		16**10**00
	Maintenance		16**11**00
	Material		16**12**00
	Medical		16**13**00
	Medical Treatment Facility		16**14**00
	Morale, Welfare and Recreation		16**15**00
	Mortuary Affairs		16**16**00
	Multiple Classes of Supply		16**17**00
	NATO Supply Class I		16**18**00
	NATO Supply Class III		16**20**00
	NATO Supply Class IV		16**21**00
	Ordnance		16**23**00
	Personnel Services		16**24**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIII. Land unit entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Petroleum, Oil and Lubricants		16**25**00
	Public Affairs/Public Information		16**28**00
	Quartermaster		16**29**00
	Religious Support		16**31**00
	Replacement Holding Unit		16**32**00
	Joint Information Bureau (JIB)		16**35**00
	Transportation		16**36**00
	US Supply Class I		16**37**00
	US Supply Class IV		16**40**00
	US Supply Class VI		16**42**00
	US Supply Class VII		16**43**00
	US Supply Class VIII		16**44**00
	US Supply Class IX		16**45**00
	US Supply Class X		16**46**00
	Water Purification		16**48**00
	Broadcast		16**49**00
	Interpreter/Translator		16**51**00
	Support		16**52**00
	Army Field Support		16**53**00
	Contracting Services		16**54**00
	Parachute Rigger		16**55**00
	Human Resources		16**56**00
	Field Feeding		16**57**00
Maritime			**17**0000
	Naval		17**01**00
Named Headquarters			**18**0000
	Allied Command Europe Rapid Reaction Corps (ARRC)		18**01**00
	Allied Command Operations		18**02**00
	International Security Assistance Force (ISAF)		18**03**00
	Multinational (MN)		18**04**00
Emergency Operation			**19**0000
Law Enforcement			**20**0000
	Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)		20**01**00
	Border Patrol		20**02**00
	Customs Service		20**03**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIII. Land unit entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Drug Enforcement Administration (DEA)		20**04**00
	Department of Justice (DOJ)		20**05**00
	Federal Bureau of Investigation (FBI)		20**06**00
	Police		20**07**00
	Prison		20**08**00
	United States Secret Service (USSS)		20**09**00
	Transportation Security Administration (TSA)		20**10**00
	Coast Guard		20**11**00
	US Marshals Service		20**12**00
	Internal Security Force		20**13**00
Cyber			**21**0000

TABLE A-XXIV. Land unit sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Tactical Satellite Communications	Capability	01	
Area	Capability	02	
Biological	Capability	04	
Border	Capability	05	
Communications Contingency Package	Capability	11	
Construction	Capability	12	
Cross Cultural Communication	Capability	13	
Detention	Capability	16	
Direct Communications	Capability	17	
Diving	Capability	18	
Division	Capability	19	
Dog	Capability	20	
Drilling	Capability	21	
Electro–Optical	Capability	22	
Enhanced	Capability	23	
Fire Direction Center	Capability	25	
Force	Capability	26	
Forward	Capability	27	
Ground Station Module	Capability	28	
Landing Support	Capability	29	
Meteorological	Capability	32	
Missile	Capability	34	
Mobile Advisor and Support	Capability	35	
Mobile Subscriber Equipment	Capability	36	
Mobility Support	Capability	37	
Multinational	Capability	39	
Multinational Specialized Unit	Capability	40	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIV. Land unit sector 1 modifier - Continued.

Sector 1 Modifier	Category	Value	Remarks
Multiple Rocket Launcher	Capability	41	
NATO Medical Role 1	Capability	42	
NATO Medical Role 2	Capability	43	
NATO Medical Role 3	Capability	44	
NATO Medical Role 4	Capability	45	
Naval	Capability	46	
Operations	Capability	49	
Radar	Capability	50	
Radio Frequency Identification (RFID) Interrogator/Sensor	Capability	51	
Sensor	Capability	55	
Signal Intelligence	Capability	57	
Single Rocket Launcher	Capability	59	
Smoke	Capability	60	
Sound Ranging	Capability	62	
Survey	Capability	65	
Tactical Exploitation	Capability	66	
Target Acquisition	Capability	67	
Topographic/Geospatial	Capability	68	
Video Imagery (Combat Camera)	Capability	70	
Mobility Assault	Capability	71	
Amphibious Warfare Ship	Capability	72	
Load Handling System	Capability	73	
Palletized Load System	Capability	74	
Support	Capability	77	
Route, Reconnaissance, and Clearance	Capability	79	
Assault	Capability	84	
Criminal Investigation Division	Capability	86	
Digital	Capability	87	
Network or Network Operations	Capability	88	
Airfield, Aerial Port of Debarkation, or Aerial Port of Embarkation	Capability	89	
Pipeline	Capability	90	
Postal	Capability	91	
Theater	Support Level	94	
Army or Theater Army	Support Level	95	
Corps	Support Level	96	
Headquarters or headquarters staff element	Support Level	98	
Multi-Domain	Capability	99	
Electric Generation	Capability	A1	
Intercept	Capability	A3	
Intermodal	Capability	A4	
Non-Combative Generic Vessel	Capability	A6	
Search	Capability	A7	

TABLE A-XXV. Land unit sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Arctic	Mobility	02	
Battle Damage Repair	Capability	03	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXV. Land unit sector 2 modifier - Continued.

Sector 2 Modifier	Category	Value	Remarks
Casualty Staging	Capability	05	
Clearing	Capability	06	
Control	Capability	08	
Decontamination	Capability	09	
Demolition	Capability	10	
Dental	Capability	11	
Digital	Capability	12	
Enhanced Position Location Reporting System (EPLRS)	Capability	13	
High Altitude	Capability	16	
Intermodal	Capability	17	
Intensive Care	Capability	18	
Launcher	Capability	21	
Low Altitude	Capability	23	
Medium Altitude	Capability	25	
High to Medium Altitude	Capability	28	
Multi–Channel	Capability	29	
Optical (Flash)	Capability	30	
Pack Animal	Capability	31	
Patient Evacuation Coordination	Capability	32	
Preventive Maintenance	Capability	33	
Psychological	Capability	34	
Radio Relay Line of Sight	Capability	35	
Recovery	Capability	37	
Maintenance	Capability	38	
Rescue Coordination Center	Capability	39	
Riverine	Mobility	40	
Single Channel	Capability	41	
Strategic	Capability	44	
Support	Capability	45	
Tactical	Capability	46	
Towed	Mobility	47	
Troop	Capability	48	
Vertical or Short Take–Off and Landing (VTOL/VSTOL)	Mobility	49	
Veterinary	Capability	50	
High to Low Altitude	Capability	52	
Medium to Low Altitude	Capability	53	
Attack	Capability	54	
Refuel	Capability	55	
Utility	Capability	56	
Combat Search and Rescue	Capability	57	
Guerrilla	Capability	58	
Air Assault	Mobility	59	
Amphibious	Mobility	60	
Very Heavy	Capability	61	
Barge, Self-Propelled	Mobility	64	
Barge, Not Self-Propelled	Mobility	65	
Launch	Mobility	66	
Landing Craft	Mobility	67	
Landing Ship	Mobility	68	
Service Craft/Yard	Mobility	69	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXV. Land unit sector 2 modifier - Continued.

Sector 2 Modifier	Category	Value	Remarks
Tug Harbor	Mobility	70	
Ocean Going Tug Boat	Mobility	71	
Surface Deployment and Distribution Command	Capability	72	
Noncombatant Generic Vessel	Mobility	73	
Composite	Capability	74	
Shelter	Capability	75	
Surgical	Capability	81	
Blood	Capability	82	
Combat and Operational Stress Control	Capability	83	
Optometry	Capability	86	
Preventive Medicine	Capability	87	
Air Defense	Capability	89	
Intercept	Capability	91	
Search	Capability	93	
Fire Direction Center	Capability	94	
Construction	Capability	95	
Dog	Capability	96	

A.5.4.7 Land civilian unit/organization (11).

TABLE A-XXVI. Land civilian unit/organization entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Civilian			**11**0000
	Environmental Protection		11**01**00
	Government Organization		11**02**00
	Individual		11**03**00
	Organization or Group		11**04**00
	Killing Victim		11**05**00
	Killing Victims		11**06**00
	Victim of an Attempted Crime		11**07**00
	Spy		11**08**00
	Composite Loss		11**09**00
	Emergency Medical Operation		11**10**00

TABLE A-XXVII. Land civilian unit/organization sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Murder Victims	Crime	03	
Displaced Persons/Refugees/Evacuees	Organization	09	
Foreign Fighter(s)	Organization	10	
Gang Member or Gang	Organization	11	
Leader or Leadership	Organization	13	
Unwilling/Coerced Recruit	Organization	15	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXVII. Land civilian unit/organization sector 1 modifier - Continued.

Sector 1 Modifier	Category	Value	Remarks
Willing Recruit	Organization	16	
Religious or Religious Organization	Organization	17	
Targeted Individual or Organization	Organization	18	
Terrorist or Terrorist Organization	Organization	19	
Speaker	Organization	20	
Other	Composite Loss	23	
Loot	Crime	24	

TABLE A-XXVIII. Land civilian unit/organization sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Leader or Leadership	Organization	01	

A.5.4.8 Land Equipment (15).

TABLE A-XXIX. Land equipment entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Weapon/Weapon System			**11**0000
	Rifle		11**01**00
		Single Shot Rifle	1101**01**
		Semiautomatic Rifle	1101**02**
		Automatic Rifle	1101**03**
	Machine Gun		11**02**00
		Light	1102**01**
		Medium	1102**02**
		Heavy	1102**03**
	Grenade Launcher		11**03**00
		Light	1103**01**
		Medium	1103**02**
		Heavy	1103**03**
	Flame Thrower		11**04**00
	Air Defense Gun		11**05**00
		Light	1105**01**
		Medium	1105**02**
		Heavy	1105**03**
	Antitank Gun		11**06**00
		Light	1106**01**
		Medium	1106**02**
		Heavy	1106**03**
	Direct Fire Gun		11**07**00
		Light	1107**01**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIX. Land equipment entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Medium	110700
		Heavy	110700
	Recoilless Gun		110800
		Light	110801
		Medium	110802
		Heavy	110803
	Howitzer		110900
		Light	110901
		Medium	110902
		Heavy	110903
	Missile Launcher		111000
		Light	111001
		Medium	111002
		Heavy	111003
	Air Defense Missile Launcher		111100
		Light	111101
		Light, Light Transporter-Launcher and Radar (TLAR)	111102
		Light, Light Tactical Landing Approach Radar (TELAR)	111103
		Medium	111104
		Medium, TLAR	111105
		Medium, TELAR	111106
		Heavy	111107
		Heavy, TLAR	111108
		Heavy, TELAR	111109
	Antitank Missile Launcher		111200
		Light	111201
		Medium	111202
		Heavy	111203
	Surface-to-Surface Missile Launcher		111300
		Light	111301
		Medium	111302
		Heavy	111303
	Mortar		111400
		Light	111401
		Medium	111402
		Heavy	111403
	Single Rocket Launcher		111500
		Light	111501
		Medium	111502
		Heavy	111503

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIX. Land equipment entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Multiple Rocket Launcher		11**16**00
		Light	1116**01**
		Medium	1116**02**
		Heavy	1116**03**
	Antitank Rocket Launcher		11**17**00
		Light	1117**01**
		Medium	1117**02**
		Heavy	1117**03**
	Nonlethal Weapon		11**18**00
	Taser		11**19**00
	Water Cannon		11**20**00
Vehicle			**12**0000
	Armored		12**01**00
		Armored Fighting Vehicle	1201**01**
		Armored Fighting Vehicle Command and Control	1201**02**
		Armored Personnel Carrier	1201**03**
		Armored Personnel Carrier Ambulance	1201**04**
		Armored Protected Vehicle	1201**05**
		Armored Personnel Carrier, Recovery	1201**08**
		Combat Service Support Vehicle	1201**09**
		Light Armor Reconnaissance	1201**11**
	Tank		12**02**00
		Light	1202**01**
		Medium	1202**02**
		Heavy	1202**03**
Engineer Vehicle and Equipment			**13**0000
	Bridge		13**01**00
	Fixed Bridge		13**03**00
	Floating Bridge		13**04**00
	Folding Girder Bridge		13**05**00
	Hollow Deck Bridge		13**06**00
	Drill		13**07**00
		Drill Mounted on Utility Vehicle	1307**01**
	Earthmover		13**08**00
		Multifunctional Earthmover/Digger	1308**01**
	Mine Clearing Equipment		13**09**00
		Mine Clearing Equipment on Tank Chassis	1309**02**
		Assault Breacher Vehicle (ABV) with Combat Dozer Blade	1309**03**
		Medium Capability Equipment	1309**04**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIX. Land equipment entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Heavy Capability Equipment	130**05**
	Mine Laying Equipment		13**10**00
		Mine Laying Equipment on Utility Vehicle	1310**01**
		Armored Carrier with Volcano	1310**02**
		Truck Mounted with Volcano	1310**03**
	Dozer		13**11**00
		Dozer, Armored	1311**01**
	Armored Assault		13**12**00
	Armored Engineer Recon Vehicle (AERV)		13**13**00
	Backhoe		13**14**00
	Construction Vehicle		13**15**00
	Ferry Transporter		13**16**00
Utility Vehicle			**14**0000
	Vehicle (Generic)		14**01**00
	Medical		14**02**00
	Mobile Emergency Physician		14**04**00
	Bus		14**05**00
	Semi–Trailer and Truck		14**06**00
		Light	1406**01**
		Medium	1406**02**
		Heavy	1406**03**
	Limited Cross Country Truck		14**07**00
	Cross Country Truck		14**08**00
	Petroleum, Oil and Lubricant		14**09**00
	Water		14**10**00
	Amphibious Utility Wheeled Vehicle		14**11**00
	Tow Truck		14**12**00
		Light	1412**01**
		Heavy	1412**02**
Train			**15**0000
	Locomotive		15**01**00
Civilian Vehicle			**16**0000
	Automobile		16**01**00
	Open-Bed Truck		16**02**00
	Multiple Passenger Vehicle		16**03**00
	Utility Vehicle		16**04**00
	Jeep Type Vehicle		16**05**00
	Tractor Trailer Truck with Box		16**06**00
	Tractor Trailer Truck with Flatbed Trailer		16**07**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIX. Land equipment entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Known Insurgent Vehicle		16**08**00
	Drug Vehicle		16**09**00
Law Enforcement			**17**0000
	Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)		17**01**00
	Border Patrol		17**02**00
	Customs Service		17**03**00
	Drug Enforcement Administration (DEA)		17**04**00
	Department of Justice (DOJ)		17**05**00
	Federal Bureau of Investigation (FBI)		17**06**00
	Police		17**07**00
	United States Secret Service (USSS)		17**08**00
	Transportation Security Administration (TSA)		17**09**00
	Coast Guard		17**10**00
	US Marshals Service		17**11**00
Pack Animals			**18**0000
Missile Support			**19**0000
	Transloader		19**01**00
	Transporter		19**02**00
	Crane/Loading Device		19**03**00
	Propellant Transporter		19**04**00
	Warhead Transporter		19**05**00
Other Equipment			**20**0000
	Antennae		20**01**00
	Bomb		20**02**00
	Booby Trap		20**03**00
	CBRN Equipment		20**04**00
	Computer System		20**05**00
	Command Launch Equipment (CLE)		20**06**00
	Generator Set		20**07**00
	Ground-based Midcourse Defense (GMD) Fire Control (GFC) Center		20**08**00
	In-Flight Interceptor Communications System (IFICS) Data Terminal (IDT)		20**09**00
	Directed Energy		20**10**00
	Military Information Support Operations (MISO)		20**11**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXIX. Land equipment entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Sustainment Shipments		20**12**00
	Tent		20**13**00
		Civilian	2013**01**
		Military	2013**02**
	Unit Deployment Shipments		20**14**00
	Emergency Medical Operation		20**15**00
	Tactical Air Navigation (TACAN)		20**16**00
Land Mines			**21**0000
	Land Mine		21**01**00
	Antipersonnel Land mine (APL)		21**02**00
	Antitank Mine		21**03**00
	Improvised Explosives Device (IED)		21**04**00
	Less Than Lethal		21**05**00
Sensors			**22**0000
	Sensor		22**01**00
	Sensor Emplaced		22**02**00
	Radar		22**03**00
Emergency Operation			**23**0000
	Fire Fighting/Fire Protection		23**02**00
Manual Track			**24**0000
Rotary Wing			**25**0000

TABLE A-XXX. Land equipment sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Biological	Sensor Type	01	
Early Warning Radar	Sensor Type	03	
Intrusion	Sensor Type	04	
Upgraded Early Warning Radar	Sensor Type	07	
Multi-purpose Blade	Capability	12	
Tank-width Mine Plow	Capability	13	

TABLE A-XXXI. Land equipment sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Tractor Trailer	Capability	06	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.9 Land installations (20).

TABLE A-XXXII. Land installation entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Military/Civilian			**11**0000
	Aircraft Production/Assembly		11**01**00
	Ammunition and Explosives Production		11**02**00
	Ammunition Cache		11**03**00
	Armament Production		11**04**00
	Black List Location		11**05**00
	Chemical, Biological, Radiological and Nuclear (CBRN)		11**06**00
	Engineering Equipment Production		11**07**00
		Bridge	1107**01**
	Equipment Manufacture		11**08**00
	Government Leadership		11**09**00
	Gray List Location		11**10**00
	Mass Grave Site		11**11**00
	Materiel		11**12**00
	Mine		11**13**00
	Missile and Space System Production		11**14**00
	Nuclear (Non CBRN Defense)		11**15**00
	Printed Media		11**16**00
	Safe House		11**17**00
	White List Location		11**18**00
	Tented Camp		11**19**00
		Civilian Camp	1119**03**
		Military Camp	1119**04**
	Warehouse/Storage		11**20**00
		Grenade	1120**01**
	Law Enforcement		11**21**00
		Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)	1121**01**
		Border Patrol	1121**02**
		Customs Service	1121**03**
		Drug Enforcement Administration (DEA)	1121**04**
		Department of Justice (DOJ)	1121**05**
		Federal Bureau of Investigation (FBI)	1121**06**
		Police	1121**07**
		Prison	1121**08**
		United States Secret Service (USSS)	1121**09**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXII. Land installation entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Transportation Security Administration (TSA)	1121**10**
		Coast Guard	1121**11**
		US Marshals Service	1121**12**
	Emergency Operation		11**22**00
		Fire Station	1122**01**
		Emergency Medical Operation	1122**02**
	Home/House		11**23**00
	Non-Governmental Organization		11**24**00
Infrastructure			**12**0000
	Agriculture and Food		12**01**00
		Agricultural	1201**01**
		Animal Feedlot	1201**02**
		Commercial Food Distribution Center	1201**03**
		Farm/Ranch	1201**04**
		Food Distribution	1201**05**
		Food Production Center	1201**06**
		Food Retail	1201**07**
		Grain Storage	1201**08**
	Banking Finance and Insurance		12**02**00
		ATM	1202**01**
		Bank	1202**02**
		Bullion Storage	1202**03**
		Economic Infrastructure Asset	1202**04**
		Federal Reserve Bank	1202**05**
		Financial Exchange	1202**06**
		Financial Services, Other	1202**07**
	Commercial		12**03**00
		Chemical Plant	1203**01**
		Firearms Manufacturer	1203**02**
		Firearms Retailer	1203**03**
		Hazardous Material Production	1203**04**
		Hazardous Material Storage	1203**05**
		Industrial Site	1203**06**
		Landfill	1203**07**
		Pharmaceutical Manufacturer	1203**08**
		Contaminated Hazardous Waste Site	1203**09**
		Toxic Release Inventory	1203**10**
	Educational		12**04**00
		College/University	1204**01**
		School	1204**02**
	Energy		12**05**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXII. Land installation entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Electric Power	120**501**
		Generation Station	120**502**
		Natural Gas	120**503**
		Petroleum/Gas/Oil	120**505**
		Propane	120**506**
	Government Site		12**0600**
	Medical Infrastructure		12**0700**
		Medical	120**701**
		Medical Treatment Facility (Hospital)	120**702**
	Military		12**0800**
		Airport/Air Base	120**803**
	Postal Services		12**0900**
		Postal Distribution Center	120**901**
		Post Office	120**902**
	Public Venues		12**1000**
		Enclosed Facility (Public Venue)	121**001**
		Open Facility (Public Venue)	121**002**
		Recreational Area	121**003**
		Religious Institution	121**004**
	Special Needs		12**1100**
		Adult Day Care	121**101**
		Child Day Care	121**102**
		Elder Care	121**103**
	Telecommunications		12**1200**
		Broadcast Transmitter Antennae	121**201**
		Telecommunications	121**202**
		Telecommunications Tower	121**203**
	Transportation		12**1300**
		Aerial Port of Debarkation / Aerial Port of Embarkation	121**301**
		Air Traffic Control	121**302**
		Bus Station	121**303**
		Ferry Terminal	121**304**
		Helicopter Landing Site	121**305**
		Maintenance	121**306**
		Railhead/Railroad Station	121**307**
		Rest Stop	121**308**
		Sea Port/Naval Base	121**309**
		Ship Yard	121**310**
		Toll	121**311**
		Traffic Inspection	121**312**
		Tunnel	121**313**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXII. Land installation entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Water Supply		12**14**00
		Control Valve	1214**01**
		Dam	1214**02**
		Discharge Outfall	1214**03**
		Ground Water Well	1214**04**
		Pumping Station	1214**05**
		Reservoir	1214**06**
		Storage Tower	1214**07**
		Surface Water Intake	1214**08**
		Wastewater Treatment	1214**09**
		Water	1214**10**
		Water Treatment	1214**11**

TABLE A-XXXIII. Land installation sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Biological	CBRN Type	01	
Coal	Electric Power Type	06	
Geothermal	Electric Power Type	07	
Hydroelectric	Electric Power Type	08	
Natural Gas	Electric Power Type	09	
Civilian Telephone	Telecommunication Type	12	
Civilian Television	Telecommunication Type	13	
Displaced Persons/Refugees/Evacuees Camp	Organization	15	
Training Camp	Organization	16	

TABLE A-XXXIV. Land installation sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Biological Warfare Production	Capability	01	
Chemical Warfare Production	Capability	02	
Nuclear Warfare Production	Capability	03	
Radiological Warfare Production	Capability	04	
Atomic Energy Reactor	Capability	05	
Nuclear Material Production	Capability	06	
Nuclear Material Storage	Capability	07	
Weapons Grade Production	Capability	08	
Transportation	Capability	10	
Displaced Persons/Refugees/Evacuees Camp	Organization	11	
Training Camp	Organization	12	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.10 Control measures and planning symbols (25).

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
Command and Control Lines				**11**0000
	Boundary		Line	11**01**00
	Light Line		Line	11**02**00
	Engineer Work Line		Line	11**03**00
	Generic		Line	11**04**00
Command and Control Areas				**12**0000
	Area of Operations		Area	12**01**00
	Named Area of Interest		Area	12**02**00
	Targeted Area of Interest		Area	12**03**00
	Airfield Zone		Area	12**04**00
	Base Camp		Area	12**05**00
	Guerrilla Base		Area	12**06**00
	Generic		Area	12**07**00
Command and Control Points				**13**0000
	Action Point (General)		Point	13**01**00
	Amnesty Point		Point	13**02**00
	Checkpoint		Point	13**03**00
	Center of Main Effort		Point	13**04**00
	Contact Point		Point	13**05**00
	Coordinating Point		Point	13**06**00
	Decision Point		Point	13**07**00
	Distress Call		Point	13**08**00
	Entry Control Point		Point	13**09**00
	Fly-To-Point			13**10**00
		Sonobuoy	Point	131**01**
		Weapon	Point	131**02**
		Normal	Point	131**03**
	Linkup Point		Point	13**11**00
	Passage Point		Point	13**12**00
	Point of Interest		Point	13**13**00
		Launch Event	Point	131**31**
	Rally Point		Point	13**14**00
	Release Point		Point	13**15**00
	Start Point		Point	13**16**00
	Special Point		Point	13**17**00
	Waypoint		Point	13**18**00
	Airfield		Point	13**19**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Target Handover		Point	13**20**00
	Key Terrain		Point	13**21**00
	Control Point		Point	13**22**00
Maneuver Lines				**14**0000
	Forward Line of Troops		Line	14**01**00
	Phase Line		Line	14**03**00
	Forward Edge of the Battle Area		Line	14**04**00
	Field of Fire		Line	14**05**00
		Final Protective Fire (Left)	Line	14050**1**
		Final Protective Fire (Right)	Line	14050**2**
		Principal Direction of Fire	Line	14050**3**
		Secondary Direction of Fire	Line	14050**4**
	Direction of Attack		Line	14**06**00
		Friendly Aviation	Line	1406**01**
		Friendly Main Attack /Decisive	Line	1406**02**
		Friendly Supporting Attack	Line	1406**03**
	Final Coordination Line		Line	14**07**00
	Infiltration Lane		Line	14**08**00
	Limit of Advance		Line	14**09**00
	Line of Departure		Line	14**10**00
	Line of Departure/Line of Contact		Line	14**11**00
	Probable Line of Deployment		Line	14**12**00
	Airhead Line		Line	14**13**00
	Bridgehead Line		Line	14**14**00
	Holding Line		Line	14**15**00
	Release Line		Line	14**16**00
	Ambush		Line	14**17**00
	Handover Line		Line	14**18**00
	Battle Handover Line		Line	14**19**00
Maneuver Areas				**15**0000
	Area		Area	15**01**00
	Assembly Area		Area	15**02**00
	Action Area			15**05**00
		Joint Tactical Action Area (JTAA)	Area	150**51**
		Submarine Action Area (SAA)	Area	150**52**
		Submarine-Generated Action Area (SGAA)	Area	150**53**
	Drop Zone		Area	15**06**00
	Extraction Zone		Area	15**07**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Landing Zone		Area	150**8**00
	Pick–Up Zone		Area	150**9**00
	Fortified Area		Area	151**0**00
	Limited Access Area		Area	151**1**00
	Battle Position		Area	151**2**00
		Prepared (P) but not Occupied	Area	15120**2**
		Strong Point	Area	15120**3**
		Contain	Area	15120**4**
		Retain	Area	15120**5**
	Engagement Area (EA)		Area	151**3**00
	Axis of Advance			151**4**00
		Friendly Airborne/Aviation	Line	15140**1**
		Attack Helicopter	Line	15140**2**
		Main Attack	Line	15140**3**
		Supporting Attack	Line	15140**4**
	Assault Position		Area	151**5**00
	Attack Position		Area	151**6**00
	Objective Area		Area	151**7**00
	Encirclement		Area	151**8**00
	Penetration Box		Area	151**9**00
	Attack by Fire		Area	152**0**00
	Support by Fire		Area	152**1**00
	Search Area/Reconnaissance Area		Area	152**2**00
	Area Defense		Area	152**6**00
	Frontal Attack		Area	152**7**00
	Mobile Defense		Area	152**8**00
	Turning Movement		Area	152**9**00
Maneuver Points				**16**0000
	Observation Post/Outpost (unspecified)		Point	160**1**00
	Observation Post/Outpost (specified)		Point	160**2**00
		Reconnaissance Outpost	Point	16020**1**
		Forward Observer/Spotter Outpost/Position	Point	16020**2**
		CBRN Observation Outpost	Point	16020**3**
		Sensor Outpost /Listening Post	Point	16020**4**
		Combat Outpost	Point	16020**5**
	Target Reference Point		Point	160**3**00
	Point of Departure		Point	160**4**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
Airspace Control (Corridors) Areas				**17**0000
	Air Corridor		Area	17**01**00
	Low Level Transit Route		Area	17**02**00
	Minimum–Risk Route		Area	17**03**00
	Safe Lane		Area	17**04**00
	Standard Use Army Aircraft Flight Route		Area	17**05**00
	Transit Corridor		Area	17**06**00
	Special Corridor		Area	17**07**00
	Base Defense Zone		Area	17**08**00
	High–Density Airspace Control Zone		Area	17**09**00
	Restricted Operations Zone (ROZ)		Area	17**10**00
	Air-to-Air Restricted Operating Zone (AARROZ)		Area	17**11**00
	Unmanned Aircraft Restricted Operating Zone (UA-ROZ)		Area	17**12**00
	Weapon Engagement Zone		Area	17**13**00
	Fighter Engagement Zone (FEZ)		Area	17**14**00
	Joint Engagement Zone (JEZ)		Area	17**15**00
	Missile Engagement Zone (MEZ)		Area	17**16**00
	Low Altitude Missile Engagement Zone (LOMEZ)		Area	17**17**00
	High Altitude Missile Engagement Zone (HIMEZ)		Area	17**18**00
	Short Range Air Defense Engagement Zone (SHORADEZ)		Area	17**19**00
	Weapons Free Zone		Area	17**20**00
Airspace Control Points				**18**0000
	Air Control Point		Point	18**01**00
	Communications Checkpoint		Point	18**02**00
	Isolated Personnel Recovery Point		Point	18**03**00
	Pop–up Point		Point	18**04**00
	Air Control Rendezvous		Point	18**05**00
	Tactical Air Navigation (TACAN)		Point	18**06**00
	Combat Air Patrol (CAP)Station		Point	18**07**00
	Airborne Early Warning (AEW) Station		Point	18**08**00
	ASW (Helo and F/W) Station		Point	18**09**00
	Strike Initial Point		Point	18**10**00
	Replenishment Station		Point	18**11**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Tanking		Point	18**12**00
	Antisubmarine Warfare, Rotary Wing		Point	18**13**00
	Surface Combat Air Patrol (SUCAP) – Fixed Wing		Point	18**14**00
	SUCAP – Rotary Wing		Point	18**15**00
	MIW – Fixed Wing		Point	18**16**00
	MIW – Rotary Wing		Point	18**17**00
	Tomcat		Point	18**18**00
	Rescue		Point	18**19**00
	Unmanned Aerial System (UAS/UA)		Point	18**20**00
	Vertical Takeoff and Landing (VTOL) Tactical Unmanned Aircraft (VTUA)		Point	18**21**00
	Orbit		Point	18**22**00
	Orbit – Figure Eight		Point	18**23**00
	Orbit – Race Track		Point	18**24**00
	Orbit – Random Closed		Point	18**25**00
	Isolated Personnel Location		Point	18**26**00
Airspace Control Lines				**19**0000
	Identification Friend or Foe (IFF) Off Line		Line	19**01**00
	Identification Friend or Foe (IFF) On Line		Line	19**02**00
Maritime Control Areas				**20**0000
	Launch Area			20**01**00
		Ellipse/Circle	Area	2001**01**
	Defended Area			20**02**00
		Ellipse/Circle	Area	2002**01**
		Rectangle	Area	2002**02**
	No Attack (NOTACK) Zone		Area	20**03**00
	Ship Area of Interest		Point	20**04**00
		Ellipse/Circle	Area	2004**01**
		Rectangle	Area	2004**02**
	Active Maneuver Area		Point	20**05**00
	Cued Acquisition Doctrine		Point	20**06**00
	Radar Search Doctrine		Point	20**07**00
Maritime Control Points				**21**0000
	Plan Ship		Point	21**01**00
	Aim Point		Point	21**02**00
	Defended Asset		Point	21**03**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Drop Point		Point	21**04**00
	Entry Point		Point	21**05**00
	Air Detonation		Point	21**06**00
	Ground Zero		Point	21**07**00
	Impact Point		Point	21**08**00
	Predicted Impact Point		Point	21**09**00
	Launched Torpedo		Point	21**10**00
	Missile Detection Point		Point	21**11**00
	Acoustic Countermeasure (Decoy)		Point	21**12**00
	Electronic Countermeasures (ECM) Decoy		Point	21**13**00
	Brief Contact		Point	21**14**00
	Datum Lost Contact		Point	21**15**00
	BT Buoy Drop		Point	21**16**00
	Reported Bottomed Sub		Point	21**17**00
	Moving Haven		Point	21**18**00
	Screen Center		Point	21**19**00
	Lost Contact		Point	21**20**00
	Sinker		Point	21**21**00
	Trial Track		Point	21**22**00
	Acoustic Fix		Point	21**23**00
	Electromagnetic Fix		Point	21**24**00
	Electromagnetic – Magnetic Anomaly Detection (MAD)		Point	21**25**00
	Optical Fix		Point	21**26**00
	Formation		Point	21**27**00
	Harbor		Point	21**28**00
	Harbor Entrance Point		Point	21**29**00
		A	Point	2129**01**
		Q	Point	2129**02**
		X	Point	2129**03**
		Y	Point	2129**04**
	Dip Position		Point	21**30**00
	Search		Point	21**31**00
	Search Area		Point	21**32**00
	Search Center		Point	21**33**00
	Navigational Reference Point		Point	21**34**00
	Sonobuoy		Point	21**35**00
		Ambient Noise	Point	2135**01**
		Air Transportable Communication (ATAC)	Point	2135**02**
		Barra	Point	2135**03**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Bathythermograph Transmitting	Point	2135**04**
		Command Active Multi-Beam Sonobuoy (CAMBS)	Point	2135**05**
		Command Active Sonobuoy Directional Command Active Sonobuoy System (CASS)	Point	2135**06**
		Directional Frequency Analysis and Recording (DIFAR)	Point	2135**07**
		Directional Command Active Sonobuoy System (DICASS)	Point	2135**08**
		Expendable Reliable Acoustic Path Sonobuoy (ERAPS)	Point	2135**09**
		Expired	Point	2135**10**
		Kingpin	Point	2135**11**
		Low Frequency Analysis and Recording (LOFAR)	Point	2135**12**
		Pattern Center	Point	2135**13**
		Range Only	Point	2135**14**
		Vertical Line Array Directional Frequency Analysis and Recording (DIFAR)	Point	2135**15**
	Reference Point		Point	21**36**00
	Special Point		Point	21**37**00
	Navigational Reference Point		Point	21**38**00
	Data Link Reference Point		Point	21**39**00
	Vital Area Center		Point	21**41**00
	Corridor Tab Point		Point	21**42**00
	Enemy Point		Point	21**43**00
	Marshall Point		Point	21**44**00
	Position and Intended Movement (PIM)		Point	21**45**00
	Pre-Landfall Waypoint		Point	21**46**00
	Estimated Position (EP)		Point	21**47**00
	Waypoint		Point	21**48**00
	General Sea Subsurface Station		Point	21**49**00
	Submarine Sea Subsurface Station		Point	21**50**00
	Submarine Antisubmarine Warfare Sea Subsurface Station		Point	21**51**00
	Unmanned Underwater Vehicle Sea Subsurface Station		Point	21**52**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Subsurface Station		Point	21**53**00
	Mine Warfare Unmanned Underwater Vehicle Sea Subsurface Station		Point	21**54**00
	Sea Surface Warfare Unmanned Underwater Vehicle Subsurface Station		Point	21**55**00
	General Sea Surface Station		Point	21**56**00
	Antisubmarine Warfare (ASW) Sea Surface Station		Point	21**57**00
	Mine Warfare Sea Surface Station		Point	21**58**00
	Non-Combatant Sea Surface Station		Point	21**59**00
	Picket Sea Surface Station		Point	21**60**00
	Rendezvous Sea Surface Station		Point	21**61**00
	Replenishment at Sea Surface Station		Point	21**62**00
	Rescue Sea Surface Station		Point	21**63**00
	Surface Warfare Sea Surface Station		Point	21**64**00
	Unmanned Underwater Vehicle Sea Surface Station		Point	21**65**00
	Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Surface Station		Point	21**66**00
	Mine Warfare Unmanned Underwater Vehicle Sea Surface Station		Point	21**67**00
	Remote Multi-Mission Vehicle Mine Warfare Unmanned Underwater Sea Surface Station		Point	21**68**00
	Surface Warfare Mine Warfare Unmanned Underwater Vehicle Sea Surface Station		Point	21**69**00
	Shore Control Station		Point	21**70**00
	General Route		Point	21**71**00
	Diversion Route		Point	21**72**00
	Position and Intended Movement (PIM) Route		Point	21**73**00
	Picket Route		Point	21**74**00
	Point R Route		Point	21**75**00
	Rendezvous Route		Point	21**76**00
	Waypoint Route		Point	21**77**00
	Clutter, Stationary or Cease Reporting		Point	21**78**00
	Tentative or Provisional Track		Point	21**79**00
	Distressed Vessel		Point	21**80**00
	Ditched Aircraft/Downed Aircraft		Point	21**81**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Person in Water/Bailout		Point	21**82**00
	Iceberg		Point	21**83**00
	Navigational		Line	21**84**00
	Oil Rig		Point	21**85**00
	Sea Mine–Like		Point	21**86**00
	Bottom Return/Non-Mine, Mine-Like Bottom Object (NOMBO)		Point	21**87**00
	Bottom Return/Non-Mine, Mine-Like Bottom Object (NOMBO)/Installation Manmade		Point	21**88**00
	Marine Life		Point	21**89**00
	Sea Anomaly (Wake, Current, Knuckle)		Point	21**90**00
	Bottom Return/Non-MILCO, Wreck, Dangerous		Point	21**91**00
	Bottom Return/Non-MILCO, Wreck, Non Dangerous		Point	21**92**00
Maritime Control Lines				**22**0000
	Bearing Line		Line	22**01**00
		Electronic	Line	2201**01**
		Electromagnetic Warfare (EW)	Line	2201**02**
		Acoustic	Line	2201**03**
		Acoustic (Ambiguous)	Line	2201**04**
		Torpedo	Line	2201**05**
		Electro-Optical Intercept	Line	2201**06**
		Jammer	Line	2201**07**
		Radio Direction Finder (RDF)	Line	2201**08**
Fires Areas				**24**0000
	Airspace Coordination Area			24**01**00
		Irregular	Area	2401**01**
		Rectangular	Area	2401**02**
		Circular	Area	2401**03**
	Free Fire Area			24**02**00
		Irregular	Area	2402**01**
		Rectangular	Area	2402**02**
		Circular	Area	2402**03**
	No Fire Area			24**03**00
		Irregular	Area	2403**01**
		Rectangular	Area	2403**02**
		Circular	Area	2403**03**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Restricted Fire Area			240**4**00
		Irregular	Area	24040**1**
		Rectangular	Area	24040**2**
		Circular	Area	24040**3**
	Position Area for Artillery (PAA)			240**5**00
		Rectangular	Area	24050**1**
		Circular	Area	24050**2**
		Irregular	Area	24050**3**
	Point Targets			240**6**00
		Point or Single Target	Point	24060**1**
		Nuclear Target	Point	24060**2**
		Target-Recorded	Point	24060**3**
	Linear Targets			240**7**00
		Linear Target	Line	24070**1**
		Linear Smoke Target	Line	24070**2**
		Final Protective Fire (FPF)	Line	24070**3**
	Area Targets			240**8**00
		Area Target	Area	24080**1**
		Rectangular Target	Area	24080**2**
		Circular Target	Area	24080**3**
		Series or Groups of Targets	Area	24080**5**
		Smoke	Area	24080**6**
		Bomb Area	Area	24080**8**
	Fire Support Station		Point	240**9**00
	Fire Support Area			241**0**00
		Irregular	Area	24100**1**
		Rectangular	Area	24100**2**
		Circular	Area	24100**3**
	Artillery Target Intelligence Zone			241**1**00
		Irregular	Area	24111**0**
		Rectangular	Area	24111**2**
		Circular	Area	24111**3**
	Call for Fire Area			241**2**00
		Irregular	Area	24120**1**
		Rectangular	Area	24120**2**
		Circular	Area	24120**3**
	Censor Zone			241**3**00
		Irregular	Area	24130**1**
		Rectangular	Area	24130**2**
		Circular	Area	24130**3**
	Critical Friendly Zone			241**4**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Irregular	Area	241**401**
		Rectangular	Area	241**402**
		Circular	Area	241**403**
	Dead Space Area			24**1500**
		Irregular	Area	241**501**
		Rectangular	Area	241**502**
		Circular	Area	241**503**
	Target Build–up Area			24**1700**
		Irregular	Area	241**701**
		Rectangular	Area	241**702**
		Circular	Area	241**703**
	Target Value Area			24**1800**
		Irregular	Area	241**801**
		Rectangular	Area	241**802**
		Circular	Area	241**803**
	Zone of Responsibility			24**1900**
		Irregular	Area	241**901**
		Rectangular	Area	241**902**
		Circular	Area	241**903**
	Terminally Guided Munition Footprint (TGMF)		Area	24**2000**
	Weapon/Sensor Range fan, Circular		Area	24**2100**
	Weapon/Sensor Range fan, Sector		Area	24**2200**
	Kill Box			24**2300**
		Irregular, Blue	Area	242**301**
		Rectangular, Blue	Area	242**302**
		Circular, Blue	Area	242**303**
		Irregular, Purple	Area	242**304**
		Rectangular, Purple	Area	242**305**
		Circular, Purple	Area	242**306**
	Kill Zone			24**2800**
Fires Points				**25**0000
	Firing Point		Point	25**01**00
	Hide Point		Point	25**02**00
	Launch Point		Point	25**03**00
	Reload Point		Point	25**04**00
	Survey Control Point		Point	25**05**00
	Known Point		Point	25**06**00
Fire Lines				**26**0000
	Fire Support Coordination Line (FSCL)		Line	26**01**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Coordinated Fire Line (CFL)		Line	26**02**00
	No Fire Line		Line	26**03**00
	Battlefield Coordination Line		Line	26**04**00
	Restrictive Fire Line		Line	26**05**00
	Munition Flight Path		Line	26**06**00
Protection Areas				**27**0000
	Obstacle Belt		Area	27**01**00
	Obstacle Zone		Area	27**02**00
	Obstacle Free Zone		Area	27**03**00
	Obstacle Restricted Zone		Area	27**04**00
	Obstacle Effects			27**05**00
		Block	Area	2705**01**
		Disrupt	Area	2705**02**
		Fix	Line	2705**03**
		Turn	Line	2705**04**
	Obstacle Bypass			27**06**00
		Easy	Point	2706**01**
		Difficult	Point	2706**02**
		Impossible	Point	2706**03**
	Minefield			27**07**00
		Static Depiction	Point	2707**01**
		Dynamic Depiction	Area	2707**07**
	Mined Area		Area	27**08**00
		Fenced	Area	27**08**01
	Unexploded Explosive Ordnance (UXO) Area		Area	27**10**00
	Bridge or Gap		Line	27**11**00
	Roadblocks, Craters and Blown Bridges			27**12**00
		Planned	Line	2712**01**
		Explosives, State of Readiness 1 (Safe)	Line	2712**02**
		Explosives, State of Readiness 2 (Armed but passable)	Line	2712**03**
		Roadblock Complete (Executed)	Line	2712**04**
	Assault Crossing		Line	27**13**00
	Ford Easy		Line	27**15**00
	Ford Difficult		Line	27**16**00
	Biological Contaminated Area		Area	27**17**00
	Chemical Contaminated Area		Area	27**18**00
	Nuclear Contaminated Area		Area	27**19**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Radiological Contaminated Area		Area	27**2**000
	Minimum Safe Distance Zone		Area	27**2**100
		Multiple Strikes – STRIKWARN	Area	2721**01**
	Radiation Dose Rate Contour Lines		Area	27**2**200
Protection Points				**28**0000
	Abatis		Point	28**01**00
	Antipersonnel Mine		Point	28**02**00
		Antipersonnel Mine with Directional Effects	Point	2802**01**
	Antitank Mine		Point	28**03**00
	Antitank Mine with Anti-handling Device		Point	28**04**00
	Wide Area Antitank Mine		Point	28**05**00
	Unspecified Mine		Point	28**06**00
	Booby Trap		Point	28**07**00
	Engineer Regulating Point		Point	28**08**00
	Shelter		Point	28**09**00
	Above Ground Shelter		Point	28**10**00
	Below Ground Shelter		Point	28**11**00
	Fort		Point	28**12**00
	Chemical Event		Point	28**13**00
	Biological Event		Point	28**14**00
	Nuclear Event		Point	28**15**00
	Nuclear Fallout Producing Event		Point	28**16**00
	Radiological Event		Point	28**17**00
	General Decontamination Point/Site		Point	28**18**00
		Alternate	Point	2818**01**
		Equipment	Point	2818**02**
		Troop	Point	2818**03**
		Equipment/Troop	Point	2818**04**
		Operational	Point	2818**05**
		Thorough	Point	2818**06**
		Main Equipment	Point	2818**07**
		Forward Troop	Point	2818**08**
		Wounded Personnel	Point	2818**09**
	Tetrahedrons, Dragons Teeth, and Other Similar Obstacles			28**19**00
		Fixed and Prefabricated	Point	2819**01**
		Movable	Point	2819**02**
		Movable and Prefabricated	Point	2819**03**
	Vertical Obstructions			28**20**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Tower, Low	Point	2820**01**
		Tower, High	Point	2820**02**
		Overhead Wire	Line	2820**03**
Protection Lines				**29**0000
	Obstacle Line		Line	29**01**00
		Mineline	Line	2901**01**
	Antitank Obstacles			29**02**00
		Ditch Under Construction	Line	2902**01**
		Ditch Completed	Line	2902**02**
		Ditch Reinforced, with Antitank Mines	Line	2902**03**
		Antitank Wall	Line	2902**04**
	Wire Obstacles			29**03**00
		Unspecified	Line	2903**01**
		Single Fence	Line	2903**02**
		Double Fence	Line	2903**03**
		Double Apron Fence	Line	2903**04**
		Low Wire Fence	Line	2903**05**
		High Wire Fence	Line	2903**06**
		Single Concertina	Line	2903**07**
		Double Strand Concertina	Line	2903**08**
		Triple Strand Concertina	Line	2903**09**
	Mine Cluster		Area	29**04**00
	Trip Wire		Line	29**05**00
	Lane		Line	29**06**00
	Ferry		Line	29**07**00
	Raft Site		Line	29**08**00
	Fortified Line		Line	29**09**00
	Fighting Position		Line	29**10**00
Intelligence Lines				**30**0000
	Intelligence Coordination Line		Line	30**01**00
Sustainment Areas				**31**0000
	Detainee Holding Area		Area	31**01**00
	Enemy Prisoner of War (EPW) Holding Area		Area	31**02**00
	Forward Arming and Refueling Point (FARP)		Area	31**03**00
	Refugee Holding Area		Area	31**04**00
	Regimental Support Area		Area	31**05**00
	Brigade Support Area		Area	31**06**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Division Support Area		Area	31**07**00
	Corps Support Area		Area	31**08**00
Sustainment Points				**32**0000
	Ambulance Points		Point	32**01**00
		Ambulance Exchange Point	Point	3201**01**
		Ambulance Control Point	Point	3201**02**
		Ambulance Load Point	Point	3201**03**
		Ambulance Relay Point	Point	3201**04**
	Ammunition Supply Point		Point	32**02**00
	Ammunition Transfer and Holding Point		Point	32**03**00
	Cannibalization Point		Point	32**04**00
	Casualty Collection Point		Point	32**05**00
	Civilian Collection Point		Point	32**06**00
	Detainee Collection Point		Point	32**07**00
	Enemy Prisoner of War (EPW) Collection Point		Point	32**08**00
	Logistics Release Point (LRP)		Point	32**09**00
	Maintenance Collection Point (MCP)		Point	32**10**00
	Medical Evacuation Point (MEDEVAC) Pick-Up Point		Point	32**11**00
	Rearm, Refuel and Resupply Point (R3P)		Point	32**12**00
	Refuel on the Move (ROM) Point		Point	32**13**00
	Traffic Control Post (TCP)		Point	32**14**00
	Trailer Transfer Point (TTP)		Point	32**15**00
	Unit Maintenance Collection Point (UNCP)		Point	32**16**00
	General Supply Point		Point	32**17**00
		NATO Class I	Point	3217**01**
		NATO Class II	Point	3217**02**
		NATO Class III	Point	3217**03**
		NATO Class IV	Point	3217**04**
		NATO Class V	Point	3217**05**
		NATO Multiple Class	Point	3217**06**
		US Class I	Point	3217**07**
		US Class II	Point	3217**08**
		US Class III	Point	3217**09**
		US Class IV	Point	3217**10**
		US Class V	Point	3217**11**
		US Class VI	Point	3217**12**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		US Class VII	Point	3217**13**
		US Class VIII	Point	3217**14**
		US Class IX	Point	3217**15**
		US Class X	Point	3217**16**
	Medical Supply Point		Point	32**18**00
	Mortuary Affairs Collection Point		Point	32**19**00
Sustainment Lines				**33**0000
	Moving Convoy		Line	33**01**00
	Halted Convoy		Line	33**02**00
	Main Supply Route (MSR)		Line	33**03**00
		One Way Traffic	Line	33030**1**
		Two Way Traffic	Line	33030**2**
		Alternating Traffic	Line	33030**3**
	Alternate Supply Route (ASR)		Line	33**04**00
		One Way Traffic	Line	33040**1**
		Two Way Traffic	Line	33040**2**
		Alternating Traffic	Line	33040**3**
	Traffic Route		Line	33**05**00
		One Way Traffic	Line	33050**1**
		Alternating Traffic	Line	33050**2**
Mission Tasks				**34**0000
	Block		Area	34**01**00
	Breach		Line	34**02**00
	Bypass		Point	34**03**00
	Canalize		Point	34**04**00
	Clear		Line	34**05**00
	Counterattack		Line	34**06**00
	Counterattack by Fire		Line	34**07**00
	Delay		Line	34**08**00
	Destroy		Point	34**09**00
	Disrupt		Area	34**10**00
	Fix		Line	34**11**00
	Follow and Assume		Line	34**12**00
	Follow and Support		Line	34**13**00
	Interdict		Point	34**14**00
	Isolate		Area	34**15**00
	Neutralize		Point	34**16**00
	Occupy		Area	34**17**00
	Penetrate		Area	34**18**00
	Relief in Place (RIP)		Area	34**19**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXV. Control measures and planning symbols entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Retire/Retirement		Line	34**20**00
	Secure		Area	34**21**00
	Security			34**22**00
		Cover	Line	3422**01**
		Guard	Line	3422**02**
		Screen	Line	3422**03**
	Seize		Line	34**23**00
	Withdraw		Line	34**24**00
	Withdraw Under Pressure		Line	34**25**00
	Cordon and Knock		Area	34**26**00
	Cordon and Search		Area	34**27**00
	Suppress		Point	34**28**00
	Movement to Contact		Line	34**29**00
	Exploit/Exploitation		Line	34**31**00
	Demonstrate/Demonstration		Area	34**33**00
	Envelopment		Line	34**35**00
	Infiltration		Line	34**38**00
	Pursuit		Line	34**40**00
	Forward Passage of Lines		Line	34**41**00
	Rearward Passage of Lines		Line	34**42**00
	Defeat		Point	34**43**00
	Disengage		Line	34**44**00
	Evacuate/Evacuation		Line	34**45**00
	Turn		Line	34**47**00

TABLE A-XXXVI. Control Measures sector 1 modifier.

Sector 1 Modifier	Capability	Value	Remarks
Unspecified		00	
Wheeled limited cross country	Mobility	01	
Wheeled cross country	Mobility	02	
Tracked	Mobility	03	
Wheeled and tracked combination	Mobility	04	
Towed	Mobility	05	
Rail	Mobility	06	
Over-Snow	Mobility	07	
Sled	Mobility	08	
Pack Animals	Mobility	09	
Barge	Mobility	10	
Amphibious	Mobility	11	
No Vehicles	Mobility	12	
Unspecified Mine	Obstacles	13	
Antipersonnel Mine	Obstacles	14	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXVI. Control Measures sector 1 modifier - Continued.

Sector 1 Modifier	Capability	Value	Remarks
Antipersonnel Mine with Directional Effects	Obstacles	15	
Antitank Mine	Obstacles	16	
Antitank Mine with Antihandling Device	Obstacles	17	
Wide Area Antitank Mine	Obstacles	18	
Mine Cluster	Obstacles	19	
Antipersonnel Mine and Antipersonnel Mine with Directional Effects	Obstacles	20	
Antipersonnel Mine and Antitank Mine	Obstacles	21	
Antipersonnel Mine and Antitank Mine with Antihandling Device	Obstacles	22	
Antipersonnel Mine and Wide Area Antitank Mine	Obstacles	23	
Antipersonnel Mine and Mine Cluster	Obstacles	24	
Antipersonnel Mine with Directional Effects and Antitank Mine	Obstacles	25	
Antipersonnel Mine with Directional Effects and Antitank Mine with Antihandling Device	Obstacles	26	
Antipersonnel Mine with Directional Effects and Wide Area Antitank Mine	Obstacles	27	
Antipersonnel Mine with Directional Effects and Mine Cluster	Obstacles	28	
Antitank Mine and Antitank Mine with Antihandling Device	Obstacles	29	
Antitank Mine and Wide Area Antitank Mine	Obstacles	30	
Antitank Mine and Mine Cluster	Obstacles	31	
Antitank Mine with Antihandling Device and Wide Area Antitank Mine	Obstacles	32	
Antitank Mine with Antihandling Device and Mine Cluster	Obstacles	33	
Wide Area Antitank Mine and Mine Cluster	Obstacles	34	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine	Obstacles	35	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine with Antihandling Device	Obstacles	36	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Wide Area Antitank Mine	Obstacles	37	
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Mine Cluster	Obstacles	38	
Antipersonnel Mine, Antitank Mine, and Antitank Mine with Antihandling Device	Obstacles	39	
Antipersonnel Mine, Antitank Mine, and Wide Area Antitank Mine	Obstacles	40	
Antipersonnel Mine, Antitank Mine, and Mine Cluster	Obstacles	41	
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine	Obstacles	42	
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Mine Cluster	Obstacles	43	
Antipersonnel Mine, Wide Area Antitank Mine, and Mine Cluster	Obstacles	44	
Antipersonnel Mine with Directional Effects, Antitank Mine, and Antitank Mine with Antihandling Device	Obstacles	45	
Antipersonnel Mine with Directional Effects, Antitank Mine, and Wide Area Antitank Mine	Obstacles	46	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXVI. Control Measures sector 1 modifier - Continued.

Sector 1 Modifier	Capability	Value	Remarks
Antipersonnel Mine with Directional Effects, Antitank Mine, and Mine Cluster	Obstacles	47	
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine	Obstacles	48	
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Mine Cluster	Obstacles	49	
Antipersonnel Mine with Directional Effects, Wide Area Antitank Mine, and Mine Cluster	Obstacles	50	

TABLE A-XXXVII. Control Measures sector 2 modifier.

Sector 2 Modifier	Capability	Value	Remarks
Unspecified		00	

A.5.4.11 Dismounted individual (27).

TABLE A-XXXVIII. Dismounted individual.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Military			**11**0000
	Activity/Task		11**02**00
		Explosive Ordnance Disposal	1102**01**
		Field Artillery Observer	1102**02**
		Joint Fire Support	1102**03**
		Liaison	1102**04**
		Messenger	1102**05**
		Military Police	1102**06**
		Observer	1102**07**
		Security	1102**08**
		Sniper	1102**09**
		Special Operation Forces	1102**10**
		Designated Marksman	1102**11**
		Medic	1102**12**
		Signaler	1102**13**
		Reconnaissance	1102**14**
		Infantry	1102**15**
		Close Protection	1102**16**
		Crowd and Riot Control	1102**17**
		SWAT	1102**18**
		Demolition	1102**19**
		Commander (CDR)	1102**20**
		Second in Command (SIC)	1102**21**
	Lethal Weapons		11**03**00
		Rifle	1103**01**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XXXVIII. Dismounted individual - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Single Shot Rifle	1103**02**
		Semiautomatic Rifle	1103**03**
		Automatic Rifle	1103**04**
		Machine Gun	1103**05**
		Machine Gun - Light	1103**06**
		Machine Gun - Medium	1103**07**
		Machine Gun - Heavy	1103**08**
		Grenade Launcher	1103**09**
		Grenade Launcher - Light	1103**10**
		Grenade Launcher - Medium	1103**11**
		Grenade Launcher - Heavy	1103**12**
		Flame Thrower	1103**13**
		Mortar	1103**14**
		Single Rocket Launcher	1103**15**
		Antitank Rocket Launcher	1103**16**
	Non-Lethal Weapons		11**04**00
		Non-Lethal Weapon	1104**01**
		Non-Lethal Grenade Launcher	1104**02**
		Taser	1104**03**

TABLE A-XXXIX. Dismounted individual sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Field Artillery Observer	Capability	11	
Joint Fire Support	Capability	12	
Liaison	Capability	13	
Messenger	Capability	14	
Military Police	Capability	15	
Observer	Capability	16	
Designated Marksman	Capability	17	
Reconnaissance	Capability	21	
Infantry	Capability	22	
Commander (CDR)	Capability	23	
Second in Command (SIC)	Capability	24	
Demolition	Capability	25	
Police	Capability	26	
Individual		46	

TABLE A-XL. Dismounted individual sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Video Imagery (Combat Camera)	Capability	03	
Functional Staff Area J1	Command Level	04	
Functional Staff Area J2	Command Level	05	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XL. Dismounted individual sector 2 modifier - Continued.

Sector 2 Modifier	Category	Value	Remarks
Functional Staff Area J3	Command Level	06	
Functional Staff Area J4	Command Level	07	
Functional Staff Area J5	Command Level	08	
Functional Staff Area J6	Command Level	09	
Functional Staff Area J7	Command Level	10	
Functional Staff Area J8	Command Level	11	
Functional Staff Area J9	Command Level	12	
Rank OF-1/O-2	Command Level	14	
Rank OF-3	Command Level	15	
Rank OF-4	Command Level	16	
Rank OF-5	Command Level	17	
Rank OF-6	Command Level	18	
Rank OF-7	Command Level	19	
Rank OF-8	Command Level	20	
Rank OF-9	Command Level	21	
Rank OF-10	Command Level	22	
Rank OF-11	Command Level	23	
Rank E-1	Command Level	25	
Rank E-2	Command Level	26	
Rank E-3	Command Level	27	
Rank E-4	Command Level	28	
Rank E-5	Command Level	29	
Rank E-6	Command Level	30	
Rank E-7	Command Level	31	
Rank E-8	Command Level	32	
Rank E-9	Command Level	33	
Rank WO-1	Command Level	34	
Rank WO-2	Command Level	35	
Rank WO-3	Command Level	36	
Rank WO-4	Command Level	37	
Rank WO-5	Command Level	38	

A.5.4.12 Sea surface (30).

TABLE A-XLI. Sea surface entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Military			**11**0000
Military Combatant			**12**0000
	Carrier		12**01**00
	Surface Combatant, Line		12**02**00
		Battleship	120201
		Cruiser	120202
		Destroyer	120203
		Frigate	120204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLI. Sea surface entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Corvette	1202**05**
		Littoral Combatant Ship	1202**06**
	Amphibious Warfare Ship		12**03**00
		Amphibious Command Ship	1203**01**
		Amphibious Assault, Non-specified	1203**02**
		Amphibious Assault Ship, General	1203**03**
		Amphibious Assault Ship, Multipurpose	1203**04**
		Amphibious Assault Ship, Helicopter	1203**05**
		Amphibious Transport Dock	1203**06**
		Landing Ship	1203**07**
		Landing Craft	1203**08**
	Mine Warfare Ship		12**04**00
		Mine Layer	1204**01**
		Mine Sweeper	1204**02**
		Mine Sweeper, Drone	1204**03**
		Mine Hunter	1204**04**
		Mine Countermeasures	1204**05**
		Mine Countermeasures, Support Ship	1204**06**
	Patrol Boat		12**05**00
		Patrol Craft, Submarine Chaser/Escort, General	1205**01**
		Patrol Ship, General	1205**02**
	Decoy		12**06**00
	Unmanned Surface Water Vehicle (USV)		12**07**00
	Speedboat		12**08**00
		Rigid–Hull Inflatable Boat (RHIB)	1208**01**
	Jet Ski		12**09**00
	Navy Task Organization		12**10**00
		Navy Task Element	1210**01**
		Navy Task Force	1210**02**
		Navy Task Group	1210**03**
		Navy Task Unit	1210**04**
		Convoy	1210**05**
	Sea-Based X-Band Radar		12**11**00
	Tactical Air Navigation (TACAN)		12**12**00
Military Non Combatant			**13**0000
	Auxiliary Ship		13**01**00
		Ammunition Ship	1301**01**
		Naval Stores Ship	1301**02**
		Auxiliary Flag Ship	1301**03**
		Intelligence Collector	1301**04**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLI. Sea surface entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Oceanographic Research Ship	1301**05**
		Survey Ship	1301**06**
		Hospital Ship	1301**07**
		Naval Cargo Ship	1301**08**
		Combat Support Ship, Fast	1301**09**
		Oiler, Replenishment	1301**10**
		Repair Ship	1301**11**
		Submarine Tender	1301**12**
		Tug, Ocean Going	1301**13**
	Service Craft/Yard		1**302**00
		Barge, not Self–Propelled	1302**01**
		Barge, Self–Propelled	1302**02**
		Tug, Harbor	1302**03**
		Launch	1302**04**
Civilian			**14**0000
	Merchant Ship		1**401**00
		Cargo, General	1401**01**
		Container Ship	1401**02**
		Dredge	1401**03**
		Roll On/Roll Off	1401**04**
		Ferry	1401**05**
		Heavy Lift	1401**06**
		Hovercraft	1401**07**
		Lash Carrier (with Barges)	1401**08**
		Oiler/Tanker	1401**09**
		Passenger	1401**10**
		Tug, Ocean Going	1401**11**
		Tow	1401**12**
		Transport Ship, Hazardous Material	1401**13**
		Junk/Dhow	1401**14**
		Barge, not Self–Propelled	1401**15**
		Hospital Ship	1401**16**
	Fishing Vessel		1**402**00
		Drifter	1402**01**
		Trawler	1402**02**
		Dredger	1402**03**
	Law Enforcement Vessel		1**403**00
	Leisure Craft, Sailing		1**404**00
	Leisure Craft, Motorized		1**405**00
		Rigid–Hull Inflatable Boat (RHIB)	1405**01**
		Speedboat	1405**02**
	Jet Ski		1**406**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLI. Sea surface entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Unmanned Surface Water Vehicle (USV)		14**07**00
Own Ship			**15**0000
Fused Track			**16**0000
Manual Track			**17**0000

TABLE A-XLII. Sea surface sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified	Mission Area	00	
Antiair Warfare	Mission Area	02	
Missile Defense	Mission Area	08	
Remote Multi-mission Vehicle (RMV)	Mission Area	11	
Torpedo	Weapons Capability	17	
Ballistic Missile Defense, Long-Range Surveillance and Track (LRS&T)	Mission Area	21	
Sea-Base X-Band	Mission Area	22	

TABLE A-XLIII. Sea surface sector 2 modifier .

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Nuclear Powered	Ship Propulsion	01	
Dock	Cargo Capacity	05	
Logistics	Cargo Capacity	06	
Tank	Cargo Capacity	07	
Vehicle	Cargo Capacity	08	
Fast	Ship Mobility	09	
Air–Cushioned (US)	Ship Mobility	10	
Air–Cushioned (NATO)	Ship Mobility	11	
Hydrofoil	Ship Mobility	12	

A.5.4.13 Sea subsurface (35).

TABLE A-XLIV. Sea subsurface entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Military			**11**0000
	Submarine		11**01**00
		Submarine, Surfaced	1101**01**
		Submarine, Snorkeling	1101**02**
		Submarine, Bottomed	1101**03**
	Other Submersible		11**02**00
	Nonsubmarine		11**03**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLIV. Sea subsurface entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Unmanned Underwater Vehicle (UUV)		11**04**00
	Diver		11**05**00
Civilian			**12**0000
	Submersible		12**01**00
	Unmanned Underwater Vehicle (UUV)		12**02**00
	Diver		12**03**00
Weapon			**13**0000
	Torpedo		13**01**00
	Improvised Explosive Device (IED)		13**02**00
	Decoy		13**03**00
Echo Tracker Classifier (ETC) / Possible Contact (POSCON)			**14**0000
Fused Track			**15**0000
Manual Track			**16**0000

TABLE A-XLV. Sea subsurface sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Auxiliary	Mission Area	02	
Possible Submarine Low 1	Submarine Confidence	13	
Possible Submarine Low 2	Submarine Confidence	14	
Possible Submarine High 3	Submarine Confidence	15	
Possible Submarine High 4	Submarine Confidence	16	
Probable Submarine	Submarine Confidence	17	
Certain Submarine	Submarine Confidence	18	
Anti-torpedo Torpedo	Weapons Capability	19	

TABLE A-XLVI. Sea subsurface sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Air Independent Propulsion	Ship Propulsion	01	
Diesel Electric, General	Ship Propulsion	02	
Diesel – Type 1	Ship Propulsion	03	
Diesel – Type 2	Ship Propulsion	04	
Diesel – Type 3	Ship Propulsion	05	
Nuclear Powered, General	Ship Propulsion	06	
Nuclear – Type 1	Ship Propulsion	07	
Nuclear – Type 2	Ship Propulsion	08	
Nuclear – Type 3	Ship Propulsion	09	
Nuclear – Type 4	Ship Propulsion	10	
Nuclear – Type 5	Ship Propulsion	11	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVI. Sea subsurface sector 2 modifier - Continued.

Nuclear – Type 6	Ship Propulsion	12	
Nuclear – Type 7	Ship Propulsion	13	

A.5.4.14 Mine warfare (36).

TABLE A-XLVII. Mine warfare entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Sea Mine, General			**11**0000
	Sea Mine, Bottom		11**01**00
	Sea Mine, Moored		11**02**00
	Sea Mine, Floating		11**03**00
	Sea Mine, Rising		11**04**00
	Sea Mine, Other Position		11**05**00
	Small Object, Mine–Like		11**07**00
	Exercise Mine, General		11**08**00
		Exercise Mine, Bottom	1108**01**
		Exercise Mine, Moored	1108**02**
		Exercise Mine, Floating	1108**03**
		Exercise Mine, Rising	1108**04**
	Neutralized Mine, General		11**09**00
		Neutralized Mine, Bottom	1109**01**
		Neutralized Mine, Moored	1109**02**
		Neutralized Mine, Floating	1109**03**
		Neutralized Mine, Rising	1109**04**
		Neutralized Mine, Other Position	1109**05**
Unexploded Ordnance			**12**0000
Sea Mine Decoy			**13**0000
	Sea Mine Decoy, Bottom		13**01**00
	Sea Mine Decoy, Moored		13**02**00
Mine–Like Contact (MILCO)			**14**0000
	MILCO - General		14**01**00
		MILCO - General, Confidence Level 1	1401**01**
		MILCO - General, Confidence Level 2	1401**02**
		MILCO - General, Confidence Level 3	1401**03**
		MILCO - General, Confidence Level 4	1401**04**
		MILCO - General, Confidence Level 5	1401**05**
	MILCO - Bottom		14**02**00
		MILCO - Bottom, Confidence Level 1	1402**01**
		MILCO - Bottom, Confidence Level 2	1402**02**
		MILCO - Bottom, Confidence Level 3	1402**03**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVII. Mine warfare entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		MILCO - Bottom, Confidence Level 4	1402**04**
		MILCO - Bottom, Confidence Level 5	1402**05**
	MILCO - Moored		14**03**00
		MILCO - Moored, Confidence Level 1	1403**01**
		MILCO - Moored, Confidence Level 2	1403**02**
		MILCO - Moored, Confidence Level 3	1403**03**
		MILCO - Moored, Confidence Level 4	1403**04**
		MILCO - Moored, Confidence Level 5	1403**05**
	MILCO - Floating		14**04**00
		MILCO - Floating, Confidence Level 1	1404**01**
		MILCO - Floating, Confidence Level 2	1404**02**
		MILCO - Floating, Confidence Level 3	1404**03**
		MILCO - Floating, Confidence Level 4	1404**04**
		MILCO - Floating, Confidence Level 5	1404**05**
Mine–Like Echo (MILEC), General			**15**0000
	Mine–Like Echo, Bottom		15**01**00
	Mine–Like Echo, Moored		15**02**00
	Mine–Like Echo, Floating		15**03**00
Negative Reacquisition, General			**16**0000
	Negative Reacquisition, Bottom		16**01**00
	Negative Reacquisition, Moored		16**02**00
	Negative Reacquisition, Floating		16**03**00
Obstructor			**17**0000
	Neutralized Obstructor		17**01**00
General Mine Anchor			**18**0000
Non-Mine Mine–Like Object (NMLO), General			**19**0000
	Non-Mine Mine–Like Object, Bottom		19**01**00
	Non-Mine Mine–Like Object, Moored		19**02**00
	Non-Mine Mine–Like Object, Floating		19**03**00
Environmental Report Location			**20**0000
Dive Report Location			**21**0000

A.5.4.15 Activities (40).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVIII. Activities entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Incident			**11**0000
	Criminal Activity Incident		11**01**00
		Arrest/Apprehend/Detain	1101**01**
		Arson	1101**02**
		Drive-by Shooting	1101**04**
		Extortion	1101**06**
		Graffiti	1101**07**
		Killing	1101**08**
		Poisoning	1101**09**
		Civil Rioting	1101**10**
		Booby Trap	1101**11**
		Black Marketing	1101**13**
		Vandalism/Loot/Ransack/Plunder	1101**14**
		Jail Break	1101**15**
		Robbery	1101**16**
		Theft	1101**17**
		Burglary	1101**18**
		Smuggling	1101**19**
		Rock Throwing	1101**20**
		Dead Body	1101**21**
		Sabotage	1101**22**
		Suspicious Activity	1101**23**
	Bomb/Bombing		11**02**00
		Bomb Threat	1102**01**
	IED Event		11**03**00
		IED Explosion	1103**01**
		Premature IED Explosion	1103**02**
		IED Cache	1103**03**
		IED Suicide Bomber	1103**04**
	Shooting		11**04**00
		Sniping	1104**01**
	Drug Operation		11**05**00
		Trafficking	1105**01**
	Explosion		11**06**00
		Grenade Explosion	1106**01**
		Incendiary Explosion	1106**02**
		Mine Explosion	1106**03**
		Mortar Fire Explosion	1106**04**
		Rocket Explosion	1106**05**
		Bomb Explosion	1106**06**
	Home/House		11**07**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVIII. Activities entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Civil Disturbance			**12**0000
	Demonstration		12**01**00
Operation			**13**0000
	Patrolling		13**01**00
	Military Information Support Operation (MISO)		13**02**00
		Communication Propaganda	1302**01**
	Foraging/Searching		13**03**00
	Recruitment		13**04**00
		Willing	1304**01**
		Unwilling/Coerced	1304**02**
	Mine Laying		13**05**00
	Spy		13**06**00
	Warrant Served		13**07**00
	Exfiltration		13**08**00
	Infiltration		13**09**00
	Meeting		13**10**00
		Polling Place/Election	1310**01**
	Emergency Operation		13**12**00
		Emergency Collection Evacuation Point	1312**01**
		Emergency Food Distribution	1312**02**
		Emergency Incident Command Center	1312**03**
		Emergency Operations Center	1312**04**
		Emergency Public Information Center	1312**05**
		Emergency Shelter	1312**06**
		Emergency Staging Area	1312**07**
		Emergency Water Distribution Center	1312**08**
	Emergency Medical Operation		13**13**00
		EMT Station Location	1313**01**
		Health Department	1313**02**
		Medical Facilities Outpatient	1313**03**
		Morgue	1313**04**
		Pharmacy	1313**05**
		Triage	1313**06**
	Fire Fighting Operation		13**14**00
		Fire Hydrant	1314**01**
		Other Water Supply Location	1314**03**
	Law Enforcement Operation		13**15**00
		Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice)	1315**01**
		Border Patrol	1315**02**
		Customs Service	1315**03**
		Drug Enforcement Administration (DEA)	1315**04**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVIII. Activities entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
		Department of Justice (DOJ)	131**505**
		Federal Bureau of Investigation (FBI)	131**506**
		Police	131**507**
		Prison	131**508**
		United States Secret Service (USSS)	131**509**
		Transportation Security Administration (TSA)	131**510**
		Coast Guard	131**511**
		US Marshals Service	131**512**
		Internal Security Force	131**513**
Fire Event			**14**0000
	Fire Origin		14**01**00
	Smoke		14**02**00
	Hot Spot		14**03**00
	Non-Residential Fire		14**04**00
	Residential Fire		14**05**00
	School Fire		14**06**00
	Special Needs Fire		14**07**00
	Wildfire		14**08**00
Hazardous Materials			**15**0000
	Hazardous Materials Incident		15**01**00
		Chemical Agent	15010**1**
		Corrosive Material	15010**2**
		Hazardous when Wet	15010**3**
		Explosive Material	15010**4**
		Flammable Gas	15010**5**
		Flammable Liquid	15010**6**
		Flammable Solid	15010**7**
		Non-Flammable Gas	15010**8**
		Organic Peroxide	15010**9**
		Oxidizer	15011**0**
		Radioactive Material	15011**1**
		Spontaneously Combustible Material	15011**2**
		Toxic Gas	15011**3**
		Toxic Infectious Material	15011**4**
		Unexploded Ordnance	15011**5**
Transportation Incident			**16**0000
	Air		16**01**00
	Marine		16**02**00
	Rail		16**03**00
	Vehicle		16**04**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-XLVIII. Activities entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Wheeled Vehicle Explosion		16**05**00
Natural Event			**17**0000
	Geologic		17**01**00
		Aftershock	17010**1**
		Avalanche	17010**2**
		Earthquake Epicenter	17010**3**
		Landslide	17010**4**
		Subsidence	17010**5**
		Volcanic Eruption	17010**6**
		Volcanic Threat	17010**7**
		Cave Entrance	17010**8**
	Hydro-Meteorological		17**02**00
		Drought	17020**1**
		Flood	17020**2**
		Tsunami	17020**3**
	Infestation		17**03**00
		Bird	17030**1**
		Insect	17030**2**
		Microbial	17030**3**
		Reptile	17030**4**
		Rodent	17030**5**
Individual			**18**0000
	Religious Leader		18**01**00
	Speaker		18**02**00

TABLE A-XLIX. Activities sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
House–to–House	MISO	04	
Murder	Crime	06	
Written Military Information Support Operations	MISO	09	
Pirate	Crime	10	
False	IED	11	
Find	IED	12	
Found and Cleared	IED	13	
Hoax (Decoy)	IED	14	
Attempted	Incident	15	
Incident	Incident	17	
Theft	Crime	18	
Eviction	Incident	21	
Raid	Incident	22	
Meeting	Incident	24	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-L. Activities sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Meeting	Incident	04	

A.5.4.16 Atmospheric (45).

TABLE A-LI. Atmospheric entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
Pressure Systems				**11**0000
	Low Pressure Center		Point	11**01**00
		Cyclone Center	Point	1101**01**
		Tropopause Low	Point	1101**02**
	High Pressure Center		Point	11**02**00
		Anticyclone Center	Point	1102**01**
		Tropopause High	Point	1102**02**
	Frontal Systems		Point	11**03**00
		Cold Front	Line	1103**01**
		Upper Cold Front	Line	1103**02**
		Cold Frontogenesis	Line	1103**03**
		Cold Frontolysis	Line	1103**04**
		Warm Front	Line	1103**05**
		Upper Warm Front	Line	1103**06**
		Warm Frontogenesis	Line	1103**07**
		Warm Frontolysis	Line	1103**08**
		Occluded Front	Line	1103**09**
		Upper Occluded Front	Line	1103**10**
		Occluded Frontolysis	Line	1103**11**
		Stationary Front	Line	1103**12**
		Upper Stationary Front	Line	1103**13**
		Stationary Frontogenesis	Line	1103**14**
		Stationary Frontolysis	Line	1103**15**
	Lines			11**04**00
		Trough Axis	Line	1104**01**
		Trough	Line	1104**02**
		Ridge Axis	Line	1104**03**
		Severe Squall Line	Line	1104**04**
		Instability Line	Line	1104**05**
		Shear Line	Line	1104**06**
		Inter–Tropical Convergence Zone	Line	1104**07**
		Convergence Line	Line	1104**08**
		Inter–Tropical Discontinuity	Line	1104**09**
	Pressure Tendency			11**05**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LI. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Rise Then Fall Higher	Point	110**501**
		Rise Then Steady	Point	110**502**
		Rise	Point	110**503**
		Rise Then Rise Higher	Point	110**504**
		Steady	Point	110**505**
		Fall Then Rise Lower	Point	110**506**
		Fall Then Steady	Point	110**507**
		Fall	Point	110**508**
		Rise Then Fall Lower	Point	110**509**
Turbulence				**12**0000
	Light		Point	12**01**00
	Moderate		Point	12**02**00
	Severe		Point	12**03**00
	Extreme		Point	12**04**00
	Mountain Waves		Point	12**05**00
Icing				**13**0000
	Clear Icing			13**01**00
		Light	Point	13010**1**
		Moderate	Point	13010**2**
		Severe	Point	13010**3**
	Rime Icing			13**02**00
		Light	Point	13020**1**
		Moderate	Point	13020**2**
		Severe	Point	13020**3**
	Mixed Icing			13**03**00
		Light	Point	13030**1**
		Moderate	Point	13030**2**
		Severe	Point	13030**3**
Winds				**14**0000
	Calm Winds		Point	14**01**00
	Jet Stream		Line	14**03**00
	Stream Line		Line	14**04**00
Cloud Cover				**15**0000
	Cloud Coverage Symbols			15**01**00
		Clear Sky	Point	15010**1**
		Few Coverage	Point	15010**2**
		Scattered Coverage	Point	15010**3**
		Broken Coverage	Point	15010**4**
		Overcast Coverage	Point	15010**5**
		Sky Totally or Partially Obscured	Point	15010**6**
Weather Symbols				**16**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LI. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Rain			16**01**00
		Intermittent Light	Point	1601**01**
		Continuous Light	Point	1601**02**
		Intermittent Moderate	Point	1601**03**
		Intermittent Moderate/ Continuous Moderate	Point	1601**04**
		Intermittent Heavy	Point	1601**05**
		Intermittent Heavy/ Continuous Heavy	Point	1601**06**
	Freezing Rain			16**02**00
		Light	Point	1602**01**
		Moderate/Heavy	Point	1602**02**
	Rain Showers			16**03**00
		Light	Point	1603**01**
		Moderate/Heavy	Point	1603**02**
		Torrential	Point	1603**03**
	Drizzle			16**04**00
		Intermittent Light	Point	1604**01**
		Intermittent Light/ Continuous Light	Point	1604**02**
		Intermittent Moderate	Point	1604**03**
		Intermittent Moderate/ Continuous Moderate	Point	1604**04**
		Intermittent Heavy	Point	1604**05**
		Intermittent Heavy/ Continuous Heavy	Point	1604**06**
	Freezing Drizzle			16**05**00
		Light	Point	1605**01**
		Moderate/Heavy	Point	1605**02**
	Rain and Snow Mixed			16**06**00
		Rain or Drizzle and Snow – Light	Point	1606**01**
		Rain or Drizzle and Snow – Moderate/Heavy	Point	1606**02**
		Rain and Snow Showers – Light	Point	1606**03**
		Rain and Snow Showers – Moderate/Heavy	Point	1606**04**
	Snow			16**07**00
		Intermittent Light	Point	1607**01**
		Intermittent Light/ Continuous Light	Point	1607**02**
		Intermittent Moderate	Point	1607**03**
		Intermittent Moderate/ Continuous Moderate	Point	1607**04**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LI. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Intermittent Heavy	Point	160**705**
		Intermittent Heavy/ Continuous Heavy	Point	160**706**
		Blowing Snow – Light/ Moderate	Point	160**707**
		Blowing Snow – Heavy	Point	160**708**
	Snow Grains		Point	16**0800**
	Snow Showers			16**0900**
		Light	Point	160**901**
		Moderate/Heavy	Point	160**902**
	Hail			16**1000**
		Light not Associated with Thunder	Point	161**001**
		Moderate/Heavy not Associated with Thunder	Point	161**002**
	Ice Crystals (Diamond Dust)		Point	16**1100**
	Ice Pellets (Sleet)			16**1200**
		Light	Point	161**201**
		Moderate	Point	161**202**
		Heavy	Point	161**203**
	Inversion		Point	16**1300**
	Storms			16**1400**
		Thunderstorm – No Precipitation	Point	161**401**
		Thunderstorm Light to Moderate with Rain/Snow – No Hail	Point	161**402**
		Thunderstorm Heavy with Rain/Snow – No Hail	Point	161**403**
		Thunderstorm Light to Moderate – with Hail	Point	161**404**
		Thunderstorm Heavy – with Hail	Point	161**405**
		Funnel Cloud (Tornado/Waterspout)	Point	161**406**
		Squall	Point	161**407**
		Lightning	Point	161**408**
	Fog			16**1500**
		Shallow Patches	Point	161**501**
		Shallow Continuous	Point	161**502**
		Patchy	Point	161**503**
		Sky Visible	Point	161**504**
		Sky Obscured	Point	161**505**
		Freezing, Sky Visible	Point	161**506**
		Freezing, Sky Obscured	Point	161**507**
	Mist		Point	16**1600**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LI. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Smoke		Point	16**17**00
	Haze		Point	16**18**00
	Dust or Sand			16**19**00
		Light to Moderate	Point	1619**01**
		Severe	Point	1619**02**
		Dust Devil	Point	1619**03**
		Blowing Dust or Sand	Point	1619**04**
	Tropical Storm Systems			16**20**00
		Tropical Depression	Point	1620**01**
		Tropical Storm	Point	1620**02**
		Hurricane/Typhoon	Point	1620**03**
		Tropical Storm Wind Areas and Date/Time Labels	Area	1620**04**
	Volcanic Eruption		Point	16**21**00
		Volcanic Ash	Point	1621**01**
	Tropopause Level		Point	16**22**00
	Freezing Level		Point	16**23**00
	Precipitation of Unknown Type and Intensity		Point	16**24**00
Bounded Areas of Weather				**17**0000
	Instrument Flight Rule (IFR)		Area	17**01**00
	Marginal Visual Flight Rule (MVFR)		Area	17**02**00
	Turbulence		Area	17**03**00
	Icing		Area	17**04**00
	Liquid Precipitation – Non-Convective Continuous or Intermittent		Area	17**05**00
		Liquid Precipitation – Convective	Area	1705**01**
	Freezing /Frozen Precipitation		Area	17**06**00
	Thunderstorm		Area	17**07**00
	Fog		Area	17**08**00
	Dust or Sand		Area	17**09**00
	Operator–Defined Freeform		Area	17**10**00
Isopleths				**18**0000
	Isobar – Surface		Line	18**01**00
	Contour – Upper Air		Line	18**02**00
	Isotherm		Line	18**03**00
	Isotach		Line	18**04**00
	Isodrosotherm		Line	18**05**00
	Thickness		Line	18**06**00
	Operator–Defined Freeform		Line	18**07**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LI. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
State of the Ground				**19**0000
	Without Snow or Measurable Ice Cover			19**01**00
		Surface Dry Without Cracks or Appreciable Dust or Loose Sand	Point	1901**01**
		Surface Moist	Point	1901**02**
		Surface Wet, Standing Water in Small or Large Pools	Point	1901**03**
		Surface Flooded	Point	1901**04**
		Surface Frozen	Point	1901**05**
		Glaze (Thin Ice) on Ground	Point	1901**06**
		Loose Dry Dust or Sand not Covering Ground Completely	Point	1901**07**
		Thin Loose Dry Dust or Sand Covering Ground Completely	Point	1901**08**
		Moderate/Thick Loose Dry Dust or Sand Covering Ground Completely	Point	1901**09**
		Extremely Dry with Cracks	Point	1901**10**
	With Snow or Measurable Ice Cover			19**02**00
		Predominately Ice Covered	Point	1902**01**
		Compact or Wet Snow (with or without Ice) Covering Less Than One–Half of Ground	Point	1902**02**
		Compact or Wet Snow (with or without Ice) Covering at Least One–Half of Ground, but Ground not Completely Covered	Point	1902**03**
		Even Layer of Compact or Wet Snow Covering Ground Completely	Point	1902**04**
		Uneven Layer of Compact or Wet Snow Covering Ground Completely	Point	1902**05**
		Loose Dry Snow Covering Less Than One–Half of Ground	Point	1902**06**
		Loose Dry Snow Covering at least One–Half of Ground, but Ground not Completely Covered	Point	1902**07**
		Even Layer of Loose Dry Snow Covering Ground Completely	Point	1902**08**
		Uneven Layer of Loose Dry Snow Covering Ground Completely	Point	1902**09**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LI. Atmospheric entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Snow Covering Ground Completely, Deep Drifts	Point	1902**10**

A.5.4.17 Oceanographic (46).

TABLE A-LII. Oceanographic entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
Ice Systems				**11**0000
	Icebergs			11**01**00
		Many Icebergs	Point	1101**01**
		Belts and Strips	Point	1101**02**
		General	Point	1101**03**
		Many Icebergs – General	Point	1101**04**
		Bergy Bit	Point	1101**05**
		Many Bergy Bits	Point	1101**06**
		Growler	Point	1101**07**
		Many Growlers	Point	1101**08**
		Floeberg	Point	1101**09**
		Ice Island	Point	1101**10**
	Ice Concentration			11**02**00
		Bergy Water	Point	1102**01**
		Water with Radar Targets	Point	1102**02**
		Ice Free	Point	1102**03**
	Dynamic Processes			11**03**00
		Convergence	Point	1103**01**
		Divergence	Point	1103**02**
		Shearing or Shear Zone	Point	1103**03**
		Ice Drift (Direction)	Point	1103**04**
	Sea Ice			11**04**00
		Ice Thickness (Observed)	Point	1104**01**
		Ice Thickness (Estimated)	Point	1104**02**
		Melt Puddles or Flooded Ice	Point	1104**03**
	Limits			11**05**00
		Limits of Visual Observation	Line	1105**01**
		Limits of Under Cast	Line	1105**02**
		Limits of Radar Observation	Line	1105**03**
		Observed Ice Edge or Boundary	Line	1105**04**
		Estimated Ice Edge or Boundary	Line	1105**05**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LII. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Ice Edge or Boundary from Radar	Line	1105**06**
	Openings in the Ice			11**06**00
		Cracks	Line	1106**01**
		Cracks at a Specific Location	Line	1106**02**
		Lead	Line	1106**03**
		Frozen Lead	Line	1106**04**
	Snow Cover		Point	11**07**00
		Sastrugi (with Orientation)	Point	1107**01**
	Topographical Features			11**08**00
		Ridges or Hummocks	Point	1108**01**
		Rafting	Point	1108**02**
		Jammed Brash Barrier	Point	1108**03**
Hydrography				**12**0000
	Depth			12**01**00
		Soundings	Point	1201**01**
		Depth Curve	Line	1201**02**
		Depth Contour	Line	1201**03**
		Depth Area	Area	1201**04**
	Coastal Hydrography			12**02**00
		Coastline	Line	1202**01**
		Island	Area	1202**02**
		Beach	Area	1202**03**
		Water	Area	1202**04**
		Foreshore – Line	Line	1202**05**
		Foreshore – Area	Area	1202**06**
	Ports and Harbors			12**03**00
		Ports		1203**01**
		Berths (Onshore)	Point	1203**02**
		Berths (Anchor)	Point	1203**03**
		Anchorage – Point	Point	1203**04**
		Anchorage – Line	Line	1203**05**
		Anchorage – Area	Area	1203**06**
		Call in Point	Point	1203**07**
		Pier/Wharf/Quay	Line	1203**08**
		Fishing Harbor – Point	Point	1203**09**
		Fish Weirs – Point	Point	1203**10**
		Fish Stakes – Point	Point	1203**11**
		Fish Traps – Area	Area	1203**12**
		Facilities		1203**13**
		Drydock	Area	1203**14**
		Landing Place	Point	1203**15**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LII. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Offshore Loading Facility – Point	Point	120**316**
		Offshore Loading Facility – Line	Line	120**317**
		Offshore Loading Facility – Area	Area	120**318**
		Ramp – Above Water	Line	120**319**
		Ramp – Below Water	Line	120**320**
		Landing Ring	Point	120**321**
		Ferry Crossing	Point	120**322**
		Cable Ferry Crossing	Point	120**323**
		Dolphin	Point	120**324**
		Shoreline Protection		120**325**
		Breakwater/Groin/Jetty – Above Water	Line	120**326**
		Breakwater/Groin/Jetty – Below Water	Line	120**327**
		Seawall	Line	120**328**
	Aids to Navigation			12**0400**
		Beacon	Point	120**401**
		Buoy Default	Point	120**402**
		Marker	Point	120**403**
		Perches/Stakes – Point	Point	120**404**
		Perches/Stakes – Area	Area	120**405**
		Light	Point	120**406**
		Leading Line	Line	120**407**
		Light Vessel/Light Ship	Point	120**408**
		Lighthouse	Point	120**409**
	Dangers/Hazards			12**0500**
		Rock Submerged	Point	120**501**
		Rock Awashed	Point	120**502**
		Underwater Danger/Hazard	Area	120**503**
		Foul Ground – Point	Point	120**504**
		Foul Ground – Area	Area	120**505**
		Kelp/Seaweed – Point	Point	120**506**
		Kelp/Seaweed – Area	Area	120**507**
		Snags/Stumps	Point	120**508**
		Wreck (Uncovers)	Point	120**509**
		Wreck (Submerged)	Point	120**510**
		Breakers	Line	120**511**
		Reef	Line	120**512**
		Eddies/Overfalls/Tide Rips	Point	120**513**
		Discolored Water	Area	120**514**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LII. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Bottom Features			12**06**00
		Bottom Characteristics - Sand	Point	1206**01**
		Bottom Characteristics - Mud	Point	1206**02**
		Bottom Characteristics - Clay	Point	1206**03**
		Bottom Characteristics - Silt	Point	1206**04**
		Bottom Characteristics - Stones	Point	1206**05**
		Bottom Characteristics - Gravel	Point	1206**06**
		Bottom Characteristics - Pebbles	Point	1206**07**
		Bottom Characteristics - Cobbles	Point	1206**08**
		Bottom Characteristics - Rock	Point	1206**09**
		Bottom Characteristics - Coral	Point	1206**10**
		Bottom Characteristics - Shell	Point	1206**11**
		Qualifying Terms - Fine	Point	1206**12**
		Qualifying Terms - Medium	Point	1206**13**
		Qualifying Terms - Coarse	Point	1206**14**
	Tide and Current			12**07**00
		Water Turbulence	Point	1207**01**
		Current Flow – Ebb	Line	1207**02**
		Current Flow – Flood	Line	1207**03**
		Tide Data Point	Point	1207**04**
		Tide Gauge	Point	1207**05**
Oceanography				**13**0000
	Bioluminescence			13**01**00
		Visual Detection Ratio (VDR) Level 1–2	Area	1301**01**
		VDR Level 2–3	Area	1301**02**
		VDR Level 3–4	Area	1301**03**
		VDR Level 4–5	Area	1301**04**
		VDR Level 5–6	Area	1301**05**
		VDR Level 6–7	Area	1301**06**
		VDR Level 7–8	Area	1301**07**
		VDR Level 8–9	Area	1301**08**
		VDR Level 9–10	Area	1301**09**
	Beach Slope			13**02**00
		Flat	Area	1302**01**
		Gentle	Area	1302**02**
		Moderate	Area	1302**03**
		Steep	Area	1302**04**
Geophysics/Acoustics				**14**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LII. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
	Mine Warfare (MIW) Bottom Descriptors			14**01**00
		MIW Bottom Sediments - Solid Rock	Area	1401**01**
		MIW Bottom Sediments - Clay	Area	1401**02**
		MIW Bottom Sediments - Very Coarse Sand	Area	1401**03**
		MIW Bottom Sediments - Coarse Sand	Area	1401**04**
		MIW Bottom Sediments - Medium Sand	Area	1401**05**
		MIW Bottom Sediments - Fine Sand	Area	1401**06**
		MIW Bottom Sediments - Very Fine Sand	Area	1401**07**
		MIW Bottom Sediments - Very Fine Silt	Area	1401**08**
		MIW Bottom Sediments - Fine Silt	Area	1401**09**
		MIW Bottom Sediments - Medium Silt	Area	1401**10**
		MIW Bottom Sediments - Coarse Silt	Area	1401**11**
		MIW Bottom Sediments - Boulders	Area	1401**12**
		MIW Bottom Sediments - Cobbles, Oyster Shells	Area	1401**13**
		MIW Bottom Sediments - Pebbles, Shells	Area	1401**14**
		MIW Bottom Sediments - Sand and Shells	Area	1401**15**
		MIW Bottom Sediment - Land	Area	1401**16**
		MIW Bottom Sediment - No Data	Area	1401**17**
		Bottom Roughness - Smooth	Area	1401**18**
		Bottom Roughness - Moderate	Area	1401**19**
		Bottom Roughness - Rough	Area	1401**20**
		Clutter (Bottom) - Low	Area	1401**21**
		Clutter (Bottom) - Medium	Area	1401**22**
		Clutter (Bottom) - High	Area	1401**23**
		Impact Burial - 0%	Area	1401**24**
		Impact Burial - 0–10%	Area	1401**25**
		Impact Burial - 10–20%	Area	1401**26**
		Impact Burial - 20–75%	Area	1401**27**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LII. Oceanographic entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
		Impact Burial - >75%	Area	140**128**
		MIW Bottom Category A	Area	140**129**
		MIW Bottom Category B	Area	140**130**
		MIW Bottom Category C	Area	140**131**
		MIW Bottom Type - A1	Area	140**132**
		MIW Bottom Type - A2	Area	140**133**
		MIW Bottom Type - A3	Area	140**134**
		MIW Bottom Type - B1	Area	140**135**
		MIW Bottom Type - B2	Area	140**136**
		MIW Bottom Type - B3	Area	140**137**
		MIW Bottom Type - C1	Area	140**138**
		MIW Bottom Type - C2	Area	140**139**
		MIW Bottom Type - C3	Area	140**140**
Limits				**15**0000
	Maritime Limit Boundary		Line	15**01**00
	Maritime Area		Area	15**02**00
	Restricted Area		Line	15**03**00
	Swept Area		Area	15**04**00
	Training Area		Area	15**05**00
	Operator–Defined		Area	15**06**00
Man–Made Structures				**16**0000
	Submarine Cable		Line	16**01**00
	Submerged Crib		Area	16**02**00
	Canal		Line	16**03**00
	Ford		Point	16**04**00
	Lock		Point	16**05**00
	Oil/Gas Rig		Point	16**06**00
	Oil/Gas Rig Field		Area	16**07**00
	Pipelines/Pipe		Line	16**08**00
	Pile/Piling/Post		Point	16**09**00

A.5.4.18 Meteorological space (47).

TABLE A-LIII. Meteorological space equipment entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Geometric Rendering	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.				
Space				**11**0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.4.19 Signals intelligence equipment (50).

TABLE A-LIV. Signals intelligence equipment entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Signal Intercept			**11**0000
	Communications		11**01**00
	Jammer		11**02**00
	Radar		11**03**00

TABLE A-LV. Signals intelligence equipment sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Anti-Aircraft Fire Control	Radar	01	
Airborne Search and Bombing	Radar	02	
Airborne Intercept	Radar	03	
Altimeter	Radar	04	
Airborne Reconnaissance and Mapping	Radar	05	
Air Traffic Control	Radar	06	
Beacon Transponder (not IFF)	Radar	07	
Battlefield Surveillance	Radar	08	
Controlled Approach	Radar	09	
Controlled Intercept	Radar	10	
Cellular/Mobile	Communications	11	
Coastal Surveillance	Radar	12	
Decoy/Mimic	Radar	13	
Data Transmission	Radar	14	
Earth Surveillance	Radar	15	
Early Warning	Radar	16	
Fire Control	Radar	17	
Ground Mapping	Radar	18	
Height Finding	Radar	19	
Harbor Surveillance	Radar	20	
Identification, Friend or Foe (Interrogator)	Radar	21	
Instrument Landing System	Radar	22	
Ionospheric Sounding	Radar	23	
Identification, Friend or Foe (Transponder)	Radar	24	
Barrage Jammer	Jammer	25	
Click Jammer	Jammer	26	
Deceptive Jammer	Jammer	27	
Frequency Swept Jammer	Jammer	28	
Jammer (general)	Jammer	29	
Noise Jammer	Jammer	30	
Pulsed Jammer	Jammer	31	
Repeater Jammer	Jammer	32	
Spot Noise Jammer	Jammer	33	
Transponder Jammer	Jammer	34	
Missile Acquisition	Radar	35	
Missile Control	Jammer	36	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LV. Signals intelligence equipment sector 1 modifier - Continued.

Sector 1 Modifier	Category	Value	Remarks
Missile Downlink	Air Radar	37	
Meteorological	Radar	38	
Multi-Function	Jammer	39	
Missile Guidance	Radar	40	
Missile Homing	Radar	41	
Missile Tracking	Jammer	42	
Navigational/General	Jammer	43	
Navigational/Distance Measuring Equipment	Jammer	44	
Navigation/Terrain Following	Jammer	45	
Navigational/Weather Avoidance	Jammer	46	
Omni-Line of Sight (LOS)	Jammer	47	
Proximity Fuse	Air Radar	48	
Point-to-Point Line of Sight (LOS)	Communications	49	
Instrumentation	Radar	50	
Range Only	Radar	51	
Sonobuoy	Radar	52	
Satellite Downlink	Communications	53	
Space	Radar	54	
Surface Search	Radar	55	
Shell Tracking	Land Radar	56	
Satellite Uplink	Communications	57	
Target Acquisition	Radar	58	
Target Illumination	Radar	59	
Tropospheric Scatter	Communications	60	
Target Tracking	Radar	61	
Unknown	Radar	62	
Video Remoting	Radar	63	
Experimental	Radar	64	

TABLE A-LVI. Signals intelligence equipment sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	

A.5.4.20 Cyberspace (60).

TABLE A-LVII. Cyberspace entity/entity type/entity subtype.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
Unspecified			000000
Cyberspace Unit			**11**0000
	Combat Mission Team		11**01**00
	National Mission Team		11**02**00
	Cyber Protection Team		11**03**00
	Defensive Cyberspace		11**06**00
	Offensive Cyberspace		11**07**00
	Internet Service Provider		11**08**00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LVII. Cyberspace entity/entity type/entity subtype - Continued.

Entity (Positions 11 and 12)	Entity Type (Positions 13 and 14)	Entity Subtype (Positions 15 and 16)	Value
Note: The actual value is shown in **bold numbers**. The remaining values are used to show placement within the six positions.			
	Security		11**09**00
	Operations		11**10**00
Threat Actor			**12**0000
	Insider		12**02**00
Agent			**13**0000
	Firewall		13**01**00
	Firmware		13**02**00
Application			14**00**00
	Search Engine		14**03**00
	Social Media		14**04**00
Threat			**15**0000
	Malware		15**01**00
	Phishing		15**02**00
Data			**16**0000
	Digital Currency		16**01**00
	Persona		16**02**00
Endpoint			**17**0000
	Server		17**01**00
	Workstation		17**02**00
	Portable Electronic Device (PED)		17**03**00
		Smartphone	17030**1**
		Tablet	17030**2**
		Laptop	17030**3**
		Health Monitor	17030**4**
		Smartvest	17030**5**
		Smartwatch	17030**6**
		Wearable	17030**7**
	Internet of Things Device		17**04**00
	Printer		17**05**00
	Router		17**06**00
	Switch		17**07**00
Network			**18**0000

TABLE A-LVIII. Cyberspace sector 1 modifier.

Sector 1 Modifier	Category	Value	Remarks
Unspecified		00	
Defensive Cyberspace	Capability	01	
Offensive Cyberspace	Capability	02	
Social	Capability	03	
Radio Frequency	Capability	06	
Continuity of Operations	Capability	08	
Internet Service Provider (ISP)	Capability	09	
Finance	Capability	10	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE A-LVIII. Cyberspace sector 1 modifier - Continued.

Sector 1 Modifier	Category	Value	Remarks
Out of Band	Capability	11	
Cloud	Service	12	
Data	Capability	13	
Service	Capability	14	

TABLE A-LIX. Cyberspace sector 2 modifier.

Sector 2 Modifier	Category	Value	Remarks
Unspecified		00	
Secured	Capability	01	
Open	Capability	02	
Response Actions	Capability	03	
Internal Defense Measures	Capability	05	
Advanced Persistent Threat	Capability	06	
Nation State	Organization	07	
Nation State Sponsored	Organization	08	
Service	Capability	10	

A.5.5 Set C. The third set of ten values:

Position 21 is the sector 1 modifier identifier.
Position 22 is the sector 2 modifier identifier.
Position 23 identifies the frame shape.
Positions 24 through 27 are reserved for future use (to be assigned by SSMC).
Positions 28 through 30 are the nationality/country/geopolitical/geographic name or Entity numeric code.

A.5.5.1 Sector 1 common modifier identifier. The sector 1 common modifier identifier (SIDC position 21) determines if the sector 1 modifier uses a modifier located within the symbol set or a common modifier. The value “0” indicates the sector 1 modifier is located within the specified symbol set’s sector 1 modifier (SIDC positions 17-18). A value greater than 0 identifies the modifier is located within common modifiers sector 1 (Table B-1).

A.5.5.1.1 Sector 1 common modifier. The sector 1 common modifier is comprised of three values. The first value is the sector 1 common modifier identifier value. The remaining two values are the values in the sector 1 modifier positions (SIDC positions 17-18).

A.5.5.2 Sector 2 modifier identifier. The sector 2 common modifier identifier (SIDC position 22) determines if the sector 2 modifier uses a modifier located within the symbol set or a common modifier. The value “0” indicates the sector 2 modifier is located in the specified symbol set’s sector 2 modifier (SIDC positions 19-20). A value greater than 0 identifies the modifier is located within common modifiers sector 2 (Table B-II).

A.5.5.2.1 Sector 2 common modifier. The sector 2 common modifier is comprised of three values. The first value is the sector 2 modifier identifier value. The remaining two values are the values in the sector 2 modifier positions (SIDC positions 19-20).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

A.5.5.3 Frame shape identifier. The frame shape identifier is comprised of one position and along with the standard identity, determines which frame shape and fill color shall be used.

TABLE A-LX. Frame shape.

Description	Value
Unknown	0
Space	1
Air	2
Land Unit	3
Land Equipment	4
Land Installation	5
Dismounted Individuals	6
Sea Subsurface	7
Activity/Event	8
Cyberspace	9
Sea Surface	A

A.5.5.4 Nationality/country/geopolitical/geographic name or entity. The nationality/country/geopolitical/geographic name or entity numeric code is a three position value. Several lists of codes exist, to include GENC and NATO STANAG 1059. US shall use GENC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

COMMON MODIFIERS

B.1 SCOPE

B.1.1 Scope. This appendix addresses common modifiers that support multiple dimension symbols within the C2 domain. The tables in this appendix present the modifiers for use across multiple dimensions. The information contained herein is intended for compliance.

B.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

B.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

B.4 GENERAL REQUIREMENTS

B.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and symbology.

B.5 DETAILED REQUIREMENTS

B.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

B.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.









B.5.3 Composition of common modifiers. Refer to 5.3.10 for an explanation of symbol composition.

B.5.3.1 Symbol building process. The symbol building process is identical for common modifiers as it is for standard modifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.










B.5.3.3 Common modifiers. All common modifiers shall be placed in sectors 1 or 2 as appropriate (see table B-I and table B-II). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

TABLE B-I. Common modifiers sector 1.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Unmanned Aircraft (UA)/Unmanned Aerial Vehicle (UAV)/Unmanned Aircraft System (UAS)/ Drone Value: 100	Mobility		
Robotic Value: 101	Mobility		
Fixed Wing Value: 102	Mobility		Not used by USAF
Rotary Wing Value: 103	Mobility		
Tilt-Rotor Value: 104	Mobility		
VSTOL/VTOL or Helicopter Equipped Value: 105	Capability		
Attack/Strike Value: 106	Capability		
Armored Value: 107	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Ballistic Missile/Ballistic Missile Defense Shooter Value: 108	Capability		
Bridge/Bridging Value: 109	Capability		
Cargo Value: 110	Capability		
Utility Value: 111	Capability		
Light Value: 112	Capability		
Medium Value: 113	Capability		
Heavy Value: 114	Capability		
Cyberspace Value: 115	Capability		
Command Post Node Value: 116	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Joint Network Node Value: 117	Capability		
Retransmission Site Value: 118	Capability		
Brigade Value: 119	Support Level		
Close Protection Value: 120	Capability		
Combat Value: 121	Capability		
Command and Control Value: 122	Capability		
Crowd and Riot Control Value: 123	Capability		
Explosive Ordnance Disposal (EOD) Value: 124	Capability		
Intelligence, Surveillance, Reconnaissance Value: 125	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Maintenance Value: 126	Capability		
Medevac/Medic/Medical Value: 127	Capability		
Search and Rescue Value: 128	Capability		
Security Value: 129	Capability		
Sniper Value: 130	Capability		
Special Operations Forces Value: 131	Capability		
Special Weapons and Tactics (SWAT) Value: 132	Capability		
Guided Missile Value: 133	Capability		
Other Guided Missile Value: 134	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Petroleum/Petroleum Oil and Lubricants Value: 135	Capability		
Water Value: 136	Capability		
Weapon(s) Value: 137	Capability		
Chemical Value: 138	CBRN		
Radiological Value: 140	CBRN		
Nuclear Value: 141	CBRN		
Decontamination Value: 142	CBRN		
Civilian Value: 143	Organization		
Government Organization/Government Organization Member Value: 144	Organization		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Accident Value: 145	Composite Loss or Incident Qualifier		
Assassination Value: 146	Crime		
Execution Value: 147	Crime		
Kidnapping Value: 148	Crime		
Piracy Value: 149	Crime		
Rape Value: 150	Crime		
Antisubmarine Warfare Value: 151	Mission Area		
Escort Value: 152	Mission Area		
Mine Countermeasures Value: 153	Mission Area		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Mine Warfare Value: 154	Mission Area		APP-06 uses ‘MW’
Surface Warfare Value:155	Mission Area		
Command Value: 156	Support Level		
Company Value: 157	Support Level		
Platoon/Detachment Value:158	Support Level		
Regiment/Group Value: 159	Support Level		
Section Value:160	Support Level		
Squad Value: 161	Support Level		
Team/Crew Value:162	Support Level		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Battalion Value: 163	Support Level		
Directed Energy Value: 164	Capability		
Hijacker Value: 165	Crime		
Electromagnetic Warfare Value: 166	Capability		
Laboratory Value: 168	Capability		
Non-Governmental Organization Member Value: 170	Organization		
Railway Value: 171	Capability		
Clear Value: 174	Capability		
Jamming Value: 175	Capability		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-I. Common modifiers sector 1- Continued.

















DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Wired Value: 176	Capability		 App-06 version
Wireless Value: 177	Capability		
Low Altitude Value: 178	Capability		
Medium Altitude Value: 179	Capability		
Reserve Value: 182	Support Level		
Military Value: 182	Organization		

TABLE B-II. Common modifiers sector 2.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Airborne Value: 100	Mobility		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-II. Common modifiers sector 2 - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Bicycle Equipped Value: 101	Mobility		
Railway Value: 102	Capability		
Ski Value: 103	Mobility		
Tracked Value: 104	Mobility		
Wheeled (Limited Cross Country) Value: 105	Mobility		
Wheeled X (Cross Country) Value: 106	Mobility		
Fixed Wing Value: 107	Mobility		
Rotary Wing Value: 108	Mobility		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-II. Common modifiers sector 2 - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Robotic Value: 109	Mobility		
Autonomous Control Value: 110	Capability		
Remotely Piloted Value: 111	Capability		
Expendable Value: 112	Capability		
Mountain Value: 113	Capability		
Long Range Value: 114	Capability		
Medium Range Value: 115	Capability		
Short Range Value: 116	Capability		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-II. Common modifiers sector 2 - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Close Range Value: 117	Capability		
Heavy Value: 118	Capability		
Medium Value: 119	Capability		
Light and Medium Value: 120	Capability		
Light Value: 121	Capability		
Cyberspace Value: 122	Capability		
Security Force Assistance Value: 123	Capability		
Medical Bed Value: 124	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Multifunctional Value: 125	Capability		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE B-II. Common modifiers sector 2 - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Laboratory Value: 127	Capability		
Over-Snow (Prime Mover) Value: 129	Capability		
Supply Value: 131	Capability		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Electromagnetic Warfare Value: 133	Capability		
Jamming Value: 134	Capability		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Reserve Value: 135	Support Level		
Military Value: 135	Organization		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SPACE SYMBOLS

C.1 SCOPE

C.1.1 Scope. This appendix addresses symbols that support space equipment and weapons in the C2 domain. The tables in this appendix present the icons and modifiers for the space symbol sets. This appendix is divided into two sections (see figure C-1): 1) equipment and platform symbols (see C.6) and 2) missile symbols (see C.7). The information contained herein is intended for compliance.

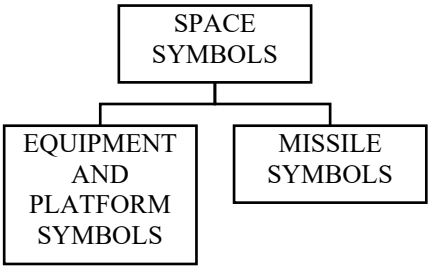


FIGURE C-1. Space appendix sections.

C.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

C.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

C.4 GENERAL REQUIREMENTS

C.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and space symbology.

C.5 DETAILED REQUIREMENTS

C.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

C.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

C.5.3 Composition of space symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure C-2 shows an example of a space equipment symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

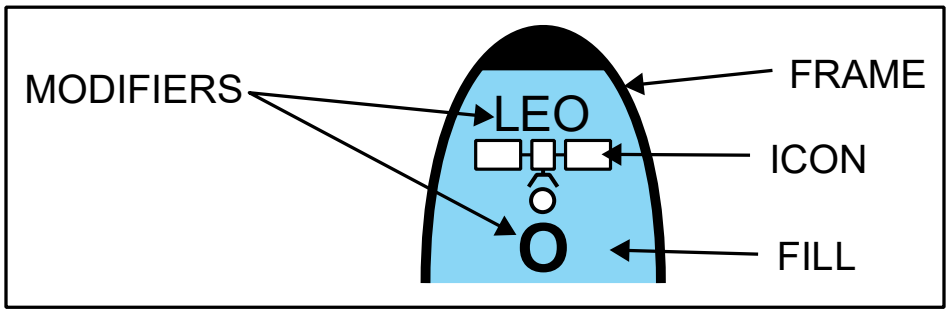







FIGURE C-1. Space symbol components.

C.5.3.1 Symbol building process. Table C-I depicts the symbol building process for space symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE C-I. Space symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is space and the standard identity is friend. The example depicts a "friendly space track."	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is "civilian earth observation satellite," a space entity subtype. The example depicts a "friendly civilian earth observation satellite."	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is "low earth orbit," a sector 1 modifier. The example depicts a "friendly civilian earth observation satellite on a low earth orbit."	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is "optical," a sector 2 modifier. The example depicts a "friendly civilian earth observation satellite on a low earth orbit with optical sensor."	
5.	The finished symbol will appear as shown in the example.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

C.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table C-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table C-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

C.5.3.3 Amplifiers.

C.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure C-2 shows the placement of space symbol amplifiers around the friend symbol frame. Table C-II provides descriptions and formats of each amplifier.

C.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

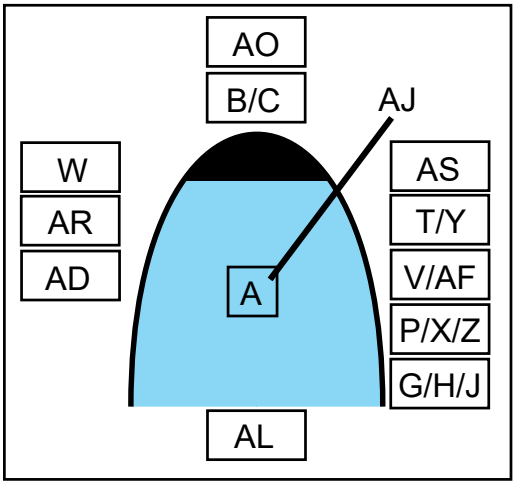


FIGURE C-2. Placement of space symbol amplifiers.

TABLE C-II. Descriptions and formats of space symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Space Vehicle Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
B	Echelon	An amplifier in a unit symbol that identifies command level (see 5.3.7.1 and table VII).	
C	Quantity	An amplifier in an equipment symbol that identifies the number of items present.	Alphanumeric - {1,19} [##########] [XXXXXXXXXX]
G	Staff Comments	A text amplifier for units, equipment and installations; content is implementation specific.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-II. Descriptions and formats of space symbol amplifiers – Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
J	Evaluation Rating	An amplifier that consists of a one-letter reliability rating and a one-number credibility rating. (See ATP 2-33.4) See Table VI for acceptable values.	Alphanumeric - {2,2} [X][#]
P	IFF/SIF/AIS	An amplifier displaying identification modes and codes:	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W	Date/Time	An amplifier for displaying a date-time group (DDHHMMSSZMONYYYY) or (DDHHMMZMMMYYYY) or “O/O” for On Order.	Alphanumeric - {3,16}
X	Altitude	A text amplifier for units that displays altitude flight level. See 5.3.7.6 for content.	Measurement units shall be displayed within the string Examples: 1500MSL FL150
Y	Location	An amplifier that displays a symbol’s location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	Alphanumeric - {3,16}
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.7).	
AD	Platform Type	An amplifier that identifies the electronic identification for a pulsed or non-pulsed electromagnetic emission.	Alphanumeric - {5,5} ELNOT or CENOT
AF	Common Identifier	An amplifier to provide a common name used to identify an entity.	Alphanumeric - {1,12}
AJ	Speed Leader	An amplifier that depicts the speed and direction of movement of an object (see 5.3.7.13.3 and figure 21).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. Ex. Satellite: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-II. Descriptions and formats of space symbol amplifiers – Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote: 1) local/remote status 2) engagement status 3) weapon type.	A:BBB-CC: A = remote/local BBB = engagement status CC = weapon asset
AR	Special Designator	An amplifier that identifies special track designators.	Alphanumeric - {3,3}
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	

C.6 SPACE EQUIPMENT AND PLATFORM SYMBOLS

C.6.1 Space equipment and platform symbols. This section includes the lists of icons and modifiers for building space equipment and platform symbols.





C.6.2 Space equipment and platform icons. Table C-III depicts space equipment and platform icons. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons.

TABLE C-III. Space equipment and platform icons.

DESCRIPTION	ICON	REMARKS
Military Type: Entity Symbol Set: 05 Value: **11**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Space Vehicle Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**01**00 Icon Type: Main		
Re-Entry Vehicle Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**02**00 Icon Type: Main		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Space equipment and platform icons- Continued.

DESCRIPTION	ICON	REMARKS
Planet Lander Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**03**00 Icon Type: Main		
Orbiter Shuttle Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**04**00 Icon Type: Main		
Capsule Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**05**00 Icon Type: Main		
Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**07**00 Icon Type: Main		
Antisatellite Weapon Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**08**00 Icon Type: Main		
Astronomical Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**09**00 Icon Type: Main		
Biosatellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**10**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Space equipment and platform icons- Continued.

DESCRIPTION	ICON	REMARKS
Communications Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 111**1**00 Icon Type: Main		
Earth Observation Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 111**2**00 Icon Type: Main		
Miniaturized Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 111**3**00 Icon Type: Main		
Navigational Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 111**4**00 Icon Type: Main		
Reconnaissance Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 111**5**00 Icon Type: Main		
Space Station Type: Entity Type Entity: Military Symbol Set: 05 Value: 111**6**00 Icon Type: Main		
Tethered Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 111**7**00 Icon Type: Main		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Space equipment and platform icons- Continued.

DESCRIPTION	ICON	REMARKS
Weather Satellite Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**18**00 Icon Type: Main		
Space Launched Vehicle (SLV) Type: Entity Type Entity: Military Symbol Set: 05 Value: 11**19**00 Icon Type: Main		
Civilian Type: Entity Symbol Set: 05 Value: **12**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Orbiter Shuttle Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**01**00 Icon Type: Main		White filled
Capsule Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**02**00 Icon Type: Main		White filled
Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**03**00 Icon Type: Main		White filled
Astronomical Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**04**00 Icon Type: Main		White filled


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-III. Space equipment and platform icons- Continued.

DESCRIPTION	ICON	REMARKS
Biosatellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**05**00 Icon Type: Main		White filled
Communications Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**06**00 Icon Type: Main		White filled
Earth Observation Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**07**00 Icon Type: Main		White filled
Miniaturized Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**08**00 Icon Type: Main		White filled
Navigational Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**09**00 Icon Type: Main		White filled
Space Station Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**10**00 Icon Type: Main		White filled
Tethered Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**11**00 Icon Type: Main		White filled

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.







TABLE C-III. Space equipment and platform icons- Continued.

DESCRIPTION	ICON	REMARKS
Weather Satellite Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**1**200 Icon Type: Main		White filled
Planetary Lander Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**1**300 Icon Type: Main		White filled
Space Vehicle Type: Entity Type Entity: Civilian Symbol Set: 05 Value: 12**1**400 Icon Type: Main		White filled
Manual Track Type: Entity (Local) Symbol Set: 05 Value: **1**30000 Icon Type: Full Octagon		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

C.6.3 Space equipment and platform sector 1 modifiers. Space equipment and platform sector 1 modifiers denote orbit category. Table C-IV lists space equipment and platform sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.







TABLE C-IV. Space equipment and platform sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Low Earth Orbit (LEO) Symbol Set: 05 Value: 01	Orbit		
Medium Earth Orbit (MEO) Symbol Set: 05 Value: 02	Orbit		
High Earth Orbit (HEO) Symbol Set: 05 Value: 03	Orbit		
Geosynchronous Orbit (GSO) Symbol Set: 05 Value: 04	Orbit		
Geostationary Orbit (GO) Symbol Set: 05 Value: 05	Orbit		
Molniya Orbit (MO) Symbol Set: 05 Value: 06	Orbit		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.




C.6.4 Space equipment and platform sector 2 modifiers. Space equipment and platform sector 2 modifiers denote sensor category. Table C-V lists space equipment and platform sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE C-V. Space equipment and platform sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Optical Symbol Set: 05 Value: 01	Sensor		Only used with satellite icons.
Infrared Symbol Set: 05 Value: 02	Sensor		Only used with satellite icons.
Radar Symbol Set: 05 Value: 03	Sensor		Only used with satellite icons.
Signals Intelligence (SIGINT) Symbol Set: 05 Value: 04	Sensor		Only used with satellite icons.
High Power Microwave (ASAT) Symbol Set: 05 Value: 07	Capability		Only used with Anti-Satellite Weapon Main Icon.
Laser (ASAT) Symbol Set: 05 Value: 08	Capability		Only used with Anti-Satellite Weapon Main Icon
Mine (ASAT) Symbol Set: 05 Value: 09	Capability		Only used with Anti-Satellite Weapon Main Icon

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-V. Space equipment and platform sector 2 modifiers - Continued.


DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Maintenance Symbol Set: 05 Value: 10	Capability		
Refuel Symbol Set: 05 Value: 11	Capability		
Tug Symbol Set: 05 Value: 12	Capability		

C.7 SPACE MISSILE SYMBOLS

C.7.1 Space missile symbols. This section includes the lists of icons and modifiers for building space missile symbols.

C.7.2 Space missile icons. Table C-VI depicts the lone space missile icon. The space missile icon requires the vertical bounding octagon.





TABLE C-VI. Space missile icon.

DESCRIPTION	ICON	REMARKS
Missile Type: Entity Symbol Set: 06 Value: **11**0000 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.



C.7.3 Space missile sector 1 modifiers. Space missile sector 1 modifiers denote launch origin or missile class categories. Table C-VII lists missile sector 1 modifiers and illustrates their placement within the bounding octagon. Common Modifiers shall not be used.

TABLE C-VII. Space missile sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Ballistic Symbol Set: 06 Value: 01	Missile Class		
Space Symbol Set: 06 Value: 02	Launch Origin		
Interceptor Symbol Set: 06 Value: 03	Missile Class		
Hypersonic Symbol Set: 02 Value: 04	Missile Class		










C.7.4 Space missile sector 2 modifiers. Space missile sector 2 modifiers denote projected missile destination, missile status, missile type, or missile range categories. Table C-VIII lists the missile sector 2 modifiers and illustrates their placement within the bounding octagon. Common Modifiers shall not be used.

TABLE C-VIII. Space missile sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Short Range Symbol Set: 06 Value: 01	Missile Range		1000km or less.
Medium Range Symbol Set: 06 Value: 02	Missile Range		1000km to 3500km.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-VIII. Space missile sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Intermediate Range Symbol Set: 06 Value: 03	Missile Range		1000km to 3500km.
Long Range Symbol Set: 06 Value: 04	Missile Range		3500km to 5500km.
Intercontinental Symbol Set: 06 Value: 05	Missile Range		5500km or greater.
Arrow Symbol Set: 06 Value: 06	Missile Type-BMD		Used with Interceptor modifier 1 only.
Ground-Based Interceptor (GBI) Symbol Set: 06 Value: 07	Missile Type-BMD		Used with Interceptor modifier 1 only.
Patriot Symbol Set: 06 Value: 08	Missile Type-BMD		Used with Interceptor modifier 1 only.
Standard Missile - Terminal Phase (SM-T) Symbol Set: 06 Value: 09	Missile Type-BMD		Used with Interceptor modifier 1 only.
Standard Missile - 3 (SM-3) Symbol Set: 06 Value: 10	Missile Type-BMD		Used with Interceptor modifier 1 only.
Terminal High-Altitude Area Defense (THAAD) Symbol Set: 06 Value: 11	Missile Type-BMD		Used with Interceptor modifier 1 only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE C-VIII. Space missile sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Space Symbol Set: 06 Value: 12	Launch Origin		
Close Range (CRBM) Symbol Set: 06 Value: 13	Missile Range		
Debris Symbol Set: 06 Value: 14	Missile Type-BMD		
Unknown Symbol Set: 06 Value: 15	Missile Type-BMD		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

AIR SYMBOLS

D.1 SCOPE

D.1.1 Scope. This appendix addresses symbols that support air equipment and weapons in the C2 domain. The tables in this appendix present the icons and modifiers for the air symbol sets. This appendix is divided into two sections (see figure D-1): 1) equipment and platform symbols (see D.6) and 2) missile symbols (see D.7). The information contained herein is intended for compliance.

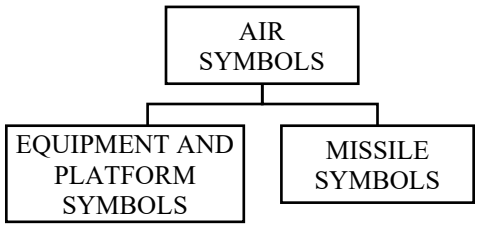


FIGURE D-1. Air appendix sections.

D.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

D.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

D.4 GENERAL REQUIREMENTS

D.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and air symbology.

D.5 DETAILED REQUIREMENTS

D.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

D.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

D.5.3 Composition of air symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure D-2 shows an example of an air equipment symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

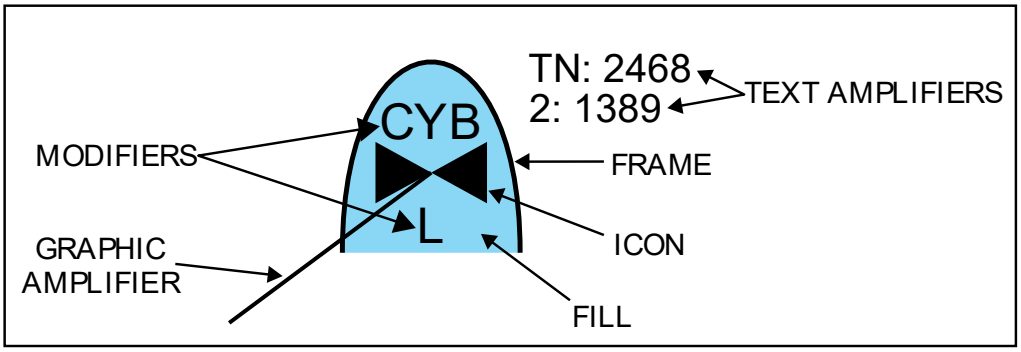







FIGURE D-2. Air symbol components.

D.5.3.1 Symbol building process. Table D-I depicts the symbol building process for air symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE D-I. Air symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is air and the standard identity is friend. The example depicts a “friendly air track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “military rotary-wing,” an air entity type. The example depicts a “friendly military rotary-wing aircraft.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “cyberspace,” a sector 1 modifier. The example depicts a “friendly military rotary-wing aircraft with cyberspace capability.”	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is “light,” a sector 2 modifier. The example depicts a “friendly military light rotary-wing aircraft with cyberspace capability.”	
5.	The finished symbol will appear as shown in the example.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

D.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table D-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table D-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

D.5.3.3 Amplifiers.

D.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure D-3 shows the placement of air symbol amplifiers around the friend symbol frame. Table D-II provides descriptions and formats of each amplifier.

D.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

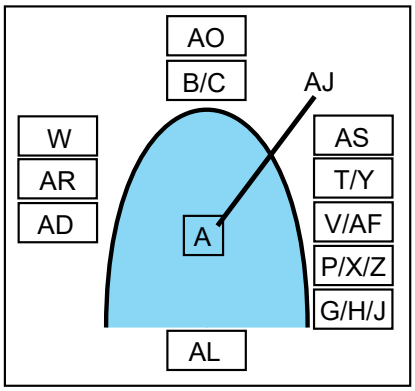


FIGURE D-3. Placement of air symbol amplifiers.

TABLE D-II. Descriptions and formats of air symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Air Vehicle/Air Vehicle Type Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
B	Echelon	An amplifier in a unit symbol that identifies command level (see 5.3.7.1 and table VII).	
C	Quantity	An amplifier in an equipment symbol that identifies the number of items present.	Alphanumeric - {1,19} [#########] [XXXXXXXXXX]
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-II. Descriptions and formats of air symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
H	Additional Information	A text amplifier for units, equipment and installations; content is implementation specific.	
J	Evaluation Rating	An amplifier that consists of a one-letter reliability rating and a one-number credibility rating. (See ATP 2-33.4) See Table VI for acceptable values	Alphanumeric - {2,2} [X][#]
P	IFF/SIF/AIS	An amplifier displaying identification modes and codes:	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W	Date/Time	An amplifier for displaying a date-time group (DDHHMMSSZMONYYYY) or (DDHHMMZMMMYYYY) or “O/O” for On Order.	Alphanumeric - {3,16}
X	Altitude	A text amplifier for units that displays altitude/ flight level. See 5.3.7.6 for content.	Measurement units shall be displayed within the string Example: 1500MSL FL150
Y	Location	An amplifier that displays a symbol’s location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	Alphanumeric - {3,16}
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.7).	
AD	Platform Type	An amplifier that identifies the electronic identification for a pulsed or non-pulsed electromagnetic emission.	Alphanumeric - {5,5} ELNOT or CENOT
AF	Common Identifier	Example: “Hawk” for Hawk SAM system.	
AJ	Speed Leader	An amplifier that depicts the speed and direction of movement of an object (see 5.3.7.13.3 and figure 21).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. Ex. Aircraft: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-II. Descriptions and formats of air symbol amplifiers - Continued.



FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote: 1) local/remote status 2) engagement status 3) weapon type.	A:BBB-CC: A = remote/local BBB = engagement status CC = weapon asset
AR	Special Designator	An amplifier that identifies special track designators.	Alphanumeric - {3,3}
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	

D.6 AIR EQUIPMENT AND PLATFORM SYMBOLS

D.6.1 Air equipment and platform symbols. This section includes the lists of icons and modifiers for building air equipment and platform symbols.







D.6.2 Air equipment and platform icons. Table D-III depicts air equipment and platform icons. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons.

TABLE D-III. Air equipment and platform icons.

DESCRIPTION	ICON	REMARKS
Military Type: Entity Symbol Set: 01 Value: **11**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Fixed-Wing Type: Entity Type Entity: Military Symbol Set: 01 Value: 11**01**00 Icon Type: Main		
Medical Evacuation (Medevac) Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 1101**01** Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Attack/Strike Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110102 Icon Type: Main		
Bomber Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110103 Icon Type: Main		
Fighter Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110104 Icon Type: Main		
Fighter/Bomber Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110105 Icon Type: Main		
Cargo Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110107 Icon Type: Main		
Electronic/Combat (EC)/Jammer Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110108 Icon Type: Main		
Tanker Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110109 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Patrol Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110110 Icon Type: Main		
Reconnaissance Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110111 Icon Type: Main		
Trainer Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110112 Icon Type: Main		
Utility Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110113 Icon Type: Main		
VSTOL Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110114 Icon Type: Main		
Airborne Command Post (ACP) Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110115 Icon Type: Main		
Airborne Early Warning (AEW) Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110116 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Antisurface Warfare Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110117 Icon Type: Main		
Antisubmarine Warfare Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110118 Icon Type: Main		
Communications Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110119 Icon Type: Main		
Combat Search and Rescue (CSAR) Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110120 Icon Type: Main		
Electronic Support (ES) Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110121 Icon Type: Main		
Government Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110122 Icon Type: Main		
Mine Countermeasures (MCM) Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110123 Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Personnel Recovery Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110124 Icon Type: Main		
Search and Rescue Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110125 Icon Type: Main		
Special Operations Forces Type: Entity Subtype Entity/Entity Type: Military/Fixed-Wing Symbol Set: 01 Value: 110126 Icon Type: Main		
Ultra Light Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110127 Icon Type: Main		
Photographic Reconnaissance Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110128 Icon Type: Main		
Very Important Person (VIP) Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110129 Icon Type: Main		
Suppression Of Enemy Air Defense Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 110130 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Passenger Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 1101**31** Icon Type: Main		
Escort Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 1101**32** Icon Type: Main		
Electromagnetic Attack (EA) Type: Entity Subtype Entity/Entity Type: Military/ Fixed-Wing Symbol Set: 01 Value: 1101**33** Icon Type: Main		
Rotary-Wing Type: Entity Type Entity: Military Symbol Set: 01 Value: 11**02**00 Icon Type: Main		
Unmanned Aircraft (UA)/Unmanned Aerial Vehicle (UAV)/Unmanned Aircraft System (UAS) Type: Entity Type Entity: Military Symbol Set: 01 Value: 11**03**00 Icon Type: Main		
Vertical-Takeoff UAV (VT-UAV) Type: Entity Type Entity: Military Symbol Set: 01 Value: 11**04**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Lighter Than Air Type: Entity Type Entity: Military Symbol Set: 01 Value: 11**05**00 Icon Type: Main		
Airship Type: Entity Type Entity: Military Symbol Set: 01 Value: 11**06**00 Icon Type: Main		
Tethered Lighter Than Air Type: Entity Type Entity: Military Symbol Set: 01 Value: 11**07**00 Icon Type: Main		
Civilian Type: Entity Symbol Set: 01 Value: **12**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Fixed-Wing Type: Entity Type Entity: Civilian Symbol Set: 01 Value: 12**01**00 Icon Type: Main		White filled
Rotary-Wing Type: Entity Type Entity: Civilian Symbol Set: 01 Value: 12**02**00 Icon Type: Main		White filled
Unmanned Aircraft (UA)/ Unmanned Aerial Vehicle (UAV)/ Unmanned Aircraft System (UAS) Type: Entity Type Entity: Civilian Symbol Set: 01 Value: 12**03**00 Icon Type: Full Octagon		White filled


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Lighter Than Air Type: Entity Type Entity: Civilian Symbol Set: 01 Value: 12**04**00 Icon Type: Main		White filled
Airship Type: Entity Type Entity: Civilian Symbol Set: 01 Value: 12**05**00 Icon Type: Main		White filled
Tethered Lighter Than Air Type: Entity Type Entity: Civilian Symbol Set: 01 Value: 12**06**00 Icon Type: Main		White filled
Weapon Type: Entity Symbol Set: 01 Value: **13**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Bomb Type: Entity Type Entity: Weapon Symbol Set: 01 Value: 13**01**00 Icon Type: Main		
Decoy Type: Entity Type Entity: Weapon Symbol Set: 01 Value: 13**02**00 Icon Type: Main		
Manual Track Type: Entity (Local) Symbol Set: 01 Value: **14**0000 Icon Type: Full Octagon		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-III. Air equipment and platform icons - Continued.

DESCRIPTION	ICON	REMARKS
Equipment Type: Entity Symbol Set: 01 Value: **15**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Tactical Air Navigation (TACAN) Type: Entity Symbol Set: 01 Value: 15**01**00 Icon Type: Main		










D.6.3 Air equipment and platform sector 1 modifiers. Air equipment and platform sector 1 modifiers denote aircraft type and mission area categories. Table D-IV lists air equipment and platform sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE D-IV. Air equipment and platform sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Bomber Symbol Set: 01 Value: 02	Military Aircraft Type		
Fighter Symbol Set: 01 Value: 04	Military Aircraft Type		
Tanker Symbol Set: 01 Value: 06	Aircraft Type		
Passenger Symbol Set: 01 Value: 09	Aircraft Type		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Ultra Light Symbol Set: 01 Value: 10	Aircraft Type		
Airborne Command Post (ACP) Symbol Set: 01 Value: 11	Military Aircraft Type		
Airborne Early Warning (AEW) Symbol Set: 01 Value: 12	Military Aircraft Type		
Electronic Combat (EC)/Jammer Symbol Set: 01 Value: 16	Military Mission Area		
Patrol Symbol Set: 01 Value: 17	Mission Area		
Reconnaissance Symbol Set: 01 Value: 18	Mission Area		
Trainer Symbol Set: 01 Value: 19	Mission Area		
Photographic (Reconnaissance) Symbol Set: 01 Value: 20	Mission Area		
Personnel Recovery Symbol Set: 01 Value: 21	Mission Area		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Communications Symbol Set: 01 Value: 23	Mission Area		
Electronic Support (ES) Symbol Set: 01 Value: 24	Military Mission Area		
Very Important Person (VIP) Transport Symbol Set: 01 Value: 29	Mission Area		
Combat Search and Rescue (CSAR) Symbol Set: 01 Value: 30	Military Mission Area		
Antisurface Warfare Symbol Set: 01 Value: 32	Military Mission Area		
Fighter/Bomber Symbol Set: 01 Value: 33	Military Aircraft Type		
Intensive Care Symbol Set: 01 Value: 34	Mission Area		
Electromagnetic Attack (EA) Symbol Set: 01 Value: 35	Military Mission Area		
Multi-Mission Symbol Set: 01 Value: 36	Mission Area		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-IV. Air equipment and platform sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
ASW HELO- Lamps Symbol Set: 01 Value: 38	Mission Area		Must be paired in conjunction with rotary wing icon
ASW HELO – SH-60R Symbol Set: 01 Value: 39	Mission Area		Must be paired in conjunction with rotary wing icon

D.6.4 Air equipment and platform sector 2 modifiers. Air equipment and platform sector 2 modifiers denote capacity, re-fueling capability, range and track link availability categories. Table D-V lists air equipment and platform sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE D-V. Air equipment and platform sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Boom-Only Symbol Set: 01 Value: 04	Re-Fueling Capability		Used with tanker only.
Drogue-Only Symbol Set: 01 Value: 05	Re-Fueling Capability		Used with tanker only.
Boom and Drogue Symbol Set: 01 Value: 06	Re-Fueling Capability		Used with tanker only.
Downlinked Symbol Set: 01 Value: 11	Track Link Availability		


D.7 AIR MISSILE SYMBOLS

D.7.1 Air missile symbols. This section includes the lists of icons and modifiers for building air missile symbols.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.






D.7.2 Air missile icons. Table D-VI depicts the lone air missile icon. The air missile icon requires the vertical bounding octagon.

TABLE D-VI. Air missile icon.

DESCRIPTION	ICON	REMARKS
Missile Type: Entity Symbol Set: 02 Value: **11**0000 Icon Type: Main		





D.7.3 Air missile sector 1 modifiers. Air missile sector 1 modifiers denote launch origin or missile class categories. Table D-VII lists missile sector 1 modifiers and illustrates their placement within the bounding octagon. Common Modifiers shall not be used.

TABLE D-VII. Air missile sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Air Symbol Set: 02 Value: 01	Launch Origin		
Surface Symbol Set: 02 Value: 02	Launch Origin		
Subsurface Symbol Set: 02 Value: 03	Launch Origin		
Space Symbol Set: 02 Value: 04	Launch Origin		
Anti-Ballistic Symbol Set: 02 Value: 05	Missile Class		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VII. Air missile sector 1 modifiers- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Ballistic Symbol Set: 02 Value: 06	Missile Class		
Cruise Symbol Set: 02 Value: 07	Missile Class		
Interceptor Symbol Set: 02 Value: 08	Missile Class		
Hypersonic Symbol Set: 02 Value: 09	Missile Class		










D.7.4 Air missile sector 2 modifiers. Air missile sector 2 modifiers denote projected missile destination, missile status, missile type-BMD, missile type-AAW, or missile range categories. Table D-VIII lists the missile sector 2 modifiers and illustrates their placement within the bounding octagon. Common Modifiers shall not be used.

TABLE D-VIII. Air missile sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Air Symbol Set: 02 Value: 01	Missile Destination		
Surface Symbol Set: 02 Value: 02	Missile Destination		
Subsurface Symbol Set: 02 Value: 03	Missile Destination		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VIII. Air missile sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Space Symbol Set: 02 Value: 04	Missile Destination		
Launched Symbol Set: 02 Value: 05	Missile Status		
Patriot Symbol Set: 02 Value: 07	Missile Type-BMD		Used with INTERCEPTOR modifier 1 only.
Standard Missile – 2 (SM-2) Symbol Set: 02 Value: 08	Missile Type-AAW		Used with INTERCEPTOR modifier 1 only.
Standard Missile – 6 (SM-6) Symbol Set: 02 Value: 09	Missile Type-AAW		Used with INTERCEPTOR modifier 1 only.
Evolved Sea Sparrow Missile (ESSM) Symbol Set: 02 Value: 10	Missile Type-AAW		Used with INTERCEPTOR modifier 1 only.
Rolling Airframe Missile (RAM) Symbol Set: 02 Value: 11	Missile Type-AAW		Used with INTERCEPTOR modifier 1 only.
Short Range Symbol Set: 02 Value: 12	Missile Range		1000km or less.
Medium Range Symbol Set: 02 Value: 13	Missile Range		1000km to 3500km. Typically used in reference to surface-to-air missile

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE D-VIII. Air missile sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Intermediate Range Symbol Set: 02 Value: 14	Missile Range		1000km to 3500km. Typically used in reference to ballistic missile
Long Range Symbol Set: 02 Value: 15	Missile Range		3500km to 5500km.
Intercontinental Symbol Set: 02 Value: 16	Missile Range		5500km or greater.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

LAND SYMBOLS

E.1 SCOPE

E.1.1 Scope. This appendix addresses symbols that support land units, equipment and installations in the C2 domain. The tables in this appendix present the icons and modifiers for the land symbol sets. This appendix is divided into four sections (see figure E-1): 1) unit symbols (see E.6), 2) civilian unit/organization symbols (see E.7), 3) equipment symbols (see E.8) and 4) installation symbols (see E.9). The information contained herein is intended for compliance.

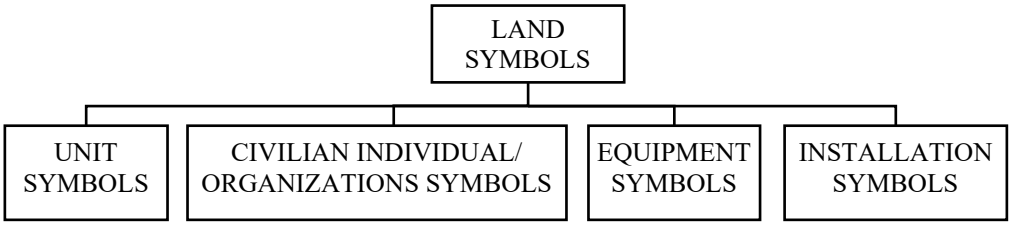


FIGURE E-1. Land appendix sections.

E.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

E.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

E.4 GENERAL REQUIREMENTS

E.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and land symbology.

E.5 DETAILED REQUIREMENTS

E.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

E.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

E.5.3 Composition of land symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure E-2 shows an example of a land unit symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

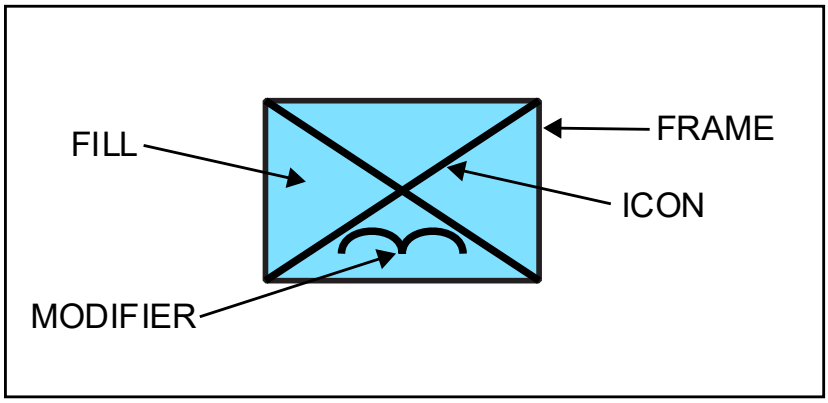






FIGURE E-2. Land symbol components.

E.5.3.1 Symbol building process. Table E-I depicts the symbol building process for land symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE E-I. Land symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is land unit and the standard identity is friend. The example depicts a “friendly unit.”	
2.	Choose an icon for the symbol. In this example, the icon is “infantry,” a land entity type. The infantry icon is a full frame icon; therefore, the friend version of the infantry icon shall be used with the friend frame. If the frame was hostile, then the hostile version of the infantry icon would be used. The example depicts a “friendly infantry unit.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “airborne,” a sector 2 modifier. The example depicts a “friendly airborne infantry unit.”	
4.	The finished symbol will appear as shown in the example.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

E.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table E-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table E-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

E.5.3.3 Amplifiers. Refer to the appropriate section for the placement and description of the land symbol amplifiers for units, civilian organizations, equipment, and installations.

E.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers.

E.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

E.6 LAND UNIT SYMBOLS

E.6.1 Land unit symbols. This section includes the lists of amplifiers, icons, and modifiers for building land unit symbols.

E.6.2 Land unit amplifiers. The purpose of amplifier fields is to standardize the display of additional alphanumerical information that graphically describes a unit, and provides additional information on capabilities, status, location, etc. Figure E-3 shows the placement of land unit symbol amplifiers around the friend symbol frame. Table E-II provides descriptions and formats of each amplifier.

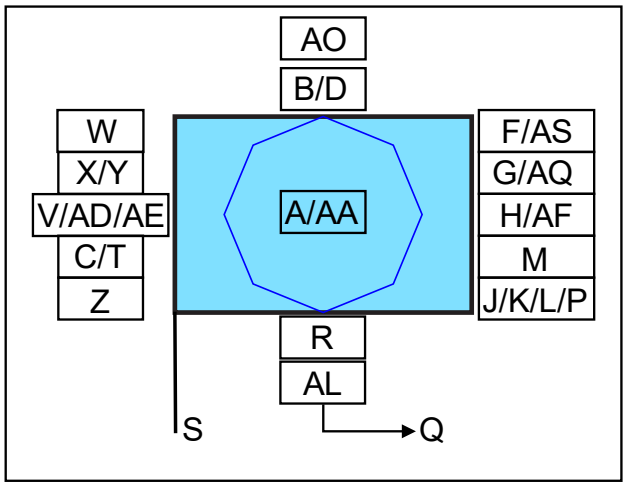


FIGURE E-3. Placement of land unit and civilian organization symbol amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-II. Descriptions and formats of land unit and civilian organization symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
B	Echelon	A graphic amplifier in a unit symbol that identifies command level (see table Table-VII and in the base document appendix).	
C	Quantity	An amplifier in a symbol that identifies the number of items present.	Alphanumeric - {1,19} [#########] [XXXXXXXXXX]
D	Task Force	A graphic amplifier that identifies a unit or an activity symbol as a task force (see 5.3.7.3 and figure 15 in the base document).	
F	Reinforced or Reduced	A text amplifier in a unit symbol that displays (+) for reinforced, (-) for reduced, (±) reinforced and reduced.	
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
J	Evaluation Rating	Degree of confidence that may be placed on the information represented by the symbol. It is shown as one letter and one number made up of Reliability of Source and Credibility of Information. (See ATP 2-33.4) See Table VI for acceptable values.	
K	Combat Effectiveness	A text amplifier for units and installations that indicates effectiveness. **The entries are:** fully operational (FO) substantially operational (SO) marginally operational (MO) not operational (NO) unknown (UNK)	
L	Signature Equipment	A text amplifier for hostile equipment; "**!**" indicates detectable electronic signatures.	
M	Higher Formation	A text amplifier for units that indicates a number or title of a higher echelon command (Corps is designated by Roman numerals).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-II. Descriptions and formats of land unit and civilian organization symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. **Display priority:** Mode 5, Mode S, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### **Example**: 2:1234
Q	Direction of Movement	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.9 and figure 15 in the base document).	
R	Mobility	A graphic amplifier for equipment that depicts the mobility of an object (see 5.3.7.10, figure 15 and table III).	
S	Headquarters Staff	A graphic amplifier for units, installations and activities that identifies them as a headquarters (see figure 14 and figure 15).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment, and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).	(DDHHMMSSZMONYYYY) or "O/O" for on order
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.6 for content.	Measurement units shall be displayed within the string **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.




TABLE E-II. Descriptions and formats of land unit and civilian organization symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.7).	
AA	Special C2 Headquarters	A text modifier for units; the amplifiers contained inside the frame. A named command such as SHAPE, PACOM, CENTCOM, joint, multinational, or coalition commands such as CJTF, JTF, and MJTF.	
AD	Platform Type	Electronic intelligence notation (ELNOT) or communications emitter notation (CENOT)	
AE	Equipment Teardown Time	Equipment teardown time in minutes.	
AF	Common Identifier	Example: “Hawk” for Hawk SAM system.	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. **Ex. Aircraft**: Red - damaged, Green – fully capable **Ex: Missile**: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote: 1) local/remote status 2) engagement status 3) weapon type.	A:BBB:CC: A = remote/local BBB = engagement status CC = weapon asset
AQ	Guarded Unit	During ballistic missile defense, some tracks are designated as guarded by a particular unit.	
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.







E.6.3 Land unit icons. Table E-III depicts land unit icons. The information in gray is provided for orientation only and is not part of the icon.

TABLE E-III. Land unit icons.

DESCRIPTION	ICON	REMARKS
Command and Control Type: Entity Symbol Set: 10 Value: **11**0000 Icon Type: Main		Reserved for Amplifier field {AA} only. See table E-II
Broadcast Transmitter Antennae Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**01**00 Icon Type: Full Octagon		
Civil Affairs Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**02**00 Icon Type: Main		
Civil-Military Cooperation Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**03**00 Icon Type: Main		
Information Operations Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**04**00 Icon Type: Main		
Liaison Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**05**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Military Information Support Operations (MISO) Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**06**00 Icon Type: Main		
Broadcast Transmitter Antennae Type: Entity Subtype Entity/Entity Type: Command and Control/Military Information Support Operations (MISO) Symbol Set: 10 Value: 1106**01** Icon Type: Full Octagon		
Radio Type: Entity Type Entity/Entity Type: Command and Control Symbol Set: 10 Value: 11**07**00 Icon Type: Main		
Radio Relay Type: Entity Type Entity/Entity Type: Command and Control Symbol Set: 10 Value: 11**08**00 Icon Type: Main		
Radio Teletype Center Type: Entity Type Entity/Entity Type: Command and Control Symbol Set: 10 Value: 11**09**00 Icon Type: Main		
Signal Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**10**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Signal – Radio Type: Entity Subtype Entity: Signal Symbol Set: 10 Value: 1110**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame
Signal – Radio Relay Type: Entity Subtype Entity: Signal Symbol Set: 10 Value: 1110**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame
Signal – Teletype Type: Entity Subtype Entity: Signal Symbol Set: 10 Value: 1110**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame
Signal - Video Imagery (Combat Camera) Type: Entity Subtype Entity: Signal Symbol Set: 10 Value: 1110**05** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame
Video Imagery (Combat Camera) Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**12**00 Icon Type: Main		
Space Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**13**00 Icon Type: Main		
Special Troops Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**14**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Multi-Domain Type: Entity Type Entity: Command and Control Symbol Set: 10 Value: 11**15**00 Icon Type: Main		
Movement and Maneuver Type: Entity Symbol Set: 10 Value: **12**0000	N/A	Reserved for hierarchical purposes.
Air Assault with Organic Lift Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**01**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Air Traffic Services/Airfield Operations Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**02**00 Icon Type: Main		
Antitank/Antiarmor Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**04**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Armored Type: Entity Type Entity: Movement and Maneuver/ Antitank/Antiarmor Symbol Set: 10 Value: 1204**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Motorized/Mounted Operation Type: Entity Type Entity: Movement and Maneuver/ Antitank/Antiarmor Symbol Set: 10 Value: 1204**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Armor/Mechanized Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**05**00 Icon Type: Main		
Reconnaissance/Cavalry/Scout Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Armor/Mechanized Symbol Set: 10 Value: 1205**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Amphibious Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Armor/Mechanized Symbol Set: 10 Value: 1205**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Army Aviation/Aviation Rotary Wing Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**06**00 Icon Type: Main		
Reconnaissance Type: Entity Subtype Entity: Movement and Maneuver/ Army Aviation/Aviation Rotary Wing Symbol Set: 10 Value: 1206**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Aviation Composite Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**07**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Aviation Fixed Wing Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**08**00 Icon Type: Main		
Reconnaissance Type: Entity Type Entity: Movement and Maneuver/Army Aviation/Aviation Fixed Wing Symbol Set: 10 Value: 1208**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Combat Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**09**00 Icon Type: Main		
Combined Arms Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**10**00 Icon Type: Main		
Infantry Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**11**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Amphibious Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Infantry Symbol Set: 10 Value: 1211**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Armored/Mechanized/ Tracked Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Infantry Symbol Set: 10 Value: 121**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Main Gun System, Infantry Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Infantry Symbol Set: 10 Value: 121**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Motorized/Mounted Operation Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Infantry Symbol Set: 10 Value: 121**04** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Infantry Fighting Vehicle Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Infantry Symbol Set: 10 Value: 121**05** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Main Gun System Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Infantry Symbol Set: 10 Value: 121**06** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Marine Air Ground Task Force (MAGTF) Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Infantry Symbol Set: 10 Value: 121**07** Icon Type: Full Fame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Observer Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**12**00 Icon Type: Main		
Reconnaissance/Cavalry/ Scout Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**13**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Reconnaissance and Surveillance Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Reconnaissance/Cavalry/Scout Symbol Set: 10 Value: 1213**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Marine Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Reconnaissance/Cavalry/Scout Symbol Set: 10 Value: 1213**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Motorized/Mounted Operation Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Reconnaissance/Cavalry/Scout Symbol Set: 10 Value: 1213**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Reconnaissance Artillery, Mounted Operation Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Reconnaissance/Cavalry/Scout Symbol Set: 10 Value: 1213**04** Icon Tye: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Sea Air Land (SEAL) Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**14**00 Icon Type: Main		
Sniper Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**15**00 Icon Type: Main		
Surveillance Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**16**00 Icon Type: Main		
Special Forces Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**17**00 Icon Type: Main		
Special Operations Forces (SOF) Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**18**00 Icon Type: Main		
Fixed Wing Miso Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Special Operations Forces (SOF) Symbol Set: 10 Value: 1218**01** Icon Type: Full Octagon		
Ground Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Special Operations Forces (SOF) Symbol Set: 10 Value: 1218**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Underwater Demolition Type: Entity Subtype Entity/Entity Type: Movement and Maneuver/Special Operations Forces (SOF) Symbol Set: 10 Value: 1218**05** Icon Type: Main		
Unmanned Aerial Systems Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**19**00 Icon Type: Main		
Ranger Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value: 12**20**00 Icon Type: Main		
Combined Combat Unit Type: Entity Type Entity: Movement and Maneuver Symbol Set: 10 Value 12**21**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Fires Type: Entity Symbol Set: 10 Value: **13**0000	N/A	Reserved for hierarchical purposes.
Air Defense Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**01**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Main Gun System Type: Entity Subtype Entity/Entity Type: Fires/Air Defense Symbol Set: 10 Value: 1301**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Missile Type: Entity Subtype Entity/Entity Type: Fires/Air Defense Symbol Set: 10 Value: 1301**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Air and Missile Defense Type: Entity Subtype Entity/Entity Type: Fires/Air Defense Symbol Set: 10 Value: 1301**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Air/Land Naval Gunfire Liaison Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**02**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Field Artillery Type: /Entity Type Entity: Fires Symbol Set: 10 Value: 13**03**00 Icon Type: Main		
Reconnaissance (FIST) Type: Entity Subtype Entity/Entity Type: Fires/Field Artillery Symbol Set: 10 Value: 1303**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Field Artillery Observer Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**04**00 Icon Type: Main		
Joint Fire Support Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**05**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Meteorological Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**06**00 Icon Type: Main		
Missile Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**07**00 Icon Type: Main		
Mortar Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**08**00 Icon Type: Main		
Self-Propelled Wheeled Type: Entity Subtype Entity/Entity Type: Fires/Mortar Symbol Set: 10 Value: 1308**02** Icon Type: Full Octagon		
Survey Type: Entity Type Entity: Fires Symbol Set: 10 Value: 13**09**00 Icon Type: Main		
Protection Type: Entity Symbol Set: 10 Value: **14**0000	N/A	Reserved for hierarchical purposes.
Chemical Biological Radiological Nuclear Defense Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**01**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Motorized/Mounted Operation Type: Entity Subtype Entity: Protection/Chemical Biological Radiological Nuclear Defense Symbol Set: 10 Value: 1401**02** Icon Type: Main		
Reconnaissance Type: Entity Subtype Entity: Protection/Chemical Biological Radiological Nuclear Defense Symbol Set: 10 Value: 1401**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Reconnaissance Motorized/Mounted Operation Type: Entity Subtype Entity/Entity Type: Protection/Chemical Biological Radiological Nuclear Defense Symbol Set: 10 Value: 1401**05** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Chemical, Biological, Radiological, Nuclear, and High-Yield Explosives Type: Entity Subtype Entity/Entity Type: Protection/Chemical Biological Radiological Nuclear Defense Symbol Set: 10 Value: 1401**06** Icon Type: Main		White filled
Combat Support (Maneuver Enhancement) Type: Entity Type Entity: Protection Symbol Set: 10 Value: 1**40**200 Icon Type: Main		
Criminal Investigation Division Type: Entity Type Entity: Protection Symbol Set: 10 Value: 1**40**300 Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Diving Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**04**00 Icon Type: Main		
Dog Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**05**00 Icon Type: Main		
Drilling Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**06**00 Icon Type: Main		
Engineer Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**07**00 Icon Type: Main		
Mechanized Type: Entity Subtype Entity/Entity Type: Protection/Engineer Symbol Set: 10 Value: 1407**01** Icon Type: Main		
Motorized/Mounted Operation Type: Entity Subtype Entity/Entity Type: Protection/Engineer Symbol Set: 10 Value: 1407**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Reconnaissance Type: Entity Subtype Entity/Entity Type: Protection/Engineer Symbol Set: 10 Value: 1407**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Explosive Ordnance Disposal (EOD) Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**08**00 Icon Type: Main		
Field Camp Construction Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**09**00 Icon Type: Main+1		
Fire Fighting/Fire Protection Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**10**00 Icon Type: Main		
Geospatial Support/Geospatial Information Support Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**11**00 Icon Type: Main		
Military Police Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**12**00 Icon Type: Main		
Mine Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**13**00 Icon Type: Main		
Mine Clearing Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**14**00 Icon Type: Full Octagon		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Mine Launching Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**15**00 Icon Type: Full Octagon		
Mine Laying Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**16**00 Icon Type: Full Octagon		
Security Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**17**00 Icon Type: Main		
Motorized/Mounted Operation Type: Entity Subtype Entity/Entity Type: Protection/Security Symbol Set: 10 Value: 1417**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Search and Rescue Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**18**00 Icon Type: Main		
Isolated Personnel Type: Entity Subtype Entity/Entity Type: Protection/Search and Rescue Symbol Set: 10 Value: 1418**01** Icon Type: Main		
Shore Patrol/Security Police Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**20**00 Icon Type: Main		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Topographic/Geospatial Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**21**00 Icon Type: Main		
Missile Defense Type: Entity Type Entity: Protection Symbol Set: 10 Value: 14**22**00 Icon Type: Main		
Intelligence Type: Entity Symbol Set: 10 Value: **15**0000	N/A	Reserved for hierarchical purposes.
Analysis Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**01**00 Icon Type: Full Octagon		
Counterintelligence Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**02**00 Icon Type: Main		
Direction Finding Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**03**00 Icon Type: Full Octagon		
Electronic Ranging Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**04**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Electromagnetic Warfare Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**05**00 Icon Type: Main		
Analysis Type: Entity Subtype Entity/Entity Type: Intelligence/Electromagnetic Warfare Symbol Set: 10 Value: 1505**01** Icon Type: Full Octagon		
Direction Finding Type: Entity Subtype Entity/Entity Type: Intelligence/Electromagnetic Warfare Symbol Set: 10 Value: 1505**02** Icon Type: Full Octagon		
Intercept Type: Entity Subtype Entity/Entity Type: Intelligence/Electromagnetic Warfare Symbol Set: 10 Value: 1505**03** Icon Type: Full Octagon		
Intercept (Search and Recording) Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**06**00 Icon Type: Full Octagon		
Interrogation Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**07**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Jamming Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**08**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Joint Intelligence Center Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**09**00 Icon Type: Main		
Military Intelligence Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**10**00 Icon Type: Main		
Search Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**11**00 Icon Type: Full Octagon		
Sensor Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**12**00 Icon Type: Main		
Military History Type: Entity Type Entity: Intelligence Symbol Set: 10 Value: 15**13**00 Icon Type: Main		
Sustainment Type: Entity Symbol Set: 10 Value: **16**0000 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Administrative Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**01**00 Icon Type: Main		
All Classes of Supply Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**02**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Ammunition Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**04**00 Icon Type: Main		
Band Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**05**00 Icon Type: Main		
Army Music Type: Entity Subtype Entity/Entity Type: Sustainment/Band Symbol Set: 10 Value: 1605**01** Icon Type: Main		
Combat Service Support Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**06**00 Icon Type: Main		
Finance Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**07**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Judge Advocate General Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**08**00 Icon Type: Main		
Labor Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**09**00 Icon Type: Main		
Laundry/Bath Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**10**00 Icon Type: Main		
Maintenance Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**11**00 Icon Type: Main		
Material Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**12**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Medical Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**13**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Medical Treatment Facility Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**14**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Morale, Welfare and Recreation Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**15**00 Icon Type: Main		
Mortuary Affairs Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**16**00 Icon Type: Main		
Multiple Classes of Supply Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**17**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
NATO Supply Class I Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**18**00 Icon Type: Full Frame		These classes are referenced in NATO APP-06. Items of subsistence, e.g. food and forage, which are consumed by personnel or animals at an approximately uniform rate, irrespective of local changes in combat or terrain conditions.
NATO Supply Class III Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**20**00 Icon Type: Full Frame		These classes are referenced in NATO APP-06 Petroleum, oil and lubricants (POL) for all purposes, except for operating aircraft or for use in weapons such as flamethrowers, e.g. gasoline, fuel oil, greases, coal and coke. (Class IIIa - aviation fuel and lubricants)





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
NATO Supply Class IV Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**21**00 Icon Type: Full Frame		These classes are referenced in NATO APP-06 Supplies for which initial issue allowances are not prescribed by approved issue tables. Normally includes fortification and construction materials, as well as additional quantities of items identical to those authorized for initial issue (Class II) such as additional vehicles.
Ordnance Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**23**00 Icon Type: Main		
Personnel Services Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**24**00 Icon Type: Main		
Petroleum, Oil and Lubricants Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**25**00 Icon Type: Main		
Public Affairs/Public Information Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**28**00 Icon Type: Main		
Quartermaster Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**29**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Religious Support Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**31**00 Icon Type: Main		
Replacement Holding Unit Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**32**00 Icon Type: Main		
Joint Information Bureau (JIB) Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**35**00 Icon Type: Main		
Transportation Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**36**00 Icon Type: Main		
US Supply Class I Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**37**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Subsistence (food), gratuitous (free) health and comfort items.
US Supply Class IV Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**40**00 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Construction materials, including installed equipment and all fortification and barrier materials.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
US Supply Class VI Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 164200 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Personal demand items (such as health and hygiene products, soaps and toothpaste, writing material, snack food, beverages, cigarettes, batteries, alcohol and cameras—nonmilitary sales items).
US Supply Class VII Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 164300 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Major end items such as launchers, tanks, mobile machine shops and vehicles.
US Supply Class VIII Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 164400 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Medical material (equipment and consumables) including repair parts peculiar to medical equipment. (Class VIIIa – Medical consumable supplies not including blood & blood products); Class VIIIb – Blood & blood components (whole blood, platelets, plasma, packed red cells, etc.).
US Supply Class IX Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 164500 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Repair parts and components to include kits, assemblies and subassemblies (repairable or non-repairable) required for maintenance support of all equipment.
US Supply Class X Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 164600 Icon Type: Full Frame		Referenced in STANAG 2961 Classes of Supply of NATO Land Forces Material to support nonmilitary programs such as agriculture and economic development (not included in Classes I through IX).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Water Purification Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**48**00 Icon Type: Main		
Broadcast Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**49**00 Icon Type: Main		
Interpreter/Translator Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**51**00 Icon Type: Main		
Support Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**52**00 Icon Type: Main		
Army Field Support Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**53**00 Icon Type: Main		
Contracting Services Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**54**00 Icon Type: Main		
Parachute Rigger Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**55**00 Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Human Resources Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**56**00 Icon Type: Main		
Field Feeding Type: Entity Type Entity: Sustainment Symbol Set: 10 Value: 16**57**00 Icon Type: Main		
Maritime Type: Entity Symbol Set: 10 Value: 17**00**00	N/A	Reserved for hierarchical purposes.
Naval Type: Entity Type Entity: Naval Symbol Set: 10 Value: 17**01**00 Icon Type: Main		
Named Headquarters Type: Entity Symbol Set: 10 Value: **18**0000	N/A	Reserved for hierarchical purposes.
Allied Command Europe Rapid Reaction Corps (ARRC) Type: Entity Type Entity: Named Headquarters Symbol Set: 10 Value: 18**01**00 Icon Type: Main		
Allied Command Operations Type: Entity Type Entity: Named Headquarters Symbol Set: 10 Value: 18**02**00 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
International Security Assistance Force (ISAF) Type: Entity Type Entity: Named Headquarters Symbol Set: 10 Value: 18**03**00 Icon Type: Main		
Multinational (MN) Type: Entity Type Entity: Named Headquarters Symbol Set: 10 Value: 18**04**00 Icon Type: Main		
Emergency Operation Type: Entity Symbol Set: 10 Value: **19**0000 Icon Type: Main		White filled
Law Enforcement Type: Entity Symbol Set: 10 Value: **20**0000 Icon Type: Main		
Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice) Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**01**00 Icon Type: Main		
Border Patrol Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**02**00 Icon Type: Main		White filled
Customs Service Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**03**00 Icon Type: Main		White filled




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Drug Enforcement Administration (DEA) Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**04**00 Icon Type: Main		
Department of Justice (DOJ) Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**05**00 Icon Type: Main		
Federal Bureau of Investigation (FBI) Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**06**00 Icon Type: Main		
Police Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**07**00 Icon Type: Main		
Prison Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**08**00 Icon Type: Main		
United States Secret Service (USSS) Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**09**00 Icon Type: Main		
Transportation Security Administration (TSA) Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**10**00 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-III. Land unit icons - Continued.

DESCRIPTION	ICON	REMARKS
Coast Guard Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**11**00 Icon Type: Main		White filled
US Marshals Service Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**12**00 Icon Type: Main		
Internal Security Force Type: Entity Type Entity: Law Enforcement Symbol Set: 10 Value: 20**13**00 Icon Type: Main		
Cyber Type: Entity Symbol Set: 10 Value: **21**0000 Icon Type: Main		










E.6.4 Land unit sector 1 modifiers. Land unit sector 1 modifiers denote mobility, capability and composite loss categories. Table E-IV lists land unit sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE E-IV. Land unit sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Tactical Satellite Communications Symbol Set: 10 Value: 01	Capability		
Area Symbol Set: 10 Value: 02	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Biological Symbol Set: 10 Value: 04	Capability		
Border Symbol Set: 10 Value: 05	Capability		
Communications Contingency Package Symbol Set: 10 Value: 11	Capability		
Construction Symbol Set: 10 Value: 12	Capability		
Cross Cultural Communication Symbol Set: 10 Value: 13	Capability		
Detention Symbol Set: 10 Value: 16	Capability		
Direct Communications Symbol Set: 10 Value: 17	Capability		
Diving Symbol Set: 10 Value: 18	Capability		
Division Symbol Set: 10 Value: 19	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Dog Symbol Set: 10 Value: 20	Capability		
Drilling Symbol Set: 10 Value: 21	Capability		
Electro-Optical Symbol Set: 10 Value: 22	Capability		
Enhanced Symbol Set: 10 Value: 23	Capability		
Fire Direction Center Symbol Set: 10 Value: 25	Capability		
Force Symbol Set: 10 Value: 26	Capability		
Forward Symbol Set: 10 Value: 27	Capability		
Ground Station Module Symbol Set: 10 Value: 28	Capability		
Landing Support Symbol Set: 10 Value: 29	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Meteorological Symbol Set: 10 Value: 32	Capability		
Missile Symbol Set: 10 Value: 34	Capability		
Mobile Advisor and Support Symbol Set: 10 Value: 35	Capability		
Mobile Subscriber Equipment Symbol Set: 10 Value: 36	Capability		
Mobility Support Symbol Set: 10 Value: 37	Capability		
Multinational Symbol Set: 10 Value: 39	Capability		
Multinational Specialized Unit Symbol Set: 10 Value: 40	Capability		
Multiple Rocket Launcher Symbol Set: 10 Value: 41	Capability		
NATO Medical Role 1 Symbol Set: 10 Value: 42	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
NATO Medical Role 2 Symbol Set: 10 Value: 43	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
NATO Medical Role 3 Symbol Set: 10 Value: 44	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
NATO Medical Role 4 Symbol Set: 10 Value: 45	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Naval Symbol Set: 10 Value: 46	Capability		
Operations Symbol Set: 10 Value: 49	Capability		
Radar Symbol Set: 10 Value: 50	Capability		
Radio Frequency Identification (RFID) Interrogator/Sensor Symbol Set: 10 Value: 51	Capability		
Sensor Symbol Set: 10 Value: 55	Capability		
Signal Intelligence Symbol Set: 10 Value: 57	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Single Rocket Launcher Symbol Set: 10 Value: 59	Capability		
Smoke Symbol Set: 10 Value: 60	Capability		
Sound Ranging Symbol Set: 10 Value: 62	Capability		
Survey Symbol Set: 10 Value: 65	Capability		
Tactical Exploitation Symbol Set: 10 Value: 66	Capability		
Target Acquisition Symbol Set: 10 Value: 67	Capability		
Topographic/Geospatial Symbol Set: 10 Value: 68	Capability		
Video Imagery (Combat Camera) Symbol Set: 10 Value: 70	Capability		
Mobility Assault Symbol Set: 10 Value: 71	Capability		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Amphibious Warfare Ship Symbol Set: 10 Value: 72	Capability		
Load Handling System Symbol Set: 10 Value: 73	Capability		
Palletized Load System Symbol Set: 10 Value: 74	Capability		
Support Symbol Set: 10 Value: 77	Capability		
Route, Reconnaissance, and Clearance Symbol Set: 10 Value: 79	Capability		
Assault Symbol Set: 10 Value: 84	Capability		
Criminal Investigation Division Symbol Set: 10 Value: 86	Capability		
Digital Symbol Set: 10 Value: 87	Capability		
Network or Network Operations Symbol Set: 10 Value: 88	Capability		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Airfield, Aerial Port of Debarkation, or Aerial Port of Embarkation Symbol Set: 10 Value: 89	Capability		
Pipeline Symbol Set: 10 Value: 90	Capability		
Postal Symbol Set: 10 Value: 91	Capability		
Theater Symbol Set: 10 Value: 94	Support Level		
Army or Theater Army Symbol Set: 10 Value: 95	Support Level		
Corps Symbol Set: 10 Value: 96	Support Level		
Headquarters or Headquarters Staff Element Symbol Set: 10 Value: 98	Support Level		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Multi-Domain Symbol Set: 10 Value: 99	Capability		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.









TABLE E-IV. Land unit sector 1 modifiers – Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Electric Generation Symbol Set: 10 Value: A1	Capability		
Intercept Symbol Set: 10 Value: A3	Capability		
Intermodal Symbol Set: 10 Value: A4	Capability		
Noncombatant Generic Vessel Symbol Set: 10 Value: A6	Capability		
Search Symbol Set:10 Value: A7	Capability		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.










E.6.5 Land unit sector 2 modifiers. Land unit sector 2 modifiers denote close range and control, mobility and capability categories. Table E-V lists land unit sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE E-V. Land unit sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Arctic Symbol Set: 10 Value: 02	Mobility		
Battle Damage Repair Symbol Set: 10 Value: 03	Capability		
Casualty Staging Symbol Set: 10 Value: 05	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Clearing Symbol Set: 10 Value: 06	Capability		
Control Symbol Set: 10 Value: 08	Capability		
Decontamination Symbol Set: 10 Value: 09	Capability		
Demolition Symbol Set: 10 Value: 10	Capability		
Dental Symbol Set: 10 Value: 11	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Land unit sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Digital Symbol Set: 10 Value: 12	Capability		
Enhanced Position Location Reporting System (EPLRS) Symbol Set: 10 Value: 13	Capability		
High Altitude Symbol Set: 10 Value: 16	Capability		
Intermodal Symbol Set: 10 Value: 17	Capability		
Intensive Care Symbol Set: 10 Value: 18	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Launcher Symbol Set: 10 Value: 21	Capability		
Low Altitude Symbol Set: 10 Value: 23	Capability		
Medium Altitude Symbol Set: 10 Value: 25	Capability		
High to Medium Altitude Symbol Set: 10 Value: 28	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Land unit sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Multi-Channel Symbol Set: 10 Value: 29	Capability		
Optical (Flash) Symbol Set: 10 Value: 30	Capability		
Pack Animal Symbol Set: 10 Value: 31	Capability		
Patient Evacuation Coordination Symbol Set: 10 Value: 32	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Preventive Maintenance Symbol Set: 10 Value: 33	Capability		
Psychological Symbol Set: 10 Value: 34	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Radio Relay Line of Sight Symbol Set: 10 Value: 35	Capability		
Recovery Symbol Set: 10 Value: 37	Capability		
Maintenance Symbol Set: 10 Value: 38	Capability		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Land unit sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Rescue Coordination Center Symbol Set: 10 Value: 39	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Riverine Symbol Set: 10 Value: 40	Mobility		
Single Channel Symbol Set: 10 Value: 41	Capability		
Strategic Symbol Set: 10 Value: 44	Capability		
Support Symbol Set: 10 Value: 45	Capability		
Tactical Symbol Set: 10 Value: 46	Capability		
Towed Symbol Set: 10 Value: 47	Mobility		
Troop Symbol Set: 10 Value: 48	Capability		
Vertical or Short Take-Off and Landing (VTOL/VSTOL) Symbol Set: 10 Value: 49	Mobility		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Land unit sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Veterinary Symbol Set: 10 Value: 50	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
High to Low Altitude Symbol Set: 10 Value: 52	Capability		
Medium to Low Altitude Symbol Set: 10 Value: 53	Capability		
Attack Symbol Set: 10 Value: 54	Capability		
Refuel Symbol Set: 10 Value: 55	Capability		
Utility Symbol Set: 10 Value: 56	Capability		
Combat Search and Rescue Symbol Set: 10 Value: 57	Capability		
Guerrilla Symbol Set: 10 Value: 58	Capability		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Land unit sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Air Assault Symbol Set: 10 Value: 59	Mobility		
Amphibious Symbol Set: 10 Value: 60	Mobility		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Very Heavy Symbol Set: 10 Value: 61	Capability		
Barge, Self-Propelled Symbol Set: 10 Value: 64	Mobility		
Barge, Not Self-Propelled Symbol Set: 10 Value: 65	Mobility		
Launch Symbol Set: 10 Value: 66	Mobility		
Landing Craft Symbol Set: 10 Value: 67	Mobility		
Landing Ship Symbol Set: 10 Value: 68	Mobility		
Service Craft/Yard Symbol Set: 10 Value: 69	Mobility		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Land unit sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Tug Harbor Symbol Set: 10 Value: 70	Mobility		
Ocean Going Tug Boat Symbol Set: 10 Value: 71	Mobility		
Surface Deployment and Distribution Command Symbol Set: 10 Value: 72	Capability		
Noncombatant Generic Vessel Symbol Set: 10 Value: 73	Mobility		
Composite Symbol Set: 10 Value: 74	Capability		
Shelter Symbol Set: 10 Value: 75	Capability		
Surgical Symbol Set: 10 Value: 81	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Blood Symbol Set: 10 Value: 82	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Combat and Operational Stress Control Symbol Set: 10 Value: 83	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-V. Land unit sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Optometry Symbol Set: 10 Value: 86	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Preventive Medicine Symbol Set: 10 Value: 87	Capability		Modifier is offset so that the modifier is not compromised by the main sector icon.
Air Defense Symbol Set: 10 Value: 89	Capability		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Intercept Symbol Set: 10 Value: 91	Capability		
Search Symbol Set: 10 Value: 93	Capability		
Fire Direction Center Symbol Set: 10 Value: 94	Capability		
Construction Value: 95	Capability		
Dog Value: 96	Capability		

E.7 LAND CIVILIAN INDIVIDUALS/ORGANIZATION SYMBOLS






E.7.1 Land civilian individuals/organization symbols. This section includes the lists of icons and modifiers for building land civilian unit symbols. The land civilian

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

individuals/organization symbols use the same amplifiers as land units. Figure E-3 shows the placement of land civilian individuals/organizations amplifiers around the friend symbol frame. Table E-II provides descriptions and formats of each amplifier.





E.7.2 Land civilian individuals/organization icons. Table E-VI depicts land civilian unit icons.

TABLE E-VI. Land civilian individuals/organization icons.

DESCRIPTION	ICON	REMARKS
Civilian Type: Entity Symbol Set: 11 Value: **11**0000		Reserved for hierarchical purposes.
Environmental Protection Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**01**00 Icon Type: Main		
Government Organization Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**02**00 Icon Type: Main		
Individual Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**03**00 Icon Type: Main		
Organization or Group Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**04**00 Icon Type: Main		
Killing Victim Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**05**00 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.








TABLE E-VI. Land civilian individuals/organization icons - Continued.

DESCRIPTION	ICON	REMARKS
Killing Victims Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**06**00 Icon Type: Main		
Victim of an Attempted Killing Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**07**00 Icon Type: Main		
Spy Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**08**00 Icon Type: Main		
Composite Loss Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**09**00 Icon Type: Main		
Emergency Medical Operation Type: Entity Type Entity: Civilian Symbol Set: 11 Value: 11**10**00 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.







E.7.3 Land civilian unit/organization sector 1 modifiers. Land civilian unit sector 1 modifiers denote crime and organization categories. Table E-VII lists land civilian unit sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE E-VII. Land civilian unit/organization sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Murder Victims Symbol Set: 11 Value: 03	Crime		
Displaced Persons/ Refugees/Evacuees Symbol Set: 11 Value: 09	Organization		
Foreign Fighter(s) Symbol Set: 11 Value: 10	Organization		
Gang Member or Gang Symbol Set: 11 Value: 11	Organization		
Leader or Leadership Symbol Set: 11 Value: 13	Organization		
Unwilling/Coerced Recruit Symbol Set: 11 Value: 15	Organization		
Willing Recruit Symbol Set: 11 Value: 16	Organization		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-VII. Land civilian unit/organization sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Religious or Religious Organization Symbol Set: 11 Value: 17	Organization		
Targeted Individual or Organization Symbol Set: 11 Value: 18	Organization		
Terrorist or Terrorist Organization Symbol Set: 11 Value: 19	Organization		
Speaker Symbol Set: 11 Value: 20	Organization		
Other Symbol Set: 11 Value: 23	Composite Loss		
Loot Symbol Set: 11 Value: 24	Crime		

E.7.4 Land civilian unit/organization sector 2 modifiers. Land civilian unit/organization sector 2 modifiers denote organization category. Table E-VIII lists the land civilian unit/organization sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE E-VIII. Land civilian unit/organization sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Leader or Leadership Symbol Set: 11 Value: 01	Organization		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

E.8 LAND EQUIPMENT SYMBOLS

E.8.1 Land equipment symbols. This section includes the lists of icons and modifiers for building land equipment symbols. Figure E-4 shows the placement of land equipment symbol amplifiers around the friend symbol frame. Table E-IX provides descriptions and formats of each amplifier.

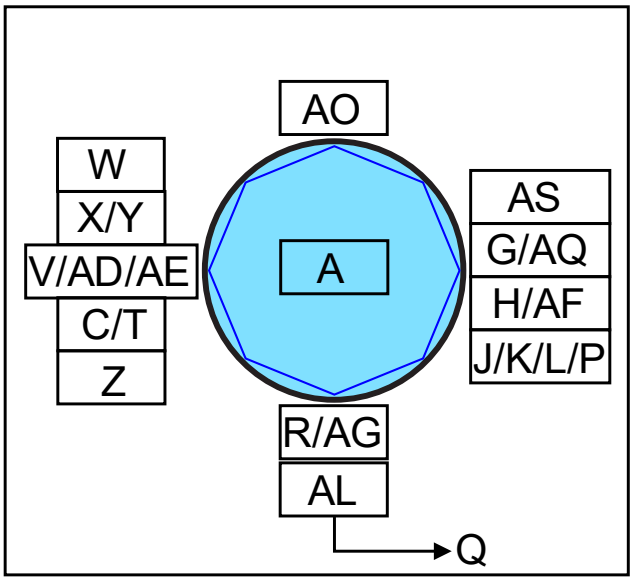


FIGURE E-4. Placement of land equipment symbol amplifiers.

TABLE E-IX. Descriptions and formats of land equipment symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
C	Quantity	An amplifier in an equipment symbol that identifies the number of items present.	Alphanumeric - {1,19} [#########] [XXXXXXXXXX]
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
J	Evaluation Rating	A text amplifier for units, equipment and installations that consists of a single-letter reliability rating and a single digit credibility rating: (See ATP 2-33.4) See Table VI for acceptable values	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IX. Descriptions and formats of land equipment symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
K	Combat Effectiveness	A text amplifier for units and installations that indicates effectiveness.	
L	Signature Equipment	A text amplifier for hostile equipment; "**!**" indicates detectable electronic signatures.	
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. **Display priority:** Mode 5, Mode S, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### **Example**: 2:1234
Q	Direction of Movement	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.9 and figure 15).	
R	Mobility	A graphic amplifier for equipment that depicts the mobility of an object (see 5.3.7.10, figure 15 and table VIII).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or "O/O" for on order. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).	
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.6 for content.	Measurement units shall be displayed within the string **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.7).	
AD	Platform Type	Electronic intelligence notation (ELNOT) or communications emitter notation (CENOT)	
AE	Equipment Teardown Time	Equipment teardown time in minutes.	
AF	Common Identifier	Example: "Hawk" for Hawk SAM system.	



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-IX. Descriptions and formats of land equipment symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AG	Auxiliary Equipment Amplifier	Towed sonar array amplifier: A graphic amplifier for equipment that indicates the presence of a towed sonar array (see 5.3.7.11, and figure 15).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. **Ex. Aircraft**: Red - damaged, Green – fully capable **Ex: Missile**: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote: 1) local/remote status 2) engagement status 3) weapon type.	A:BBB:CC: A = remote/local BBB = engagement status CC = weapon asset
AQ	Guarded Unit	During ballistic missile defense, some tracks are designated as guarded by a particular unit.	
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	







E.8.2 Land equipment icons. Table E-X depicts land equipment icons.

TABLE E-X. Land equipment icons.

DESCRIPTION	ICON	REMARKS
Weapon/Weapon System Type: Entity Symbol Set: 15 Value: **11**0000	N/A	Reserved for hierarchical purposes.
Rifle Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**01**00 Icon Type: Main		
Single Shot Rifle Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Rifle Symbol Set: 15 Value: 1101**01** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Semiautomatic Rifle Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Rifle Symbol Set: 15 Value: 1101**02** Icon Type: Main		
Automatic Rifle Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Rifle Symbol Set: 15 Value: 1101**03** Icon Type: Main		
Machine Gun Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**02**00 Icon Type: Main		
Machine Gun – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Machine Gun Symbol Set: 15 Value: 1102**01** Icon Type: Main		
Machine Gun – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Machine Gun Symbol Set: 15 Value: 1102**02** Icon Type: Main		
Machine Gun – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Machine Gun Symbol Set: 15 Value: 1102**03** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Grenade Launcher Type: Entity Type Entity/Entity Type: Weapon/Weapon System/Grenade Launcher Symbol Set: 15 Value: 11**03**00 Icon Type: Main		
Grenade Launcher – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Grenade Launcher Symbol Set: 15 Value: 1103**01** Icon Type: Main		
Grenade Launcher – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Grenade Launcher Symbol Set: 15 Value: 1103**02** Icon Type: Main		
Grenade Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Grenade Launcher Symbol Set: 15 Value: 1103**03** Icon Type: Main		
Flame Thrower Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**04**00 Icon Type: Main		
Air Defense Gun Type: Entity Type Entity/Entity Type: Weapon/Weapon System/Gun Symbol Set: 15 Value: 11**05**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Air Defense Gun – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Air Defense Gun Symbol Set: 15 Value: 1105**01** Icon Type: Main		
Air Defense Gun – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Air Defense Gun Symbol Set: 15 Value: 1105**02** Icon Type: Main		
Air Defense Gun – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Air Defense Gun Symbol Set: 15 Value: 1105**03** Icon Type: Main		
Antitank Gun Type: Entity Type Entity/Entity Type: Weapon/Weapon System/Antitank Gun Symbol Set: 15 Value: 11**06**00 Icon Type: Main		
Antitank Gun – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Antitank Gun Symbol Set: 15 Value: 1106**01** Icon Type: Main		
Antitank Gun – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Antitank Gun Symbol Set: 15 Value: 1106**02** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Antitank Gun – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Antitank Gun Symbol Set: 15 Value: 1106**03** Icon Type: Main		
Direct Fire Gun Type: Entity Type Entity/Entity Type: Weapon/Weapon System/Direct Fire Gun Symbol Set: 15 Value: 11**07**00 Icon Type: Main		
Direct Fire Gun – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Direct Fire Gun Symbol Set: 15 Value: 1107**01** Icon Type: Main		
Direct Fire Gun – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Direct Fire Gun Symbol Set: 15 Value: 1107**02** Icon Type: Main		
Direct Fire Gun – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Direct Fire Gun Symbol Set: 15 Value: 1107**03** Icon Type: Main		
Recoilless Gun Type: Entity Type Entity/Entity Type: Weapon/Weapon System/ Recoilless Gun Symbol Set: 15 Value: 11**08**00 Icon Type: Main		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Recoilless Gun – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Recoilless Gun Symbol Set: 15 Value: 1108**01** Icon Type: Main		
Recoilless Gun – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Recoilless Gun Symbol Set: 15 Value: 1108**02** Icon Type: Main		
Recoilless Gun – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Recoilless Gun Symbol Set: 15 Value: 1108**03** Icon Type: Main		
Howitzer Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**09**00 Icon Type: Main		
Howitzer – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Howitzer Symbol Set: 15 Value: 1109**01** Icon Type: Main		
Howitzer – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Howitzer Symbol Set: 15 Value: 1109**02** Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Howitzer – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Howitzer Symbol Set: 15 Value: 110**903** Icon Type: Main		
Missile Launcher Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**10**00 Icon Type: Main		
Missile Launcher – Light Entity/Entity Subtype: Weapon/Weapon System/Missile Launcher Symbol Set: 15 Value: 1110**01** Icon Type: Main		
Missile Launcher – Medium Entity/Entity Subtype: Weapon/Weapon System/Missile Launcher Symbol Set: 15 Value: 1110**02** Icon Type: Main		
Missile Launcher – Heavy Entity/Entity Subtype: Weapon/Weapon System/Missile Launcher Symbol Set: 15 Value: 1110**03** Icon Type: Main		
Air Defense Missile Launcher Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**11**00 Icon Type: Main		
Air Defense Missile Launcher – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Air Defense Missile Launcher Symbol Set: 15 Value: 1111**01** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Air Defense Missile Launcher – Light, TLAR Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Air Defense Missile Launcher Symbol Set: 15 Value: 111**02** Icon Type: Full Octagon		
Air Defense Missile Launcher – Light, TELAR Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Air Defense Missile Launcher Symbol Set: 15 Value: 111**03** Icon Type: Full Octagon		
Air Defense Missile Launcher – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Air Defense Missile Launcher Symbol Set: 15 Value: 111**04** Icon Type: Main		
Air Defense Missile Launcher – Medium, TLAR Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Air Defense Missile Launcher Symbol Set: 15 Value: 111**05** Icon Type: Full Octagon		
Air Defense Missile Launcher – Medium, TELAR Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Air Defense Missile Launcher Symbol Set: 15 Value: 111**06** Icon Type: Full Octagon		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Air Defense Missile Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Air Defense Missile Launcher Symbol Set: 15 Value: 1111**07** Icon Type: Main		
Air Defense Missile Launcher – Heavy, TLAR Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Air Defense Missile Launcher Symbol Set: 15 Value: 1111**08** Icon Type: Full Octagon		
Air Defense Missile Launcher – Heavy, TELAR Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Air Defense Missile Launcher Symbol Set: 15 Value: 1111**09** Icon Type: Full Octagon		
Antitank Missile Launcher Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**12**00 Icon Type: Main		
Antitank Missile Launcher – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Antitank Missile Launcher Symbol Set: 15 Value: 1112**01** Icon Type: Main		
Antitank Missile Launcher – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Antitank Missile Launcher Symbol Set: 15 Value: 1112**02** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Antitank Missile Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Antitank Missile Launcher Symbol Set: 15 Value: 1112**03** Icon Type: Main		
Surface-To-Surface Missile Launcher Type: Entity Type Entity/Entity Type: Weapon/Weapon System Symbol Set: 15 Value: 11**13**00 Icon Type: Main		
Surface-To-Surface Missile Launcher – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Surface-To-Surface Missile Launcher Symbol Set: 15 Value: 1113**01** Icon Type: Main		
Surface-To-Surface Missile Launcher – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Surface-To-Surface Missile Launcher Symbol Set: 15 Value: 1113**02** Icon Type: Main		
Surface-To-Surface Missile Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/ Surface-To-Surface Missile Launcher Symbol Set: 15 Value: 1113**03** Icon Type: Main		
Mortar Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 111**4**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Mortar – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Mortar Symbol Set: 15 Value: 1114**01** Icon Type: Main		
Mortar – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Mortar Symbol Set: 15 Value: 1114**02** Icon Type: Main		
Mortar – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Mortar Symbol Set: 15 Value: 1114**03** Icon Type: Main		
Single Rocket Launcher Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**15**00 Icon Type: Main		
Single Rocket Launcher – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Single Rocket Launcher Symbol Set: 15 Value: 1115**01** Icon Type: Main		
Single Rocket Launcher – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Single Rocket Launcher Symbol Set: 15 Value: 1115**02** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Single Rocket Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Single Rocket Launcher Symbol Set: 15 Value: 111**503** Icon Type: Main		
Multiple Rocket Launcher Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**16**00 Icon Type: Main		
Multiple Rocket Launcher – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Multiple Rocket Launcher Symbol Set: 15 Value: 1116**01** Icon Type: Main		
Multiple Rocket Launcher – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Multiple Rocket Launcher Symbol Set: 15 Value: 1116**02** Icon Type: Main		
Multiple Rocket Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Multiple Rocket Launcher Symbol Set: 15 Value: 1116**03** Icon Type: Main		
Antitank Rocket Launcher Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**17**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Antitank Rocket Launcher – Light Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Antitank Rocket Launcher Symbol Set: 15 Value: 111**01** Icon Type: Main		
Antitank Rocket Launcher – Medium Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Antitank Rocket Launcher Symbol Set: 15 Value: 111**02** Icon Type: Main		
Antitank Rocket Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Weapon/Weapon System/Antitank Rocket Launcher Symbol Set: 15 Value: 111**03** Icon Type: Main		
Nonlethal Weapon Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**18**00 Icon Type: Main		
Taser Nonlethal Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**19**00 Icon Type: Main		
Water Cannon Nonlethal Type: Entity Type Entity: Weapon/Weapon System Symbol Set: 15 Value: 11**20**00 Icon Type: Main		
Vehicle Type: Entity Symbol Set: 15 Value: **12**0000	N/A	Reserved for hierarchical purposes.








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Armored Type: Entity Type Entity: Vehicle Symbol Set: 15 Value: 12**01**00	N/A	Reserved for hierarchical purposes.
Armored Fighting Vehicle Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**01** Icon Type: Main		
Armored Fighting Vehicle Command and Control Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**02** Icon Type: Main		
Armored Personnel Carrier Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**03** Icon Type: Main		
Armored Personnel Carrier Ambulance Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**04** Icon Type: Main		
Armored Protected Vehicle Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**05** Icon Type: Main		
Armored Personnel Carrier, Recovery Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**08** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Combat Service Support Vehicle Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**09** Icon Type: Main		
Light Armored Reconnaissance Type: Entity Subtype Entity/Entity Type: Vehicle/Armored Symbol Set: 15 Value: 1201**11** Icon Type: Full Frame		The gray circle is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Tank Type: Entity Type Entity: Vehicle Symbol Set: 15 Value: 1**02**00 Icon Type: Main		
Tank – Light Type: Entity Subtype Entity/Entity Type: Vehicle/Tank Symbol Set: 15 Value: 1202**01** Icon Type: Full Octagon		
Tank – Medium Type: Entity Subtype Entity/Entity Type: Vehicle/Tank Symbol Set: 15 Value: 1202**02** Icon Type: Full Octagon		
Tank – Heavy Type: Entity Subtype Entity/Entity Type: Vehicle/Tank Symbol Set: 15 Value: 1202**03** Icon Type: Full Octagon		
Engineer Vehicle and Equipment Type: Entity Symbol Set: 15 Value: **13**0000 Icon Type: Full Octagon		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Bridge Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**01**00 Icon Type: Main		
Fixed Bridge Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**03**00 Icon Type: Full Octagon		
Floating Bridge Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**04**00 Icon Type: Full Octagon		
Folding Girder Bridge Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**05**00 Icon Type: Main		
Hollow Deck Bridge Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**06**00 Icon Type: Main		
Drill Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**07**00 Icon Type: Full Octagon		
Drill Mounted on Utility Vehicle Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/Drill Symbol Set: 15 Value: 1307**01** Icon Type: Full Octagon		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Earthmover Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**08**00 Icon Type: Full Octagon		
Multifunctional Earthmover/Digger Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Earthmover Symbol Set: 15 Value: 1308**01** Icon Type: Full Octagon		
Mine Clearing Equipment Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**09**00 Icon Type: Main		
Mine Clearing Equipment on Tank Chassis Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Mine Clearing Equipment Symbol Set: 15 Value: 1309**02** Icon Type: Full Octagon		
Assault Breacher Vehicle (ABV) with Combat Dozer Blade Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Mine Clearing Equipment Symbol Set: 15 Value: 1309**03** Icon Type: Full Octagon		
Medium Capability Equipment Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Mine Clearing Equipment Symbol Set: 15 Value: 1309**04** Icon Type: Full Octagon		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Heavy Capability Equipment Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Mine Clearing Equipment Symbol Set: 15 Value: 1309**05** Icon Type: Full Octagon		
Mine Laying Equipment Type: Entity Type Entity: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**10**00 Icon Type: Full Octagon		
Mine Laying Equipment on Utility Vehicle Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Mine Laying Equipment Symbol Set: 15 Value: 1310**01** Icon Type: Full Octagon		
Armored Carrier with Volcano Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Mine Laying Equipment Symbol Set: 15 Value: 1310**02** Icon Type: Full Octagon		
Truck Mounted with Volcano Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/ Mine Laying Equipment Symbol Set: 15 Value: 1310**03** Icon Type: Full Octagon		
Dozer, Tank Chassis Type: Entity Type Entity/Entity Type: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**11**00 Icon Type: Full Octagon		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Dozer, Armored Type: Entity Subtype Entity/Entity Type: Engineer Vehicle and Equipment/Dozer Symbol Set: 15 Value: 1311**01** Icon Type: Full Octagon		
Armored Assault Type: Entity Type Entity/Entity Type: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**12**00 Icon Type: Full Octagon		
Armored Engineer Recon Vehicle (AERV) Type: Entity Type Entity/Entity Type: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**13**00 Icon Type: Full Octagon		
Backhoe Type: Entity Type Entity/Entity Type: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**14**00 Icon Type: Full Octagon		
Construction Vehicle Type: Entity Type Entity/Entity Type: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**15**00 Icon Type: Full Octagon		
Ferry Transporter Type: Entity Type Entity/Entity Type: Engineer Vehicle and Equipment Symbol Set: 15 Value: 13**16**00 Icon Type: Full Octagon		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Utility Vehicle Type: Entity Symbol Set: 15 Value: **14**0000	N/A	Reserved for hierarchical purposes.
Vehicle (Generic) Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 14**01**00 Icon Type: Main		
Medical Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 14**02**00 Icon Type: Main		
Mobile Emergency Physician Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 14**04**00 Icon Type: Main		
Bus Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 14**05**00 Icon Type: Full Octagon		
Semi-Trailer and Truck Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 14**06**00 Icon Type: Full Octagon		
Semi-Trailer and Truck - Light Type: Entity Subtype Entity/Entity Type: Utility Vehicle/Semi-Trailer and Truck Symbol Set: 15 Value: 1406**01** Icon Type: Full Octagon		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Semi-Trailer and Truck - Medium Type: Entity Subtype Entity/Entity Type: Utility Vehicle/Semi-Trailer and Truck Symbol Set: 15 Value: 1406**02** Icon Type: Full Octagon		
Semi-Trailer and Truck - Heavy Type: Entity Subtype Entity/Entity Type: Utility Vehicle/Semi-Trailer and Truck Symbol Set: 15 Value: 1406**03** Icon Type: Full Octagon		
Limited Cross-Country Truck Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 1**407**00 Icon Type: Full Octagon		
Cross-Country Truck Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 1**408**00 Icon Type: Full Octagon		
Petroleum, Oil and Lubricant Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 1**409**00 Icon Type: Full Octagon		
Water Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 1**410**00 Icon Type: Full Octagon		
Amphibious Utility Wheeled Vehicle Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 1**411**00 Icon Type: Full Octagon		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Tow Truck Type: Entity Type Entity: Utility Vehicle Symbol Set: 15 Value: 14**12**00 Icon Type: Full Octagon		
Tow Truck, Light Type: Entity Subtype Entity/ Entity Type: Utility Vehicle/Tow Truck Symbol Set: 15 Value: 1412**01** Icon Type: Full Octagon		
Tow Truck, Heavy Type: Entity Subtype Entity/ Entity Type: Utility Vehicle/Tow Truck Symbol Set: 15 Value: 1412**02** Icon Type: Full Octagon		N/A
Train Type: Entity Symbol Set: 15 Value: **15**0000	N/A	Reserved for hierarchical purposes.
Locomotive Type: Entity Type Entity: Train Symbol Set: 15 Value: 15**01**00 Icon Type: Full Octagon		
Civilian Vehicle Type: Entity Symbol Set: 15 Value: **16**0000	N/A	Reserved for hierarchical purposes.
Automobile Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**01**00 Icon Type: Main		White filled




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Open-Bed Truck Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**02**00 Icon Type: Main		White filled
Multiple Passenger Vehicle Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**03**00 Icon Type: Main		White filled
Utility Vehicle Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**04**00 Icon Type: Main		White filled
Jeep Type Vehicle Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**05**00 Icon Type: Main		White filled
Tractor Trailer Truck with Box Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**06**00 Icon Type: Main		White filled
Tractor Trailer Truck with Flatbed Trailer Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**07**00 Icon Type: Main		White filled
Known Insurgent Vehicle Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**08**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Drug Vehicle Type: Entity Type Entity: Civilian Vehicle Symbol Set: 15 Value: 16**09**00 Icon Type: Main		
Law Enforcement Type: Entity Symbol Set: 15 Value: **1**70000 Icon Type: Main		
Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice) Type: Entity Type Entity: Law Enforcement Symbol Set: 15 Value: 17**01**00 Icon Type: Main		
Border Patrol Type: Entity Type Entity: Law Enforcement Symbol Set: 15 Value: 17**02**00 Icon Type: Main		White filled
Customs Service Type: Entity Type Entity: Law Enforcement Symbol Set: 15 Value: 17**03**00 Icon Type: Main		White filled
Drug Enforcement Administration (DEA) Type: Entity Type Entity: Law Enforcement Symbol Set: 15 Value: 17**04**00 Icon Type: Main		
Department of Justice (DOJ) Type: Entity Type Entity/Entity Type: Law Enforcement Symbol Set: 15 Value: 17**05**00 Icon Type: Main		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Federal Bureau of Investigation (FBI) Type: Entity Type Entity/Entity Type Law Enforcement Symbol Set: 15 Value: 17**06**00 Icon Type: Main		
Police Type: Entity Type Entity/Entity Type: Law Enforcement Symbol Set: 15 Value: 17**07**00 Icon Type: Main		
United States Secret Service (USSS) Type: Entity Type Entity/Entity Type: Law Enforcement Symbol Set: 15 Value: 17**08**00 Icon Type: Main		
Transportation Security Administration (TSA) Type: Entity Type Entity/Entity Type: Law Enforcement Symbol Set: 15 Value: 17**09**00 Icon Type: Main		
Coast Guard Type: Entity Type Entity/Entity Type: Law Enforcement Symbol Set: 15 Value: 17**10**00 Icon Type: Main		White filled
US Marshals Service Type: Entity Type Entity/Entity Type: Law Enforcement Symbol Set: 15 Value: 17**11**00 Icon Type: Main		
Pack Animals Type: Entity Symbol Set: 15 Value: **18**0000 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Missile Support Type: Entity Symbol Set: 15 Value: **19**0000 Icon Type: Full Octagon		
Transloader Type: Entity Type Entity: Missile Support Symbol Set: 15 Value: 19**01**00 Icon Type: Full Octagon		
Transporter Type: Entity Type Entity: Missile Support Symbol Set: 15 Value: 19**02**00 Icon Type: Full Octagon		
Crane/Loading Device Type: Entity Type Entity: Missile Support Symbol Set: 15 Value: 19**03**00 Icon Type: Full Octagon		
Propellant Transporter Type: Entity Type Entity: Missile Support Symbol Set: 15 Value: 19**04**00 Icon Type: Full Octagon		
Warhead Transporter Type: Entity Type Entity: Missile Support Symbol Set: 15 Value: 19**05**00 Icon Type: Full Octagon		
Other Equipment Type: Entity Symbol Set: 15 Value: **20**0000	N/A	Reserved for hierarchical purposes.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Antennae Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**01**00 Icon Type: Full Octagon		
Bomb Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**02**00 Icon Type: Main		
Booby Trap Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**03**00 Icon Type: Full Octagon		
CBRN Equipment Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**04**00 Icon Type: Main		
Computer System Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**05**00 Icon Type: Main		
Command Launch Equipment (CLE) Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**06**00 Icon Type: Main		
Generator Set Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**07**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Ground-Based Midcourse Defense (GMD) Fire Control (GFC) Center Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**08**00 Icon Type: Main		
In-Flight Interceptor Communications System (IFICS) Data Terminal (IDT) Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**09**00 Icon Type: Main		
Directed Energy Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**10**00 Icon Type: Main		
Military Information Support Operations (MISO) Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**11**00 Icon Type: Main		
Sustainment Shipments Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**12**00 Icon Type: Main		
Tent Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**13**00	N/A	Reserved for hierarchical purposes.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Civilian Type: Entity Subtype Entity: Other Equipment/Tent Symbol Set: 15 Value: 2013**01** Icon Type: Main		White filled
Military Type: Entity Subtype Entity: Other Equipment/Tent Symbol Set: 15 Value: 2013**02** Icon Type: Main		
Unit Deployment Shipments Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**14**00 Icon Type: Main		
Emergency Medical Operation Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**15**00 Icon Type: Main		
Tactical Air Navigation (TACAN) Type: Entity Type Entity: Other Equipment Symbol Set: 15 Value: 20**16**00 Icon Type: Main		
Land Mines Type: Entity Symbol Set: 15 Value: **21**0000	N/A	Reserved for hierarchical purposes.
Land Mine Type: Entity Type Entity: Land Mine Symbol Set: 15 Value: 21**01**00 Icon Type: Full Octagon		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Antipersonnel Land Mine (APL) Type: Entity Type Entity: Land Mine Symbol Set: 15 Value: 21**02**00 Icon Type: Full Octagon		
Antitank Mine Type: Entity Type Entity: Land Mine Symbol Set: 15 Value: 21**03**00 Icon Type: Full Octagon		
Improvised Explosive Device (IED) Type: Entity Type Entity: Land Mine Symbol Set: 15 Value: 21**04**00 Icon Type: Main		Used with hostile standard identity only
Less Than Lethal Type: Entity Type Entity: Land Mine Symbol Set: 15 Value: 21**05**00 Icon Type: Full Octagon		
Sensors Type: Entity Symbol Set: 15 Value: **22**0000	N/A	Reserved for hierarchical purposes.
Sensor Type: Entity Type Entity: Sensors Symbol Set: 15 Value: 22**01**00 Icon Type: Main		
Sensor Emplaced Type: Entity Type Entity: Sensors Symbol Set: 15 Value: 22**02**00 Icon Type: Main+1		N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-X. Land equipment icons - Continued.

DESCRIPTION	ICON	REMARKS
Radar Type: Entity Type Entity: Sensors Symbol Set: 15 Value: 22**03**00 Icon Type: Main		N/A
Emergency Operation Type: Entity Symbol Set: 15 Value: **23**0000 Icon Type: Main		White filled
Fire Fighting/Fire Protection Type: Entity Type Entity/Entity Type: Emergency Operation Symbol Set: 15 Value: 23**02**00 Icon Type: Main		
Manual Track Type: Entity (Local) Symbol Set: 15 Value:**24**0000 Icon Type: Full Octagon		
Rotary Wing Type: Entity Symbol Set: 15 Value:**25**0000 Icon Type: Main		






E.8.3 Land equipment sector 1 modifiers. Land equipment sector 1 modifiers denote sensor type or capability category. Table E-XI lists land equipment sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE E-XI. Land equipment sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Biological Symbol Set: 15 Value: 01	Sensor Type		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XI. Land equipment sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Early Warning Radar Symbol Set: 15 Value: 03	Sensor Type		
Intrusion Symbol Set: 15 Value: 04	Sensor Type		
Upgraded Early Warning Radar Symbol Set: 15 Value: 07	Sensor Type		
Multi-Purpose Blade Symbol Set: 15 Value: 12	Capability		
Tank-Width Mine Plow Symbol Set: 15 Value: 13	Capability		

E.8.4 Land equipment sector 2 modifiers. Land equipment sector 2 modifiers denote capability category. Table E-XII lists the land equipment sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE E-XII. Land equipment sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Tractor Trailer Symbol Set: 15 Value: 06	Capability		N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

E.9 LAND INSTALLATION SYMBOLS

E.9.1 Land installation symbols. This section includes the lists of icons and modifiers for building land installation symbols. Figure E-5 shows the placement of land installation symbol amplifiers around the friend symbol frame. Table E-XIII provides descriptions and formats of each amplifier.

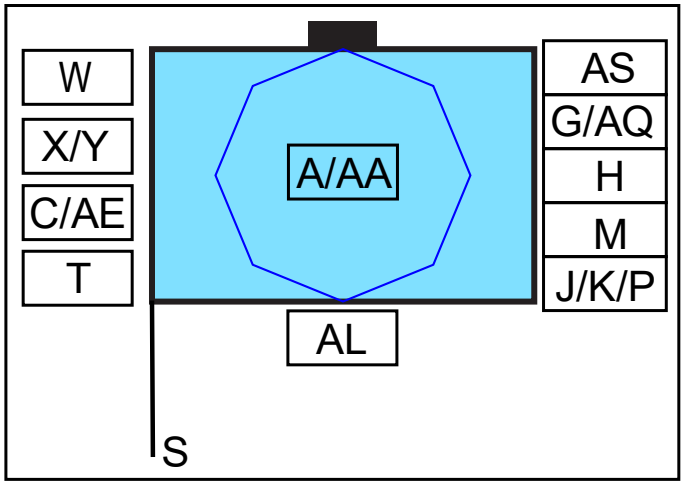


FIGURE E-5. Placement of land installation symbol amplifiers.

TABLE E-XIII. Descriptions and formats of land installation symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
C	Quantity	An amplifier in a symbol that identifies the number of items present.	Alphanumeric - {1,19} [#########] [XXXXXXXXXX]
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
J	Evaluation Rating	A text amplifier for units, equipment and installations that consists of a single-letter reliability rating and a single digit credibility rating: (See ATP 2-33.4). See Table VI for acceptable values	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIII. Descriptions and formats of land installation symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
K	Combat Effectiveness	A text amplifier for units and installations that indicates effectiveness. **The entries are:** fully operational (FO) substantially operational (SO) marginally operational (MO) not operational (NO) unknown (UNK)	
M	Higher Formation	A text amplifier for units that indicates number or title of higher echelon command (Corps is designated by Roman numerals).	
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. **Display priority:** Mode 5, Mode S, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### **Example**: 2:1234
S	Headquarters Staff	A graphic amplifier for units, installations and stability operations that identifies them as a headquarters (see figure 15).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
W	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or "O/O" for on order. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).	
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.6 for content.	Measurement units shall be displayed within the string **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
AE	Equipment Teardown Time	Equipment teardown time in minutes.	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. **Ex. Aircraft**: Red - damaged, Green – fully capable **Ex: Missile**: Red – imminent threat, Green – no threat




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIII. Descriptions and formats of land installation symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AQ	Guarded Unit	During ballistic missile defense, some tracks are designated as guarded by a particular unit.	
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	





E.9.2 Land installation icons. Table E-XIV depicts land installation icons.

TABLE E-XIV. Land installation icons.

DESCRIPTION	ICON	REMARKS
Installation Type: Entity Symbol Set: 20 Value: **11**0000	N/A	Reserved for hierarchical purposes.
Aircraft Production/Assembly Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**01**00 Icon Type: Main		
Ammunition and Explosives Production Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**02**00 Icon Type: Full Octagon		
Ammunition Cache Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**03**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Armament Production Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**04**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Black List Location Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**05**00 Icon Type: Main		
Chemical, Biological, Radiological and Nuclear (CBRN) Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**06**00 Icon Type: Main		
Engineer Equipment Production Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**07**00 Icon Type: Full Octagon		
Bridge Type: Entity Type Entity: Installation/Engineer Equipment Production Symbol Set: 20 Value: 1107**01** Icon Type: Main		
Equipment Manufacture Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**08**00 Icon Type: Full Octagon		
Government Leadership Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**09**00 Icon Type: Main		
Gray List Location Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**10**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Mass Grave Site Type: Entity Type Entity: Installation Symbol Set: 20 Value: 111**1**00 Icon Type: Main		
Materiel Type: Entity Type Entity: Installation Symbol Set: 20 Value: 111**2**00 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Mine Type: Entity Type Entity: Installation Symbol Set: 20 Value: 111**3**00 Icon Type: Main		
Missile and Space System Production Type: Entity Type Entity: Installation Symbol Set: 20 Value: 111**4**00 Icon Type: Full Octagon		
Nuclear (Non CBRN Defense) Type: Entity Type Entity: Installation Symbol Set: 20 Value: 111**5**00 Icon Type: Main		
Printed Media Type: Entity Type Entity: Installation Symbol Set: 20 Value: 111**6**00 Icon Type: Main		
Safe House Type: Entity Type Entity: Installation Symbol Set: 20 Value: 111**7**00 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
White List Location Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**18**00 Icon Type: Main		
Tented Camp Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**19**00	N/A	Reserved for hierarchical purposes.
Civilian Camp Type: Entity Subtype Entity/Entity Type: Installation/Tented Camp Symbol Set: 20 Value: 1119**03** Icon Type: Main		White filled
Military Camp Type: Entity Subtype Entity/Entity Type: Installation/Tented Camp Symbol Set: 20 Value: 1119**04** Icon Type: Main		
Warehouse/Storage Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**20**00 Icon Type: Full Octagon		
Grenade Type: Entity Subtype Entity/Entity Type: Installation/Warehouse/Storage Symbol Set: 20 Value: 1120**01** Icon Type: Main		
Law Enforcement Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**21**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice) Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112101 Icon Type: Main		
Border Patrol Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112102 Icon Type: Main		White filled
Customs Service Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112103 Icon Type: Main		White filled
Drug Enforcement Agency (DEA) Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112104 Icon Type: Main		
Department of Justice (DOJ) Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112105 Icon Type: Main		
Federal Bureau of Investigation (FBI) Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112106 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Police Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112107 Icon Type: Main		
Prison Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112108 Icon Type: Main		
United States Secret Service (USSS) Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112109 Icon Type: Main		
Transportation Security Administration (TSA) Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112110 Icon Type: Main		
Coast Guard Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112111 Icon Type: Main		White filled
US Marshals Service Type: Entity Subtype Entity/Entity Type: Installation/Law Enforcement Symbol Set: 20 Value: 112112 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Emergency Operation Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**22**00 Icon Type: Main		White filled
Fire Station Type: Entity Subtype Entity/Entity Type: Installation/Emergency Operation Symbol Set: 20 Value: 1122**01** Icon Type: Main		
Emergency Medical Operation Type: Subtype Entity/Entity Type: Installation/Emergency Operation Symbol Set: 20 Value: 1122**02** Icon Type: Main		
Home/House Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**23**00 Icon Type: Main		
Non-Governmental Organization Type: Entity Type Entity: Installation Symbol Set: 20 Value: 11**24**00 Icon Type: Main		
Infrastructure Type: Entity Symbol Set: 20 Value: **12**0000	N/A	Reserved for hierarchical purposes.
Agriculture and Food Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**01**00 Icon Type: Main		White filled





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Agricultural Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**01** Icon Type: Main		White filled
Animal Feedlot Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**02** Icon Type: Main		White filled
Commercial Food Distribution Center Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Farm/Ranch Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**04** Icon Type: Main		
Food Distribution Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**05** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Food Production Center Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**06** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Food Retail Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**107** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Grain Storage Type: Entity Subtype Entity/Entity Type: Infrastructure/Agriculture and Food Symbol Set: 20 Value: 120**108** Icon Type: Full Octagon		White filled
Banking Finance and Insurance Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**02**00 Icon Type: Main		
Atm Type: Entity Subtype Entity/Entity Type: Infrastructure/Banking Finance and Insurance Symbol Set: 20 Value: 1202**01** Icon Type: Main		
Bank Type: Entity Subtype Entity/Entity Type: Infrastructure/Banking Finance and Insurance Symbol Set: 20 Value: 1202**02** Icon Type: Main		
Bullion Storage Type: Entity Subtype Entity/Entity Type: Infrastructure/ Banking Finance and Insurance Symbol Set: 20 Value: 1202**03** Icon Type: Full Octagon		White filled





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Economic Infrastructure Asset Type: Entity Subtype Entity/Entity Type: Infrastructure/Banking Finance and Insurance Symbol Set: 20 Value: 120**04** Icon Type: Main		
Federal Reserve Bank Type: Entity Subtype Entity/Entity Type: Infrastructure/Banking Finance and Insurance Symbol Set: 20 Value: 120**05** Icon Type: Main		White filled
Financial Exchange Type: Entity Subtype Entity/Entity Type: Infrastructure/Banking Finance and Insurance Symbol Set: 20 Value: 120**06** Icon Type: Main		
Financial Services, Other Type: Entity Subtype Entity/Entity Type: Infrastructure/Banking Finance and Insurance Symbol Set: 20 Value: 120**07** Icon Type: Full Octagon		
Commercial Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**03**00 Icon Type: Full Octagon		White filled
Chemical Plant Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 1203**01** Icon Type: Full Octagon		White filled






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Firearms Manufacturer Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**302** Icon Type: Full Octagon		White filled
Firearms Retailer Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**303** Icon Type: Main		White filled
Hazardous Material Production Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**304** Icon Type: Full Octagon		White filled
Hazardous Material Storage Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**305** Icon Type: Full Octagon		White filled
Industrial Site Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**306** Icon Type: Full Octagon		White filled
Landfill Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**307** Icon Type: Main		
Pharmaceutical Manufacturer Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**308** Icon Type: Main		White filled







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Contaminated Hazardous Waste Site Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**09** Icon Type: Main		White filled
Toxic Release Inventory Type: Entity Subtype Entity/Entity Type: Infrastructure/Commercial Symbol Set: 20 Value: 120**10** Icon Type: Main		White filled
Educational Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**04**00 Icon Type: Full Octagon		
College/University Type: Entity Subtype Entity/Entity Type: Infrastructure/Educational Symbol Set: 20 Value: 1204**01** Icon Type: Full Octagon		
School Type: Entity Subtype Entity/Entity Type: Infrastructure/Educational Symbol Set: 20 Value: 1204**02** Icon Type: Full Octagon		
Energy Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**05**00 Icon Type: Full Octagon		
Electric Power Type: Entity Subtype Entity/Entity Type: Infrastructure/Energy Symbol Set: 20 Value: 1205**01** Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Generation Station Type: Entity Subtype Entity/Entity Type: Infrastructure/Energy Symbol Set: 20 Value: 120**502** Icon Type: Main		
Natural Gas Type: Entity Subtype Entity/Entity Type: Infrastructure/Energy Symbol Set: 20 Value: 120**503** Icon Type: Main		
Petroleum/Gas/Oil Type: Entity Subtype Entity/Entity Type: Infrastructure/Energy Symbol Set: 20 Value: 120**505** Icon Type: Main		
Propane Type: Entity Subtype Entity/Entity Type: Infrastructure/Energy Symbol Set: 20 Value: 120**506** Icon Type: Main		White filled
Government Site Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**06**00 Icon Type: Main		White filled
Medical Infrastructure Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**07**00	N/A	Reserved for hierarchical purposes.
Medical Type: Entity Subtype Entity/Entity Type: Infrastructure/Medical Infrastructure Symbol Set: 20 Value: 12070**1** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Medical Treatment Facility (Hospital) Type: Entity Type Entity/Entity Type: Infrastructure/Medical Infrastructure Symbol Set: 20 Value: 120702 Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Military Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 120800 Icon Type: Main		
Airport/Air Base Type: Entity Subtype Entity/Entity Type: Infrastructure/Military Symbol Set: 20 Value: 120803 Icon Type: Main		
Postal Service Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 120900 Icon Type: Full Octagon		White filled
Postal Distribution Center Type: Entity Subtype Entity/Entity Type: Infrastructure/Postal Service Symbol Set: 20 Value: 120901 Icon Type: Full Octagon		White filled
Post Office Type: Entity Subtype Entity/Entity Type: Infrastructure/Postal Service Symbol Set: 20 Value: 120902 Icon Type: Full Octagon		White filled





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Public Venues Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**10**00 Icon Type: Full Octagon		
Enclosed Facility (Public Venue) Type: Entity Subtype Entity/Entity Type: Infrastructure/Public Venues Symbol Set: 20 Value: 1210**01** Icon Type: Full Octagon		White filled
Open Facility (Public Venue) Type: Entity Subtype Entity/Entity Type: Infrastructure/Public Venues Symbol Set: 20 Value: 1210**02** Icon Type: Full Octagon		
Recreational Area Type: Entity Subtype Entity/Entity Type: Infrastructure/Public Venues Symbol Set: 20 Value: 1210**03** Icon Type: Main		
Religious Institution Type: Entity Subtype Entity/Entity Type: Infrastructure/Public Venues Symbol Set: 20 Value: 1210**04** Icon Type: Main		
Special Needs Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**11**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Adult Day Care Type: Entity Subtype Entity/Entity Type: Infrastructure/Special Needs Symbol Set: 20 Value: 121**01** Icon Type: Main		
Child Day Care Type: Entity Subtype Entity/Entity Type: Infrastructure/Special Needs Symbol Set: 20 Value: 121**02** Icon Type: Full Octagon		White filled
Elder Care Type: Entity Subtype Entity/Entity Type: Infrastructure/Special Needs Symbol Set: 20 Value: 121**03** Icon Type: Main		
Telecommunications Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**12**00	N/A	Reserved for hierarchical purposes.
Broadcast Transmitter Antennae Type: Entity Subtype Entity/Entity Type: Infrastructure/Telecommunications Symbol Set: 20 Value: 1212**01** Icon Type: Full Octagon		
Telecommunications (Civilian) Type: Entity Subtype Entity/Entity Type: Infrastructure/Telecommunications Symbol Set: 20 Value: 1212**02** Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Telecommunications Tower Type: Entity Subtype Entity/Entity Type: Infrastructure/Telecommunications Symbol Set: 20 Value: 121**03** Icon Type: Main		
Transportation Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 12**13**00 Icon Type: Main		
Aerial Port of Debarkation/Aerial Port of Embarkation Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 1213**01** Icon Type: Main+1		
Air Traffic Control Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 1213**02** Icon Type: Main		
Bus Station Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 1213**03** Icon Type: Main		White filled
Ferry Terminal Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 1213**04** Icon Type: Main		White filled





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Helicopter Landing Site Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121305 Icon Type: Full Octagon		White filled
Maintenance Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121306 Icon Type: Main		
Railhead/Railroad Station Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121307 Icon Type: Main+1		
Rest Stop Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121308 Icon Type: Main		
Sea Port/Naval Base Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121309 Icon Type: Main+1		
Ship Yard Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121310 Icon Type: Main+1		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Toll Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121311 Icon Type: Main		White filled
Traffic Inspection Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121312 Icon Type: Main		White filled
Tunnel Type: Entity Subtype Entity/Entity Type: Infrastructure/Transportation Symbol Set: 20 Value: 121313 Icon Type: Main		White filled
Water Supply Type: Entity Type Entity: Infrastructure Symbol Set: 20 Value: 121400	N/A	Reserved for hierarchical purposes.
Control Valve Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121401 Icon Type: Main		
Dam Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121402 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Discharge Outfall Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**403** Icon Type: Main		
Ground Water Well Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**404** Icon Type: Full Octagon		
Pumping Station Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**405** Icon Type: Main		
Reservoir Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**406** Icon Type: Main		White filled
Storage Tower Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**407** Icon Type: Main		
Surface Water Intake Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**408** Icon Type: Main		White filled

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.








TABLE E-XIV. Land installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Wastewater Treatment Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**409** Icon Type: Main		
Water Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**410** Icon Type: Main		
Water Treatment Type: Entity Subtype Entity/Entity Type: Infrastructure/Water Supply Symbol Set: 20 Value: 121**411** Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.


E.9.3 Land installation sector 1 modifiers. Land installation sector 1 modifiers denote CBRN type, electric power type and civilian telecommunications type categories. Table E-XV lists land installation sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE E-XV. Land installation sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Biological Symbol Set: 20 Value: 01	CBRN		
Coal Symbol Set: 20 Value: 06	Electric Power Type		Used with Electric Power only
Geothermal Symbol Set: 20 Value: 07	Electric Power Type		Used with Electric Power only
Hydroelectric Symbol Set: 20 Value: 08	Electric Power Type		Used with Electric Power only
Natural Gas Symbol Set: 20 Value: 09	Electric Power Type		Used with Electric Power only
Civilian Telephone Symbol Set: 20 Value: 12	Telecommunications Type		
Civilian Television Symbol Set: 20 Value: 13	Telecommunications Type		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XV. Land installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Displaced Persons/ Refugees/Evacuees Camp Symbol Set: 20 Value: 15	Organization		
Training Camp Symbol Set: 20 Value: 16	Organization		






E.9.4 Land installation sector 2 modifiers. Land installation sector 2 modifiers denote capability category. Table E-XVI lists the land installation sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE E-XVI. Land installation sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Biological Warfare Production Symbol Set: 20 Value: 01	Capability		
Chemical Warfare Production Symbol Set: 20 Value: 02	Capability		
Nuclear Warfare Production Symbol Set: 20 Value: 03	Capability		
Radiological Warfare Production Symbol Set: 20 Value: 04	Capability		
Atomic Energy Reactor Symbol Set: 20 Value: 05	Capability		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE E-XVI. Land installation sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Nuclear Material Production Symbol Set: 20 Value: 06	Capability		
Nuclear Material Storage Symbol Set: 20 Value: 07	Capability		
Weapons Grade Production Symbol Set: 20 Value: 08	Capability		
Transportation Symbol Set: 20 Value: 10	Capability		
Displaced Persons/ Refugees/Evacuees Camp Symbol Set: 20 Value: 11	Organization		
Training Camp Symbol Set: 20 Value: 12	Organization		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

DISMOUNTED INDIVIDUAL SYMBOLS

F.1 SCOPE

F.1.1 Scope. This appendix addresses symbols that support land symbols representing individuals in the C2 domain. The tables in this appendix present the icons and modifiers for dismounted soldiers and other individuals. The information contained herein is intended for compliance.

F.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

F.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

F.4 GENERAL REQUIREMENTS

F.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and land symbology.

F.5 DETAILED REQUIREMENTS

F.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

F.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

F.5.3 Composition of land symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure F-1 shows an example of a dismounted individual symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

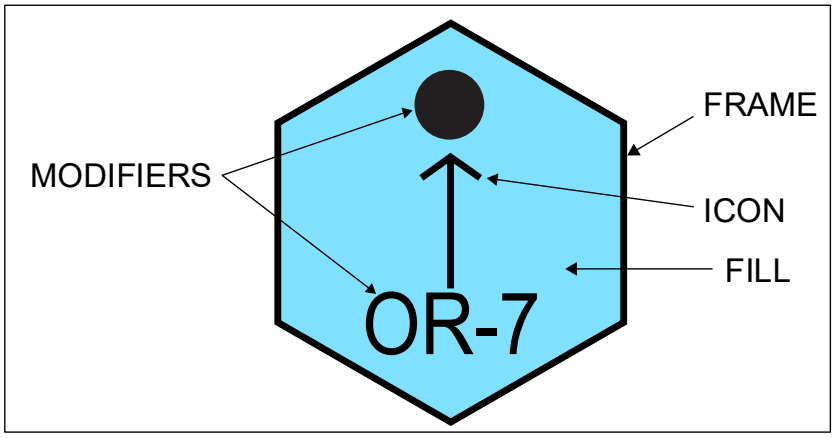





FIGURE F-1. Dismounted individual symbol components.

F.5.3.1 Symbol building process. Table F-I depicts the symbol building process for dismounted individual symbols. The process is identical for icons and modifiers requiring the horizontal bounding octagon.

TABLE F-I. Dismounted individual symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is dismounted individual, and the standard identity is friend The example depicts a “friendly individual.”	
2.	Choose an icon for the symbol. In this example, the icon is “rifle”. The example depicts a “friendly individual with rifle.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “squad,” a sector 1 modifier. The example depicts a “friendly individual with rifle from a squad.”	
4.	If required, choose another modifier to depict an additional characteristic of the icon. In this example, the modifier is “rank code OR-7,” a sector 2 modifier. The example depicts a “friendly individual, rank OR-7, with rifle from a squad.”	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-I. Dismounted individual symbol building process - Continued.

STEP	DESCRIPTION	EXAMPLE
5.	If required, choose a leadership amplifier. In this example, the leadership amplifier is “Leader”. The example depicts a “friendly individual, rank OR-7, squad leader with rifle.”	
6.	The finished symbol will appear as shown in the example.	

F.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see Table F-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see Table F-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

F.5.3.3 Amplifiers.

F.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure F-2 shows the placement of dismounted individual symbol amplifiers around the friend symbol frame. Table F-II provides descriptions and formats of each amplifier.

F.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track’s symbol, or dynamic and move about the symbol based on the track’s characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

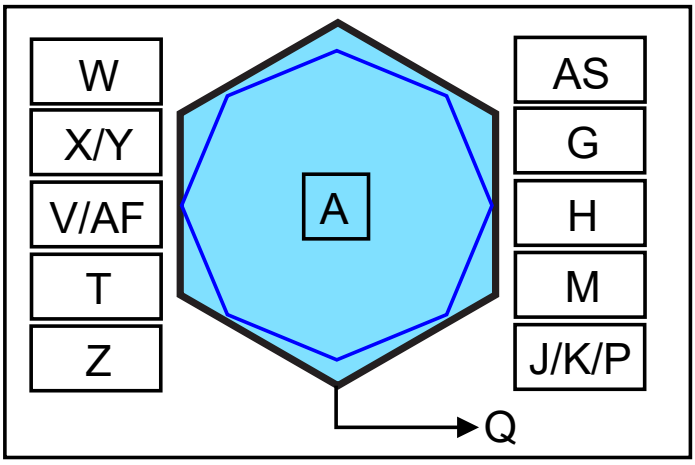


FIGURE F-2. Placement of dismounted individual symbol amplifiers.

TABLE F-II. Descriptions and formats of dismounted individual symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Symbol Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
J	Evaluation Rating	A text amplifier for units, equipment, installations, and dismounted individuals that consists of a single-letter reliability rating and a single digit credibility rating: (See ATP 2-33.4). See Table VI for acceptable values	
K	Combat Effectiveness	A text amplifier for units, installations, and dismounted individuals that indicates effectiveness. **The entries are:** fully operational (FO) substantially operational (SO) marginally operational (MO) not operational (NO) unknown (UNK)	
M	Higher Formation	A text amplifier for units that indicates number or title of higher echelon command (Corps is designated by Roman numerals).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-II. Descriptions and formats of dismounted individual symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes. **Display priority**: Mode 5, Mode S, Mode 2, Mode 3.	Mode 2 Prefix: 2:#### **Example**: 2:1234
Q	Direction of Movement	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.9 and figure 15 in the base document).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).	(DDHHMMSSZMONYYYY) or "O/O" for on order
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.6 for content.	Measurement units shall be displayed within the string. **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.7).	
AF	Common Identifier	Example: "Marine" for service affiliation.	
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

F.6 DISMOUNTED INDIVIDUAL SYMBOLS

F.6.1 Dismounted individual symbols. This section includes the lists of icons and modifiers for building dismounted individual symbols.





F.6.2 Dismounted individual icons. Table F-III depicts dismounted individual icons.

TABLE F-III. Dismounted individuals.

DESCRIPTION	ICON	REMARKS
Military Type: Entity Symbol Set: 27 Value: **11**0000	N/A	Reserved for hierarchical purposes.
Activity/Task Type: Entity Type Entity: Military Symbol Set: 27 Value: 11**02**00	N/A	Reserved for hierarchical purposes.
Explosive Ordnance Disposal (EOD) Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**201** Icon Type: Main		
Field Artillery Observer Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**202** Icon Type: Main		
Joint Fire Support Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**203** Icon Type: Main		
Liaison Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**204** Icon Type: Main		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Dismounted individuals - Continued.

DESCRIPTION	ICON	REMARKS
Messenger Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**05** Icon Type: Main		
Military Police Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**06** Icon Type: Main		
Observer Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**07** Icon Type: Main		
Security Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**08** Icon Type: Main		
Sniper Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**09** Icon Type: Main		
Special Operations Forces Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**10** Icon Type: Main		
Designated Marksman Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**11** Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Dismounted individuals - Continued.

DESCRIPTION	ICON	REMARKS
Medic Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**12** Icon Type: Main		
Signaler Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**13** Icon Type: Main		
Reconnaissance Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**14** Icon Type: Main		
Infantry Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**15** Icon Type: Main		
Close Protection Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**16** Icon Type: Main		
Crowd and Riot Control Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**17** Icon Type: Main		
Special Weapons and Tactics (SWAT) Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 110**18** Icon Type: Main		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Dismounted individuals - Continued.

DESCRIPTION	ICON	REMARKS
Demolition Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 1102**19** Icon Type: Main		
Commander (CDR) Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 1102**20** Icon Type: Main		
Second in Command (SIC) Type: Entity Subtype Entity/Entity Type: Military/Activity/Task Symbol Set: 27 Value: 1102**21** Icon Type: Main		
Lethal Weapons Type: Entity Type Entity: Military Symbol Set: 27 Value: 11**03**00	N/A	Reserved for hierarchical purposes.
Rifle Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 1103**01** Icon Type: Main		
Single Shot Rifle Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 1103**02** Icon Type: Main		
Semiautomatic Rifle Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 1103**03** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Dismounted individuals - Continued.

DESCRIPTION	ICON	REMARKS
Automatic Rifle Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110304 Icon Type: Main		
Machine Gun Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110305 Icon Type: Main		
Machine Gun – Light Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110306 Icon Type: Main		
Machine Gun – Medium Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110307 Icon Type: Main		
Machine Gun – Heavy Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110308 Icon Type: Main		
Grenade Launcher Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110309 Icon Type: Main		
Grenade Launcher – Light Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110310 Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Dismounted individuals - Continued.

DESCRIPTION	ICON	REMARKS
Grenade Launcher – Medium Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110311 Icon Type: Main		
Grenade Launcher – Heavy Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110312 Icon Type: Main		
Flame Thrower Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110313 Icon Type: Main		
Mortar Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110314 Icon Type: Main		
Single Rocket Launcher Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110315 Icon Type: Main		
Antitank Rocket Launcher Type: Entity Subtype Entity/Entity Type: Military/Lethal Weapons Symbol Set: 27 Value: 110316 Icon Type: Main		
Nonlethal Weapons Type: Entity Type Entity: Military Symbol Set: 27 Value: 110400	N/A	Reserved for hierarchical purposes.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-III. Dismounted individuals - Continued.

DESCRIPTION	ICON	REMARKS
Nonlethal Weapon Type: Entity Subtype Entity/Entity Type: Military/Nonlethal Weapons Symbol Set: 27 Value: 110**401** Icon Type: Main		
Nonlethal Grenade Launcher Type: Entity Subtype Entity/Entity Type: Military/Nonlethal Weapons Symbol Set: 27 Value: 110**402** Icon Type: Main		
Taser Type: Entity Subtype Entity/Entity Type: Military/Nonlethal Weapons Symbol Set: 27 Value: 110**403** Icon Type: Main		










F.6.3 Dismounted individual sector 1 modifiers. Dismounted individual sector 1 modifiers capability category. Table F-IV lists dismounted individual sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE F-IV. Dismounted individual sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Field Artillery Observer Symbol Set: 27 Value: 11	Capability		
Joint Fire Support Symbol Set: 27 Value: 12	Capability		
Liaison Symbol Set: 27 Value: 13	Capability		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-IV. Dismounted individual sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Messenger Symbol Set: 27 Value: 14	Capability		
Military Police Symbol Set: 27 Value: 15	Capability		
Observer Symbol Set: 27 Value: 16	Capability		
Designated Marksman Symbol Set: 27 Value: 17	Capability		
Signaler Symbol Set: 27 Value: 20	Capability		
Reconnaissance **Symbol Set**: 27 Value: 21	Capability		
Infantry Symbol Set: 27 Value: 22	Organization		
Commander (CDR) Symbol Set: 27 Value: 23	Organization		
Second in Command (SIC) Symbol Set: 27 Value: 24	Organization		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-IV. Dismounted individual sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Demolition Symbol Set: 27 Value: 25	Capability		
Police Symbol Set: 27 Value: 26	Capability		
Individual Symbol Set: 27 Value: 46			











F.6.4 Dismounted individual sector 2 modifiers. Dismounted individual sector 2 modifiers capability category. Table F-V lists dismounted individual sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE F-V. Dismounted individual sector 2 modifiers-.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Video Imagery (Combat Camera) Symbol Set: 27 Value: 03	Capability		
Functional Staff Area J1 Symbol Set: 27 Value: 04	Command Level		
Functional Staff Area J2 Symbol Set: 27 Value: 05	Command Level		
Functional Staff Area J3 Symbol Set: 27 Value: 06	Command Level		















Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-V. Dismounted individual sector 2 modifiers- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Functional Staff Area J4 Symbol Set: 27 Value: 07	Command Level		
Functional Staff Area J5 Symbol Set: 27 Value: 08	Command Level		
Functional Staff Area J6 Symbol Set: 27 Value: 09	Command Level		
Functional Staff Area J7 Symbol Set: 27 Value: 10	Command Level		
Functional Staff Area J8 Symbol Set: 27 Value: 11	Command Level		
Functional Staff Area J9 Symbol Set: 27 Value: 12	Command Level		
Officer Rank			
Rank O-1/O-2 Symbol Set Value: 27 Value: 14	Command Level		 APP-06 Version
Rank O-3 Symbol Set Value: 27 Value: 15	Command Level		 APP-06 Version















Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-V. Dismounted individual sector 2 modifiers- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Rank O-4 Symbol Set Value: 27 Value: 16	Command Level		 APP-06 Version
Rank O-5 Symbol Set Value: 27 Value: 17	Command Level		 APP-06 Version
Rank O-6 Symbol Set Value: 27 Value: 18	Command Level		 APP-06 Version
Rank O-7 Symbol Set Value: 27 Value: 19	Command Level		 APP-06 Version
Rank O -8 Symbol Set Value: 27 Value: 20	Command Level		 APP-06 Version
Rank O-9 Symbol Set Value: 27 Value: 21	Command Level		 APP-06 Version
Rank O-10 Symbol Set Value: 27 Value: 22	Command Level		 APP-06 Version












Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-V. Dismounted individual sector 2 modifiers- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Rank O-11 Symbol Set Value: 27 Value: 23	Command Level		 APP-06 Version
Enlisted Rank			
Rank E-1 Symbol Set Value: 27 Value: 25	Command Level		 APP-06 Version
Rank E-2 Symbol Set Value: 27 Value: 26	Command Level		 APP-06 Version
Rank E-3 Symbol Set Value: 27 Value: 27	Command Level		 APP-06 Version
Rank E-4 Symbol Set Value: 27 Value: 28	Command Level		 APP-06 Version
Rank E-5 Symbol Set Value: 27 Value: 29	Command Level		 APP-06 Version
Rank E-6 Symbol Set Value: 27 Value: 30	Command Level		 APP-06 Version

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE F-V. Dismounted individual sector 2 modifiers- Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Rank E-7 Symbol Set Value: 27 Value: 31	Command Level		 APP-06 Version
Rank E-8 Symbol Set Value: 27 Value: 32	Command Level		 APP-06 Version
Rank E-9 Symbol Set Value: 27 Value: 33	Command Level		 APP-06 Version
Warrant Officer Rank			
WO-1 Symbol Set Value: 27 Value: 34	Command Level		
WO-2 Symbol Set Value: 27 Value: 35	Command Level		
WO-3 Symbol Set Value: 27 Value: 36	Command Level		
WO-4 Symbol Set Value: 27 Value: 37	Command Level		
WO-5 Symbol Set Value: 27 Value: 38	Command Level		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SEA SURFACE SYMBOLS

G.1 SCOPE

G.1.1 Scope. This appendix addresses symbols that support sea surface units, equipment and installations in the C2 domain. The tables in this appendix present the icons and modifiers for the sea surface symbol set. The information contained herein is intended for compliance.

G.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

G.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

G.4 GENERAL REQUIREMENTS

G.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and sea surface symbology.

G.5 DETAILED REQUIREMENTS

G.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

G.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

G.5.3 Composition of sea surface symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure G-1 shows an example of a sea surface equipment symbol.

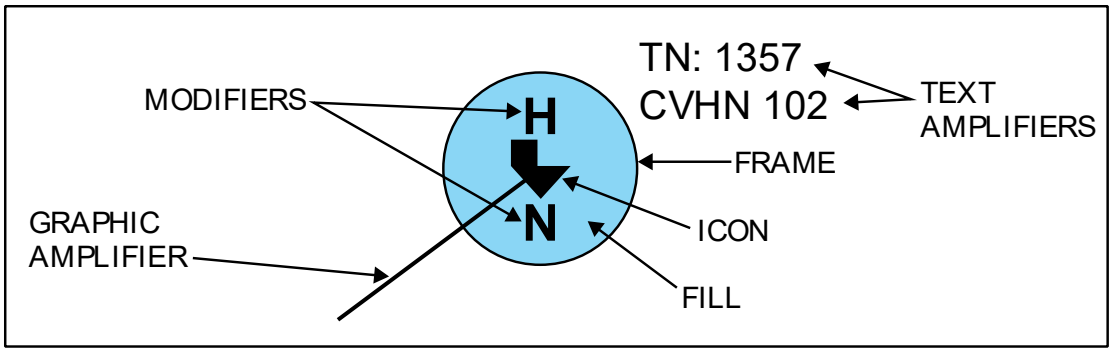






FIGURE G-1. Sea surface symbol components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

G.5.3.1 Symbol building process. Table G-I depicts the symbol building process for sea surface symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE G-I. Sea surface symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is sea surface, and the standard identity is friend. The example depicts a “friendly sea surface track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “carrier,” a sea surface entity type. The example depicts a “friendly military combatant carrier.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “helicopter equipped/VTOL,” a sector 1 modifier. The example depicts a “friendly military combatant carrier, helicopter equipped/VTOL.”	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is “nuclear powered,” a sector 2 modifier. The example depicts a “friendly military combatant carrier, helicopter equipped/VTOL, nuclear powered.”	
5.	The finished symbol will appear as shown in the example.	

G.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table G-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table G-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

G.5.3.3 Amplifiers.

G.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure G-2 shows the placement of sea surface symbol amplifiers around the friend symbol frame. Table G-II provides descriptions and formats of each amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

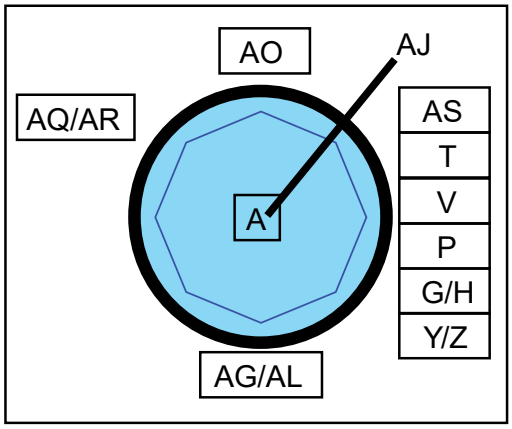


FIGURE G-2. Placement of sea surface symbol amplifiers.

TABLE G-II. Descriptions and formats of sea surface symbol amplifier.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Ship/Ship Type Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
P	Automatic Identification System (AIS)	A text amplifier displaying the maritime Automatic Identification System.	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes decimal minutes, (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
Z	Speed	A text amplifier for CBRN, units and equipment that displays velocity (see 5.3.7.7).	
AG	Auxiliary Equipment	Towed sonar array amplifier: A graphic amplifier for equipment that indicates the presence of a towed sonar array (see 5.3.7.10, figure 13 and table IX).	
AJ	Speed Leader	An amplifier that depicts the speed and direction of movement of an object (see 5.3.7.13.3 and figure 21).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-II. Descriptions and formats of sea surface symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates an operational condition or capacity.	Operational Condition amplifier, if used, shall be comprised of only one color. Ex. Aircraft: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote: 1) local/remote status 2) engagement status 3) weapon type.	A:BBB-CC: A = remote/local BBB = engagement status CC = weapon asset
AQ	Guarded Unit	During ballistic missile defense, some tracks are designated as guarded by a particular unit.	The 2-character string, BG
AR	Special Designator	Special track designators, such as Non-Real Time (NRT) and Tactically Significant (SIG) tracks, are denoted here.	The 3-character strings, NRT or SIG
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	

G.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

G.6 SEA SURFACE UNIT, EQUIPMENT AND INSTALLATION SYMBOLS



G.6.1 Sea surface unit, equipment and installation symbols. This section includes the lists of icons and modifiers for building sea surface unit, equipment and installation symbols.

G.6.2 Sea surface unit, equipment and installation icons. Table G-III depicts sea surface unit, equipment and installation icons.

In accordance with Standard Ship Designator System (STANAG 1166/APP-20), single letter codes specify the type of merchant ship, while two- and three-letter codes specify the type of military ship. For other types of civilian surface vessels, the letter codes of the icon are without a STANAG reference. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons.

DESCRIPTION	ICON	REMARKS
Military Type: Entity Symbol Set: 30 Value: **11**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Military Combatant Type: Entity Symbol Set: 30 Value: **12**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Carrier Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**01**00 Icon Type: Main		
Surface Combatant, Line Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**02**00 Icon Type: Main		
Battleship Type: Entity Subtype Entity/Entity Type: Military Combatant/Surface Combatant, Line Symbol Set: 30 Value: 120201 Icon Type: Main		
Cruiser Type: Entity Subtype Entity/Entity Type: Military Combatant/Surface Combatant, Line Symbol Set: 30 Value: 120202 Icon Type: Main		
Destroyer Type: Entity Subtype Entity/Entity Type: Military Combatant/Surface Combatant, Line Symbol Set: 30 Value: 120203 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Frigate Type: Entity Subtype Entity/Entity Type: Military Combatant/Surface Combatant, Line Symbol Set: 30 Value: 120**04** Icon Type: Main		
Corvette Type: Entity Subtype Entity/Entity Type: Military Combatant/Surface Combatant, Line Symbol Set: 30 Value: 120**05** Icon Type: Main		
Littoral Combatant Ship Type: Entity Subtype Entity/Entity Type: Military Combatant/Surface Combatant, Line Symbol Set: 30 Value: 120**06** Icon Type: Main		
Amphibious Warfare Ship Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 1**20**300 Icon Type: Main		
Amphibious Command Ship Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**01** Icon Type: Main		
Amphibious Assault, Non-Specified Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**02** Icon Type: Main		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Amphibious Assault Ship, General Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**303** Icon Type: Main		
Amphibious Assault Ship, Multipurpose Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**304** Icon Type: Main		
Amphibious Assault Ship, Helicopter Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**305** Icon Type: Main		
Amphibious Transport Dock Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**306** Icon Type: Main		
Landing Ship Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**307** Icon Type: Main		
Landing Craft Type: Entity Subtype Entity/Entity Type: Military Combatant/Amphibious Warfare Ship Symbol Set: 30 Value: 120**308** Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Mine Warfare Ship Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**04**00 Icon Type: Main		
Mine Layer Type: Entity Subtype Entity/Entity Type: Military Combatant/Mine Warfare Ship Symbol Set: 30 Value: 1204**01** Icon Type: Main		
Mine Sweeper Type: Entity Subtype Entity/Entity Type: Military Combatant/Mine Warfare Ship Symbol Set: 30 Value: 1204**02** Icon Type: Main		
Mine Sweeper, Drone Type: Entity Subtype Entity/Entity Type: Military Combatant/Mine Warfare Ship Symbol Set: 30 Value: 1204**03** Icon Type: Main		
Mine Hunter Type: Entity Subtype Entity/Entity Type: Military Combatant/Mine Warfare Ship Symbol Set: 30 Value: 1204**04** Icon Type: Main		
Mine Countermeasures Type: Entity Subtype Entity/Entity Type: Military Combatant/Mine Warfare Ship Symbol Set: 30 Value: 1204**05** Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Mine Countermeasures, Support Ship Type: Entity Subtype Entity/Entity Type: Military Combatant/Mine Warfare Ship Symbol Set: 30 Value: 120**406** Icon Type: Main		
Patrol Boat Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**05**00 Icon Type: Main		
Patrol Craft, Submarine Chaser/Escort, General Type: Entity Subtype Entity/Entity Type: Military Combatant/Patrol Boat Symbol Set: 30 Value: 120**501** Icon Type: Main		
Patrol Ship, General Type: Entity Subtype Entity/Entity Type: Military Combatant/Patrol Boat Symbol Set: 30 Value: 120**502** Icon Type: Main		
Decoy Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**06**00 Icon Type: Main		
Unmanned Surface Water Vehicle (USV) Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**07**00 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Speedboat Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**08**00 Icon Type: Main		
Rigid-Hull Inflatable Boat (RHIB) Type: Entity Subtype Entity/Entity Type: Military Combatant/Speedboat Symbol Set: 30 Value: 1208**01** Icon Type: Main		White filled
Jet Ski Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**09**00 Icon Type: Main		
Navy Task Organization Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**10**00 Icon Type: Main		
Navy Task Element Type: Entity Subtype Entity/Entity Type: Military Combatant/Navy Task Organization Symbol Set: 30 Value: 1210**01** Icon Type: Main		
Navy Task Force Type: Entity Subtype Entity/Entity Type: Military Combatant/Navy Task Organization Symbol Set: 30 Value: 1210**02** Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Navy Task Group Type: Entity Subtype Entity/Entity Type: Military Combatant/Navy Task Organization Symbol Set: 30 Value: 121**03** Icon Type: Main		
Navy Task Unit Type: Entity Subtype Entity/Entity Type: Military Combatant/Navy Task Organization Symbol Set: 30 Value: 121**04** Icon Type: Main		
Convoy Type: Entity Subtype Entity/Entity Type: Military Combatant/Navy Task Organization Symbol Set: 30 Value: 121**05** Icon Type: Main		
Sea-Based X-Band (SBX) Radar Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**11**00 Icon Type: Main		
Tactical Air Navigation (TACAN) Type: Entity Type Entity: Military Combatant Symbol Set: 30 Value: 12**12**00 Icon Type: Main		
Military Noncombatant Type: Entity Symbol Set: 30 Value: **13**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Auxiliary Ship Type: Entity Type Entity: Military Noncombatant Symbol Set: 30 Value: 13**01**00 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Ammunition Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130101 Icon Type: Main		
Naval Stores Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130102 Icon Type: Main		
Auxiliary Flag Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130103 Icon Type: Main		
Intelligence Collector Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130104 Icon Type: Main		
Oceanographic Research Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130105 Icon Type: Main		
Survey Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130106 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Hospital Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130107 Icon Type: Main		
Naval Cargo Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130108 Icon Type: Main		
Combat Support Ship, Fast Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130109 Icon Type: Main		
Oiler, Replenishment Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130110 Icon Type: Main		
Repair Ship Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130111 Icon Type: Main		
Submarine Tender Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 130112 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Tug, Ocean Going Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Auxiliary Ship Symbol Set: 30 Value: 1301**13** Icon Type: Main		
Service Craft/Yard Type: Entity Type Entity: Military Noncombatant Symbol Set: 30 Value: 13**02**00 Icon Type: Main		
Barge, Not Self-Propelled Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Service Craft/Yard Symbol Set: 30 Value: 13020**1** Icon Type: Main		
Barge, Self-Propelled Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Service Craft/Yard Symbol Set: 30 Value: 13020**2** Icon Type: Main		
Tug, Harbor Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Service Craft/Yard Symbol Set: 30 Value: 13020**3** Icon Type: Main		
Launch Type: Entity Subtype Entity/Entity Type: Military Noncombatant/Service Craft/Yard Symbol Set: 30 Value: 13020**4** Icon Type: Main		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Civilian Type: Entity Symbol Set: 30 Value: **14**0000 Icon Type: Main		White filled
Merchant Ship Type: Entity Type Entity: Civilian Symbol Set: 30 Value: 14**01**00 Icon Type: Main		White filled
Cargo, General Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**01** Icon Type: Main		White filled
Container Ship Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**02** Icon Type: Main		White filled
Dredge Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**03** Icon Type: Main		White filled
Roll On/Roll Off Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**04** Icon Type: Main		White filled
Ferry Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**05** Icon Type: Main		White filled








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Heavy Lift Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 140106 Icon Type: Main		White filled
Hovercraft Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 140107 Icon Type: Main		White filled
Lash Carrier (with Barges) Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 140108 Icon Type: Main		White filled
Oiler/Tanker Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 140109 Icon Type: Main		White filled
Passenger Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 140110 Icon Type: Main		White filled
Tug, Ocean Going Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 140111 Icon Type: Main		White filled
Tow Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 140112 Icon Type: Main		White filled





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Transport Ship, Hazardous Material Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**13** Icon Type: Main		White filled
Junk/Dhow Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**14** Icon Type: Main		White filled
Barge, Not Self-Propelled Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**15** Icon Type: Main		White filled
Hospital Ship Type: Entity Subtype Entity/Entity Type: Civilian/Merchant Ship Symbol Set: 30 Value: 1401**16** Icon Type: Main		White filled
Fishing Vessel Type: Entity Type Entity: Civilian Symbol Set: 30 Value: 1**40**200 Icon Type: Main		White filled
Drifter Type: Entity Subtype Entity/Entity Type: Civilian/Fishing Vessel Symbol Set: 30 Value: 1402**01** Icon Type: Main		White filled
Trawler Type: Entity Subtype Entity/Entity Type: Civilian/Fishing Vessel Symbol Set: 30 Value: 1402**02** Icon Type: Main		White filled


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Dredger Type: Entity Subtype Entity/Entity Type: Civilian/Fishing Vessel Symbol Set: 30 Value: 1402**03** Icon Type: Main		White filled
Law Enforcement Vessel Type: Entity Type Entity: Civilian Symbol Set: 30 Value: 14**03**00 Icon Type: Main		White filled
Leisure Craft, Sailing Type: Entity Type Entity: Civilian Symbol Set: 30 Value: 14**04**00 Icon Type: Main		White filled
Leisure Craft, Motorized Type: Entity Type Entity: Civilian Symbol Set: 30 Value: 14**05**00 Icon Type: Main		White filled
Rigid-Hull Inflatable Boat (RHIB) Type: Entity Subtype Entity/Entity Type: Civilian/Leisure Craft, Motorized Symbol Set: 30 Value: 1405**01** Icon Type: Main		White filled
Speedboat Type: Entity Subtype Entity/Entity Type: Civilian/Leisure Craft, Motorized Symbol Set: 30 Value: 1405**02** Icon Type: Main		White filled
Jet Ski Type: Entity Type Entity: Civilian Symbol Set: 30 Value: 14**06**00 Icon Type: Main		White filled






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-III. Sea surface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Unmanned Surface Water Vehicle (USV) Type: Entity Type Entity: Civilian Symbol Set: 30 Value: 14**07**00 Icon Type: Main		White filled


G.6.3 Sea surface unit, equipment and installation sector 1 modifiers. Sea surface unit, equipment, and installation sector 1 modifiers denote mission area, weapons capability, and asset capability categories. Modifiers are not permitted with civilian sea surface symbols. Table G-IV lists sea surface unit, equipment and installation sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE G-IV. Sea surface unit, equipment and installation sector 1 modifiers .

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Antiair Warfare Symbol Set: 30 Value: 02	Mission Area		
Missile Defense Symbol Set: 30 Value: 08	Mission Area		
Remote Multi-Mission Vehicle (RMV) Symbol Set: 30 Value: 11	Mission Area		
Torpedo Symbol Set: 30 Value: 17	Weapons Capability		
Ballistic Missile Defense, Long-Range Surveillance and Track (LTS&T) Symbol Set: 30 Value: 21	Mission Area		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-IV. Sea surface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Sea-Base X-Band Symbol Set: 30 Value: 22	Mission Area		Used with SBX Radar (Value: 12**11**00) only





G.6.4 Sea surface unit, equipment, and installation sector 2 modifiers. Sea surface unit, equipment and installation sector 2 modifiers denote ship propulsion, ship capacity, cargo capacity, ship mobility and USV control categories. Modifiers are not permitted with civilian sea surface symbols. Table G-V lists sea surface unit, equipment and installation sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE G-V. Sea surface unit, equipment and installation sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Nuclear Powered Symbol Set: 30 Value: 01	Ship Propulsion		
Dock Symbol Set: 30 Value: 05	Cargo Capacity		
Logistics Symbol Set: 30 Value: 06	Cargo Capacity		
Tank Symbol Set: 30 Value: 07	Cargo Capacity		
Vehicle Symbol Set: 30 Value: 08	Cargo Capacity		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-V. Sea surface unit, equipment and installation sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Fast Symbol Set: 30 Value: 09	Cargo Capacity		
Air-Cushioned (US) Symbol Set: 30 Value: 10	Ship Mobility		
Air-Cushioned (NATO) Symbol Set: 30 Value: 11	Ship Mobility		
Hydrofoil Symbol Set: 30 Value: 12	Ship Mobility		

G.6.5 Sea surface local tracks. Local tracks are tracks internal to a particular Combat Information Center (CIC). These tracks are not intended to be transmitted outside the ship's CIC. Table G-VII depicts local tracks. Modifiers are not permitted with local track symbols.

G.6.5.1 Fused tracks. Fused tracks are tracks in the process of classification. Multiple sources of incoming information need to be adjudicated and combined (fused) into a single track. Fused tracks are denoted by a question mark ("?") encapsulated within an hourglass icon (see Table G-VII). All fused tracks have a pending standard identity frame.

TABLE G-VI. Own Ship.

DESCRIPTION	ICON	REMARKS
Own Ship Type: Entity (Local) Symbol Set: 30 Value: **15**0000 Icon Type: Full Octagon		The diameter of the icon shall be 1L. This icon shall be used with a friend standard identity only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE G-VII. Sea surface local tracks.

DESCRIPTION	ICON	REMARKS
Fused Track Type: Entity (Local) Symbol Set: 30 Value: **16**0000 Icon Type: Full Octagon		All fused tracks shall have a pending standard identity frame.
Manual Track Type: Entity (Local) Symbol Set: 30 Value: **17**0000 Icon Type: Full Octagon		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SEA SUBSURFACE SYMBOLS

H.1 SCOPE

H.1.1 Scope. This appendix addresses symbols that support sea subsurface units, equipment and installations in the C2 domain. The tables in this appendix present the icons and modifiers for the sea subsurface symbol sets. This appendix is divided into two sections (see figure H-1): 1) unit, equipment and installation symbols, see H.6, and 2) mine warfare symbols, see H.7. The information contained herein is intended for compliance.

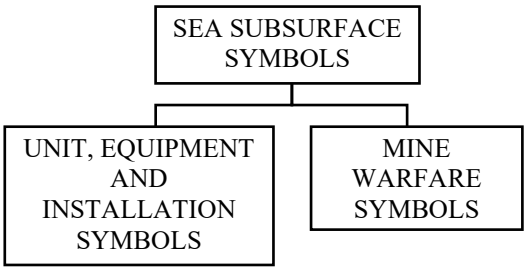


FIGURE H-1. Sea subsurface appendix sections.

H.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

H.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

H.4 GENERAL REQUIREMENTS

H.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and sea subsurface symbology.

H.5 DETAILED REQUIREMENTS

H.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

H.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

H.5.3 Composition of sea subsurface symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure H-2 shows an example of a sea subsurface equipment symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

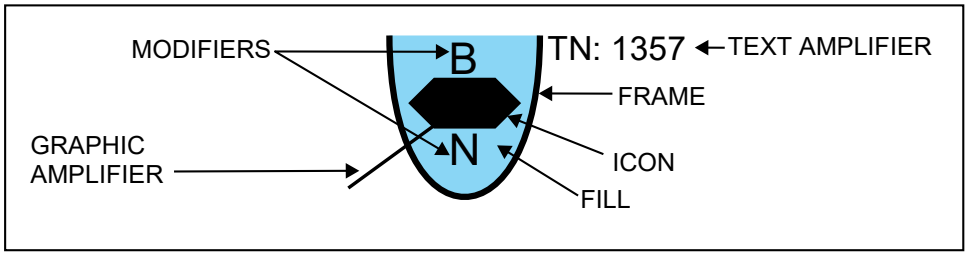







FIGURE H-2. Sea subsurface symbol components.

H.5.3.1 Symbol building process. Table H-I depicts the symbol building process for sea subsurface symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE H-I. Sea subsurface symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is sea subsurface, and the standard identity is friend. The example depicts a "friendly sea subsurface track."	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is "submarine," a sea subsurface entity type. The example depicts a "friendly submarine."	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is "ballistic missile," a sector 1 modifier. The example depicts a "friendly submarine with guided missile weapons capability."	
4.	If required, choose a modifier to depict another characteristic of the icon. In this example, the modifier is "nuclear powered," a sector 2 modifier. The example depicts a "friendly nuclear powered submarine with guided missile weapons capability."	
5.	The finished symbol will appear as shown in the example.	

H.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon or fill the octagon, as indicated in table H-I. When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table H-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

H.5.3.3 Amplifiers.

H.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure H-3 shows the placement of sea subsurface symbol amplifiers around the friend symbol frame. Table H-II provides descriptions and formats of each amplifier.

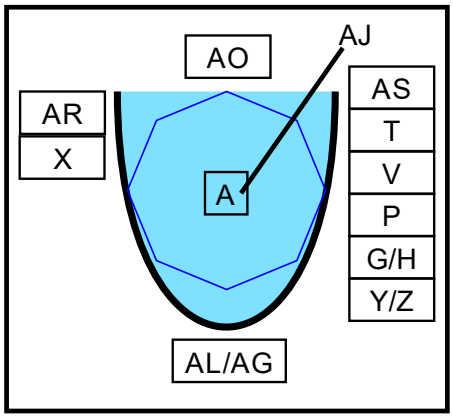


FIGURE H-3. Placement of sea subsurface symbol amplifiers.

TABLE H-II. Descriptions and formats of sea subsurface symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Sea Subsurface/Sea Subsurface Type Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
P	IFF/SIF	A text amplifier displaying one or more IFF/SIF Identification modes and codes.	Mode 2 Prefix: 2:#### **Example**: 2:1234
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
X	Depth	A text amplifier for equipment that displays depth for submerged objects.	Measurement units (FT, M) shall be displayed within the string. Ex: 105 FT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-II. Descriptions and formats of sea subsurface symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes, and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
Z	Speed	A text amplifier for units and equipment that displays velocity (see 5.3.7.7).	
AG	Auxiliary Equipment	Towed sonar array amplifier: A graphic amplifier for equipment that indicates the presence of a towed sonar array (see 5.3.7.10, figure 13 and table IX).	
AJ	Speed Leader	An amplifier that depicts the speed and direction of movement of an object (see 5.3.7.13.3 and figure 21).	
AL	Operational Condition	A graphic amplifier for equipment or installations that indicates an operational condition or capacity.	Ex. Aircraft: Red - damaged, Green – fully capable Ex: Missile: Red – imminent threat, Green – no threat
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote: 1) local/remote status, 2) engagement status, 3) weapon type.	A:BBB-CC: A = remote/local BBB = engagement status CC = weapon asset
AR	Special Designator	Special track designators such as Non-Real Time (NRT) and Tactically Significant (SIG) tracks are denoted here.	The 3-character strings, NRT or SIG
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	

H.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.





H.6 SEA SUBSURFACE UNIT, EQUIPMENT AND INSTALLATION SYMBOLS

H.6.1 Sea subsurface unit, equipment and installation symbols. This section includes the lists of icons and modifiers for building sea subsurface unit, equipment and installation symbols.

H.6.2 Sea subsurface unit, equipment and installation icons. Table H-III depicts sea subsurface unit, equipment and installation icons. Military symbols are depicted with black-filled icons, whereas civilian symbols are depicted with white-filled icons. Sea mines and sea mine decoys are presented in H.7.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-III. Sea subsurface unit, equipment and installation icons.

DESCRIPTION	ICON	REMARKS
Military Type: Entity Symbol Set: 35 Value: **11**0000 Icon Type: Main		N
Submarine Type: Entity Type Entity: Military Symbol Set: 35 Value: 11**01**00 Icon Type: Main		
Submarine, Surfaced Type: Entity Subtype Entity/Entity Type: Military/Submarine Symbol Set: 35 Value: 1101**01** Icon Type: Main		
Submarine, Snorkeling Type: Entity Subtype Entity/Entity Type: Military/Submarine Symbol Set: 35 Value: 1101**02** Icon Type: Main		
Submarine, Bottomed Type: Entity Subtype Entity/Entity Type: Military/Submarine Symbol Set: 35 Value: 1101**03** Icon Type: Main		
Other Submersible Type: Entity Type Entity: Military Symbol Set: 35 Value: 11**02**00 Icon Type: Main		
Nonsubmarine Type: Entity Type Entity: Military Symbol Set: 35 Value: 11**03**00 Icon Type: Full Octagon		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-III. Sea subsurface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Unmanned Underwater Vehicle (UUV) Type: Entity Type Entity: Military Symbol Set: 35 Value: 11**04**00 Icon Type: Main		
Diver Type: Entity Type Entity: Military Symbol Set: 35 Value: 11**05**00 Icon Type: Main		
Civilian Type: Entity Symbol Set: 35 Value: **12**0000 Icon Type: Main		White filled
Submersible Type: Entity Type Entity: Civilian Symbol Set: 35 Value: 12**01**00 Icon Type: Main		White Filled
Unmanned Underwater Vehicle (UUV) Type: Entity Type Entity: Civilian Symbol Set: 35 Value: 12**02**00 Icon Type: Main		White filled
Diver Type: Entity Type Entity: Civilian Symbol Set: 35 Value: 12**03**00 Icon Type: Main		White filled
Weapon Type: Entity Symbol Set: 35 Value: **13**0000 Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-III. Sea subsurface unit, equipment and installation icons - Continued.

DESCRIPTION	ICON	REMARKS
Torped Type: Entity Type Entity: Weapon Symbol Set: 35 Value: 13**01**00 Icon Type: Main		
Improvised Explosive Device (IED) Type: Entity Type Entity: Weapon Symbol Set: 35 Value: 13**02**00 Icon Type: Main		Used with hostile standard identity only.
Decoy Type: Entity Type Entity: Weapon Symbol Set: 35 Value: 13**03**00 Icon Type: Main		






H.6.3 Sea subsurface unit, equipment and installation sector 1 modifiers. Sea subsurface unit, equipment and installation sector 1 modifiers denote mission area, weapons capability, asset capability and submarine confidence categories. Table H-IV lists sea subsurface unit, equipment and installation sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE H-IV. Sea subsurface unit, equipment and installation sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Auxiliary Symbol Set: 35 Value: 02	Mission Area		Used with SUBMARINE entity type only.
Possible Submarine - Low Symbol Set: 35 Value: 13	Submarine Confidence		Used with SUBMARINE entity type only.
Possible Submarine - Low Symbol Set: 35 Value: 14	Submarine Confidence		Used with SUBMARINE entity type only.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-IV. Sea subsurface unit, equipment and installation sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Possible Submarine - High Symbol Set: 35 Value: 15	Submarine Confidence		Used with SUBMARINE entity type only.
Possible Submarine - High Symbol Set: 35 Value: 16	Submarine Confidence		Used with SUBMARINE entity type only.
Probable Submarine Symbol Set: 35 Value: 17	Submarine Confidence		Used with SUBMARINE entity type only.
Certain Submarine Symbol Set: 35 Value: 18	Submarine Confidence		Used with SUBMARINE entity type only.
Anti-Torpedo Torpedo Symbol Set: 35 Value: 19	Weapons Capability		Used with TORPEDO entity type only.









H.6.4 Sea subsurface unit, equipment, and installation sector 2 modifiers. Sea subsurface unit, equipment and installation sector 2 modifiers denote ship propulsion and UUV control categories. Table H-V lists sea subsurface unit, equipment and installation sector 2 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE H-V. Sea subsurface unit, equipment and installation sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Air Independent Propulsion Symbol Set: 35 Value: 01	Ship Propulsion		Used with Submarine entity type only.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-V. Sea subsurface unit, equipment and installation sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Diesel Electric, General Symbol Set: 35 Value: 02	Ship Propulsion		Used with Submarine entity type only.
Diesel - Type 1 Symbol Set: 35 Value: 03	Ship Propulsion		Used with Submarine entity type only.
Diesel - Type 2 Symbol Set: 35 Value: 04	Ship Propulsion		Used with Submarine entity type only.
Diesel - Type 3 Symbol Set: 35 Value: 05	Ship Propulsion		Used with Submarine entity type only.
Nuclear Powered, General Symbol Set: 35 Value: 06	Ship Propulsion		Used with Submarine entity type only.
Nuclear - Type 1 Symbol Set: 35 Value: 07	Ship Propulsion		Used with Submarine entity type only.
Nuclear - Type 2 Symbol Set: 35 Value: 08	Ship Propulsion		Used with Submarine entity type only.
Nuclear - Type Symbol Set: 35 Value: 09	Ship Propulsion		Used with Submarine entity type only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-V. Sea subsurface unit, equipment and installation sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Nuclear - Type 4 Symbol Set: 35 Value: 10	Ship Propulsion		Used with Submarine entity type only.
Nuclear - Type 5 Symbol Set: 35 Value: 11	Ship Propulsion		Used with Submarine entity type only.
Nuclear - Type 6 Symbol Set: 35 Value: 12	Ship Propulsion		Used with Submarine entity type only.
Nuclear - Type 7 Symbol Set: 35 Value: 13	Ship Propulsion		Used with Submarine entity type only.

H.6.5 Sea subsurface local tracks. Local tracks are tracks internal to a particular Combat Information Center (CIC). These tracks are not intended to be transmitted outside the ship's CIC. Table H-VI depicts local tracks. Modifiers are not permitted with local track symbols.

H.6.5.1 Fused tracks. Fused tracks are tracks in the process of classification. Multiple sources of incoming information need to be adjudicated and combined (fused) into a single track. Fused tracks are denoted by a question mark (?) encapsulated within an hourglass icon (see table H-VI). All fused tracks have a pending standard identity frame.

TABLE H-VI. Sea subsurface local tracks.

DESCRIPTION	ICON	REMARKS
Echo Tracker Classifier (ETC)/Possible Contact (POSCON) Type: Entity (Local) Symbol Set: 35 Value: **14**0000 Icon Type: Full Octagon		All ETC/POSCON tracks shall have a pending standard identity frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VI. Sea subsurface local tracks - Continued.

DESCRIPTION	ICON	REMARKS
Fused Track Type: Entity (Local) Symbol Set: 35 Value: **15**0000 Icon Type: Full Octagon		All fused tracks shall have a pending standard identity frame.
Manual Track Type: Entity (Local) Symbol Set: 35 Value: **16**0000 Icon Type: Full Octagon		N/A

H.7 MINE WARFARE SYMBOLS

H.7.1 Mine warfare symbols. This section includes the lists of icons for building mine warfare (MIW) symbols. There are no modifiers or amplifiers used with MIW symbols.

H.7.2 Mine warfare icons. MIW symbols are represented using Mine Warfare Environmental Decision Aids Library (MEDAL) icons embedded within MIL-STD-2525 standard identity frames. The color in MEDAL icons represents the threat level of that contact. Red denotes mine, orange denotes mine-like contact (MILCO), yellow denotes mine-like echo (MILEC), dark green denotes non-mine mine-like object (or non-mine) and bright green denotes neutralized mine. An alternative icon set directly corresponding to MEDAL icons may also be used. The alternative set depicts the same MEDAL icons but depicts them as black icons eliminating the color threat coding scheme. The MEDAL icons shall be used with unfilled sea subsurface frames. The alternative icons shall be used with the normal sea subsurface frames (see tables H-I, H-II and H-III). Figure H-4 shows examples of framed MEDAL and alternative icons. Table H-VII depicts mine warfare icons.

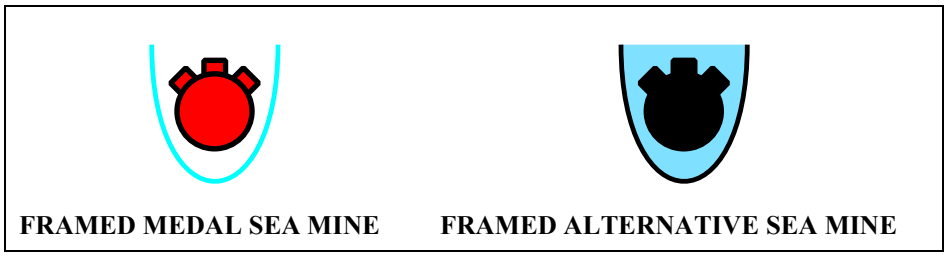











FIGURE H-4. Framing examples of MEDAL and alternative mine warfare icon

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Sea Mine, General Type: Entity Symbol Set: 36 Value: **11**0000 Icon Type: Full Octagon			
Sea Mine, Bottom Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**01**00 Icon Type: Full Octagon			
Sea Mine, Moored Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**02**00 Icon Type: Full Octagon			
Sea Mine, Floating Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**03**00 Icon Type: Full Octagon			
Sea Mine, Rising Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**04**00 Icon Type: Full Octagon			
Sea Mine, Other Position Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**05**00 Icon Type: Full Octagon			
Small Object, Mine-Like Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**07**00 Icon Type: Full Octagon	N/A		There is no MEDAL icon associated with this symbol.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Exercise Mine, General Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**08**00 Icon Type: Full Octagon			Used with exercise frame only.
Exercise Mine, Bottom Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Exercise Mine, General Symbol Set: 36 Value: 1108**01** Icon Type: Full Octagon			Used with exercise frame only.
Exercise Mine, Moored Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Exercise Mine, General Symbol Set: 36 Value: 1108**02** Icon Type: Full Octagon			Used with exercise frame only.
Exercise Mine, Floating Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Exercise Mine, General Symbol Set: 36 Value: 1108**03** Icon Type: Full Octagon			Used with exercise frame only.
Exercise Mine, Rising Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Exercise Mine, General Symbol Set: 36 Value: 1108**04** Icon Type: Full Octagon			Used with exercise frame only.
Neutralized Mine, General Type: Entity Type Entity: Sea Mine, General Symbol Set: 36 Value: 11**09**00 Icon Type: Full Octagon			



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Neutralized Mine, Bottom Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Neutralized Mine, General Symbol Set: 36 Value: 110**01** Icon Type: Full Octagon			
Neutralized Mine, Moored Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Neutralized Mine, General Symbol Set: 36 Value: 110**02** Icon Type: Full Octagon			
Neutralized Mine, Floating Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Neutralized Mine, General Symbol Set: 36 Value: 110**03** Icon Type: Full Octagon			
Neutralized Mine, Rising Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Neutralized Mine, General Symbol Set: 36 Value: 110**04** Icon Type: Full Octagon			
Neutralized Mine, Other Position Type: Entity Subtype Entity/Entity Type: Sea Mine, General/Neutralized Mine, General Symbol Set: 36 Value: 110**05** Icon Type: Full Octagon			
Unexploded Ordnance Type: Entity Symbol Set: 36 Value: **12**0000 Icon Type: Full Octagon			


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Sea Mine Decoy Type: Entity Symbol Set: 36 Value: **13**0000 Icon Type: Full Octagon			
Sea Mine Decoy, Bottom Type: Entity Type Entity: Sea Mine Decoy Symbol Set: 36 Value: 13**01**00 Icon Type: Full Octagon			
Sea Mine Decoy, Moored Type: Entity Type Entity: Sea Mine Decoy Symbol Set: 36 Value: 13**02**00 Icon Type: Full Octagon			
Mine-Like Contact (MILCO) Type: Entity Symbol Set: 36 Value: **14**0000	N/A	N/A	Reserved for hierarchical purposes.
Milco - General Type: Entity Type Entity: Milco Symbol Set: 36 Value: 14**01**00 Icon Type: Full Octagon			
Milco - General, Confidence Level 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-General Symbol Set: 36 Value: 1401**01** Icon Type: Full Octagon			
Milco - General, Confidence Level 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-General Symbol Set: 36 Value: 1401**02** Icon Type: Full Octagon			



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Milco - General, Confidence Level 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-General Symbol Set: 36 Value: 1401**03** Icon Type: Full Octagon			
Milco - General, Confidence Level 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-General Symbol Set: 36 Value: 1401**04** Icon Type: Full Octagon			
Milco - General, Confidence Level 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-General Symbol Set: 36 Value: 1401**05** Icon Type: Full Octagon			
Milco - Bottom Type: Entity Type Entity: Milco Symbol Set: 36 Value: 1**40**200 Icon Type: Full Octagon			
Milco - Bottom, Confidence Level 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Bottom Symbol Set: 36 Value: 1402**01** Icon Type: Full Octagon			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Milco - Bottom, Confidence Level 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Bottom Symbol Set: 36 Value: 140**02** Icon Type: Full Octagon			
Milco - Bottom, Confidence Level 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Bottom Symbol Set: 36 Value: 140**03** Icon Type: Full Octagon			
Milco - Bottom, Confidence Level 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Bottom Symbol Set: 36 Value: 140**04** Icon Type: Full Octagon			
Milco - Bottom, Confidence Level 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Bottom Symbol Set: 36 Value: 140**05** Icon Type: Full Octagon			
Milco - Moored Type: Entity Type Entity: Milco Symbol Set: 36 Value: 1**40**300 Icon Type: Full Octagon			



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Milco - Moored, Confidence Level 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO -Moored Symbol Set: 36 Value: 140301 Icon Type: Full Octagon			
Milco - Moored, Confidence Level 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO -Moored Symbol Set: 36 Value: 140302 Icon Type: Full Octagon			
Milco - Moored, Confidence Level 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO -Moored Symbol Set: 36 Value: 140303 Icon Type: Full Octagon			
Milco - Moored, Confidence Level 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO -Moored Symbol Set: 36 Value: 140304 Icon Type: Full Octagon			
Milco - Moored, Confidence Level 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO -Moored Symbol Set: 36 Value: 140305 Icon Type: Full Octagon			




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Milco - Floating Type: Entity Type Entity: Milco Symbol Set: 36 Value: 14**04**00 Icon Type: Full Octagon			
Milco - Floating, Confidence Level 1 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Floating Symbol Set: 36 Value: 1404**01** Icon Type: Full Octagon			
Milco - Floating, Confidence Level 2 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Floating Symbol Set: 36 Value: 1404**02** Icon Type: Full Octagon			
Milco - Floating, Confidence Level 3 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Floating Symbol Set: 36 Value: 1404**03** Icon Type: Full Octagon			
Milco - Floating, Confidence Level 4 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Floating Symbol Set: 36 Value: 1404**04** Icon Type: Full Octagon			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Milco - Floating, Confidence Level 5 Type: Entity Subtype Entity/Entity Type: MILCO/MILCO-Floating Symbol Set: 36 Value: 1404**05** Icon Type: Full Octagon			
Mine-Like Echo (MILEC), General Type: Entity Symbol Set: 36 Value: **15**0000 Icon Type: Full Octagon			
Mine-Like Echo, Bottom Type: Entity Type Entity: Mine-Like Echo (MILEC), General Symbol Set: 36 Value: 15**01**00 Icon Type: Full Octagon			
Mine-Like Echo, Moored Type: Entity Type Entity: Mine-Like Echo (MILEC), General Symbol Set: 36 Value: 15**02**00 Icon Type: Full Octagon			
Mine-Like Echo, Floating Type: Entity Type Entity: Mine-Like Echo (MILEC), General Symbol Set: 36 Value: 15**03**00 Icon Type: Full Octagon			
Negative Reacquisition, General Type: Entity Symbol Set: 36 Value: **16**0000 Icon Type: Full Octagon			





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Negative Reacquisition, Bottom Type: Entity Type Entity: Negative Reacquisition, General Symbol Set: 36 Value: 16**01**00 Icon Type: Full Octagon			
Negative Reacquisition, Moored Type: Entity Type Entity: Negative Reacquisition, General Symbol Set: 36 Value: 16**02**00 Icon Type: Full Octagon			
Negative Reacquisition, Floating Type: Entity Type Entity: Negative Reacquisition, General Symbol Set: 36 Value: 16**03**00 Icon Type: Full Octagon			
Obstructor Type: Entity Symbol Set: 36 Value: **1**70000 Icon Type: Full Octagon			
Neutralized Obstructor Type: Entity Type Entity: Obstructor Symbol Set: 36 Value: 1**7**0100 Icon Type: Full Octagon			
General Mine Anchor Type: Entity Symbol Set: 36 Value: **1**80000 Icon Type: Full Octagon			
Non-Mine Mine-Like Object (NMLO), General Type: Entity Symbol Set: 36 Value: **1**90000 Icon Type: Full Octagon			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE H-VII. Mine warfare icons - Continued.

DESCRIPTION	MEDAL ICON	ALTERNATIVE ICON	REMARKS
Non-Mine Mine-Like Object, Bottom Type: Entity Type Entity: Non-Mine Mine-Like Object (NMLO), General Symbol Set: 36 Value: 19**01**00 Icon Type: Full Octagon			
Non-Mine Mine-Like Object, Moored Type: Entity Type Entity: Non-Mine Mine-Like Object (NMLO), General Symbol Set: 36 Value: 19**02**00 Icon Type: Full Octagon			
Non-Mine Mine-Like Object, Floating Type: Entity Type Entity: Non-Mine Mine-Like Object (NMLO), General Symbol Set: 36 Value: 19**03**00 Icon Type: Full Octagon			
Environmental Report Location Type: Entity Symbol Set: 36 Value: **20**0000 Icon Type: Full Octagon			
Dive Report Location Type: Entity Symbol Set: 36 Value: **21**0000 Icon Type: Full Octagon			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

ACTIVITIES SYMBOLS

I.1 SCOPE

I.1.1 Scope. In this appendix, activities across the range of military operations use various symbols to predominately show support. Activities include stability operations, defense support of civil authorities, foreign humanitarian assistance, incidents, natural events, and operations. Among the types of activities represented are acts of terrorism, sabotage, crime, natural disasters, relief operations, and the uncontrolled movement of large numbers of people. The tables in this appendix present the icons and modifiers used for such operations and means of assistance. Many of these icons represent emergency first response events used in a civilian community. The information contained herein is intended for compliance.

I.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

I.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

I.4 GENERAL REQUIREMENTS

I.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and supports activities symbology.

I.5 DETAILED REQUIREMENTS

I.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

I.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

I.5.3 Composition of activities symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure I-1 shows an example of an activities symbol.

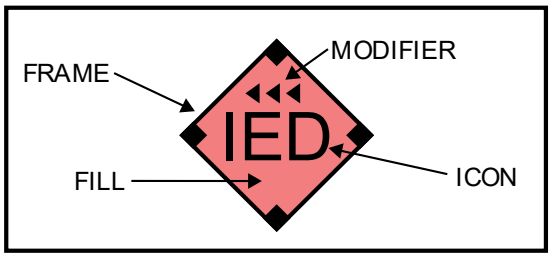






FIGURE I-1. Activities components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

I.5.3.1 Symbol building process. Table I-I depicts the symbol building process for activities symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon. Activities symbols use the land frames for units, equipment and installations, as well as the activity/event frames for incidents.

TABLE I-I. Activities symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is activities, and the standard identity is friend. The example depicts a “hostile incident.”	
2.	Choose an icon for the symbol. In this example, the icon is “IED,” an equipment entity subtype. The example depicts a “hostile IED incident.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “hoax,” a sector 1 modifier. The example depicts “hostile IED hoax incident.” Note: There are no sector 2 modifiers in activities symbols.	
4.	The finished symbol will appear as shown in the example.	

I.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table I-I). When depicted, modifiers shall be placed in sectors 1 or 2 as appropriate (see table I-I). Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

I.5.3.3 Amplifiers.

I.5.3.3.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure I-2 shows the placement of activities symbol amplifiers around the friend symbol frame. Table I-II provides descriptions and formats of each amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

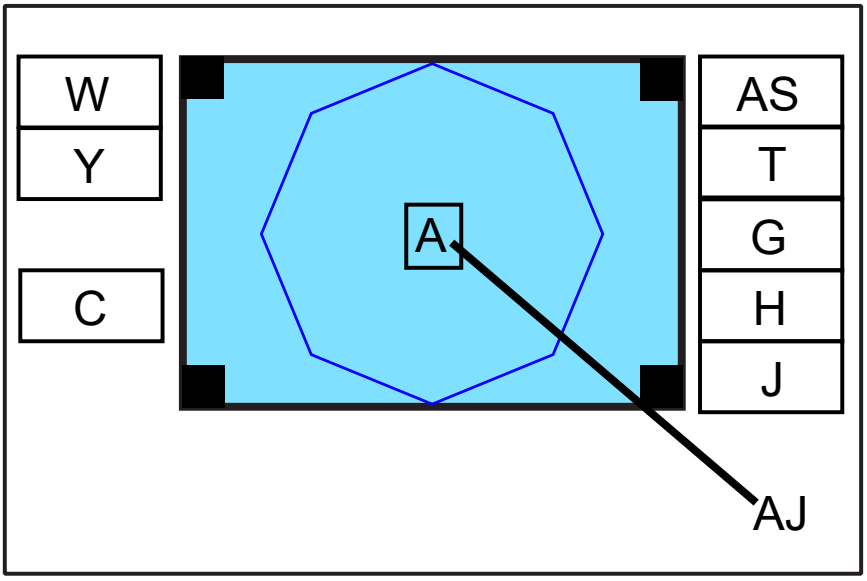


FIGURE I-2. Placement of activities symbol amplifiers.

TABLE I-II. Description and formats of activities symbol amplifiers.

Field	Field Title	Description	Format
A	Symbol	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
C	Quantity	An amplifier in an equipment symbol that identifies the number of items present.	Alphanumeric - {1,19} [#########] [XXXXXXXXXX]
G	Staff Comments	Free text. Can be used by staff for information required by commander.	
H	Additional Information	Free text.	
J	Evaluation Rating	Degree of confidence that may be placed on the information represented by the symbol. It is shown as one letter and one number made up of Reliability of Source and Credibility of Information. (See ATP 2-33.4) See Table VI for acceptable values.	
Q	Direction of Movement	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.9 and figure 15 in the base document).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### Example: TN:13579

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-II. Description and formats of activities symbol amplifiers - Continued.

Field	Field Title	Description	Format
W	Date-Time Group	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYY) or "O/O" for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by two digits. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. The last two digits of the year are after the month. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).	Text Example: 3317.0921N 04412.6332E 38SMB2649083145
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes, and decimal minutes (or in MGRS, GARS, or other applicable display formats).	
AJ	Speed Leader	An amplifier that depicts the speed and direction of movement of an object (see 5.3.7.13.3 and figure 21).	
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	

I.5.3.3.2 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.

I.6 ACTIVITIES SYMBOLS

I.6.1 Activities symbols. This section includes the lists of icons and modifiers for building activities symbols.






I.6.2 Activities icons. Table I-III depicts activities icons.

TABLE I-III. Activities icons.

DESCRIPTION	ICON	REMARKS
Incident Type: Entity Symbol Set: 40 Value: **11**0000	N/A	Reserved for hierarchical purposes.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Criminal Activity Incident Type: Entity Type Entity: Incident Symbol Set: 40 Value: 11**01**00 Icon Type: Main		
Arrest/Apprehend/Detain Type: Entity Subtype Entity: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110100**01** Icon Type: Main		
Arson Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110100**02** Icon Type: Full Octagon		
Drive-By Shooting Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110100**04** Icon Type: Main		
Extortion Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110100**06** Icon Type: Main		
Graffiti Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110100**07** Icon Type: Full Octagon		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Killing Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110108 Icon Type: Main		
Poisoning Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110109 Icon Type: Full Octagon		
Civil Rioting Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110110 Icon Type: Main		
Booby Trap Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110111 Icon Type: Full Octagon		
Black Marketing Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110113 Icon Type: Full Octagon		
Vandalism/Loot/Ransack/Plunder Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110114 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Jail Break Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110115 Icon Type: Main		
Robbery Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110116 Icon Type: Main		
Theft Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110117 Icon Type: Main		
Burglary Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110118 Icon Type: Main		
Smuggling Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110119 Icon Type: Main		
Rock Throwing Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110120 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Dead Body Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110121 Icon Type: Full Octagon		
Sabotage Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110122 Icon Type: Main		
Suspicious Activity Type: Entity Subtype Entity/Entity Type: Incident/Criminal Activity Incident Symbol Set: 40 Value: 110123 Icon Type: Full Octagon		
Bomb/Bombing Type: Entity Type Entity: Incident Symbol Set: 40 Value: 110200 Icon Type: Main		
Bomb Threat Type: Entity Subtype Entity/Entity Type: Incident/Bomb/Bombing Symbol Set: 40 Value: 110201 Icon Type: Full Octagon		
IED Event Type: Entity Type Entity: Incident Symbol Set: 40 Value: 110300 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
IED Explosion Type: Entity Subtype Entity/Entity Type: Incident/IED Event Symbol Set: 40 Value: 110**01** Icon Type: Full Octagon		
Premature IED Explosion Type: Entity Subtype Entity/Entity Type: Incident/IED Event Symbol Set: 40 Value: 110**02** Icon Type: Full Octagon		
IED Cache Type: Entity Subtype Entity/Entity Type: Incident/IED Event Symbol Set: 40 Value: 110**03** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
IED Suicide Bomber Type: Entity Subtype Entity/Entity Type: Incident/IED Event Symbol Set: 40 Value: 110**04** Icon Type: Full Octagon		
Shooting Type: Entity Type Entity: Incident Symbol Set: 40 Value: 11**04**00 Icon Type: Main		
Sniping Type: Entity Subtype Entity/Entity Type: Incident/Shooting Symbol Set: 40 Value: 110**401** Icon Type: Full Octagon		
Drug Operation Type: Entity Type Entity: Incident Symbol Set: 40 Value: 11**05**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Trafficking Type: Entity Subtype Entity/Entity Type: Incident/Illegal Drug Operation Symbol Set: 40 Value: 110501 Icon Type: Full Octagon		
Explosion Type: Entity Type Entity: Incident Symbol Set: 40 Value: 110600 Icon Type: Main		
Grenade Explosion Type: Entity Subtype Entity/Entity Type: Incident/Explosion Symbol Set: 40 Value: 110601 Icon Type: Main		
Incendiary Explosion Type: Entity Subtype Entity/Entity Type: Incident/Explosion Symbol Set: 40 Value: 110602 Icon Type: Main		
Mine Explosion Type: Entity Subtype Entity/Entity Type: Incident/Explosion Symbol Set: 40 Value: 110603 Icon Type: Main		
Mortar Fire Explosion Type: Entity Subtype Entity/Entity Type: Incident/Explosion Symbol Set: 40 Value: 110604 Icon Type: Main		
Rocket Explosion Type: Entity Subtype Entity/Entity Type: Incident/Explosion Symbol Set: 40 Value: 110605 Icon Type: Main		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Bomb Explosion Type: Entity Subtype Entity/Entity Type: Incident/Explosion Symbol Set: 40 Value: 1106**06** Icon Type: Main		
Home/House Type: Entity Type Entity: Incident Symbol Set: 40 Value: 11**07**00 Icon Type: Main		
Civil Disturbance Type: Entity Symbol Set: 40 Value: **12**0000 Icon Type: Main		
Demonstration Type: Entity Type Entity: Civil Disturbance Symbol Set: 40 Value: 12**01**00 Icon Type: Main		
Operation Type: Entity Symbol Set: 40 Value: **13**0000	N/A	Reserved for hierarchical purposes.
Patrolling Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**01**00 Icon Type: Main		
Military Information Support Operation (MISO) Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**02**00 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Communication Propaganda Type: Entity Subtype Entity/Entity Type: Operation/MISO Operation Symbol Set: 40 Value: 1302**01** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Foraging/Searching Type: Entity Type Entity: Operation Symbol Set: 40 Value: 1**03**00 Icon Type: Main		
Recruitment Type: Entity Type Entity: Operation Symbol Set: 40 Value: 1**04**00	N/A	Reserved for hierarchical purposes.
Willing Type: Entity Subtype Entity/Entity Type: Operation/Recruitment Symbol Set: 40 Value: 1304**01** Icon Type: Full Octagon		
Unwilling/Coerced Type: Entity Subtype Entity/Entity Type: Operation/Recruitment Symbol Set: 40 Value: 1304**02** Icon Type: Full Octagon		
Mine Laying Type: Entity Type Entity: Operation Symbol Set: 40 Value: 1**05**00 Icon Type: Main		
Spy Type: Entity Type Entity: Operation Symbol Set: 40 Value: 1**06**00 Icon Type: Main		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Warrant Served Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**07**00 Icon Type: Main		
Exfiltration Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**08**00 Icon Type: Full Octagon		
Infiltration Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**09**00 Icon Type: Full Octagon		
Meeting Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**10**00 Icon Type: Full Octagon		
Polling Place/Election Type: Entity Type Entity: Operation/Meeting Symbol Set: 40 Value: 1310**01** Icon Type: Main		
Emergency Operation Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**12**00 Icon Type: Main		White filled
Emergency Collection Evacuation Point Type: Entity Subtype Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 1312**01** Icon Type: Full Octagon		White filled







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Emergency Food Distribution Type: Entity Type Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 131**02** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Emergency Incident Command Center Type: Entity Subtype Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 131**03** Icon Type: Full Octagon		White filled
Emergency Operations Center Type: Entity Subtype Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 131**04** Icon Type: Full Octagon		White filled
Emergency Public Information Center Type: Entity Subtype Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 131**05** Icon Type: Main		White filled
Emergency Shelter Type: Entity Subtype Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 131**06** Icon Type: Full Octagon		White filled
Emergency Staging Area Type: Entity Subtype Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 131**07** Icon Type: Full Octagon		White filled







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Emergency Water Distribution Center Type: Entity Subtype Entity/Entity Type: Operation/Emergency Operation Symbol Set: 40 Value: 1312**08** Icon Type: Full Frame		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon within the frame.
Emergency Medical Operations Type: Entity Type Entity: Operation Symbol Set: 40 Value: 13**13**00 Icon Type: Main		
EMT Station Location Type: Entity Subtype Entity/Entity Type: Operation/Emergency Medical Operation Symbol Set: 40 Value: 1313**01** Icon Type: Main		White filled
Health Department Facility Type: Entity Subtype Entity/Entity Type: Operation/Emergency Medical Operation Symbol Set: 40 Value: 1313**02** Icon Type: Main		
Medical Facilities Outpatient Type: Entity Subtype Entity/Entity Type: Operation/Emergency Medical Operation Symbol Set: 40 Value: 1313**03** Icon Type: Main		
Morgue Type: Entity Subtype Entity/Entity Type: Operation/Emergency Medical Operation Symbol Set: 40 Value: 1313**04** Icon Type: Main		White filled




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Pharmacy Type: Entity Subtype Entity/Entity Type: Operation/Emergency Medical Operation Symbol Set: 40 Value: 131305 Icon Type: Main		
Triage Type: Entity Subtype Entity/Entity Type: Operation/Emergency Medical Operation Symbol Set: 40 Value: 131306 Icon Type: Main		White filled
Fire Fighting Operation Type: Entity Type Entity: Operation Symbol Set: 40 Value: 131400 Icon Type: Main		
Fire Hydrant Type: Entity Subtype Entity/Entity Type: Operation/Fire Fighting Operation Symbol Set: 40 Value: 131401 Icon Type: Main		White filled
Other Water Supply Location Type: Entity Type Entity/Entity Type: Operation/Fire Fighting Operation Symbol Set: 40 Value: 131403 Icon Type: Main		White filled
Law Enforcement Operation Type: Entity Type Entity: Operation Symbol Set: 40 Value: 131500 Icon Type: Main		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Bureau of Alcohol, Tobacco, Firearms and Explosives (ATF) (Department of Justice) Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**501** Icon Type: Main		
Border Patrol Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**502** Icon Type: Main		White filled
Customs Service Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**503** Icon Type: Main		White filled
Drug Enforcement Administration (DEA) Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**504** Icon Type: Main		
Department of Justice (DOJ) Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**505** Icon Type: Main		
Federal Bureau of Investigations (FBI) Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**506** Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Police Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**507** Icon Type: Main		
Prison Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**508** Icon Type: Main		White filled
United States Secret Service (USSS) Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**509** Icon Type: Main		
Transportation Security Administration (TSA) Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**510** Icon Type: Main		
Coast Guard Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**511** Icon Type: Main		White filled
US Marshals Service Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131**512** Icon Type: Main		White filled






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Internal Security Force Type: Entity Subtype Entity/Entity Type: Operation/Law Enforcement Operation Symbol Set: 40 Value: 131513 Icon Type: Main		
Fire Event Type: Entity Symbol Set: 40 Value: 140000 Icon Type: Main		
Fire Origin Type: Entity Type Entity/Entity Type: Fire Event Symbol Set: 40 Value: 140100 Icon Type: Main		
Smoke Type: Entity Type Entity/Entity Type: Fire Event Symbol Set: 40 Value: 140200 Icon Type: Main		
Hot Spot Type: Entity Type Entity/Entity Type: Fire Event Symbol Set: 40 Value: 140300 Icon Type: Main		
Non-Residential Fire Type: Entity Type Entity/Entity Type: Fire Event Symbol Set: 40 Value: 140400 Icon Type: Main		
Residential Fire Type: Entity Type Entity/Entity Type: Fire Event Symbol Set: 40 Value: 140500 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
School Fire Type: Entity Type Entity/Entity Type: Fire Event Symbol Set: 40 Value: 14**06**00 Icon Type: Main		
Special Needs Fire Type: Entity Type Entity/Entity Type: Fire Event Symbol Set: 40 Value: 14**07**00 Icon Type: Main		
Wildfire Type: Entity Subtype Entity/Entity Type: Incident/Fire Event Symbol Set: 40 Value: 14**08**00 Icon Type: Main		
Hazardous Materials Type: Entity Symbol Set: 40 Value: **15**0000	N/A	Reserved for hierarchical purposes.
Hazardous Materials Incident Type: Entity Type Entity: Incident Symbol Set: 40 Value: 15**01**00 Icon Type: Main		White filled
Chemical Agent Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150**1**01 Icon Type: Main		
Corrosive Material Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150**2**02 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Hazardous When Wet Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150103 Icon Type: Main		White filled
Explosive Material Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150104 Icon Type: Main		
Flammable Gas Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150105 Icon Type: Main		White filled
Flammable Liquid Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150106 Icon Type: Main		White filled
Flammable Solid Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150107 Icon Type: Main		White filled
Non-Flammable Gas Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150108 Icon Type: Main		White filled






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Organic Peroxide Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150109 Icon Type: Main		White filled
Oxidizer Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150110 Icon Type: Main		White filled
Radioactive Material Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150111 Icon Type: Main		
Spontaneously Combustible Material Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150112 Icon Type: Main		
Toxic Gas Type: Entity Subtype Entity/Entity Type: Hazardous Materials /Hazardous Materials Incident Symbol Set: 40 Value: 150113 Icon Type: Main		White filled
Toxic Infectious Material Type: Entity Subtype Entity/Entity Type: Incident/Hazardous Materials Incident Symbol Set: 40 Value: 150114 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Unexploded Ordnance Type: Entity Subtype Entity/Entity Type: Incident/Hazardous Materials Incident Symbol Set: 40 Value: 150115 Icon Type: Main		
Transportation Incident Type: Entity Symbol Set: 40 Value: 160000	N/A	Reserved for hierarchical purposes.
Air Type: Entity Type Entity: Transportation Incident Symbol Set: 40 Value: 160100 Icon Type: Main		White filled
Marine Type: Entity Type Entity: Transportation Incident Symbol Set: 40 Value: 160200 Icon Type: Main		White filled
Rail Type: Entity Type Entity: Transportation Incident Symbol Set: 40 Value: 160300 Icon Type: Main		
Vehicle Type: Entity Type Entity: Transportation Incident Symbol Set: 40 Value: 160400 Icon Type: Main		
Wheeled Vehicle Explosion Type: Entity Type Entity: Transportation Incident Symbol Set: 40 Value: 160500 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Natural Event Type: Entity Symbol Set: 40 Value: **17**0000	N/A	Reserved for hierarchical purposes.
Geologic Type: Entity Type Entity: Natural Event Symbol Set: 40 Value: 17**01**00	N/A	Reserved for hierarchical purposes.
Aftershock Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 17010**1** Icon Type: Main		
Avalanche Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 17010**2** Icon Type: Main		
Earthquake Epicenter Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 17010**3** Icon Type: Main		
Landslide Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 17010**4** Icon Type: Main		
Subsidence Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 17010**5** Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Volcanic Eruption Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 170106 Icon Type: Main		
Volcanic Threat Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 170107 Icon Type: Main		
Cave Entrance Type: Entity Subtype Entity/Entity Type: Natural Event/Geologic Symbol Set: 40 Value: 170108 Icon Type: Main		
Hydro-Meteorological Type: Entity Type Entity: Natural Event Symbol Set: 40 Value: 170200	N/A	Reserved for hierarchical purposes.
Drought Type: Entity Subtype Entity/Entity Type: Natural Event/Hydro-Meteorological Symbol Set: 40 Value: 170201 Icon Type: Main		White filled
Flood Type: Entity Subtype Entity/Entity Type: Natural Event/Hydro-Meteorological Symbol Set: 40 Value: 170202 Icon Type: Main		White filled
Tsunami Type: Entity Subtype Entity/Entity Type: Natural Event/Hydro-Meteorological Symbol Set: 40 Value: 170203 Icon Type: Main		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Infestation Type: Entity Type Entity: Natural Event Symbol Set: 40 Value: 17**03**00	N/A	Reserved for hierarchical purposes.
Bird Type: Entity Subtype Entity/Entity Type: Natural Event/Infestation Symbol Set: 40 Value: 1703**01** Icon Type: Main		
Insect Type: Entity Subtype Entity/Entity Type: Natural Event/Infestation Symbol Set: 40 Value: 1703**02** Icon Type: Main		
Microbial Type: Entity Subtype Entity/Entity Type: Natural Event/Infestation Symbol Set: 40 Value: 1703**03** Icon Type: Main		
Reptile Type: Entity Subtype Entity/Entity Type: Natural Event/Infestation Symbol Set: 40 Value: 1703**04** Icon Type: Main		
Rodent Type: Entity Subtype Entity/Entity Type: Natural Event/Infestation Symbol Set: 40 Value: 1703**05** Icon Type: Main		
Individual Type: Entity Symbol Set: 40 Value: **18**0000	N/A	Reserved for hierarchical purposes.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-III. Activities icons - Continued.

DESCRIPTION	ICON	REMARKS
Religious Leader Type: Entity Type Entity: Individual Symbol Set: 40 Value: 18**01**00 Icon Type: Full Octagon		
Speaker Type: Entity Type Entity: Individual Symbol Set: 40 Value: 18**02**00 Icon Type: Full Octagon		










I.6.3 Activities sector 1 modifiers. Activities sector 1 modifiers denote crime, military information support operations, IED and incident qualifier categories. Table I-IV lists activities sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE I-IV. Activities sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
House-To-House Symbol Set: 40 Value: 04	Military Information Support Operations		
Murder Symbol Set: 40 Value: 06	Crime		
Written Military Information Support Operations Symbol Set: 40 Value: 09	Military Information Support Operations		
Pirate Symbol Set: 40 Value: 10	Crime		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-IV. Activities sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
False Symbol Set: 40 Value: 11	IED		
Find Symbol Set: 40 Value: 12	IED		
Found and Cleared Symbol Set: 40 Value: 13	IED		
Hoax (Decoy) Symbol Set: 40 Value: 14	IED		
Attempted Symbol Set: 40 Value: 15	Incident		
Incident Symbol Set: 40 Value: 17	Incident		
Theft Symbol Set: 40 Value: 18	Crime		
Eviction Symbol Set: 40 Value: 21	Incident		
Raid Symbol Set: 40 Value: 22	Incident		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE I-IV. Activities sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Meeting Symbol Set:40 Value: 24	Incident		

I.6.4 Activities sector 2 modifiers. Activities sector 2 modifiers denote capability category. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE I-V. Activities sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Meeting Symbol Set: 40 Value: 04	Incident		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

SIGNALS INTELLIGENCE SYMBOLS

J.1 SCOPE

J.1.1 Scope. This appendix addresses symbols that support signals intelligence (SIGINT) in the C2 domain. The tables in this appendix present the icons and modifiers for the SIGINT symbol sets. The information contained herein is intended for compliance.

J.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

J.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

J.4 GENERAL REQUIREMENTS

J.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and SIGINT symbology.

J.5 DETAILED REQUIREMENTS

J.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

J.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

J.5.3 Composition of SIGINT symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure J-1 shows an example of a SIGINT symbol.

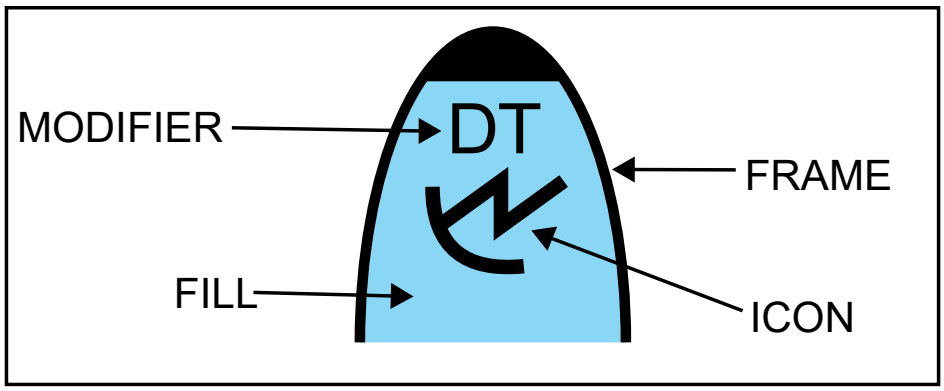






FIGURE J-1. Signals intelligence symbol components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

J.5.3.1 Symbol building process. Table J-1 depicts the symbol building process for SIGINT symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE J-I. Signal intelligences symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is space, and the standard identity is friend. The example depicts a “friendly space track.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “radar,” a SIGINT entity type. The example depicts a “friendly space radar.”	
3.	If required, choose a modifier to depict an additional characteristic of the icon. In this example, the modifier is “data transmission,” a sector 1 modifier. The example depicts a “friendly space radar with data transmission capability.” **Note**: There are no sector 2 modifiers in SIGINT symbols.	
4.	The finished symbol will appear as shown in the example.	

J.5.4 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table J-I). When depicted, modifiers shall be placed in sector 1 as appropriate (see table J-I). There are no sector 2 modifiers in SIGINT. Only one modifier may be placed in each sector at a given time. Multiple modifiers in the same position are prohibited due to legibility concerns.

J.5.5 Amplifiers. The display of additional alphanumerical and graphical information on identity, movement and location and capabilities of a SIGINT symbol is dependent on the dimension of that symbol. A SIGINT symbol may be in the space, air, land, maritime (sea surface, sea subsurface) , or cyberspace domains. For example, if the SIGINT symbol is in the space dimension, then that symbol shall follow the amplifier requirements as stated in the space appendix. See 5.3.7 for more information on amplifiers.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

J.6 SIGINT SYMBOLS

J.6.1 SIGINT symbols. This section includes the lists of icons and modifiers for building SIGINT symbols.


J.6.2 SIGINT icons. Table J-II depicts SIGINT icons.

TABLE J-II. Signals intelligence icons.

DESCRIPTION	ICON	REMARKS
Signal Intercept Type: Entity Symbol Set: 50 Value: **11**0000	N/A	Reserved for hierarchical purposes.
Communications Type: Entity Type Entity: Signal Intercept Symbol Set: 50 Value: 11**01**00 Icon Type: Main		
Jammer Type: Entity Type Entity: Signal Intercept Symbol Set: 50 Value: 11**02**00 Icon Type: Main		
Radar Type: Entity Type Entity: Signal Intercept Symbol Set: 50 Value: 11**03**00 Icon Type: Main		










J.6.3 SIGINT sector 1 modifiers. The SIGINT sector 1 modifiers denote communications and radar categories. Table J-III lists SIGINT sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE J-III. Signals intelligence sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Anti-Aircraft Fire Control Symbol Set: 50 Value: 01	Radar		










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Airborne Search and Bombing Symbol Set: 50 Value: 02	Radar		
Airborne Intercept Symbol Set: 50 Value: 03	Radar		
Altimeter Symbol Set: 50 Value: 04	Radar		
Airborne Reconnaissance and Mapping Symbol Set: 50 Value: 05	Radar		
Air Traffic Control Symbol Set: 50 Value: 06	Radar		
Beacon Transponder (Not IFF) Symbol Set: 50 Value: 07	Radar		
Battlefield Surveillance Symbol Set: 50 Value: 08	Radar		
Controlled Approach Symbol Set: 50 Value: 09	Radar		
Controlled Intercept Symbol Set: 50 Value: 10	Radar		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Cellular/Mobile Symbol Set: 50 Value: 11	Communications		
Coastal Surveillance Symbol Set: 50 Value: 12	Radar		
Decoy/Mimic Symbol Set: 50 Value: 13	Radar		
Data Transmission Symbol Set: 50 Value: 14	Radar		
Earth Surveillance Symbol Set: 50 Value: 15	Radar		
Early Warning Symbol Set: 50 Value: 16	Radar		
Fire Control Symbol Set: 50 Value: 17	Radar		
Ground Mapping Symbol Set: 50 Value: 18	Radar		
Height Finding Symbol Set: 50 Value: 19	Radar		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Harbor Surveillance Symbol Set: 50 Value: 20	Radar		
Identification, Friend or Foe (Interrogator) Symbol Set: 50 Value: 21	Radar		
Instrument Landing System Symbol Set: 50 Value: 22	Radar		
Ionospheric Sounding Symbol Set: 50 Value: 23	Radar		
Identification, Friend or Foe (Transponder) Symbol Set: 50 Value: 24	Radar		
Barrage Jammer Symbol Set: 50 Value: 25	Jammer		
Click Jammer Symbol Set: 50 Value: 26	Jammer		
Deceptive Jammer Symbol Set: 50 Value: 27	Jammer		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Frequency Swept Jammer Symbol Set: 50 Value: 28	Jammer		
Jammer (General) Symbol Set: 50 Value: 29	Jammer		
Noise Jammer Symbol Set: 50 Value: 30	Jammer		
Pulsed Jammer Symbol Set: 50 Value: 31	Jammer		
Repeater Jammer Symbol Set: 50 Value: 32	Jammer		
Spot Noise Jammer Symbol Set: 50 Value: 33	Jammer		
Transponder Jammer Symbol Set: 50 Value: 34	Jammer		
Missile Acquisition Symbol Set: 50 Value: 35	Radar		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Missile Control Symbol Set: 50 Value: 36	Jammer		
Missile Downlink Symbol Set: 50 Value: 37	Air Radar		
Meteorological Symbol Set: 50 Value: 38	Radar		
Multi-Function Symbol Set: 50 Value: 39	Jammer		Two or more of EW, TA, TT, MG, TI
Missile Guidance Symbol Set: 50 Value: 40	Radar		
Missile Homing Symbol Set: 50 Value: 41	Air Radar		
Missile Tracking Symbol Set: 50 Value: 42	Jammer		
Navigational/General Symbol Set: 50 Value: 43	Jammer		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Navigational/Distance Measuring Equipment Symbol Set: 50 Value: 44	Jammer		
Navigational/Terrain Following Symbol Set: 50 Value: 45	Jammer		
Navigational/Weather Avoidance Symbol Set: 50 Value: 46	Jammer		
Omni-Line of Sight (LOS) Symbol Set: 50 Value: 47	Communications		
Proximity Fuse Symbol Set: 50 Value: 48	Air Radar		
Point-To-Point Line of Sight (LOS) Symbol Set: 50 Value: 49	Communications		
Instrumentation Symbol Set: 50 Value: 50	Radar		
Range Only Symbol Set: 50 Value: 51	Radar		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Sonobuoy Symbol Set: 50 Value: 52	Radar		
Satellite Downlink Symbol Set: 50 Value: 53	Communications		
Space Symbol Set: 50 Value: 54	Radar		
Surface Search Symbol Set: 50 Value: 55	Radar		
Shell Tracking Symbol Set: 50 Value: 56	Radar		
Satellite Uplink Symbol Set: 50 Value: 57	Communications		
Target Acquisition Symbol Set: 50 Value: 58	Radar		
Target Illumination Symbol Set: 50 Value: 59	Radar		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE J-III. Signals intelligence sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Tropospheric Scatter Symbol Set: 50 Value: 60	Communications		
Target Tracking Symbol Set: 50 Value: 61	Radar		
Unknown Symbol Set: 50 Value: 62	Radar		
Video Remoting Symbol Set: 50 Value: 63	Radar		
Experimental Symbol Set: 50 Value: 64	Radar		

J.6.4 SIGINT sector 2 modifiers. The SIGINT sector 2 modifiers denote communications and radar categories. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier. There are currently no sector 2 signal intelligence modifiers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CYBERSPACE SYMBOLS

K.1 SCOPE

K.1.1 Scope. This appendix addresses symbols that support cyberspace operations within the cyberspace symbol set. The tables in this appendix present the icons for organizations conducting operations within the virtual and physical cyberspace domain. The information contained herein is intended for compliance.

K.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

K.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

K.4 GENERAL REQUIREMENTS

K.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and cyberspace symbology.

K.5 DETAILED REQUIREMENTS

K.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

K.5.2 Symbol identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

K.5.3 Composition of cyberspace symbols. A standard method for constructing symbols is presented. Refer to 5.3.10 for an explanation of symbol composition. Figure K-1 shows an example of a cyberspace symbol.

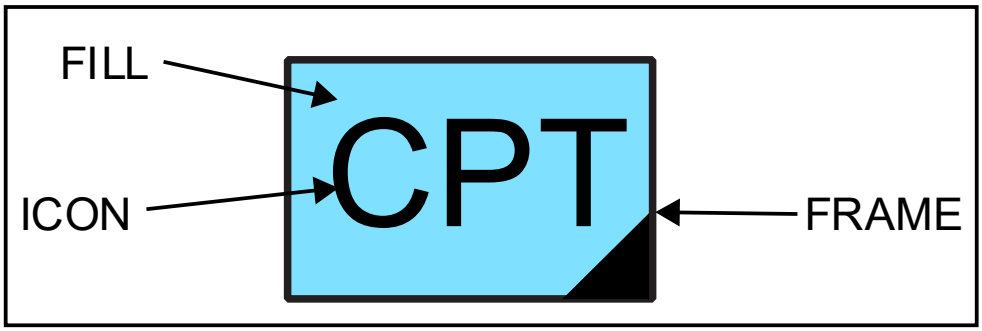



FIGURE K-1. Cyberspace symbol components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.5.3.1 Symbol building process. Table K-I depicts the symbol building process for cyberspace symbols. The process is identical for icons and modifiers requiring the vertical bounding octagon.

TABLE K-I. Cyberspace symbol building process.

STEP	DESCRIPTION	EXAMPLE
1.	Choose the frame that matches the dimension of the object from the appropriate column in tables I, II, or III and standard identity (table A-II). In this example, the dimension is cyberspace, and the standard identity is friend. The example depicts a “friendly virtual cyberspace.”	
2.	Choose an icon for the main sector of the bounding octagon. In this example, the icon is “cyber protection team,” a cyberspace entity type. The example depicts a “friendly cyber protection team.” Note: There are no modifiers in cyberspace symbols.	
3.	The finished symbol will appear as shown in the example.	

K.5.3.2 Icons and modifiers. All icons shall be placed within the main sector of the bounding octagon (see table K-I).

K.5.4 Amplifiers.

K.5.4.1 Text amplifiers. The purpose of the static text amplifiers described in this appendix is to standardize the display of additional alphanumerical information on identity, movement and location and capabilities. See 5.3.7 for more information on amplifiers. Figure K-2 shows the placement of space symbol amplifiers around the friend symbol frame. Table K-II provides descriptions and formats of each amplifier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

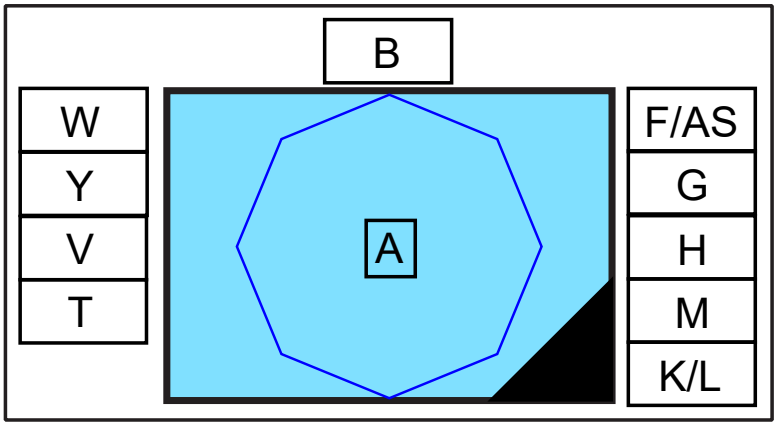


FIGURE K-2. Placement of cyberspace symbol amplifiers.

TABLE K-II. Descriptions and formats of cyberspace symbol amplifiers.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
A	Cyberspace Icon	The innermost part of a symbol, comprised of an icon and optional modifiers, that represents a joint military object (see 5.3.4).	
B	Echelon	A graphic amplifier in a unit symbol that identifies command level (see figure 15).	
D	Task Force	A graphic amplifier that identifies a unit or an activity symbol as a task force (see 5.3.7.4 and figure 15 in the base document).	
F	Reinforced or Reduced	A text amplifier in a unit symbol that displays (+) for reinforced, (-) for reduced, (±) reinforced and reduced.	
G	Staff Comments	A text amplifier for units, equipment, and installations; content is implementation specific.	
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
K	Combat Effectiveness	A text amplifier for units and installations that indicates effectiveness. **The entries are:** fully operational (FO) substantially operational (SO) marginally operational (MO) not operational (NO) unknown (UNK)	
L	Signature Equipment	A text amplifier for hostile equipment; "**!**" indicates detectable electronic signatures.	
M	Higher Formation	A text amplifier for units that indicates number or title of higher echelon command (Corps is designated by Roman numerals).	
S	Headquarters Staff	A graphic amplifier for units, installations and activities that identifies them as a headquarters (see figure 4 and figure 15).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE K-II. Descriptions and formats of cyberspace symbol amplifiers - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or "O/O" for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).	
Y	Location	A text amplifier for units, equipment and installations that displays a symbol's location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
AE	Equipment Teardown Time	An amplifier that identifies equipment teardown time in minutes	Numeric – {1,3}
AO	Engagement Bar	A graphic amplifier placed immediately atop the symbol. May denote: 1) local/remote status 2) engagement status 3) weapon type	A:BBB:CC, where A = remote/local BBB = engagement status CC = weapon asset
AP	Target Number	An amplifier used in Fire Support operations to uniquely designate targets in accordance with STANAG 2934.	Alphanumeric - {6,6} [XX][####]
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	

K.5.4.3 Graphic amplifiers. Graphic amplifiers can be static, located in a fixed position in relation to a track's symbol, or dynamic and move about the symbol based on the track's characteristics. See 5.3.7 for more information on amplifiers, including examples of dynamic amplifiers.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

K.6 CYBERSPACE SYMBOLS

K.6.1 Cyberspace symbols. This section includes the lists of icons and modifiers for building cyberspace symbols.






K.6.2 Cyberspace icons. Table K-III depicts cyberspace icons.

TABLE K-III. Cyberspace icons.

DESCRIPTION	ICON	REMARKS
Cyberspace Unit Type: Entity Symbol Set: 60 Value: **11**0000	N/A	Reserved for hierarchical purposes.
Combat Mission Team Type: Entity Type Entity: Cyberspace Unit Symbol Set: 60 Value: 11**01**00 Icon Type: Main		
National Mission Team Type: Entity Type Entity: Cyberspace Unit Symbol Set: 60 Value: 11**02**00 Icon Type: Main		
Cyber Protection Team Type: Entity Type Entity: Cyberspace Unit Symbol Set: 60 Value: 11**03**00 Icon Type: Main		
Defensive Cyberspace Operation Type: Entity Type Entity: Cyberspace Unit Symbol Set Value: 60 Value: 11**06**00 Icon Type: Main		
Offensive Cyberspace Operation Type: Entity Type Entity: Cyberspace Unit Symbol Set Value: 60 Value: 11**07**00 Icon Type: Main		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE K-III. Cyberspace icons - Continued.

DESCRIPTION	ICON	REMARKS
Internet Service Provider Type: Entity Type Entity: Cyberspace Unit Symbol Set Value: 60 Value: 11**08**00 Icon Type: Main		
Security Type: Entity Type Entity: Cyberspace Unit Symbol Set Value: 60 Value: 11**09**00 Icon Type: Main		
Operations Type: Entity Type Entity: Cyberspace Unit Symbol Set Value: 60 Value: 11**10**00 Icon Type: Main		
Threat Actor Type: Entity Symbol Set Value: 60 Value: **12**0000 Icon Type: Main		
Insider Type: Entity Type Entity: Cyberspace Threat Actor Symbol Set Value: 60 Value: 12**02**00 Icon Type: Main		
Agent Type: Entity Symbol Set Value: 60 Value: **13**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Firewall Type: Entity Type Entity: Agent Symbol Set Value: 60 Value: 13**01**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE K-III. Cyberspace icons - Continued.

DESCRIPTION	ICON	REMARKS
Firmware Type: Entity Type Entity: Agent Symbol Set Value: 60 Value: 13**02**00 Icon Type: Main		
Application Type: Entity Symbol Set Value: 60 Value: **14**0000 Icon Type: Main		White filled
Search Engine Type: Entity Type Entity: Application Symbol Set Value: 60 Value: 14**03**00 Icon Type: Main		
Social Media Type: Entity Type Entity: Application Symbol Set Value: 60 Value: 14**04**00 Icon Type: Main		
Threat Type: Entity Symbol Set Value: 60 Value: **15**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Malware Type: Entity Type Entity: Threat Symbol Set Value: 60 Value: 15**01**00 Icon Type: Main		
Phishing Type: Entity Type Entity: Threat Symbol Set Value: 60 Value: 15**02**00 Icon Type: Main		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE K-III. Cyberspace icons - Continued.

DESCRIPTION	ICON	REMARKS
Data Type: Entity Symbol Set Value: 60 Value: **16**0000 Icon Type: Main		
Digital Currency Type: Entity Type Entity: Data Symbol Set Value: 60 Value: 16**01**00 Icon Type: Main		
Persona Type: Entity Type Entity: Data Symbol Set Value: 60 Value: 16**02**00 Icon Type: Main		
End Point Type: Entity Value: **17**0000 Icon Type: Main	N/A	Reserved for hierarchical purposes.
Server Type: Entity Type Entity: Endpoint Symbol Set Value: 60 Value:17**01**00 Icon Type: Main		
Workstation Type: Entity Type Entity: End Point Symbol Set Value: 60 Value: 17**02**00 Icon Type: Main		
Portable Electronic Device (PED) Type: Entity Type Entity: End Point Symbol Set: 60 Value: 17**03**00 Icon Type: Main	N/A	Reserved for hierarchical purposes.






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE K-III. Cyberspace icons - Continued.

DESCRIPTION	ICON	REMARKS
Smartphone Type: Entity Subtype Entity/Entity Type: End Point/Portable Electronic Device (PED) Symbol Set Value: 60 Value: 170**301** Icon Type: Main		
Tablet Type: Entity Subtype Entity/Entity Type: End Point/Portable Electronic Device (PED) Symbol Set Value: 60 Value: 170**302** Icon Type: Main		
Laptop Type: Entity Subtype Entity/Entity Type: End Point/Portable Electronic Device (PED) Symbol Set Value: 60 Value: 170**303** Icon Type: Main		
Health Monitor Type: Entity Subtype Entity/Entity Type: End Point/Portable Electronic Device (PED) Symbol Set Value: 60 Value: 170**304** Icon Type: Main		
Smartvest Type: Entity Subtype Entity/Entity Type: End Point/Portable Electronic Device (PED) Symbol Set Value: 60 Value: 170**305** Icon Type: Main		
Smartwatch Type: Entity Subtype Entity/Entity Type: End Point/Portable Electronic Device (PED) Symbol Set Value: 60 Value: 170**306** Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.









TABLE K-III. Cyberspace icons - Continued.

DESCRIPTION	ICON	REMARKS
Wearable Type: Entity Subtype Entity/Entity Type: End Point/Portable Electronic Device (PED) Symbol Set Value: 60 Value: 170**307** Icon Type: Main		
Internet of Things Device Type: Entity Type Entity: End Point Symbol Set Value: 60 Value: 17**04**00 Icon Type: Main		
Printer Type: Entity Type Entity: End Point Symbol Set Value: 60 Value: 17**05**00 Icon Type: Main		
Router Type: Entity Type Entity: End Point Symbol Set Value: 60 Value: 17**06**00 Icon Type: Main		
Switch Type: Entity Type Entity: End Point Symbol Set Value: 60 Value: 17**07**00 Icon Type: Main		
Network Type: Entity Symbol Set Value: 60 Value: **18**0000 Icon Type: Main		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.




K.6.3 Cyberspace sector 1 modifiers. The cyberspace sector 1 modifiers denote capability and service categories. Table K-IV lists Cyberspace sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 1 modifiers, where required, are included in table B-I and are accessed using the common modifier identifier.

TABLE K-IV. Cyberspace sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Defensive Cyberspace Symbol Set Value: 60 Value: 01	Capability		
Offensive Cyberspace Symbol Set Value: 60 Value: 02	Capability		
Social Symbol Set Value: 60 Value: 03	Capability		
Radio Frequency Symbol Set Value: 60 Value: 06	Capability		
Continuity of Operations Symbol Set Value: 60 Value: 08	Capability		
Internet Service Provider (ISP) Symbol Set Value: 60 Value: 09	Capability		
Finance Symbol Set Value: 60 Value: 10	Capability		
Out of Band Symbol Set Value: 60 Value: 11	Capability		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE K-IV. Cyberspace sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Cloud Symbol Set Value: 60 Value: 12	Service		
Data Symbol Set Value: 60 Value: 13	Capability		
Service Symbol Set Value: 60 Value: 14	Capability		





K.6.4 Cyberspace sector 2 modifiers. The cyberspace sector 1 modifiers denote capability categories. Table K-V lists Cyberspace sector 1 modifiers and illustrates their placement within the bounding octagon. Additional sector 2 modifiers, where required, are included in table B-II and are accessed using the common modifier identifier.

TABLE K-V. Cyberspace sector 2 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Secured Symbol Set Value: 60 Value: 01	Capability		
Unsecured Symbol Set Value: 60 Value: 02	Capability		
Response Actions Symbol Set Value: 60 Value: 03	Capability		
Internal Defense Measures Symbol Set Value: 60 Value: 05	Capability		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE K-V. Cyberspace sector 2 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Advanced Persistent Threat Symbol Set Value: 60 Value: 06	Capability		
Nation State Symbol Set Value: 60 Value: 07	Organization		White filled
Nation State Sponsored Symbol Set Value: 60 Value: 08	Organization		White filled
Service Symbol Set: 60 Value: 10	Capability		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CONTROL MEASURES AND PLANNING SYMBOLS

L.1 SCOPE

L.1.1 Scope. This appendix contains symbols that represent control measures, planning symbols and chemical, biological, radiological and nuclear (CBRN) incidents in the C2 domain. The tables in this appendix present the icons and amplifiers for control measures, planning symbols, and CBRN. The information contained herein is intended for compliance. Ultimately, the joint force commander and their forces must be capable of accomplishing their mission, either directly or indirectly, by the employment of capabilities to create physical or psychological effects and be able to sustain such operations for as long as is necessary to achieve operational objectives. The principal method by which this capability is delivered is through the combination of joint operational capabilities and a range of mechanisms and control measures. This appendix establishes a standard system for the development and use of control measures and planning symbols. Within this standard system there are a series of control measure and planning symbols that follow standard formats and there are control measures and planning symbols that follow stand-alone formats. This appendix provides rules for automated and hand-drawn symbols and examples for all control measures and planning symbols. These control measures and planning symbols are the standard for all command and control systems and simulations, including those used in live, virtual and planning. For many control measures and planning symbols, there is a corresponding definition provided in this section. These definitions are provided to help add clarity in using these symbols. For ease of understanding and use, the control measures and planning symbols have been broken down into groups that correspond to the joint functions of command and control to include joint targeting, maneuver and fires, intelligence, force protection, sustainment and deception under information operations.

L.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

L.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

L.4 GENERAL REQUIREMENTS

L.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy, control measures, and planning symbols symbology.

L.5 DETAILED REQUIREMENTS

L.5.1 Control measures and planning symbols. Control measures and planning symbols are directives given to assign responsibilities, coordinate fires and maneuvers and control operations. They may be boundaries, special area designations and other unique markings related to operational environment geometry and necessary for planning and management of operations. Control measures and planning symbols provide operational information that cannot be displayed via icon-based symbols alone. Control measures and planning symbols can be displayed as points, lines, areas, or tactical mission tasks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.1.1 Composition of control measures and planning symbols. Control measures and planning symbols can be combined with other symbols, icons and amplifiers to display operational information (see figure L-1). They do not follow the same building rules as the icon-based symbols but shall be built in accordance with the rules specified in this appendix.

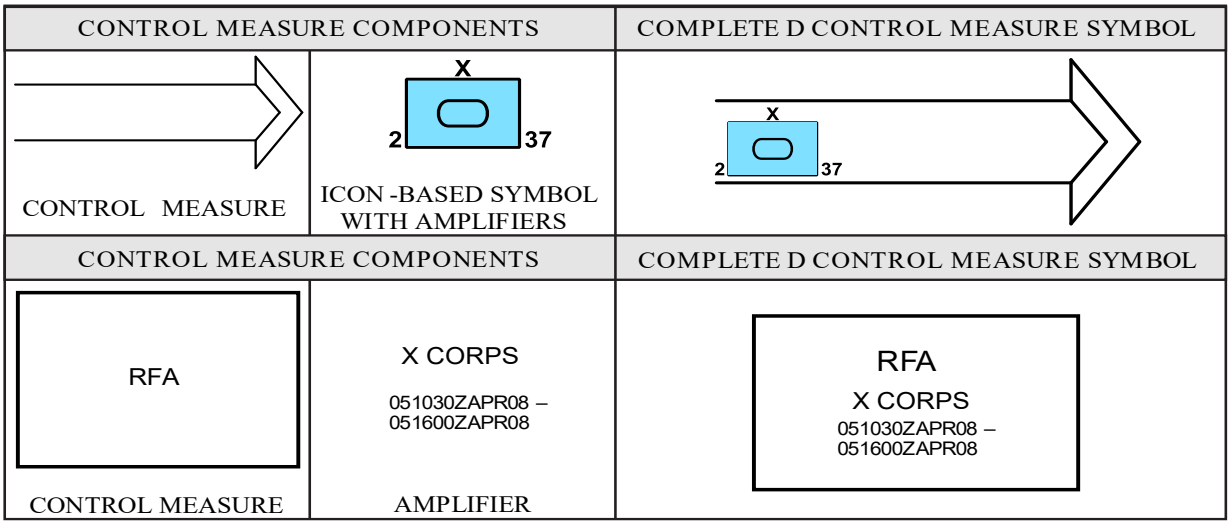


FIGURE L-1. Composition of control measure and planning symbols.






L.5.1.1.1 Standard identity (color rules) for control measures and planning symbols. The control measures and planning symbols for monochrome systems shall be black or white, depending on display background. For color systems, control measures and planning symbols shall be black, blue (friendly), red (hostile), green (neutral or obstacles), or yellow (unknown or chemical, biological, radiological and nuclear hatched contaminated area fill). If red is not available for hostile standard identity, the symbol shall be drawn in black (with the abbreviation "ENY" placed on the graphic in at least two places for linear and multi point control measures and planning symbols and in one place for single point control measures and planning symbols.)

L.5.1.1.2 Point control measures and planning symbols height. Unless specifically indicated otherwise in the size/shape parameter of a point control measure or a planning symbol's notes, the default point control measures and planning symbols height should be 1L, where L is the default length and height of the bounding octagon (see 5.3.1).

L.5.1.1.3 Status. Status refers to whether a control measure or a planning symbol exists at the location identified (status is "present") or will in the future reside at that location (status is "planned", "anticipated", or "suspected"). If a control measure or a planning symbol is on order, the status code shall be specified "A – Anticipated/Planned" and field amplifier "W" shall be present and specified "O/O". In general, linear control measures and planning symbols (including boundary lines) and area control measures and planning symbols shall be a solid line when indicating present status and a dashed line when indicating anticipated or planned status, as depicted in table L-I. There are certain control measures and planning symbols such as counterattack which are drawn in the "present'" status with dashed lines. The codes for status in the SIDC are provided in the appendix for each symbology set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-I. Present and planned status for control measures and planning symbols.

	POINT GRAPHICS	BOUNDARY LINE GRAPHICS	AREA GRAPHICS
PRESENT POSITION (P)			
ANTICIPATED, PLANNED, SUSPECTED, OR ON ORDER (A)			

L.5.1.1.4 Amplifiers. An amplifier provides optional additional information about a control measure or a planning symbol. The field ID, field title, description and maximum allowable display lengths of control measures and planning symbol amplifiers are presented in table L-II. An example of each amplifier (both text and graphic) is included in figure L-2. The default placement of amplifiers in fields for boundary lines, points, and areas are shown in figures L-9, L-13, L-14 and L-15, respectively. An example of chemical, biological, radiological and nuclear (CBRN) events can be seen in figure L-2. As indicated in figures L-9, L-13, L-14 and L-15, certain fields can be displayed more than once within a control measure and a planning symbol. In some cases, a control measure or a planning symbol may require multiple instances of a given amplifier in order to fully create or represent an object: examples of these fields are H, T, W and Y. The unnumbered fields shall be filled before the numbered fields (i.e., fields W, H and T shall be used before fields W1, H1 and T1) As indicated in table L-II, not all amplifiers are applicable to all control measures or planning symbols. However, when any such amplifier is displayed, it shall be defined in accordance with the contents of this table and positioned in accordance with figures L-2, L-9, L-13, L-14 and L-15.

TABLE L-II. Amplifier descriptions and maximum lengths for control measures and planning symbols.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
B	Echelon	An amplifier in a unit symbol that identifies command level (see 5.3.7.1 and table VII).	Graphic
C	Quantity	An amplifier in an equipment symbol that identifies the number of items present. Examples include: 350 Beds 50 Gallons	Alphanumeric - {1,19} [#########] [XXXXXXXXXX]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-II. Amplifier descriptions and maximum lengths for control measures and planning symbols - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
H	Additional Information	A text amplifier for units, equipment, and installations; content is implementation specific.	
N	Hostile (Enemy)	An amplifier for equipment; letters "ENY" denote hostile symbols.	Graphic
Q	Direction of Movement	A graphic amplifier that identifies the direction of movement or intended movement of an object (see 5.3.7.9 and figure 15).	
T	Unique Designation (Track Number)	A text amplifier for units, equipment and installations that uniquely identifies a particular symbol or track number.	Prefix = TN:##### **Example**: TN:13579
V	Type	A text amplifier for equipment that indicates types of equipment.	
W	Date-Time Group (DTG)	An alphanumeric designator for displaying a date-time group (DDHHMMSSZMONYYYY) or “O/O” for on order. The date-time group is composed of a group of six numeric digits with a time zone suffix and the standardized three-letter abbreviation for the month followed by four digits representing the year. The first pair of digits represents the day; the second pair, the hour; the third pair, the minutes. For automated systems, two digits may be added before the time zone suffix and after the minutes to designate seconds (see 5.3.7.8).	
X	Altitude/Depth	A text amplifier for units, equipment and installations that displays either altitude, flight level, depth for submerged objects, or height of equipment or structures on the ground. See 5.3.7.6 for content.	Measurement units shall be displayed within the string **Examples**: 1500MSL FL150
Y	Location	A text amplifier for units, equipment and installations that displays a symbol’s location in degrees, minutes and decimal minutes (or in MGRS, GARS, or other applicable display formats).	3317.0921N 04412.6332E 38SMB2649083145
AM	Distance	An amplifier that displays a minimum, maximum, or a specific distance (range, radius, width, length, etc.), in meters or feet.	Alphanumeric - {3,9} [#] [X]
AN	Azimuth	An amplifier that displays an angle measured from true north to any other line in degrees.	Alphanumeric - {7,8} [#####] [XXX]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-II. Amplifier descriptions and maximum lengths for control measures and planning symbols - Continued.

FIELD	FIELD TITLE	DESCRIPTION	FORMAT
AP	Target Number	An amplifier used in Fire Support operations to uniquely designate targets in accordance with STANAG 2934.	Alphanumeric - {6,6} [XX][####]
AP1	Target Number Extension	An amplifier used to identify a target number extension which is a sequentially assigned number identifying the individual elements in a target (MIL-STD-6017),	Numeric – {2,3} [-##]
AS	Country	A three-letter code that indicates the country of origin of the organization (US systems shall use GENC).	
BA	Offset Location	An amplifier used to indicate the offset or precise location of a single point symbol (see 5.3.7.5, 5.3.12, and figure 15).	Graphic

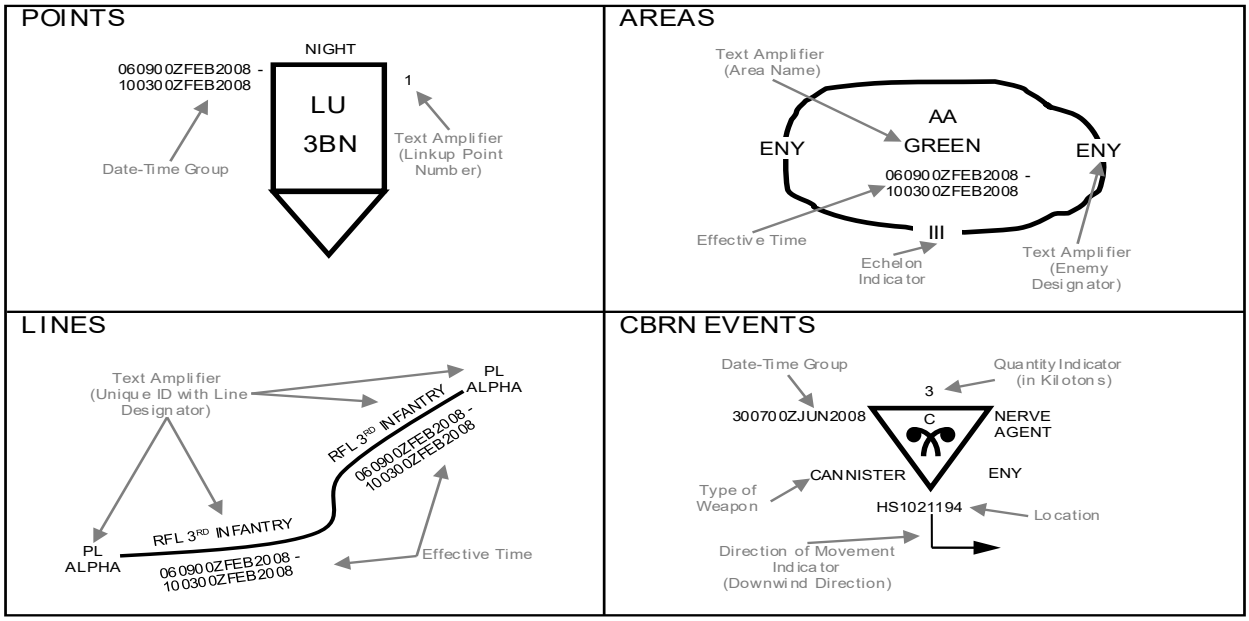


FIGURE L-2. Graphic amplifiers for control measures, CBRN and planning symbols.

L.5.1.1.5 Direction of movement amplifier. The direction of movement amplifier is an arrow identifying the direction of movement of events. The arrow extends downward from the center of the icon and points in the direction of movement. The amplifier is represented in field Q as defined in table L-II and positioned as shown in figure 15.

L.5.1.1.6 Echelon amplifier. The echelon amplifier provides a graphic representation of command level and is used to show the element echelon on boundary lines, lines, and areas. Echelon amplifier values are listed in table VIII of the base document. The amplifier is

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

represented in field B as defined in table L-II and positioned as shown in figure L-2 and figure L-15.

L.5.1.1.7 Offset location amplifier. The offset location amplifier is used when placing an object away from its actual location. The amplifier is a line extending downward from an appropriate anchor point on an icon. The actual location (field Y) is given in latitude and longitude.

L.5.1.1.8 Text amplifier. Table L-II defines the specific content, length and type of each text amplifier. Additional information is contained in field H, with the content of this field being implementation specific, provided the maximum number of characters in each field is not exceeded.

L.5.1.1.9 Altitude/depth amplifier. This field may contain alternate value formats. Enter a description of the altitude/depth (X) using one of the following.

L.5.1.1.10 Altitude base reference point. Legal values are “GL” ground level and “MSL” mean sea level.

L.5.1.1.10.1 Relative altitude. The relative altitude is a composite field consisting of multiple parts, the numeric altitude, the altitude unit of measurement and the altitude vertical dimension. Legal values for the numeric altitude are (minus) -99999 through 99999 in increments of 1. Legal values for altitude units of measure are feet “FT,” meters “M,” kilometers “KM,” and statute miles “SM.” The legal value for the depth unit of measure is feet “FT.” Legal values for the vertical dimension are “AGL” above ground level, “AMSL” above mean sea level, “HAE” height above ellipsoid and “BMSL” below mean sea level. BMSL is used only for depth of submerged objects, reported in feet. A space may be added between the values in the field to make it easier to read.

Examples: 1250 FT AGL, 1000 FT AMSL, 1524 M HAE, 35760 FT BMSL.

L.5.1.1.10.2 Flight level. By definition, flight level (FL) is, “Surfaces of constant atmospheric pressure which are related to a specific pressure datum, 1013.2 mb (29.92 in) and are separated by specific pressure intervals. (Flight levels are expressed in three digits that represent hundreds of feet, e.g., flight level 250 represents a barometric altimeter indication of 25,000 feet and flight level 255 is an indication of 25,500 feet.).” The legal value for flight level amplifier is “FL.” A space may be added between the values in the field to make it easier to read. The legal value for context quantity is 000-999, in increments of one.

Example: FL 290.

L.5.1.1.10.3 Multiple instances of altitude/depth amplifiers. When multiple instances of the “X” amplifier are present in a single instance of a symbol or graphic (ex., Minimum Altitude “X,” Maximum Altitude “X1”), for display purposes, the fields may be separated by a hyphen “-,” or a space, hyphen and space “ - .”

Examples:
500 FT AGL – 1250 FT AGL 25 FT AMSL – 150 FT AMSL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

FL 250 – FL 290 MSL – 35760 FT BMSL

L.5.1.1.11 Date-time group. Date-time group (DTG) is defined as the date and time expressed in an alphanumeric combination. The alphanumeric combination used is day-time-time zone-month-year. The alphanumeric combination can be displayed in a number of ways. In its longest form, sixteen characters, it is composed of eight digits (first pair of digits denotes the date, second pair denotes the hours, third pair denotes the minutes, and fourth pair denotes the seconds) followed by the time zone suffix, followed by a three-letter month abbreviation and four digits for the year: DDHHMMSSZMONYYYY. It can also be expressed in shorter forms by removing characters, such as DDHHMMZMONYY. On order (O/O) is a valid substitute for DTG (see example below).

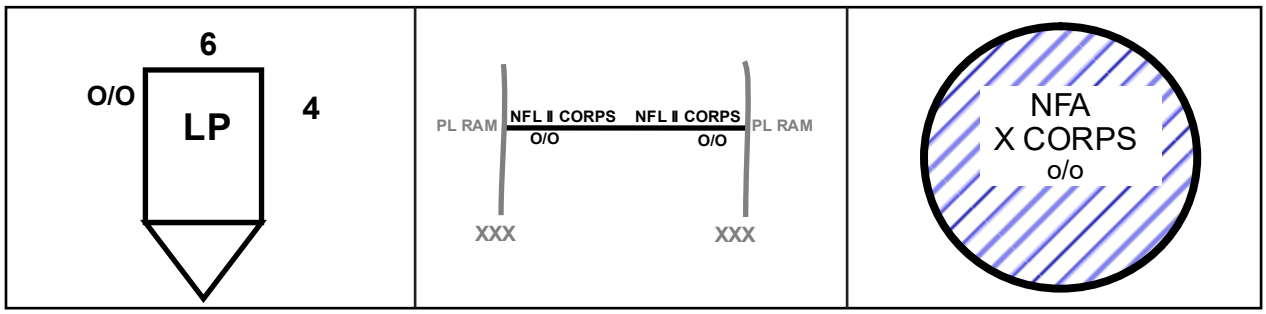


FIGURE L-3. On Order

L.5.1.1.12 Location of control measures and planning symbols sector modifiers. The location of sector 1 and sector 2 modifiers in control measures and planning symbols is different from other symbols within this standard as control measures and planning symbols do not use a bounding octagon. The physical location is defined in the applicable control measure and planning symbol template within this appendix.

L.5.1.1.12.1 Control measures and planning symbols sector 1 modifier. The control measures and planning symbols sector 1 modifiers in table L-XXIII under category identified as mine type provides a graphic representation of the type(s) of mines used in a minefield or mined area. The mine types within the control measures and planning symbols sector 1 modifier shall only be used with minefields and mined area control measures and planning symbols. A minefield or mined area can contain a single mine type or multiple mine types, with a maximum of three (3) mine types in a single minefield or mined area.

L.5.1.1.12.2 Mine types. The seven mine types are Unspecified Mine, Antipersonnel Mine, Antipersonnel Mine with Directional Effects, Antitank Mine, Antitank Mine with Anti-handling Device, Wide Area Antitank Mine, and Mine Cluster.

L.5.1.1.12.3 Default mine type. All minefields and mined areas shall contain a minimum of one Mine Type. The default mine type is the Unspecified Mine, sector 1 modifier code “13”. When the type of mines in a minefield or mined area are known, then the actual mine types shall be used, not the default Unspecified Mine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.1.1.12.4 Mine type(s) as a fill pattern. For the Minefield, Dynamic Depiction, Mined Area, and Mined Area, Fenced control measures and planning symbols, the specified mine types will be used to create a fill pattern.

L.5.1.1.13 Feint/decoy/dummy amplifier. Refer to 5.3.7.4 in base document for general guidance for this amplifier. Additional guidance specific to control measures and planning symbols is below.

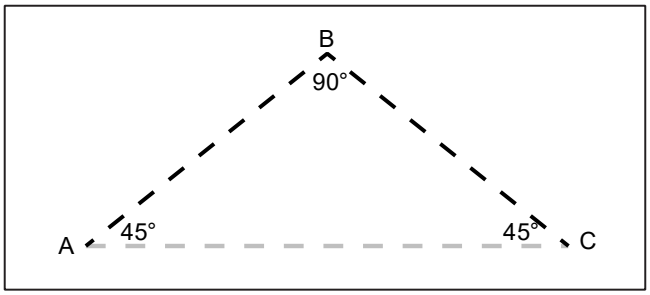


FIGURE L-4. Feint, decoy, or dummy amplifier construction.

L.5.1.1.13.1 Feint, decoy, or dummy amplifier line style. The line style of the feint, decoy, or dummy amplifier when used with control measures and planning symbols shall always be rendered in accordance with 5.3.7.4 - as dashed lines, even when the status of the control measures and planning symbols is present and the control measure and planning symbol line style is solid.

L.5.1.1.13.2 Position of the feint, decoy, or dummy amplifier for single points. The feint, decoy, or dummy amplifier can be used with some sustainment, CBRN decontamination and/or special C2 point symbols. For these instances, the feint, decoy, or dummy amplifier shall be positioned in relation to the frame as shown in Figure L-5. Point "A" shall be rendered 0.4L above the top of the top edge and 0.25L to the left of the left edge of the frame. Point "C" shall be rendered 0.4L above the top of the frame and 0.25L to the right of the right edge of the frame. This spacing will support any authorized amplifier(s) to be applied to the symbol without overlapping the amplifier. The location of point "B" shall be calculated per the information and illustrations in this section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

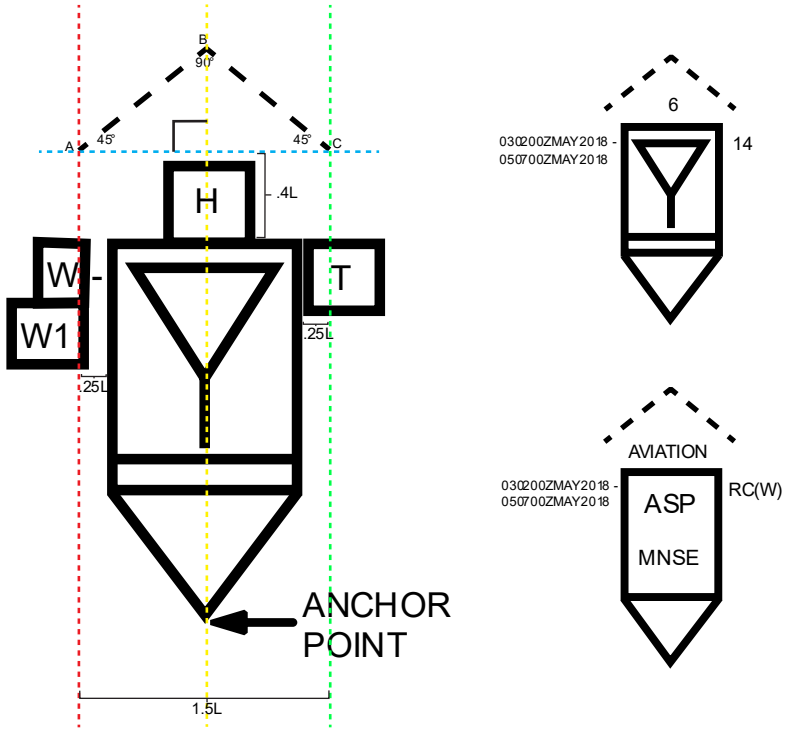


FIGURE L-5. Feint, decoy, or dummy amplifier positioning for single point control measures and planning symbols.

L.5.1.1.13.3 Feint, decoy, or dummy amplifier rendering for most linear and area (polygon) control measures and planning symbols. The rendering of the feint, decoy, or dummy amplifier for most linear control measures and planning symbols and most area (polygon) control measures and planning symbols that do not contain a large directional arrow is described in figure L-6. This does not apply to any Axis of Advance and/or Direction of Attack control measure symbols (they have large arrows); see L.5.1.1.13.4 for rendering guidance for Axis of Advance and Direction of Attack control measure symbols.

L.5.1.1.13.3.1 The feint, decoy, or dummy amplifier point "A" x/y coordinate is calculated using the left most edge of the symbol area as the "x" (see red dotted line) and the topmost edge of the symbol area as the "y" (see blue dotted line).

L.5.1.1.13.3.2 The feint, decoy, or dummy amplifier point "C" x/y coordinate is calculated using the right most edge of the symbol area as the "x" (see green dotted line) and the topmost edge of the symbol portion as the "y" (see blue dotted line).

L.5.1.1.13.3.3 For the feint, decoy, or dummy amplifier portion point "B", x/y coordinate is calculated per L.5.1.1.13.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

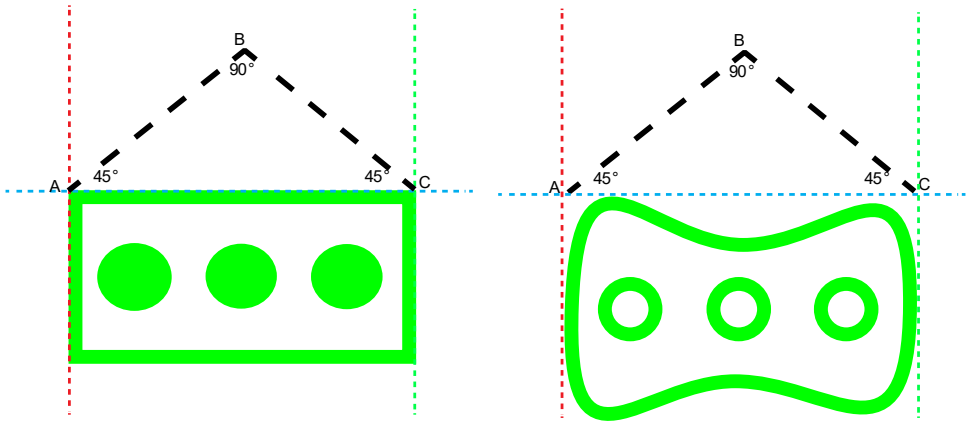


FIGURE L-6. Feint, decoy, or dummy amplifier positioning for most linear and area (polygon) symbols

L.5.1.1.13.4 Feint, decoy, or dummy amplifier rendering for Axis of Advance and Direction of Attack control measures and planning symbols. The rendering of the feint, decoy, or dummy amplifier for Axis of Advance and/or Direction of Attack control measure and planning symbols is described in figure L-7. This section is an exception to L.5.1.1.13.3, rendering guidance for most linear and area polygon control measures and planning symbols that do not contain a large directional arrow.

L.5.1.1.13.4.1 The feint, decoy, or dummy amplifier point "A" x/y coordinate is calculated using the left most edge of the symbol's arrowhead as the "x" (see red dotted line) and the pointed end of the arrowhead side line as the "y" (see blue dotted line).

L.5.1.1.13.4.2 The feint, decoy, or dummy amplifier point "C" x/y coordinate is calculated using the right most edge of the symbol's arrowhead as the "x" (see green dotted line) and the pointed end of the arrowhead side line as the "y" (see blue dotted line).

L.5.1.1.13.4.3 For the feint, decoy, or dummy amplifier portion point "B", x/y coordinate is calculated per L.5.1.1.13.2.

L.5.1.1.13.4.4 The feint, decoy, or dummy amplifier shall be positioned in relation to the orientation of the arrowhead portion of the Axis of Advance and/or Direction of Attack control measures and planning symbols as follows. Given the base of the arrow head is distance "w" (see blue dotted line, width) in figures L-7and L-8 below, then the feint, decoy, or dummy amplifier baseline "AC" (not rendered) shall be positioned 0.5w in front of the symbol arrow head and shall be rendered such that the yellow dotted line (not rendered) is centered in the middle of and perpendicular to the base of the arrow head (see blue dotted line, not rendered) and the yellow dotted line (not rendered) intersects feint, decoy, or dummy amplifier point "B".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

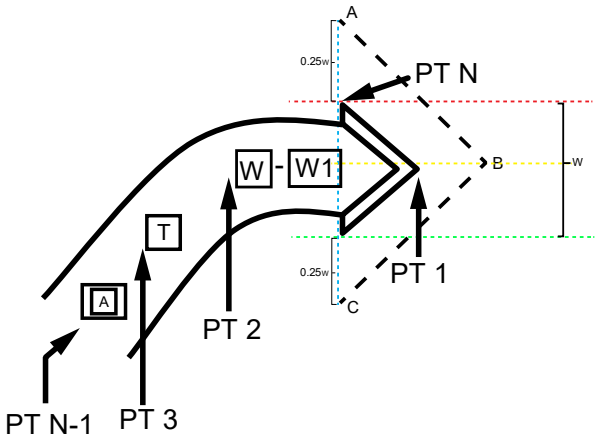


FIGURE L-7. Feint, decoy, or dummy amplifier positioning for axis' of advance.

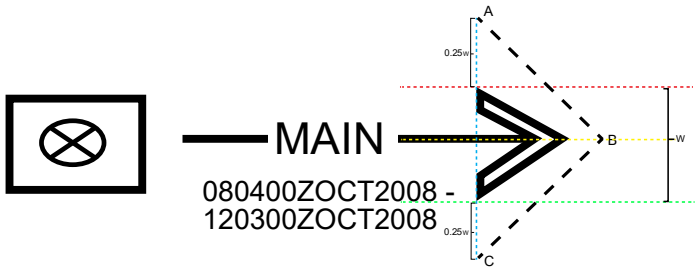


FIGURE L-8. Feint, decoy, or dummy amplifier positioning for direction of attack.

L.5.2 Construction of control measures and planning symbols. The rules for constructing control measures and planning symbols vary depending on whether the object is point, line, or area based. The latter category of objects includes various forms of linear control measures and planning symbols such as boundaries, areas of all shapes and sizes and complex figures such as an air corridor.

L.5.2.1 Point control measures and planning symbols. A point-based control measure and planning symbol, such as a casualty collection point, is constructed in the same manner as an unframed tactical symbol. Rules concerning the relative size of symbol components and placement of amplifiers in tactical symbols also apply to point based control measures and planning symbols.

L.5.2.2 Line and area control measures and planning symbols. A line or area control measure and planning symbol is constructed using the anchor points, size and orientation defined for the control measures and planning symbol. This appendix includes these parameters for the line and area graphics in the C2 domain. The size of the control measure and planning symbol is determined by these parameters and the scale of the background on which the control measures and planning symbols is placed. As a general rule, the line width and pattern height shall be scaled proportionally to the change in icon size required by its change in background scale (map or image). For control measures and planning symbols, line width is dependent on the distance between the points to be depicted and may vary (i.e., be reduced or enlarged) as display scale changes. Orientation is determined by the order in which the anchor points are entered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.3 Coloring. All friendly control measures and planning symbols will be shown in black or blue when drawn manually or on a color computer-generated display. Hostile control measures and planning symbols shall be shown in red. If red is not available, they will be drawn in black with the abbreviation “ENY” placed on the symbols in one place for single point symbols and at least two places for Area and Line symbols. All obstacles as shown in this appendix, friendly, hostile, neutral, or unknown, shall be drawn using the color green. If the color green is not available obstacles should be drawn using black. The color yellow will be used for the hatching for CBRN contaminated areas. NOTE: The use of green and yellow for obstacles and CBRN is in contradiction to the standard identities.

L.5.4 Labeling. All text labeling shall be in upper case letters. The reader should be able to read the labels for all text labels of amplifier fields for control measures and planning symbols when the bottom of the overlay is closest to the reader. Labeling written on an angle should be readable to the viewer, so they do not have to turn their head. Where space is limited within an area, the amplifying information may be shown in a stacked manner, rather than side by side as displayed in the templates.

L.5.4.1 Fonts. Font sizes shall be scaled as appropriate in order for the information to be readable to the viewer.

L.5.5 Command and control. The exercise of authority and direction by a properly designated commander over assigned and attached forces in the accomplishment of the mission. Command and control functions are performed through an arrangement of personnel, equipment, communications, facilities, and procedures employed by a commander in planning, directing, coordinating, and controlling forces and operations in the accomplishment of the mission.

L.5.5.1 Boundaries. In land warfare, a boundary is a line by which areas of responsibility between adjacent units/formations are defined. For boundaries, all field labels are displayed perpendicular to the boundary line. Figure L-9 “Orientation of boundary lines” below provides the orientation of field labels for horizontal (east/west) and vertical (north/south orientation) boundary line segments. The symbol for the highest echelon (Field B) unit on lateral boundaries is used for the boundary line. The graphic for the lower echelon (Field B) unit on a rear or forward boundary is used for the boundary line (see figure L-9). When units of the same echelon are adjacent to each other, the abbreviated unique designator (Field T) can be omitted from the alphanumeric designator. Tables L-XXIV and L-XXV at the end of the appendix provide a list of abbreviations and acronyms to be used for Field T. For all boundaries, use Arabic numerals to show the number of units, except for a corps boundary, use Roman numerals to show the number of corps. When the boundary is between units of different countries, the country trigraph (Field AS) is shown in parenthesis behind or below the unit designation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.5.2 Boundary line segment orientation determination. For the purpose of determining boundary line segment orientation, which is required to correctly position the field labels, the following additional guidance applies.

- Horizontal (East/West) orientation boundary line segments are those line segments that are oriented between 46 and 135 degrees.
- Vertical (North/South) orientation boundary line segments are those line segments that are oriented between 315 and 45 degrees.

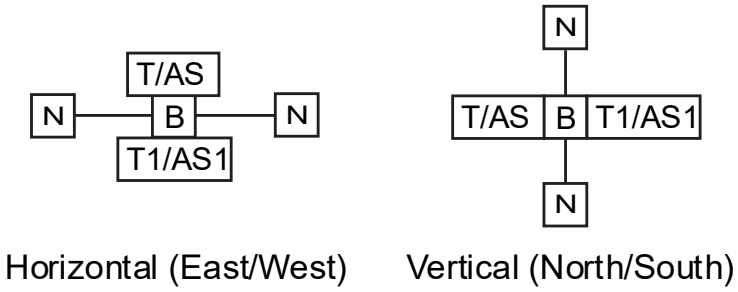


FIGURE L-9. Orientation of boundary lines.

L.5.5.2.1 Boundary line operational examples. The boundary line can be operationally used to depict a lateral boundary (figure L-10), a forward boundary (figure L-11), or a rear boundary (figure L-12). A lateral boundary is a control measure and a planning symbol that defines the left or right limit of a unit's operational area; together with the rear and forward boundaries and a coordinating altitude, lateral boundaries define the area of operations for a commander. A forward boundary is the farthest limit, in the direction of the enemy, of an organization's responsibility. A rear boundary is the line that defines the rear area of operations assigned to a particular unit; the area behind the rear boundary belongs to the next higher commander and positioning of elements behind it must be coordinated with that commander.

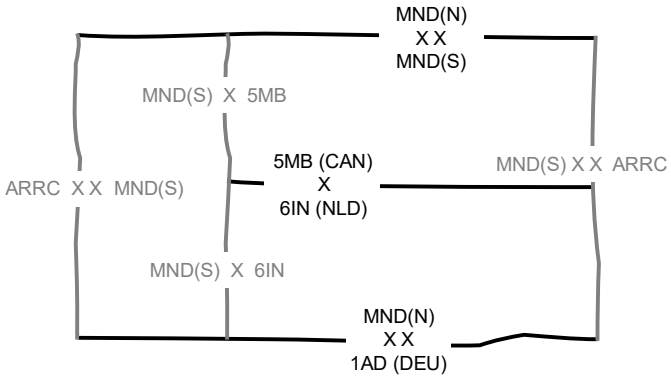


FIGURE L-10. Lateral boundary example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

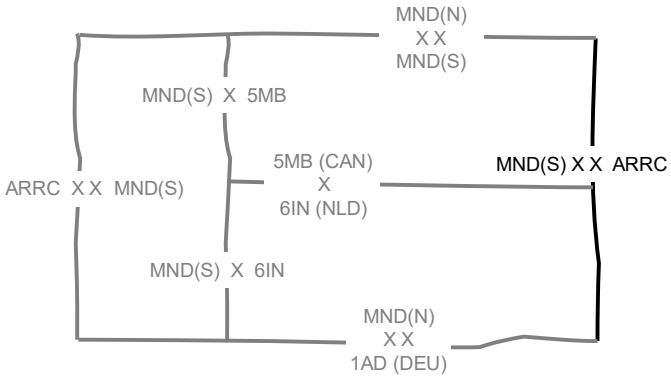


FIGURE L-11. Forward boundary example.

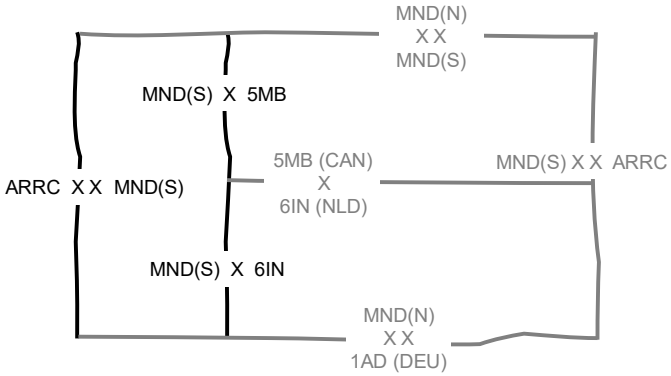


FIGURE L-12. Rear boundary example

L.5.5.2.2 Control measures and planning symbol draw rules. Draw rules listed below are used to create the control measures, mission tasks and planning symbols listed in the following tables within this appendix.

TABLE L-III. Control measures and planning symbol draw rules .

TYPE	DRAW RULE
AREAS	
Area1	**Anchor Points:** This symbol requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. The information fields should be moveable and scalable as a block within the area.
Area2	*{Disused}*
Area3	*{Disused}*
Area4	*{Disused}*
Area5	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the semicircle's opening. Point 3 defines the end of the arrow. **Size/Shape:** Points 1 and 2 determine the diameter of the semicircle and point 3 determines the length of the arrow. The tip of the arrowhead will be at the center point of the semicircle's diameter and will project perpendicularly from the line between points 1 and 2. The default tic length should be the same as the text height of the echelon field (B). Spacing between the tics should also be the height of B. Users should be provided a facility to allow them to manually alter the height of B, which in turn should affect the tic length and spacing accordingly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-III. Control measures and planning symbol draw rules - Continued.

TYPE	DRAW RULE
Area6	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** Points 1 and 2 will determine a radius that is long enough for the graphic to encompass the feature(s) being retained. The opening will be a 30-degree arc of the circle. The default tic length should be the same as the text height of the echelon field (R). Spacing between the tics should also be the height of R. Users should be provided a facility to allow them to manually alter the height of R, which in turn should affect the tic length and spacing accordingly.
Area7	**Anchor Points:** This symbol requires three anchor points. Point 1 is the tip of the arrowhead. Points 2 and 3 define the endpoints of the straight line on the back side of the symbol. **Size/Shape:** Points 2 and 3 determine the length of the straight line on the back side of the symbol. The rear of the arrowhead line shall connect to the midpoint of the line between points 2 and 3. The arrowhead line shall be perpendicular to the line formed by points 2 and 3.
Area8	**Anchor Points:** This symbol requires four anchor points. Points 1 and 2 define the endpoints of the straight line on the back side of the symbol. Points 3 and 4 define the tips of the arrowheads. **Size/Shape:** Points 1 and 2 determine the length of the straight line on the back side of the symbol. The rear of the arrows should connect to points 1 and 2.
Area9	*{Disused}*
Area10	**Anchor Points:** This symbol requires a minimum of three and a maximum of six anchor points to define the boundary of the area. The anchor points shall be sequentially numbered, in increments of one, beginning with Point 1. **Size/Shape:** Determined by the anchor points. The information fields should be moveable and scalable within the area.
Area11	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's vertical line. Point 3 defines the endpoint of the symbol's horizontal line. **Size/Shape:** Points 1 and 2 determine the length of the vertical line. The length of the horizontal line is determined by plotting point 3 on a plane extending perpendicularly from the midpoint of the vertical line.
Area12	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the end points of the symbol's vertical line. Point 3 defines the tip of the longest arrow. **Size/Shape:** Points 1 and 2 determine the height of the symbol and point 3 determines its length. The spacing between the symbol's arrows will stay proportional to the symbol's vertical line. The length of the short arrows will remain in proportion to the length of the longest arrow.
Area13	**Anchor Points:** This symbol requires at least two anchor points. Points 1 and 2 define the corners of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the straight line. The radius of the semicircle is ½ the length of the straight line.
Area14	**Anchor Points:** This symbol requires three anchor points. The center point defines the center of the symbol. Points 1 and 2 define the radii of circles 1 and 2. **Size/Shape:** As defined by the operator.
Area15	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** The radius will be long enough for the symbol to encompass the UEI(s) or feature(s) being isolated. The opening will be a 30-degree arc of the circle.
Area16	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** Points 1 and 2 will determine a radius that is long enough for the symbol to encompass the feature(s) being occupied. The opening will be a 30-degree arc of the circle.
Area17	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's vertical line. Point 3 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the height of the symbol and point 3 determines its length. The arrow will project perpendicularly from the midpoint of the vertical line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-III. Control measures and planning symbol draw rules - Continued.

TYPE	DRAW RULE
Area18	**Anchor Points:** This symbol requires four anchor points. Point 1 defines the tip of the first arrowhead. Point 2 defines the end of the straight-line portion of the first arrow. Point 3 defines the tip of the second arrowhead. Point 4 defines the end of the second arrow. **Size/Shape:** Points 1 and 2 and points 3 and 4 determine the length of each arrow. Points 2 and 3 shall be connected by a smooth, curved line.
Area19	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the center point of the symbol and point 2 defines the symbol's start point and radius. **Size/Shape:** Points 1 and 2 will determine a radius that is long enough for the symbol to encompass the feature(s) being secured. The opening will be a 30-degree arc of the circle.
Area20	*{Disused}*
Area21	**Anchor Points:** This symbol requires three anchor points. Point 1 defines the vertex of the symbol. Points 2 and 3 define the tips of the arrowheads. **Size/Shape:** Points 1 and 2 and points 1 and 3 determine the length of the arrows. The length and orientation of the arrows can vary independently.
Area22	**Anchor Points:** This symbol requires one anchor point. The center point defines the center of the symbol. **Size/Shape:** Static.
Area23	*{Disused}*
Area24	*{Disused}*
Area25	*{Disused}*
Area26	**Anchor Points:** This symbol requires a minimum of 6 anchor points. Add as many pairs of points as needed to accurately define the areas. The number of points shall always be an even number, with an equal number of points for both polygons. Points 1 through N/2 define the inner safe zone (zone 1). Points N/2 +1 though point N defines the outer zone (zone 2). **Size/Shape:** Determined by the anchor points.
Area27	**Anchor Points**: This symbol requires three anchor points. Point 1 defines the tip of the arrowhead. Point 2 defines the end of the straight-line portion of the symbol. Point 3 defines the diameter and orientation of the 180 degree circular arc. **Size/Shape**: Points 1 and 2 determine the length of the straight-line portion of the symbol. Point 3 defines which side of the line the arc is on and the diameter of the arc.
POINTS	
Point1	**Anchor Points:** This symbol requires one anchor point. The anchor point defines/is the tip of the inverted cone. **Size/Shape:** Static.
Point2	**Anchor Points:** This symbol requires one anchor point. The center point defines/is the center of the symbol. **Size/Shape:** Static.
Point3	*{Disused}*
Point4	**Anchor Points:** This symbol requires one anchor point. The point defines the bottom of the central vertical line in the symbol where the curved and vertical lines meet. **Size/Shape:** Static.
Point5	**Anchor Points:** This symbol requires one anchor point. The point defines the point where all the lines meet. **Size/Shape:** Static.
Point6	**Anchor Points:** This symbol requires one anchor point. The anchor point defines/is the center of the bottom of the symbol as shown in the template and example. **Size/Shape:** Static.
Point7	**Anchor Points:** This symbol requires one anchor point. The anchor point defines the midpoint of the symbol's base. **Size/Shape:** Static.
Point8	*{Disused}*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-III. Control measures and planning symbol draw rules - Continued.

TYPE	DRAW RULE
Point9	*{Disused}*
Point10	*{Disused}*
Point11	*{Disused}*
Point12	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the tips of the arrowheads and point 3 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the symbol's height and point 3 determines its length. The vertical line at the rear of the symbol shall be the same length as the opening and shall be perpendicular to the parallel lines formed with the rear of symbol vertical line and the lines ending with points 1 and 2.
Point13	*{Disused}*
Point14	*{Disused}*
Point15	**Anchor Points:** This symbol requires one anchor point. The anchor point defines "nose" of the symbol. **Size/Shape:** Static.
Point16	**Anchor Points:** This symbol requires one anchor point; the point defines the circle at the base of the tower. **Size/Shape:** The symbol is a high-angle cone.
Point17	**Anchor Points:** This symbol requires one anchor point. This anchor point represents the center of the rectangle and, therefore, the geographic location of that rectangle. **Size/Shape:** The size and shape of this symbol is determined by three additional numeric values; a length (AM1), a width (AM2), and a rotation angle. The length and width should be expressed in the appropriate map distance units. The length is aligned with the axis of rotation. The width is aligned perpendicular to the axis of rotation.
Point18	**Anchor Points:** This symbol requires one anchor point that defines the axis of angular rotation. **Size/Shape:** The size and shape of this symbol is determined by additional numeric values; a search axis azimuth, a start range, a stop range and a stop relative bearing. The stop relative bearing is an equal angle either side of the search axis. The start and stop range should be expressed in the appropriate map distance units. Field T should be positioned in the center of the search area aligned with the search axis.
LINES	
Line1	**Anchor Points:** This symbol requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** The first and last anchor points determine the length of the line. Any end-of line information will typically be posted at the ends of the line as it is displayed on the screen.
Line2	*{Disused}*
Line3	**Anchor Points:** This symbol requires three anchor points. Point 1 defines the vertex of the symbol. Points 2 and 3 define the tips of the arrowheads. **Size/Shape:** The length and orientation of the arrows can vary independently.
Line4	**Anchor Points:** This symbol requires two anchor points. Points 1 and 2 define the corner points of the symbol. **Size/Shape:** The symbol varies only in length.
Line5	*{Disused}*
Line6	*{Disused}*
Line7	*{Disused}*
Line8	**Anchor Points:** This symbol requires a minimum of two anchor points. Up to 298 additional points can be added to extend the line. The first point (Point 1) defines the start point. The last point defines the endpoint. The points are numbered sequentially beginning with Point 1, in increments of one. **Size/Shape:** The anchor points define the size and shape.
Line9	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the tip of the arrowhead and point 2 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the orientation of the symbol, which varies only in length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-III. Control measures and planning symbol draw rules - Continued.

TYPE	DRAW RULE
Line10	**Anchor Points:** This symbol requires two anchor points. Point 1 defines the tip of the arrowhead and point 2 defines the rear of the symbol. Point 3 defines the 90 degree arc. **Size/Shape:** Points 1 and 2 are connected by a 90 degree arc. Point 3 indicates on which side of the line the arc is placed.
Line11	**Anchor Points:** This symbol requires four points. Points 1 and 2 define one side of the gap and points 3 and 4 define the opposite side of the gap. Size/Shape. Determined by the anchor points.
Line12	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol and point 3 defines the location of one side of the symbol. **Size/Shape:** Points 1 and 2 determine the centerline of the symbol and point 3 determines its width.
Line13	*{Disused}*
Line14	**Anchor Points:** This symbol requires two anchor points. Points 1 and 2 define the tips of the arrowheads. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length. The lines of the arrowhead will form an acute angle.
Line15	*{Disused}*
Line16	**Anchor Points:** This symbol requires four points. Points 1 and 2 define one side of the assault crossing site and points 3 and 4 define the opposite side of the assault crossing site. **Size/Shape:** Determined by the anchor points.
Line17	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the first line. Point 3 defines the location of the parallel line. **Size/Shape:** Points 1 and 2 determine the length of the symbol. Point 3 determines its width.
Line18	*{Disused}*
Line19	**Anchor Points:** This symbol requires two anchor points. Points 1 and two define the corners on the front of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length.
Line20	*{Disused}*
Line21	*{Disused}*
Line22	*{Disused}*
Line23	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the symbol's vertical line and point 3 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the symbol's height and point 3 determines its length. The spacing between the symbol's arrows will stay proportional to the symbol's height. The tip of the middle arrowhead will be at the midpoint of the vertical line. The arrows will stay perpendicular to the vertical line, regardless of the rotational orientation of the symbol as a whole.
Line24	**Anchor Points:** This symbol requires three anchor points. Point 1 defines the tip of the arrowhead. Point 2 defines the end of the straight line portion of the symbol. Point 3 defines the diameter and orientation of the 180 degree circular arc. **Size/Shape:** Points 1 and 2 determine the length of the straight line portion of the symbol. Point 3 defines which side of the line the arc is on and the diameter of the arc.
Line25	**Anchor Points:** This symbol requires exactly two anchor points. Point 1 defines the tip of the arrowhead and point 2 defines the rear of the symbol. **Size/Shape:** Points 1 and 2 determine the length of the symbol, which varies only in length.
Line26	**Anchor Points:** This symbol requires four points. Point 1 and Point 2 define the ends of one arrow and Point 3 and Point 4 define the ends of the other arrow. Point 1 and Point 4 define the ends of their respective arrowheads. **Size/Shape:** Points 1 and 2 and Points 3 and 4 determine the length of the arrows. The length and orientation of the arrows can vary independently.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-III. Control measures and planning symbol draw rules - Continued.

TYPE	DRAW RULE
Line27	**Anchor Points:** This symbol requires four points. Point 1 defines the center of the circle. Point 2 defines the radius of the circle. Point 3 defines the curvature of the arc. Point 4 defines the end of the arrow. **Size/Shape:** Points 1 and 2 define the size of the circle, which should be adjusted as needed to contain the unit assigned to the task. Point 3 controls the curvature of the arc. Point 4 defines the end of the arrow.
Line28	*{Disused}*
Line29	**Anchor Points:** This symbol requires three anchor points. Point 1 is the tip of the arrowhead. Points 2 and 3 define the endpoints of the curved line on the back side of the symbol. **Size/Shape:** Points 2 and 3 determine the length of the curved line on the back side of the symbol. The rear of the arrowhead line shall connect to the midpoint of the line between points 2 and 3. The arrowhead line shall be perpendicular to the line formed by points 2 and 3.
Line30	**Anchor Points**: Point 1 defines the tip of the arrowhead. Point 2 defines the end of the symbol. Point 3's distance from Point 2 defines the length of the four angled lines making up the arrowhead and dashed "tail". Angles A are always drawn at 45 degrees. Angle b is always drawn at 90 degrees. **Size/Shape**: The symbol varies only in length
Line31	**Anchor Points:** This graphic requires four anchor points. Point 1 defines the beginning of the straight line. Point 2 defines the end of the straight-line portion of the graphic. Point 3 defines the diameter. Point 4 defines the orientation of the 180 degree circular arc. **Size/Shape**. Points 1 and 2 determine the length of the straight-line portion of the symbol. Point 3 defines the diameter of the arc. Point 4 defines which side of the line the arc is on.
Line32	**Anchor Points:** This graphic requires three anchor points. Point 1 defines the end of the straight-line portion of the graphic. Point 2 defines the center of the two 90 degree circular arcs. Point 3 defines the tip of the arrowhead. **Size/Shape**. Points 1 and 3 determine the length of the symbol.
Line33	**Anchor Points:** This graphic requires three anchor points. Point 1 defines the beginning of the straight line. Point 2 defines the end of the straight line portion of the graphic. Point 3 defines the diameter and orientation of the 180 degree circular arc and the tip of the arrowhead. **Size/Shape:** Points 1 and 2 determine the length of the straight line portion of the symbol. Point 3 defines which side of the line the arc is on and the diameter of the arc.
OTHER DRAW RULES	
Corridor1	**Anchor Points:** This symbol may contain multiple segments. Each segment requires 2 anchor points. Point numbers that define the trace of the segment are sequential beginning with point 1, in increments of 1, up to a max of 99 points. Each anchor point defines the endpoint of a segment's centerline. The anchor points are Air Control Points (ACP), Communications Checkpoints (CCP) or both. **Size/Shape:** Points 1 and 2 determine the length of a segment. The information field inside each segment should be moveable and scalable within each segment. The information box outside the symbol should be placed between points 1 and 2 in such a way it does not obscure the symbol.
Axis1	**Anchor Points:** The symbol requires N anchor points, where N is between 3 and 50. Point 1 defines the tip of the arrowhead. Point N-1 defines the rear of the symbol. Point N defines the back of the arrowhead. Anchor points are numbered sequentially beginning with point number one, in increments of one. **Size/Shape:** Points 1 through N-1 and 2 determine the symbol's centerline and Point N determines the width.
Axis2	{*Disused*}
Polyline1	**Anchor Points:** This symbol requires three anchor points. Points 1 and 2 define the endpoints of the infiltration lane and point 3 defines the width on one side of the lane. **Size/Shape:** Points 1 and 2 determine the centerline of the symbol and point 3 determines the width of the infiltration lane. The rest of the symbol stays proportional to the length of the centerline.


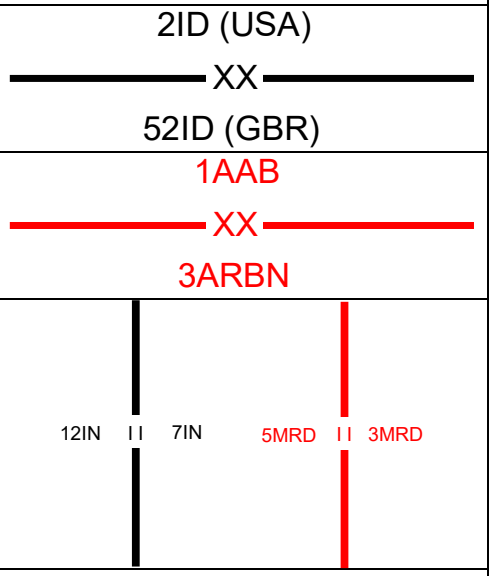
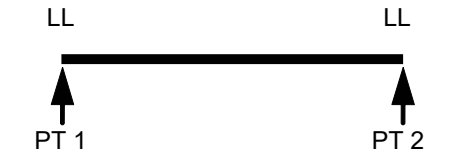
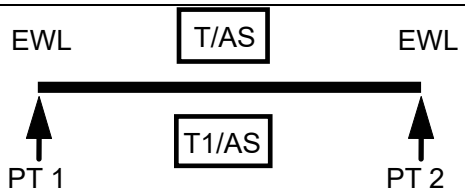

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-III. Control measures and planning symbol draw rules - Continued.

TYPE	DRAW RULE
Ellipse1	**Anchor Points:** This symbol requires one anchor point. This anchor point represents the center of an ellipse and, therefore, the geographic location of that ellipse. **Size/Shape:** The size and shape of this symbol is determined by three additional numeric values; A major axis radius, a minor axis radius, and a rotation angle. The radii should be expressed in the appropriate map distance units.
Rectangular1	**Anchor Points:** This symbol requires two anchor points and a width, defined in meters, to define the boundary of the area. Points 1 and 2 will be located in the center of two opposing sides of the rectangle. **Size/Shape:** Size is determined by the anchor points. The anchor points determine the length of the rectangle. The width, defined in meters, will determine the width of the rectangle. Shape: Rectangle. The information fields should be moveable and scalable.
Rectangular2	**Anchor Points:** This symbol requires one (1) anchor point to define the center of the area. **Size/Shape:** Size is determined by the anchor point, the target length (in meters) and target width (in meters). A rectangular target is wider and longer than 200 meters. The information fields should be moveable and saleable within the area. Shape: Rectangle.
Circular1	**Anchor Points:** This symbol requires one anchor point and a radius. Point 1 defines the center point of the symbol. **Size/Shape:** Size: The radius defines the size. Shape: Circle. The information fields should be scalable within the circle.
Circular2	**Anchor Points:** This symbol requires one anchor point that defines an object at a dynamic grid location. This coordinate, which pinpoints the current physical location of a specific unit, weapon, or acquisition system, may change with the movement of the object. The symbol for that object is located at the anchor point. **Size/Shape:** The size is determined by the distance in meters from the object at the center of the range fan. The shapes are concentric circles. A minimum of one and a maximum of three concentric circles can be used.
Arc1	**Anchor Points:** This graphic requires one anchor point that defines an object at a dynamic grid location. This coordinate, which pinpoints the current physical location of a specific unit, weapon, or sensor system, may change with the movement of the object. The symbol for that object is located at the anchor point. **Size/Shape:** Determined by the anchor point, azimuths measured from true north, and the distance (range) in meters. The Left Sector Azimuth is the angle measured from true north to the left sector limit/edge of the Sector Range Fan. The Right Sector Azimuth is the angle measured from true north to the right sector limit/edge of the Sector Range Fan. Multiple distances (ranges) and/or left and right sector limits/edges of the sector, as well as altitude, may be added as required to define the sector. All azimuths are in degrees. All distances (ranges) are in meters. All altitudes are in feet.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-IV. Command and control lines.

DESCRIPTION	TEMPLATE	EXAMPLE Note: The symbols that have been colored gray are used to help explain how the control measure or planning symbol is used, but they are not a part of the control measure or planning symbol.
Command and Control Lines Type: Entity Symbol Set: 25 Value: **11**0000	Reserved for hierarchical purposes.	N/A
Boundary Type: Entity Type Entity Type: Command and Control Lines Symbol Set: 25 Value:11**01**00 Draw Rules: Line1 – Dynamic		
Light Line Type: Entity Type Entity Type: Command and Control Lines Symbol Set: 25 Value: 11**02**00 Draw Rules: Line1 - Dynamic	 Designated line forward of which vehicles are required to use black-out lights at night.	
Engineer Work Line Type: Entity Type Entity Type: Command and Control Lines Symbol Set: 25 Value: 11**03**00 Draw Rules: Line1 - Dynamic	 A coordinated boundary used to compartmentalize an area of operations to indicate where specific engineer units have primary responsibility (FM 3-34).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-IV. Command and control lines - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE Note: The symbols that have been colored gray are used to help explain how the control measure or planning symbol is used, but they are not a part of the control measure or planning symbol.
Generic Type: Entity Type Entity Type: Command and Control Lines Symbol Set: 25 Value: 11**04**00 Draw Rules: Line1 - Dynamic		

L.5.6 Points. In a number of tables (sustainment, CBRN decontamination and special C2) that follow there are single point control measure and planning symbols that follow a specific format as shown in figure L-13 below. Supply points follow this same format with a modification to the symbol. Supply points use the same icon used for supply units. The supply icon is placed toward the bottom of the box as shown in figure L-13 below. This format is only for use with these types of points, as there are other points (contact, coordination, decision, targets, etc.) as displayed throughout this section on land control measures and planning symbols that are formatted differently. In building points, the type of point is abbreviated and positioned inside the top part of the point symbol, displayed as a grey box in figure L-13 below. For supply symbols this may be a graphic depiction. In addition, below the abbreviation of the point name, the designation of the unit servicing that point may be included in field T1. To differentiate points, the point is numbered, lettered, or a combination. The number, letter or combination is placed on the outside of the symbol on the right side at the top in field T. On the outside of the point on the left side at the top and middle, date-time groups can be associated with the point. On the outside of the point at the top, additional information can be provided in field H. Text will not be written on an angle for single point symbols. For dynamic displays, if the system has the capability to rotate the map display in the direction of movement, a single point symbol may optionally be rotated on its anchor point to retain its upright orientation for the user(s) of the display. For a single point symbol, unless otherwise stated in the symbol's template, the symbol's anchor shall be the center of the symbol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

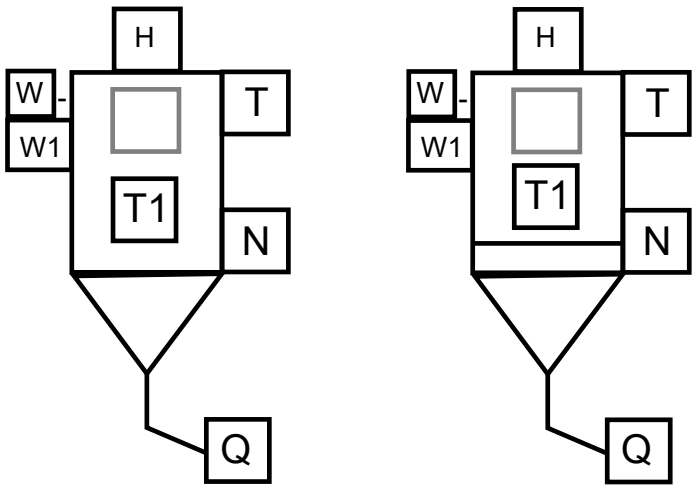


FIGURE L-13. Template for point (left) and supply point (right) control measures and planning symbols.

L.5.7 Lines. In the tables that follow there are line control measures and planning symbols that follow a specific format as shown in figure L-14 below. Most lines are also named as a phase line for easy reference for use in orders and during transmissions. A phase line will be marked as PL with the name in the T field. Other lines that have a specific purpose and are also named as phase lines should have the primary purpose in the T1 field (such as restrictive fire line "RFL") labeled on top of the line at both ends of the line inside the lateral boundaries or as often as necessary for clarity. The T field is used for fire support coordination measures to show the designation of the controlling headquarters. The use of phase lines to mark line control measures and planning symbols is not mandatory. The gray box in figure L-14 is a placeholder for a specific symbol which is determined based on what control measures or planning symbol is being displayed.

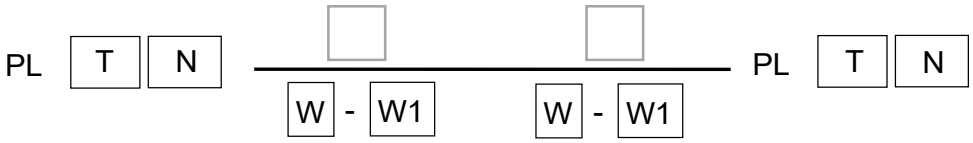


FIGURE L-14. Template for line control measures and planning symbols.

L.5.8 Areas. In the tables that follow there are area control measures and planning symbols that follow a specific format as shown in figure L-15. Areas will normally be marked with the abbreviation for the type of area in the A field followed by a name in the T field. This labeling should be in the center of the area unless the area is too small, or the labeling would interfere with the locating of units. Not all fields are required for each area; some areas may use only one field, while other will use several. The gray box in figure L-15 is a placeholder for a specific symbol which is determined based on what control measures or planning symbol is being displayed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

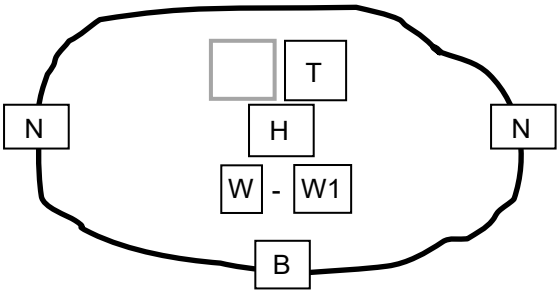



FIGURE L-15. Template for area control measures and planning symbols.





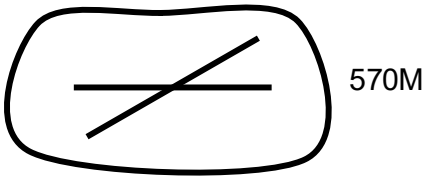

L.5.9 Area of operations. An area of operations is an operational area defined by a joint commander for land or maritime forces to conduct military activities. Normally, an area of operations does not encompass the entire joint operations area of the joint commander but is sufficient in size for the joint force component commander to accomplish assigned missions and protect forces. Operational area is an overarching term encompassing more descriptive terms for geographic areas in which military operations are conducted. Operational areas include, but are not limited to, such descriptors as area of responsibility, theatre of war, theatre of operations, joint operations area, amphibious objective area, joint special operations area, and area of operations.

TABLE L-V. Command and control areas.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Command and Control Areas Type: Entity Symbol Set: 25 Value: **12**0000	Reserved for hierarchical purposes.	N/A
Area of Operations Type: Entity Type Entity: Command and Control Areas Symbol Set: 25 Value: 12**01**00 Draw Rules: Area1 - Dynamic		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-V. Command and control areas - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Named Area of Interest Type: Entity Type Entity: Command and Control Areas Symbol Set: 25 Value: 12**02**00 Draw Rules: Area1 - Dynamic		
	A geographical area where information is gathered to satisfy specific intelligence requirements. **Anchor points are to be connected with straight lines.**	
Target Area of Interest Type: Entity Type Entity: Command and Control Areas Symbol Set: 25 Value: 12**03**00 Draw Rules: Area1 - Dynamic		
	The geographical area where high-value targets can be acquired and engaged by friendly forces. **Anchor points are to be connected with straight lines.**	
Airfield Zone Type: Entity Type Entity: Command and Control Areas Symbol Set: 25 Value: 12**04**00 Draw Rules: Area1 - Dynamic		
	The Field “H” for this symbol includes type of airfield, length of runway and other pertinent information.	
Base Camp Type: Entity Type Entity: Command and Control Areas Symbol Set: 25 Value: 12**05**00 Draw Rules: Area1 - Dynamic		
	An evolving military facility that supports military operations of a deployed unit and provides the necessary support and services for sustained operations (ATP 3-37.10 / MCRP 3-17.7N).	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-V. Command and control areas - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Guerrilla Base Type: Entity Type Entity: Command and Control Areas Symbol Set: 25 Value: 12**06**00 Draw Rules: Area1 - Dynamic		
	A temporary site where guerrilla installations, headquarters, and units are located (ATP 3-05.1).	
Generic Type: Entity Type Entity: Command and Control Areas Symbol Set: 25 Value: 12**07**00 Draw Rules: Area1 - Dynamic		








L.5.10 Command and control symbols. These symbols are used in the exercise of authority and direction by a properly designated commander over assigned and attached forces in the accomplishment of the mission.

TABLE L-VI. Command and control points.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Command and Control Points Type: Entity Symbol Set: 25 Value: **13**0000	Reserved for hierarchical purposes.	N/A







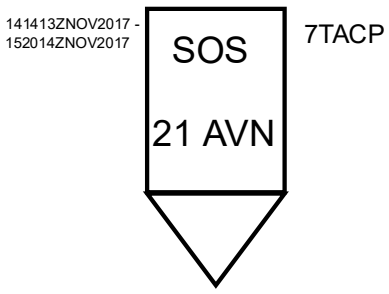
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VI. Command and control points - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Action Point (General) Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**01**00 Draw Rules: Point1 – Static		Examples follow
Amnesty Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**02**00 Draw Rules: Point1 – Static		
Checkpoint Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**03**00 Draw Rules: Point1 – Static		
	Predetermined point on the surface of the earth used as a means of controlling movement, a registration target for fire adjustment, or reference for location.	
Center of Main Effort Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**04**00 Draw Rules: Point1– Static		
	The symbol can be rotated so that the lines at the top of the symbol are oriented toward the point of main effort.	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VI. Command and control points - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Contact Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**05**00 Draw Rules: Point2 – Static		
	In land warfare, a point on the terrain, easily identifiable, where two or more units are required to make contact.	
Coordinating Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**06**00 Draw Rules: Point2 – Static		
	Designated point at which, in all types of combat, adjacent units/formations must make contact for purposes of control and coordination.	
Decision Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**07**00 Draw Rules: Point2 – Static		
	A point in space and time, identified during the planning process, where it is anticipated that the commander must make a decision concerning a specific course of action.	
Distress Call Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**08**00 Draw Rules: Point1– Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VI. Command and control points - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Entry Control Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**09**00 Draw Rules: Point1 – Static		
Fly-To-Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 13**10**00	Reserved for hierarchical purposes.	N/A
Fly-To-Point (Sonobuoy) Type: Entity Subtype Entity/Entity Type: Command and Control Points and Fly-To-Point Symbol Set: 25 Value: 1310**01** Draw Rules: Point1 – Static		
Fly-To-Point (Weapon) Type: Entity Subtype Entity/Entity Type: Command and Control Points and Fly-To-Point Symbol Set: 25 Value: 1310**02** Draw Rules: Point1 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VI. Command and control points - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Fly-To-Point (Normal) Type: Entity Subtype Entity/Entity Type: Command and Control Points and Fly-To-Point Symbol Set: 25 Value: 131**03** Draw Rules: Point1 – Static		
Linkup Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131**1**00 Draw Rules: Point1 – Static		
	A point where two infiltrating elements in the same or different infiltration lanes are scheduled to meet to consolidate before proceeding with their missions.	
Passage Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131**2**00 Draw Rules: Point1 – Static		
	A specifically designated place where the passing units will pass through the stationary unit.	
Point of Interest Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131**3**00 Draw Rules: Point1 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VI. Command and control points - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Point of Interest – Launch Event Type: Entity Subtype Entity/Entity Type: Command and Control Points and Point of Interest Symbol Set: 25 Value: 131301 Draw Rules: Point1 – Static		
Rally Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131400 Draw Rules: Point1 – Static		
	An easily identifiable point on the ground at which units can reassemble and reorganize if they become dispersed.	
Release Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131500 Draw Rules: Point1 – Static		
	In road movements, a well-defined point on a route at which the elements composing a column return under the authority of their respective commanders, each one of these elements continuing its movement towards its own appropriate destination.	








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VI. Command and control points - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Start Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131**6**00 Draw Rules: Point1– Static		
	A well-defined point on a route at which a movement of vehicles begins to be under the control of the commander of this movement. It is at this point that the column is formed by the successive passing, at an appointed time, of each of the elements composing the column. In addition to the principal start point of a column there may be secondary start points for its different elements.	
Special Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131**7**00 Draw Rules: Point2 – Static		
Waypoint Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131**8**00 Draw Rules: Point2 – Static		
	Designated point or series of points loaded and stored in a global positioning system or other electronic navigational aid system to facilitate movement.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VI. Command and control points - Continued.

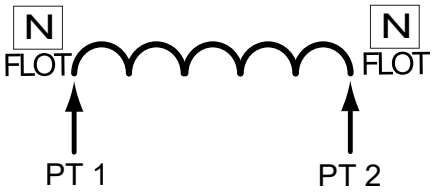
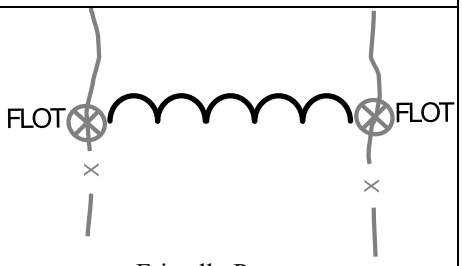
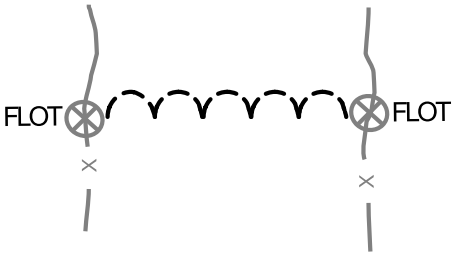

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Airfield Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 131**9**00 Draw Rules: Point2 – Static		
Target Handover Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 132**0**00 Draw Rules: Point2 – Static		
	Depicts a direct fire Target Handover mission is in progress, facilitates orientation of direct fires in order to maximize combat effectiveness and minimize fratricide	
Key Terrain Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 132**1**00 Draw Rules: Point2– Static		
	Key Terrain is any locality, or area, the seizure or retention of which affords a marked advantage to either combatant (JP 2-01.3). The symbol uses medium purple with an RGB value of (128, 0, 128).	
Control Point Type: Entity Type Entity: Command and Control Points Symbol Set: 25 Value: 132**2**00 Draw Rules: Point1 – Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.11 Maneuver control measures and planning symbols.

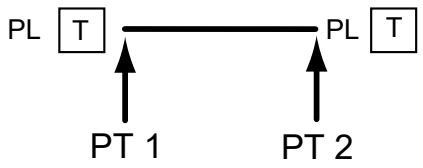


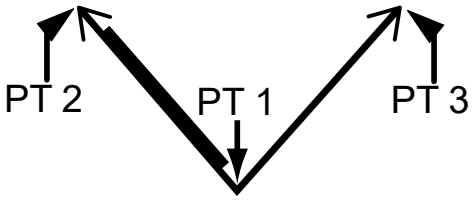

L.5.11.1 Maneuver is the employment of forces on the battlefield through movement in combination with fire, or fire potential, to achieve a position of advantage in respect to the enemy in order to accomplish the mission.

TABLE L-VII. Maneuver control measures and planning symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Maneuver Lines Type: Entity Symbol Set: 25 Value: **14**0000	Reserved for hierarchical purposes.	N/A
Forward Line of Own Troops (FLOT) Type: Entity Type Entity: Maneuver Lines Symbol Set: 25 Value: 14**01**00 Draw Rules: Line1 - Dynamic	 A line which indicates the most forward positions of forces in any kind of military operation at a specific time. The open side of the arc reflects the reported unit.	 Friendly Present  Friendly Planned
Line of Contact A general trace delineating the locations where two opposing forces are engaged. The line of contact symbol is created when both the friendly and enemy forward line of troops symbols are displayed. **Notes:** - The open side of the arc reflects the reported unit. - When two lines oppose each other replace FLOT with LC.		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Phase Line Type: Entity Type Entity: Maneuver Lines Symbol Set: 25 Value: 140300 Draw Rules: Line1- Dynamic		
	A line utilized for control and coordination of military operations, usually a terrain feature extending across the zone of action.	
Forward Edge of the Battle Area Type: Entity Type Entity: Maneuver Lines Symbol Set: 25 Value: 140400 Draw Rules: Line1- Dynamic		
	The foremost limits of a series of areas in which ground combat units are deployed, excluding the areas in which the covering or screening forces are operating, designated to coordinate fire support, the positioning of forces or the maneuver of units.	
Field of Fire Type: Entity Type Entity: Maneuver Lines Symbol Set: 25 Value: 140500 Draw Rules: Line3 - Dynamic	Reserved for hierarchical purposes	N/A
Final Protective Fire (Left) Type: Entity Subtype Entity/Entity Type: Maneuver Lines/ Principal Direction of Fire Symbol Set: 25 Value: 140501 Draw Rules: Line3 - Dynamic		
	Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The top of the tactical symbol amplifier may touch point 1. The length of the 'blade' shall be 80% of the length of point 1 and point 2, centered and connected to the inside of the line.	


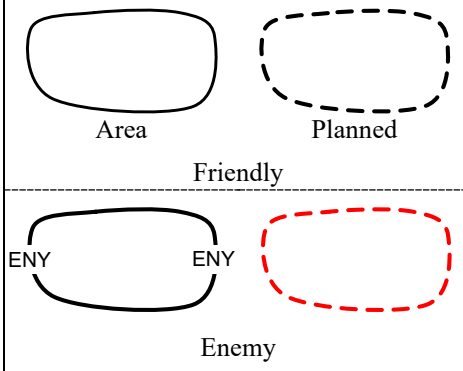

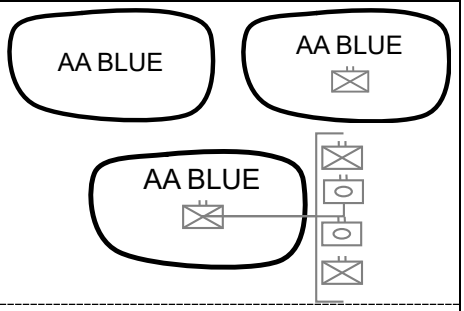


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Final Protective Fire (Right) Type: Entity Subtype Entity/Entity Type: Maneuver Lines/ Principal Direction of Fire Symbol Set: 25 Value: 140**502** Draw Rules: Line3 - Dynamic		
	Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The top of the tactical symbol amplifier may touch point 1.	
Principal Direction of Fire Type: Entity Subtype Entity/Entity Type: Maneuver Lines/ Principal Direction of Fire Symbol Set: 25 Value: 140**503** Draw Rules: Line3 - Dynamic		
	Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The top of the tactical symbol amplifier may touch point 1. The length of the 'blade' shall be 80% of the length of point 1 and point 3, centered and connected to the inside of the line.	
Secondary Direction of Fire Type: Entity Subtype Entity/Entity Type: Maneuver Lines/ Principal Direction of Fire Symbol Set: 25 Value: 140**504** Draw Rules: Line3 - Dynamic		
	Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The top of the tactical symbol amplifier may touch point 1.	
Areas		
Maneuver Areas Type: Entity Symbol Set: 25 Value: **15**0000	Reserved for hierarchical purposes	N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Area Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**01**00 Draw Rules: Area1 - Dynamic		
Assembly Area (AA) Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**02**00 Draw Rules: Area1 - Dynamic	 An area in which a command is assembled preparatory to further action.	
Action Area Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 15**05**00	Reserved for hierarchical purposes.	N/A
Joint Tactical Action Area (JTAA) Type: Entity Subtype Entity/Entity Type: Maneuver Lines/Action Area Symbol Set: 25 Value: 15050**1** Draw Rules: Area1 - Dynamic		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Submarine Action Area (SAA) Type: Entity Subtype Entity/Entity Type: Maneuver Lines/Action Area Symbol Set: 25 Value: 150**502** Draw Rules: Area1 - Dynamic		
Submarine-Generated Action Area (SGAA) Type: Entity Subtype Entity/Entity Type: Maneuver Lines/Action Area Symbol Set: 25 Value: 150**503** Draw Rules: Area1 - Dynamic		
Drop Zone (DZ) Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**06**00 Draw Rules: Area1 - Dynamic	 A specified area upon which airborne troops, equipment, or supplies are airdropped.	
Extraction Zone (EZ) Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**07**00 Draw Rules: Area1 - Dynamic	 A specified drop zone used for the delivery of supplies and/or equipment by means of an extraction technique from an aircraft flying very close to the ground.	










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Landing Zone (LZ) Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**08**00 Draw Rules: Area1 - Dynamic		
A specified zone used for the landing of aircraft on land, water or deck.		
Pickup Zone (PZ) Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**09**00 Draw Rules: Area1 - Dynamic		
A geographic area used to pick up troops or equipment by helicopter.		
Fortified Area Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**10**00 Draw Rules: Area1 - Dynamic		
Limited Access Area Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**11**00 Draw Rules: Area1 - Dynamic		


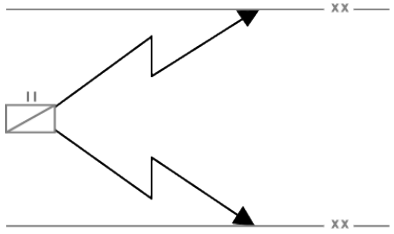




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Encirclement The loss of freedom of maneuver resulting from enemy control of all ground routes of evacuation and reinforcement. Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**18**00 Draw Rules: Area1 - Dynamic		 Friendly  Enemy
	Although unit symbols are not part of a control measure or a planning symbol area, numerous unit symbols can be included in the area for presentation.	
Penetration Box Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**19**00 Draw Rules: Area1 - Dynamic		
Attack By Fire Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**20**00 Draw Rules: Area7 - Dynamic		
	Orientation is determined by the anchor points. The back side of the symbol encompasses the firing position, while the arrowhead typically points at the target.	
Support by Fire Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**21**00 Draw Rules: Area8 - Dynamic		
	Orientation is determined by the anchor points. The back side of the symbol encompasses the firing position, while the arrowheads typically indicate the left and right limits of coverage that the firing position is meant to support.	


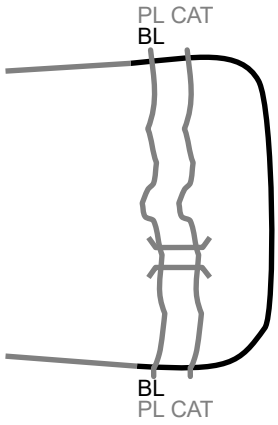
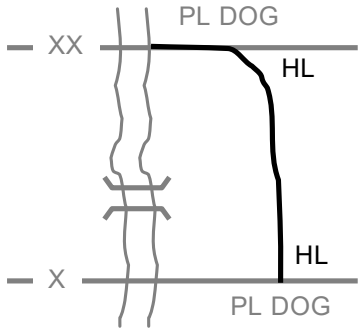

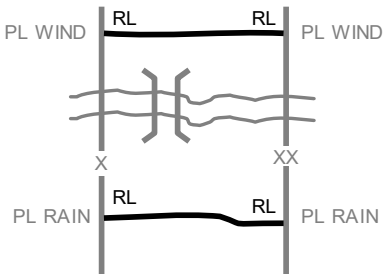
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Search Area/ Reconnaissance Area Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**22**00 Draw Rules: Area21 - Dynamic		
	Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The tactical symbol is centered over point 1.	
Area Defense Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**26**00 Draw Rules: Area15 - Dynamic		
Airhead Line Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**13**00 Draw Rules: Area1 - Dynamic		
	A line denoting the limits of the objective area for an airborne assault. Airhead: A designated area in a hostile or threatened territory which, when seized and held, ensures the continuous air landing of troops and materiel and provides the maneuver space necessary for projected operations. Normally it is the area seized in the assault phase of an airborne operation.	





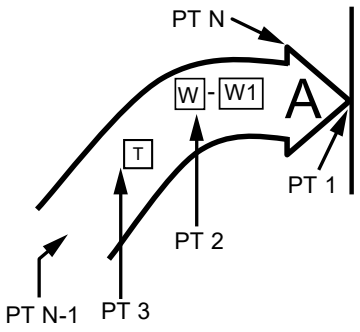
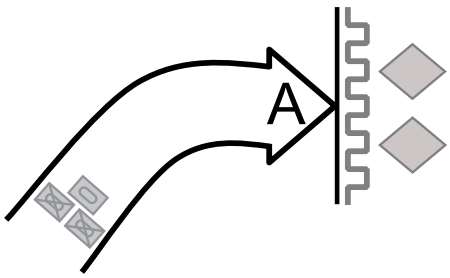
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Lines		
Bridgehead Line (BL) The planned, temporary limit of the objective area in the development of the bridgehead. Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**14**00 Draw Rules: Line1- Dynamic		
Holding Line (HL) Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**15**00 Draw Rules: Line1- Dynamic	 In retrograde river crossing operations, the outer limit of the area established between the enemy and the water obstacle to preclude direct and observed indirect fires into the crossings.	
Release Line Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**16**00 Draw Rules: Line1- Dynamic	 Phase line used in river crossing operations that delineates a change in the headquarters controlling movement.	


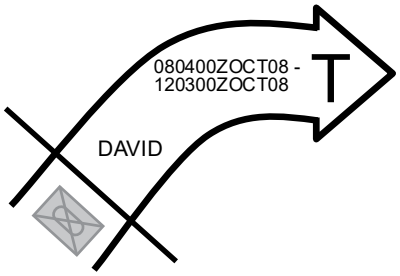
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Ambush Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 141700 Draw Rules: Line29 - Dynamic		
A surprise attack by fire from concealed positions on a moving or temporarily halted enemy. Orientation is determined by the anchor points. The back side of the symbol encompasses the ambush position, while the arrowhead typically points at the target.		
Handover Line Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 141800 Draw Rules: Line1- Dynamic		
Battle Handover Line Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 141900 Draw Rules: Line1- Dynamic		
Frontal Attack Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 152700 Draw Rules: Axis1 - Dynamic		
The length of the “straight” line shall be centered and at least twice the width of the base of the arrow.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.





TABLE L-VII. Maneuver control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Turning Movement Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**2**900 Draw Rules: Axis1 - Dynamic		
The length of the "straight" line shall be centered and at least twice the width of the base of the arrow.		

L.5.12 Defensive maneuver. Defensive operations that defeat an enemy attack, buy time, economize forces, or develop conditions favorable for offensive operations.



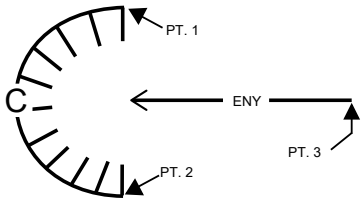




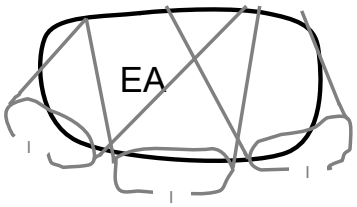
L.5.12.1 Areas.

TABLE L-VIII. Defensive maneuver symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Battle Position Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**1**200 Draw Rules: Area1 - Dynamic		
A defensive location oriented on a likely enemy avenue of approach. **Orientation:** The side opposite Field B (Echelon) faces toward the hostile force.		
Battle Position Prepared (P) but not Occupied Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Battle Position Symbol Set: 25 Value: 1512**02** Draw Rules: Area1 - Dynamic		
The side opposite Field B (Echelon) faces toward the hostile force.		

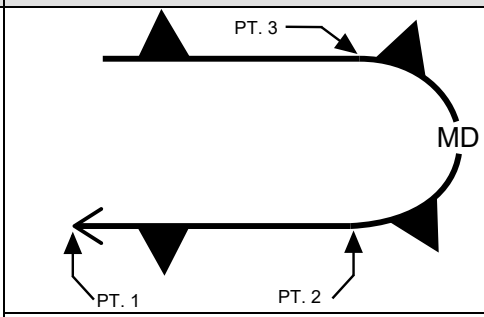
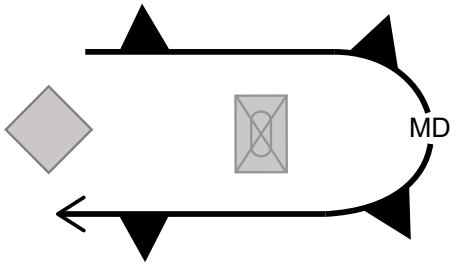
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VIII. Defensive maneuver symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Strong Point Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Battle Position Symbol Set: 25 Value: 151**203** Draw Rules: Area1 - Dynamic		
	A key point in a defensive position usually strongly fortified and heavily armed with automatic weapons, around which other positions are grouped for its protection. See ADP 3-90 for more information. The default tic length should be the same as the text height of the echelon field (B). Spacing between the tics should also be the height of B. Users should be provided with a facility to allow them to manually alter the height of B, which in turn should affect the tic length and spacing accordingly.	
Contain Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Battle Position Symbol Set: 25 Value: 151**204** Draw Rules: Area5 - Dynamic		
	The opening typically faces enemy forces.	
Retain Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Battle Position Symbol Set: 25 Value: 151**205** Draw Rules: Area6 - Dynamic		
	The opening will be on the friendly side of the symbol.	
Engagement Area (EA) Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**13**00 Draw Rules: Area1 - Dynamic		
	An area where the commander intends to contain and destroy an enemy force with the massed effects of all available weapons and supporting systems.	



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-VIII. Defensive maneuver symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Mobile Defense Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**28**00 Draw Rules: Area27 - Dynamic	 The arrow points in the direction of the action (enemy). The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is represented inside the arc. The 180 degree circular arc is always perpendicular to the line.	





L.5.12.2 Observation post. A position from which military observations are made, or fire directed and adjusted, and which possesses appropriate communications, may be airborne.

TABLE L-IX. Observation post symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Maneuver Points Type: Entity Symbol Set: 25 Value: **16**0000	Reserved for hierarchical purposes.	N/A
Observation Post/ Outpost (Unspecified) Type: Entity Type Entity: Maneuver Points Symbol Set: 25 Value: 16**01**00 Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-IX. Observation post symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Observation Post/ Outpost (Specified) Type: Entity Type Entity: Maneuver Points Symbol Set: 25 Value: 16**02**00	N/A Templates follow.	N/A Examples follow.
Reconnaissance Outpost Type: Entity Subtype Entity/Entity Type: Maneuver Points/Observation Post/Outpost (specified) Symbol Set: 25 Value: 1602**01** Draw Rules: Point2 – Static		
Forward Observer Spotter Outpost/ Position Type: Entity Subtype Entity/Entity Type: Maneuver Points/Observation Post/Outpost (specified) Symbol Set: 25 Value: 1602**02** Draw Rules: Point2 – Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-IX. Observation post symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
CBRN Observation Outpost Type: Entity Subtype Entity/Entity Type: Maneuver Points/Observation Post/Outpost (specified) Symbol Set: 25 Value: 160**03** Draw Rules: Point2– Static		
Sensor Outpost/Listening Post Type: Entity Subtype Entity/Entity Type: Maneuver Points/Observation Post/Outpost (specified) Symbol Set: 25 Value: 160**04** Draw Rules: Point2 – Static		
Combat Outpost Type: Entity Subtype Entity/Entity Type: Maneuver Points/Observation Post/Outpost (specified) Symbol Set: 25 Value: 160**05** Draw Rules: Point2 – Static		

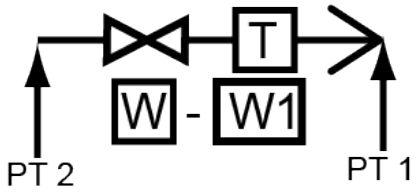

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-IX. Observation post symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Target Reference Point Type: Entity Type Entity: Maneuver Points Symbol Set: 25 Value: 16**03**00		
Draw Rules: Point2 – Static	"A predetermined point of reference, normally a permanent structure or terrain feature that can be used when describing a target location. Also called TRP." (JP 3-09.3)	

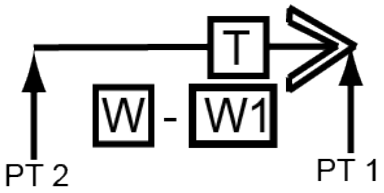




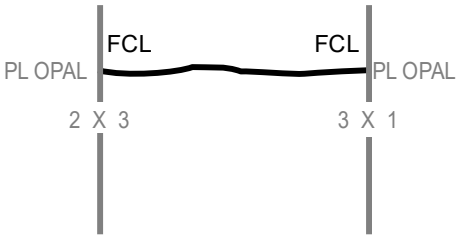


L.5.13 Offensive maneuver. Offensive operations aim at destroying or defeating an enemy.

TABLE L-X. Offensive maneuver symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Direction of attack A specific direction or route that the main attack or center of mass of the unit will follow.		
Direction of Attack Type: Entity Type Entity/Entity Subtype: Maneuver Lines Symbol Set: 25 Value: 14**06**00	N/A	N/A
Airborne/Aviation Type: Entity Type Entity/Entity Subtype: Maneuver Lines/Direction of Attack Symbol Set: 25 Value: 1406**01** Draw Rules: Line1 - Dynamic		



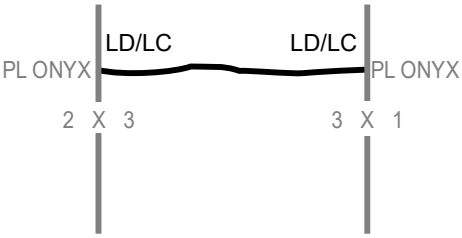

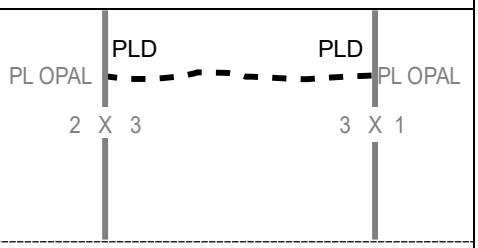
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-X. Offensive maneuver symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Direction of Main Attack Type: Entity Type Entity/Entity Subtype: Maneuver Lines/Direction of Attack Symbol Set: 25 Value: 1406**02** Draw Rules: Line1 - Dynamic		
Direction of Supporting Attack Type: Entity Type Entity/Entity Subtype: Maneuver Lines/Direction of Attack Symbol Set: 25 Value: 1406**03** Draw Rules: Line1 - Dynamic		 Direction of Supporting Attack  Planned  Enemy Templated or Suspected
Final Coordination Line Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**07**00 Draw Rules: Line1 - Dynamic		
	A line close to the enemy position used to coordinate the lifting or shifting of supporting fires with the final deployment of maneuver elements.	
Infiltration Lane Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**08**00 Draw Rules: Polyline1 - Dynamic		
	A control measure that coordinates forward and lateral movement of infiltrating units and fixes fire planning responsibilities. Orientation is determined by points 1 and 2.	


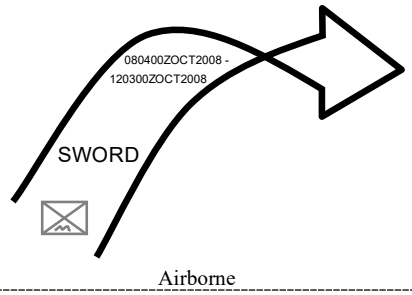
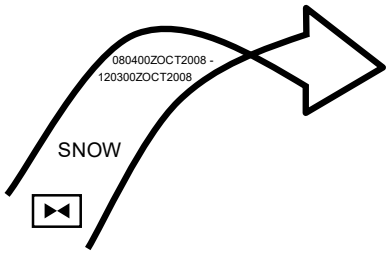
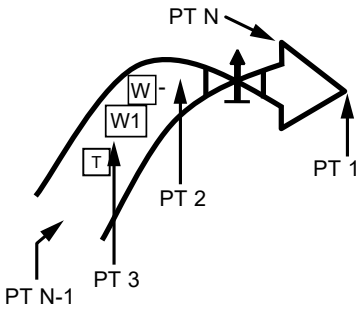
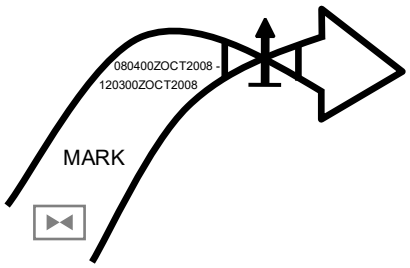
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-X. Offensive maneuver symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Limit of Advance Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**09**00 Draw Rules: Line1 - Dynamic		
An easily recognized terrain feature beyond which attacking elements will not advance.		
Line of Departure Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**10**00 Draw Rules: Line1 - Dynamic		
In land warfare, a line designated to coordinate the departure of attack elements. In amphibious warfare, a suitably marked offshore coordinating line to assist assault craft to land on designated beaches at scheduled times.		
Line of Departure / Line of Contact Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**11**00 Draw Rules: Line1 - Dynamic		
The designation of forward friendly positions as the line of departure when opposing forces are in contact.		
Probable Line of Deployment Type: Entity Type Entity Type: Maneuver Lines Symbol Set: 25 Value: 14**12**00 Draw Rules: Line1 - Dynamic		
A line selected on the ground, usually the last covered and concealed position prior to the objective and forward of the line of departure, where attacking units deploy prior to beginning an assault; it is generally used under conditions of limited visibility. **Note**: The dashed lines in this symbol shall be displayed in present and anticipated status.		




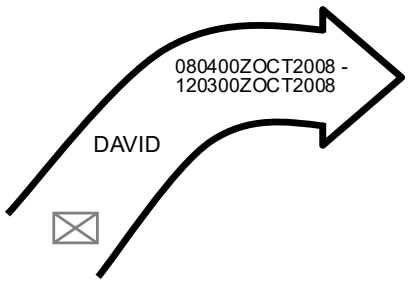
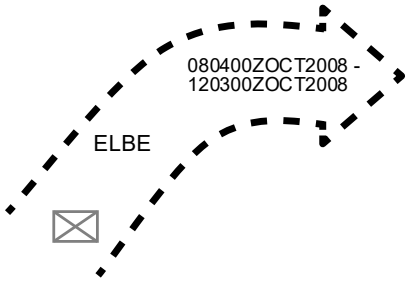
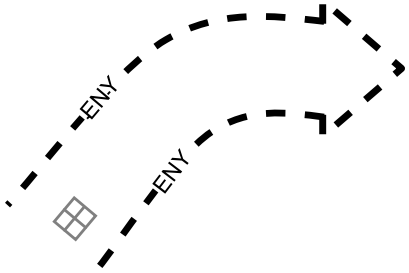
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-X. Offensive maneuver symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Areas		
Axis of advance A line of advance assigned for purposes of control; often a road or a group of roads, or a designated series of locations, extending in the direction of the enemy.		
Axis of Advance Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**14**00	Reserved for hierarchical purposes.	N/A
Airborne/ Aviation Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Axis of Advance Symbol Set: 25 Value: 1514**01** Draw Rules: Axis1 - Dynamic **Orientation**: The arrowhead typically points toward enemy forces.	 The crossover point on the symbol shall occur between Points 1 and 2.	 Airborne  Aviation
Attack Helicopter Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Axis of Advance Symbol Set: 25 Value: 1514**02** Draw Rules: Axis1 - Dynamic	 The crossover point on the symbol shall occur between Points 1 and 2. **Orientation:** The arrowhead typically points toward enemy forces.	









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-X. Offensive maneuver symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Main Attack Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Axis of Advance Symbol Set: 25 Value: 151**403** Draw Rules: Axis1 - Dynamic		
The principal attack or effort into which the commander throws the full weight of the offensive power at his disposal. **Orientation:** The arrowhead typically points toward enemy forces.		
Supporting Attack Type: Entity Subtype Entity/Entity Type: Maneuver Areas/Axis of Advance Symbol Set: 25 Value: 151**404** Draw Rules: Axis1 - Dynamic		 Supporting Attack
An offensive operation carried out in conjunction with a main attack and designed to achieve one or more of the following: a. deceive the enemy b. destroy or pin down enemy forces which could interfere with the main attack c. control ground whose occupation by the enemy will hinder the main attack; or d. force the enemy to commit reserves prematurely or in an indecisive area. The arrowhead typically points toward enemy forces.		 Planned
		 Enemy Templated or Suspected

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-X. Offensive maneuver symbols - Continued.

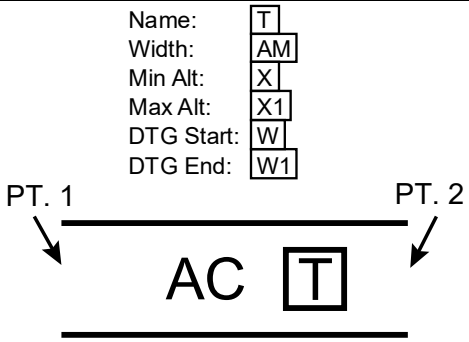
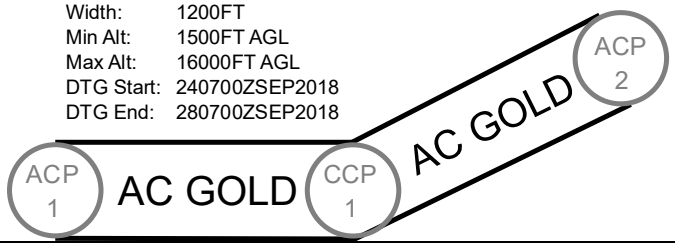
DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Assault Position Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**15**00 Draw Rules: Area1 - Dynamic		
That position between the line of departure and the objective in an attack from which forces assault the objective. Ideally, it is the last covered and concealed position before reaching the objective.		
Attack Position Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**16**00 Draw Rules: Area1 - Dynamic	 	 
The last position occupied by the assault echelon before crossing the start line/line of departure.		
Objective Area Type: Entity Type Entity: Maneuver Areas Symbol Set: 25 Value: 15**17**00 Draw Rules: Area1 - Dynamic		
A defined geographical area within which is located an objective to be captured or reached by the military forces. This area is defined by competent authority for purposes of command and control.		
Points		
Point of Departure Type: Entity Type Entity: Maneuver Points Symbol Set: 25 Value: 16**04**00 Draw Rules: Point1 – Static		
A specific place where a unit will cross the line of departure.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.14 Airspace coordinating measures.





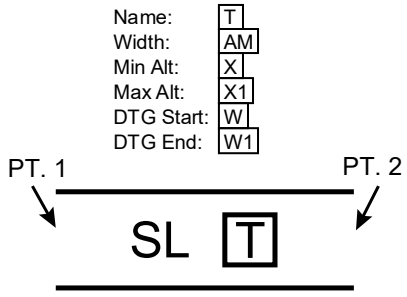
L.5.14.1 Airspace coordinating measures. Measures employed to facilitate the efficient use of airspace to accomplish missions and simultaneously provide safeguards for friendly forces. Also called ACMs. (See JP 3-52 for more reference)

TABLE L-XI. Airspace coordinating measures.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Corridors (Areas)		
Airspace Control (Corridors) Areas Type: Entity Symbol Set: 25 Value: **17**0000	N/A	N/A
Air Corridor Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**01**00 Draw Rules: Corridor1 - Dynamic		
	"A restricted air route of travel specified for use by friendly aircraft and established for the purpose of preventing friendly aircraft from being fired on by friendly forces." (JP-3-52)	
Air Corridor with Multiple Segments		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Low-Level Transit Route (LLTR) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**02**00 Draw Rules: Corridor1 - Dynamic		
	"A temporary corridor of defined dimensions established in the forward area to minimize the risk to friendly aircraft from friendly air defenses or surface forces. Also called (LLTR)." (JP 3-52)	
Minimum-Risk Route (MRR) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**03**00 Draw Rules: Corridor1 - Dynamic		
	"A temporary corridor of defined dimensions recommended for use by high-speed, fixed-wing aircraft that presents the minimum known hazards to low-flying aircraft transiting the combat zone. Also called MRR." (JP-3-52)	
Safe Lane Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**04**00 Draw Rules: Corridor1 - Dynamic		
	A bi-directional lane connecting an airbase, landing site and/or base defense zone to adjacent routes/corridors. Safe lanes may also be used to connect adjacent activated routes/ corridors. (AJP-3.3.5)	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Standard Use Army Aircraft Flight Route (SAAFR) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**05**00 Draw Rules: Corridor1 - Dynamic		
	"Route established below the coordination level to facilitate the movement of Army aviation assets; it is normally located in the corps through brigade rear areas of operation and does not require approval by the airspace control authority." (JP 3-52)	
Transit Corridors Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**06**00 Draw Rules: Corridor1 - Dynamic		
	Transit Corridor (TC) Bi-directional corridor in the rear area. Air traffic services not normally provided. (AJP-3.3.5)	
Special Corridor Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**07**00 Draw Rules: Corridor1 - Dynamic		
	In air operations, an air corridor established to accommodate the special routing requirements of specific missions. (AJP-3.3.5)	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Areas (Zones)		
Base Defense Zone (BDZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**08**00 Draw Rules: Area22 - Static		
	"An air defense zone established around an air base and limited to the engagement envelope of short-range air defense systems defending that base." (JP 3-52) **Orientation:** The symbol is typically centered over the desired location.	
High-Density Airspace Control Zone (HIDACZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**09**00 Draw Rules: Area1 - Dynamic		
	Airspace designated in an airspace control plan or airspace control order in which there is a concentrated employment of numerous and varied weapons and airspace users. Also called HIDACZ. (JP 3-52)	
Restricted Operations Zones		
Restricted Operations Zone (ROZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 17**10**00 Draw Rules: Area1 - Dynamic		
	"Airspace reserved for specific activities in which the operations of one or more airspace users is restricted. Also called ROZ." (JP 3-52)	









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Air-to-Air Restricted Operations Zone (AARROZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171**1**00 Draw Rules: Area1 - Dynamic		
Unmanned Aircraft Restricted Operations Zone (UA-ROZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171**2**00 Draw Rules: Area1 - Dynamic		
Weapons Engagement Zones		
Weapon Engagement Zone Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171**3**00 Draw Rules: Area1 - Dynamic	 In air defense, airspace of defined dimensions within which the responsibility for engagement normally rests with a particular weapon system.	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Fighter Engagement Zone (FEZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171400 Draw Rules: Area1 - Dynamic		
	In air defense, airspace of defined dimensions within which the responsibility for engagement normally rests with a particular weapon system.	
Joint Engagement Zone (JEZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171500 Draw Rules: Area1 - Dynamic		
	In air defense, that airspace of defined dimensions within which multiple air defense systems (surface-to-air missiles and aircraft) are simultaneously employed to engage air threats.	
Missile Engagement Zone (MEZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171600 Draw Rules: Area1 - Dynamic		
	In air defense, airspace of defined dimensions within which the responsibility for engagement normally rests with a particular weapon system.	
Low (Altitude) Missile Engagement Zone (LOMEZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171700 Draw Rules: Area1 - Dynamic		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
High (Altitude) Missile Engagement Zone (HIMEZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171**8**00 Draw Rules: Area1 - Dynamic		
Short Range Air Defense Engagement Zone (SHORADEZ) Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 171**9**00 Draw Rules: Area1 - Dynamic		
Weapons Free Zone Type: Entity Type Entity: Airspace Control (Corridors) Areas Symbol Set: 25 Value: 172**0**00 Draw Rules: Area1 - Dynamic	 An air defense zone established around key assets or facilities other than airbases which merit special protection by ground based air defense assets where weapons may be fired at any target not positively identified as friendly. (AJP-3.3.5) **Note:** Upward diagonal lines are part of the fill.	
Points		
Airspace Control Points Type: Entity Symbol Set: 25 Value: **18**0000 Draw Rules: Point2 – Static	Reserved for hierarchical purposes.	N/A






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Air Control Point Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**01**00 Draw Rules: Point2 – Static		
Communications Check Point Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**02**00 Draw Rules: Point2 – Static		
Isolated Personnel Recovery Point Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**03**00 Draw Rules: Point1 – Static		
Pop-Up Point (PUP) Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**04**00 Draw Rules: Point2 – Static	 The location at which aircraft quickly gain altitude for target acquisition and engagement.	






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Air Control Rendezvous Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**05**00 Draw Rules: Point2 – Static		
Tactical Air Navigation (TACAN) Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**06**00 Draw Rules: Point2 – Static		
Combat Air Patrol (CAP) Station Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**07**00 Draw Rules: Point2 – Static		
Airborne Early Warning (AEW) Station Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**08**00 Draw Rules: Point2 – Static		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
ASW (Helo and F/W) Station Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**09**00 Draw Rules: Point2 – Static		
Strike Initial Point Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**10**00 Draw Rules: Point2 – Static		
Replenishment Station Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**11**00 Draw Rules: Point2 – Static		
Tanking Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**12**00 Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Antisubmarine Warfare, Rotary Wing Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**13**00 Draw Rules: Point2 – Static		
Surface Combat Air Patrol (SUCAP) – Fixed Wing Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**14**00 Draw Rules: Point2 – Static		
SUCAP – Rotary Wing Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**15**00 Draw Rules: Point2 – Static		
MIW – Fixed Wing Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**16**00 Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
MIW – Rotary Wing Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**1**700 Draw Rules: Point2 – Static		
Tomcat Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**1**800 Draw Rules: Point2 – Static		
Rescue Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**1**900 Draw Rules: Point2 – Static		
Unmanned Aerial System (UAS/UA) Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**2**000 Draw Rules: Point2 – Static		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Vertical Take-off and Landing (VTOL) Tactical Unmanned Aircraft (VTUA) Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**2**100 Draw Rules: Point2 – Static		
Orbit Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**2**200 Draw Rules: Point2 – Static		
Orbit – Figure Eight Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**2**300 Draw Rules: Point2 – Static		
Orbit – Race Track Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**2**400 Draw Rules: Point2 – Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Orbit – Random Closed Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**25**00 Draw Rules: Point2 – Static		
Isolated Personnel Location Type: Entity Type Entity: Airspace Control Points Symbol Set: 25 Value: 18**26**00 Draw Rules: Point6 - Static		
Lines		
Airspace Control Lines Type: Entity Symbol Set: 25 Value: **19**0000	N/A	N/A
Identification, Friend-or-Foe (IFF) Off Line Type: Entity Type Entity: Airspace Control Lines Symbol Set: 25 Value: 19**01**00 Draw Rules: Line1- Dynamic	 Line demarking where friendly aircraft en-route to targets stop emitting an IFF signal. (AJP-3.3.5)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XI. Airspace coordinating measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Identification, Friend-or-Foe (IFF) On Line Type: Entity Type Entity: Airspace Control Lines Symbol Set: 25 Value: 19**02**00 Draw Rules: Line1- Dynamic		
	Line demarking where friendly aircraft returning to friendly territory start emitting an IFF signal. (AJP-3.3.5)	

L.5.15 Maritime control measures and planning symbols.







L.5.15.1 Maritime control measures and planning symbols. Are used by NATO to help the maritime component commander and their subordinate commanders to direct action by establishing responsibilities and to prevent ships, units, or aircraft from impeding one another and to impose necessary coordination. They aide the cooperation among forces without imposing needless restrictions on their freedom of action. In general terms, maritime control measures and planning symbols can be broken down into the following groups: points, lines and areas.

TABLE L-XII. Maritime control measures and planning symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Maritime Control Area Type: Entity Symbol Set: 25 Value: **20**0000	N/A	N/A
Launch Area Type: Entity Type Entity: Maritime Control Areas Symbol Set: 25 Value: 20**01**00	N/A	N/A








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Launch Area, Ellipse/Circle Type: Entity Subtype Entity/Entity Type: Maritime Control Areas/Launch Area Symbol Set: 25 Value: 200**101** Draw Rules: Ellipse1 - Dynamic		
	Launch Area may be depicted as orange (RGB: 255,155,0) where, the area fill is 75% transparent. **Orientation:** Determined by the rotation angle provided, where 0 degrees is east/west and a positive rotation angle rotates the ellipse in a counter-clockwise direction.	
Defended Area Type: Entity Type Entity: Maritime Control Areas Symbol Set: 25 Value: 20**02**00	N/A	N/A
Defended Area, Ellipse/Circle Type: Entity Subtype Entity/Entity Type: Maritime Control Areas/Defended Area Symbol Set: 25 Value: 2002**01** Draw Rules: Ellipse1 - Dynamic		
	Defended Area may be depicted as gray (RGB:85,119,136) where the gray area fill is 75% transparent. **Orientation:** Determined by the rotation angle provided, where 0 degrees is east/west, and a positive rotation angle rotates the ellipse in a counter-clockwise direction.	
Defended Area, Rectangle Type: Entity Subtype Entity/Entity Type: Maritime Control Areas/Defended Area Symbol Set: 25 Value: 2002**02** Draw Rules: Rectangular1 - Dynamic		
	Defended Area may be depicted as gray (RGB:85,119,136) where the gray area fill is 75% transparent. **Orientation:** As determined by the anchor points.	



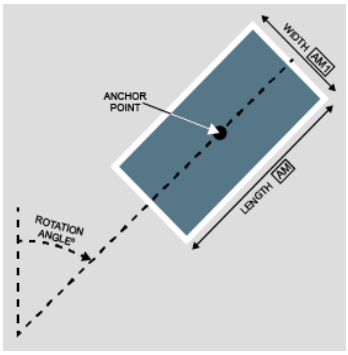
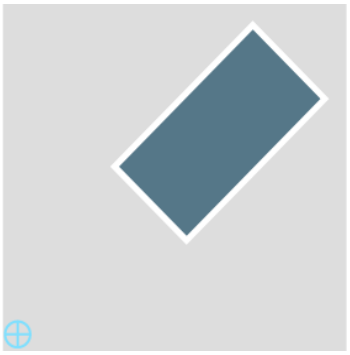
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
No Attack (NOTACK) Zone Type: Entity Type Entity: Maritime Control Areas Symbol Set: 25 Value: 20**03**00 Draw Rules: Circular1 - Dynamic	 CENTER POINT	
Ship Area of Interest, Maneuver Areas Type: Entity Type Entity: Maritime Control Areas Symbol Set: 25 Value: 20**04**00 Draw Rules: Point2 - Dynamic		 Gray background is used to show white border and is not part of the symbol
	Maneuver areas can only occur within a Ship AOI graphic and the symbol shall be drawn with a black border. Maneuver areas may be either unfilled or filled with performance-contoured color options.	
Ship Area of Interest, Eclipse/Circle Type: Entity Subtype Entity/Entity Type: Maritime Control Areas/Ship Area of Interest Symbol Set: 25 Value: 2004**01** Draw Rules: Ellipse1 - Dynamic		  White-Colored Option
	The orientation of this symbol is determined by the rotation angle provided, where 0 degrees is east/west and a positive rotation angle rotates the ellipse in a counter-clockwise direction.	

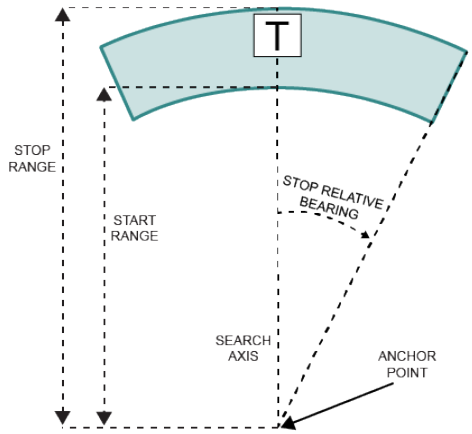
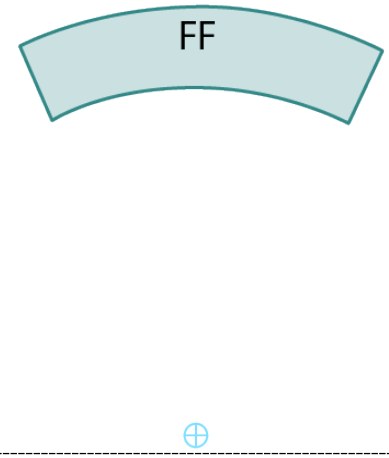



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Ship Area of Interest, Rectangle Type: Entity Subtype Entity/Entity Type: Maritime Control Areas/Ship Area of Interest Symbol Set: 25 Value: 200**402** Draw Rules: Rectangular1 - Dynamic		 White-Colored Option
	Orientation is determined by the anchor points.	
Active Maneuver Area Type: Entity Type Entity: Maritime Control Areas Symbol Set: 25 Value: 20**05**00 Draw Rules: Point2 – Static		
Cued Acquisition Doctrine Type: Entity Type Entity: Maritime Control Areas Symbol Set: 25 Value: 20**06**00 Draw Rules: Point17 – Dynamic **Note**: Gray background is used to show white border and is not part of the symbol		
	Cued Acquisition Doctrine symbol has a white border (RGB: 255,255,255) with a 75% transparent gray fill (RGB: 85.119,136) **Orientation:** The orientation of this symbol is determined by the rotation angle provided, where 0 degrees is North and a positive rotation angle rotates the rectangle in a clockwise direction.	









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Radar Search Doctrine Type: Entity Type Entity: Maritime Control Areas Symbol Set: 25 Value: 20**0**700 Draw Rules: Point18 – Dynamic		
	RSD Graphic has a dark cyan border (RGB: 51,136,136) with a 75% transparent dark cyan fill (RGB: 51,136,136) **Orientation:** The orientation of this symbol is determined by the search axis azimuth provided.	
Maritime Control Points Type: Entity Symbol Set: 25 Value: **21**0000	N/A	N/A
Plan Ship Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**01**00 Draw Rules: Point2 – Static		
Aim Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**02**00 Draw Rules: Point2 – Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Defended Asset Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**03**00 Draw Rules: Point2 – Static		
Drop Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**04**00 Draw Rules: Point4 - Static		
Entry Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**05**00 Draw Rules: Point5 - Static		
Air Detonation Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**06**00 Draw Rules: Point2 – Static		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Ground Zero Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**0**700 Draw Rules: Point6 - Static		
Impact Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**0**800 Draw Rules: Point2 – Static		
Predicted Impact Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**0**900 Draw Rules: Point2 – Static		
Launched Torpedo Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211**0**00 Draw Rules: Point7 - Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Missile Detection Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211100 Draw Rules: Point7 - Static		
Sub-Surface Warfare		
Acoustic Countermeasure (Decoy) Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211200 Draw Rules: Point7 - Static		
Electronic Countermeasures (ECM) Decoy Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211300 Draw Rules: Point2 – Static		
Brief Contact Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211400 Draw Rules: Point7 - Static		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Datum Lost Contact Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211500 Draw Rules: Point2 – Static		
	The symbol will be oriented as shown above and will be centered over the datum.	
BT Buoy Drop Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211600 Draw Rules: Point2 – Static		
	The symbol's height should be 2x the symbol's width.	
Reported Bottomed Sub Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211700 Draw Rules: Point2 – Static		
Moving Haven Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211800 Draw Rules: Point2 – Static		








Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Screen Center Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 211900 Draw Rules: Point2 – Static		
Lost Contact Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 212000 Draw Rules: Point7 - Static		
Sinker Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 212100 Draw Rules: Point7 - Static		
Trial Track Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 212200 Draw Rules: Point7 - Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Fix		
Acoustic Fix Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**23**00 Draw Rules: Point2 – Static		
Electromagnetic Fix Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**24**00 Draw Rules: Point2 – Static		
Electromagnetic - Magnetic Anomaly Detection (MAD) Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**25**00 Draw Rules: Point2 – Static		
Optical Fix Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**26**00 Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Formation Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**2**700 Draw Rules: Point2 – Static		
Harbor Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**28**00 Draw Rules: Point2 – Static		
	Normally, the H field has four possible entries as shown in the harbor entrance point entry below. However, a user can use this symbol to define a new type of point if the following selections or the selection that follows are not sufficient. The symbol's corners form a 70-degree angle.	
Harbor Entrance Point Type: Entity Type Entity: Maritime Control Points Symbol Set:25 Value: 21**29**00	Reserved for hierarchical purposes.	N/A
Harbor Entrance Point A Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Harbor Entrance Point Symbol Set: 25 Value: 2129**01** Draw Rules: Point2 – Static		
	The symbol's corners form a 70-degree angle	

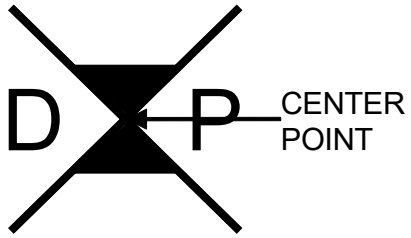

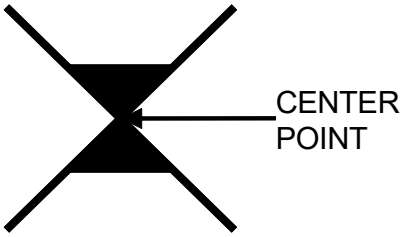

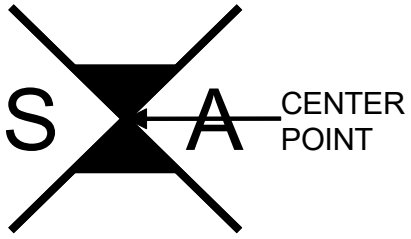

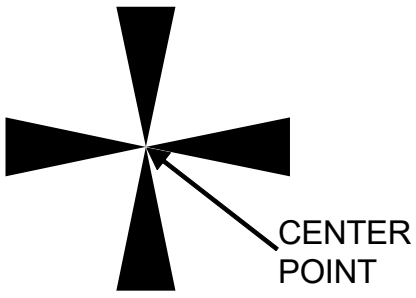

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Harbor Entrance Point Q Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Harbor Entrance Point Symbol Set: 25 Value: 212902 Draw Rules: Point2 – Static	 The symbol's corners form a 70-degree angle	
Harbor Entrance Point X Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Harbor Entrance Point Symbol Set: 25 Value: 212903 Draw Rules: Point2 – Static	 The symbol's corners form a 70-degree angle	
Harbor Entrance Point Y Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Harbor Entrance Point Symbol Set: 25 Value: 212904 Draw Rules: Point2 – Static	 The symbol's corners form a 70-degree angle	

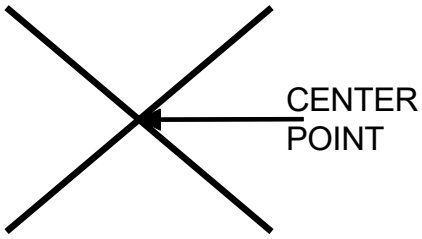







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Search		
Dip Position Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**30**00 Draw Rules: Point2 – Static		
Search Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**31**00 Draw Rules: Point2 – Static		
Search Area Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**32**00 Draw Rules: Point2 – Static		
Search Center Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**33**00 Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Navigational Reference Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**34**00 Draw Rules: Point2 – Static		
Sonobuoys { The diameter of the circle is 1/2 the height of the symbol.}		
Sonobuoy Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**35**00 Draw Rules: Point2 – Static		
Ambient Noise Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 2135**01** Draw Rules: Point2 – Static		
Air Transportable Communication (ATAC) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 2135**02** Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Barra Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213503 Draw Rules: Point2 – Static		
Bathythermograph Transmitting (BT) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213504 Draw Rules: Point2 – Static		
Command Active Multi-Beam Sonobuoy (CAMBS) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213505 Draw Rules: Point2 – Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Command Active Sonobuoy Directional Command Active Sonobuoy System (CASS) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213506 Draw Rules: Point2 – Static		
Directional Frequency Analyzing and Recording (DIFAR) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213507 Draw Rules: Point2 – Static		
Directional Command Active Sonobuoy System (DICASS) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213508 Draw Rules: Point2 – Static		







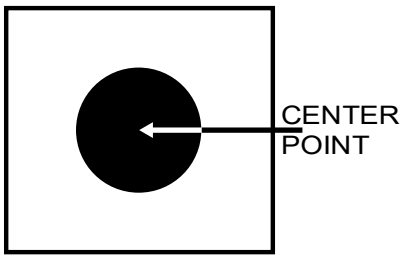

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Expendable Reliable Acoustic Path Sonobuoy (ERAPS) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213509 Draw Rules: Point2 – Static		
Expired Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213510 Draw Rules: Point2 – Static		
Kingpin Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213511 Draw Rules: Point2 – Static		
Low Frequency Analysis and Recording (LOFAR) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 213512 Draw Rules: Point2 – Static		





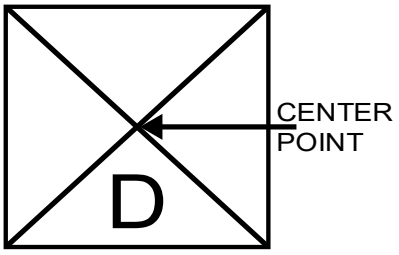



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Pattern Center Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 2135**13** Draw Rules: Point2 – Static		
Range Only Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 2135**14** Draw Rules: Point2 – Static		
Vertical Line Array Directional Frequency Analysis and Recording (DIFAR) Type: Entity Subtype Entity/Entity Type: Maritime Control Points/Sonobuoy Symbol Set: 25 Value: 2135**15** Draw Rules: Point2 – Static		
Reference Points		
Reference Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**36**00 Draw Rules: Point2 – Static		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Special Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**3**700 Draw Rules: Point2 – Static		
Navigational Reference Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**3**800 Draw Rules: Point2 – Static		
Data Link Reference Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**3**900 Draw Rules: Point2 – Static		
Vital Area Center Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**4**100 Draw Rules: Point2 – Static		

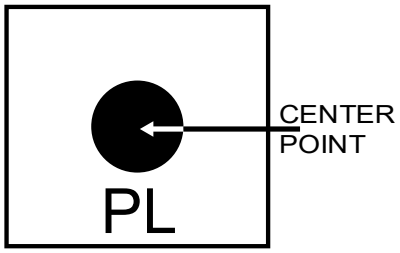

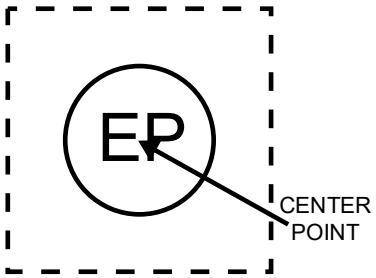





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Corridor Tab Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**4**200 Draw Rules: Point2 – Static		
Enemy Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**4**300 Draw Rules: Point2 – Static		
Marshall Point Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**4**400 Draw Rules: Point2 – Static		
Position and Intended Movement (PIM) Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**4**500 Draw Rules: Point2 – Static		


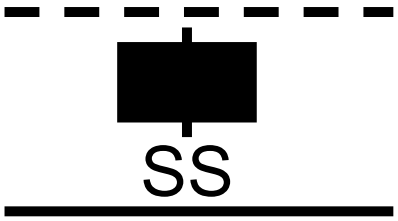

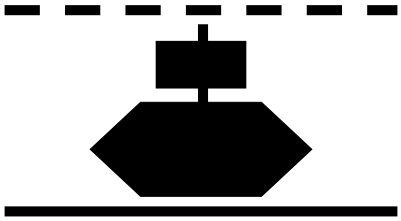
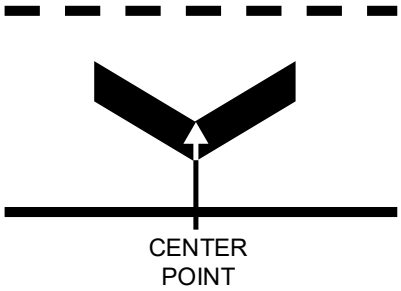
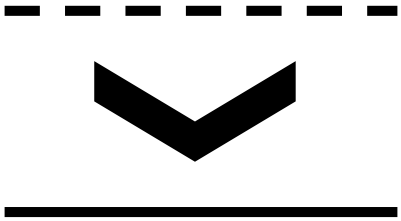
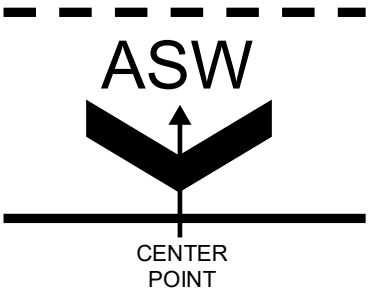
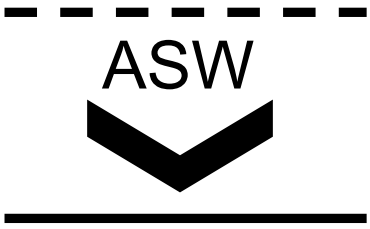
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Pre-Landfall Waypoint Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 214600 Draw Rules: Point2 – Static		
Estimated Position (EP) Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 214700 Draw Rules: Point2 – Static		
Waypoint Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 214800 Draw Rules: Point2 – Static		
Sea Subsurface Stations		
General Sea Subsurface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 214900 Draw Rules: Point2 – Static		





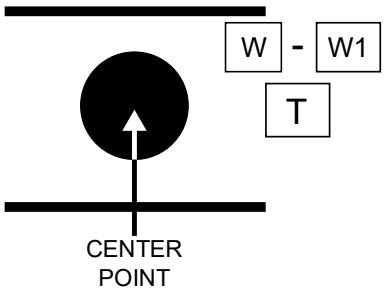
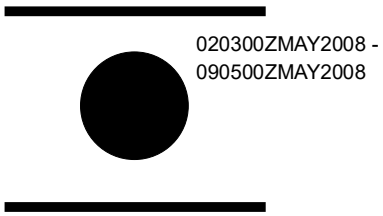
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Submarine Sea Subsurface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**5**000 Draw Rules: Point2 – Static		
Submarine Antisubmarine Warfare Sea Subsurface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**5**100 Draw Rules: Point2 – Static		
Unmanned Underwater Vehicle Sea Subsurface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**5**200 Draw Rules: Point2 – Static		
Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Subsurface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**5**300 Draw Rules: Point2 – Static		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Mine Warfare Unmanned Underwater Vehicle Sea Subsurface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**54**00 Draw Rules: Point2 – Static		
Sea Surface Warfare Unmanned Underwater Vehicle Sea Subsurface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**55**00 Draw Rules: Point2 – Static		
Sea Surface Stations		
General Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**56**00 Draw Rules: Point2 – Static		

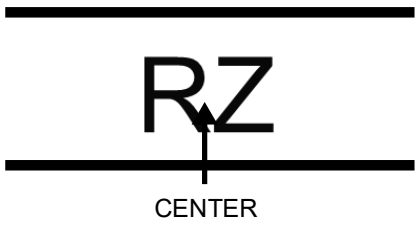



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Antisubmarine Warfare (ASW) Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 215700 Draw Rules: Point2 – Static		
Mine Warfare Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 215800 Draw Rules: Point2 – Static		
Non-Combatant Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 215900 Draw Rules: Point2 – Static		
Picket Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 216000 Draw Rules: Point2 – Static		

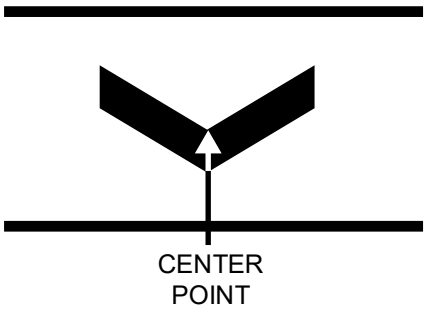
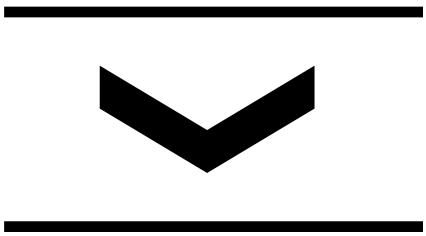

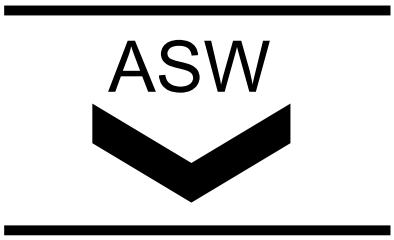

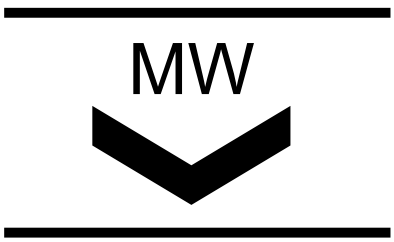
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Rendezvous Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**61**00 Draw Rules: Point2 – Static		
Replenishment at Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**62**00 Draw Rules: Point2 – Static		
Rescue Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**63**00 Draw Rules: Point2 – Static		
Surface Warfare Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**64**00 Draw Rules: Point2 – Static		


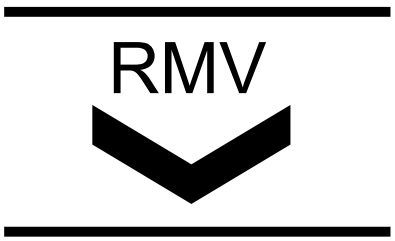

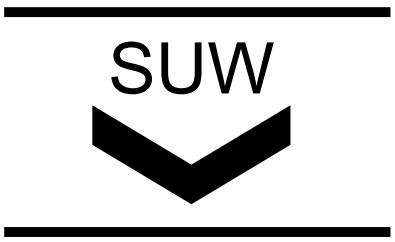

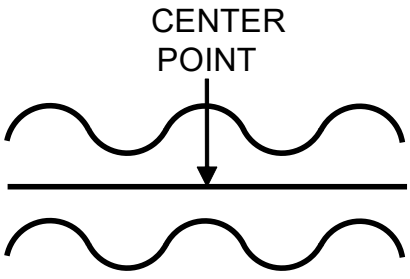
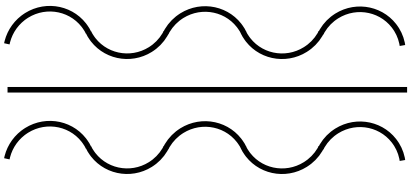
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Unmanned Underwater Vehicle Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**65**00 Draw Rules: Point2 – Static		
Antisubmarine Warfare (ASW) Unmanned Underwater Vehicle Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**66**00 Draw Rules: Point2 – Static		
Mine Warfare Unmanned Underwater Vehicle Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**67**00 Draw Rules: Point2 – Static		

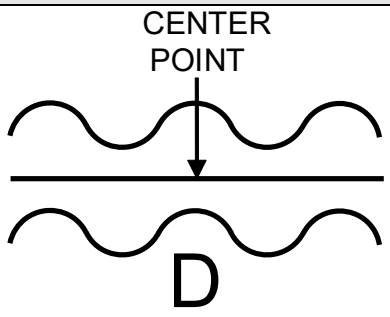
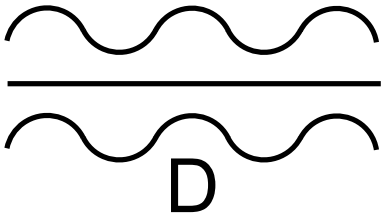
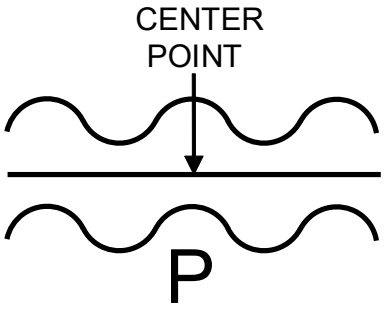
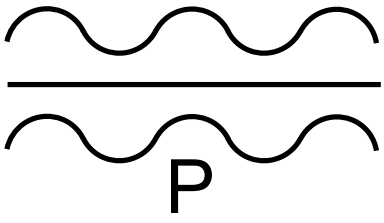
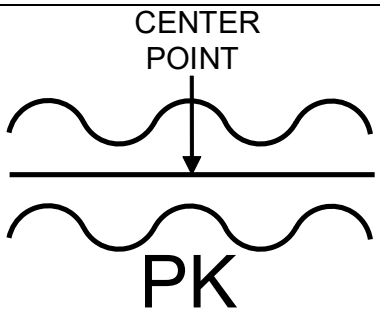
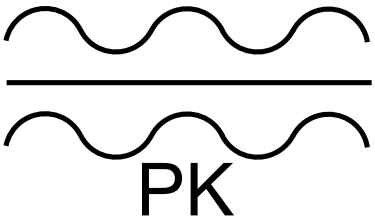
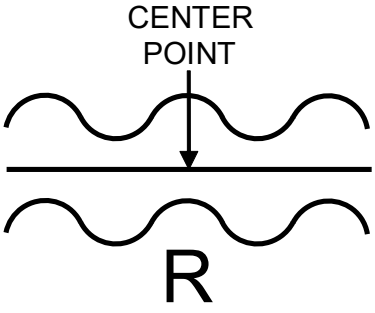
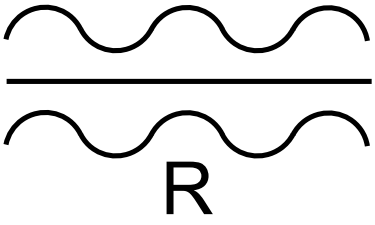
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Remote Multi-Mission Vehicle Unmanned Underwater Vehicle Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**68**00 Draw Rules: Point2 – Static		
Surface Warfare Unmanned Underwater Vehicle Sea Surface Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**69**00 Draw Rules: Point2 – Static		
Shore Control Station Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**70**00 Draw Rules: Point2 – Static		
Routes		
General Route Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**71**00 Draw Rules: Point2 – Static		

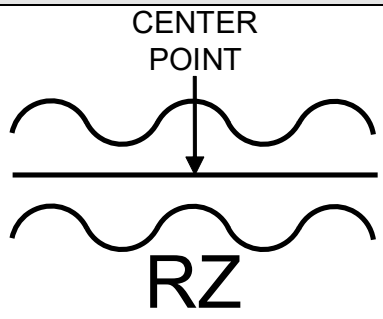
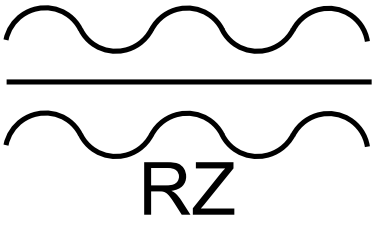
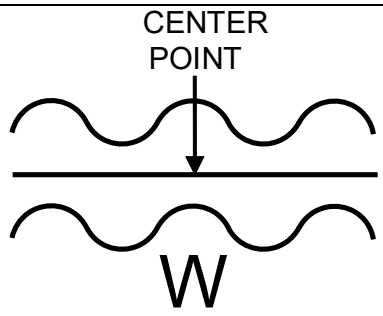
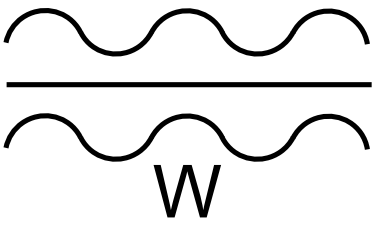
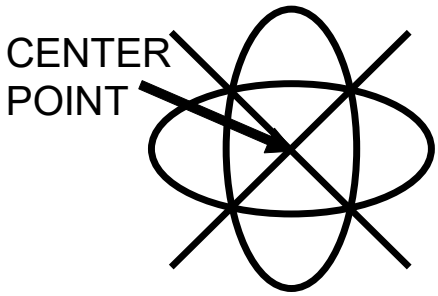

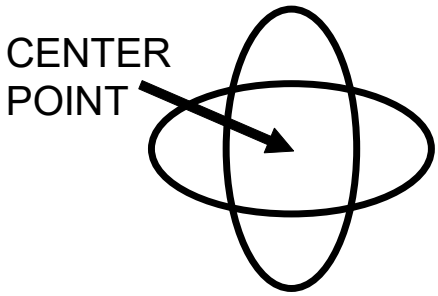

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Diversion Route Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217200 Draw Rules: Point2 – Static		
Position and Intended Movement (PIM) Route Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217300 Draw Rules: Point2 – Static		
Picket Route Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217400 Draw Rules: Point2 – Static		
Point R Route Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217500 Draw Rules: Point2 – Static		

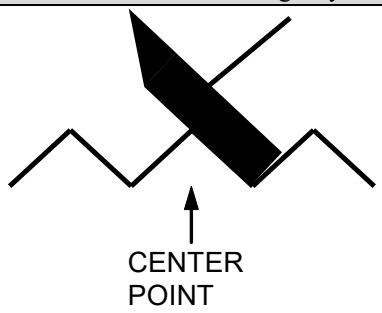


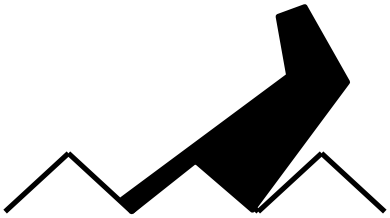
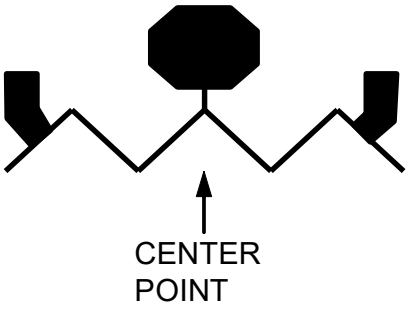
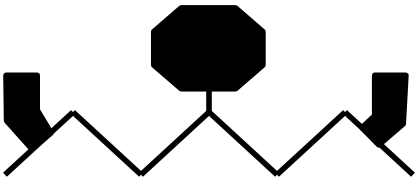
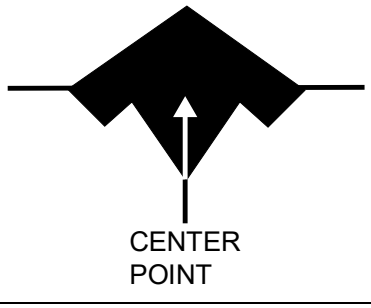

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Rendezvous Route Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217600 Draw Rules: Point2 – Static		
Waypoint Route Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217700 Draw Rules: Point2 – Static		
Clutter, Stationary or Cease Reporting Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217800 Draw Rules: Point2 – Static		
Tentative or Provisional Track Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 217900 Draw Rules: Point2 – Static		

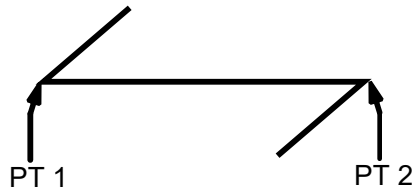


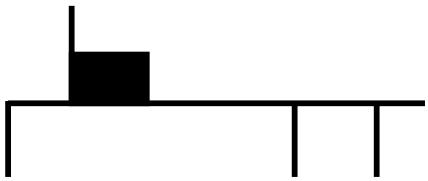


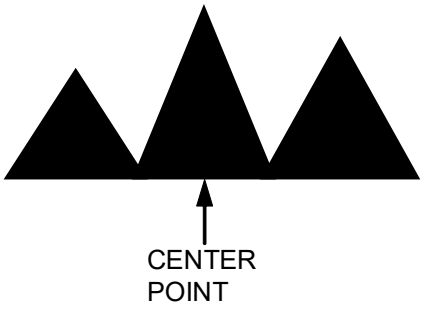
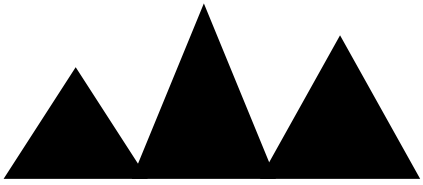
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Emergency		
Distressed Vessel Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**80**00 Draw Rules: Point2 – Static		
Ditched Aircraft/Downed Aircraft Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**81**00 Draw Rules: Point2 – Static		
Person In Water/ Bailout Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**82**00 Draw Rules: Point2 – Static		
Hazard		
Iceberg Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**83**00 Draw Rules: Point2 – Static		

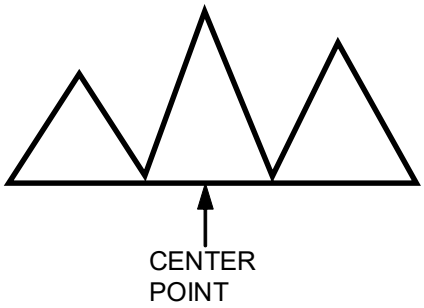
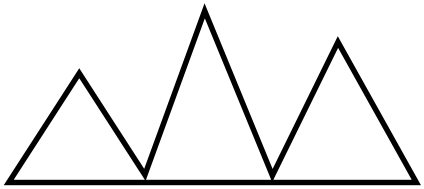
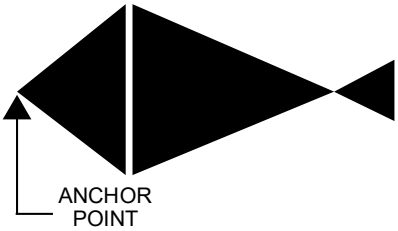
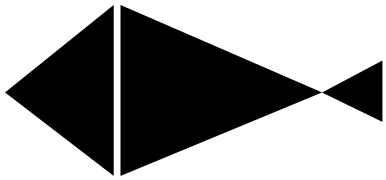
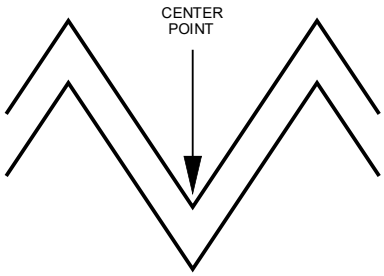
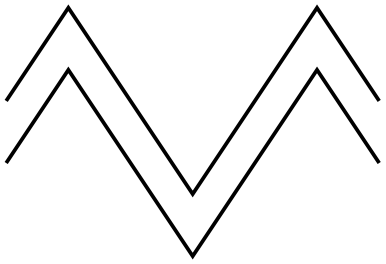
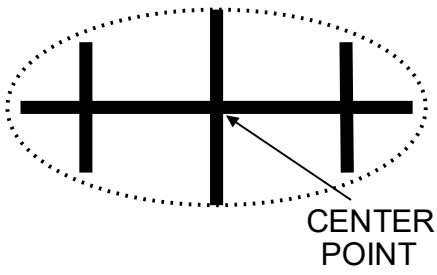
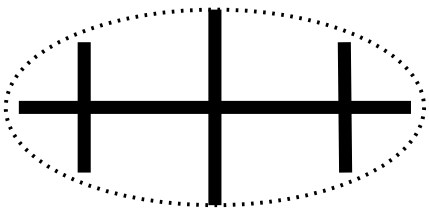
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Navigational Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**8**400 Draw Rules: Line4 - Dynamic		
	Orientation is determined by the anchor points.	
Oil Rig Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**85**00 Draw Rules: Point2 – Static		
Sea Mine-Like Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**86**00 Draw Rules: Point2 – Static		
	The orientation of symbol can be rotated in 90 degree increments.	
Sea Subsurface Returns		
Bottom Return/ Non-Mine, Mine-Like Bottom Object (NOMBO) Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**87**00 Draw Rules: Point7 - Static		

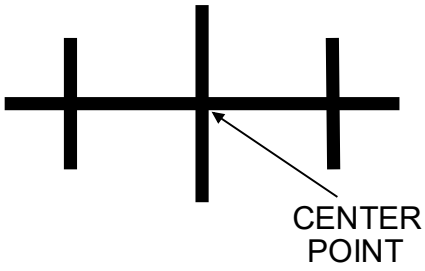
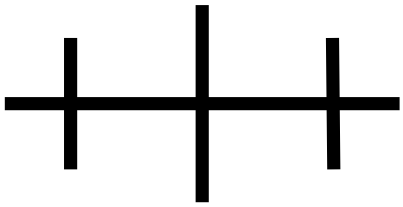




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Bottom Return/ Non-Mine, Mine-Like Bottom Object (NOMBO)/Installation/ Manmade Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**88**00 Draw Rules: Point7 - Static		
Marine Life Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**89**00 Draw Rules: Point15 - Static		
Sea Anomaly (Wake, Current, Knuckle) Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**90**00 Draw Rules: Point2 – Static		
Bottom Return/Non-MILCO, Wreck, Dangerous Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**91**00 Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Bottom Return/Non-MILCO, Wreck, Non Dangerous Type: Entity Type Entity: Maritime Control Points Symbol Set: 25 Value: 21**92**00 Draw Rules: Point2 – Static		
Maritime Control Lines Type: Entity Symbol Set: 25 Value: **22**0000	N/A	N/A
Bearing lines orientation: One point defines the origin from which the bearing is being taken, and the other point defines the location or direction from which a contact is made. **Note:** One point defines the origin from which the bearing is being taken, and the other point defines the location or direction from which a contact is made.		
Bearing Line Type: Entity Type Entity: Maritime Control Lines Symbol Set: 25 Value: 22**01**00 Draw Rules: Line1 - Dynamic		
Bearing Line, Electronic Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 2201**01** Draw Rules: Line1 - Dynamic		









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Bearing Line, Electromagnetic Warfare (EW) Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 220**102** Draw Rules: Line1 - Dynamic		
	"H" field may contain the following identifiers: •"MSL" – missile •"MCU" – missile control unit •"TENT - tentative	
Bearing Line, Acoustic Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 220**103** Draw Rules: Line1 - Dynamic		
	"H" field may contain the following identifiers: •"L3-ACT" – LAMPS, active •"L3-pHELO" – LAMPS, Helicopter, passive •"L3-pSHIP" – LAMPS, Ship, passive •"L3-OSC" – LAMPS, Operator Specified Contact, passive •"L3-ATT" – LAMPS, Acoustic Target Track, passive	
Bearing Line, Acoustic (Ambiguous) Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 220**104** Draw Rules: Line1 - Dynamic		
	"H" field may contain the following identifiers: •"L3-ACT" – LAMPS, active •"L3-pHELO" – LAMPS, Helicopter, passive •"L3-pSHIP" – LAMPS, Ship, passive •"L3-OSC" – LAMPS, Operator Specified Contact, passive •"L3-ATT" – LAMPS, Acoustic Target Track, passive	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XII. Maritime control measures and planning symbols - Continued.

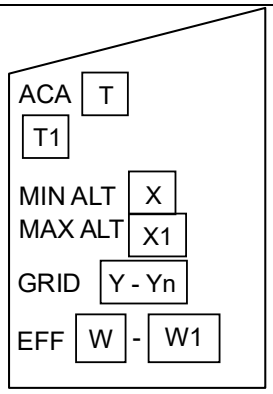
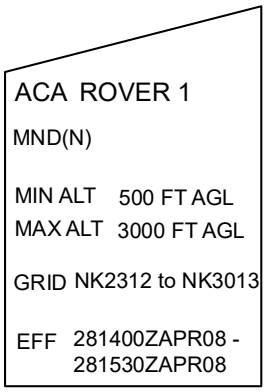
DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Bearing Line, Torpedo Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 220**105** Draw Rules: Line1 - Dynamic		
Bearing Line, Electro-Optical Intercept Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 220**106** Draw Rules: Line1 - Dynamic		
Bearing Line, Jammer Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 220**107** Draw Rules: Line1 - Dynamic	 "H" field may only contain the "PAT-1" – PAT-1 Jammer	
Bearing Line, Radio Direction Finder (RDF) Type: Entity Subtype Entity/Entity Type: Maritime Control Lines/Bearing Line Symbol Set: 25 Value: 220**108** Draw Rules: Line1 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.16 Fire support coordination measures.


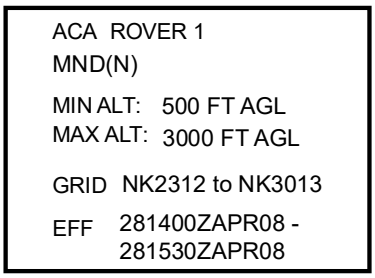



L.5.16.1 Fire support coordination measures. Measures employed by land or amphibious commanders to facilitate the rapid engagement of targets and simultaneously provide safeguards for friendly forces. Fire support control measures and planning symbols should be labeled with the abbreviation of the control measure and planning symbol, the controlling headquarters (Field T) and the effective times (Field W/W1). For lines this labeling should be on both ends of the line and repeated as often as necessary for clarity along any line that passes through many boundaries.

TABLE L-XIII. Fire support coordination measures.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Fire Areas Type: Entity Symbol Set: 25 Value: **24**0000	Reserved for hierarchical purposes.	N/A
Airspace Coordination Area (ACA) "A three-dimensional block of airspace in a target area, established by the appropriate commander, in which friendly aircraft are reasonably safe from friendly surface fires. Also called ACA." (JP 3-09.3)		
Airspace Coordination Area (ACA) Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 24**01**00	Reserved for hierarchical purposes.	N/A
Airspace Coordination Area (ACA) - Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Airspace Coordination Area Symbol Set: 25 Value: 2401**01** Draw Rules: Area1 - Dynamic	 **Note**: T1 is a Unit	

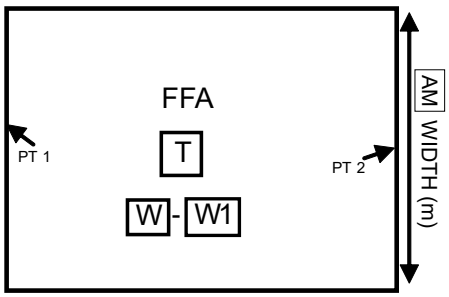



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIII. Fire support coordination measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Airspace Coordination Area (ACA) - Rectangle Type: Entity Subtype Entity/Entity Type: Fire Areas/Airspace Coordination Area Symbol Set: 25 Value: 240102 Draw Rules: Rectangular1 - Dynamic	 **Note**: T1 is a Unit	
	Orientation is determined by the anchor points.	
Airspace Coordination Area (ACA) – Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Airspace Coordination Area Symbol Set: 25 Value: 240103 Draw Rules: Circular1 - Dynamic	 **Note**: T1 is a Unit	
Free Fire Area (FFA) Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 240200	Reserved for hierarchical purposes.	N/A
Free Fire Area (FFA) – Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Free Fire Area Symbol Set: 25 Value: 240201 Draw Rules: Area1 - Dynamic		






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIII. Fire support coordination measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Free Fire Area (FFA) – Rectangle Type: Entity Subtype Entity/Entity Type: Fire Areas/Free Fire Area Symbol Set: 25 Value: 240**02** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	
Free Fire Area (FFA) – Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Free Fire Area Symbol Set: 25 Value: 240**03** Draw Rules: Circular1 - Dynamic		
No Fire Area (NFA) An area designated by the appropriate commander into which fires, or their effects are prohibited. Also called NFA. (JP 3-09.3)		
No Fire Area (NFA) Type: Entity Type Entity: Fires Areas Symbol Set: 25 Value: 24**03**00	Reserved for hierarchical purposes.	N/A
No Fire Area (NFA) - Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/No Fire Area Symbol Set: 25 Value: 240**301** Draw Rules: Area1 - Dynamic		



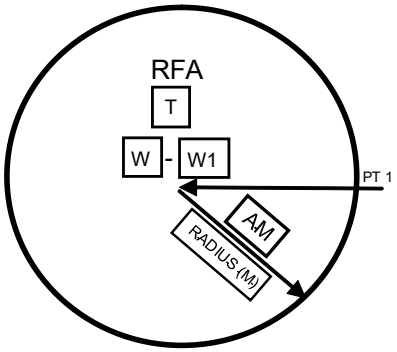
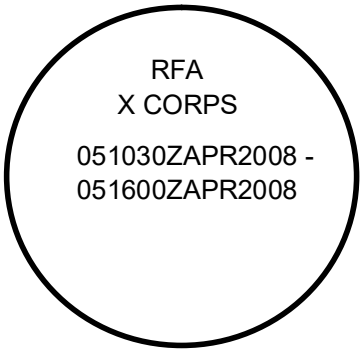
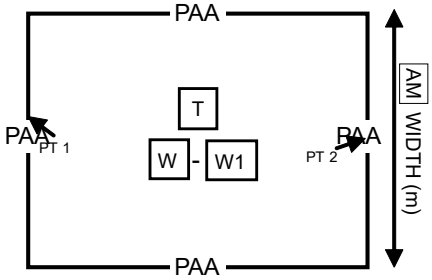
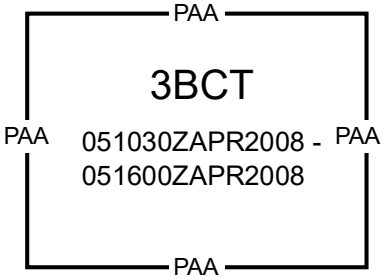
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIII. Fire support coordination measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
No Fire Area (NFA) – Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/No Fire Area Symbol Set: 25 Value: 240302 Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	
No Fire Area (NFA) – Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/No Fire Area Symbol Set: 25 Value: 240303 Draw Rules: Circular1 - Dynamic		
Restricted Fire Area (RFA) An area designated by the appropriate commander into which fires or their effects are prohibited. Also called NFA. See also fires. (JP 3-09.3)		
Restricted Fire Area (RFA) Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 240400	Reserved for hierarchical purposes.	N/A
Restrictive Fire Area (RFA) - Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Restricted Fire Area Symbol Set: 25 Value: 240401 Draw Rules: Area1 - Dynamic		

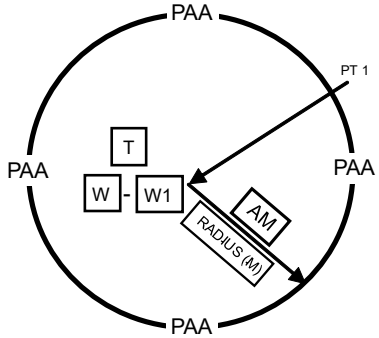
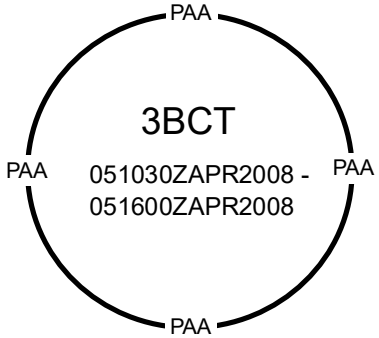
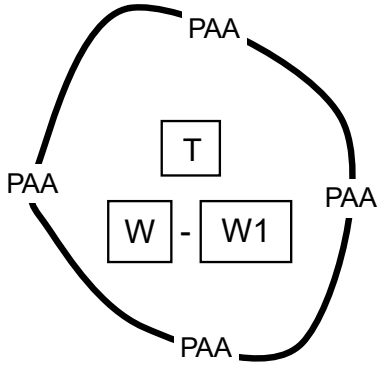
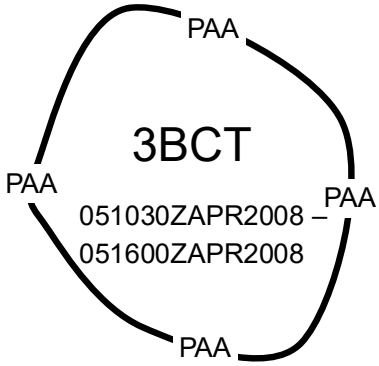
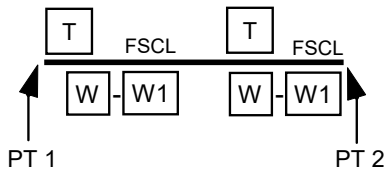

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIII. Fire support coordination measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Restrictive Fire Area (RFA) – Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Restricted Fire Area Symbol Set: 25 Value: 240**402** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	
Restrictive Fire Area (RFA) – Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Restricted Fire Area Symbol Set: 25 Value: 240**403** Draw Rules: Circular1 - Dynamic		
Position Area for Artillery (PAA) Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 24**05**00	Reserved for hierarchical purposes.	N/A
Position Area for Artillery (PAA) - Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Position Area for Artillery (PAA) Symbol Set: 25 Value: 2405**01** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	

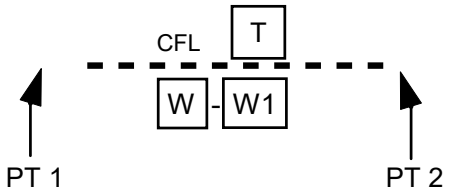
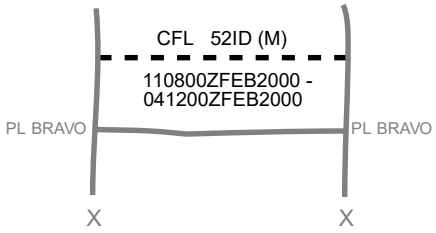


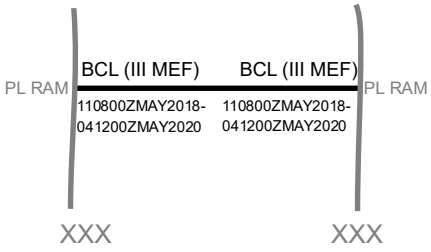

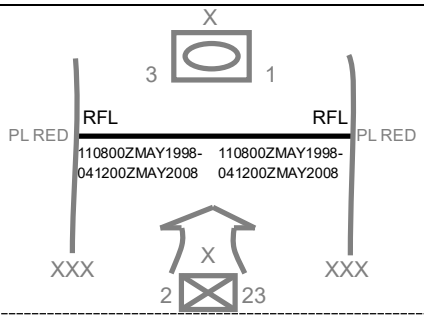
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIII. Fire support coordination measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Position Area for Artillery (PAA) - Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Position Area for Artillery (PAA) Symbol Set: 25 Value: 240**502** Draw Rules: Circular1 - Dynamic		
Position Area for Artillery (PAA) - Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Position Area for Artillery (PAA) Symbol Set: 2d5 Value: 240**503** Draw Rules: Area1 - Dynamic		
Fire Lines Type: Entity Symbol Set: 25 Value: **26**0000	Reserved for hierarchical purposes.	N/A
Fire Support Coordination Line (FSCL) Type: Entity Type Entity: Fire Lines Symbol Set: 25 Value: 26**01**00 Draw Rules: Line1 - Dynamic	 "A fire support coordination measure established by the land or amphibious force commander to support common objectives within an area of operation, beyond which all fires must be coordinated with affected commanders prior to engagement and, short of the line, all fires must be coordinated with the establishing commander prior to engagement. Also called FSCL." JP 3-09. Orientation is determined by the order in which the anchor points are entered.	 The end-of line information will typically be posted at the ends of the line as it is shown in the example.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIII. Fire support coordination measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Coordinated Fire Line (CFL) Type: Entity Type Entity: Fire Lines Symbol Set: 25 Value: 26**02**00 Draw Rules: Line1 - Dynamic		
	A line beyond which conventional surface-to-surface direct fire and indirect fire support means may fire at any time within the boundaries of the establishing headquarters without additional coordination but does not eliminate the responsibility to coordinate the airspace required to conduct the mission. (JP 3-09)	
No Fire Line Type: Entity Type Entity: Fire Lines Symbol Set: 25 Value: 26**03**00 Draw Rules: Line1 - Dynamic		
Battlefield Coordination Line (BCL) Type: Entity Type Entity: Fire Lines Symbol Set: 25 Value: 26**04**00 Draw Rules: Line1 - Dynamic		
	A fire support coordination measure that facilitates the expeditious attack of targets with surface indirect fires and aviation fires between the measure and the fire support coordination line (FSCL). (MCWP-16) The line information will be posted once at the center of the line as it is displayed on the screen and orientation is determined by the order in which the anchor points are entered.	
Restrictive Fire Line (RFL) Type: Entity Type Entity: Fire Lines Symbol Set: 25 Value: 26**05**00 Draw Rules: Line1 - Dynamic		
	"A specific boundary established between converging, friendly surface forces that prohibits fires or their effects from crossing. Also called **RFL**." (JP 3-09) Orientation is determined by the order in which the anchor points are entered.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

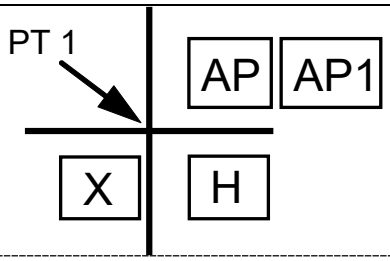

TABLE L-XIII. Fire support coordination measures - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Munition Flight Path Type: Entity Type Entity: Fire Lines Symbol Set: 25 Value: 26**06**00 Draw Rules: Line8 - Dynamic The orientation is determined by the anchor points.		
	Note 1. "MFP" shall be displayed once at the approximate center of the overall length of the Munition Flight Path. **Note 2**. The MFP begins at a weapon system/surface-to-surface fires unit and terminates at a target. **Note 3**. The effective DTG of the MFP is the shot/launch time of the projectile. The expiration DTG of the MFP is the splash/time of impact of the projectile. DTGs are not required to be displayed. If the DTG is displayed, it shall be displayed one time mid-way between Point 1 and midpoint of the graphic. **Note 4**. The 3D display of a MFP requires a height value for each anchor point.	

L.5.17 Targets.





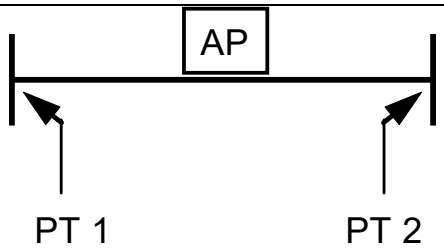

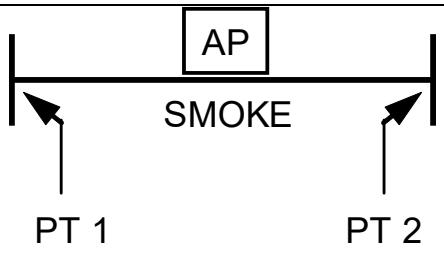

L.5.17.1 Targets. Are the objects of a particular action, for example a geographic area, a complex, an installation, a force, equipment, an individual, a group or a system, planned for capture, exploitation, neutralization or destruction by military forces.

TABLE L-XIV. Target symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Point Targets		
Point Targets Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 24**06**00	Reserved for hierarchical purposes.	N/A
Point or Single Target Type: Entity Subtype Entity/Entity Type: Fires Areas/Point Targets Symbol Set: 25 Value: 2406**01** Draw Rules: Point2 – Static		
	A target which requires the accurate placement of bombs or fire. Guidance on building target numbers is found in AArtyP-1.	


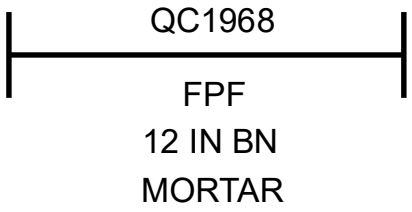
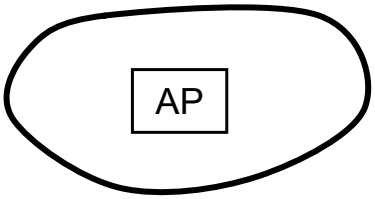
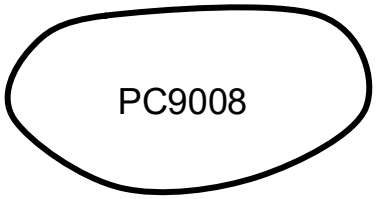
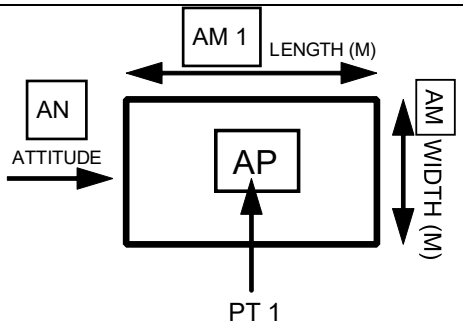
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Nuclear Target Type: Entity Subtype Entity/Entity Type: Fires Areas/Point Targets Symbol Set: 25 Value: 240602 Draw Rules: Point2 – Static		
	The point at the center of the target represents the desired ground zero.	
Target-Recorded Type: Entity Subtype Entity/Entity Type: Fires Areas/Point Targets Symbol Set: 25 Value: 240603 Draw Rules: Point2 – Static		
	Length is 2x the size of height.	
Linear Targets Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 240700	Reserved for hierarchical purposes.	N/A
Linear Target Type: Entity Subtype Entity/Entity Type: Fire Areas/Linear Targets Symbol Set: 25 Value: 240701 Draw Rules: Line1 - Dynamic		
	The line information will be posted once at the center of the line as it is displayed on the screen.	
Linear Smoke Target Type: Entity Subtype Entity/Entity Type: Fire Areas/Linear Targets Symbol Set: 25 Value: 240702 Draw Rules: Line1 - Dynamic		
	The line information will be posted once at the center of the line as it is displayed on the screen.	



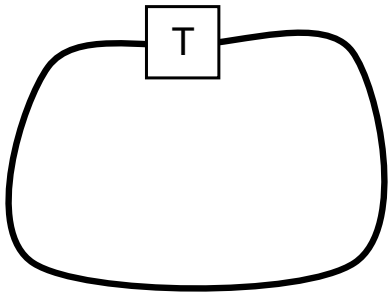
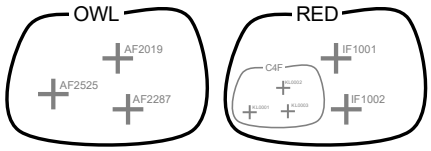





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Final Protective Fire (FPF) Type: Entity Subtype Entity/Entity Type: Fire Areas/Linear Targets Symbol Set: 25 Value: 240703 Draw Rules: Line1 - Dynamic		
An immediately available prearranged barrier of fire designed to impede enemy movement across defensive lines or areas. The line information will be posted once at the center of the line as it is displayed on the screen.		
Area Targets Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 240800	Reserved for hierarchical purposes.	N/A
Area Target Type: Entity Subtype Entity/Entity Type: Fire Areas/Area Targets Symbol Set: 25 Value: 240801 Draw Rules: Area1 - Dynamic		
Rectangular Target Type: Entity Subtype Entity/Entity Type: Fire Areas/Area Targets Symbol Set: 25 Value: 240802 Draw Rules: Rectangular1 - Dynamic		
Orientation is determined by the Target Attitude (in mils).		


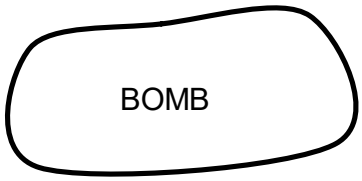


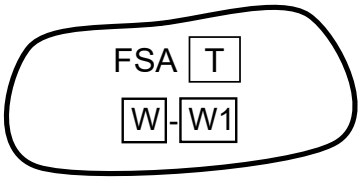
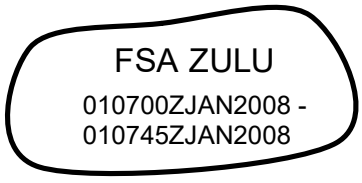
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Circular Target Type: Entity Subtype Entity/Entity Type: Fire Areas/Area Targets Symbol Set: 25 Value: 240803 Draw Rules: Circular1 - Dynamic		
Series or Group of Targets Type: Entity Subtype Entity/Entity Type: Fire Areas/Area Targets Symbol Set: 25 Value: 240805 Draw Rules: Area1 – Dynamic **Note**: The area will encompass two or more fire support symbols (point/single target, nuclear target, circular target, rectangular target, or area target). The naming convention determines whether the area describes a series or group of targets.	 In artillery and naval fire support, a number of targets and/or group(s) of targets planned to support a maneuver phase. A series of targets may be indicated by a nickname. A group of targets is designated by a letter/number combination or a nickname.	 Point Targets  Linear Targets  Area Targets
Smoke Type: Entity Subtype Entity/Entity Type: Fire Areas/Area Targets Symbol Set: 25 Value: 240806 Draw Rules: Area1 - Dynamic		  Planned

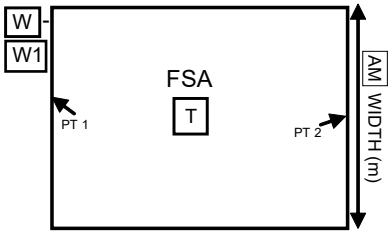
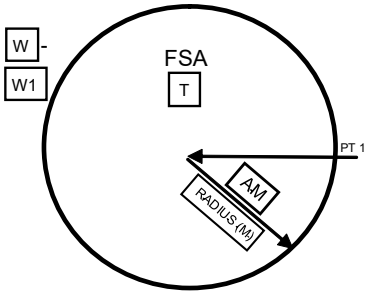

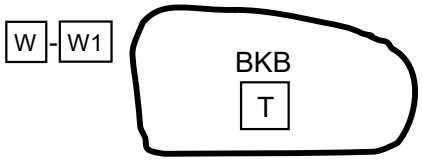
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Bomb Area Type: Entity Subtype Entity/Entity Type: Fire Areas/Area Targets Symbol Set: 25 Value: 2408**08** Draw Rules: Area1 - Dynamic		
Naval Gunfire		
Fire Support Station Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**09**00 Draw Rules: Point2 – Static		
	An exact location at sea within a fire support area from which a fire support ship delivers fire.	
Fire Support Area An appropriate maneuver area assigned to fire support ships by the naval force commander from which they can deliver gunfire support to an amphibious operation. Also called FSA. (JP 3-09)		
Fire Support Area Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**10**00	Reserved for hierarchical purposes.	N/A
Fire Support Area - Irregular Type: Entity Subtype Entity/Entity Type: Fire Area/Fire Support Area Symbol Set: 25 Value: 2410**01** Draw Rules: Area1 - Dynamic		

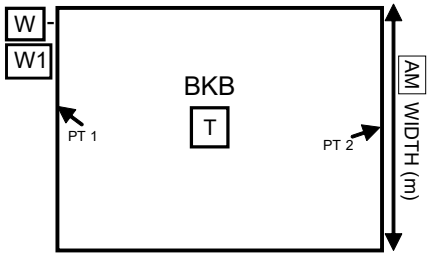

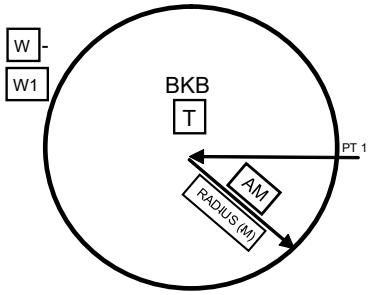



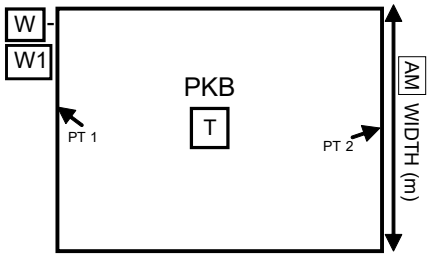

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Fire Support Area - Rectangular Type: Entity Subtype Entity/Entity Type: Fire Area/Fire Support Area Symbol Set: 25 Value: 241**02** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	010700ZJAN2008 - 010745ZJAN2008 
Fire Support Area - Circular Type: Entity Subtype Entity/Entity Type: Fire Area/Fire Support Area Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		010700ZJAN2008 - 010745ZJAN2008 
Kill Box A three-dimensional permissive fire support coordination measure with an associated airspace coordinating measure used to facilitate the integration of fires. (JP 3-09)		
Kill Box Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**23**00	Reserved for hierarchical purposes.	N/A
Blue Kill Box, Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Kill Box Symbol Set: 25 Value: 2423**01** Draw Rules: Area10 - Dynamic		020300ZDEC2018 - 090500ZDEC2018 


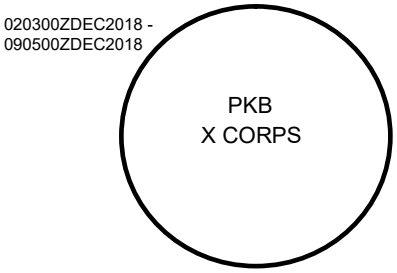






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Blue Kill Box, Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Kill Box Symbol Set: 25 Value: 242302 Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	020300ZDEC2018 - 090500ZDEC2018 
Blue Kill Box, Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Kill Box Symbol Set: 25 Value: 242303 Draw Rules: Circular1 - Dynamic		020300ZDEC2018 - 090500ZDEC2018 
Purple Kill Box, Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Kill Box Symbol Set: 25 Value: 242304 Draw Rules: Area10 - Dynamic		020300ZDEC2018 - 090500ZDEC2018 
Purple Kill Box, Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Kill Box Symbol Set: 25 Value: 242305 Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	020300ZDEC2018 - 090500ZDEC2018 









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Purple Kill Box, Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Kill Box Symbol Set: 25 Value: 242306 Draw Rules: Circular1 - Dynamic		
Kill Zone Type: Entity Subtype Entity/Entity Type: Fire Areas/Kill Box Symbol Set: 25 Value: 242800 Draw Rules: Area1 - Dynamic	 Anchor points are to be connected with straight lines.	
Field Artillery		
Fires Points Type: Entity Symbol Set: 25 Value: 250000	Reserved for hierarchical purposes.	N/A
Firing Point Type: Entity Type Entity Fires Points Symbol Set: 25 Value: 250100 Draw Rules: Point1 – Static		
Hide Point Type: Entity Type Entity Fires Points Symbol Set: 25 Value: 250200 Draw Rules: Point1 – Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIV. Target symbols – Continued.


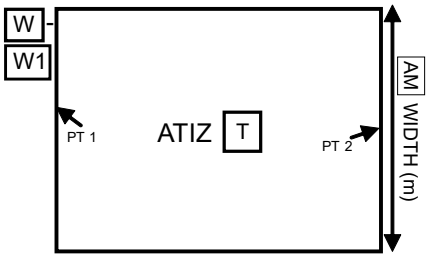

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Launch Point Type: Entity Type Entity Fires Points Symbol Set: 25 Value: 25**03**00 Draw Rules: Point1 – Static		
Reload Point Type: Entity Type Entity Fires Points Symbol Set: 25 Value: 25**04**00 Draw Rules: Point1 – Static		
Survey Control Point Type: Entity Type Entity Fires Points Symbol Set: 25 Value: 25**05**00 Draw Rules: Point1 – Static		
Known Point Type: Entity Type Entity Fires Points Symbol Set: 25 Value: 25**06**00 Draw Rules: Point2 – Static	 A point known to both the observer and the FDC and recorded or plotted in the FDC. (ATP 3-09.30)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.18 Target acquisition.

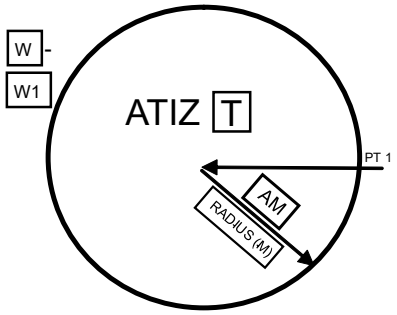


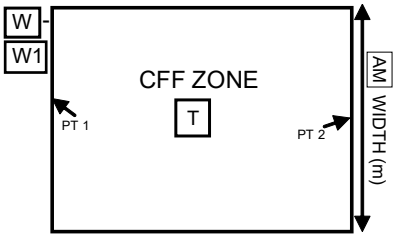
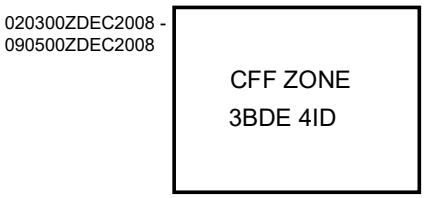
L.5.18.1 Target acquisition. The detection, identification and location of a target in sufficient detail to permit the effective employment of weapons.

TABLE L-XV. Target acquisition symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Artillery Target Intelligence Zone (ATIZ) Type: Entity Type Entity: Fire Areas Symbol Set: 25 Value: 24**11**00	Reserved for hierarchical purposes.	N/A
Artillery Target Intelligence Zone (ATIZ), Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Artillery Target Intelligence Zone Symbol Set: 25 Value: 2411**01** Draw Rules: Area10 - Dynamic	 An area in enemy territory that the commander wishes to monitor closely.	
Artillery Target Intelligence Zone (ATIZ), Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Artillery Target Intelligence Zone Symbol Set: 25 Value: 2411**02** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	

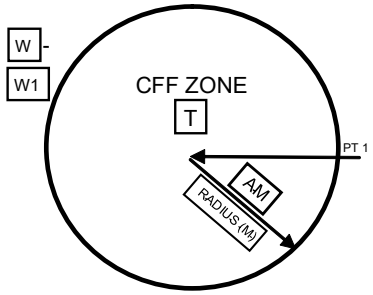





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Artillery Target Intelligence Zone (ATIZ), Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Artillery Target Intelligence Zone Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		
Call For Fire Zone (CFFZ) Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**12**00	Reserved for hierarchical purposes.	N/A
Call For Fire Zone (CFFZ), Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Call For Fire Zone Symbol Set: 25 Value: 241**201** Draw Rules: Area10 - Dynamic	 A radar search area from which the commander wants to attack hostile firing systems. (FM 1-02.1/FM 3-09)	
Call For Fire Zone (CFFZ), Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Call For Fire Zone Symbol Set: 25 Value: 241**202** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Call For Fire Zone (CFFZ), Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Call For Fire Zone Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		020300ZDEC2008 - 090500ZDEC2008 
Censor Zone Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**13**00	Reserved for hierarchical purposes.	N/A
	An area from which weapons locating radar is prohibited from reporting acquisitions. (FM 3-09)	
Censor Zone, Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Censor Zone Symbol Set: 25 Value: 241**01** Draw Rules: Area10 - Dynamic		020300ZDEC2008 - 090500ZDEC2008 
Censor Zone, Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Censor Zone Symbol Set: 25 Value: 241**02** Draw Rules: Rectangular1 - Dynamic		020300ZDEC2018 - 090500ZDEC2018 
	Orientation is determined by the anchor points.	


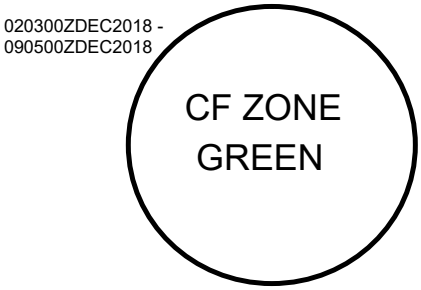


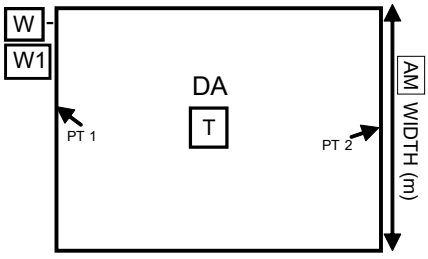
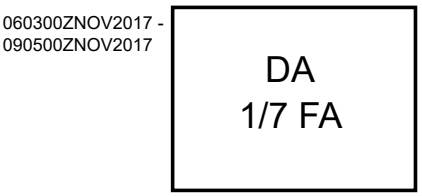
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Censor Zone, Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Censor Zone Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		020300ZDEC2018 - 090500ZDEC2018 
Critical Friendly Zone (CFZ) Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**14**00	Reserved for hierarchical purposes.	N/A
Critical Friendly Zone (CFZ), Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Critical Friendly Zone Symbol Set: 25 Value: 241**401** Draw Rules: Area10 - Dynamic	 An area, usually a friendly unit or location that the maneuver commander designates as critical to the protection of an asset whose loss would seriously jeopardize the mission.	020300ZDEC2018 - 090500ZDEC2018 
Critical Friendly Zone (CFZ), Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Critical Friendly Zone Symbol Set: 25 Value: 241**402** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	020300ZDEC2018 - 090500ZDEC2018 

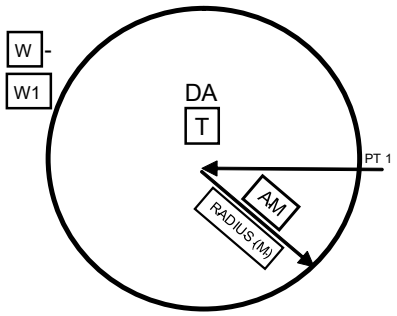





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Critical Friendly Zone (CFZ), Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Critical Friendly Zone Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		
Dead Space Area Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**15**00	Reserved for hierarchical purposes.	N/A
Dead Space Area, Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Dead Space Area Symbol Set: 25 Value: 2415**01** Draw Rules: Area10 - Dynamic	 An area where hostile weapons cannot be detected.	
Dead Space Area, Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Dead Space Area Symbol Set: 25 Value: 2415**02** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Dead Space Area, Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Dead Space Area Symbol Set: 25 Value: 241**503** Draw Rules: Circular1 – Dynamic		060300ZNOV2017 - 090500ZNOV2017 
Target Build-up Area Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**1**700	Reserved for hierarchical purposes.	N/A
Target Build-up Area, Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Target Value Area Symbol Set: 25 Value: 2417**01** Draw Rules: Area10 - Dynamic		020300ZDEC2018 - 090500ZDEC2018 
Target Build-up Area, Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Target Value Area Symbol Set: 25 Value: 2417**02** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	020300ZDEC2008 - 090500ZDEC2008 


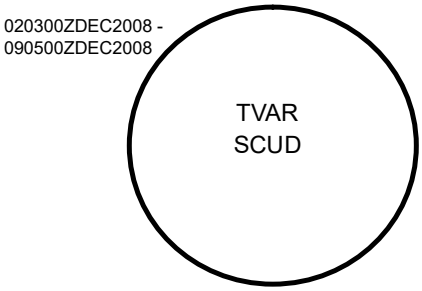


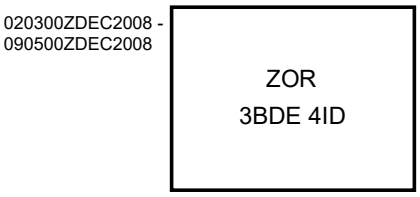
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Target Build-up Area, Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Target Value Area Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		020300ZDEC2008 - 090500ZDEC2008 
Target Value Area Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**18**00	Reserved for hierarchical purposes.	N/A
Target Value Area, Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Target Value Area Symbol Set: 25 Value: 2418**01** Draw Rules: Area10 - Dynamic		020300ZDEC2008 - 090500ZDEC2008 
Target Value Area, Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Target Value Area Symbol Set: 25 Value: 2418**02** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	020300ZDEC2008 - 090500ZDEC2008 

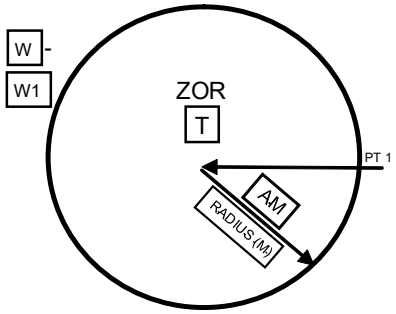
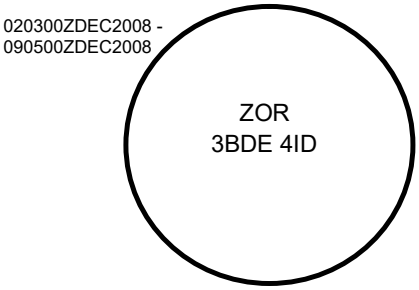
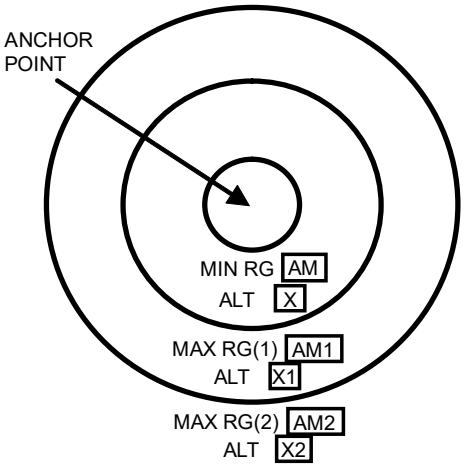
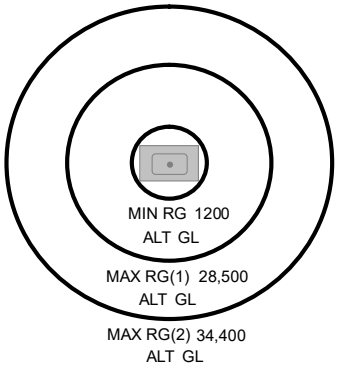
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Target Value Area, Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Target Value Area Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		
Zone of Responsibility Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**19**00	N/A	N/A
Zone of Responsibility, Irregular Type: Entity Subtype Entity/Entity Type: Fire Areas/Zone of Responsibility Symbol Set: 25 Value: 2419**01** Draw Rules: Area10 - Dynamic		
Zone of Responsibility, Rectangular Type: Entity Subtype Entity/Entity Type: Fire Areas/Zone of Responsibility Symbol Set: 25 Value: 2419**02** Draw Rules: Rectangular1 - Dynamic	 Orientation is determined by the anchor points.	

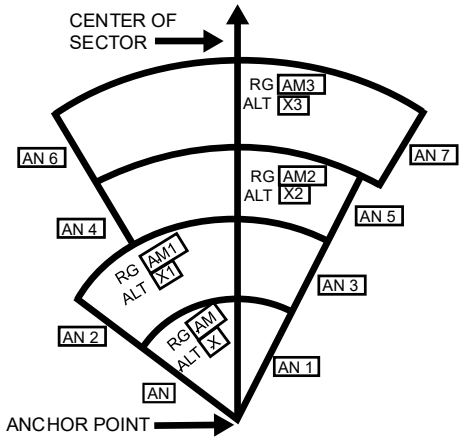
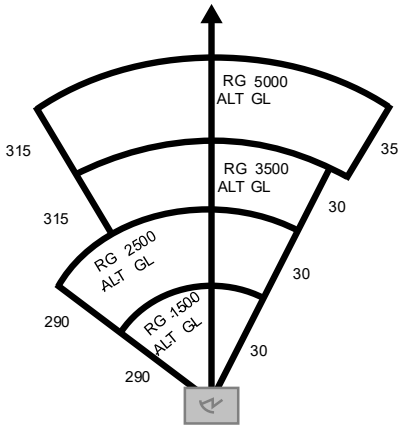
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Zone of Responsibility, Circular Type: Entity Subtype Entity/Entity Type: Fire Areas/Zone of Responsibility Symbol Set: 25 Value: 241**03** Draw Rules: Circular1 - Dynamic		
Terminally Guided Munition Footprint (TGMF) Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**20**00 Draw Rules: Area10 - Dynamic		
Weapon/Sensor Range fan, Circular Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**21**00 Draw Rules: Circular2 - Dynamic **Orientation:** The center point is typically centered over the known location of a weapon or sensor system.	 The display of distance and altitude numerical values is not required. An altitude of zero indicates surface level.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XV. Target acquisition symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Weapon/Sensor Range fan, Sector Type: Entity Type Entity: Fire Area Symbol Set: 25 Value: 24**2**200 Draw Rules: Arc1 - Dynamic **Orientation:** The center point is typically centered over the known location of a weapon or sensor system. The orientation may change as the object moves or changes.		
	Minimum and maximum distances (ranges), center of sector, left and right sector limits, and altitude may be displayed if desired but are not required to be displayed. An altitude of zero indicates surface level.	

L.5.19 Obstacles.






L.5.19.1 Obstacles. Natural or man-made restrictions to movement which will impose delay, and which will normally require specific equipment or munitions to overcome. Obstacles are normally shown in green. If color is not available, they are to be shown in black. Regardless of whether green or black is used for color, ENY shall be used.

TABLE L-XVI. Obstacle symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Protection Areas Type: Entity Symbol Set: 25 Value: **2**70000	Reserved for hierarchical purposes.	N/A


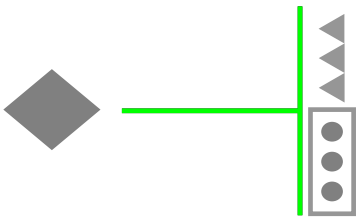

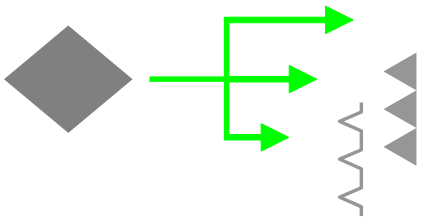
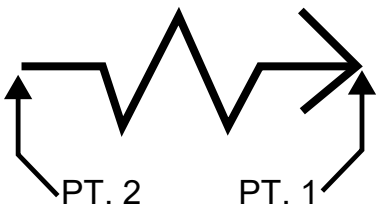
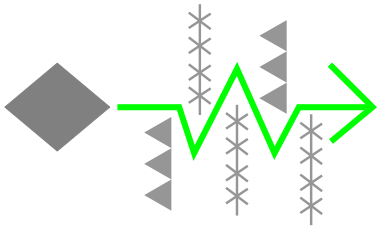
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Obstacle Belt Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 270100 Draw Rules: Area1 - Dynamic		
	An area designated at brigade level in which barrier operations are focused.	
Obstacle Zone Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 270200 Draw Rules: Area1 - Dynamic		
	An area designated at corps or division level in which barrier operations are focused. It may be subdivided, below division, into a number of obstacle belts.	
Obstacle Free Zone Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 270300 Draw Rules: Area1 - Dynamic		
Obstacle Restricted Zone Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 270400 Draw Rules: Area1 - Dynamic		
Obstacle Effects Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 270500	Reserved for hierarchical purposes.	N/A







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Block Type: Entity Subtype Entity/Entity Type: Protection Areas/Obstacle Effects Symbol Set: 25 Value: 270501 Draw Rules: Area11 – Dynamic		
	An obstacle effect that integrates fire planning and obstacle effort to stop an attacker along a specific avenue of approach or to prevent him from passing through an engagement area. **Orientation:** The head of the "T" typically faces obstacle(s) affecting maneuver forces. The horizontal line is the limit of the enemy advance, and the vertical line indicates where obstacles tie into terrain that is untrafficable.	
Disrupt Type: Entity Subtype Entity/Entity Type: Protection Areas/Obstacle Effects Symbol Set: 25 Value: 270502 Draw Rules: Area12 - Dynamic **Orientation:** The arrows point away from enemy forces.		
	An obstacle effect that focuses fire planning and obstacle effort to cause the enemy to break up their formation and tempo, interrupt their timetable, commit breaching assets prematurely and attack in a piecemeal effort. • Short arrow indicates where enemy is disrupted by obstacles. • Longer arrows indicate where movement is allowed, and enemy is attacked by fires.	
Fix Type: Entity Subtype Entity/Entity Type: Protection Areas/Obstacle Effects Symbol Set: 25 Value: 270503 Draw Rules: Line9 - Dynamic		
	An obstacle effect that focuses fire planning and obstacle effort to slow an attacker's movement within a specified area, normally an engagement area. From the tip of the arrow to the back of the irregular part of the symbol indicates where enemy advance is slowed by obstacles.	






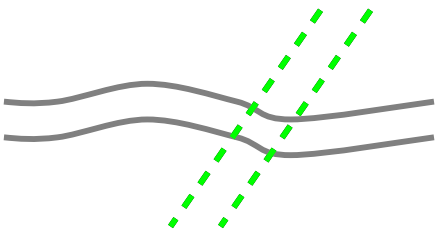
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Turn Type: Entity Subtype Entity/Entity Type: Protection Areas/Obstacle Effects Symbol Set: 25 Value: 270504 Draw Rules: Line10 - Dynamic		
An obstacle effect that integrates fire planning and obstacle effort to drive an enemy formation from one avenue of approach to an adjacent avenue of approach or into an engagement area. **Orientation:** The rear of the symbol identifies the enemy's location and the arrow points in the direction the obstacle should force the enemy to turn.		
Obstacle Bypass Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 270600	Reserved for hierarchical purposes.	N/A
Obstacle Bypass Easy Type: Entity Subtype Entity/Entity Type: Protection Areas/Obstacle Bypass Symbol Set: 25 Value: 270601 Draw Rules: Point12 - Dynamic		
The opening typically faces the applicable obstacle.		
Obstacle Bypass Difficult Type: Entity Subtype Entity/Entity Type: Protection Areas/Obstacle Bypass Symbol Set: 25 Value: 270602 Draw Rules: Point12 – Dynamic		
The opening typically faces the applicable obstacle.		


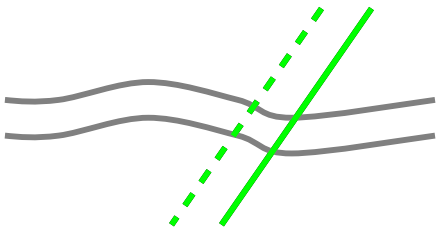

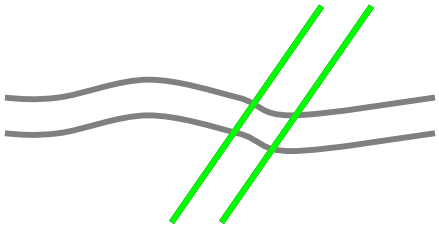

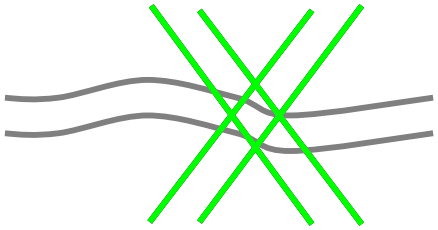
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Obstacle Bypass Impossible Type: Entity Subtype Entity/Entity Type: Protection Areas/Obstacle Bypass Symbol Set: 25 Value: 270**603** Draw Rules: Point12 - Dynamic		
	The opening typically faces the applicable obstacle.	
Bridge or Gap Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271**1**00 Draw Rules: Line11 - Dynamic		
	An area within a minefield or obstacle belt, free of live mines or obstacles, whose width and direction will allow a friendly force to pass through in tactical formation.	
Roadblocks, Craters and Blown Bridges Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271**2**00	Reserved for hierarchical purposes.	N/A
	Crater obstacle – An obstacle consisting of one or more craters, created normally in a roadway using demolitions. **Orientation:** Determined by the anchor points.	
Planned Type: Entity Subtype Entity/Entity Type: Protection Areas/Roadblocks, Craters and Blown Bridges Symbol Set: 25 Value: 2712**01** Draw Rules: Line12 - Dynamic		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Explosives, State of Readiness 1 (Safe) Type: Entity Subtype Entity/Entity Type: Protection Areas/Roadblocks, Craters and Blown Bridges Symbol Set: 25 Value: 271**02** Draw Rules: Line12 - Dynamic		
Explosives, State of Readiness 2 (armed but passable) Type: Entity Subtype Entity/Entity Type: Protection Areas/Roadblocks, Craters and Blown Bridges Symbol Set: 25 Value: 271**03** Draw Rules: Line12 - Dynamic		
Roadblock Complete (Executed) Type: Entity Subtype Entity/Entity Type: Protection Areas/Roadblocks, Craters and Blown Bridges Symbol Set: 25 Value: 271**04** Draw Rules: Line12 - Dynamic		
Protection Points Type: Entity Symbol Set: 25 Value: **28**0000	Reserved for hierarchical purposes.	N/A





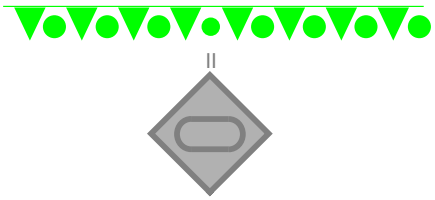
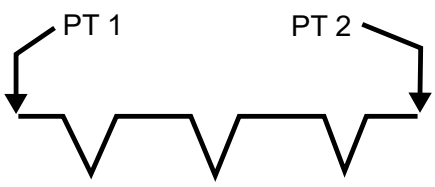
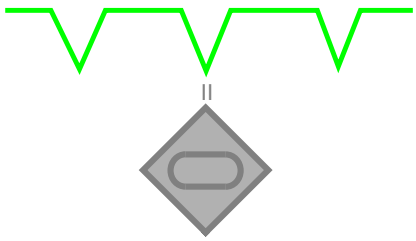
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Abatis Type: Entity Type Entity: Protection Points Symbol Set: 25 Value: 28**01**00 Draw Rules: Line1 - Dynamic		
	An obstacle constructed by the felling and interlacing of trees across a route. Orientation is determined by the anchor points.	
Protection Lines Type: Entity Symbol Set: 25 Value: **29**0000	Reserved for hierarchical purposes.	N/A
Obstacle Line Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**01**00 Draw Rules: Line1 - Dynamic		
	A conceptual control measure used at battalion or brigade level to show placement intent without specifying a particular type of linear obstacle.	
Mineline Type: Entity Subtype Entity/Entity Type: Protection Lines/Obstacle Line Symbol Set: 25 Value: 2901**01** Draw Rules: Line1 - Dynamic		 
Antitank Obstacles Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**02**00	Reserved for hierarchical purposes.	N/A
	A ditch which is impassable to vehicles unaided. It may be prepared using machinery or explosives.	



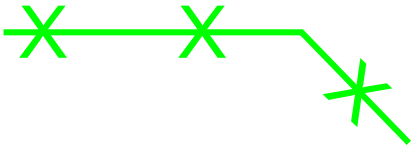

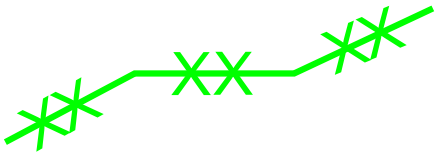
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Ditch – Under Construction Type: Entity Subtype Entity/Entity Type: Protection Lines/ Antitank Obstacles Symbol Set: 25 Value: 290**201** Draw Rules: Line1 - Dynamic		
Ditch – Completed Type: Entity Subtype Entity/Entity Type: Protection Lines/ Antitank Obstacles Symbol Set: 25 Value: 290**202** Draw Rules: Line1 - Dynamic		
Ditch Reinforced, with Antitank Mines Type: Entity Subtype Entity/Entity Type: Protection Lines/ Antitank Obstacles Symbol Set: 25 Value: 290**203** Draw Rules: Line1 - Dynamic		
	The teeth typically point toward enemy forces.	
Antitank Wall Type: Entity Subtype Entity/Entity Type: Protection Lines/ Antitank Obstacles Symbol Set: 25 Value: 290**204** Draw Rules: Line1 - Dynamic		
	The teeth typically point toward enemy forces.	




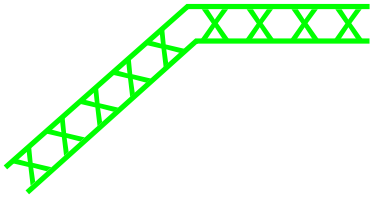


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Wire Obstacles Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**03**00	Reserved for hierarchical purposes.	N/A
Unspecified Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 2903**01** Draw Rules: Line1 - Dynamic		
Single Fence Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 2903**02** Draw Rules: Line1 - Dynamic		
Double Fence Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 2903**03** Draw Rules: Line1 - Dynamic		


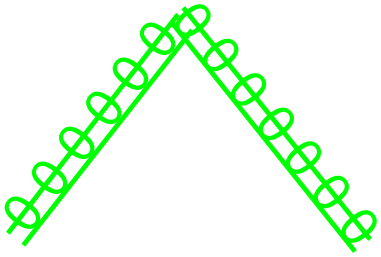




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Double Apron Fence Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 290304 Draw Rules: Line1 - Dynamic		
Low Wire Fence Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 290305 Draw Rules: Line1 - Dynamic		
High Wire Fence Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 290306 Draw Rules: Line1 - Dynamic		
Single Concertina Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 290307 Draw Rules: Line1 - Dynamic		

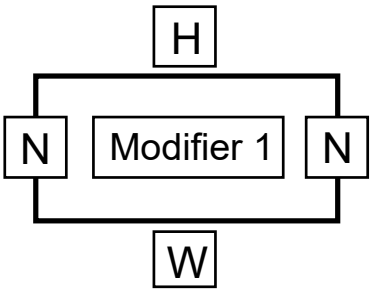
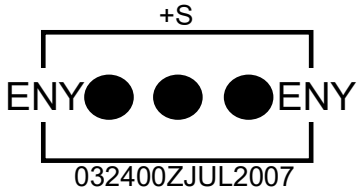





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Double Strand Concertina Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 290**308** Draw Rules: Line1 - Dynamic		
Triple Strand Concertina Type: Entity Subtype Entity/Entity Type: Protection Lines/Wire Obstacles Symbol Set: 25 Value: 290**309** Draw Rules: Line1 - Dynamic		
Lane Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**06**00 Draw Rules: Line14 - Dynamic A route through an enemy or friendly obstacle that provides a passing force safe passage.		
	The arrowheads will be filled-in versions of a common arrowhead.	
Minefield Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 27**07**00	Reserved for hierarchical purposes.	N/A
	In land mine warfare, a defined area in which mines have been emplaced.	

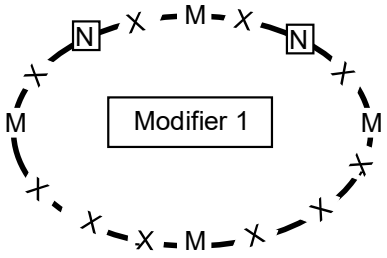


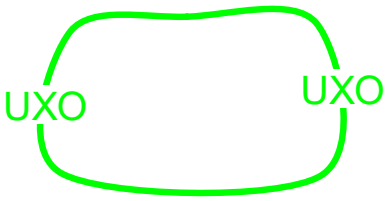




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Static Depiction Type: Entity Subtype Entity/Entity Type: Protection Areas/Minefield Symbol Set: 25 Value: 270**701** Draw Rules: Point2 – Static		Monochrome  Color 
	Example depicts a minefield reinforced with scatterable mines and is depicted using "+S" in the Additional information "H" amplifier field.	
Dynamic Depiction Type: Entity Subtype Entity/Entity Type: Protection Areas/Minefield Symbol Set: 25 Value: 270**707** Draw Rules: Area1 - Dynamic		
Mined Area Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 27**08**00 Draw Rules: Area1 - Dynamic		
	An area which is dangerous because of the presence or suspected presence of mines.	





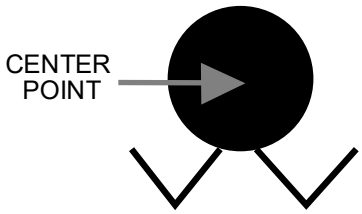

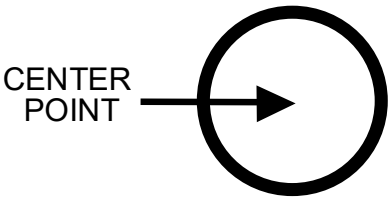

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Mined Area, Fenced Type: Entity Subtype Entity/Entity Type: Protection Areas/Mine Area Symbol Set: 25 Value: 270800 Draw Rules: Area1 - Dynamic		
Unexploded Explosive Ordnance (UXO) Area Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271000 Draw Rules: Area1 - Dynamic		
Antipersonnel Mine Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 280200 Draw Rules: Point2 – Static	 In land mine warfare, a mine designed to be exploded by the presence, proximity or contact of a person and that will incapacitate, wound or kill one or more persons.	
Antipersonnel Mine with Directional Effects Type: Entity Subtype Entity/Entity Type: Protection Points/Antipersonnel Mine Symbol Set: 25 Value: 280201 Draw Rules: Point2 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Antitank Mine Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**03**00 Draw Rules: Point2 – Static		
	A mine designed to immobilize or destroy a tank.	
Antitank Mine with Anti-handling Device Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**04**00 Draw Rules: Point2 – Static		
	A device intended to protect a mine and which is part of, linked to, attached to or placed under the mine and which activates when an attempt is made to tamper with or otherwise intentionally disturb the mine.	
Wide Area Antitank Mine Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**05**00 Draw Rules: Point2 – Static		
	An antitank mine that detects and acquires targets then launches submunition(s) that attacks the top of the targets.	
Unspecified Mine Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**06**00 Draw Rules: Point2 – Static		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Booby Trap Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**0**700 Draw Rules: Point2 – Static		
	A device designed, constructed or adapted to kill or injure, which functions when a person disturbs or approaches an apparently harmless object or performs an apparently safe act.	
Tetrahedrons, Dragons Teeth, and Other Similar Obstacles Type: Entity Type Entity: Protection Points Symbol Set: 25 Value: 28**1**900 Draw Rules: Point7 - Static	Reserved for hierarchical purposes.	N/A
Fixed and Prefabricated Type: Entity Subtype Entity/Entity Type: Protection Points/ Tetrahedrons, Dragons Teeth, and Other Similar Obstacles Symbol Set: 25 Value: 2819**01** Draw Rules: Point7 - Static		
Movable Type: Entity Subtype Entity/Entity Type: Protection Points/ Tetrahedrons, Dragons Teeth, and Other Similar Obstacles Symbol Set: 25 Value: 2819**02** Draw Rules: Point7 - Static		




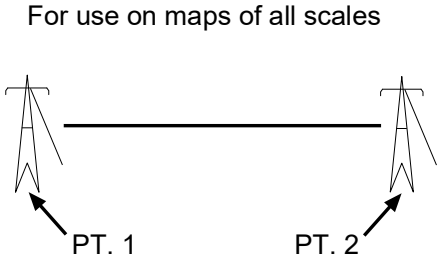
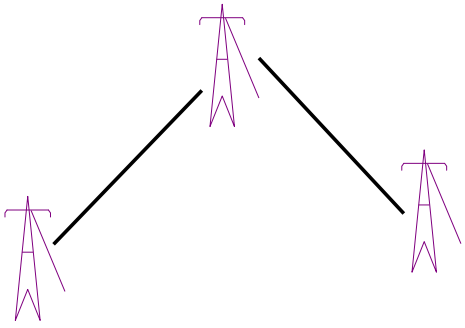
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Movable and Prefabricated Type: Entity Subtype Entity/Entity Type: Protection Points/ Tetrahedrons, Dragons Teeth, and Other Similar Obstacles Symbol Set: 25 Value: 281**03** Draw Rules: Point7 - Static		
Mine Cluster Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**04**00 Draw Rules: Area13 - Dynamic	 The dashed lines in this symbol shall be displayed in present and anticipated status.	
Trip Wire Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**05**00 Draw Rules: Line1 – Dynamic	 Orientation is determined by the anchor points. The Trip Wire color shall match the Standard Identity	
Vertical Obstructions Type: Entity Type Entity: Protection Points Symbol Set: 25 Value: 28**20**00	Reserved for hierarchical purposes.	N/A









Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Tower, Low Type: Entity Subtype Entity/Entity Type: Protection Points/ Vertical Obstructions Symbol Set: 25 Value: 282**01** Draw Rules: Point16 - Dynamic **Color**: Purple (RGB 128,0,128)		
Towers less than 1000 Ft AGL. **Orientation:** The symbol will remain upright.		
Tower, High Type: Entity Subtype Entity/Entity Type: Protection Points/ Vertical Obstructions Symbol Set: 25 Value: 282**02** Draw Rules: Point16 - Dynamic **Color**: Purple (RGB 128,0,128)		
Towers 1000 Ft and Higher AGL. **Orientation:** The symbol will remain upright.		
Overhead Wire Type: Entity Subtype Entity/Entity Type: Protection Points/ Vertical Obstructions Symbol Set: 25 Value: 282**03** Draw Rules: Line1 – Dynamic **Color**: Purple (RGB 128,0,128)		





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Water Crossing Site The location of a single bridge or rafting site, or in an initial assault a site for the crossing of assault boats, or for the swimming or fording of vehicles on a broad front.		
Assault Crossing Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271300 Draw Rules: Line16 - Dynamic		
Ford Easy Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271500 Draw Rules: Line17 - Dynamic	 Orientation is determined by the anchor points.	
Ford Difficult Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271600 Draw Rules: Line17 - Dynamic	 Orientation is determined by the anchor points.	
Engineer Regulating Point Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 280800 Draw Rules: Point1 – Static	 Checkpoint to ensure that vehicles do not exceed the capacity of the crossing means and to give drivers final instructions on site-specific procedures and information, such as speed and vehicle interval. **Orientation**: The symbol will typically be oriented upright	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

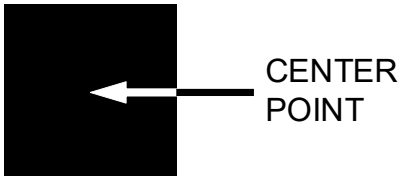
TABLE L-XVI. Obstacle symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Ferry Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**07**00 Draw Rules: Line14 - Dynamic		
	The arrowheads will be filled-in versions of a common arrowhead.	
Raft Site Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**08**00 Draw Rules: Line14 - Dynamic		
	The arrowheads will be filled-in versions of a common arrowhead.	

L.5.20 Field fortification symbols.

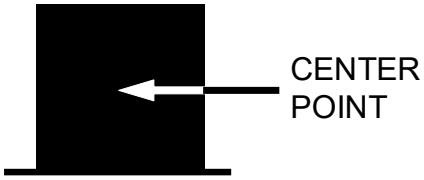

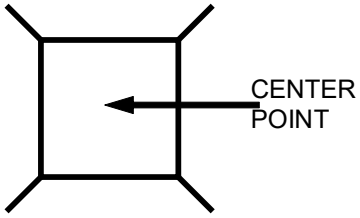

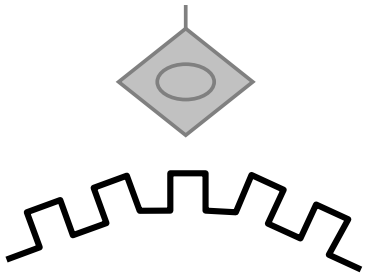
L.5.20.1 Field fortification. Is an emplacement or shelter of a temporary nature which can be constructed with reasonable facility by units requiring no more than minor engineer supervisory and equipment participation.

TABLE L-XVII. Field fortification symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Shelter Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**09**00 Draw Rules: Point2 – Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVII. Field fortification symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Above Ground Shelter Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**1**000 Draw Rules: Point2 – Static		
Below Ground Shelter Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**1**100 Draw Rules: Point2 – Static		
Fort Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**1**200 Draw Rules: Point2 – Static		
Fortified Line Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**0**900 Draw Rules: Line1 - Dynamic	 The ramparts typically point toward enemy forces.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.


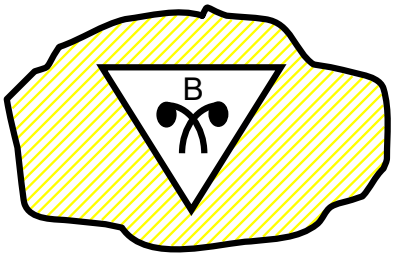
TABLE L-XVII. Field fortification symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Fighting Position Type: Entity Type Entity: Protection Lines Symbol Set: 25 Value: 29**1**000 Draw Rules: Line19 - Dynamic		
	Orientation is determined by the anchor points and typically faces enemy forces	

L.5.21 CBRN defense control measures and planning symbols.



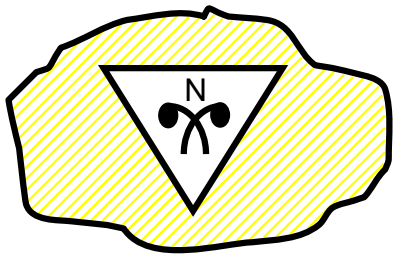
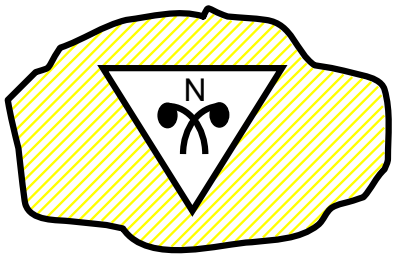


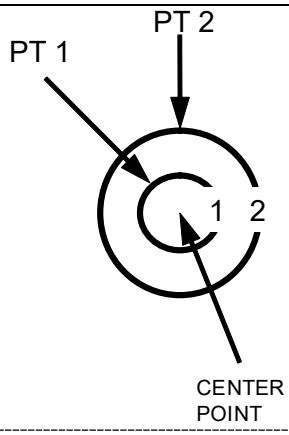

L.5.21.1 CBRN defense. These control measures and planning symbols depict those conditions found in an area resulting from immediate or persisting effects of chemical, biological, radiological or nuclear attacks or events (release other than attack).

TABLE L-XVIII. CBRN defense control measures and planning symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Contaminated Areas		
Biological Contaminated Area Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 27**1**700 Draw Rules: Area1 - Dynamic		

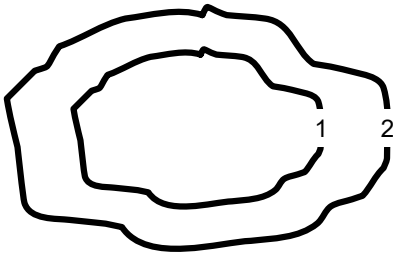

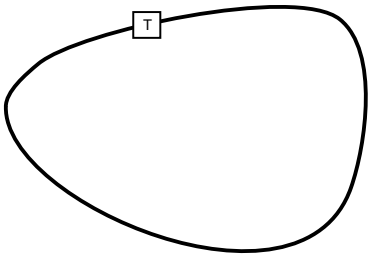
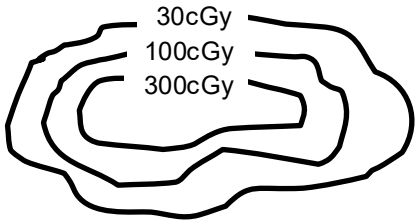



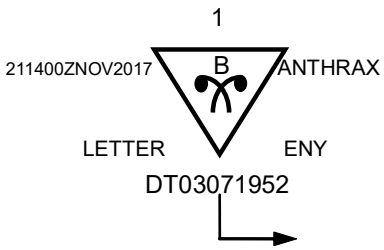
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVIII. CBRN defense control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Chemical Contaminated Area Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271**8**00 Draw Rules: Area1 - Dynamic		
Nuclear Contaminated Area Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 271**9**00 Draw Rules: Area1 - Dynamic		
Radiological Contaminated Area Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 272**0**00 Draw Rules: Area1 - Dynamic		
Minimum Safe Distance Zone Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 272**1**00 Draw Rules: Area14 - Dynamic	 The center point is typically centered over Ground Zero (GZ) or Designated Ground Zero (DGZ).	




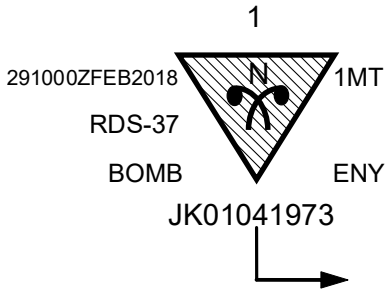




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVIII. CBRN defense control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Multiple Strike - (STRIKWARN) Type: Entity Subtype Entity/Entity Type: Protection Areas/Minimum Safe Distance Symbol Set: 25 Value: 272**01** Draw Rules: Area26 - Static		
	The symbol will typically be oriented upright.	
Radiation Dose Rate Contour Line Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 272**2**00 Draw Rules: Area1 - Dynamic		
	A line on a map, diagram or overlay joining all points at which the radiation dose rate at a given time is the same.	
Chemical Event Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**13**00 Draw Rules: Point7 - Static		
Biological Event Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**14**00 Draw Rules: Point7 - Static		


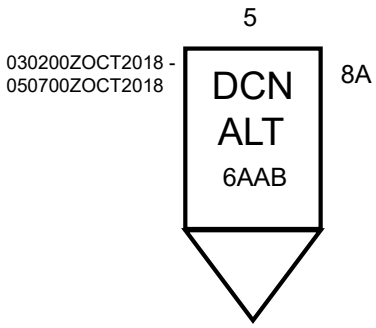

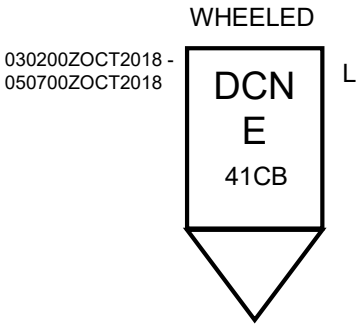

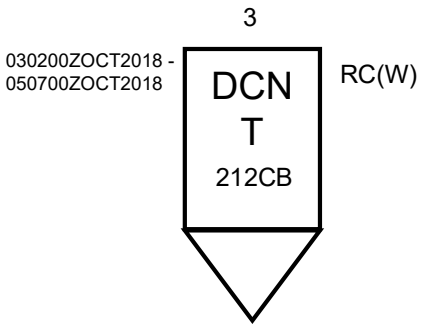
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVIII. CBRN defense control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Nuclear Event Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**1**500 Draw Rules: Point7 - Static		
Nuclear Fallout Producing Event Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**1**600 Draw Rules: Point7 - Static		
Radiological Event Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**1**700 Draw Rules: Point7 - Static		
Decontamination Points/Sites		
General De-contamination Point/Site Type: Entity Type Entity: Protection Areas Symbol Set: 25 Value: 28**1**800 Draw Rules: Point1 – Static		


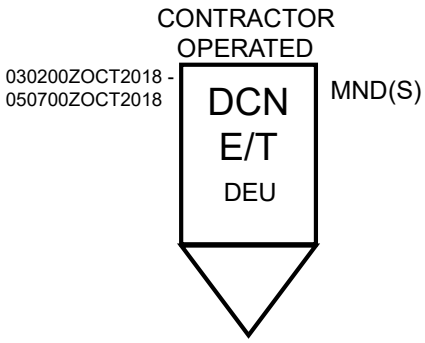

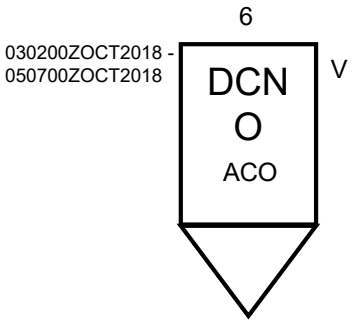


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVIII. CBRN defense control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Alternate De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 2818**01** Draw Rules: Point1 – Static		
Equipment De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 2818**02** Draw Rules: Point1 – Static		
Troop De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 2818**03** Draw Rules: Point1 – Static		




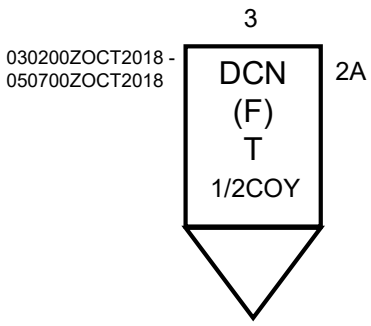

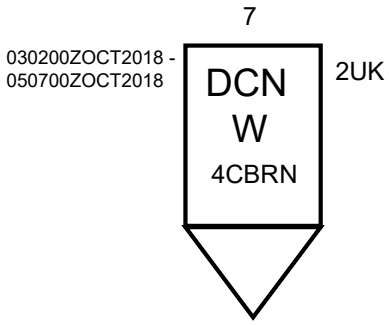
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVIII. CBRN defense control measures and planning symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Equipment / Troop De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 281**04** Draw Rules: Point1 – Static		
Operational De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 281**05** Draw Rules: Point1 – Static		
Thorough De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 281**06** Draw Rules: Point1 – Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XVIII. CBRN defense control measures and planning symbols - Continued.





DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Main Equipment De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 281**07** Draw Rules: Point1 – Static		
Forward Troop De-contamination Point/Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 281**08** Draw Rules: Point1 – Static		
Wounded Personnel De-contamination Site Type: Entity Subtype Entity/Entity Type: Protection Points/General Decontamination Point/Site Symbol Set: 25 Value: 281**09** Draw Rules: Point1 – Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.22 Sustainment symbols.






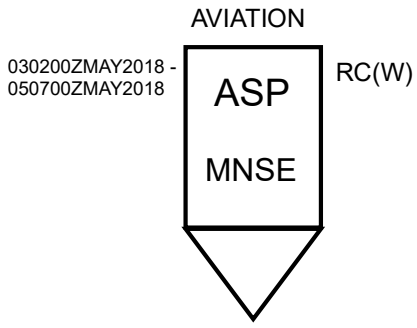
L.5.22.1 Sustainment symbols. The provision of logistics and personnel services required to maintain and prolong operations until successful mission accomplishment.

TABLE L-XIX. Sustainment point symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Sustainment Points Type: Entity Symbol Set: 25 Value: **32**0000	Reserved for hierarchical purposes.	N/A
Ambulance Points Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**01**00	Reserved for hierarchical purposes.	N/A
Ambulance Exchange Point Type: Entity Subtype Entity/Entity Type: Sustainment Points/Ambulance Points Symbol Set: 25 Value: 3201**01** Draw Rules: Point1 – Static	 A location where a patient is transferred from one ambulance to another en-route to a medical treatment facility. (ATP 4-02.2)	
Ambulance Control Point Type: Entity Subtype Entity/Entity Type: Sustainment Points/Ambulance Points Symbol Set: 25 Value: 3201**02** Draw Rules: Point1 – Static	 A point where ambulances may take one of two or more directions to reach loading points. (ATP 4-02.2)	




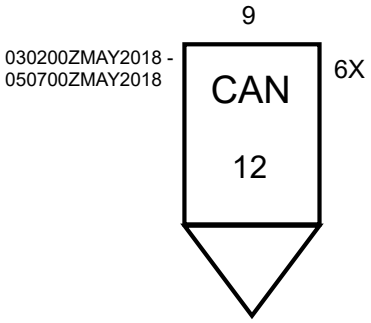

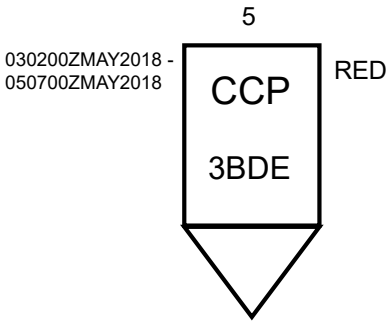
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIX. Sustainment point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Ambulance Load Point Type: Entity Subtype Entity/Entity Type: Sustainment Points/Ambulance Points Symbol Set: 25 Value: 320**103** Draw Rules: Point1 – Static		
A point where one or more ambulances are stationed ready to receive patients for evacuation. (ATP 4-02.2)		
Ambulance Relay Point Type: Entity Subtype Entity/Entity Type: Sustainment Points/Ambulance Points Symbol Set: 25 Value: 320**104** Draw Rules: Point1 – Static		
A point where one or more empty ambulances are stationed. (ATP 4-02.2)		
Ammunition Supply Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**02**00 Draw Rules: Point1 – Static		
An area designated to receive, store, reconfigure and issue Class V material.		




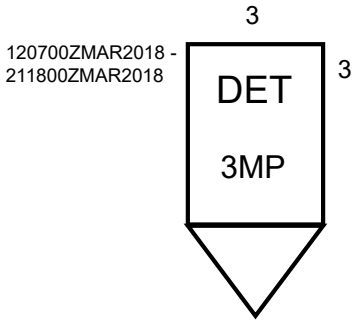


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIX. Sustainment point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Ammunition Transfer Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**03**00 Draw Rules: Point1 – Static		
	A designated temporary site from which Class V material is transferred to unit vehicles.	
Cannibalization Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**04**00 Draw Rules: Point1 – Static		
Casualty Collection Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**05**00 Draw Rules: Point1 – Static		
	A specific location where casualties are assembled to be transported to a medical treatment facility, for example, a company aid post.	


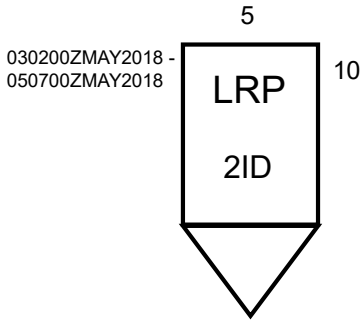

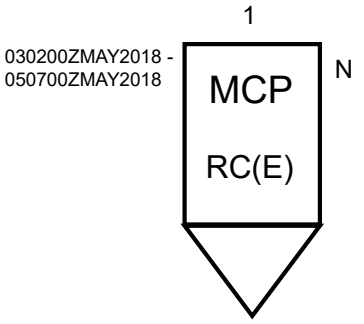


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIX. Sustainment point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Civilian Collection Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**06**00 Draw Rules: Point1 – Static		
	A specific location where civilians are assembled to be transported to another location.	
Detainee Collection Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**07**00 Draw Rules: Point1 – Static		
	A specific location where detainee are assembled to be transported to another location.	
Enemy Prisoner of War (EPW) Collection Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**08**00 Draw Rules: Point1 – Static		
	A specific location where enemy prisoners of war are assembled to be transported to another location.	




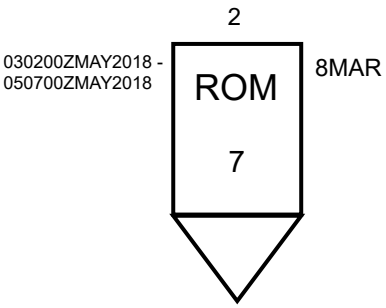

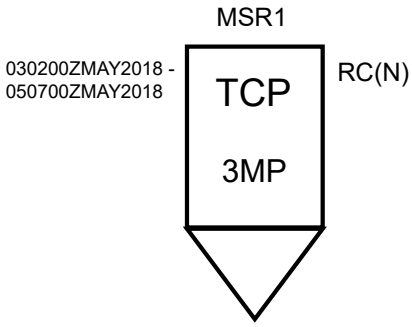
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIX. Sustainment point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Logistics Release Point (LRP) Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**09**00 Draw Rules: Point1 – Static		
Maintenance Collection Point (MCP) Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**10**00 Draw Rules: Point1 – Static		
	A point established to collect equipment awaiting repair, controlled exchange, cannibalization, or evacuation. It may be operated by the user or by the direct support maintenance units.	
Medical Evacuation (MEDEVAC) Pick-up Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**11**00 Draw Rules: Point1 – Static		






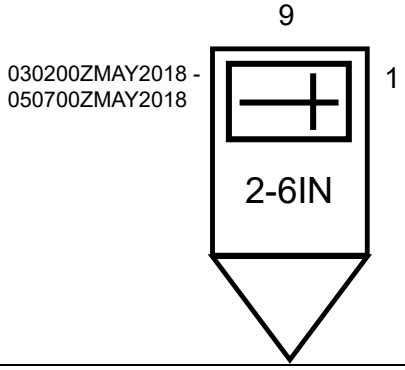
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIX. Sustainment point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Rearm, Refuel and Resupply Point (R3P) Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**1**200 Draw Rules: Point1 – Static		
A designated point through which a unit passes where it receives fuel, ammunition and other necessary supplies to continue operations.		
Refuel On the Move (ROM) Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**1**300 Draw Rules: Point1 – Static		
An area established to ensure that fuel tanks on combat and fuel servicing vehicles are full before they arrive in the unit's tactical assembly area.		
Traffic Control Post (TCP) Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**1**400 Draw Rules: Point1 – Static		
Manned post used to preclude interruption of traffic flow or movement along designated routes.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XIX. Sustainment point symbols - Continued.





DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Trailer Transfer Point (TTP) Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**1**500 Draw Rules: Point1 – Static		
	A location where trailers are transferred from one carrier to another while en-route. The symbol will typically be oriented upright	
Unit Maintenance Collection Point (UMCP) Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**1**600 Draw Rules: Point1 – Static		
	A location or series of locations, operated by a battalion maintenance platoon, that is the nearest point to the combat unit to which equipment can be recovered and where limited parts are available, and some repairs can be performed.	
Mortuary Affairs Collection Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**1**900 Draw Rules: Point1 – Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.23 Supply points.




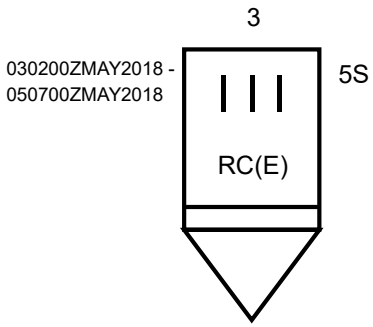

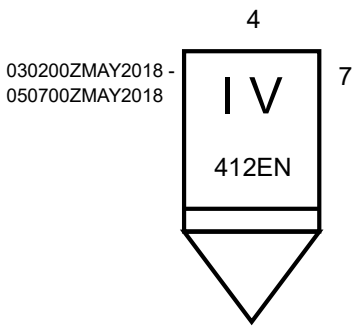
L.5.23.1 Supply point. Any point where supplies are issued in detail. Supply points follow the format as shown above with a modification to the symbol. As with the symbol for supply units, there is an additional line placed toward the bottom of the box. In building points, the name/type of the point is abbreviated and positioned inside the top part of the point symbol in field "A". For some supply symbols this may be a symbol icon. STANAG 2961 provides comparison charts for NATO and NATO nation classes of supply.

TABLE L-XX. Supply point symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
General Supply Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**1**700 Draw Rules: Point1 – Static		
NATO Class I Type: Entity Subtype Entity/Entity Type: Sustainment Points/General Supply Point Symbol Set: 25 Value: 3217**01** Draw Rules: Point1 – Static		
	Those items which are consumed by personnel or animals at the approximately uniform rate, irrespective of local changes in combat or terrain conditions. (STANAG 2961)	




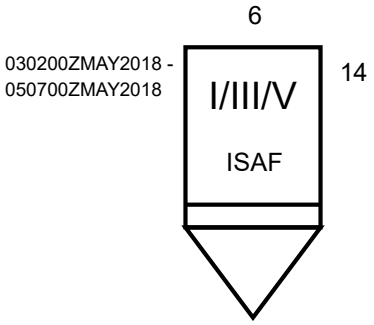

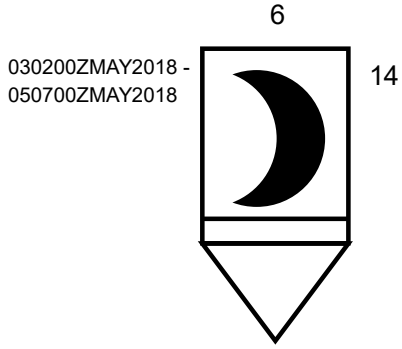
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
NATO Class II Type: Entity Subtype Entity/Entity Type: Sustainment Points/General Supply Point Symbol Set: 25 Value: 321**02** Draw Rules: Point1 – Static		
Supplies for which allowances are established by tables of organization and equipment. (STANAG 2961)		
NATO Class III Type: Entity Subtype Entity/Entity Type: Sustainment Points/General Supply Point Symbol Set: 25 Value: 321**03** Draw Rules: Point1 – Static		
Fuels and lubricants for all purposes, except for operating aircraft or for use in weapons such as flame throwers. (STANAG 2961)		
NATO Class IV Type: Entity Subtype Entity/Entity Type: Sustainment Points/General Supply Point Symbol Set: 25 Value: 321**04** Draw Rules: Point1 – Static		
Supplies for which initial issue allowances are not prescribed by approved issue tables. (STANAG 2961)		




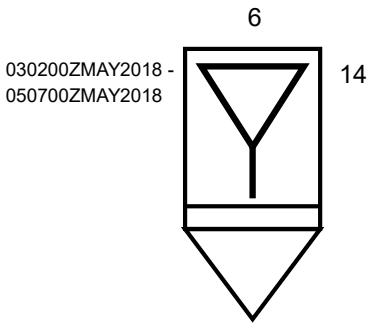




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
NATO Class V Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 321**05** Draw Rules: Point1 – Static		
Ammunition, explosives and chemical agents of all types. (STANAG 2961)		
NATO Multiple Supply Class Point Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 321**06** Draw Rules: Point1 – Static		
Use supply class numbers (I, II, III, IV and V) for a field or ALL for all classes of supply.		
US Class I Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 321**07** Draw Rules: Point1 – Static		


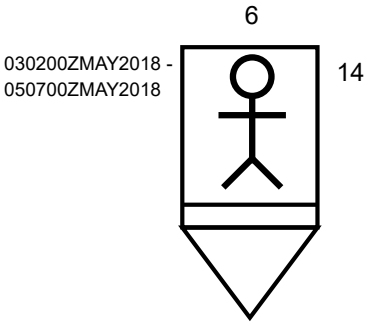



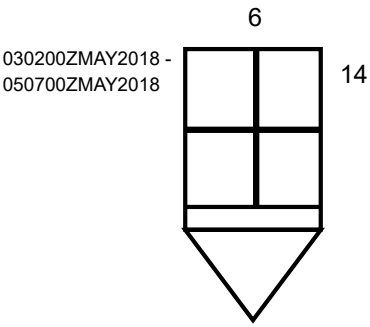


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
US Class II Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 3217**08** Draw Rules: Point1 – Static		
US Class III Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 3217**09** Draw Rules: Point1 – Static		
US Class IV Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 3217**10** Draw Rules: Point1 – Static		
US Class V Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 3217**11** Draw Rules: Point1 – Static		




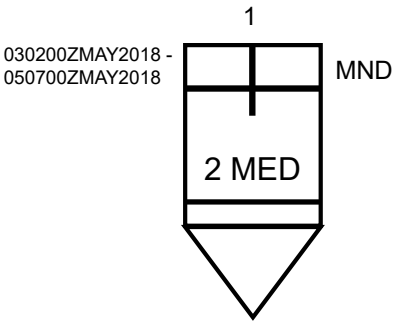

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
US Class VI Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 321712 Draw Rules: Point1 – Static		
US Class VII Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 321713 Draw Rules: Point1 – Static		
US Class VIII Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 321714 Draw Rules: Point1 – Static		
US Class IX Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 321715 Draw Rules: Point1 – Static		







Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
US Class X Type: Entity Subtype Entity/Entity Type: Sustainment Points/ General Supply Point Symbol Set: 25 Value: 3217**16** Draw Rules: Point1 – Static		
Medical Supply Point Type: Entity Type Entity: Sustainment Points Symbol Set: 25 Value: 32**18**00 Draw Rules: Point1 – Static		
Sustainment Areas Type: Entity Symbol Set: 25 Value: **31**0000	Reserved for hierarchical purposes.	N/A
Detainee Holding Area Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**01**00 Draw Rules: Area1 - Dynamic		







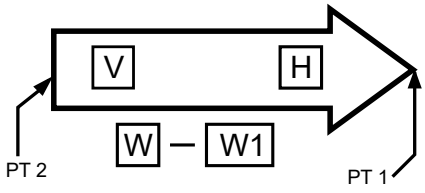
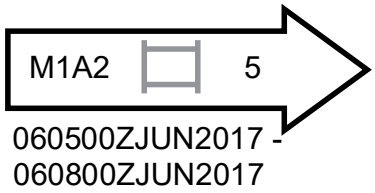
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Enemy Prisoner of War (EPW) Holding Area Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**02**00 Draw Rules: Area1 - Dynamic		
Forward Arming and Refueling Point (FARP) Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**03**00 Draw Rules: Area1 - Dynamic	 (DOD) "A temporary facility — organized, equipped, and deployed to provide fuel and ammunition necessary for the employment of aviation maneuver units in combat. Also called FARP. (JP 3-09.3) Referenced in ATP 3-17.2"	
Refugee Holding Area Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**04**00 Draw Rules: Area1 - Dynamic		
Support Area		
Regimental Support Area Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**05**00 Draw Rules: Area1 - Dynamic		

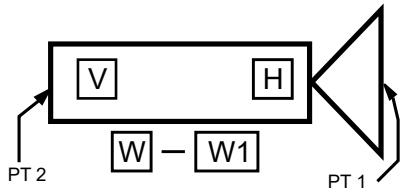

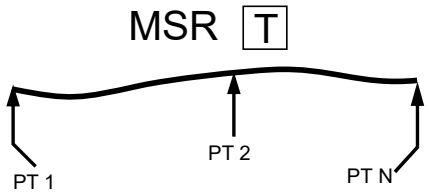

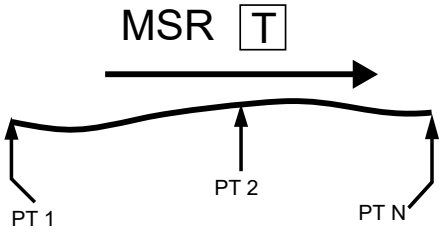

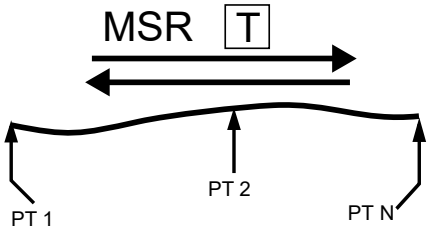
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Brigade Support Area (BSA) Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**06**00 Draw Rules: Area1 - Dynamic		
	A designated area in which combat service support elements from division support command and corps support command provide logistic support to a brigade.	
Division Support Area Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**07**00 Draw Rules: Area1 - Dynamic		
	An area normally located in the division rear and often positioned near air-landing facilities along the main supply route.	
Corps Support Area Type: Entity Type Entity: Sustainment Areas Symbol Set: 25 Value: 31**08**00 Draw Rules: Area1 - Dynamic		
Sustainment Lines Type: Entity Symbol Set: 25 Value: **33**0000	Reserved for hierarchical purposes.	N/A
Moving Convoy Type: Entity Type Entity: Sustainment Line Symbol Set: 25 Value: 33**01**00 Draw Rules: Line9 - Dynamic		
	The arrow points in the direction the convoy is moving.	


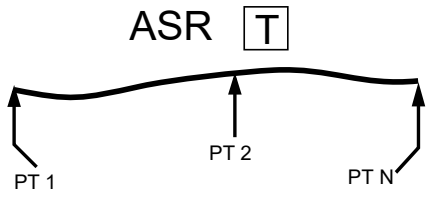
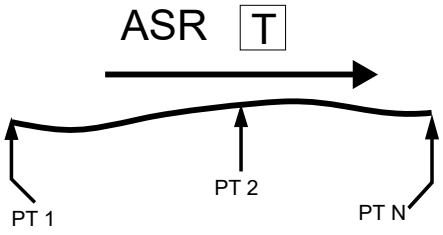

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Halted Convoy Type: Entity Type Entity: Sustainment Line Symbol Set: 25 Value: 33**02**00 Draw Rules: Line9 - Dynamic		
The arrow points to the location where the convoy has halted.		
Supply Routes Orientation is determined by the anchor points and the line segment between each pair of anchor points will repeat all information associated with the line segment.		
Main Supply Route (MSR) Type: Entity Type Entity: Sustainment Line Symbol Set: 25 Value: 33**03**00 Draw Rules: Line1 - Dynamic		
The route or routes designated within an area of operations upon which the bulk of traffic flows in support of military operations.		
One Way Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Main Supply Route (MSR) Symbol Set: 25 Value: 33030**1** Draw Rules: Line1 - Dynamic		
Two Way Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Main Supply Route (MSR) Symbol Set: 25 Value: 33030**2** Draw Rules: Line1 - Dynamic		


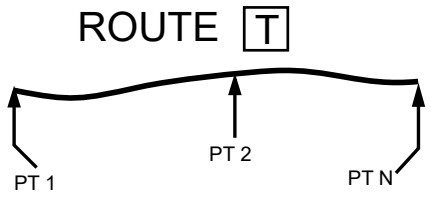
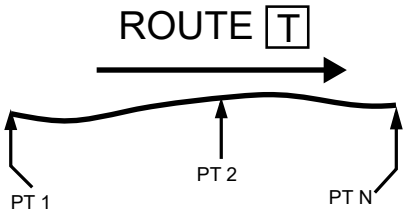
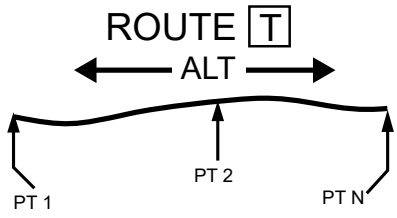
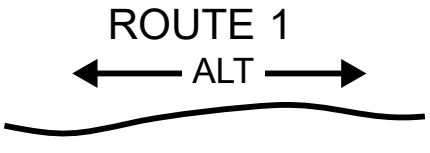
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Alternating Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Main Supply Route (MSR) Symbol Set: 25 Value: 330**03** Draw Rules: Line1 - Dynamic		
Alternate Supply Route (ASR) Type: Entity Type Entity: Sustainment Line Symbol Set: 25 Value: 33**04**00 Draw Rules: Line1 - Dynamic	 A route or routes designated within an area of operations to provide for the movement of traffic when main supply routes become disabled or congested.	
One Way Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Alternate Supply Route (ASR) Symbol Set: 25 Value: 3304**01** Draw Rules: Line1 - Dynamic		
Two Way Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Alternate Supply Route (ASR) Symbol Set: 25 Value: 3304**02** Draw Rules: Line1 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XX. Supply point symbols - Continued.


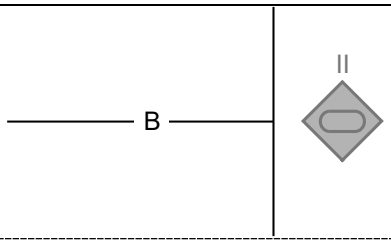


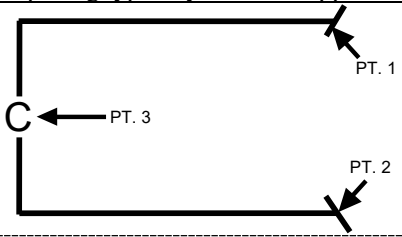
DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Alternating Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Alternate Supply Route (ASR) Symbol Set: 25 Value: 330**03** Draw Rules: Line1 - Dynamic		
Traffic Route Type: Entity Type Entity: Sustainment Line Symbol Set: 25 Value: 33**05**00 Draw Rules: Line1 - Dynamic		
One Way Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Traffic Route Symbol Set: 25 Value: 3305**01** Draw Rules: Line1 - Dynamic		
Alternating Traffic Type: Entity Subtype Entity/Entity Type: Sustainment Lines/Traffic Route Symbol Set: 25 Value: 3305**02** Draw Rules: Line1 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.24 Mission and operational tasks.



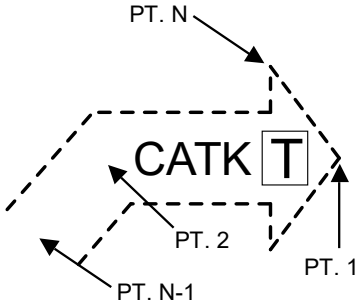

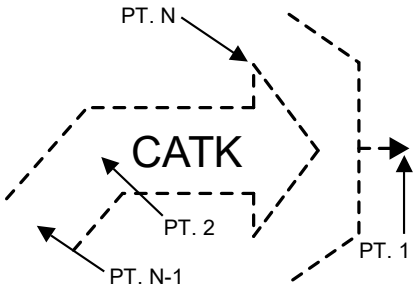
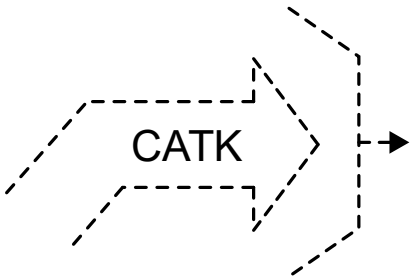
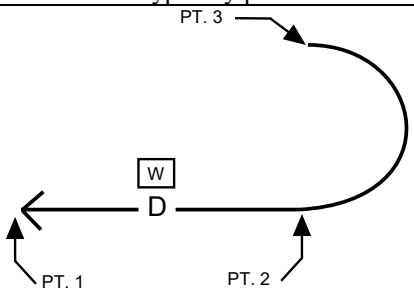

L.5.24.1 Mission and operational task symbols. A specific activity performed by a unit while executing a form of tactical operation or form of maneuver.

TABLE L-XXI. Mission and operation task symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Mission Tasks Type: Entity Symbol Set: 25 Value: **34**0000	Reserved for hierarchical purposes.	N/A
Block Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**01**00 Draw Rules: Area11 - Dynamic	 The head of the "T" typically faces enemy forces.	
Breach Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**02**00 Draw Rules: Point12 - Dynamic	 The opening typically faces the enemy forces.	
Bypass Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**03**00 Draw Rules: Point12 - Dynamic	 The opening typically faces the applicable obstacle.	
Canalize Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**04**00 Draw Rules: Point12- Dynamic	 The opening typically faces the applicable obstacle.	

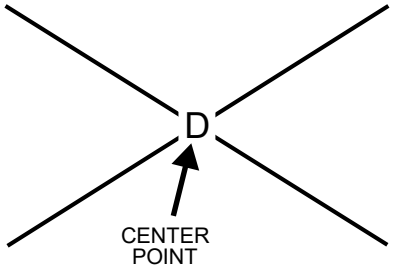
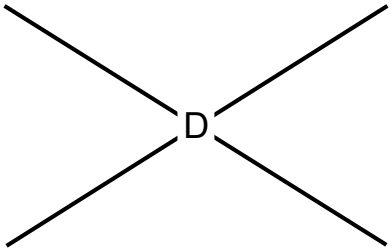
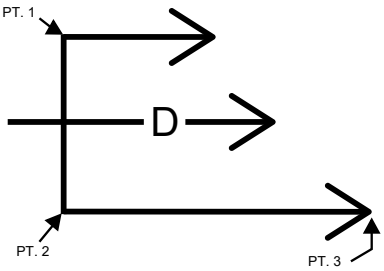
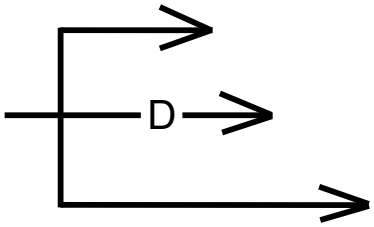
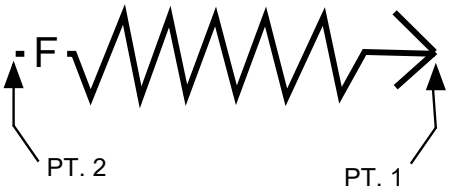
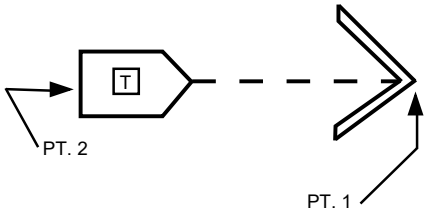
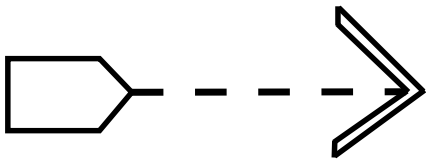
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Clear Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**05**00 Draw Rules: Line23 - Dynamic		
The arrows typically point toward enemy forces.		
Counterattack Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**06**00 Draw Rules: Axis1 - Dynamic.		
The dashed lines in this graphic shall be displayed in present and anticipated status. The arrowhead typically points toward enemy forces		
Counterattack by Fire Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**07**00 Draw Rules: Axis1 - Dynamic		
The dashed lines in this graphic shall be displayed in present and anticipated status. The arrowhead typically points toward enemy forces.		
Delay Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**08**00 Draw Rules: Line24 - Dynamic		
The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the base of the arc. The 180 degree circular arc is always perpendicular to the line.		



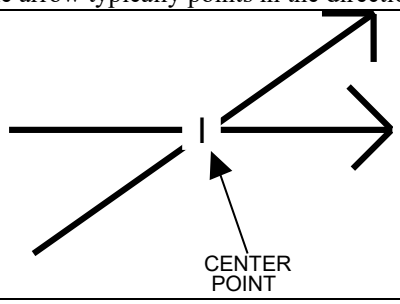
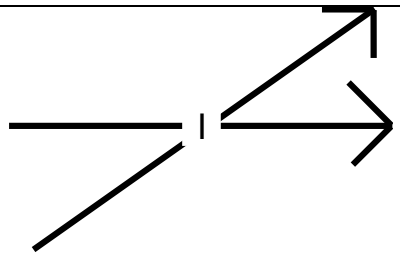
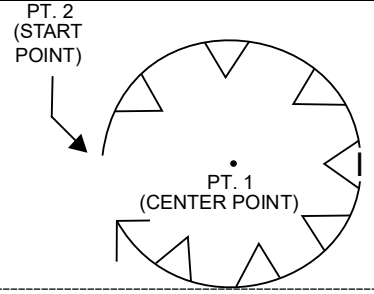



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Destroy Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**09**00 Draw Rules: Point2 – Static		
The symbol is typically centered over the desired location.		
Disrupt Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**10**00 Draw Rules: Area12 - Dynamic		
The arrows typically point toward enemy forces.		
Fix Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**11**00 Draw Rules: Line9 - Dynamic		
The arrow typically points toward enemy forces with the tip of the arrowhead indicating the location of the action.		
Follow and Assume Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**12**00 Draw Rules: Line25 - Dynamic		
The dashed lines in this graphic shall be displayed in present and anticipated status. The arrow typically points in the direction of the action.		






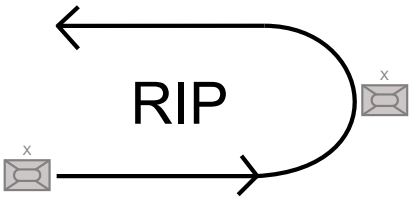

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Follow and Support Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**1**300 Draw Rules: Line25 - Dynamic		
	The arrow typically points in the direction of the action.	
Interdict Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**1**400 Draw Rules: Point2 - Static		
	There should be 45 degrees of angular separation between the two arrows.	
Isolate Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**1**500 Draw Rules: Area15 - Dynamic		
	The opening will be on the friendly side of the symbol.	
Neutralize Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**1**600 Draw Rules: Point2 – Static		
	The dashed lines in this graphic shall be displayed in present and anticipated status.	

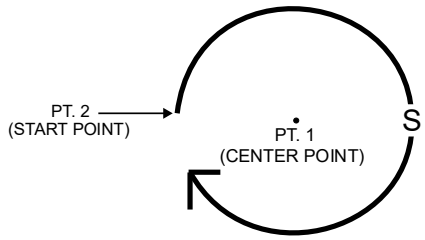






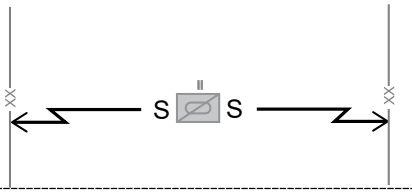
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Occupy Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**1**700 Draw Rules: Area16 - Dynamic		
The opening will be on the friendly side of the control measure.		
Penetrate Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**1**800 Draw Rules: Area17 - Dynamic		
The arrow points toward enemy forces.		
Relief in Place (RIP) Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**1**900 Draw Rules: Area18 - Dynamic		
Determined by the anchor points. The unit being relieved is typically located at the base of the curve and the unit performing the relief is typically located at the end of the symbol. The arrowhead typically points to the location the relieved unit should move to.		
Retire/ Retirement Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**2**000 Draw Rules: Line24 - Dynamic		
The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the base of the arc. The 180 degree circular arc is always perpendicular to the line.		

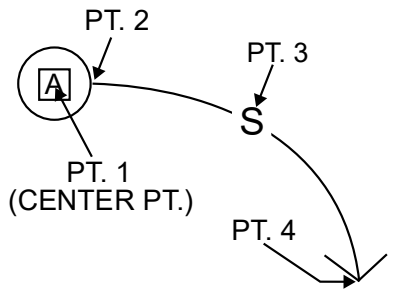

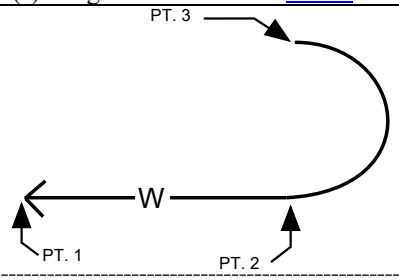
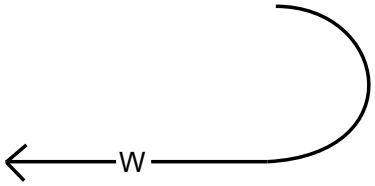

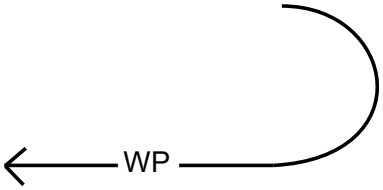


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Secure Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**21**00 Draw Rules: Area19 - Dynamic		
The opening will be on the friendly side of the symbol.		
Security Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**22**00	N/A	N/A
Cover Type: Entity Subtype Entity/Entity Type: Mission Tasks/Security Symbol Set: 25 Value: 3422**01** Draw Rules: Line26 - Dynamic		
Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The tactical symbol is centered between point 2 and point 3.		
Guard Type: Entity Subtype Entity/Entity Type: Mission Tasks/Security Symbol Set: 25 Value: 3422**02** Draw Rules: Line26 - Dynamic		
Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The tactical symbol is centered between point 2 and point 3.		
Screen Type: Entity Subtype Entity/Entity Type: Mission Tasks/Security Symbol Set: 25 Value: 3422**03** Draw Rules: Line26 - Dynamic		
Orientation is determined by the anchor points. The arrowheads may touch other symbols that define the limits of the task. The tactical symbol is centered between point 2 and point 3.		

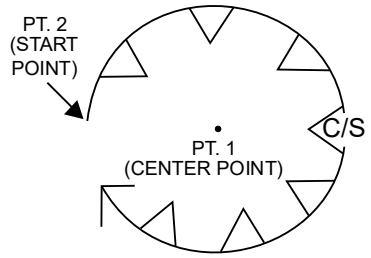


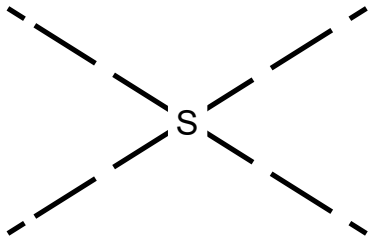
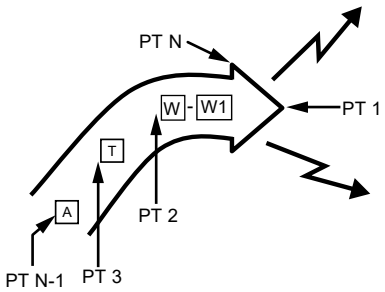
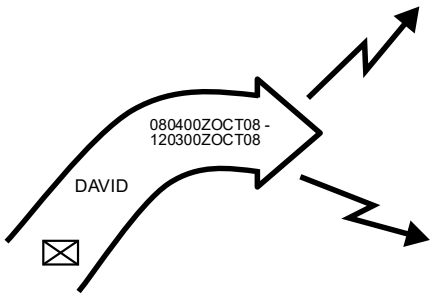
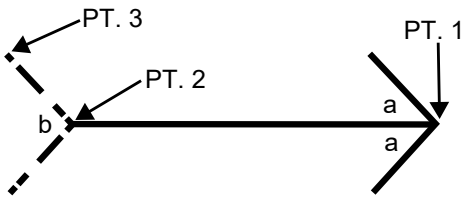
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Seize Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**23**00 Draw Rules: Line27 - Dynamic		
The arrowhead identifies the location/object to be seized, and the circle identifies the unit(s) assigned the task. See 5.3.13 for options to accommodate multiple units.		
Withdraw Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**24**00 Draw Rules: Line24 - Dynamic		
The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the base of the arc. The 180 degree circular arc is always perpendicular to the line.		
Withdraw Under Pressure Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**25**00 Draw Rules: Line24 - Dynamic		
The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the base of the arc. The 180 degree circular arc is always perpendicular to the line.		
Cordon and Knock Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**26**00 Draw Rules: Area15 - Dynamic		
The opening will be on the friendly side of the symbol.		



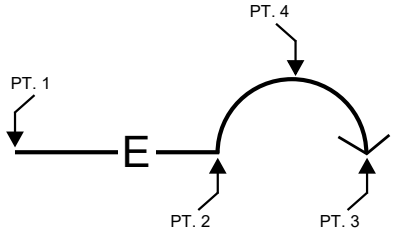



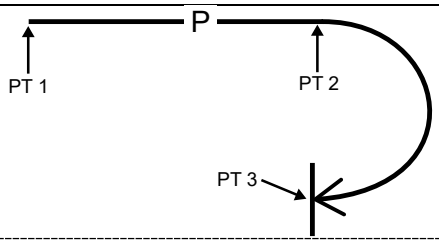
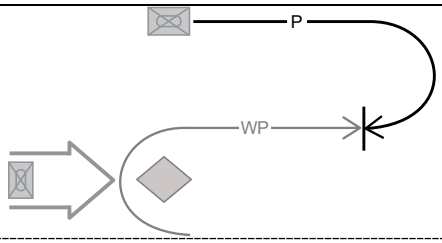
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Cordon and Search Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**2**700 Draw Rules: Area15 - Dynamic		
The opening will be on the friendly side of the symbol.		
Suppress Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**2**800 Draw Rules: Point2 – Static		
The dashed lines in this graphic shall be displayed in present and anticipated status. The symbol is typically centered over the desired location.		
Movement to Contact Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**2**900 Draw Rules: Axis1 - Dynamic		
The arrowhead typically points toward enemy forces. The length of the “lightning bolts” shall be at least twice the width of the base of the arrow and at a 45º angle from the arrow tip.		
Exploit/Exploitation Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**3**100 Draw Rules: Line30 - Dynamic		
The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The tasked unit’s current or projected location is at the base of the symbol.		



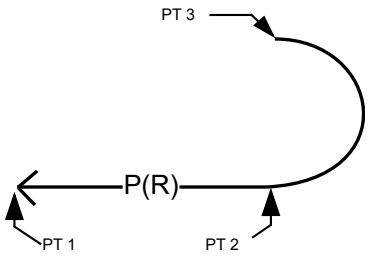



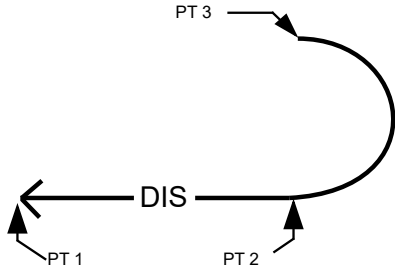
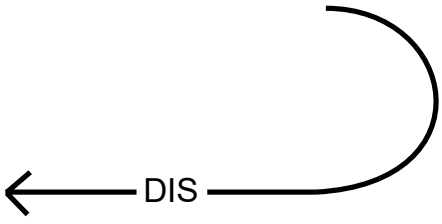
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Demonstrate/ Demonstration Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**33**00 Draw Rules: Area18 - Dynamic		
Envelopment Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**35**00 Draw Rules: Line31 - Dynamic		
	The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the beginning of the straight line. The 180 degree circular arc is always parallel to the line.	
Infiltration Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**38**00 Draw Rules: Line32 - Dynamic		
	The arrow points in the direction of enemy forces. The tip of the arrowhead may indicate the location where the action is to conclude.	
Pursuit Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**40**00 Draw Rules: Line33 - Dynamic		
	The arrow points in the direction of the action. The unit's current location is typically represented at the base of the line. The 180 degree circular arc is always perpendicular to the line.	

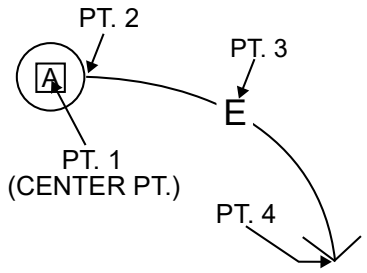
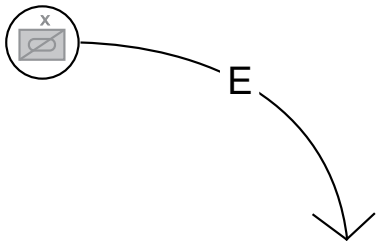


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Forward Passage of Lines Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 344**1**100 Draw Rules: Line24 - Dynamic		
	The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the base of the arc. The 180 degree circular arc is always perpendicular to the line.	
Rearward Passage of Lines Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 344**2**00 Draw Rules: Line24 - Dynamic		
	The arrow points in the direction of the action. The tip of the arrowhead may indicate the location where the action is to conclude. The unit's current location is typically represented at the base of the arc. The 180 degree circular arc is always perpendicular to the line.	
Defeat Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 344**3**00 Draw Rules: Point2 – Static		
Disengage Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 344**4**00 Draw Rules: Line24 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXI. Mission and operation task symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Evacuate/Evacuation Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**45**00 Draw Rules: Line27 - Dynamic		
The arrowhead identifies the location/object to be seized, and the circle identifies the unit(s) assigned the task. See 5.3.13 for options to accommodate multiple units.		
Turn Type: Entity Type Entity: Mission Tasks Symbol Set: 25 Value: 34**47**00 Draw Rules: Line10 - Dynamic		
The rear of the symbol identifies the enemy's location and the arrow points in the direction the obstacle should force the enemy to turn.		

L.5.25 Intelligence symbols.

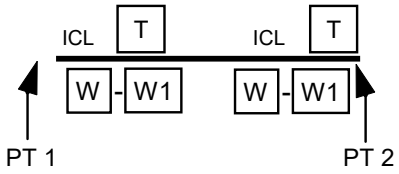
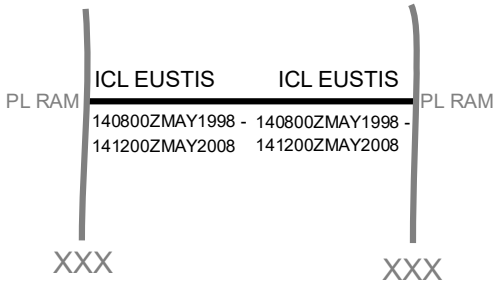
L.5.25.1 Intelligence symbols. Support the planning, execution and support the acquisition of timely, tailored, and accurate intelligence in relation with the commander's mission.

TABLE L-XXII. Intelligence symbols.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Intelligence Lines Type: Entity Symbol Set: 25 Value: **30**0000	N/A	N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXII. Intelligence symbols - Continued.

DESCRIPTION	TEMPLATE	EXAMPLE **Note:** Symbols colored gray are used to help explain how the control measure or planning symbol is used and are not a part of the control measure or planning symbol.
Intelligence Coordination Line (ICL) Type: Entity Type Entity: Intelligence Lines Symbol Set: 25 Value: 30**01**00 Draw Rules: Line1 - Dynamic		

L.5.26 Control measures and planning symbol sector 1 modifiers. The physical location of the sector 1 modifiers in control measures and planning symbols is different from the other appendices in this standard as it differs for each symbol. The physical location when applicable is depicted in the symbol template. Common Modifiers shall not be used.

TABLE L-XXIII. Control measures and planning symbols sector 1 modifiers.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Wheeled (Limited Cross Country) Symbol Set: 25 Value: 01	Mobility		For use with Limited Access Area only
Wheeled (Cross Country) Symbol Set: 25 Value: 02	Mobility		For use with Limited Access Area only
Tracked Symbol Set: 25 Value: 03	Mobility		For use with Limited Access Area only
Wheeled and Tracked Combination Symbol Set: 25 Value: 04	Mobility		For use with Limited Access Area only
Towed Symbol Set: 25 Value: 05	Mobility		For use with Limited Access Area only
Rail Symbol Set: 25 Value: 06	Mobility		For use with Limited Access Area only

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXIII. Control measures and planning symbols sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Over-Snow (Prime Mover) Symbol Set: 25 Value: 07	Mobility		For use with Limited Access Area only
Sled Symbol Set: 25 Value: 08	Mobility		For use with Limited Access Area only
Pack Animals Symbol Set: 25 Value: 09	Mobility		For use with Limited Access Area only
Barge Symbol Set: 25 Value: 10	Mobility		For use with Limited Access Area only
Amphibious Symbol Set: 25 Value: 11	Mobility		For use with Limited Access Area only
No Vehicles Symbol Set: 25 Value: 12	Mobility		For use with Limited Access Area only
Unspecified Mine Symbol Set: 25 Value: 13	Mine Type		
Antipersonnel Mine Symbol Set: 25 Value: 14	Mine Type		
Antipersonnel Mine with Directional Effects Symbol Set: 25 Value: 15	Mine Type		
Antitank Mine Symbol Set: 25 Value: 16	Mine Type		
Antitank Mine with Antihandling Device Symbol Set: 25 Value: 17	Mine Type		
Wide Area Antitank Mine Symbol Set: 25 Value: 18	Mine Type		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXIII. Control measures and planning symbols sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Mine Cluster Symbol Set: 25 Value: 19	Mine Type		
Antipersonnel Mine and Antipersonnel Mine with Directional Effects Symbol Set: 25 Value: 20	Mine Type		
Antipersonnel Mine and Antitank Mine Symbol Set: 25 Value: 21	Mine Type		
Antipersonnel Mine and Antitank Mine with Antihandling Device Symbol Set: 25 Value: 22	Mine Type		
Antipersonnel Mine and Wide Area Antitank Mine Symbol Set: 25 Value: 23	Mine Type		
Antipersonnel Mine and Mine Cluster Symbol Set: 25 Value: 24	Mine Type		
Antipersonnel Mine with Directional Effects and Antitank Mine Symbol Set: 25 Value: 25	Mine Type		
Antipersonnel Mine with Directional Effects and Antitank Mine with Antihandling Device Symbol Set: 25 Value: 26	Mine Type		
Antipersonnel Mine with Directional Effects and Wide Area Antitank Mine Symbol Set: 25 Value: 27	Mine Type		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXIII. Control measures and planning symbols sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Antipersonnel Mine with Directional Effects and Mine Cluster Symbol Set: 25 Value: 28	Mine Type		
Antitank Mine and Antitank Mine with Antihandling Device Symbol Set: 25 Value: 29	Mine Type		
Antitank Mine and Wide Area Antitank Mine Symbol Set: 25 Value: 30	Mine Type		
Antitank Mine and Mine Cluster Symbol Set: 25 Value: 31	Mine Type		
Antitank Mine with Antihandling Device and Wide Area Antitank Mine Symbol Set: 25 Value: 32	Mine Type		
Antitank Mine with Antihandling Device and Mine Cluster Symbol Set: 25 Value: 33	Mine Type		
Wide Area Antitank Mine and Mine Cluster Symbol Set: 25 Value: 34	Mine Type		
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine Symbol Set: 25 Value: 35	Mine Type		
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Antitank Mine with Antihandling Device Symbol Set: 25 Value: 36	Mine Type		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXIII. Control measures and planning symbols sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Wide Area Antitank Mine Symbol Set: 25 Value: 37	Mine Type		
Antipersonnel Mine, Antipersonnel Mine with Directional Effects, and Mine Cluster Symbol Set: 25 Value: 38	Mine Type		
Antipersonnel Mine, Antitank Mine, and Antitank Mine with Antihandling Device Symbol Set: 25 Value: 39	Mine Type		
Antipersonnel Mine, Antitank Mine, and Wide Area Antitank Mine Symbol Set: 25 Value: 40	Mine Type		
Antipersonnel Mine, Antitank Mine, and Mine Cluster Symbol Set: 25 Value: 41	Mine Type		
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine Symbol Set: 25 Value: 42	Mine Type		
Antipersonnel Mine, Antitank Mine with Antihandling Device, and Mine Cluster Symbol Set: 25 Value: 43	Mine Type		
Antipersonnel Mine, Wide Area Antitank Mine, and Mine Cluster Symbol Set: 25 Value: 44	Mine Type		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXIII. Control measures and planning symbols sector 1 modifiers - Continued.

DESCRIPTION	CATEGORY	MODIFIER	REMARKS
Antipersonnel Mine with Directional Effects, Antitank Mine, and Antitank Mine with Antihandling Device Symbol Set: 25 Value: 45	Mine Type		
Antipersonnel Mine with Directional Effects, Antitank Mine, and Wide Area Antitank Mine Symbol Set: 25 Value: 46	Mine Type		
Antipersonnel Mine with Directional Effects, Antitank Mine, and Mine Cluster Symbol Set: 25 Value: 47	Mine Type		
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Wide Area Antitank Mine Symbol Set: 25 Value: 48	Mine Type		
Antipersonnel Mine with Directional Effects, Antitank Mine with Antihandling Device, and Mine Cluster Symbol Set: 25 Value: 49	Mine Type		
Antipersonnel Mine with Directional Effects, Wide Area Antitank Mine, and Mine Cluster Symbol Set: 25 Value: 50	Mine Type		

L.5.27 Abbreviations and acronyms for use with control measures and planning symbols.

L.5.27.1 Boundary abbreviations and acronyms. Table L-XXIV provides a list of abbreviations and acronyms for echelons and functional organizations to be used with boundaries. The asterisk behind the abbreviation indicates that it is in NATOTerm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE L-XXIV. Abbreviations and acronyms for use with boundaries.

ECHELON	ABBREVIATION /ACRONYM	EXAMPLES Note: Any Unit identification can be followed by a 3-letter country code in parenthesis.
Army Group	AG*	1AG
Army	A*	3A
Corps	Does not require an abbreviation. Corps is the only echelon to use Roman numerals.	II
Marine Expeditionary Force	MEF*	III MEF (Use Roman numerals)
Marine Air-Ground Task Force	MAGTF*	4MAGTF
Division	DIV*	1DIV
Air Assault Division	AAD	101AAD
Airborne Division	ABD*	6ABD
Armored Division	AD*	2AD
Cavalry Division	CD	1CD
Infantry Division	ID*	52ID
Marine Division	MARD	1MARD
Mechanized Division	MD*	4MD
Mountain Division	MTND	10MTND
Multinational Division	MND*	1MND or MND(S).
Note: Multinational divisions may use geographical references in parenthesis		
Brigade	BDE*	2BDE
Air Assault Brigade	AAB*	8AAB
Airborne Brigade	ABB*	3ABB
Marine Expeditionary Brigade	MEB*	6MEB
Multinational Brigade	MNB*	2MNB
Naval Infantry Brigade	NIB*	4NIB
Regiment	REGT*	21REGT
Airborne Regiment	ABR*	901ABR
Marine Expeditionary Unit	MEU*	3MEU
Group	GP	41GP
Battle Group	BG*	5BG
Battalion	BN*	7BN
Company	COY*	ACOY or 2COY
Platoon	PLT	2PLT
Team	TM	BTM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

L.5.27.2 Unit functions abbreviation and acronyms. Table L-XXV provides a list of abbreviations and acronyms for unit functions to be used with control measures and planning symbols. The asterisk behind the abbreviation indicates that it is in NATOTerm.

TABLE L-XXV. Abbreviation and acronyms used in control measures and planning symbols for unit functions.

Function	Abbreviation /Acronyms
Air Defense Artillery	ADA*
Antitank/Antiarmor	AT*
Armor	AR*
Aviation	AVN*
Chemical Biological Radiological Nuclear (CBRN)	CB
Civil Affairs	CA*
Combined Arms	CAR
Counterintelligence	CI*
Electromagnetic Warfare	EW*
Engineer	EN
Explosive Ordnance Disposal	EOD*
Field Artillery	FA*
Infantry	IN
Logistics	LOG*
Maintenance	MNT
Medical	MED*
Military Intelligence	MI*
Military Police	MP*
Naval	NAV
Ordnance	ORD
Quartermaster	QM
Reconnaissance	REC
Signal	SIG
Special Forces	SF
Special Operations Force	SOF
Surveillance	SUR
Sustainment	SUST
Transportation	TPT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

METEOROLOGICAL AND OCEANOGRAPHIC SYMBOLOGY

M.1 SCOPE

M.1.1 Scope. This appendix addresses control measure symbols in the meteorological and oceanographic (METOC) symbol sets. Although the symbology in this domain is outside the configuration management of the Symbology Standards Management Committee (SSMC), it is beneficial to present the information to users of this standard as a separate appendix. This appendix has been coordinated and approved by the joint METOC community and is a mandatory part of this standard. The information contained herein is intended for compliance.

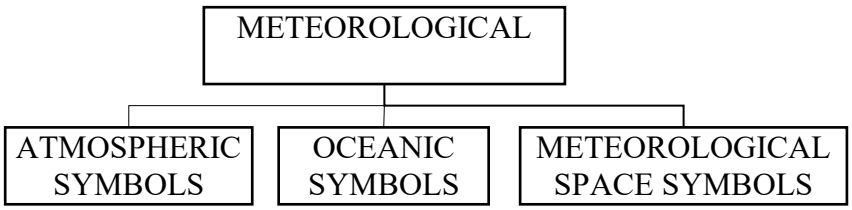


FIGURE M-1. Meteorological and oceanographic appendix sections.

M.2 APPLICABLE DOCUMENTS

Specific documents in 2.2 of this standard apply to this appendix.

M.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

M.4 GENERAL REQUIREMENTS

M.4.1 Organization. This appendix contains technical specifications, a symbol coding scheme, a symbology hierarchy and METOC symbology.

M.5 DETAILED REQUIREMENTS

M.5.1 Technical specifications. Composition, construction and display of symbols are explained in the detailed requirements section of the standard.

M.5.2 Symbology identification coding scheme. A symbol identification code (SIDC) is a numeric string that may be used to provide the unique identifier necessary to display or exchange symbol information between MIL-STD-2525 compliant systems. Refer to Appendix A for SIDC positions and descriptions.

M.5.3 Symbology set. The following graphics are some of those more commonly used to depict weather and should only be used on weather-related displays. These graphics must be implemented as a separate layer or classification since they may conflict with other symbols or icons used in the warrior icon set. These graphics are based on approved symbols and icons from the World Meteorological Organization (WMO). For dynamic displays, if the system has the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

capability to rotate the map display in the direction of movement, a single point symbol may optionally be rotated on its anchor point for upright orientation. For a single point symbol, unless otherwise stated in the symbol's template, the symbol's anchor shall be the center of the symbol operator-centered over the desired location.

TABLE M-I. Standard Draw Rules.

Draw Rule Type	Draw Rule
Area1	**Anchor Points:** This graphic requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Scalable.
Area2	**Anchor Points:** This graphic requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. The operator may depict the area color filled with no outer boundary line and include a legend to simplify depiction.
Point1	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable.
Point2	**Anchor Points:** This graphic requires one anchor point. The center point defines the geometric center of the graphic. **Size/Shape:** Scalable.
Point3	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable.
Point4	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable.
Point5	**Anchor Points:** This graphic requires a minimum of two anchor points. The first point defines the location of the plot circle. Additional points define the wind shaft and the speed of the wind. Wind speed is depicted on the shaft using a combination of the shaft alone (1-2 knots), half barbs (5 knots), barbs (10 knots) and pennants (50 knots). Wind speeds 5 knots or greater are rounded to the nearest 5 knots. Missing wind speed is depicted by an "X" at the end of the wind shaft. Winds with missing direction are not displayed. **Size/Shape:** Not applicable. **Orientation:** The shaft of the graphic is oriented with reference to true north in the direction from which the wind is blowing to the nearest 10 degrees. The barbs and pennants lie back from the shaft at an angle of 120 degrees and are oriented to the left of the shaft in the Northern Hemisphere and to the right in the Southern Hemisphere. The graphic is operator-centered over the desired location.
Point6	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable.
Point7	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable.
Point8	**Anchor Points:** This graphic requires one anchor point. The center point defines the center of the graphic. **Size/Shape:** Scalable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-I. Standard Draw Rules - Continued.

Draw Rule Type	Draw Rule
Line1	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The curvature of the line is operator defined.
Line2	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a straight line consisting of a short line section and an alternating V shape. The curvature and amplitude of the waves of the line are operator defined.
Line3	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a straight line consisting of a short line section and alternating two dots. The curvature and amplitude of the waves of the line are operator defined.
Line4	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a curved/wavy line consisting of a short line and one dot. The curvature and amplitude of the waves of the line are operator defined.
Line5	**Anchor Points:** This graphic requires at least three anchor points to define the boundary of the area. Add as many points as necessary to accurately reflect the area's size and shape. **Size/Shape:** Determined by the anchor points. The dual line segments will be parallel to slightly wider at the western end.
Line6	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a solid straight line with alternating slanted lines connected as depicted in the example to indicate convergence.
Line7	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable/Curve. The points are typically connected with a dashed straight or curved line. The curvature of the line is operator defined. The red and green line segments will alternate along the line.
Line8	**Anchor Points:** This graphic requires at least two anchor points, points 1 and 2, to define the line. Additional points can be defined to extend the line. **Size/Shape:** Scalable.

TABLE M-II. Atmospheric icons.

DESCRIPTION	ICON	NOTES
PRESSURE SYSTEMS Static/Dynamic: N/A Symbol Set: 45 Value: **11**0000	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems **Low Pressure Center** Static/Dynamic: D Symbol Set: 45 Value: 11**01**00 **Color**: Red (RGB 255,0,0) Draw Rules: Point1 - Static		The graphic is a letter 'L' with a dynamic tag 'P' below it that represents the lowest atmospheric pressure of the system. The value is three or 4 digits and represents the pressure in hectopascals (millibars). The value below, 998, represents 998 hectopascals. A value above 1000 hectopascals would be reflected in 4 digits like 1008 hectopascals.
Pressure Systems Low Pressure Center **Cyclone Center** Static/Dynamic: S Symbol Set: 45 Value: 1101**01** **Color**: Red (RGB 255,0,0) Draw Rules: Point1 - Static		The graphic is a letter 'C' that represents the atmospheric circulation center of the system.
Pressure Systems Low Pressure Center **Tropopause Low** Static/Dynamic: D Symbol Set: 45 Value: 1101**02** **Color**: Black Draw Rules: Point1 - Static		The center of the graphic is the pressure center. The low point of the Tropopause topography is indicated by the letter 'L' and the height (H in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic
Pressure Systems **High Pressure Center** Static/Dynamic: D Symbol Set: 45 Value: 11**02**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point1 - Static		The graphic is a letter 'H' with a dynamic tag 'P' below it that represents the highest atmospheric pressure of the system. The value is three or four digits and represents the pressure in hectopascals (millibars). The value below, 1016, represents 1016 hectopascals. A value below 1000 hectopascals would be reflected in three digits like 998 hectopascals.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems High Pressure Center **Anticyclone Center** Static/Dynamic: S Symbol Set: 45 Value: 110**201** **Color**: Blue (RGB 0,0,255) Draw Rules: Point1 - Static		The graphic is a letter 'A' that represents the atmospheric circulation center of the system. .
Pressure Systems High Pressure Center **Tropopause High** Static/Dynamic: D Symbol Set: 45 Value: 110**202** **Color**: Black Draw Rules: Point1 - Static		The center of the graphic is the pressure center. The high point of the Tropopause topography is indicated by the letter 'H' and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Pressure Systems **Frontal Systems** Symbol Set: 45 Value: 11**03**00	N/A	For special lines that are not symmetrical, such as Fronts, the sequence of anchor points determines the proper alignment of the line. For two anchor points that describe the position of the front or a section of the front, with L (for left point) and R (for right point): (1) If R comes before L in sequence, the front is rendered in the way shown, (2) If L comes before R in sequence, the front is rendered in the reverse with pips shown facing the opposite direction.).
Pressure Systems Frontal Systems **Cold Front** Symbol Set: 45 Value: 1103**01** **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Frontal Systems Cold Front **Upper Cold Fron** Symbol Set: 45 Value: 110302 **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with hollow, triangular pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
Pressure Systems Frontal Systems Cold Front **Cold Frontogenesis** Symbol Set: 45 Value: 110303 **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular pips spaced evenly along the line separated by one dot. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
Pressure Systems Frontal Systems Cold Front **Cold Frontolysis** Symbol Set: 45 Value: 110304 **Color**: Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular pips spaced evenly along the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
Pressure Systems Frontal Systems **Warm Front** Symbol Set: 45 Value: 110305 **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Frontal Systems Warm Front **Upper Warm Front** Symbol Set: 45 Value: 110**306** **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with hollow, half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
Pressure Systems Frontal Systems Warm Front **Warm Frontogenesis** Symbol Set: 45 Value: 110**307** **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, half-circle pips spaced evenly along the line separated by one dot. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
Pressure Systems Frontal Systems Warm Front **Warm Frontolysis** Symbol Set: 45 Value: 110**308** **Color**: Red (RGB 255,0,0) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, half-circle pips spaced evenly along the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Frontal Systems **Occluded Front** Symbol Set: 45 Value: 110309 **Color**: Purple (RGB 111,49,152) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with alternating solid, triangular and half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. An occluded front is where a cold front has overtaken a warm front and is the discontinuity between colder air and cooler air and the colder air forces the cooler air aloft.
Pressure Systems Frontal Systems Occluded Front **Upper Occluded Front** Symbol Set: 45 Value: 110310 **Color**: Purple (RGB 111,49,152) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with alternating hollow, triangular and half-circle pips spaced evenly along the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.
Pressure Systems Frontal Systems Occluded Front **Occluded Frontolysis** Symbol Set: 45 Value: 110311 **Color**: Purple (RGB 111,49,152) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with alternating solid, triangular and half-circle pips spaced evenly along the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Frontal Systems **Stationary Front** Symbol Set: 45 Value: 110312 **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular and half-circle pips spaced evenly on alternating sides of the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down).
Pressure Systems Frontal Systems Stationary Front **Upper Stationary Front** Symbol Set: 45 Value: 110313 **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with hollow, triangular and half-circle pips spaced evenly on alternating sides of the line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down).
Pressure Systems Frontal Systems Stationary Front **Stationary Frontogenesis** Symbol Set: 45 Value: 110314 **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular and half-circle pips spaced evenly on alternating sides of the line separated by one dot. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Frontal Systems Stationary Front **Stationary Frontolysis** Symbol Set: 45 Value: 1103**15** **Color**: Alternate Red (RGB 255,0,0) & Blue (RGB 0,0,255) Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line with solid, triangular and half-circle pips spaced evenly on alternating sides of the line separated by a crossed line. The line should be drawn from the pressure center to the extent of the front. The pips will be evenly spaced along the line and point in the direction the front is moving. Since the front is not moving, pips alternate with warm (red) pointing one direction (normally to left or up) and the cold (blue) pointing the other (normally right or down)..
Pressure Systems **Lines** Static/Dynamic: N/A Symbol Set: 45 Value: 11**04**00	N/A	
Pressure Systems Lines **Trough Axis** Symbol Set: 45 Value: 1104**01** **Color**: Black Draw Rules: Line1 - Dynamic		This is a surface feature.
Pressure Systems Lines **Trough** Symbol Set: 45 Value: 1104**02** **Color**: Black Draw Rules: Line1 - Dynamic		The points are typically connected with a curved line and should be drawn along the trough axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Lines **Ridge Axis** Symbol Set: 45 Value: 110**403** **Color**: Black Draw Rules: Line1 - Dynamic		The points are typically connected with a solid zigzag line. The line should be drawn along the ridge axis. The zigzag of the line will be placed at regular intervals along the entire length of the line.
Pressure Systems Lines **Severe Squall Line** Symbol Set: 45 Value: 110**404** **Color**: Black Draw Rules: Line2 - Dynamic		This line type is rarely seen, but may appear in products from the Canadian meteorological service (Meteorological Services of Canada). The term “severe squall line” is generally implied by “squall line” The line should be drawn so the "V" shapes are facing in the direction of movement. The "V" shapes and short line segment will alternate along the line.
Pressure Systems Lines **Instability Line** Symbol Set: 45 Value: 110**405** **Color**: Black Draw Rules: Line3 - Dynamic		
Pressure Systems Lines **Shear Line** Symbol Set: 45 Value: 110**406** **Color**: Black Draw Rules: Line4 - Dynamic		A shear line is normally the convergent easterly winds where a cold front has intruded into a tropical region.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Lines **Inter-Tropical Convergence Zone** Symbol Set: 45 Value: 110**07** **Color**: Orange (RGB 255,128,0) Draw Rules: Line5 - Dynamic		The operator should place the modifier(s) to indicate areas of weather activity within the graphic. The Inter-Tropical Convergence Zone (ITCZ) is a region where the northeasterly and southeasterly trade winds converge.
Pressure Systems Lines **Convergence Line** Symbol Set: 45 Value: 110**08** **Color**: Orange (RGB 255,128,0) Draw Rules: Line6 - Dynamic		
Pressure Systems Lines **Inter-Tropical Discontinuity** Symbol Set: 45 Value: 110**09** **Color**: Alternate Red (RGB 255,0,0) and Green (RGB 13,223,39) Draw Rules: Line7 - Dynamic		
Pressure Systems **Pressure Tendency** Static/Dynamic: D Symbol Set: 45 Value: 11**05**00 **Note:** Each symbol within the pressure tendency group is static, but only one can be applied to a particular station plot, dependent upon the pressure tendency at that location. As such, the group of symbols is dynamic.	N/A	
	Pressure tendency symbols are depicted to the right of the plot circle just after the text value for the actual pressure change. Pressure tendency is displayed in two digits in black immediately to right of the plot circle followed by the pressure tendency symbol. The graphic is centered over the anchor location.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Pressure Tendency **Rise Then Fall Higher** Symbol Set: 45 Value: 110**501** **Color**: Black/Blue (RGB 0,0,255) Draw Rules: Point2 - Static		
Pressure Systems Pressure Tendency **Rise Then Steady** Symbol Set: 45 Value: 110**502** **Color**: Black/Blue (RGB 0,0,255) Draw Rules: Point2 - Static		
Pressure Systems Pressure Tendency **Rise** Symbol Set: 45 Value: 110**503** **Color**: Black/Blue (RGB 0,0,255) Draw Rules: Point2 - Static		
Pressure Systems Pressure Tendency **Rise Then Rise Higher** Symbol Set: 45 Value: 110**504** **Color**: Black/Blue (RGB 0,0,255) Draw Rules: Point2 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Pressure Tendency **Steady** Symbol Set: 45 Value: 110**05** **Color**: Black Draw Rules: Point2 - Static		
Pressure Systems Pressure Tendency **Fall Then Rise Lower** Symbol Set: 45 Value: 110**06** **Color**: Black/Red (RGB 255,0,0) Draw Rules: Point2 - Static		
Pressure Systems Pressure Tendency **Fall Then Steady** Symbol Set: 45 Value: 110**07** **Color**: Black/Red (RGB 255,0,0) Draw Rules: Point2 - Static		
Pressure Systems Pressure Tendency **Fall** Symbol Set: 45 Value: 110**08** **Color**: Black/Red (RGB 255,0,0) Draw Rules: Point2 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Pressure Systems Pressure Tendency **Rise Then Fall Lower** Symbol Set: 45 Value: 110**09** **Color**: Black/Red (RGB 255,0,0) Draw Rules: Point2 - Static		
Turbulence Static/Dynamic: N/A Symbol Set: 45 Value: **12**0000	N/A	USAF turbulence forecasts are based on Category II type aircraft.
Turbulence **Light** Static/Dynamic: D Symbol Set: 45 Value: 12**01**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Turbulence **Moderate** Symbol Set: 45 Value: 12**02**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Turbulence **Severe** Symbol Set: 45 Value: 12**03**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Turbulence **Extreme** Symbol Set: 45 **Value:** 12**04**00 Color: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		Intensity is dependent upon the associated aircraft type. The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Turbulence **Mountain Waves** Symbol Set: 45 Value: 12**05**00 **Color**: Blue (RGB 0,0,255) Draw Rules: Point3 - Static		The turbulence is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Icing Symbol Set: 45 Value: **13**0000	N/A	
Icing **Clear Icing** Symbol Set: 45 Value: 13**01**00	N/A	
Icing Clear Icing **Light** Symbol Set: 45 Value: 13010**1** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Icing Clear Icing **Moderate** Symbol Set: 45 Value: 1301**02** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Icing Clear Icing **Severe** Symbol Set: 45 Value: 1301**03** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Icing **Rime Icing** Symbol Set: 45 Value: 13**02**00	N/A	
Icing Rime Icing **Light** Symbol Set: 45 Value: 1302**01** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Icing Rime Icing **Moderate** Symbol Set: 45 Value: 1302**02** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Icing Rime Icing **Severe** Symbol Set: 45 Value: 1302**03** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Icing **Mixed Icing** Symbol Set: 45 Value: 13**03**00	N/A	
Icing Mixed Icing **Light** Symbol Set: 45 Value: 1303**01** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Icing Mixed Icing **Moderate** Symbol Set: 45 Value: 1303**02** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.
Icing Mixed Icing **Severe** Symbol Set: 45 Value: 1303**03** **Color**: Brown (RGB 124,96,13) Draw Rules: Point3 - Static		The icing is indicated by the graphic and the height (X in 3 digits) above mean sea level in hundreds of feet (or meters) is included within the graphic.





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Winds Symbol Set: 45 Value: **14**0000	N/A	
Winds **Calm Winds** Symbol Set: 45 Value: 14**01**00 **Color**: Black Draw Rules: Point4 - Static		
Winds **Jet Stream** Symbol Set: 45 Value: 14**03**00 **Color**: Red or Black Draw Rules: Line1 - Dynamic		The arrowheads will be evenly spaced along the line.
Winds **Stream Line** Symbol Set: 45 Value: 14**04**00 **Color**: Operator Defined Draw Rules: Line1 - Dynamic		The arrowheads will be evenly spaced along the line.
Cloud Coverage Symbol Set: 45 Value: **15**0000	N/A	
Cloud Coverage **Cloud Coverage Symbols** Symbol Set: 45 Value: 15**01**00	N/A	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Cloud Coverage Cloud Coverage Symbols **Clear Sky** Symbol Set: 45 Value: 150**101** **Color**: Black Draw Rules: Point6 - Static		
Cloud Coverage Cloud Coverage Symbols **Few Coverage** Symbol Set: 45 Value: 150**102** **Color**: Black Draw Rules: Point6 - Static		
Cloud Coverage Cloud Coverage Symbols **Scattered Coverage** Symbol Set: 45 Value: 150**103** **Color**: Black Draw Rules: Point6 - Static		
Cloud Coverage Cloud Coverage Symbols **Broken Coverage** Symbol Set: 45 Value: 150**104** **Color**: Black Draw Rules: Point6 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Cloud Coverage Cloud Coverage Symbols **Overcast Coverage** Symbol Set: 45 Value: 150**105** **Color**: Black Draw Rules: Point6 - Static		
Cloud Coverage Cloud Coverage Symbols **Sky Totally or Partially Obscured** Symbol Set: 45 Value: 150**106** **Color**: Black Draw Rules: Point6 - Static		
Weather Symbols Symbol Set: 45 Value: **16**0000	N/A	
Weather Symbols **Rain** Symbol Set: 45 Value: 16**01**00	N/A	
Weather Symbols Rain **Intermittent Light** Symbol Set: 45 Value: 160**101** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Rain Intermittent Light **Continuous Light** Symbol Set: 45 Value: 160**102** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain **Intermittent Moderate** Symbol Set: 45 Value: 160**103** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain **Intermittent Moderate/Continuous Moderate** Symbol Set: 45 Value: 160**104** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain **Intermittent Heavy** Symbol Set: 45 Value: 160**105** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Rain **Intermittent Heavy/Continuous Heavy** Symbol Set: 45 Value: 160**106** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols **Freezing Rain** Symbol Set: 45 Value: 16**02**00	N/A	
Weather Symbols Freezing Rain **Light** Symbol Set: 45 Value: 1602**01** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Freezing Rain **Moderate/Heavy** Symbol Set: 45 Value: 1602**02** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols **Rain Showers** Symbol Set: 45 Value: 16**03**00	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Rain Showers **Light** Symbol Set: 45 Value: 160**301** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain Showers **Moderate/Heavy** Symbol Set: 45 Value: 160**302** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain Showers **Torrential** Symbol Set: 45 Value: 160**303** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols **Drizzle** Symbol Set: 45 Value: 16**04**00	N/A	
Weather Symbols Drizzle **Intermittent Light** Symbol Set: 45 Value: 1604**01** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Drizzle **Intermittent Light/Continuous Light** Symbol Set: 45 Value: 160402 **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Drizzle **Intermittent Moderate** Symbol Set: 45 Value: 160403 **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Drizzle **Intermittent Moderate/Continuous Moderate** Symbol Set: 45 Value: 160404 **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Drizzle **Intermittent Heavy** Symbol Set: 45 Value: 160405 **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Drizzle **Intermittent Heavy/Continuous Heavy** Symbol Set: 45 Value: 160**406** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols **Freezing Drizzle** Symbol Set: 45 Value: 16**05**00	N/A	
Weather Symbols Freezing Drizzle **Light** Symbol Set: 45 Value: 1605**01** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Freezing Drizzle **Moderate/Heavy** Symbol Set: 45 Value: 1605**02** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols **Rain and Snow Mixed** Symbol Set: 45 Value: 16**06**00	N/A	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Rain and Snow Mixed **Rain or Drizzle and Snow – Light** Symbol Set: 45 Value: 160**601** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain and Snow Mixed **Rain or Drizzle and Snow – Moderate/Heavy** Symbol Set: 45 Value: 160**602** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain and Snow Mixed **Rain and Snow Showers - Light** Symbol Set: 45 Value: 160**603** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Rain and Snow Mixed **Rain and Snow Showers - Moderate/Heavy** Symbol Set: 45 Value: 160**604** **Color**: Green Draw Rules: Point7 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols **Snow** Symbol Set: 45 Value: 16**0**700	N/A	
Weather Symbols Snow **Intermittent Light** Symbol Set: 45 Value: 1607**01** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Snow **Intermittent Light/Continuous Light** Symbol Set: 45 Value: 1607**02** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Snow **Intermittent Moderate** Symbol Set: 45 Value: 1607**03** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Snow **Intermittent Moderate/Continuous Moderate** Symbol Set: 45 Value: 1607**04** **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Snow **Intermittent Heavy** Symbol Set: 45 Value: 160705 **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Snow **Intermittent Heavy/Continuous Heavy** Symbol Set: 45 Value: 160706 **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Snow **Blowing Snow - Light/Moderate** Symbol Set: 45 Value: 160707 **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Snow **Blowing Snow – Heavy** Symbol Set: 45 Value: 160708 **Color**: Green Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols **Snow Grains** Symbol Set: 45 Value: 16**08**00 **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols **Snow Showers** Symbol Set: 45 Value: 16**09**00	N/A	
Weather Symbols Snow Showers **Light** Symbol Set: 45 Value: 160**01** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols Snow Showers **Moderate/Heavy** Symbol Set: 45 Value: 160**02** **Color**: Green Draw Rules: Point7 - Static		
Weather Symbols **Hail** Symbol Set: 45 Value: 16**10**00	N/A	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Hail **Light Not Associated with Thunder** Symbol Set: 45 Value: 161**01** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Hail **Moderate/Heavy Not Associated with Thunder** Symbol Set: 45 Value: 161**02** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols **Ice Crystals (Diamond Dust)** Symbol Set: 45 Value: 16**11**00 **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols **Ice Pellets (Sleet)** Symbol Set: 45 Value: 16**12**00	N/A	
Weather Symbols Ice Pellets (Sleet) **Light** Symbol Set: 45 Value: 1612**01** **Color**: Red Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Ice Pellets (Sleet) **Moderate** Symbol Set: 45 Value: 161**02** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Ice Pellets (Sleet) **Heavy** Symbol Set: 45 Value: 161**03** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols **Inversion** Symbol Set: 45 Value: 16**13**00 **Color**: Black Draw Rules: Point7 - Static		
Weather Symbols **Storms** Symbol Set: 45 Value: 16**14**00	N/A	
Weather Symbols Storms **Thunderstorm - No Precipitation** Symbol Set: 45 Value: 1614**01** **Color**: Red Draw Rules: Point7 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Storms **Thunderstorm Light to Moderate with Rain/Snow - No Hail** Symbol Set: 45 Value: 161**402** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Storms **Thunderstorm Heavy with Rain/Snow - No Hail** Symbol Set: 45 Value: 161**403** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Storms **Thunderstorm Light to Moderate - with Hail** Symbol Set: 45 Value: 161**404** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Storms **Thunderstorm Heavy - with Hail** Symbol Set: 45 Value: 161**405** **Color**: Red Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Storms **Funnel Cloud (Tornado/Waterspout)** Symbol Set: 45 Value: 161**406** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Storms **Squall** Symbol Set: 45 Value: 161**407** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Storms **Lightning** Symbol Set: 45 Value: 161**408** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols **Fog** Symbol Set: 45 Value: 16**15**00	N/A	
Weather Symbols Fog **Shallow Patches** Symbol Set: 45 Value: 1615**01** **Color**: Yellow Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Fog **Shallow Continuous** Symbol Set: 45 Value: 161**02** **Color**: Yellow Draw Rules: Point7 - Static		
Weather Symbols Fog **Patchy** Symbol Set: 45 Value: 161**03** **Color**: Yellow Draw Rules: Point7 - Static		
Weather Symbols Fog **Sky Visible** Symbol Set: 45 Value: 161**04** **Color**: Yellow Draw Rules: Point7 - Static		
Weather Symbols Fog **Sky Obscured** Symbol Set: 45 Value: 161**05** **Color**: Yellow Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Fog **Freezing, Sky Visible** Symbol Set: 45 Value: 161**506** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols Fog **Freezing, Sky Obscured** Symbol Set: 45 Value: 161**507** **Color**: Red Draw Rules: Point7 - Static		
Weather Symbols **Mist** Symbol Set: 45 Value: 16**16**00 **Color**: Yellow Draw Rules: Point7 - Static		
Weather Symbols **Smoke** Symbol Set: 45 Value: 16**17**00 **Color**: Brown Draw Rules: Point7 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols **Haze** Symbol Set: 45 Value: 16**18**00 **Color**: Brown Draw Rules: Point7 - Static		
Weather Symbols **Dust or Sand** Symbol Set: 45 Value: 16**19**00	N/A	
Weather Symbols Dust or Sand **Light to Moderate** Symbol Set: 45 Value: 1619**01** **Color**: Brown Draw Rules: Point7 - Static		
Weather Symbols Dust or Sand **Severe** Symbol Set: 45 Value: 1619**02** **Color**: Brown Draw Rules: Point7 - Static		
Weather Symbols Dust or Sand **Dust Devil** Symbol Set: 45 Value: 1619**03** **Color**: Brown Draw Rules: Point7 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Dust or Sand **Blowing Dust or Sand** Symbol Set: 45 Value: 161**04** **Color**: Brown Draw Rules: Point7 - Static		
Weather Symbols **Tropical Storm Systems** Symbol Set: 45 Value: 16**20**00	N/A	
Weather Symbols Tropical Storm Systems **Tropical Depression** Static/Dynamic: D Symbol Set: 45 Value: 1620**01** **Color**: Red, Purple or Black Draw Rules: Point8 - Static		*Red* or *Purple* - Current and Forecast Position *Black* - Past Position
Weather Symbols Tropical Storm Systems **Tropical Storm** Symbol Set: 45 Value: 1620**02** **Color**: Red, Purple or Black Draw Rules: Point8 - Static		*Red* or *Purple* - Current and Forecast Position *Black* - Past Position
Weather Symbols Tropical Storm Systems **Hurricane/Typhoon** Symbol Set: 45 Value: 1620**03** **Color**: Red, Purple or Black Draw Rules: Point8 - Static		*Red* or *Purple* - Current and Forecast Position *Black* - Past Position



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols Tropical Storm Systems **Tropical Storm Wind Areas and Date/Time Labels** Static/Dynamic: D Symbol Set: 45 Value: 162**04** **Color**: Red/Purple/Black *Red* - Outermost Area of Winds = 34 Knots *Purple* - Second Area of Winds = 50 Knots [=64 Knots Atlantic Only] *Red* or *Black* - Innermost Area of Winds = 100 Knots Draw Rules: Area1 - Dynamic		US Navy ship avoidance areas can be depicted using **Operator-Defined Freeform**.
Weather Symbols **Volcanic Eruption** Symbol Set: 45 Value: 16**21**00 **Color**: Black Draw Rules: Point7 - Static		
Weather Symbols Volcanic Eruption **Volcanic Ash** Symbol Set: 45 Value: 1621**01** **Color**: Black or Brown Draw Rules: Point7 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Weather Symbols **Tropopause Level** Symbol Set: 45 Value: 16**22**00 **Color**: Black Draw Rules: Point7 - Static		
Weather Symbols **Freezing Level** Symbol Set: 45 Value: 16**23**00 **Color**: Black Draw Rules: Point7 - Static		
Weather Symbols **Precipitation of Unknown Type and Intensity** Symbol Set: 45 Value: 16**24**00 **Color**: Green Draw Rules: Point7 - Static		
Bounded Areas of Weather Symbol Set: 45 Value: **17**0000	N/A	
Bounded Areas of Weather **Instrument Flight Rule (IFR)** Symbol Set: 45 Value: 17**01**00 **Color**: Red Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Bounded Areas of Weather **Marginal Visual Flight Rule (MVFR)** Symbol Set: 45 Value: 17**02**00 **Color**: Blue Draw Rules: Area2 - Dynamic		
Bounded Areas of Weather **Turbulence** Symbol Set: 45 Value: 17**03**00 **Color**: Blue Draw Rules: Area2 - Dynamic		
Bounded Areas of Weather **Icing** Symbol Set: 45 Value: 17**04**00 **Color**: Brown Draw Rules: Area2 - Dynamic		
Bounded Areas of Weather **Liquid Precipitation - Non-Convective Continuous or Intermittent** Symbol Set: 45 Value: 17**05**00 **Color**: Green Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Bounded Areas of Weather Liquid Precipitation - Non-Convective Continuous or Intermittent **Liquid Precipitation – Convective** Symbol Set: 45 Value: 170**501** **Color**: Green Draw Rules: Area2 - Dynamic		
Bounded Areas of Weather **Freezing/Frozen Precipitation** Symbol Set: 45 Value: 17**06**00 **Color**: Red Draw Rules: Area2 - Dynamic		
Bounded Areas of Weather **Thunderstorm** Symbol Set: 45 Value: 17**07**00 **Color**: Red Draw Rules: Area2 - Dynamic		
Bounded Areas of Weather **Fog** Symbol Set: 45 Value: 17**08**00 **Color**: Yellow Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Bounded Areas of Weather **Dust or Sand** Symbol Set: 45 Value: 17**09**00 **Color**: Brown Draw Rules: Area2 - Dynamic		
Bounded Areas of Weather **Operator-Defined Freeform** Symbol Set: 45 Value: 17**10**00 **Color**: Operator Defined Draw Rules: Area2 - Dynamic	 	Used to designate areas of specific weather phenomenon as determined by the operator.
Isopleths Symbol Set: 45 Value: **18**0000	N/A	
Isopleths **Isobar – Surface** Symbol Set: 45 Value: 18**01**00 **Color**: Black Draw Rules: Line1 - Dynamic		Used on **surface analyses**. Although not part of the graphic, numerical values of the isopleth can be placed along the line for presentation. The modifier text will be placed at each end of the line and once in the middle of the line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Isopleths **Contour - Upper Air** Symbol Set: 45 Value: 18**02**00 **Color**: Black Draw Rules: Line1 - Dynamic		Used on **upper air analyses**. Although not part of the graphic, numerical values of the isopleth can be placed along the line for presentation. The modifier text will be placed at each end of the line and once in the middle of the line.
Isopleths **Isotherm** Symbol Set: 45 Value: 18**03**00 **Color**: Red Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.
Isopleths **Isotach** Symbol Set: 45 Value: 18**04**00 **Color**: Purple Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.
Isopleths **Isodrosotherm** Symbol Set: 45 Value: 18**05**00 **Color**: Green Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.
Isopleths **Thickness** Symbol Set: 45 Value: 18**06**00 **Color**: Red Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and once in the middle of the line.




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
Isopleths **Operator-Defined Freeform** Symbol Set: 45 Value: 18**07**00 **Color**: Operator Defined Draw Rules: Line1 - Dynamic		Used to display isopleth areas of specific weather parameters as determined by the operator. The modifier text will be placed at each end of the line and once in the middle of the line.
State of the Ground Symbol Set: 45 Value: **19**0000	N/A	
State of the Ground **Without Snow or Measurable Ice Cover** Symbol Set: 45 Value: 19**01**00	N/A	
State of the Ground Without Snow or Measurable Ice Cover **Surface Dry Without Cracks or Appreciable Dust or Loose Sand** Symbol Set: 45 Value: 19010**1** **Color**: Black Draw Rules: Point1 - Static		
State of the Ground Without Snow or Measurable Ice Cover **Surface Moist** Symbol Set: 45 Value: 19010**2** **Color**: Black Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
State of the Ground Without Snow or Measurable Ice Cover **Surface Wet, Standing Water in Small or Large Pools** Symbol Set: 45 Value: 190103 **Color**: Black Draw Rules: Point1 - Static		
State of the Ground Without Snow or Measurable Ice Cover **Surface Flooded** Symbol Set: 45 Value: 190104 **Color**: Black Draw Rules: Point1 - Static		
State of the Ground Without Snow or Measurable Ice Cover **Surface Frozen** Symbol Set: 45 Value: 190105 **Color**: Black Draw Rules: Point1 - Static		
State of the Ground Without Snow or Measurable Ice Cover **Glaze (Thin Ice) On Ground** Static/Dynamic: S Symbol Set: 45 Value: 190106 **Color**: Black Draw Rules: Point1 - Static		




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
State of the Ground Without Snow or Measurable Ice Cover **Loose Dry Dust or Sand Not Covering Ground Completely** Symbol Set: 45 Value: 190107 **Color**: Black Draw Rules: Point1 - Static		
State of the Ground Without Snow or Measurable Ice Cover **Thin Loose Dry Dust or Sand Covering Ground Completely** Symbol Set: 45 Value: 190108 **Color**: Black Draw Rules: Point1 - Static		
State of the Ground Without Snow or Measurable Ice Cover **Moderate/Thick Loose Dry Dust or Sand Covering Ground Completely** Symbol Set: 45 Value: 190109 **Color**: Black Draw Rules: Point1 - Static		
State of the Ground Without Snow or Measurable Ice Cover **Extremely Dry with Cracks** Symbol Set: 45 Value: 190110 **Color**: Black Draw Rules: Point1 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
State of the Ground **With Snow or Measurable Ice Cove** Symbol Set: 45 Value: 19**02**00	N/A	
State of the Ground with Snow or Measurable Ice Cover **Predominately Ice Covered** Symbol Set: 45 Value: 1902**01** **Color**: Black Draw Rules: Point1 - Static		
State of the Ground With Snow or Measurable Ice Cover **Compact or Wet Snow (with or Without Ice) Covering Less Than One-Half of Ground** Symbol Set: 45 Value: 1902**02** **Color**: Black Draw Rules: Point1 - Static		
State of the Ground With Snow or Measurable Ice Cover **Compact or Wet Snow (with or Without Ice) Covering At Least One-Half Ground, But Ground Not Completely Covered** Symbol Set: 45 Value: 1902**03** **Color**: Black Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
State of the Ground With Snow or Measurable Ice Cover **Even Layer of Compact or Wet Snow Covering Ground Completely** Symbol Set: 45 Value: 190**04** **Color**: Black Draw Rules: Point1 - Static		
State of the Ground With Snow or Measurable Ice Cover **Uneven Layer of Compact or Wet Snow Covering Ground Completely** Symbol Set: 45 Value: 190**05** **Color**: Black Draw Rules: Point1 - Static		
State of The Ground With Snow or Measurable Ice Cover **Loose Dry Snow Covering Less Than One-Half of Ground** Symbol Set: 45 Value: 190**06** **Color**: Black Draw Rules: Point1 - Static		
State of the Ground With Snow or Measurable Ice Cover **Loose Dry Snow Covering At Least One-Half Ground, But Ground Not Completely Covered** Symbol Set: 45 Value: 190**07** **Color**: Black Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-II. Atmospheric icons - Continued.

DESCRIPTION	ICON	NOTES
State of the Ground With Snow or Measurable Ice Cover **Even Layer of Loose Dry Snow Covering Ground Completely** Symbol Set: 45 Value: 190**08** **Color**: Black Draw Rules: Point1 - Static		
State of the Ground With Snow or Measurable Ice Cover **Uneven Layer of Loose Dry Snow Covering Ground Completely** Symbol Set: 45 Value: 190**09** **Color**: Black Draw Rules: Point1 - Static		
State of the Ground With Snow or Measurable Ice Cover **Snow Covering Ground Completely, Deep Drifts** Symbol Set: 45 Value: 190**10** **Color**: Black Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons.

DESCRIPTION	ICON	NOTES
Ice Systems Symbol Set: 46 Value: **11**0000	N/A	
Ice Systems **Icebergs** Symbol Set: 46 Value: 11**01**00 Color: Black	N/A	
Ice Systems Icebergs **Many Icebergs** Symbol Set: 46 Value: 110101 **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Icebergs **Belts and Strips** Symbol Set: 46 Value: 110102 **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Icebergs **General** Symbol Set: 46 Value: 110103 **Color**: Black Draw Rules: Point3 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Icebergs **Many Icebergs – General** Symbol Set: 46 Value: 110104 **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Icebergs **Bergy Bit** Symbol Set: 46 Value: 110105 **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Icebergs **Many Bergy Bits** Symbol Set: 46 Value: 110106 **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Icebergs **Growler** Symbol Set: 46 Value: 110107 **Color**: Black Draw Rules: Point3 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Icebergs **Many Growlers** Symbol Set: 46 Value: 110**108** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Icebergs **Floeberg** Symbol Set: 46 Value: 110**109** **Color**: Black Top with White Bottom Draw Rules: Point3 - Static		
Ice Systems Icebergs **Ice Island** Symbol Set: 46 Value: 110**10** **Color**: White Hexagon/Black Hatches Draw Rules: Point3 - Static		
Ice Systems **Ice Concentration** Symbol Set: 46 Value: 11**02**00	N/A	
Ice Systems Ice Concentration **Bergy Water** Symbol Set: 46 Value: 1102**01** **Color**: Black Draw Rules: Point3 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Ice Concentration **Water with Radar Targets** Symbol Set: 46 Value: 110**02** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Ice Concentration **Ice Free** Symbol Set: 46 Value: 110**03** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems **Dynamic Processes** Symbol Set: 46 Value: 11**03**00	N/A	
Ice Systems Dynamic Processes **Convergence** Symbol Set: 46 Value: 1103**01** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Dynamic Processes **Divergence** Symbol Set: 46 Value: 1103**02** **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Dynamic Processes **Shearing or Shear Zone** Symbol Set: 46 Value: 110**03** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Dynamic Processes **Ice Drift (Direction)** Symbol Set: 46 Value: 110**04** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems **Sea Ice** Symbol Set: 46 Value: 11**04**00 **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Sea Ice **Ice Thickness (Observed)** Symbol Set: 46 Value: 1104**01** **Color**: Box with Black Outline Draw Rules: Point3 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Sea Ice **Ice Thickness (Estimated)** Symbol Set: 46 Value: 110**402** **Color**: Box with Black Dashed Line Draw Rules: Point3 - Static		
Ice Systems Sea Ice **Melt Puddles or Flooded Ice** Symbol Set: 46 Value: 110**403** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems **Limits** Symbol Set: 46 Value: 11**05**00	N/A	
Ice Systems Limits **Limits of Visual Observation** Symbol Set: 46 Value: 1105**01** **Color**: Black Draw Rules: Line1 - Dynamic		The ovals will be repeated the entire length of the line.
Ice Systems Limits **Limits of Undercast** Symbol Set: 46 Value: 1105**02** **Color**: Black Draw Rules: Line1- Dynamic		The wave-like shapes will be repeated the entire length of the line.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Limits **Limits of Radar Observation** Symbol Set: 46 Value: 110**503** **Color**: Black Draw Rules: Line1- Dynamic		The ovals and x's will alternate the entire length of the line.
Ice Systems Limits **Observed Ice Edge or Boundary** Symbol Set: 46 Value: 110**504** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a solid curved line.
Ice Systems Limits **Estimated Ice Edge or Boundary** Symbol Set: 46 Value: 110**505** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a dashed curved line.
Ice Systems Limits **Ice Edge or Boundary From Radar** Symbol Set: 46 Value: 110**506** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a curved line with Xs spaced evenly along the entire length of the line.
Ice Systems **Openings in the Ice** Symbol Set: 46 Value: 11**06**00	N/A	



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Openings in the Ice **Cracks** Symbol Set: 46 Value: 110**601** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a curved line.
Ice Systems Openings in the Ice **Cracks At a Specific Location** Symbol Set: 46 Value: 110**602** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with a curved line with perpendicular lines spaced evenly along the line. The perpendicular lines will be placed at regular intervals along the entire length of the line.
Ice Systems Openings in the Ice **Lead** Symbol Set: 46 Value: 110**603** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with parallel curved lines.
Ice Systems Openings in the Ice **Frozen Lead** Symbol Set: 46 Value: 110**604** **Color**: Black Draw Rules: Line1- Dynamic		The points are typically connected with parallel curved lines connected by vertical lines spaced evenly along the line. The perpendicular lines joining the main lines will be placed at regular intervals along the entire length of the main lines.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems **Snow Cover** Symbol Set: 46 Value: 11**07**00 **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Snow Cover **Sastrugi (with Orientation)** Symbol Set: 46 Value: 1107**01** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems **Topographical Features** Static/Dynamic: N/A Symbol Set: 46 Value: 11**08**00	N/A	
Ice Systems Topographical Features **Ridges or Hummocks** Symbol Set: 46 Value: 1108**01** **Color**: Black Draw Rules: Point3 - Static		
Ice Systems Topographical Features **Rafting** Symbol Set: 46 Value: 1108**02** **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Ice Systems Topographical Features **Jammed Brash Barrier** Symbol Set: 46 Value: 110**03** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Static/Dynamic: N/A Symbol Set: 46 Value: **12**0000	N/A	
Hydrography **Depth** Static/Dynamic: N/A Symbol Set: 46 Value: 12**01**00	N/A	
Hydrography Depth **Soundings** Symbol Set: 46 Value: 1201**01** **Color**: Gray Draw Rules: Point3 - Static		
Hydrography Depth **Depth Curve** Symbol Set: 46 Value: 1201**02** **Color**: Gray Thin Solid Line Draw Rules: Line1 - Dynamic		The points are typically connected with a solid curved line. The modifier text will be placed at each end of the line and at regular intervals along the line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Depth **Depth Contour** Symbol Set: 46 Value: 120**03** **Color**: Gray Thin Solid Line Draw Rules: Line1 - Dynamic		The modifier text will be placed at each end of the line and at regular intervals along the line.
Hydrography Depth **Depth Area** Symbol Set: 46 Value: 120**04** **Color**: Blue/Pale Blue/White Draw Rules: Area2 - Dynamic		The points are connected with a solid line.
Hydrography **Coastal Hydrography** Static/Dynamic: N/A Symbol Set: 46 Value: 12**02**00	N/A	
Hydrography Coastal Hydrography **Coastline** Symbol Set: 46 Value: 120**01** **Color**: Gray Thin Solid Line Draw Rules: Line1 - Dynamic		The points are connected with a solid line.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Coastal Hydrography **Island** Static/Dynamic: S Symbol Set: 46 Value: 120**02** **Color**: Brown Solid Fill Draw Rules: Area2 - Dynamic		The points are connected with a solid line.
Hydrography Coastal Hydrography **Beach** Symbol Set: 46 Value: 120**03** **Color**: Beige Outline and Stipple Fill Draw Rules: Area2 - Dynamic		The points are connected with a solid line.
Hydrography Coastal Hydrography **Water** Static/Dynamic: S Symbol Set: 46 Value: 120**04** **Color**: White Fill Draw Rules: Area2 - Dynamic		The gray box is not to be drawn. It is shown here only as a reference to position and proportion of the icon.
Hydrography Coastal Hydrography **Foreshore - Line** Symbol Set: 46 Value: 120**05** **Color**: Yellow-Green Solid Line Draw Rules: Line1 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Coastal Hydrography **Foreshore - Area** Symbol Set: 46 Value: 120**06** **Color**: Yellow-Green Solid Fill Draw Rules: Area2 - Dynamic		
Hydrography **Ports and Harbors** Static/Dynamic: N/A Symbol Set: 46 Value: 12**03**00	N/A	
Hydrography Ports and Harbors **Ports** Static/Dynamic: N/A Symbol Set: 46 Value: 1203**01**	N/A	
Hydrography Ports and Harbors Ports **Berths (Onshore)** Symbol Set: 46 Value: 1203**02** **Color**: Magenta Small Circle Draw Rules: Point1 - Static		
Hydrography Ports and Harbors Ports **Berths (Anchor)** Symbol Set: 46 Value: 1203**03** **Color**: Magenta Anchor W/ Small Circle Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Ports and Harbors Ports **Anchorage - Point** Symbol Set: 46 Value: 120**04** **Color**: Magenta Anchor Draw Rules: Point1 - Static		
Hydrography Ports and Harbors Ports **Anchorage - Line** Symbol Set: 46 Value: 120**05** **Color**: Magenta Dash/Chevron Line W/ Anchor Symbol Draw Rules: Line8 - Dynamic		The graphic is oriented upright on the display as shown in the example and operator-centered over the desired location.
Hydrography Ports and Harbors Ports **Anchorage - Area** Symbol Set: 46 Value: 120**06** **Color**: Magenta Dash/Chevron Outline W/ Anchor Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Ports and Harbors Ports **Call In Point** Static/Dynamic: S Symbol Set: 46 Value: 120**07** **Color**: Magenta Circle W/ Two Cones Draw Rules: Point1 - Static		
Hydrography Ports and Harbors Ports **Pier/Wharf/Quay** Symbol Set: 46 Value: 120**08** **Color**: Gray Thin Solid Line Draw Rules: Line1 - Dynamic		
Hydrography Ports and Harbors **Fishing Harbor - Point** Symbol Set: 46 Value: 120**09** **Color**: Magenta Fish W/Arcs Above and Below Draw Rules: Point1 - Static		
Hydrography Ports and Harbors **Fish Weirs - Point** Symbol Set: 46 Value: 120**10** **Color**: Gray Fish Inside Net Draw Rules: Point1 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Ports and Harbors **Fish Stakes - Point** Symbol Set: 46 Value: 120**11** **Color**: Gray L **Style**: Repeating Pattern of Gray L's Draw Rules: Point1 - Static		
Hydrography Ports and Harbors **Fish Traps - Area** Symbol Set: 46 Value: 120**12** **Color**: Gray Rectangle Below Angle Line Pattern Fill Dashed Outline Draw Rules: Area2 - Dynamic		
Hydrography Ports and Harbors **Facilities** Static/Dynamic: N/A Symbol Set: 46 Value: 120**13**	N/A	
Hydrography Ports and Harbors Facilities **Drydock** Symbol Set: 46 Value: 120**14** **Color**: Brown Solid Area W/ Black Thin Outline Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Ports and Harbors Facilities **Landing Place** Symbol Set: 46 Value: 120**15** **Color**: Magenta Yacht Inside Circle Draw Rules: Point1 - Static		
Hydrography Ports and Harbors Facilities **Offshore Loading Facility - Point** Symbol Set: 46 Value: 120**16** **Color**: Black Installation Buoy Draw Rules: Point1 - Static		
Hydrography Ports and Harbors Facilities **Offshore Loading Facility - Line** Symbol Set: 46 Value: 120**17** **Color**: Gray Thick Solid Line Draw Rules: Line1 - Dynamic		
Hydrography Ports and Harbors Facilities **Offshore Loading Facility - Area** Symbol Set: 46 Value: 120**18** **Color**: Brown Solid Fill Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Ports and Harbors Facilities **Ramp - Above Water** Symbol Set: 46 Value: 120**19** **Color**: Black Solid Line Draw Rules: Line1 - Dynamic		
Hydrography Ports and Harbors Facilities **Ramp - Below Water** Symbol Set: 46 Value: 120**20** **Color**: Black Dashed Line Draw Rules: Line1 - Dynamic		
Hydrography Ports and Harbors Facilities **Landing Ring** Symbol Set: 46 Value: 120**21** **Color**: Dark Brown Filled Square W/ Black Outline Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Ports and Harbors Facilities **Ferry Crossing** Symbol Set: 46 Value: 120**22** **Color**: Magenta Dashed Line W/ Boat Symbol Draw Rules: Point1 - Static		
Hydrography Ports and Harbors Facilities **Cable Ferry Crossing** Value: 120**23** **Color**: Black Black Dashed Line W/ Boat Symbol Draw Rules: Point1 - Static		
Hydrography Ports and Harbors Facilities **Dolphin** Symbol Set: 46 Value: 120**24** **Color**: Dark Brown Filled Square W/ Black Outline Draw Rules: Point1 - Static		
Hydrography Ports and Harbors **Shoreline Protection** Static/Dynamic: N/A Symbol Set: 46 Value: 120**25**	N/A	




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Ports and Harbors Shoreline Protection **Breakwater/Groin/Jetty - Above Water** Symbol Set: 46 Value: 120**26** **Color**: Gray Solid Line Draw Rules: Line1 - Dynamic		
Hydrography Ports and Harbors Shoreline Protection **Breakwater/Groin/Jetty - Below Water** Symbol Set: 46 Value: 120**27** **Color**: Gray Dashed Line Draw Rules: Line1 - Dynamic		
Hydrography Ports and Harbors Shoreline Protection **Seawall** Symbol Set: 46 Value: 120**28** **Color**: Gray Solid Line Draw Rules: Line1 - Dynamic		
Hydrography **Aids to Navigation** Static/Dynamic: N/A Symbol Set: 46 Value: 12**04**00	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Aids to Navigation **Beacon** Symbol Set: 46 Value: 120**401** **Color**: Black Beacon/Buoy Base Draw Rules: Point1 - Static		
Hydrography Aids to Navigation **Buoy Default** Symbol Set: 46 Value: 120**402** **Color**: Black/Magenta Draw Rules: Point1 - Static		Black default buoy beside magenta question mark
Hydrography Aids to Navigation **Marker** Symbol Set: 46 Value: 120**403** **Color**: Magenta Draw Rules: Point1 - Static		Magenta Inverted T with open circle at bottom below box
Hydrography Aids to Navigation **Perches/Stakes - Point** Symbol Set: 46 Value: 120**404** **Color**: Black Small Circle Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Aids to Navigation **Perches/Stakes - Area** Static/Dynamic: D Symbol Set: 46 Value: 120**05** **Color**: Blue Fill with Black Dot Outline Draw Rules: Area2 - Dynamic		
Hydrography Aids to Navigation **Light** Symbol Set: 46 Value: 120**06** **Color**: Magenta Flare Draw Rules: Point1 - Static		
Hydrography Aids to Navigation **Leading Line** Symbol Set: 46 Value: 120**07** **Color**: Black Solid to Dashed Line Draw Rules: Line1 - Dynamic		
Hydrography Aids to Navigation **Light Vessel/Light Ship** Symbol Set: 46 Value: 120**08** **Color**: Black Light Vessel Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Aids to Navigation **Lighthouse** Symbol Set: 46 Value: 120**09** **Color**: Black Lighthouse Symbol Draw Rules: Point1 - Static		
Hydrography **Dangers/Hazards** Static/Dynamic: N/A Symbol Set: 46 Value: 12**05**00	N/A	
Hydrography Dangers/Hazards **Rock Submerged** Symbol Set: 46 Value: 1205**01** **Color**: Blue/Black Black Cross In Blue Solid Circle W/ Black Dotted Outline Draw Rules: Point1 - Static		
Hydrography Dangers/Hazards **Rock Awashed** Symbol Set: 46 Value: 1205**02** **Color**: Black 6 Point Asterisk Draw Rules: Point1 - Static		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Dangers/Hazards **Underwater Danger/Hazard** Symbol Set: 46 Value: 120**503** **Color**: Blue/Black Blue Fill W/ Black Dot Outline Draw Rules: Area2 - Dynamic		
Hydrography Dangers/Hazards **Foul Ground - Point** Symbol Set: 46 Value: 120**504** **Color**: Gray Pound (#) Symbol Draw Rules: Point1 - Static		
Hydrography Dangers/Hazards **Foul Ground - Area** Symbol Set: 46 Value: 120**505** **Color**: Gray Pound (#) Offset Pattern Fill Draw Rules: Area2 - Dynamic		
Hydrography Dangers/Hazards **Kelp/Seaweed - Point** Symbol Set: 46 Value: 120**506** **Color**: Gray Kelp Symbol Draw Rules: Point1 - Static		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Dangers/Hazards **Kelp/Seaweed - Area** Symbol Set: 46 Value: 120**07** **Color**: Gray Kelp Symbol Pattern Fill Draw Rules: Area2 - Dynamic		
Hydrography Dangers/Hazards **Snags/Stumps** Symbol Set: 46 Value: 120**08** **Color**: Blue Oval W/ Black Dotted Outline Draw Rules: Point1 - Static		
Hydrography Dangers/Hazards **Wreck (Uncovers)** Symbol Set: 46 Value: 120**09** **Color**: Gray Wreck Symbol Draw Rules: Point1 - Static		
Hydrography Dangers/Hazards **Wreck (Submerged)** Symbol Set: 46 Value: 120**10** **Color**: Black Horizontal Bar W/ 3 Ticks In Blue Solid Oval W/ Black Dotted Outline Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Dangers/Hazards **Breakers** Symbol Set: 46 Value: 120**11** **Color**: Gray Thin Dashed Line Draw Rules: Line1 - Dynamic		
Hydrography Dangers/Hazards **Reef** Symbol Set: 46 Value: 120**12** **Color**: Black Jagged Line Draw Rules: Line1 - Dynamic		
Hydrography Dangers/Hazards **Eddies/Overfalls/Tide Rips** Symbol Set: 46 Value: 120**13** **Color**: Gray Draw Rules: Point1 - Static		
Hydrography Dangers/Hazards **Discolored Water** Symbol Set: 46 Value: 120**14** **Color**: Blue Filled W/ Black Dot Outline Draw Rules: Area2 - Dynamic		
Hydrography **Bottom Features** Static/Dynamic: N/A Symbol Set: 46 Value: 12**06**00	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Bottom Features **Bottom Characteristics - Sand** Symbol Set: 46 Value: 120**601** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Bottom Features **Bottom Characteristics - Mud** Symbol Set: 46 Value: 120**602** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Bottom Features **Bottom Characteristics - Clay** Symbol Set: 46 Value: 120**603** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Bottom Features **Bottom Characteristics - Silt** Symbol Set: 46 Value: 120**604** **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Bottom Features **Bottom Characteristics - Stones** Symbol Set: 46 Value: 120**605** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Bottom Features **Bottom Characteristics - Gravel** Symbol Set: 46 Value: 120**606** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Bottom Features **Bottom Characteristics - Pebbles** Symbol Set: 46 Value: 120**607** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Bottom Features **Bottom Characteristics - Cobbles** Symbol Set: 46 Value: 120**608** **Color**: Black Draw Rules: Point3 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Bottom Features **Bottom Characteristics - Rock** Symbol Set: 46 Value: 120**609** **Color**: Black Draw Rules: Point3 - Static	*R*	
Hydrography Bottom Features **Bottom Characteristics - Coral** Symbol Set: 46 Value: 120**610** **Color**: Black Draw Rules: Point3 - Static	*Co*	
Hydrography Bottom Features **Bottom Characteristics - Shell** Symbol Set: 46 Value: 120**611** **Color**: Black Draw Rules: Point3 - Static	*Sh*	
Hydrography Bottom Features **Qualifying Terms - Fine** Symbol Set: 46 Value: 120**612** **Color**: Black Draw Rules: Point3 - Static	*f*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Bottom Features **Qualifying Terms - Medium** Symbol Set: 46 Value: 120**13** **Color**: Black Draw Rules: Point3 - Static		
Hydrography Bottom Features **Qualifying Terms - Coarse** Symbol Set: 46 Value: 120**14** **Color**: Black Draw Rules: Point3 - Static		
Hydrography **Tide and Current** Static/Dynamic: N/A Symbol Set: 46 Value: 12**07**00	N/A	
Hydrography Tide and Current **Water Turbulence** Symbol Set: 46 Value: 12070**1** **Color**: Gray Wavy Line Draw Rules: Point1 - Static		
Hydrography Tide and Current **Current Flow - Ebb** Symbol Set: 46 Value: 120**702** **Color**: Gray Arrow W/ No Feather Draw Rules: Line1 - Dynamic		The line should be drawn in the direction of the flow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Hydrography Tide and Current **Current Flow - Flood** Symbol Set: 46 Value: 120**03** **Color**: Gray Arrow W/ One Feather Draw Rules: Line1 - Dynamic		The line should be drawn in the direction of the flow.
Hydrography Tide and Current **Tide Data Point** Symbol Set: 46 Value: 120**04** **Color**: Gray Diamond Draw Rules: Point1 - Static		
Hydrography Tide and Current **Tide Gauge** Symbol Set: 46 Value: 120**05** **Color**: Brown with Magenta Draw Rules: Point1 - Static		
Oceanography Static/Dynamic: N/A Symbol Set: 46 Value: **13**0000	N/A	
Oceanography **Bioluminescence** Static/Dynamic: N/A Symbol Set: 46 Value: 13**01**00	N/A	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Oceanography Bioluminescence **Visual Detection Ratio (VDR) Level 1-2** Symbol Set: 46 Value: 130**01** **Color**: Dark Green (RGB 26:153:77) Draw Rules: Area2 - Dynamic		
Oceanography Bioluminescence **VDR Level 2-3** Symbol Set: 46 Value: 130**02** **Color**: Light Green (RGB 26:204:77) Draw Rules: Area2 - Dynamic		
Oceanography Bioluminescence **VDR Level 3-4** Symbol Set: 46 Value: 130**03** **Color**: Lime Green RGB (128:255:51) Draw Rules: Area2 - Dynamic		
Oceanography Bioluminescence **VDR Level 4-5** Symbol Set: 46 Value: 130**04** **Color**: Yellow-Green RGB (204:255:26) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Oceanography Bioluminescence **VDR Level 5-6** Symbol Set: 46 Value: 130105 **Color**: Yellow RGB (255:255:0) Draw Rules: Area2 - Dynamic		
Oceanography Bioluminescence **VDR Level 6-7** Symbol Set: 46 Value: 130106 **Color**: Gold RGB (255:204:0) Draw Rules: Area2 - Dynamic		
Oceanography Bioluminescence **VDR Level 7-8** Symbol Set: 46 Value: 130107 **Color**: Light Orange RGB (255:128:0) Draw Rules: Area2 - Dynamic		
Oceanography Bioluminescence **VDR Level 8-9** Symbol Set: 46 Value: 130108 **Color**: Dark Orange RGB (255:77:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Oceanography Bioluminescence **VDR Level 9-10** Symbol Set: 46 Value: 130109 **Color**: Red RGB (255:0:0) Draw Rules: Area2 - Dynamic		
Oceanography **Beach Slope** Static/Dynamic: N/A Symbol Set: 46 Value: 130200	N/A	
Oceanography Beach Slope **Flat** Symbol Set: 46 Value: 130201 **Color**: Light Gray Draw Rules: Area2 - Dynamic		
Oceanography Beach Slope **Gentle** Symbol Set: 46 Value: 130202 **Color**: Dark Gray Draw Rules: Area2 - Dynamic		
Oceanography Beach Slope **Moderate** Symbol Set: 46 Value: 130203 **Color**: Light Gray Dot Fill with Gray Outline Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Oceanography Beach Slope **Steep** Symbol Set: 46 Value: 1302**04** **Color**: Dark Gray Dot Fill W/ Gray Outline Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Static/Dynamic: N/A Symbol Set: 46 Value: **14**0000	N/A	
Geophysics/Acoustics **Mine Warfare (MIW) Bottom Descriptors** Static/Dynamic: N/A Symbol Set: 46 Value: 14**01**00	N/A	
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Solid Rock** Symbol Set: 46 Value: 14010**1** **Color**: Purple (RGB 255:0:255) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Clay** Symbol Set: 46 Value: 14010**2** **Color**: Periwinkle (RGB 100:130:255) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Very Coarse Sand** Symbol Set: 46 Value: 140103 **Color**: Gold (RGB 255:180:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Coarse Sand** Symbol Set: 46 Value: 140104 **Color**: Light Gold (RGB 255:215:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Medium Sand** Symbol Set: 46 Value: 140105 **Color**: Yellow (RGB 255:235:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Fine Sand** Symbol Set: 46 Value: 140106 Color: Light Yellow (RGB 255:255:140) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Very Fine Sand** Symbol Set: 46 Value: 140107 **Color**: Pale Yellow (RGB 255:255:220) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Very Fine Silt** Symbol Set: 46 Value: 140108 **Color**: Turquoise (RGB 0:215:255) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Fine Silt** Symbol Set: 46 Value: 140109 **Color**: Aquamarine (RGB 25:255:230) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Medium Silt** Symbol Set: 46 Value: 140110 **Color**: Green (RGB 0:255:0) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Coarse Silt** Symbol Set: 46 Value: 140**11** **Color**: Lime Green (RGB 200:255:105) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Boulders** Symbol Set: 46 Value: 140**12** **Color**: Red (RGB 255:0:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Cobbles, Oyster Shells** Symbol Set: 46 Value: 140**13** **Color**: Dark Peach (RGB 255:150:150) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Pebbles, Shells** Symbol Set: 46 Value: 140**14** **Color**: Peach (RGB 255:190:190) Draw Rules: Area2 - Dynamic		



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Sand and Shells** Symbol Set: 46 Value: 140115 **Color**: Light Peach (RGB 255:220:220) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - Land** Symbol Set: 46 Value: 140116 **Color**: Gray (RGB 220:220:220) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW-Bottom Sediments - No Data** Symbol Set: 46 Value: 140117 **Color**: Light Gray (RGB 230:230:230) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Bottom Roughness - Smooth** Symbol Set: 46 Value: 140118 **Color**: Green (RGB 0:255:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Bottom Roughness - Moderate** Symbol Set: 46 Value: 140119 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Bottom Roughness - Rough** Symbol Set: 46 Value: 140120 **Color**: Red (RGB 0:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Clutter (Bottom) - Low** Symbol Set: 46 Value: 140121 **Color**: Green (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Clutter (Bottom) - Medium** Symbol Set: 46 Value: 140122 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Clutter (Bottom) - High** Symbol Set: 46 Value: 140123 **Color**: Red (RGB 255:0:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Impact Burial - 0%** Symbol Set: 46 Value: 140124 **Color**: Blue RGB (0:0:255) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Impact Burial - 0-10%** Symbol Set: 46 Value: 140125 **Color**: Green RGB (0:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Impact Burial - 10-20%** Symbol Set: 46 Value: 140126 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Impact Burial - 20-75%** Symbol Set: 46 Value: 140127 **Color**: Orange (RGB 255:127:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **Impact Burial - >75%** Symbol Set: 46 Value: 140128 **Color**: Red (RGB 255:0:00) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Category - A** Symbol Set: 46 Value: 140129 **Color**: Green (RGB 0:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Category - B** Symbol Set: 46 Value: 140130 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Category - C** Symbol Set: 46 **Value:** 140**31** Color: Red (RGB 255:0:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - A1** Symbol Set: 46 Value: 140**32** **Color**: Green (RGB 48:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - A2** Symbol Set: 46 Value: 140**33** **Color**: Light Green (RGB 127:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - A3** Symbol Set: 46 Value: 140**34** **Color**: Lime Green (RGB 175:255:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - B1** Symbol Set: 46 Value: 140135 **Color**: Yellow-Green (RGB 207:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - B2** Symbol Set: 46 Value: 140136 **Color**: Yellow (RGB 255:255:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - B3** Symbol Set: 46 Value: 140137 **Color**: Gold (RGB 255:207:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - C1** Symbol Set: 46 Value: 140138 **Color**: Orange (RGB 255:127:0) Draw Rules: Area2 - Dynamic		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - C2** Value: 140**39** **Color**: Dark Orange (RGB 255:80:0) Draw Rules: Area2 - Dynamic		
Geophysics/Acoustics Mine Warfare Bottom Descriptors **MIW Bottom Type - C3** Symbol Set: 46 Value: 140**40** **Color**: Orange-Red (RGB 255:48:0) Draw Rules: Area2 - Dynamic		
Limits Static/Dynamic: N/A Symbol Set: 46 Value: **15**0000	N/A	
Limits **Maritime Limit Boundary** Symbol Set: 46 Value: 15**01**00 **Color**: Magenta Thin Short Dash Line Draw Rules: Line1 - Dynamic		
Limits **Maritime Area** Symbol Set: 46 Value: 15**02**00 **Color**: Magenta Draw Rules: Area2 - Dynamic		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Limits **Restricted Area** Symbol Set: 46 Value: 150300 **Color**: Magenta Dashed T Line Draw Rules: Line1 - Dynamic		
Limits **Swept Area** Symbol Set: 46 Value: 150400 **Color**: Pink Dots Draw Rules: Area2 - Dynamic		
Limits **Training Area** Symbol Set: 46 Value: 150500 **Color**: Magenta/Magenta ! In Circle W/ Dashed Outline Draw Rules: Area2 - Dynamic		
Limits **Operator-Defined** Symbol Set: 46 Value: 150600 **Color**: Orange Solid Outline Draw Rules: Area2 - Dynamic		
Man-Made Structures Static/Dynamic: N/A Symbol Set: 46 Value: **16**0000	N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.

DESCRIPTION	ICON	NOTES
Man-Made Structures **Submarine Cable** Symbol Set: 46 Value: 16**01**00 **Color**: Magenta Draw Rules: Line1 - Dynamic		**Line Style**: Repeating pattern wavy lines The points are typically connected with a solid curved lined.
Man-Made Structures **Submerged Crib** Symbol Set: 46 Value: 16**02**00 **Color**: Blue Fill W/ Black Dotted Outline Draw Rules: Area2 - Dynamic		
Man-Made Structures **Canal** Static/Dynamic: D Symbol Set: 46 Value: 16**03**00 **Color**: Black Solid Thick Line Draw Rules: Line1 - Dynamic		
Man-Made Structures **Ford** Symbol Set: 46 Value: 16**04**00 **Color**: Black Symbol Draw Rules: Point1 - Static		
Man-Made Structures **Lock** Symbol Set: 46 Value: 16**05**00 **Color**: Black Symbol Draw Rules: Point1 - Static		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

TABLE M-III. Oceanographic icons - Continued.


DESCRIPTION	ICON	NOTES
Man-Made Structures **Oil/Gas Rig** Symbol Set: 46 Value: 16**06**00 **Color**: Black Symbol Draw Rules: Point1 - Static		
Man-Made Structures **Oil/Gas Rig Field** Symbol Set: 46 Value: 16**07**00 **Color**: Gray Dot Pattern Fill Draw Rules: Area2 - Dynamic		
Man-Made Structures **Pipelines/Pipe** Symbol Set: 46 Value: 16**08**00 **Color**: Gray Dash Line with Circle Draw Rules: Line1 - Dynamic		
Man-Made Structures **Pile/Piling/Post** Symbol Set: 46 Value: 16**09**00 **Color**: Black Dot Draw Rules: Point1 - Static		

TABLE M-IV. Meteorological space icons.

DESCRIPTION	ICON	DRAW RULES
SPACE Static/Dynamic: N/A Symbol Set: 47 Value: **11**0000	N/A	No icon is associated with this entity. It is for hierarchal purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

WARFIGHTING SYMBOLS
IN PSEUDO-THREE-DIMENSIONAL DISPLAYS

N.1 SCOPE

N.1.1. Scope. This appendix provides definitions and guidelines for display of Common Warfighting Symbology in pseudo-three-dimensional displays, also known as 2.5D displays. In the context of this appendix, 2.5D display refers to the presentation of information that gives the perception of depth or varying distance, as in a non-orthogonal viewing angle. In other words, it is a viewing angle that is not perpendicular to the surface of the Earth. This is in contrast to several other emerging graphic technologies that will allow for viewing in stereographic or full three-dimensional display. In stereo display, dual images are used to recreate a three-dimensional perception in the human brain.

a. Although there is some discussion of the use of 2.5D symbols, the primary focus of this appendix is the display of the two-dimensional symbols contained in MIL-STD-2525 in a 2.5D display of the surrounding environment. Modeling and simulation standards and methods of portrayal would be more suitable for the display of 2.5D or full three-dimensional symbols and models.

b. This appendix is not a mandatory part of the standard. It is intended for guidance only.

N.2 REFERENCES

This section is not applicable to this standard.

N.3 DEFINITIONS

N.3.1. Billboarding: A method for portraying a symbol in a 2.5D display in which the symbol is perpendicular to the viewing angle.

N.3.2. Cubing: A method for portraying a symbol in a 2.5D display in which the symbol is overlaid on a cube to present a surface visible from the viewing angle.

N.3.3. Curve (line): One-dimensional geometric primitive representing the continuous image of a line.

N.3.4. Geospatial: Pertaining to the geographic location and characteristics of natural or constructed features and boundaries on, above, or below the Earth's surface; especially referring to data that is geographic and spatial in nature.

N.3.5. Glyph: A symbol (as a curved arrow on a road sign) that conveys information nonverbally.

N.3.6. Icon: A sign (as a word or graphic symbol) whose form suggests its meaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

N.3.7. Image: The optical counterpart of an object produced by an optical device (as a lens or mirror) or an electronic device.

N.3.8. Marker post (lollipop): A method for portraying a symbol in a 2.5D display in which the symbol is billboarded but also raised above or below the terrain surface by a vertical line.

N.3.9. Model: A miniature representation or simulation.

N.3.10. Pictograph: A picture representing a word or idea; a hieroglyph.

N.3.11. Point: Zero-dimensional geometric primitive, representing a position.

N.3.12. Solid (volume): Three-dimensional geometric primitive, representing the continuous image of a region of Euclidean three space.

N.3.13. Surface (area): Two-dimensional geometric primitive locally representing a continuous image of a region of a plane.

N.3.14. Symbicon: A hybrid of a symbol and icon which attempts to combine the best identification performance benefits of each representation.

N.3.15. Symbol: An object that presents information (MIL-STD-2525). An arbitrary or conventional sign used in writing or printing relating to a particular field to represent operations, quantities, elements, relations, or qualities.

N.3.16. Terrain draping: A method for portraying a symbol in a 2.5D display in which the symbol is overlaid on a terrain surface.

N.3.17. Three-dimensional: Giving the illusion of depth or varying distances.

N.3.18. Two-dimensional: Lacking depth of characterization.

N.4 PSEUDO-THREE-DIMENSIONAL (2.5D) SYMBOLIZATION

N.4.1. Introduction. Symbols are used to convey information about objects in space. In most traditional command and control applications, this has been accomplished by an orthogonal (directly overhead) view, such as when looking at a map. Command and control symbols have been overlaid on top of geospatial information or a “map background” to provide a geospatial context to locate the military object of interest at a geographic position. Attributes of the object are visually encoded in the symbol to communicate information about the object to the observer.

a. As command and control symbology has evolved from hand-annotated paper maps to automated computer display screens, views other than orthogonal have become practical. Non-overhead views or dynamic viewing positions such as “fly-through” displays provide new ways in which a warfighter can better perceive and understand the operational environment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

b. This appendix establishes some basic terminology for addressing portrayal of information in 2.5D displays and provides advantages, disadvantages and guidance on some of these methods of display. Although some aspects of 2.5D symbols are discussed, the primary focus of this appendix is on portrayal of the two-dimensional symbols contained in MIL-STD-2525 in a 2.5D display. The modeling and simulation (M&S) community has been portraying the environment in 2.5D for a long time and there are M&S standards and symbol libraries available for 2.5D symbology (see N.5.2).

c. This appendix is not intended to be a "standard" as such. New developments in the information technology, computer graphics and the geospatial information systems (GIS) and modeling and simulation industries will undoubtedly eclipse the information provided here.

N.4.2. When to use 2.5D displays. The paramount point when considering the use of 2.5D displays is to recognize that a 2.5D display is not necessarily better than a two-dimensional display for every application. A 2.5D display may look neat and impress a viewing audience, but it must really be evaluated as to whether it presents information better or not as well as a traditional two-dimensional display.

N.4.2.1. Research indicates that using 2.5D displays provide advantages such as:

a. A visual representation that may be useful in understanding the shape or rough spatial layout of scenes

b. More intuitive and natural usage

c. Preferred by users

d. Clearer picture of tactical information (eliminate need to search text boxes for attributes such as altitude and to do mental integration of information from different views). These benefits may also be engineered into 2D displays.[1]

N.4.2.2. Conversely, 2.5D displays have several disadvantages, they are:

a. Prone to distortion (due to association with parameters of perspective)

b. Prone to clutter (less display area near horizon, so more objects are packed into a smaller area; addition of depth cues such as drop lines increase number of objects displayed)

c. Poor for tasks requiring precision, both about objects (e.g., realistic icons do not scale well; distant objects may be too small to recognize) and distances and angles (from foreshortening and inadequate and conflicting depth cues).

[1] Smallman, H. S., St. John, M., Oonk, H. M. and Cowen, M. B. (2001), Information availability in 2D and 3D displays, IEEE Computer Graphics and Application, 21, 51-57.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

N.4.2.3. Research is mixed concerning performance benefits of using 2D or 2.5D displays largely due to the great variety of factors considered in the studies. Also, users may prefer (or rate highly) displays that actually hinder rather than enhance their performance.[2]

N.4.3. Taxonomy of symbols and displays. Symbols can be classified many different ways, including subject area, data structure and visual aspects. A basic taxonomy might look something like this:

N.4.3.1. Subject area.

a. Operational symbols – military operations and control measures

b. Geospatial symbols – provides geospatial context (map background)

N.4.3.2. Delineation type.

a. Point – one coordinate point

b. Line – a series of coordinate points

c. Area – a series of coordinate points in which the line creates a polygon

d. Volume – a polygon or shape with a vertical component

N.4.3.3. Degree of Abstraction.

a. Abstract symbol – a symbol representing an object based on learned association

b. Pictograph or icon – a symbol representing an object based on the symbol looking like the object

c. Symbicon – a hybrid of a symbol and an icon which attempts to combine the best identification performance benefits of each representation.

d. Two-dimensional image – a picture of the object based on varying intensity of reflected energy from the object

e. Pseudo-three-dimensional model – a physical or digital representation of an object

N.4.3.4. Dimensionality.

a. Two-dimensional – a symbol lacking depth of characterization

[2] Smallman, H. S., St. John, M., Oonk, H. M. and Cowen, M. B. (2005), Niive Realism: Misplaced faith in the utility of realistic displays, Ergonomics in Design, 13(3), 6-13, Fernandes, K. Usability of 3D Perspective Displays, SPAWAR and St. John, M, Cowen, M.B., Smallman, H.S. and Oonk, H.M. (2001) The use of 2D and 3D displays for shape understanding versus relative position tasks. Human Factors, 43, 79-98.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

b. Pseudo-three-dimensional (2.5D) – a symbol giving the illusion of depth or varying distances

c. Three-dimensional – a symbol displayed by stereoscopic, holographic, or other means that provides a complete representation of three dimensions.

N.4.3.5. Relative to terrain.

a. Ground clamped – symbol is shown on terrain

b. Elevated – symbol is raised above terrain surface

N.4.4. Geospatial (map) symbols. Geospatial symbology generally follows the “earth surface” and can be draped over elevation data. Typically, operational symbols are shown on a map background to provide a positional reference. Digital geospatial information can be classified into two types.

N.4.4.1. Raster data. Raster data is a method of representing geospatial data characterized by a matrix of evenly spaced rows and columns of data points. These data points (called "pixels" in image and scanned map data) typically represent some value at that point, while the position within the columns and rows determines the geographic position. Raster data structures are typically used to record scanned maps and charts (MC&G graphic data), image data, or gridded data, such as terrain elevation posts in an elevation model.

N.4.4.2. Vector data. Vector data represents each cartographic feature by an entity description (feature code) and a spatial extent (geographic position). Geographic position may be two-dimensional (horizontal position only) or three-dimensional (including elevation). Features are categorized as point, line, or area features. The position of a point feature is described by a single coordinate pair (or triplet for three dimensional data). The spatial extent of a line feature is described by a string of coordinates of points lying along the line, while the extent of an area feature is described by treating its boundary as a line feature. Vector data may be stored in a sequential, chain node, or topological data structure.

N.4.5. Imagery. By its nature, imagery is not symbolized but instead relies on variations in intensity of captured light (or other portion of spectrum or other phenomena) to create a visual picture of the object or phenomena being represented. Imagery can be used as a background display or the picture of an object or piece of equipment.

a. There is a significant difference between raster geospatial data or an image and vector geospatial data. In vector data, geographic features can be filtered or turned on or off in a vector display. In a raster display, the map or image content is fixed and you see whatever was shown on the scanned paper map or image.

N.4.6. Optimum display method. Each type of symbolization has advantages and disadvantages. There is no one right answer. The intended application will determine which method best meets the intended use of the display.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

N.5 GUIDANCE AND PORTRAYAL CONSIDERATIONS IN PSEUDO-THREE-DIMENSIONAL (2.5D) DISPLAYS

N.5.1. Use of 2D symbols in 2.5D display. The symbols provided in the appendices of MIL-STD-2525 were designed for two-dimensional display. They can be used in a 2.5D display, using various visualization techniques, some of which are described below. The visualizations described here are not intended to be an all-encompassing or comprehensive list but merely some of the more common approaches. The intent of this appendix is to provide guidance to implementers on some of the advantages and disadvantages of these visualization techniques.

N.5.1.1. Visualization of icons. The symbols in the various appendices of MIL-STD-2525 for space, air, land, maritime (sea surface and sea subsurface), meteorology, signals intelligence, etc., symbolize units, equipment and installations as point symbols. Each is associated with a single geographic coordinate. The following paragraphs describe several methods of symbolizing point icons.

N.5.1.1.1. Terrain draping. One simple method of displaying two-dimensional symbols in a 2.5D display is to simply place the 2D symbols over the 2.5D surface model (see figure N-1). This makes it appear as if operational symbols were large flags laid out on the ground. With draping, no changes to existing 2D symbols are required. Since the viewing angle is not perpendicular, symbols may be distorted in shape. Depending on the underlying terrain, some symbols may be obscured by higher terrain in between the symbol and the viewing position.

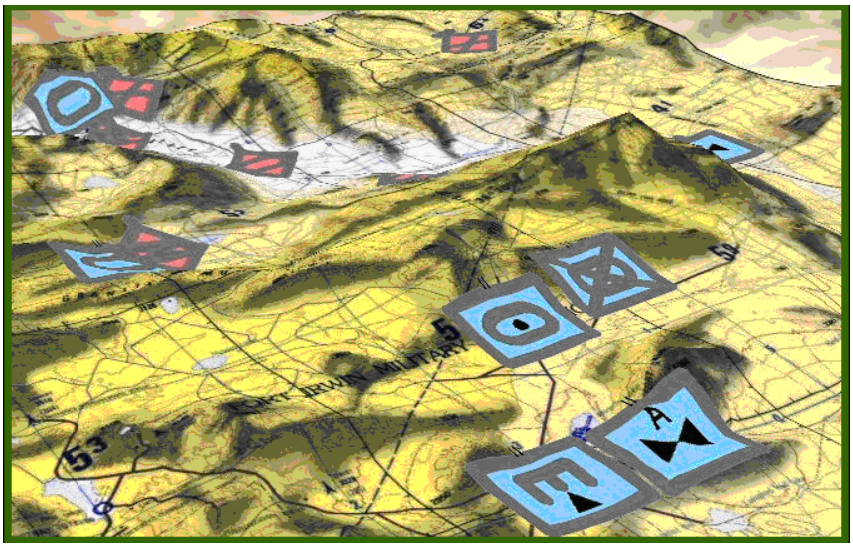


FIGURE N-1. Example of terrain draping of icons.
(Static MOLE layer displayed in ArcGlobe)

N.5.1.1.2. Billboarding. Billboarding is a technique in which a two-dimensional symbol is positioned vertically or perpendicular to the view angle (see figure N-2). This makes symbols easier to see than if they were draped over the terrain but is much more computationally demanding, sometimes affecting system performance. Although used in systems, the performance benefits of billboarding have not been validated with performance data. There are

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

several factors that must be considered when orienting the billboard as well. Symbols placed on the ground have to be elevated enough so the entire symbol is visible. If the center of the symbol was co-located with the position on the ground surface, the bottom half of the symbol would be obscured. Billboarding is conceptually different from lollipopping. In fact, most billboard displays are raised above ground level. Billboarding refers to placing the 2D symbol perpendicular to view angle, while lollipopping or using a marker post refers to elevating the symbol above or below the terrain surface.

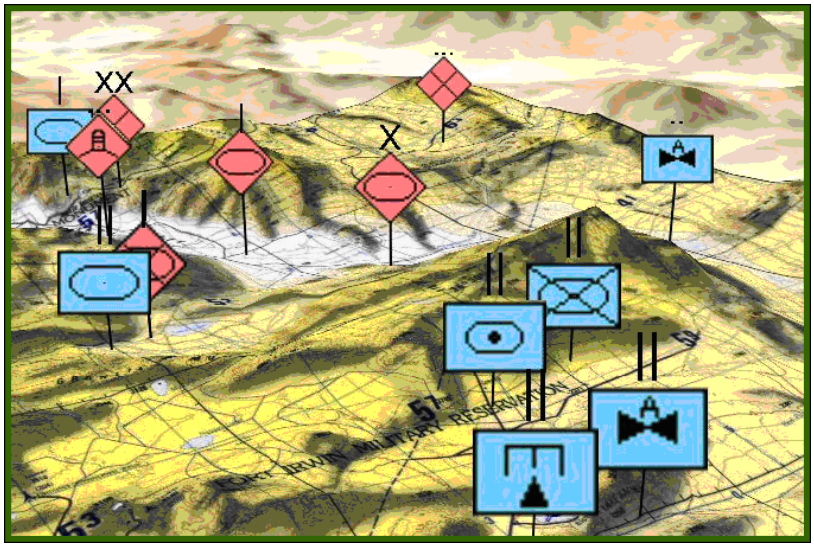


FIGURE N-2. Example of billboarding of icons.
(TOC 3D display)

N.5.1.1.3. Cubing. An alternative to billboarding is to project the 2D symbol onto a 2.5D shape, such as a cube (see figure N-3). As with billboarding, cubes can also be elevated above the terrain surface.




FIGURE N-3. Example of cubing of icons.

N.5.1.1.4. Marker post. In many cases, billboarded or cubed symbols are raised above the ground surface using a marker post, a technique sometimes called “lollipopping” (see figure N-4). The user can set an arbitrary height above ground surface and drop down lines connect the symbol to its ground location. In a 2.5D display, tracks that are actually above or below ground or water surface can be portrayed in their actual location. Lollipopping has the potential to create confusion with the actual altitude of an above or below-ground/water track. For example, it might appear that a helicopter is flying underneath a tank. Care must also be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

taken to distinguish between symbols raised to an arbitrary height above or below the terrain and those symbols showing an actual altitude/depth, if both types are used in the same display.

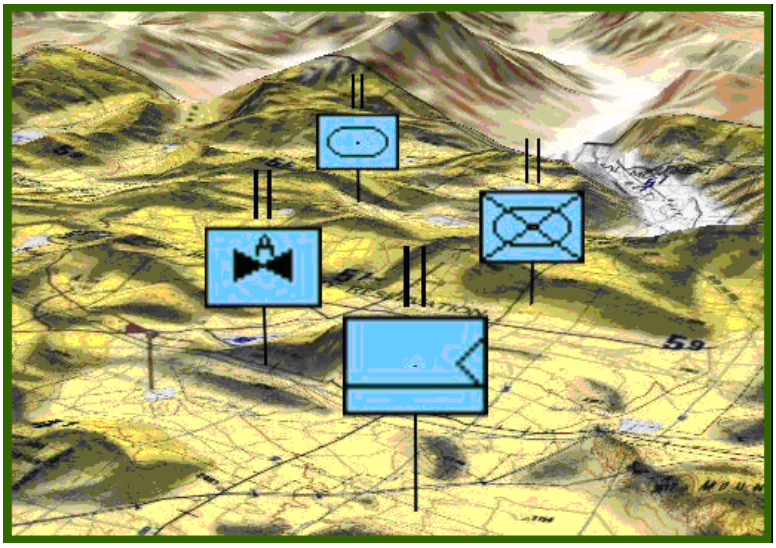


FIGURE N-4. Example of marker posts.
(TOC 3D display)

N.5.1.2. Visualization of control measure symbols. The control measure symbols in MIL-STD-2525 are more complex than the simple icons in appendix A and contain point, line and area symbols. The techniques for portrayal of line and area symbols are generally similar to the point symbols. Lines may be “draped” over the terrain; but, as with points, draping creates the potential for a symbol to be obscured by intervening terrain (see figure N-5). Line symbols can be extruded above the terrain for visual emphasis, forming what appear to be walls on the terrain surface (see figure N-6). These walls could be used as a background for presenting additional information, such as echelon, status, etc.

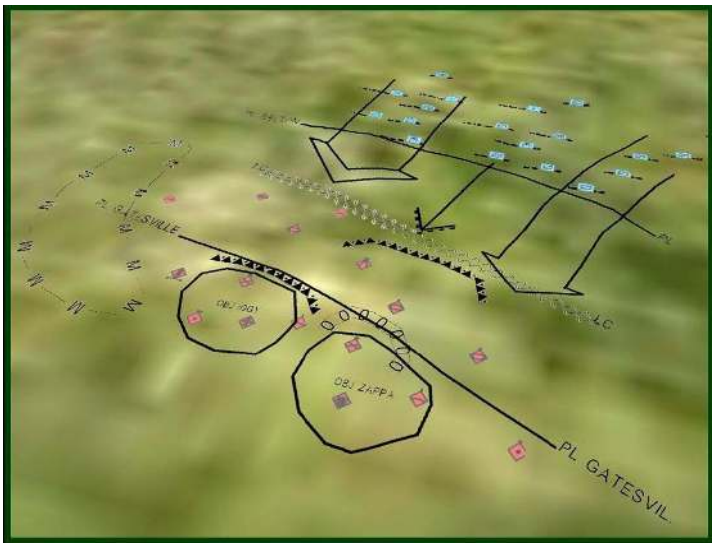


FIGURE N-5. Example of draped control measure symbols.
(MOLE in ArcGlobe)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

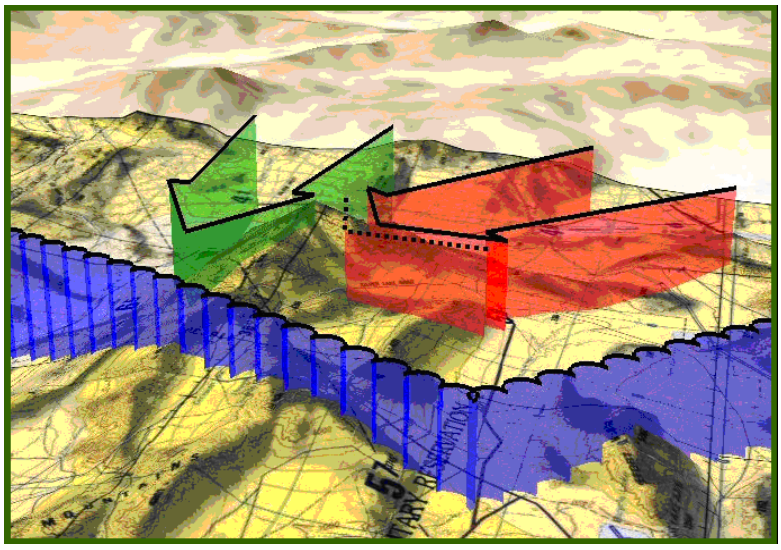


FIGURE N-6. Example of extruded control measure symbols.
(TOC 3D display)

N.5.1.3. Symbicon. A symbicon is a hybrid of an abstract symbol with a pictograph or icon that increases the ease of identifying an object[3] (see figure N-7). A typical symbicon may combine the identification code of a symbol, for example "B" for bomber, with the stylized silhouette of an aircraft.

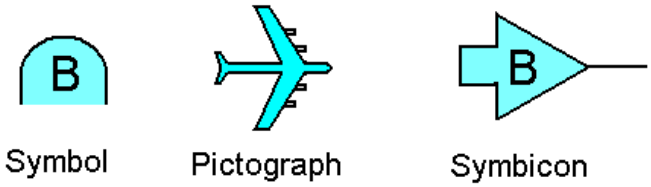


FIGURE N-7. Example of a symbicon.

N.5.2. Pseudo-three-dimensional models. Many systems are starting to use 2.5D models to represent military objects, rather than the 2D symbols contained in MIL-STD-2525 (see figure N-8). Models may work well for portrayal of individual platforms or systems, such as a tank or aircraft, but models work less well or may be impractical for symbolizing larger units. Although in general, users prefer to look at realistic icons, they result in slower, error-prone performance.[4] The level of detail provided by the model may also create recognition problems in the display that reflect the situation in the real world. For example, if an operator were unfamiliar with the appearance of a particular weapons system, it would not make much sense to use a 2.5D model of that weapons system to identify the equipment type. You would also expect recognition errors to occur if two weapons systems were similar in appearance. Overall,

[3] Symbicons: Advanced Symbology for Two-dimensional and Three-dimensional Displays, SPAWAR TR 1850, February 2001
[4] Smallman, H.S., St. John, M.B., Oonk, H.M. and Cowen, M.B. (2000) Track recognition using two-dimensional symbols or three-dimensional realistic icons. SPAWAR Technical Report 1818.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

traditional symbols were more useful when determining platform identity and affiliation were required. Icons are better for determining some aspects of direction of movement.[5]



FIGURE N-8. Examples of pseudo-three-dimensional models.

N.5.2.1. Modeling and simulation (M&S) standards. The International Organization for Standardization (ISO) 18023, Computer Graphics and Image Processing – Synthetic Environment Data Representation and Interchange Specification (SEDRIS) suite of standards are available for the exchange of modeling and simulation data.

N.5.2.2. Model libraries. The DOD maintains several libraries of reusable digital models of weapons systems, such as Army Model Exchange (https://modelexchange.army.mil).

N.5.3. Design considerations for symbology in a 2.5D display.

N.5.3.1. Symbol location. One important function of a symbol is to indicate where the object is located. MIL-STD-2525, 5.3.13 requires that point icons be positioned so the geometric center, or center of mass of the symbol, corresponds to the actual location of the object. Certain other control measure symbols have specified “anchor points” that differ from the center of mass of the symbol.

N.5.3.1.1. Submergence of symbols. If a symbol is overlain on the terrain ie., terrain draping, it is possible to tie the center of mass of the symbol to the symbol location as in a two-dimensional display and conform to the general rules of MIL-STD-2525. If, however, the symbols are billboarded or shown vertically, then linking the symbol location to the center of mass of the symbol will result in the bottom half of the symbol being below the terrain surface. Billboarding displays generally place bottom of the symbol on the terrain surface. This problem does not occur if the object is an air or sub-surface track and is far enough above or below the terrain surface (ground/water).

N.5.3.1.2. Height above/below terrain surface. Some 2.5D displays use the “lollipop” technique to elevate symbols a fixed distance above the terrain surface. This works well for ground tracks but may cause confusion if ground and air tracks were shown in the same display, since some symbols will be raised an arbitrary height while air tracks will generally show actual altitude of the track.

[5] Searching for Tracks Imaged as Symbols or Realistic Icons: A Comparison Between Two-Dimensional and Three-Dimensional Displays, SPAWAR TR 1854, April 2001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

N.5.3.1.3. Estimating track position. Studies have shown that estimating a track position in a 2.5D display is difficult because many of the visual cues that the human brain uses to estimate a location cannot be duplicated in a 2.5D digital display. Operator performance is increased if artificial cues are added, typically a drop line or drop shadow. A drop line is a vertical line from the above-surface object to the terrain surface. A drop shadow is a silhouette of the object on the terrain surface. These artificial cues can contribute to display clutter. Even two-dimensional displays will benefit by having a distinct "locator point" on the symbol, rather than just using the center of mass of the symbol.[6]

N.5.3.2. Perspective. In a traditional two-dimensional (map-like) display, the perspective is "orthogonal" or viewed from directly overhead; so, there is no change of scale over the display. In a 2.5D view the scale of the display decreases (gets smaller) as distance from the observer increases. This creates difficulty in perceiving the actual location of an object in space. In a two-dimensional display, the elevation of an object is not obvious, but the horizontal position (x,y coordinates) is not in doubt. In a 2.5D display, the latitude, longitude and elevation (x, y and z) aspects of location are each ambiguous. When viewing an object in the real world, a human observer uses a number of visual cues to determine location in three-dimensional space. Objects become smaller with increasing distance. Illumination provides variation in light and dark to specify shape in depth. Closer objects block out objects that are farther away. People see in stereo vision and can judge how far away an object is based on the slight differences in the image in their right and left eyes. In a digital display, many of these real-world cues are impossible or impractical to reproduce. Varying symbol size with distance and closer objects obscuring more distant objects are the most easily implemented visual cues. These visual cues have limitations when implemented in a digital display. Symbols can only be made so small before they becomes unrecognizable; yet, exaggerating their size to make them more legible distorts the appearance of location, making them appear closer than they really are. Closer symbols obscuring symbols that are farther away also makes legibility difficult. Artificial visual cues, not found in the real world but possible on a digital display, such as drop lines and drop shadows (discussed previously), enhance a human's ability to determine the location of an object in a 2.5D display.[6]

N.5.3.3. Direction indicators. In a 2.5D display, the viewing angle is variable, dependent on the viewing position selected by the operator. Typical viewing angles range from 25 to 65 degrees. Unlike map displays, where north is generally displayed oriented to the top of the display, the 2.5D display can be viewed from any direction. In a "fly-through" the viewing direction is changing frequently. There are several methods to provide a visual cue for direction of view, including placing north arrows in the display or showing the heading and attitude in a "heads-up display" type symbol (see figure N-9).

[6] Track Location Enhancements for Perspective View Displays, SPAWAR TR 1847, December 2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

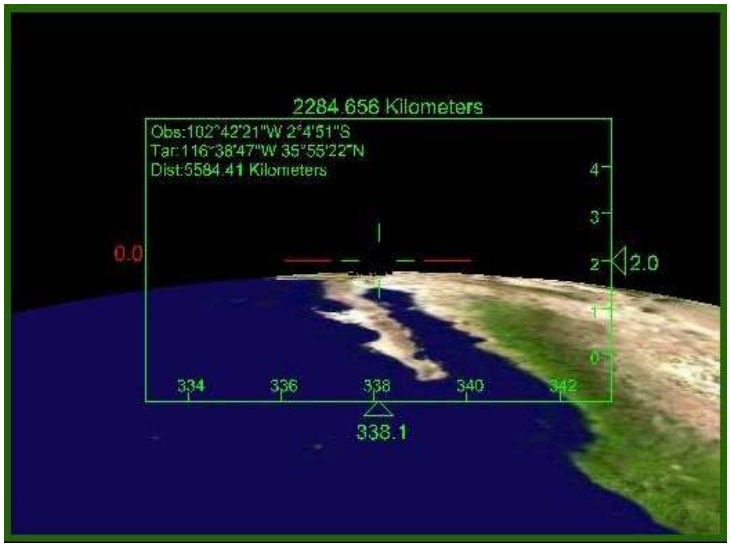


FIGURE N-9. Example of visual cue for direction of view.
(TOC 3D display)

N.5.4. Text amplifiers for symbols. Many symbols in MIL-STD-2525 have text fields around them to present additional information. Text fields for point icons are defined in figure 2. Text fields are also found on the control measure symbols and control measures. Showing text around symbols in a 2.5D display creates a number of difficulties. Perhaps the greatest is the perspective in the display. One of the visual cues to create the impression of three dimensions is to show objects that are farther away in a smaller size; however, reducing symbol size, including text, also reduces legibility. Occultation is another visual cue, in which closer objects obscure more distant objects. Closer objects with text around them just create a larger "footprint" in the visual plane, potentially obscuring distant symbols or terrain features. Finally, the text will only be visible if there is enough contrast between the text and the background.

N.5.5. Speed vectors and trailing lines. A speed vector is a line extending in front of a symbol or icon, whose length is proportional to the speed of the object. The speed vector is an easy way to symbolize the speed and the heading of the platform. They are generally used on fast-moving platforms such as air tracks. A trailing line is a line showing the track of a platform, indicating where it has been for a period of time in the past. In a 2.5D perspective display, the record of a track of a platform is sometimes enhanced by using drop lines to indicate the position on the terrain surface. Drop lines are sometimes filtered by time to show only a limited trail and to reduce display clutter.

N.5.6. Incomplete data. One of the difficulties facing implementers of 2.5D displays is that sometimes the track data being symbolized may be incomplete. For example, the latitude and longitude of an air track may be known, but the altitude unknown. This is not a great problem in an overhead two-dimensional display, but in a 2.5D display, where should the air track be shown? If the direction of travel is unknown, which direction should be symbolized? The implementer might choose to ignore the missing data (show the air track on the ground) or infer it from other sources. In either case, a warning indicator should be included with the symbol to indicate to the operator that the track has been symbolized based on incomplete information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

N.5.7. Vertical exaggeration of terrain and tactical symbols. In 2.5D displays, the vertical dimension is often exaggerated to highlight variation in the terrain (see figure N-10). This particular example has a vertical exaggeration of x15. This vertical exaggeration may create distortions in the display, when tactical symbols are also used. For example, if the vertical exaggeration was x3, then the altitude of the air track would also have to be exaggerated by x3 to keep relative position with the terrain.

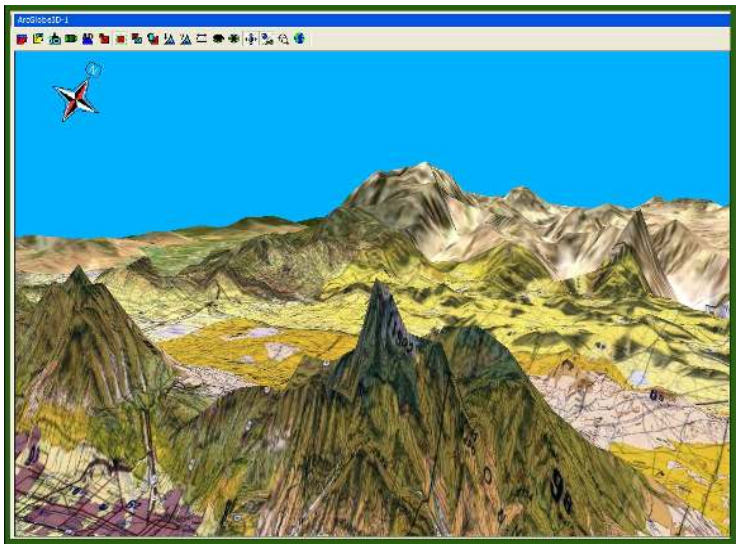


FIGURE N-10. Example of vertical exaggeration.
(TOC 3D display)

N.5.8. Implications for training and doctrine. The use of 2.5D displays in the command and control community is growing. Research into human performance has shown, however, that a 2.5D display is not necessarily the best way to accomplish all tasks. In fact, some tasks are better performed using a conventional "overhead" 2D display or even a conventional map. The types of tasks performed on a C4ISR system should be conducted using a display mode (2D or 2.5D) that best fits the intended task. Operators should be trained to understand which tasks are accomplished best using each display type. User preference often has little bearing on the choice because an operator may like one type of display, even though their performance is degraded, compared to other display modes. Some tasks may be accomplished best using a combination of 2.5D to get an overall impression of the situation and 2D views to do the specific locational analysis needed to accomplish the task.

N.6 NOTES

N.6.1. Graphics displayed in this appendix are from the 3D Visualization and Tactical Symbology Considerations for Command, Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance (C4ISR) Applications, Concurrent Technologies Corporation (CTC) White Paper, April 2, 2004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AC
Navy – OM
Air Force – 93
NGA – MP

Preparing activity:
DISA – DC3
(INST-2025-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:59Z
Check the source to verify that this is the current version before use.