INCH-POUND

MIL-C-28754/78A
26 JULY 1991
SUPERSEDING
MIL-C-28754/78
29 APRIL 1985

# MILITARY SPECIFICATION SHEET

## CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, 40 CONTACT, SINGLE SPAN, DUAL INLINE PACKAGE (DIP)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector-frame assembly described herein * shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

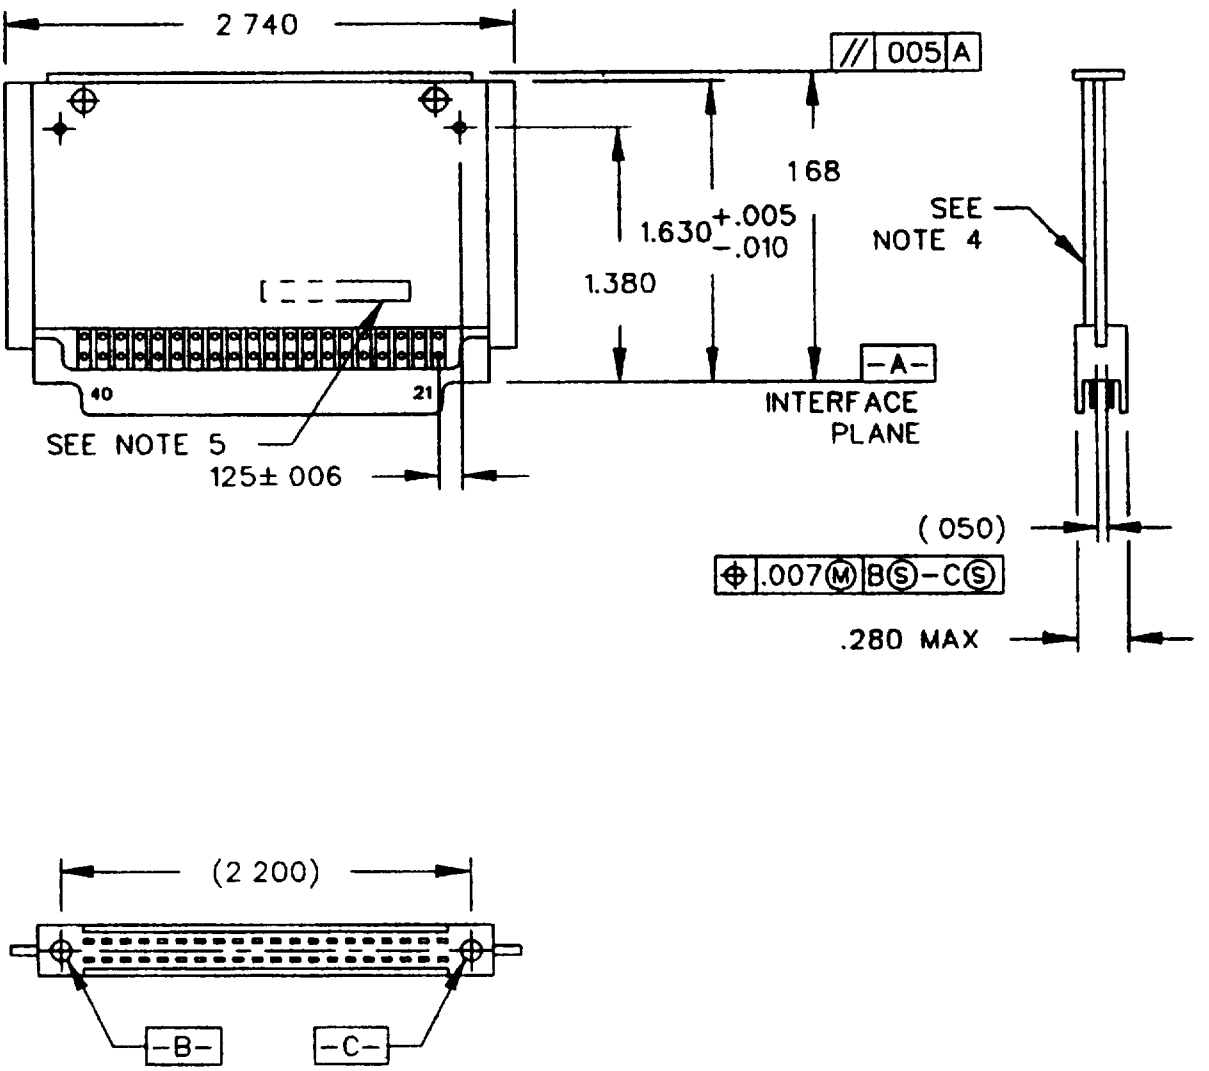



FIGURE 1. Dimensions and configurations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| 0.005 | 0.13 | 0.125 | 3.18 | 2.200 | 55.88 |
| 0.006 | 0.15 | 0.280 | 7.11 | 2.740 | 69.60 |
| 0.007 | 0.18 | 1.380 | 35.05 | | |
| 0.050 | 1.27 | 1.680 | 42.67 | | |

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

3. Unless otherwise specified, tolerances are plus or minus 0.005 inch (0.13 mm) for three place decimals, and plus or minus 0.01 inch (0.3 mm) for two place decimals.

4. Flatness of frame MIL-C-28754/72- (applicable dash number) shall be maintained on the assembly.

5. Assembly shall be marked, in approximate location shown, in accordance with MIL-C-28754 using contrasting ink and characters 0.09 inch (2.3 mm) high.

FIGURE 1. Dimensions and configurations - Continued. *



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

Separating force: The frame shall remain attached to the connector when subjected to a separating load of 15 pounds (66.6 N) applied for 30 seconds at a temperature of 257°F (125°C).

Military part number: M28754/78- (dash number from table I).

TABLE I. Dash number, connector and frame.

| Dash no. | Connector | Frame |
|---|---|---|
| 01 | MIL-C-28754/11-02 | MIL-C-28754/72-01 |
| 02 | MIL-C-28754/11-02 | MIL-C-28754/72-02 |
| 03 | MIL-C-28754/11-02 | MIL-C-28754/72-03 |
| 04 | MIL-C-28754/11-02 | MIL-C-28754/72-04 |
| 05 | MIL-C-28754/11-02 | MIL-C-28754/72-05 |
| 06 | MIL-C-28754/11-02 | MIL-C-28754/72-06 |
| 07 | MIL-C-28754/11-02 | MIL-C-28754/72-07 |
| 08 | MIL-C-28754/11-02 | MIL-C-28754/72-08 |
| 09 | MIL-C-28754/11-02 | MIL-C-28754/72-09 |
| 10 | MIL-C-28754/11-02 | MIL-C-28754/72-10 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, connector and frame - Continued.

| Dash no. | Connector | Frame |
|---|---|---|
| 11 | MIL-C-28754/11-03 | MIL-C-28754/72-01 |
| 12 | MIL-C-28754/11-03 | MIL-C-28754/72-02 |
| 13 | MIL-C-28754/11-03 | MIL-C-28754/72-03 |
| 14 | MIL-C-28754/11-03 | MIL-C-28754/72-04 |
| 15 | MIL-C-28754/11-03 | MIL-C-28754/72-05 |
| 16 | MIL-C-28754/11-03 | MIL-C-28754/72-06 |
| 17 | MIL-C-28754/11-03 | MIL-C-28754/72-07 |
| 18 | MIL-C-28754/11-03 | MIL-C-28754/72-08 |
| 19 | MIL-C-28754/11-03 | MIL-C-28754/72-09 |
| 20 | MIL-C-28754/11-03 | MIL-C-28754/72-10 |

Qualification information: The connector assembly shall meet the qualification tests of MIL-C-28754 table IV, type IV, and this slash sheet.

Number of units to be inspected: To qualify any dash number assembly, 12 units shall be inspected. To qualify dash numbers using the other connector, only 4 units shall be inspected.

Supersession data: Supersedes Naval Electronic Systems Command Drawing Number 0102-721-1 thru -6, Code Identification Number 28687.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS

Agent:
NW

Preparing activity: *
Navy - SH

(Project 5935-3770-11)



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

**INSTRUCTIONS**

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | MIL-C-28754/78A | |

3. DOCUMENT TITLE Connectors, Electrical, Modular, Connector Assembly, Type IV, 40 Contact, Single Span, Dual Inline Package (DIP)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON (If applicable) | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME | b. TELEPHONE (Include Area Code)<br>(1) Commercial | (2) AUTOVON |
|---|---|---|
| Technical Point of Contact (TPOC): Mr. Robert F. Dilger (Code 602A)<br>PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS: | TPOC: 812-854-1528 | 88-482-1528 |
| c. ADDRESS (Include Zip Code) Commanding Officer<br>Naval Weapons Support Center<br>ATTN: Robert F. Dilger, Bldg. 2940W, Code 602A<br>Crane, Indiana 47522-5060 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |

DD Form 1426, OCT 89 Previous editions are obsolete. 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:51Z
Check the source to verify that this is the current version before use.