MILITARY SPECIFICATION

STAND, WARHEAD SECTION H4162

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of stand entitled Stand, Warhead Section H4162, which is used with the Sergeant warhead section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1168 - Lot Numbering of Ammunition.

DRAWINGS

ORDNANCE CORPS

8838364 - Warhead Lifting Fixture.
8847830 - H4162 Warhead Section Handling Stand Assembly.
8848044 - Removal Fixture.
8857639 - T.D.D. Lifting Fixture.
8856800 - Rear Base Assembly - Crate (XH4162-1).
8856801 - Fwd. Base Assembly - Crate (XH4162-2).
8856802 - Fwd. Cart Assembly - Crate (XH4162-4).
8856803 - Rear Cart Assembly - Crate (XH4162-3), Mounting Ring Assembly (XH4162-5).
8856846 - Warhead Section - Box Lifting Fixture (XH4162-8).
8856847 - T.D.D. Lifting Fixture - Box (XH4162-7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

8859005 - Removal Fixture - Box (XH4162-6) Assembly.
EL-8871601 - Equipment List.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The stand shall comply with all requirements specified on the drawing (dwg) 8847830, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. The contractor shall assign serial numbers as required by drawings. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

3.5 Structural strength. The warhead section shall withstand total load factors of 3125 + 75 pounds without distortion in excess of 0.015 inch when tested as specified in 4.4.1.

3.6 Workmanship.

3.6.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.6.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.6.3 Burrs. Parts shall be free from burrs.

3.6.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.6.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 1 complete assembly (see dwg 8847830) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table I. Tests shall be conducted in order specified in Table I.

Table I

First article inspection and tests

Inspection or Test	Dest	Non-Dest
1. Classification of characteristics (see 4.3.2.1)		X
2. Structural strength (see 3.5)		X

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table II and Table III), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Table II
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

Table III

Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-9	all	14-16	12	28-33	16	77-121	20
10	9	17-18	13	34-41	17	122-273	21
11	10	19-22	14	42-54	18	over 273	22
12-13	11	23-27	15	55-76	19		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 H4162 Warhead section stand (see dwg 8847830).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	The relationship of the boom alignment pin to the rear frame track plate assembly (left) looking towards boom side not compatible. The relationship adjustments are accomplished through the rear frame track plate (left) and the boom guide plate.....	Visual/Manual
102.	The relationship of the rear frame track plates to each other not compatible. The relationship adjustment is accomplished only through the right track plate assembly (right side looking toward boom).....	Visual/Manual
103.	The relationship of the forward frame track plates to the rear frame track plates when joined by the frames interconnecting guide pins incorrect.....	Visual/Manual
104.	The air pressure of the pneumatic tires on the rear cart assembly and the rear base assembly incorrect.....	Gage/Manual
105.	The hydraulic fuel level on the dip stick of the hydraulic pump incorrect.....	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

106. The alignment of the simulated warhead to the simulated adaption kit supporting ring structure incorrect. The simulated warhead and ballast shall be supported on the boom assembly and the simulated ring structure shall be supported on the rear cart rollers. The necessary alignments shall be accomplished through the hydraulic pump in the vertical plane and manual movement of the loaded boom in the horizontal plane.....Visual/Manual

107. The alignment of the simulated adaption kit case section ballistic rear mounted on the rear cart supporting rollers and located aft against the stop rollers, to the simulated T.D.D, section incorrect. Engagement shall be accomplished by moving either cart in the longitudinal plane. Manual manipulation by moving the T.D.D. simulated section is also permitted.....Visual/Manual

108. Incorrect relationship of the simulated T.D.D. section and simulated case section ballistic forward to each other.....Visual

109. Incorrect relationship of the captive screws to the pins on the boom face plate.....Gage

110. Incorrect contour of cavity, forward cart assembly.....Gage

111. Objective evidence relative to material improper or missing....Visual

112. Serialization improper or missing.....Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

Minor:

201. The foot brakes on the rear and forward cart assemblies do not engage with the floor.....Visual/Manual
202. The rear cart adaption kit supporting rollers do not make contact with the simulated case section ballistic rear.....Visual
203. Inability to move the rear cart assembly (when mounted on the handling stand) with the gear crank.....Manual
204. Inability to rotate the simulated T.D.D. section on the forward cart supporting rollers.....Manual
205. Inability to engage the locking detent pin on the forward cart assembly to any aft radial hole on the simulated T.D.D. section. The simulated T.D.D. section shall be mounted on its supporting rollers and located against the aft stop roller may be unlocked and simulated T.D.D. section manually manipulated in order to engage locking detent pins.....Manual
206. Component parts missing.....Visual
207. Improper identification.....Visual
208. Protective finish damage (scratches permitted on paint but not through to base metal).....Visual
209. Evidence of poor workmanship (see 3.6).....Visual
210. Stencil markings missing, misleading or unidentifiable.....Visual

4.3.2.1.2 Warhead lifting fixture (see dwg 8838364).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

Major:

101. Does not engage and contain pivot hook of H4201 Warhead Section Sling.....Visual/Manual

Minor:

201. Component parts missing.....Visual
202. Improper identification.....Visual
203. Protective finish damage (scratches permitted on paint but not through to base metal).....Visual
204. Evidence of poor workmanship (see 3.6).....Visual
205. Stencil markings missing, misleading, or unidentifiable.....Visual

4.3.2.1.3 T.D.D. lifting fixture (see dwg 8857639).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major: None defined.

Minor:

201. Component parts missing.....Visual
202. Improper identification.....Visual
203. Protective finish damaged (scratches permitted on paint but not through to base metal).....Visual
204. Evidence of poor workmanship (see 3.6).....Visual
205. Stencil markings missing, misleading, or unidentifiable.....Visual

4.3.2.1.4 Removal fixture (see dwg 8848044).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

Major:

101. Inability to engage quick release pins to M4 control unit cover engagement holes.....Manual

Minor:

201. Component parts missing.....Visual
202. Improper identification.....Visual
203. Protective finish damage (scratches permitted on paint but not through to base metal).....Visual
204. Evidence of poor workmanship (see 3.6).....Visual
205. Stencil markings missing, misleading, or unidentifiable.....Visual

4.3.2.1.5 Preparation for delivery (see 5).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101. Preservation, packaging and packing not in accordance with applicable drawing.....Visual
102. Marking not in accordance with applicable drawing.....Visual

Minor:

201. Workmanship (see 3.6).....Visual

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. Structual strength	Major

This test is considered non-destructive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4.3.3.1 Structual strength. Each stand shall be tested in accordance with 4.4.1. If any item fails to comply with 3.5, the item shall be rejected and removed from the lot.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8871601). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Structural strength. The warhead section stand and hydraulic system shall withstand loads as shown on Fig. 1. After applying the total loading of 3125 ± 75 pounds at least once, a reference indicator reading shall be taken on the boom face plate with an attached load of 1125 ± 25 pounds located 28 inches forward of the boom face plate. An additional force of 2000 ± 50 pounds or a total loading of 3125 ± 75 shall be applied and held for 15 ± 2 minutes. Visual examination for hydraulic oil leaks shall be made during this test. The additional load of 2000 ± 50 pounds shall be removed and the boom reference reading shall return to within 0.015 of the original 1125 pound position.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The stand shall be packaged in accordance with dwgs listed in Table IV using the specified moisture barrier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. The stand shall be packaged in accordance with dwgs listed in Table IV except that the moisture barrier may be omitted.

5.2 Packing.

5.2.1 Level A and C. The stand shall be packed in accordance with dwgs listed in Table IV.

5.3 Marking. Marking shall be as specified in accordance with dwgs listed in Table IV.

Table IV

Package	Drawing	Item Packed, Box Packing or Crated
1 of 7	8856800 (4 Sheets)	8848007 - Rear Base Assembly - Crate (XH4162-1)
2 of 7	8856801 (1 Sheet)	8849241 - Fwd. Base Assembly - Box (XH4162-2)
3 of 7	8856802 (4 Sheets)	8849209 - Fwd. Cart Assembly - Crate (XH4162-4)
4 of 7	8856803 (4 Sheets)	8849410 - Rear Cart Assembly - Crate (XH4162-3) 8850370 - Mounting Ring Assembly (XH4162-5)
5 of 7	8859005 (1 Sheet)	8848044 - Removal Fixture - Box (XH4162-6) Assembly
6 of 7	8856846 (1 Sheet)	8838364 - Warhead Section - Box Lifting Fixture (XH4162-8)
7 of 7	8856847 (1 Sheet)	8838639 - T.D.D. Lifting Fixture - Box (XH4162-7)

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commanding Officer, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SMUPA-QA-I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

6.4 Supersession data. This specification supersedes the requirements of Purchase description PA-PD-2080 (Rev. 1) dated 18 August 1964.

Custodian:
Army - PA


Preparing activity:
Army - PA

Project No. 1190-A074

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

WARHEAD SECTION STAND

DRAWING 8847830

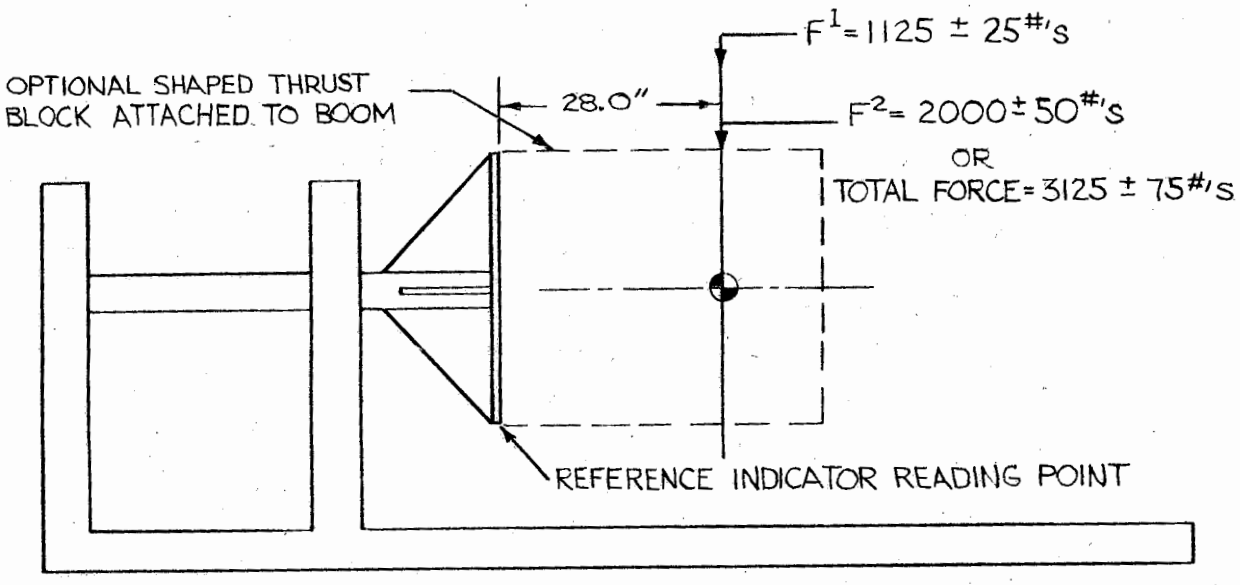

THE WEIGHT OF THE OPTION SHAPED THRUST SHALL BE SUBTRACTED FROM THE SHOWN FORCES.

Figure 1 - Pictorial boom structural test

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.