MIL-M-48798(PA)
27 January 1975
SUPERSEDING
See Section 6

MILITARY SPECIFICATION

MOTOR, EXPLOSIVE DIMPLE, T3E1 ASSEMBLY

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of motor entitled Motor, Explosive Dimple, T3E1 Assembly which is used in the Sergeant warhead section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-302	- Forty Foot Drop Test for Use in Development of Fuzes.
MIL-STD-304	- Temperature and Humidity Test for Use in Development of Fuzes.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1168	- Lot Numbering of Ammunition.
MIL-STD-1169	- Packaging, Packing and Marking for Shipment of Inert Ammunition Components.
MIL-STD-1460	- Soldering of Electrical Connections and Printed Wiring Assemblies, Procedure For.

DRAWINGS

ORDNANCE CORPS

8830502 - Motor, Explosive Dimple: T3E1
EL-8867520 - Equipment Lists.

FSC: 1135

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The motor shall comply with all requirements specified on the drawing (dwg) 8830520, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Circuit resistance. The dimple motor shall have a circuit resistance of 6.5 ± 1.5 ohms when tested as specified in 4.4.1.

3.5 Function. The dimple motor shall provide a minimum motion of 0.10 inch with a minimum load of 8 pounds applied within 3 millisecond (ms) when tested as specified in 4.4.2.

3.6 Environmental testing. The motor shall comply with MIL-STD-810, visual inspection and failure criteria, section 3. The motor shall also comply with 4.3.3.1 before and after each environmental test. Testing shall be as specified in 4.4.1. Tests shall be conducted in the order specified.

3.6.1 Transportation vibration. The dimple motor shall withstand vibration for 15 minutes in each of three mutually perpendicular axes, shown in Figure 1, at the frequencies and amplitudes specified below when tested as specified in 4.4.3.1. The frequency shall be varied uniformly from 8 to 500 to 8 Hertz (Hz) every 15 minutes. After the completion of this test the motor shall comply with the requirements of circuit resistance 3.4, insulation resistance 3.6.4 and function 3.5.

Frequency range (Hz)	Cycle time	Constant acceleration or double amplitude
8-55-8	7.5 min	0.060 ± 0.006 inch
55-500-55	7.5 min	10 ± 1 g

3.6.2 Operational vibration. The dimple motor shall withstand a programed sequence of band-limited white Gaussian noise and combined noise and sine wave vibration without evidence of damage or affecting functioning when tested as specified in 4.4.3.2. The total time of test shall be 210 seconds; 70 seconds in each of three mutually perpendicular axes, as shown in

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

Figure 1. The complex vibration test consists of the following five sections programed continuously:

a. White Gaussian noise at a level of 22 g Root Mean Square (rms) band-limited between 15 and 1500 Hz for one (1) second.
b. A 4 g rms swept sine wave superimposed on 7.5 g rms of white Gaussian noise band-limited between 15 and 1500 Hz for 15 seconds. The sine wave shall be swept from 800 to 1300 Hz at a rate increasing directly with frequency, one such sweep taking the full 15 seconds.
c. An 8 g rms swept sine wave superimposed on 15 g rms of white Gaussian noise band-limited between 15 and 1500 Hz for 15 seconds. The sine wave shall be swept from 1300 to 800 Hz at a rate decreasing directly with frequency, one such sweep taking the full 15 seconds.
d. A 4 g rms sine wave superimposed on 7.5 g rms of white Gaussian noise band-limited between 15 and 1500 Hz for 38 seconds. The sine wave shall be swept from 15 to 1500 Hz and back to 15 Hz at a rate increasing directly with frequency. One such cycle shall take the full 38 seconds.
e. White Gaussian noise at a level of 22 g rms band-limited between 15 and 1500 Hz for one second.

Following the test the dimple motor shall meet the requirements of circuit resistance 3.4, insulation resistance 3.6.4, and function 3.5.

3.6.3 Mechanical shock. The dimple motor shall not explode or be damaged to the extent that it is not safe to handle by a 40 foot drop when tested as specified in 4.4.3.4. After completion of this test the dimple motor shall meet the requirements of circuit resistance 3.4, insulation resistance 3.6.4 and function 3.5.

3.6.3.1 Alternate shock requirement. This requirement shall apply in lieu of 3.6.3 when the dimple motor is intended for use in the M15 Interval Timer. The dimple motor shall withstand three shocks in each direction in each of the three mutually perpendicular axes, shown in Figure 1, of 30 + 5 g's without evidence of damage or impairment of operation when tested as specified in 4.4.3.4.1. After the completion of this test the dimple motor shall meet the requirements of circuit resistance 3.4, insulation resistance 3.6.4 and function 3.5.

3.6.4 Insulation resistance. The insulation resistance of the dimple motor shall be greater than 50 megohms when tested as specified in 4.4.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

3.6.5 Temperature-humidity. The dimple motor shall withstand exposure to a 14 day temperature-humidity test without evidence of damage or impairment of operation when tested as specified in 4.4.3.6. After completion of test the dimple motor shall comply with the requirements of circuit resistance 3.4, insulation resistance 3.6.4 and function 3.5.

3.6.6 High temperature. The dimple motor shall show no evidence of damage or deterioration when exposed to a temperature of 160 + 5 degrees Fahrenheit (°F) for a period of 48 hours and while at this temperature shall comply with the requirement of function 3.5 when tested as specified in 4.4.3.7.

3.6.7 Low temperature. The dimple motor shall show no evidence of damage or deterioration when exposed to a temperature of -80° + 5°F for a peroid of 48 hours and while at a -65 + 5°F the motor shall comply with the requirement of function 3.5 when tested as specified in 4.4.3.8.

3.7 Soldering. All soldering shall comply with requirements specified in MIL-STD-1460.

3.8 Workmanship.

3.8.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.8.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.8.3 Burrs. Parts shall be free from burrs.

3.8.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.8.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

3.8.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 12 complete assemblies (see dwg 8867520) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table I. Tests shall be conducted in order specified in Table I.

Table I

First Article Inspection Tests

Inspection or Test	No. of sample units for test	No. of sample units non-function tested & then tested	Dest	Non Dest
1. Classification of characteristics (see 4.3.2.1)				X
2. Circuit resistance (see 3.4)	12	0		X
3. Insulation resistance (see 3.6.4)	12	0		X
4. Function (see 3.5)	2	2	X	
5. High temperature (see 3.6.6)	10	2 (during test)		X
6. Low temperature (see 3.6.7)	8	2 (during test)		X
7. Shock (see 3.6.3)	6	2 (after test)	X	
8. Temperature-humidity (see 3.6.5)	4	2 (after test)	X	
9. Vibration (transportation & operation) (see 3.6.1 & 3.6.2)	2	2 (after test)	X	

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table II and Table III), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

Table II
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

Table III
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Dimple motor assembly (see dwg 8830520).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Length of motor, maximum	Gage
	102. Diameter of motor, maximum	Gage
	103. Cracked case	Visual
	104. Dimple shape	Gage
	105. Evidence relative to material missing or improper (see 3.1)	Visual
Minor:		
	201. Leads shorted by twisting	Visual
	202. Leads insulated	Visual
	203. Epoxy sealing	Visual
	204. Workmanship (see 3.8)	Visual

4.3.2.1.2 Preparation for delivery (see 5).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Preservation, packaging and packing in accordance with MIL-STD-1169	Visual
	102. Marking in accordance with MIL-STD-1169	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

Minor:
201. Workmanship (see 3.8).....Visual

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. Circuit resistance	Major
b. Insulation resistance	Major
c. Transportation vibration	Major
d. Operation vibration	Major
e. Mechanical shock, alternate method only	Major
f. Function	Major

Of these tests, f is considered destructive and samples so tested shall not be returned to the lot. Destructive samples are over and above the deliverable quantity of items required by the contract.

4.3.3.1 Circuit resistance. Each motor shall be tested in accordance with 4.4.1. If any item fails to comply with 3.4, the item shall be rejected and removed from the lot.

4.3.3.2 Insulation resistance (see 3.6.4), transportation vibration (see 3.6.1), operational vibration (see 3.6.2), mechanical shock, alternate method only (see 3.6.3.1) and function (see 3.5). A sample of 12 dimple motors shall be selected from each inspection lot (see 4.3.1) and subjected to these tests (see applicable paragraph in 4.4). The tests shall be performed on the sample units as specified in Table IV. If any dimple motor fails to comply with the applicable requirements, the lot shall be rejected.

Table IV

Test	Units 1	2	3	4	5	6	7	8	9	10	11	12
Insulation resistance	X	X	X	X	X	X	X	X	X	X	X	X
Transportation vibration	X			X						X		
Operational vibration		X			X			X				
Mechanical shock, alternate method only	X	X	X					X	X	X		
Function	X	X	X	X	X	X	X	X	X	X	X	X

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8867520).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Circuit resistance. The dimple motor circuit resistance shall be measured with an approved resistance bridge or equivalent approved resistance measuring device. He current shall be limited to 20 miliamperes (ma) maximum.

4.4.2 Function. The dimple motor shall be operated by discharging a 1.0 + 0.01 micro-farad capacitor charged to a maximum of 38.5 volts across the bare leads.

4.4.3 Environmental testing (see 3.6).

4.4.3.1 Transportation vibration. The explosive dimple motor shall be mounted on a vibration machine and vibrated for 15 minutes in each of three mutually perpendicular axes, as shown in Figure 1, at the frequencies and amplitudes specified in 3.6.1 with one 8 to 500 to 8 frequency Hertz every 15 minutes. The total test time shall be 45 minutes. Following the vibration, the dimple motor shall be tested for circuit resistance (3.4), insulation resistance (3.6.4) and function (3.5).

4.4.3.2 Operational vibration. The explosive dimple motor shall be mounted on a vibration machine and vibrated in three mutually perpendicular axes, as shown in Figure 1, using a standard noise or complex wave tape. The tape shall have the characteristics listed in the following table.

Time (sec)	Type of Signal	Ratio of Test Level To Calibration Level	RMS g Level
0-20	Noise (calibration)(1)	1.	Set gain to give 2 g rms
20-30	None	0	0
30-31	Noise (1)	11.	22.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

31-46	Noise (1) plus sinusoid (2)	4.25	8.5
	Noise alone	3.75	7.5
	Sinusoid alone	2.	4.
46-61	Noise (1) plus sinusoid (3)	8.5	17.
	Noise alone	7.5	15.
	Sinusoid alone	4.	8.
61-99	Noise (1) plus sinusoid	4.25	8.5

(1) Band limited (15 - 1500 Hz) white Gaussian Noise.
(2) Sine wave swept from 800 to 1300 Hz at a rate increasing directly with frequency. One full sweep in 15 seconds.
(3) Sine wave swept from 1300 to 800 Hz at a rate increasing directly with frequency. One full sweep in 15 seconds.
(4) Sine wave swept from 15 to 1500 Hz and back to 15 Hz at a rate increasing directly with frequency. One full cycle in 38 seconds.

For creating the random noise, the output of a General Radio random noise generator, or its equivalents, may be used if proper care is taken to insure the correct amplitude distribution of the signal. For testing the noise generator or any other associated equipment, the use of an amplitude distribution analyzer is suggested. For insuring correct noise band-width, a filter with an asymptotic slope of at least 24 Decibel (Db) per octave and 3 Db points at 15 and 1500 Hz shall be considered acceptable. Following the vibration the dimple motor shall be tested for circuit resistance (3.4), insulation resistance (3.6.4) and function (3.5).

4.4.3.3 Method and procedure with the standard noise tape. Before applying the tape, the transfer function or frequency response of the entire vibration system shall be as flat as is consistent with the present state of the art. Plus or minus 3 Db or better over the band from 15 to 1500 Hz shall be considered as an objective in this respect. After proper equalization of the system the standard noise tape is applied. The over-all gain of the shake system is then adjusted so that with the noise calibration signal, the g level listed in 4.4.3.2 is obtained. With the same gain setting, the tape is run for the remainder of the test and the g levels obtained will conform to the levels listed in the Table of 4.4.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

4.4.3.4 Mechanical shock. The dimple motor shall be secured to an ordnance approved drop fixture for use in the 40 foot drop tower described in MIL-STD-302. A minimum of four (4) drops shall be used with a new dimple motor for each drop. The orientation of the assembly on striking are (1) dimple up, (2) dimple down, (3) horizontal x axis, (4) horizontal y axis. The drop shall not explode the dimple motor, nor render then unsafe to handle.

4.4.3.4.1 Alternate shock method. The dimple motor shall be rigidly mounted to a test fixture which shall be mounted to a suitable ordnance approved shock producing apparatus. The dimple motor shall then be subjected to three (3) shocks of 30 ± 5 g's in each direction of each of the three (3) mutually perpendicular axes. Duration shall be 11 ± 2 milliseconds as measured between points which are 10% of peaks. The time to peak shall be 5.5 ± 1 millisecond. There shall be no evidence of damage which will affect function or reliability and the dimple motor shall be tested for circuit resistance (3.4), insulation resistance (3.6.4) and function (3.5).

4.4.3.5 Insulation resistance. Insulation resistance shall be measured by means of an insulation resistance tester at 325 ± 10% volts direct current with a current limited to 5 milliamperes.

4.4.3.6 Temperature and humidity. The dimple motor shall be placed in a temperature-humidity test chamber and shall be subjected to 14 days (1JAN cycle) as specified in MIL-STD-304. Upon completion of the cycle, the dimple motor shall be removed from the test chamber and allowed to return to ambient conditions of the room. There shall be no evidence of deterioration which will affect function or reliability and the dimple motor shall be tested for circuit resistance (3.4) insulation resistance (3.6.4) and function (3.5).

4.4.3.7 High temperature. The dimple motor shall be placed in a test chamber with lead wires to the dimple motor made available through appropriate cabling. The humidity within the test chamber shall be ambient and the temperature within the chamber raised to 160 ± 5°F and held for a minimum of 48 hours. At the end of 48 hours while still at 169°F shall be tested for function (3.5).

4.4.3.8 Low temperature. The dimple motor shall be placed in a test chamber with lead wires to the dimple motor made available through appropriate cabling. The humidity within the test chamber shall be ambient and the temperature lowered to -80 ± 5°F and held for a minimum of 48 hours. At the end of 48 hours the temperature shall be raised to -65° ± 5°F. After four hours of stabilized temperature (see 6.4), the dimple motor shall be tested for function (3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The motor shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.1.2 Level C. The motor shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.2 Packing.

5.2.1 Levels A and C. The motor shall be packed in accordance with the applicable instructions contained in MIL-STD-1169(MU).

5.3 Marking. Marking shall be in accordance with MIL-STD-1169(MU).

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.

b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commanding Officer, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-T.

6.4 Temperature stabilization. The temperature is considered stabilized when the greatest peaks (both highest and lowest) continually observed over 5 minutes min. do not exceed the nominal temperature plus tolerance specified.

6.5 Supersession data. This specification supersedes the requirements of Purchase description PA-PD-2086 Rev. 1 dated 10 December 1964.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No. 1135-A177

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.

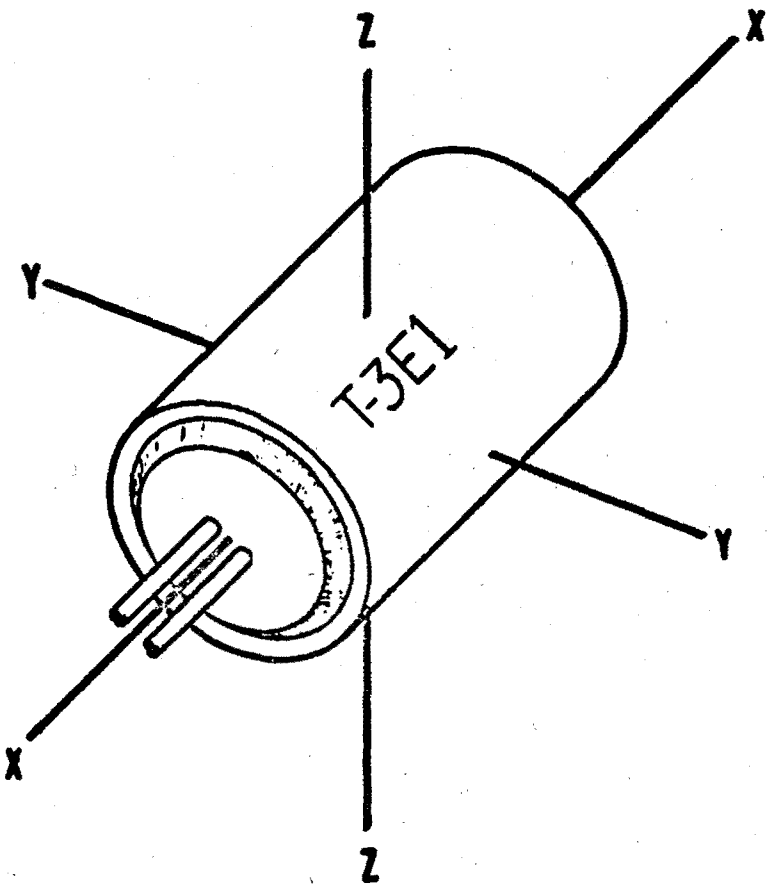


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:40Z
Check the source to verify that this is the current version before use.