INCH-POUND

MIL-PRF-44330B (GL)
25 September 1996
SUPERSEDING
MIL-F-44330A (GL)
13 January 1995

PERFORMANCE SPECIFICATION

FOOD SANITATION CENTER, COMPONENTS THEREOF, USED WITH FIELD KITCHENS

This specification is approved for use by the U. S. Army Natick Research, Development, and Engineering Center and is available for use by all Departments and Agencies of the Department of Defense (DoD).

1. SCOPE

1.1 Scope. This specification covers fabricated components that are unique to the Food Sanitation Center (FSC) which will provide a means for effectively sanitizing utensils and serving equipment associated with the combat feeding system, in a field environment.

2. APPLICABLE DOCUMENTS (None)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.1.1.

3.2 Design, materials, and manufacturing processes. Unless otherwise specified, the design, materials, and manufacturing process selection is the prerogative of the contractor as long as all articles submitted to the Government fully meet the requirements specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 7360

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

3.3 Operating requirements. The Food Sanitation Center components (reference Figure 1) identified in table I shall satisfy the following requirements.

TABLE I. Food Sanitation Center Components

Item No.	Description	Reference Paragraph	Quantity	Maximum Weight Allowance, Each (lbs.)
1	Sinks	3.3.1 thru 3.3.7	3	60
2	Sink Covers	3.3.8 and 3.3.9	3	3
3	Thermometer Bracket	3.3.10	3	1
4	Hose, Drain, 3-Sink	3.3.11 and 3.3.12	1	40
5	Hose, Drain, 1-Sink	3.3.11 and 3.3.12	1	14
6	Table, Drain	3.3.13 and 3.3.14	1	42
7	Rack, Sink, Immersion	3.3.15 and 3.3.16	2	8
8	Rack Set, Storage and Drying	3.3.17	2 Sets	45


3.3.1 Sink size. The sink interior dimensions shall be not less than 25 inches long, 24 inches wide and 14 inches deep. The height of the sink, when mounted on the burner rack and base rack (see 6.9) shall be approximately 39 inches.

3.3.2 Sink drain. Each sink shall contain a drain and a drain ball-valve with a quick-disconnect coupling at the rear of the sink.

3.3.3 Sink interface. Each sink shall fit securely on the burner rack (see 6.9) and shall interface with a drain hose quick-disconnect coupling.

3.3.4 Sink modularity. Sinks shall be capable of being utilized individually or in multiples of three sinks joined together. The method utilized to join the sinks together shall prevent spillage between the sinks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

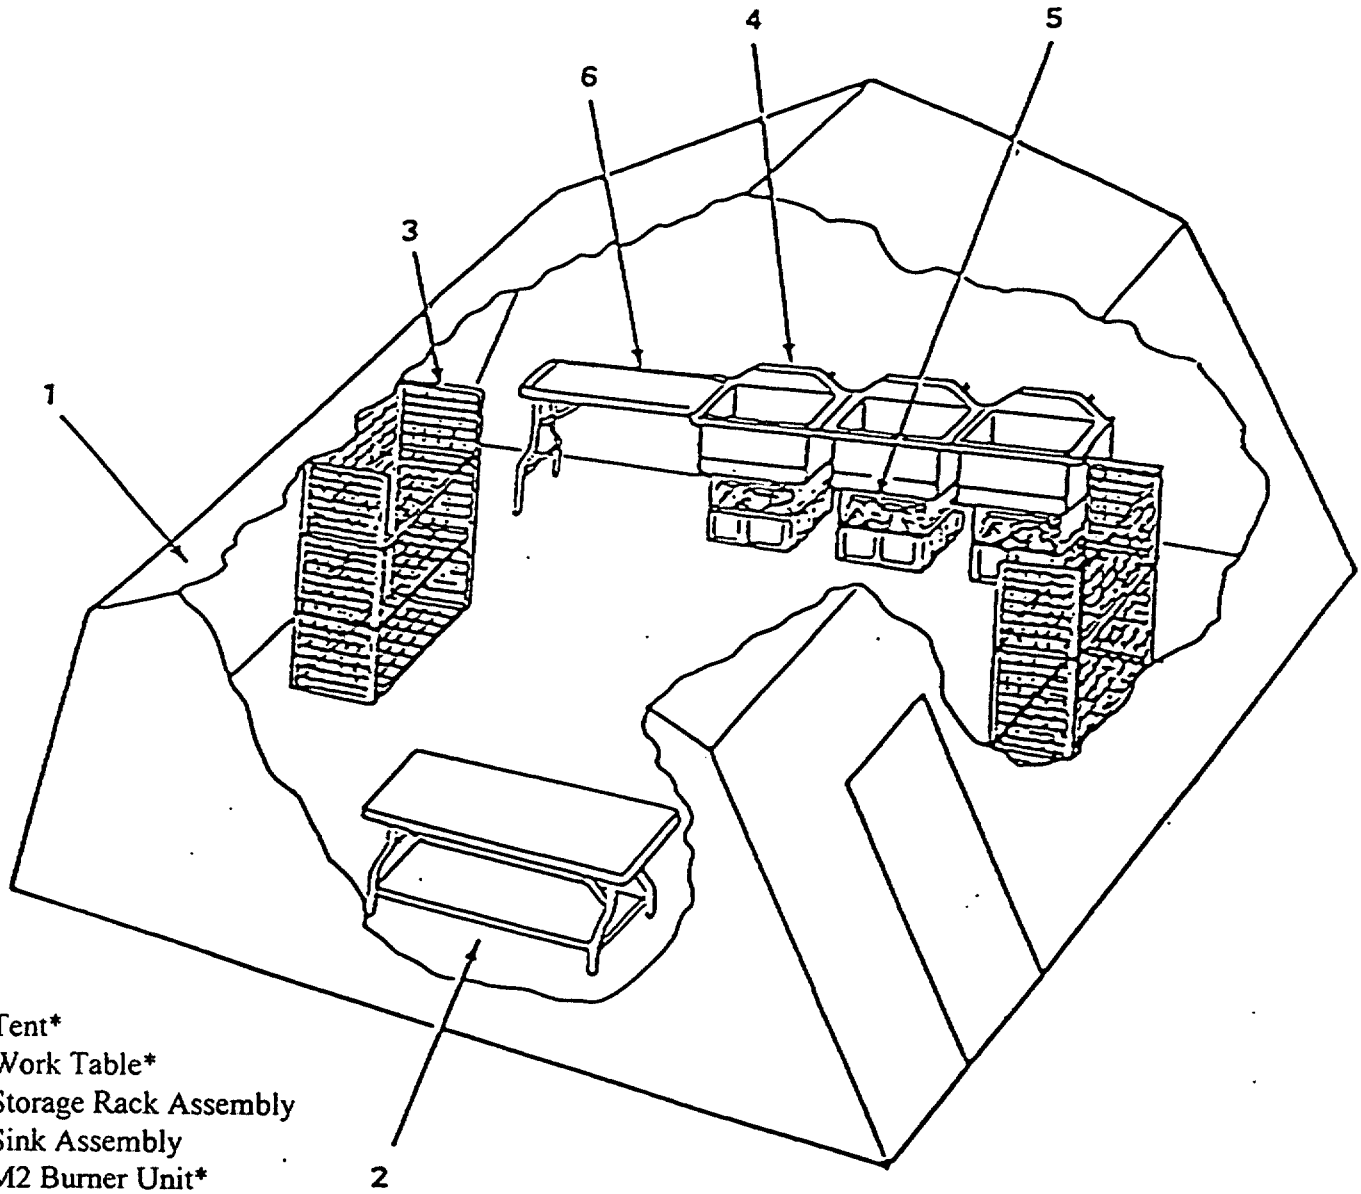

1. Tent*
2. Work Table*
3. Storage Rack Assembly
4. Sink Assembly
5. M2 Burner Unit*
6. Drain Table

*Not covered by this specification

FIGURE 1. Sanitation Center Layout - Typical

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

3.3.5 Sink heating. The sink shall permit water to be rapidly heated. The sink shall withstand the direct heat from the burner unit (see 6.9).

3.3.6 Sink drainage. The sink drain shall permit rapid drainage.

3.3.7 Sink leakage. Sinks shall not leak.

3.3.8 Sink cover. Sinks shall be provided with covers that minimize liquid splashing and the escape of steam and that have restricted lateral movement in any direction.

3.3.9 Sink cover, handle. Sink covers shall have a handle. The handle shall have an opening not less than 4 inches wide and 1 3/4 inches high.

3.3.10 Thermometer bracket. The thermometer bracket shall position a thermometer (see 6.9) to measure the temperature of the sink contents when the sink is filled to within 2 inches from the top. The bracket shall not interfere with washing operations.

3.3.11 Hoses, drain. A 1-sink and a 3-sink drain hose shall be provided. The hoses shall have quick-disconnect couplings and shall interface with the quick-disconnect coupling on the sink drain. The 3-sink drain hose shall be a single hose assembly that connects to 3 sinks and the hose shall extend not less than 50 feet from the sink. The 1-sink drain hose shall extend not less than 15 feet from the sink.

3.3.12 Hose, drain, drainage and leakage. The 1-sink and 3-sink drain hose assemblies shall be capable of rapidly draining the sink contents and shall not leak.

3.3.13 Table, drain, size and configuration. The drain table shall have a surface area of approximately 9 square feet. The table shall be supported on one end and on the other end the table edge shall mate with either side edge of the sink. The table configuration shall prevent spillage of liquid from the sides and the end that is away from the sink. The table supports shall be capable of being stored for transport.

3.3.14 Table, drain, drainage. When the drain table is joined to the sink edge and the supports are secured in the supportive position, liquids on the drain table shall quickly drain into the sink without leakage between the drain table and the sink.

3.3.15 Rack, sink, immersion, size and configuration. The sink immersion rack shall fit easily into the sink and shall accommodate utensils associated with food preparation and serving. Two handles shall extend above the top of the rack. The handles shall have an opening not less than 4 inches wide and 5-1/2 inches high.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

3.3.16 Rack, sink, immersion, drainage. The sink immersion rack shall provide for the rapid drainage of water.

3.3.17 Rack set, storage and drying. The rack set shall have 3 stackable storage racks. When stacked, the racks shall interlock and shall not be able to move laterally in any direction. Each rack assembly shall have a volume of 16 ± 1 cubic feet. A removable height-adjustable shelf shall be provided with each storage rack. The shelf shall be able to function as a front cover and shall fasten to the front of the rack. The shelf shall support loads encountered in FSC operation without damage. The bottom, sides and rear of the storage rack, and the shelf/cover shall allow for circulation of air and drainage of water.

3.3.18 Corrosion resistance. Components listed in table I shall be corrosion resistant.

3.3.19 Chemical resistance. Components listed in table I shall be resistant to the detergents and sanitizers used for washing and sanitizing operations.

3.3.20 Safety. Components listed in table I shall be safe to set up , operate, and transport and shall not create personnel hazards. Burner unit heat and exhaust shall be directed away from the operator.

3.3.21 Sanitation/Cleaning. Surfaces shall be smooth, washable, free of unnecessary ledges, projections or crevices, and readily accessible for cleaning.

3.4 Ownership and support requirements.

3.4.1 Shelf life. The depot storage life shall be not less than 10 years.

3.4.2 Service life. The service life of the drain hoses shall be not less than 3 years of continuous use. All other components shall have a service life of not less than 5 years of continuous use in a field environment.

3.4.3 Durability. Repeated operational use shall not cause the components to leak, fracture, deform or undergo dimensional changes that prevent acceptable performance or prevent interfacing with associated assemblies/components.

3.4.4 Weight. The weight of the FSC components shall not exceed the weights specified in table I.

3.4.5 Interoperability and interchangeability. The components listed in table I shall be functionally interoperable and physically interchangeable with components of the currently fielded Food Sanitation Center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

3.5 Environmental requirements. The components listed in table I shall operate and be functional in ambient temperatures from -25°F to +125°F.

4. VERIFICATION

4.1 Classifications of inspections. The inspection requirements specified herein are classified as first article inspection and conformance inspection.

4.1.1 First article inspection. When a first article inspection is required (see 3.1 and 6.2), the first article shall be examined and tested in accordance with table II. Sampling for first article inspection shall be as specified in the contract or purchase order (see 6.2).

TABLE II. Matrix - Requirements vs Verification Methods

Title	Requirement	Verification
Operating requirements	3.3	4.3.2
Sink size	3.3.1	4.3.2.1
Sink drain	3.3.2	4.3.2.2
Sink interface	3.3.3	4.3.2.3
Sink modularity	3.3.4	4.3.2.4
Sink heating	3.3.5	4.3.2.5
Sink drainage	3.3.6	4.3.2.6
Sink leakage	3.3.7	4.3.2.7
Sink cover	3.3.8	4.3.2.8
Sink cover, handle	3.3.9	4.3.2.9
Thermometer bracket	3.3.10	4.3.2.10
Hoses, drain	3.3.11	4.3.2.11
Hose, drain, drainage and leakage	3.3.12	4.3.2.12
Table, drain, size and configuration	3.3.13	4.3.2.13

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

Title	Requirement	Verification
Table, drain, drainage	3.3.14	4.3.2.14
Rack, sink, immersion, size and configuration	3.3.15	4.3.2.15
Rack, sink, immersion, drainage	3.3.16	4.3.2.16
Rack set, storage and drying	3.3.17	4.3.2.17
Component corrosion	3.3.18	4.2.3.18
Chemical resistance	3.3.19	4.3.2.19
Safety	3.3.20	4.3.2.20
Sanitation/Cleaning	3.3.21	4.3.2.21
Ownership and support requirements	3.4	4.3.3
Shelf life	3.4.1	4.3.3.1
Service life	3.4.2	4.3.3.2
Durability	3.4.3	4.3.3.3
Weight	3.4.4	4.3.3.4
Interoperability and interchangeability	3.4.5	4.3.3.5
Environmental requirements	3.5	4.3.4

4.1.2 Conformance inspection. Conformance inspection includes those examinations and tests from table II, as defined in the contract or purchase order, performed on specified samples (see 6.2 and 6.7).

4.1.3 Certification compliance examination. Certification, certified test reports, labels, or listing marks for standards, submitted as proof of compliance with 3.2 and 4.3.3 shall be examined and validated (see 6.2).

4.2 Order of verification. Environmental tests shall be conducted prior to remaining verifications which may be conducted in any sequence. Sink and hose drainage and leakage tests and quick-disconnect tests may be combined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

4.3 Verification methods. The types of verification methods may be visual inspection, measurement, sample tests, full-scale demonstration tests, simulation, modeling, engineering evaluation, component properties analysis, and similarity to previously-approved or previously-qualified designs.

4.3.1 Verification alternatives. The manufacturer may propose alternative test methods, techniques, or equipment, including the application of statistical process control, tool control, or cost-effective sampling procedures to verify performance. The contract may specify alternatives that replace verifications required by this specification (see 6.2)

4.3.2 Operating requirements verification.

4.3.2.1 Sink size measurement Measure and verify the interior dimensions of the sink.

4.3.2.2 Sink drain inspection. Visually inspect for a drain, a drain ball-valve and a quick-disconnect coupling.

4.3.2.3 Sink interface demonstration. Demonstrate that the sink can be securely mounted on the burner rack. Demonstrate that the drain hose coupling can be connected to and disconnected from the sink drain in less than 1 minute.

4.3.2.4 Sink modularity demonstration. Demonstrate that three sinks can be joined together. Verify that the sink joining method does not allow leakage between the sinks.

4.3.2.5 Sink heating demonstration. Demonstrate sink heating capability by mounting the sink on the burner and base racks and filling the sink with 20 gallons of water. The temperature of the water shall be 60^0F $\pm$ 5^0F. Ambient temperature during testing shall be 70^0F $\pm$ 10^0F and wind velocity shall be not more than 2 mph. Sink water shall be heated to 125^0F in not more than 25 minutes and then to 170^0F in not more than an additional 20 minutes. Verify the sink does not have damage caused by burner heat.

4.3.2.6 Sink drainage demonstration. Demonstrate the drainage capability of the sink by filling the sink with 20 gallons of water. Attach a 1-sink drain hose assembly to the sink drain coupling. Open the sink drain valve completely. The water shall drain from the sink to a level less than 3/4 inch deep in 6 minutes or less.

4.3.2.7 Sink leakage inspection. Visually inspect the sink during and subsequent to the heating and drainage demonstrations. Verify that leakage has not occurred.

4.3.2.8 Sink cover functional demonstration. Demonstrate that the cover, when placed on the sink, is restricted in lateral movement in any direction. Visually inspect the cover/sink interface configuration and verify that it will minimize splashing and the escape of steam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

4.3.2.9 Sink cover handle measurement. Measure and verify the handle dimensions.

4.3.2.10 Thermometer bracket functional demonstration. Demonstrate that the thermometer bracket affixed to the front of a sink will place the thermometer (see 6.9) in a position to measure the temperature of sink contents when the sink is filled to within 2 inches from the top. Verify that the bracket will not interfere with washing operations.

4.3.2.11 Hose, drain, interface demonstration. Demonstrate that the hose quick-disconnect couplings can be connected to the quick-disconnect couplings of the drain valve of the sinks in less then 1 minute. Measure the common 3-sink drain hose length and verify that it extends not less than 50 feet from the sink. Measure the length of the 1-sink drain hose and verify that it extends not less than 15 feet from the sink.

4.3.2.12 Hose, drain, drainage and leakage demonstration. Demonstrate the rate of drainage with the 3-sink drain hose connected to the sinks. Each sink shall be filled with 20 gallons of water. The sink drain valves shall be completely opened. Verify that the rate of drainage is not less than 20 gallons in 6 minutes. Demonstrate the absence of hose leakage when three sinks are filled with water and heated to a minimum of 170^{0}F, and then drained. Verify that the hose assembly does not leak.

4.3.2.13 Table, drain, size and configuration verification. Measure the table surface area.. Verify that the surface area is approximately 9 square feet. Visually inspect and verify that the table has supports on one end and that they are capable of being stored for transport. Demonstrate the joining of the table to the sink.

4.3.2.14 Table, drain, drainage demonstration. Demonstrate that 1 gallon of water poured onto the drain table near the end away from the sink, will drain into the sink without spillage onto the ground. Verify that the flow of the water into the sink is completed within 30 seconds. Verify that spillage has not occurred over the edges of the table and no leakage has occurred at the table sink connection.

4.3.2.15 Rack, sink, immersion, size and configuration verification. Verify that the rack, containing utensils associated with food preparation and serving, can be rapidly inserted in and withdrawn from the sink without interference. Measure and verify the handle dimensions.

4.3.2.16 Rack, sink immersion drainage demonstration. Demonstrate that when the rack is totally submerged in water and removed, the rack is essentially empty of water within 10 seconds after removal from the water.

4.3.2.17 Rack set, storage and drying, size and configuration demonstration. Demonstrate that three storage racks are able to be stacked and that lateral movement between each rack does not exceed 1/4 inch. Verify that the bottom surface of the rack is not in contact with the ground. Verify that the volume of each rack is 16 $\pm$ 1 cubic feet. Demonstrate that the shelf height can be varied within the storage rack and that the shelf is useable as a front cover. Demonstrate that the shelf does not deflect more than 1/4 inch when a load of 20 pounds per square inch is applied. Verify the capability for drainage and air circulation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

4.3.2.18 Corrosion resistance. The components listed in table I shall show no evidence of corrosion upon completion of the verifications contained in table II.

4.3.2.19 Chemical resistance.

4.3.2.19.1 Dishwashing compound. Twelve ounces of dishwashing compound (NSN 7930-00-281-4731) shall be added to the designated wash sink in 4.3.2.12 for the demonstration. Upon completion of the demonstration, inspect the sink, sink valve, and drain hoses to verify that there is no evidence of chemical degradation.

4.3.2.19.2 Disinfectant. Heat 20 gallons of water in a sink to a temperature of 100 ± 10^0F. Dissolve one 4.77 ounce packet of food service disinfectant (NSN 6840-00-810-6396) in the water and allow the mixture to remain in the sink at 100^0F for 2 hours. Drain the sink and inspect the sink, sink valve, and drain hoses to verify that there is no evidence of chemical degradation.

4.3.2.20 Safety verification. Visually inspect the components and verify they are free of hazardous burrs, nicks, sharp edges, foreign materials and other conditions that are hazardous to personnel during setup, operation and transport of the components. Verify that burner unit heat and exhaust are directed away from the operator.

4.3.2.21 Sanitation/cleaning verification. Verify that surfaces are smooth, washable, free of unnecessary ledges, projections or crevices, and are readily accessible for cleaning.

4.3.3 Ownership and support requirements verification.

4.3.3.1 Shelf life analysis. Perform an analysis to demonstrate that the materials and manufacturing processes of the FSC components listed in table I are similar to those in the currently fielded Food Sanitation Center, or are capable of meeting the required shelf life.

4.3.3.2 Service life analysis. Perform an analysis to demonstrate that the materials and manufacturing processes of the FSC components listed in table I are similar to those in the currently fielded Food Sanitation Center, or are capable of meeting the required service life.

4.3.3.3 Durability.

4.3.3.3.1 Drain hose. Verify that the hose assembly does not break, fracture, deform or become functionally inoperable after verification tests performed in 4.3.2.11 and 4.3.2.12 have been performed.

4.3.3.3.2 Drop tests. The sink, drain table, and immersion rack shall undergo drop tests. Each component shall be dropped from a height of 48 inches on two 1/2-inch thick plywood sheets. The sink shall be dropped on any edge (side) other than the drain side edge. A folded drain table shall be dropped once, horizontally, with supports side down, and once vertically on one of its long sides. The immersion rack shall be dropped once on any part of the rack. Verify

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

one of its long sides. The immersion rack shall be dropped once on any part of the rack. Verify that no fractures, deformation or breakage occurs on any component that will prevent acceptable performance.

4.3.3.4 Weight demonstration. Weigh each of the components in table I and verify that the maximum weight allowance specified in table I is not exceeded.

4.3.3.5 Interoperability and interchangeability demonstration. Compare the test components in table I with Food Sanitation Center components from current supply (see 6.9), following the procedure in 4.3.3.5.1.

4.3.3.5.1 Interface demonstration. Set up the test and the baseline Food Sanitation Center components. Verify the interchangeability of sinks, sink covers, thermometer brackets, 1-sink and 3-sink drain hoses, drain tables, sink immersion racks and rack sets.

4.3.3.5.2 Interoperability and interchangeability criteria. Visually examine each configuration to verify compatibility between the baseline and the test items. Verify ease of operation. Verify that there are no incompatibilities affecting form, fit, function or total interchangeability.

4.3.4 Environmental requirements demonstration. Assemble the components listed in table I after conditioning for 8 hours at $-25^{0}F \pm 5^{0}F$. Examine all components after assembly completion to verify that there is no evidence of failures.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the contract or purchase order shall specify packaging requirements (see 6.2). When DoD personnel perform material packaging, those personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. The Inventory Control Point packaging activity within the Military Department of Defense Agency, or within the Military Department's System Command, maintains packaging requirements. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The Food Sanitation Center components covered by this specification are intended for use in sanitizing food service equipment used with the Army Field Feeding System.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. When a first article is required (see 3.1, 4.1.1, 6.6 and 6.9).
c. Delivery of government-loaned property (see 4.3.3.5 and 6.9).
d. Sampling for conformance inspection (see 4.1.2).
e. Packaging requirements (see 5.1).
f. When proof of compliance is required and type of proof required (see 4.1.3).

6.3 Changes from previous issue. This specification supersedes MIL-F-44330A (GL) dated 13 January 1995. Asterisks are not used in this revision to identify changes, due to the extensiveness of the changes required to convert this specification from a detail to a performance specification, and to reduce its scope from a complete Food Sanitation Center to certain unique components of the FSC.

6.4. Subject term (key word) listing.

Cleaning
Army Field Feeding System
Sanitizing
Sinks

6.5 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided the material meets or exceeds all specified requirements and promotes economically advantageous life cycle costs.

6.6 First article. When requiring a first article inspection, the contracting officer should provide specific guidance to offerors whether the first article is a first article sample, a first production item, or a number of items to be tested. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Pre-solicitation documents should provide government waiver rights for samples for first article inspection to bidders offering a previously-acquired or tested product. Bidders offering such products, who wish to rely on such production or testing must furnish evidence with the bid, that prior government approval is appropriate for the pending contract.

6.7 Conformance inspection. Affordable conformance inspection with confidence varies depending upon a number of procurement risk factors. Some of these factors include contractor past performance, government schedules and budget, product material and design maturity, manufacturing capital equipment and processes applied, the controlled uniformity of those

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

processes, labor skill and training, and the uniformity of measuring processes and techniques. During the solicitation, contracting documents should indicate those tests desired from table I and their designated frequency based on a risk assessment for the procurement.

6.8 Technical data. FSC components listed in table I have been produced satisfactorily using the following specification and drawings:

MIL-F-44330A (GL)	- Food Sanitation Center, for Use with Field Kitchens
5-13-3749	- Three-Sink Drain Hose Assembly
5-13-4050	- Storage Rack Assembly
5-13-4061	- One-Sink Drain Hose Assembly
5-13-4120	- Sink Assembly
5-13-4121	- Sink Body Assembly
5-13-4206	- Sink Cover Top Assembly
5-13-4240	- Sink Drain Table Assembly
5-13-4241	- Drain Table, Top Assembly
5-13-4255	- Rack, Sink, Immersion
5-13-4256	- Sink Adapter
5-13-4261	- Thermometer Bracket, Sink

(Copies of drawings are available from the U.S. Army Natick Research, Development and Engineering Center, SATNC-WEF, Natick, MA 01760-5018).

6.9 Government-loaned property. The Government will make the following equipment available for loan.

6.9.1 Equipment required for first article and conformance inspection.

Components	National Stock Number	Quantity
Burner unit, M2A	7310-01-113-9172	4
Thermometer, 5 1/2 inch	6685-00-444-6500	3
Burner rack	7360-01-250-3649	3
Base rack	7360-01-250-3652	3

6.9.2 Equipment required for interoperability and interchangeability demonstrations. Components listed in table I shall be provided from current government supply for use as baseline components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

6.10 Food Sanitation Center. Each complete Food Sanitation Center includes all of the equipment listed below:

Item No.	Description	Identification National Stock No.	Quantity
1	Tent extendable, modular 16 by 20 foot, utility	8340-01-185-2613	1
2	Burner unit, M2A	7310-01-113-9172	3
3	Extinguisher, fire	4210-01-149-1356	1
4	Lantern, gasoline	6260-00-837-0996	2
5	Thermometer, 51/2 inch	6685-00-444-6500	3
6	Waste receptacle, plastic, 32-gallon w/lid	7240-00-151-6629	2
7	TM-10-7360-211-13&P		1
8	TM-10-7360-204-13&P		1
9	TM-10-8340-224-13		1
10	Burner rack	7360-01-250-3649	3
11	Table, field	7105-01-333-8493	1
12	Shelf	5340-01-333-8486	1
13	Base rack	7360-01-250-3652	3
14	Sink	4510-01-333-9186	3
15	Sink cover	5340-01-333-8485	3
16	Thermometer bracket	5340-01-333-8483	3
17	Hose, drain, 3-sink	4720-01-333-8489	1
18	Hose drain, 1-sink	4720-01-333-8488	1
19	Table drain	7305-01-333-8492	1
20	Rack, sink, immersion	7320-01-334-3160	2
21	Rack set, storage and drying	7125-01-334-3159	2 Sets

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

Custodian:
Army - GL

Preparing activity:
Army-GL

Review activities:
Army - AV, MD1, QM1

(Project 7360-A189)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3 and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-44330B (GL)	2. DOCUMENT DATE(YYMMDD) 96-12-25

3. DOCUMENT TITLE
Food Sanitation Center, Components Thereof, Used with Field Kitchens

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME U.S. Army Natick RD&E Center	b. TELEPHONE (Include Area Code) (1) Commercial (508) 233-5175 (2) AUTOVON 256-5175
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: SSCNC-WEF Natick, MA 01760-5018	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD FORM 1426, OCT 89 Previous editions are obsolete 198 /290
NATICK OP1, 1 MAR 96 NATICK, OP1, Jul 91 IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:29Z
Check the source to verify that this is the current version before use.