19 November 1957
SUPERSEDING
NAVORD OS 2725
28 April 1945

MILITARY SPECIFICATION

MINE CASE MARK 25 MOD 1

1. SCOPE

1.1 Scope. - This specification establishes the requirements for the procurement of a Mine Case Mark 25 Mod 1, Bureau of Ordnance LD No. 139306. This Mine Case Mark 25 Mod 1 is a steel case comprised of a charge compartment and an instrument compartment. This Mine Case Mark 25 Mod 1 is of one type and one class.

2. APPLICABLE DOCUMENTS

2.1 The following standards, drawings, and publications or such portions thereof as designated herein of the issue in effect on the date of invitation for bids form a part of this specification.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and TabLes for Inspection by Attributes,
MIL-STD-129	Marking for Shipment and Storage.

DRAWINGS

NAVY DEPARTMENT

BUORD LD No. 139306	Mine Case Mark 25 Mod 1 (Empty)
BUORD LD No. 139207	Mine Crate Mark 25 Mod 0

FSC 1350

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

And all drawings, standards and specifications listed thereon. In the following specification, all referenced drawing numbers are listed on BUORD LD No. 139306 unless otherwise designated,

PUBLICATIONS

BUREAU OF ORDNANCE

NAVORD OP 400	General Instructions for the Design, Manufacture and Inspection of Naval Ordnance Equipment.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the, procuring agency or as directed by the contracting officer.)

2.2 Other publications, - The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

NATIONAL BUREAU OF STANDARDS PUBLICATIONS

Handbook H28 and 1950 supplement	Screw thread standards for the Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D, C.)

3. REQUIREMENTS

3.1 Description. - The Mine Case Mark 25 Mod 1 is an elongated steel cylindrical weldment, one end of which is closed by an angular nose piece, referred to generally as a spoiler, which serves to reduce the diving tendency of the mine when entering the water, The other end of the cylinder is tapered to terminate in an extending flange, to which is secured in service a parachute pack or tail fin, as the case may be, depending upon the intended method of launching, The case is separated generally into two compartments, a charge compartment and a mechanism

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

compartment. Included as part of the mechanism compartment is an extender well, a clock starter well and a search coil housing. An arrangement of tubular conduits connecting the various components of the mechanism compartment serves to accommodate the necessary electrical wiring for connecting the various control elements of the finished mine.

3.2 General requirements.

3.2.1 Pre-production samples. - Unless otherwise specified in the contract or order pre -production samples of the Mine Case Mark 25 Mod 1 shall be manufactured using the methods and procedures proposed for the production lot. These samples will be tested as specified in section 4 herein and are for the purpose of determining that the production item meets the requirements of this specification and the design. Provision of samples shall be in accordance with 4.1, 2 and 4. 1.4.

3.2, 2 Materials. - Unless otherwise specified in the contract, requisition or order all materials and purchased parts entering into the final assembly of the mine case shall conform strictly to the detailed requirements indicated on the drawings and specifications listed in BUORD LD No. 139306.

3.2, 3 Finishes, coatings, construction and dimensions. - Finishes, coatings, construction and dimensions for the mine case shall be strictly in accordance with the applicable drawings, specifications, and publications listed in BUORD LD No. 139306.

3.2,4 Marking, - Marking of assemblies, sub-assemblies and parts shall be in accordance with the applicable drawings listed in BUORD LD No. 139306 and MIL-STD-129.

3.2.5 Interchangeability, - Component parts of assembled units (unless otherwise specified on the applicable drawings) fabricated in strict agreement with their applicable drawings shall be interchangeable and shall assemble with mating components of the unit without selection or fitting. If, during assembly of the fabricated parts of a unit, selection or fitting is required and changes in dimensions are necessary, no changes in the parts as delineated on applicable drawings will be made without prior revisions and correction of the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

3.2.6 Gages. - The contractor shall provide himself with whatever gages are necessary and adequate to insure that the material to which this specification applies will meet the dimensional requirements shown on the applicable drawings. If so stipulated in the contract, order, or requisition, the Government will furnish drawings of pertinent Navy Final Inspection Gages for guidance in the design of the contractor*s inspection gages. However, such procedure shall not serve to relieve the contractor of his responsibility, in the design and manufacture of such gages as may be required in the satisfactory fulfillment of the contract requirements, but is intended to facilitate acceptance of all components and assemblies by Navy Final Inspection Gages.

3. 2.7 Threads. - Unless otherwise specified, all threads shall be in accordance with the National Bureau of Standards Handbook H28 and Supplements thereto. The class or fit for threads shall be as specified on the applicable drawings, and the NOT-GO gaging practice shall be as set forth in the supplement to the aforementioned Handbook H28.

3. 2.8 Requests for deviation. - Requests for deviation from this specification, applicable drawings, specifications, publications, materials and processes specified herein, shall be as set forth in OP 400.

3. 2.9 Conflicting requirements. - Conflicting requirements arising between this specification or any specifications, publications, or drawings listed herein shall be referred in writing to the procuring agency or appointed agent for interpretation and clarification.

3.3 Definitions. - The following terms will b e used throughout this specification on the Mine Case Mark 25 Mod 1 and are here defined for clarity.

3. 3.1 Mine case. - Reference herein to the mine case or Mine Case Mark 25 Mod 1, shall mean the Mine Case Mark 25 Mod 1 (Empty).

3.4 Performance requirements and product characteristics. - The Mine Case Mark 25 Mod 1 shall meet the following performance requirements and product characteristics:

3.4.1 Grinding of welds. - All grinding of welds shall be performed prior to leak testing. Should grinding become necessary after the leakage tests, the tests of 4.5.4.1, 1 and 4. 5.4.1.2 shall be repeated,

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

3.4.2 External leakage. - The case shall, withstand without external leakage a pressure of twenty-five pounds per square inch gage applied equally to the inside of all compartments, when tested in accordance with 4.5.4, 1.2.

3.4.3 Internal leakage. - The case shall withstand without internal leakage a pressure differential of five pounds per square inch between the charge compartment and the mechanism compartment when tested in accordance with 4. 5.4.1.1. All leak testing shall be performed on the finished mine case prior to the application of any coatings either to the exterior or interior surfaces of the case and with the case free of grease, dirt, flux, oil, scale or the like.

3, 5 Clean-up, - Following assembly, the case shall be thoroughly cleaned of all metal chips, filings, scale or the like.

3.6 Workmanship, - The case shall be constructed and finished in a manner to assure compliance with all requirements of this specification, Particular care shall be exercised to assure that all parts are free of burrs and sharp edges with attention being directed to neatness of assembly and marking.

4. QUALITY ASSURANCE PROVISIONS AND TEST REQUIREMENTS

4, 1 Government inspection. - The Government inspector will make such inspections as are necessary to determine that components and assemblies are in accordance with the requirements of the contract, pertinent drawings and specifications. Unless otherwise specified, these inspections will be conducted in accordance with instructions contained in OP 400,

4. 1.1 Dimensional inspection, - Inspection shall be conducted for conformance to the requirements of the drawings. In this inspection gaging operations shall be made on the complete and treated case with particular attention to the following areas of assembly, case acceptance of components, and fits:

A, Inside diameter of flange for extender.
B. Inside diameter of flange for clock starter,
C. Distance from flange f aying surf ace to inside bottom of extender well,

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

D. Bolt circle diameter and bolt spacing in flange for extender.
E. Bolt circle diameter and bolt spacing in flange for clock starter.
F. Inside diameter of coil tube.
G. Inside length and straightness of coil tube.
EL Location and spacing of holes in suspension lug pads for the 30 inch center-to-center spaced lugs.
L Location and spacing of holes in suspension lug pads for the 14 inch center-to-center spaced lugs.
J. Profile and location of holes in suspension lugs prior to asse mbly on the case.
K Inside diameter and depth of battery compartment.
L. Inside diameter of coil tube coupling.
M. Bolt circle diameter and bolt spacing in flange for coil “tube.
No Bolt circle diameter and bolt spacing in flange for filling hole.
o. Bolt circle diameter and bolt spacing in flange for tail cover.
P. Inside diameter of flange for tail cover.
Q. Inside diameter of extender well.
R. Location of center of extender well with relation to center of extender well flange.

4,1.2 Sampling. - Unless otherwise specified, and when applicable, the sampling plans and procedures used by Government inspector in the determination of the acceptability of products submitted by a supplier for Government inspection shall be in accordance with the provisions set forth in MIL-STD-105.

4. 1.3 Pre-production sample. - Unless otherwise specified for each contract or order, a representative sample of (10) Mine Cases Mark 25 Mod 1 shall be manufactured using the methods and procedures proposed for the production lot. These cases shall be submitted to the Government inspector for pre -production tests at an activity designated in the contract or by the Bureau of Ordnance, for purposes of determining compliance with the requirements of the contract, specifications and drawings. Further production of the item by the contractor prior to approval of the contracting activity or the completion of tests on pre -production samples shall be at the contractor’s risk, Pre-production samples accepted will be applied as part of the quantity specified by the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

4.1.3 Lot size. - As applied to Government inspection of units of product the term "lot" shall mean "Inspection lot", i, e., a collection of units of product submitted by a supplier for Government inspection, Unless otherwise specified, the number of units of product in 'Inspection lots" will be as determined by the Government inspector and may differ from the quantity designated in the contract or order in a lot for production, shipment or other purpose.

4.1.4 Periodic production samples. - From each succeeding lot or grand lot of (100) or less, a random sample of 5 mine cases will be selected by the Government inspector for submission to a Bureau of Ordnance designated activity to determine compliance of the samples with the requirements of the contract, specification and drawings. A mine case shall be considered satisfactory if it meets all specifications and pertinent drawing requirements, and withstands the tests as specified in 4, 5.

4.2 Contractor's inspection. - Contractor's inspection shall be conducted in accordance with provisions of 'Inspection by Contractor" as contained in OP 400,

4,3 Classification of tests. - The inspection and testing of the Mine Case Mark 25 Mod 1 shall be classified as follows:

4.3.1 Acceptance tests. - These tests are to be accomplished on the mine case being submitted for acceptance under contract, Inspection and test procedures shall be submitted for Government approval prior to commencement of production, Acceptance tests shall either be performed by the manufacturer and witnessed by the Government inspector, or shall be conducted by the Government inspector. These tests are defined in 4.5.

4,3.2 Pre-production and periodic production tests, - Pre-production and periodic production tests are those which are accomplished on samples selected as specified in 4. 1.2 and 4. 1.4 which are representative of the production of the mine case after the award of the contract to determine that the lot and production meet the requirements of this specification. Acceptance shall be based on no defects in a sample. Failure of a sample to comply with these requirements will result in the rejection of the lot or the cessation of production as determined by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

4.4 Test equipment. - The following items of test equipment are required to perform the acceptance tests set forth in this specification:

(a) A suitably large" tank for submerging the Mine Case Mark 25 Mod 1
(b) A source of air under pressure with regulating means

4.5 Acceptance tests.

4. 5,1 The Contractor or Government inspector shall conduct acceptance tests as specified in 4. 3.1 to assure that the Mine Case Mark 25 Mod 1 is in compliance with the requirements of 3.2, and 3.4, 1 through 3.4.16.

4. 5.2 Test conditions. - Unless otherwise specified the Mine Case Mark 25 Mod 1 shall be subjected to acceptance tests under the following conditions:

4. 5.2.1 Temperature:	Room ambient 65 degrees F to 95 degrees F (18. 33 degrees C to 35.0 degrees C),
4, 5,2, 2 Altitude:	Normal ground.
4. 5.2.3 Vibration:	None
4. 5.2.4 Humidity:	Room ambient.

4. 5.3 Test and inspection equipment and facilities. - The manufacturer shall furnish and maintain all necessary test equipment, facilities and personnel for performing all acceptance tests, The test equipment shall be adequate in quantity, and when definite requirements are not specified they shall be of sufficient accuracy and quality to permit performance of the required acceptance tests.

4.5.4 Test procedure,

4.5.4.1 Tests. - The following tests shall be performed on finished mine cases after the surfaces have been prepared for painting and prior to the application of any coatings to the surfaces of the mine cases and following all grinding operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

4.5.4.1.1 Internal leakage. - A manometer similar to that shown in Figure I of this specification shall be used for this test, All external openings in the case shall be sealed and the manometer shall be connected to the instrument compartment of the case with the clamp in the open position. An air pressure of 5 ± 1/2 pounds per square inch gage shall be applied to the charge compartment. Not less than thirty seconds after the required pressure has been attained, the clamp shall be closed, Any leakage within the case as evidenced by a change in the levels of the water in the manometer within three minutes shall be cause for rejection of the case.

4.5.4.1.2 External leakage, - With all external openings sealed, an internal air pressure of 25 ± 1/2 pounds per square inch gage shall be applied simultaneously to both the charge and instrument compartments of the case. With the pressure maintained continuously, the case shall be immersed in water for ten minutes and all surfaces examined for leaks. Any leakage as indicated by the appearance of bubbles shall be cause for rejection of the case.

4.6 Acceptance criteria. - Failure of the Mine Case Mark 25 Mod 1 to meet any of the requirements and tests of this specification shall be considered cause for regarding the mine case defective,

5. PREPARATION FOR DELIVERY

5.1 Packing

5.1.1 Level A

5, 1.1. 1 Each Mine Case Mark 25 Mod 1 shall be packed for shipment in the Crate Mark 25 Mod 0, Bureau of Ordnance LD No. 139207.

5.1.2 Level C (Not applicable, see paragraph 6. 1)

5.2 Marking

5.2.1 In addition to any special marking required by the contract or order, all marking shall be in accordance with Military Standard MIL-STD-129.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.

6.1 Ordering data. - Procurement documents shall specify Level A packing only. The Mine Crate Mark 25 Mod 0 has been specifically designed for handling and shipment of mine cases,

Patent notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:58Z
Check the source to verify that this is the current version before use.

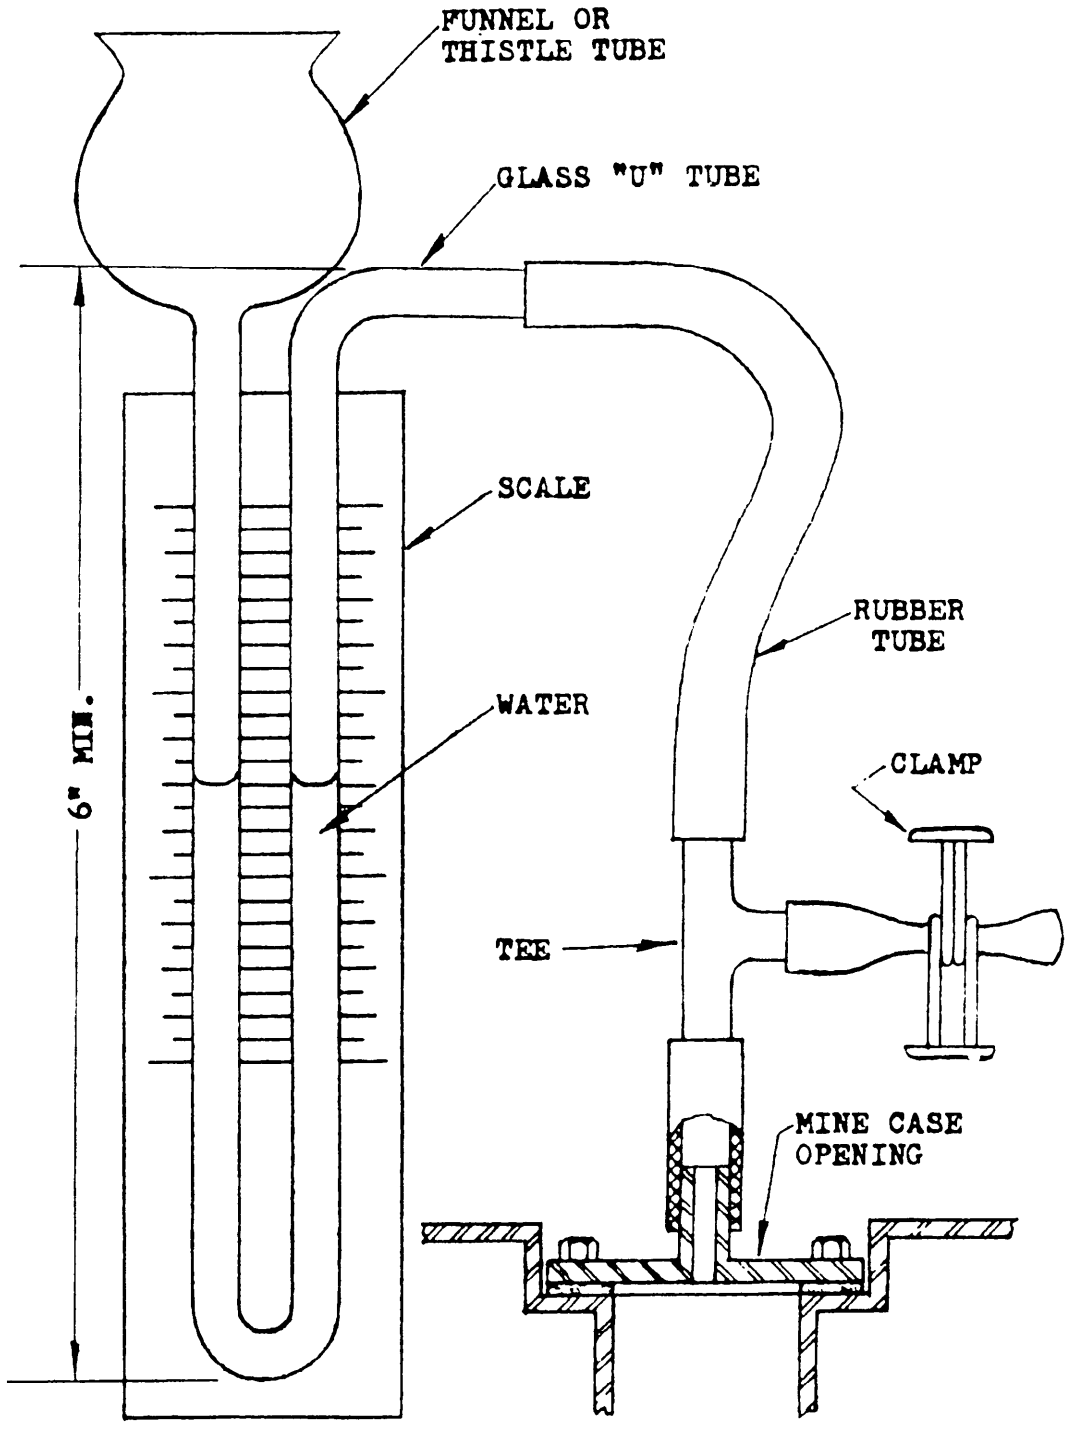


FIGURE 1

MANOMETER FOR LEAKAGE TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:58Z
Check the source to verify that this is the current version before use.