INCH-POUND

MIL-C-48436A (AR)
29 March 1991
SUPERSEDING
MIL-C-48436 (MU)
15 March 1977

MILITARY SPECIFICATION

TEST SET SUBASSEMBLY: 11726378 (7.5 MHz clock)

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a Test Set Subassembly, 11726378, herein referred to as the 7.5 MHz clock, used in Test Set Subassembly MX-8050/TPM-22, part of Radar Test Set AN/TPM-22 (see 6.1).

2* APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines
MIL-STD-2000	-	Standard Requirements for Soldered Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents order Desk, Bldg. 4D, 700 Robbins Avenue Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11726378 - 7.5 MHz Clock

PACKAGING DATA SHEET

PS11726378 - Packaging of 7.5 MHz Clock

(Copies of drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 order of precedence. In the event of conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 11726378, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the 7.5 MHz clock shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
Part identification and marking.
d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The 7.5 MHz clock shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
5 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 5-55-5 hertz sweep time is 7 minutes 35 seconds ± 10%.

3.3.2 shock. The 7.5 MHz clock shall not suffer damage and shall meet requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The 7.5 MHz clock shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.3.2 Non-operating. The 7.5 MHz clock shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The 7.5 MHz clock shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between +32 degrees F and +131 degrees F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.3.4.2 Non-operating (storage). The 7.5 MHZ clock shall not suffer permanent damage when subjected to the constant temperature extremes of -60 degrees F for a period of 24 hours and +160 degrees F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating) The 7.5 MHz clock shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a-relative humidity in excess of 95 percent for a period of 10 days .

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram.

3.5 Performance. When supplied with the input voltages specified In Table I, the 7.5 MHZ clock shall yield the output as specified in 3.5.1 under the worst case conditions with a varying load condition from no load to full load.

TABLE 1. Input characteristics

INPUT VOLTAGES	CHARACTERISTIC	TERMINAL
5V	+ 5.0 ± 0.1 Vdc/100 ma Max.	+ 5V
+15V	+15.0 ± 0.15 vdc/100 ma Masc.	+lSV .
-15V	-15.0 ± 0.15 Vdc/100 ma Max.	-15V

3.5.1 Output characteristics.

3.5.1.1 Output frequency. The output frequency of 7.5 MHz clock shall be 7.492 MHz ± 800 Hz.

3.5.1.2. Output waveform. The output waveform shall be as shown in Figure 1 and meet the following requirements:

a. The “zero” or low level of the output wave shall not exceed +0.40 volts.

b. The “one” or high level of the output wave shall not be less than +3.o volts.

c. The amplitude of waveform shall not exceed +4.o volts maximum.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:26Z
Check the source to verify that this is the current version before use.

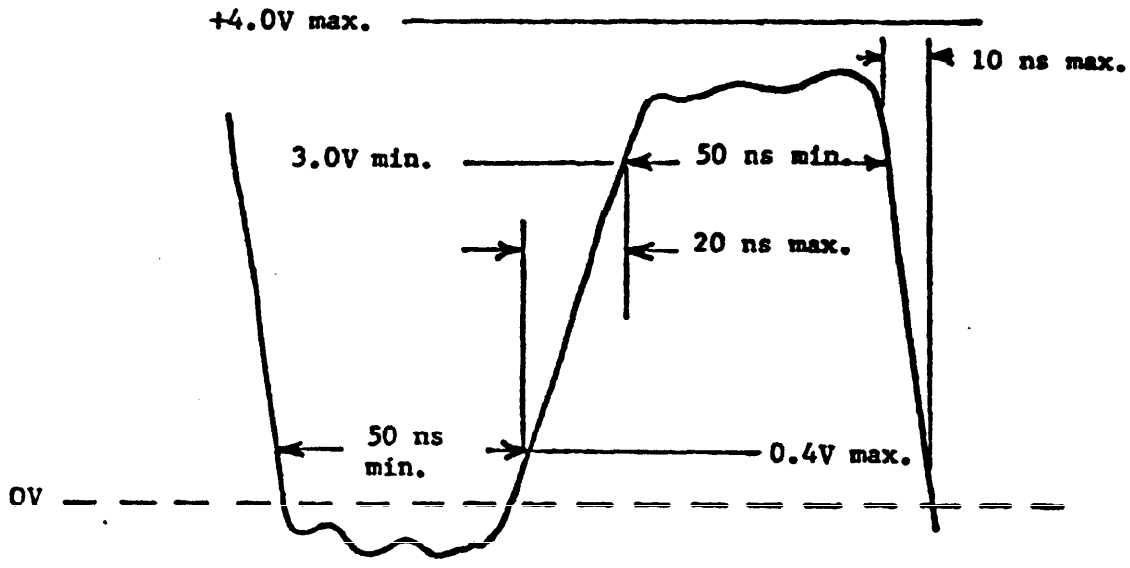


FIGURE 1. Output waveform

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

d. The output wave shall rise to +3.0 volts within 20 ns (nanoseconds) maximum after crossing the +0.4 volt level.

e. The width of the "one" or high at the +3.0 volt level shall be 50 ns minimum.

f. The width of the "zero" or low at the +0.4 volt level shall be 50 ns minimum.

g. The output wave shall fall from the +3.0 volt level to the +0.4 volt level within 10 ns maximum.

h. The crossover inaccuracy at the mid-point (+1.5 level) shall be less than 5 percent of the period from cycle-to-cycle of the fundamental frequency.

i. All output frequencies other than the fundamental frequency and its first nine harmonics shall be attenuated a minimum of 20 dB (decibels) from the fundamental frequency.

3.5.1.3 Output capacity. The 7.5 HZ clock shall be capable of providing the output as described in 3.5.1.1 and 3.5.1.2 into a standard TTL type integrated circuit of two unit loads shunted by a 15 pF (picofarad) capacitor.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Workmanship The workmanship requirements of MIL-F-13926, shall apply except for soldering.

3.8 Soldering. The voltage converter shall be soldered per the general requirements and task F of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it Commit the Government to acceptance of defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg F. to +90 deg F.
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the Contracting officer consisting of one (1) 7.5 MHZ clock for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table II (Functional test) and Table III (Special sampling) herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

TABLE II. Functional tests.
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
101.	Electrical	3.4	4.7.2
102.	Performance	3.5	4.7.3
Minor:		None	N/A

4.5 Special sampling. One 7.5 MHZ clock out of the first so produced and *one out* of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling.

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
103.	Vibration	3.3.1	4.7.1.1
104.	Shock	3.3.2	4.7.1.2
105.	Altitude	3.3.3	4.7.1.3
106.	Temperature	3*3.4	4.7.1.4
107.	Humidity	3.3.5	4.7.1.5
Minor:		None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:26Z
Check the source to verify that this is the current version before use.

4.6.2 contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the 'Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table IV shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

9

TABLE IV. Test equipment list.

ITEM NUMBER		DESCRIPTION
1.	Power supply	Dual Lab Type, ± 15.0 ± 0.1 Vdc at 1.0 A, 0.01% regulation. Ac ripple less than 250 mV.
2.	Power supply	Lab Type, 5.0 ± 0.1 Vdc at 500 mA, 0.01% regulation. Ac ripple less than 0.5 mV rms.
3.	Digital voltmeter (DVM)	0-150 Vdc, accuracy 0.1%.
4.	oscilloscope	Bandwidth: Dc to 150 MHz. Calibrated time base: 2 ns/division to 1 sec/division. Input impedance: 1 Megohm shunted by approximately 15 pF. Vertical sensitivity: 10 mV/division to 5 V/division.
5.	Frequency counter	Range: o to 50 MHz. Accuracy: ± 1 count ± time base accuracy. Sensitivity: 100 mV rms. Input Impedance: 1 Megohm shunted by 25 pF.
6.	Spectrum analyzer	Capable of displaying a 1,000 MHz spectrum width with a 60 dB dynamic range and display range, and a frequency response flatness of ± 0.5 dB. Sensitivity: -98 dBm with residual responses (no input signal) less than -85 dBm.
7.	Output load	2 Unit TTL type, refer to Figure 2.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:26Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of procedure I only steps 4 through 8 of paragraph II-2.1 apply. The 7.5 MHz clock shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the 7.5 MHz clock shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the 7.5 MHz clock shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating) This test shall be performed as specified in procedures II and III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating) This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating) This test shall be performed in accordance with procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

4.7.3 Performance. The selected 7.5 MHZ clock shall be connected as shown in Figure 2. Using the DVM (Table IV, item 3), adjust the input voltage as specified in Table I of 3.5.

4.7.3.1 Output frequency. Adjust the controls of the frequency counter (Table IV, item 5) to read the output frequency of the 7.5 MHZ clock. The output frequency should be 7.492 MHz ± 800 *Hz;* record the actual output frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

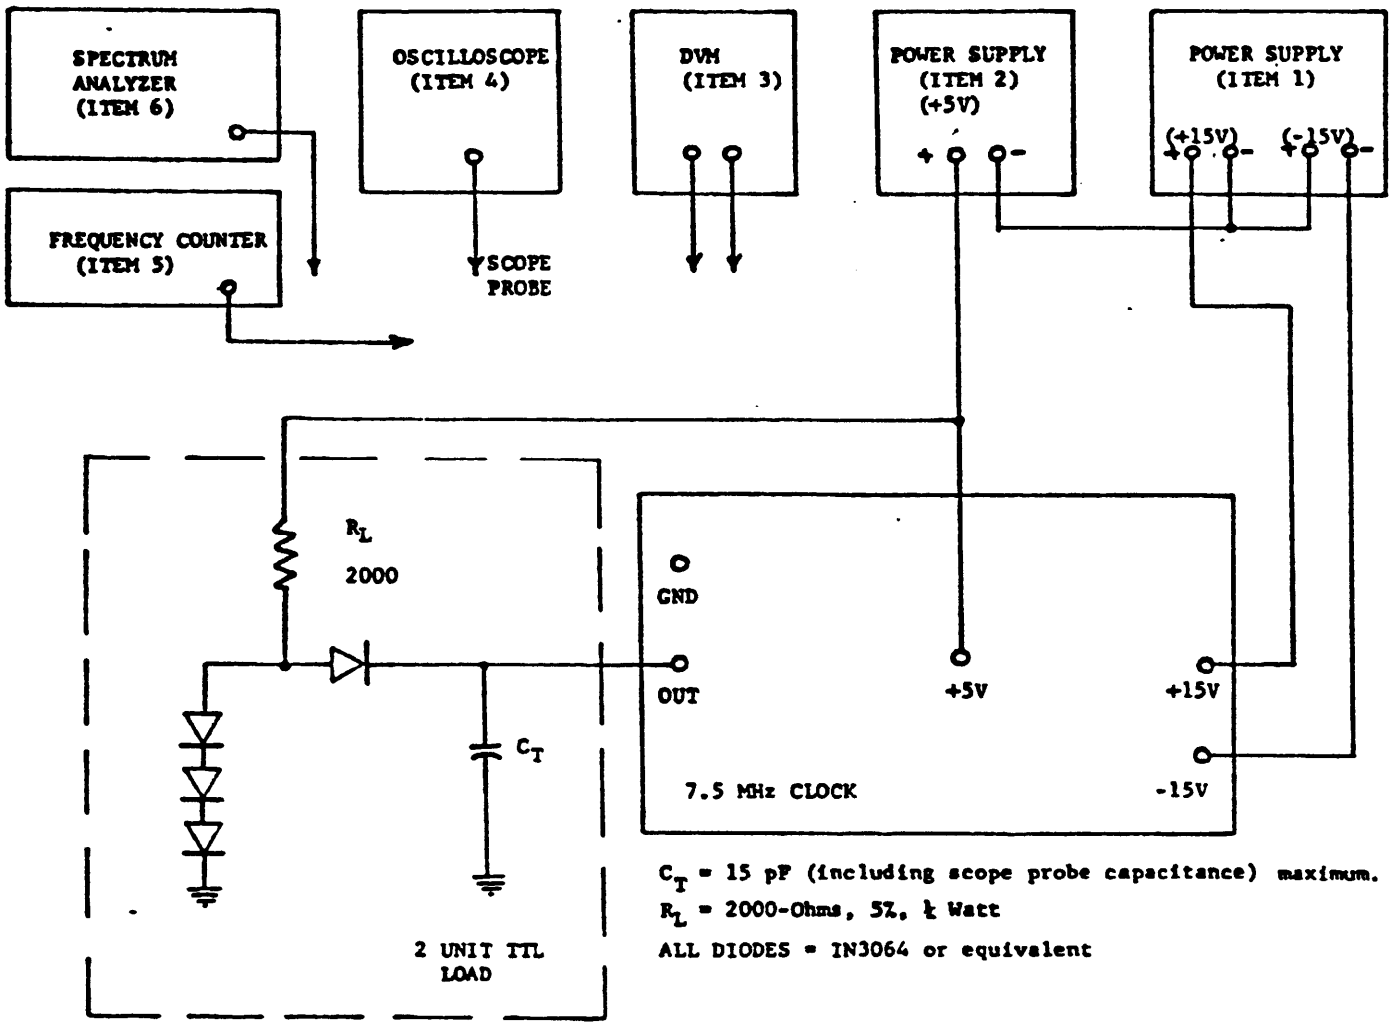


FIGURE 2. 7.5 MHz clock test set-up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.7.3.2. Output waveform. Disconnect the frequency counter from the output and connect the oscilloscope probe (Table IV, item 4) to the output terminal of the 7.5 MHz clock. Refer to Figure 1 for the following measurements.

a. Check that the “zero” or low level of the output wave is less than +0.4 volts for the entire zero half-period.

b. Check that the “one” or high level of the output wave is greater than +3.0 volts but less than +4.0 volts for the entire "one” half-period.

c. Check that the risetime, from the +0.4 volt to the +3.0 volt levels is not more than 20 ns.

d. Check that the width of the “one” level at the +3.0 volt points is 50 ns minimum.

e. Check that the width of the “zero” level at the +0.4 volt points is 50 ns minimum.

f. Check that the falltime, from +3.0 volts to +0.4 volts levels, is not more than 10 ns.

g“ Measure the time of one period and record it. Expand the scope presentation and measure the amount of jitter (crossover inaccuracy) at the mid-point (+1.5 V level) of the risetime from 0.4 V to +3.0 V. The amount of jitter should be less than 5 percent of the time of the measured period of one cycle.

h. Disconnect the oscilloscope from output and connect the spectrum analyzer (Table IV, item 6). Adjust the display to center the fundamental output frequency and all the harmonic present in the presentation. Check that all the harmonics except the first nine are greater than 20 dB down from the fundamental output frequency.

i. Disconnect the load from the 7.5 MHz clock output and perform the tests of 4.7.3.1 and 4.7.3.2.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:26Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet PS11726378.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The 7.5 MHZ clock is used to produce the timing signals and logic stimulus for the Card Reader Test Set MX-8050/TPM-22 which is used for testing and troubleshooting of printed circuit cards from the Range Computer, CP-888/VPS-2 and the Radar Test Set AN/TPM-22.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Applicable stock number.
c. First article sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of conformance for each lot or shipment of product.
9" Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal; Rock Island Arsenal-or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC .

6.5 Subject term (Key word) listing.

Card Reader Test Set MX-8050/TPM-22
Range Computer, CP888/VPS-2

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:26Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A716)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-48436A (AR)	29 MARCH 1991

3. DOCUMENT TITLE

TEST SET SUBASSEMBLY: 11726378 (7.5 MHZ CLOCK)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. [illegible]

7. [illegible]

8. PREPARING ACTIVITY

a. NAME
US ARMY ARDEC
STANDARDIZATION OFFICE

b. TELEPHONE (Include Area Code)
(1) Commercial (201) 724-6674
(2) AUTOVON 880-6674

c. ADDRESS (Include Zip Code)
ATTN: SMCAR-BAC-S
PICATINNY ARSENAL, NJ 07806-5000

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:
Defense Quality and Standardization Office
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466
Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.