MIL-P-52894B(ME)
16 August 1985
SUPERSEDING
MIL-P-52894A(ME)
15 October 1981

MILITARY SPECIFICATION

POWER PLANT, ELECTRIC, DIESEL ENGINE, TRAILER MOUNTED

5 KW, 60 HERTZ, AN/MJQ-16

This specification is approved for use by the Belvoir Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers trailer mounted generator sets (hereinafter referred to as a power plant) designated AN/MJQ-16. The power plant consists of two Department of Defense standard, diesel-engine-driven, 5 kW, 60 hertz generator sets, various auxiliary equipment, brackets, and hardware mounted on a modified Government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

FEDERAL

L-P-378 - Plastic Sheet and Strip, Thin Gauge, Polyolefin.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6115

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.
MMM-A-1617	- Adhesive, Rubber Base, General Purpose.
PPP-B-591	- Boxes, Fiberboard, Wood-Cleated.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solids, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-291	- Paperboard, Wrapping and Cushioning.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power, Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailer Dollies, Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-705	- Generator Sets, Engine-Driven, Methods of Tests and Instructions.
MIL-STD-889	- Dissimilar Metals.
MS35494-56	- Screw, Wood, Flat Head, Slotted, Steel and Brass.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13220E4455	- Power Plant, Electric, AN/MJQ-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings required by manufacturers in connection with specific acquisition functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take a precedence.

3. REQUIREMENTS

3.1 Description. The power plant AN/MJQ-16 shall be in accordance with Top Assembly TA13220E4455 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.7).

3.1.1.2 Safety. Any changes, deviations, and waivers to TA13220E4455 shall conform with the following requirements: all rotating or reciprocating parts and other parts subject to high operational temperatures that are of such a nature or are so located as to be a hazard to operating personnel, shall be guarded or insulated to the extent necessary to eliminate the hazard. Electrical equipment shall be effectively guarded and grounded to protect all persons and objects from electrical shock hazard.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of production power plants from the approved first article during production shall be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish power plants conforming to this specification.

3.3 Material. Material shall be as specified herein and on the drawings. Material not specified shall be selected by the contractor and shall be subject to the provisions of 3.3.1, 3.3.2, 3.3.3, and 3.3.4 in this specification.

3.3.1 Material deterioration and control. The item(s) shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operation and storage environment to which the item may be exposed.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the currentversion before use.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcompenent, and shall make information available upon request to the contracting officer or designated representative.

3.3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the generator sets may be newly fabricated from recovered materials to the maximum extent practicable, provided the generator sets produced meet all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the generator sets.

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Item No.	Description	Identification	Quantity for each AN/MJQ-16
1	Chassis, trailer, 1-1/2 ton, 2 wheel, Model M103A3	MIL-C-45150	1
2	Generator set, diesel engine-driven 5 kW, 60 hertz DOD Model MEP-002A	NSN 6115-00-465-1044	2

3.5 Workmanship. Workmanship shall be of a quality to assure that the power plants are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability. External surfaces shall be free from burrs, sharp edges, and corners except when sharp edges and corners are specified on the applicable drawing.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or repeat any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and service conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.1.1 Disassembly inspection. Failure of the examination by the first article model shall be cause for disassembly in the presence of a Government representative of the first article model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and retesting shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.3 Acceptability criteria. Power plants which conform to all requirements in section 3 and 5 of this specification and pass all applicable examinations and tests in section 4 of this specification will be considered acceptable by the Government.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4.)
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article power plant shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. The first article shall be tested as specified in 4.5.2. Failure of the test shall be cause for performing the inspection specified in 4.1.1.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power plant shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Power plant components shall be tested as specified in 4.5.2. Failure of the test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power plants shall be examined for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

101. Materials not as specified.
102. Materials are not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment.
103. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other
104. Contractor does not have documentation available for identification of material, material finishes or treatments.
105. Used, rebuilt, or remanufactured compents, pieces or parts incorporated in the generator sets.
106. Treatment and painting not as specified.
107. Dimensions not as shown on drawings.
108. Components missing or not as specified.
109. Assembly not as shown on the drawings.
110. Workmanship not as specified.
111. Safety not as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. The following preparation shall be made prior to testing the switch box assembly:

a. Cables running between the switch box assembly and the generator sets shall be installed to the switch box assembly rotary switch.
b. The free ends of the cables shall be attached to each generator set as follows:

(1) Cable wire marked L1 shall be attached to Phase A.
(2) Cable wire marked L2 shall be attached to Phase B.
(3) Cable wire marked L3 shall be attached to Phase C.
(4) Cable wire marked L0 shall be attached to neutral.

c. A 3 phase, 4 wire, 5 kw resistive load shall be connected to the output of the switch box.

4.5.2.2 Test procedures. Tests shall be conducted in accordance with MIL-STD-705 and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days prior to the start of testing and at intervals not greater than 6 months thereafter.

4.5.2.3 Operation. The rotary switch of the switch box shall be placed in the generator No. 1 position. Start and operate the generators in accordance with the operator's manual at the rated load through the rotary switch for a minimum of 5 minutes. During this period, phase sequence (rotation) shall be tested in accordance with MIL-STD-705, method 507.1. Phase rotation shall be L1, L2, and L3. This test shall be performed at the load terminals of the switch box. At the conclusion of the generator No. 1 position test, the rotary switch shall be placed in the generator No. 2 position. Repeat the test. Inability of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

the switch box assembly to maintain or transfer a rated load shall constitute failure of this test. Failure of the GFE generators to operate in accordance with the operator's manual shall not constitute failure of the test. The contracting officer shall be notified immediately of any such failure.

4.6 Inspection of packaging.

4.6.1 First article pack inspection. The first article pack shall be examined for defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

112.	Generator set not preserved as specified.
113.	Fire extinguisher not removed and preserved as specified for levels A and B.
114.	Accessories not placed and secured in the accessory box as specified for all levels.
115.	Oil drain not disconnected and secured as specified for level A.
116.	Power cables and ground wires not disconnected; cables, wire, and terminals not matchmarked and secured as specified.
117.	Technical publications not preserved and secured as specified.
118.	Tarpaulin not folded and wrapped as specified.
119.	Trailer chassis components not preserved as specified.
120.	Packing not as specified for generators and all accessories.
121.	Depreservation guides not prepared and attached to the power plant as specified.
122.	Marking illegible, incomplete, incorrect, or missing.

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination within the time frame specified (see 6.2), to prove prior to starting production packaging that the applied preservation, packing and marking comply with the packaging requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The first article pack may be accomplished utilizing either the first article model power plant or a production power plant. If the first article model power plant is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the first article model power plant and production power plants.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

5.2 Preservation. Preservation shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Generator sets. Each generator set shall be preserved in accordance with MIL-G-28554, level A. The generator sets shall be secured directly through the barrier material to the trailer using the required bolts in lieu of the reed base specified in the packaging requirements of MIL-G-28554. The humidity indicators and inspection ports shall be installed on an end or side in a location convenient for inspection of the humidity indicators. Before sealing the barrier, the fiberboard cap specified in table I and figure 2 herein shall be installed on the generator sets.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, type CF, variety SW, grade 125, style optional and shall be secured to one of the generator sets with tape conforming to PPP-T-97, type IV.

5.2.1.3 Accessories. The ground rods, fuel can adapters, hammer, and the driver/puller shall be placed in the accessory box and secured to prevent movement.

5.2.1.4 Oil drain. The oil drain shall be disconnected at the trailer bed and secured to the generator frame with PPP-T-97, type IV tape.

5.2.1.5 Power cables and ground wires. Power cables and ground wires shall be disconnected from the generator sets. The cables, wires, and terminals on the generator sets shall be matchmarked with tags conforming to UU-T-81, type A to facilitate reinstallation of the cables and wires. The ground wires and clamps shall be secured to one of the generator sets, with PPP-T-97, type IV tape. Ends of power cables shall be taped or covered.

5.2.1.6 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 and shall be placed in the accessory box.

5.2.1.7 Tarpaulin. The tarpaulin shall be folded to form a minimum size pack and shall be wrapped in plastic film conforming to L-P-378, type I, class 1, grade A, 4 to 8 mil. The wrap shall be secured with tape conforming to PPP-T-97, type IV.

5.2.1.8 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A as specified for mobile vehicles.

5.2.2 Level B.

5.2.2.1 Generator sets. Each generator set shall be preserved in accordance with MIL-G-28554, level B.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:11Z
Check the source to verify that this is the currentversion before use.

5.2.2.2 Fire extinguisher, ground rods, and hammer. The fire extinguisher, ground rods, hammer, fuel can adapters, and driver/puller shall be preserved as specified for level A.

5.2.2.3 Power cables and ground wires. The power cables and ground wires shall be disconnected, the cable, wire, and generator terminals matchmarked, and the wires and cables placed and secured as specified for level A.

5.2.2.4 Technical publications and tarpaulin. Technical publications, and tarpaulin shall be preserved as specified for level A.

5.2.2.5 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A, as specified for mobile vehicles.

5.2.3 Level C. All unpainted surfaces shall be preserved to provide protection against deterioration and damage during shipment from the contractor to the initial destination. Cables shall be disconnected and matchmarked. All loose components shall be placed in the accessory box. Technical publications shall be placed in a waterproof bag and placed in the accessory box. The fire extinguisher shall be placed in its bracket.

5.3 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.3.1 Level A or B. Packing shall be in accordance with table I, and figures 1, 2, and 3 and as specified herein. The tarpaulin shall be packed in the box which is secured to the front generator.

5.3.2 Level C. Power plants shall be shipped mobile. The tarpaulin and tarpaulin bows shall be packed and secured as specified for level B.

5.4 Marking. Marking for shipment and storage shall be in accordance with MIL-STD-129.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared and placed in waterproof envelopes marked "Depreservation Guide." One copy shall be secured on the generator set and a second copy shall be secured in a conspicuous location on the power plant. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved and packed as specified herein, regardless of the preservation and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power plant is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this specification.
b. Date of issue of DoDISS applicable and exceptions thereto (see 2.1.1).
c. When a first article is not required (see 3.2).
d. Time frame required for the first article pack (see 5.1).
e. Level of preservation and of packing required (see 5.2 and 5.3).
f. When other than DA Form 2258 is to be used (see 5.5).

6.3 First article inspection. When a first article inspection is required, the power plant should be a preproduction model. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and dispostion of the document's first article.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, pack, and mark the power plants in accordance with this specification.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration number. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6115-A495

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE 1
PRESERVATION AND PACKING MATERIAL

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B
1	PPP-B-601, OVERSEAS TYPE, STYLE I, (NOTE 1 AND 2)	BOX, PLYWOOD, 1/4" SHEATHING	3	
	PPP-B-601, DOMESTIC TYPE, STYLE I, (NOTE 1 AND 2)	BOX, PLYWOOD, 1/4" SHEATHING		3
2	MIL-B-131, CLASS I	BARRIER MATERIAL	AR	
3	PPP-F-320 TYPE SF OR CF, CLASS WEATHER-RESISTANT	FIBERBOARD	4	
4	PPP-P-291, TYPE I, STYLE 2	CORRUGATED PAPER	2	
5	MIL-G-12803, TYPE I, 1-1/2" X 1-1/2" X 1/8"	GASKET 11/16" HOLE	16	
6	WOOD WEDGE	LUMBER, SOFTWOOD NOMINAL 2" X 4"	4	4
7	QQ-S-781, CLASS 1, TYPE I OR IV, FINISH B	STRAPPING, STEEL, FLAT, .020 X 3/4"	AR	
8	QQ-S-781, CLASS 1, TYPE I OR IV FINISH A	STRAPPING, STEEL, FLAT, .020 X 3/4"		AR
9	NN-P-530	INSPECTION WINDOW COVER, PLYWOOD	2	
10	MS35494-56	SCREWS	8	8
11	PPP-B-601, OVERSEAS TYPE, STYLE I (NOTE 1 AND 3)	BOX, PLYWOOD	1	
	PPP-B-601, DOMESTIC TYPE, STYLE I (NOTE 1 AND 3)	BOX, PLYWOOD		1
12	FRAMING	LUMBER, SOFTWOOD NOMINAL 1" X 2"	AR	AR
13	PPP-T-97	TAPE, PRESSURE SENSITIVE	AR	AR
14	PPP-F-320 TYPE SF OR CF, CLASS WEATHER-RESISTANT	FIBERBOARD, EDGE PROTECTORS	AR	AR
15	MMM-A-1617 TYPE II	ADHESIVE, RUBBER BASE, GENERAL PURPOSE	AR	AR

NOTES:
1. NO CONTENT WEIGHT REQUIRED WITHOUT BOTTOM.
2. TOP TO BE WITHOUT CLEATS, 1/2 INCH THICKNESS, AND SHALL COMPLETELY COVER ALL EDGES.
3. SIDES AND TOP TO BE WITHOUT CLEATS, 1/4 INCH THICKNESS.
4. ALL NAILS USED IN BLOCKING AND SUPPORT STRUCTURE TO BE CEMENT COATED OR MECHANICALLY DEFORMED.

X-4015

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

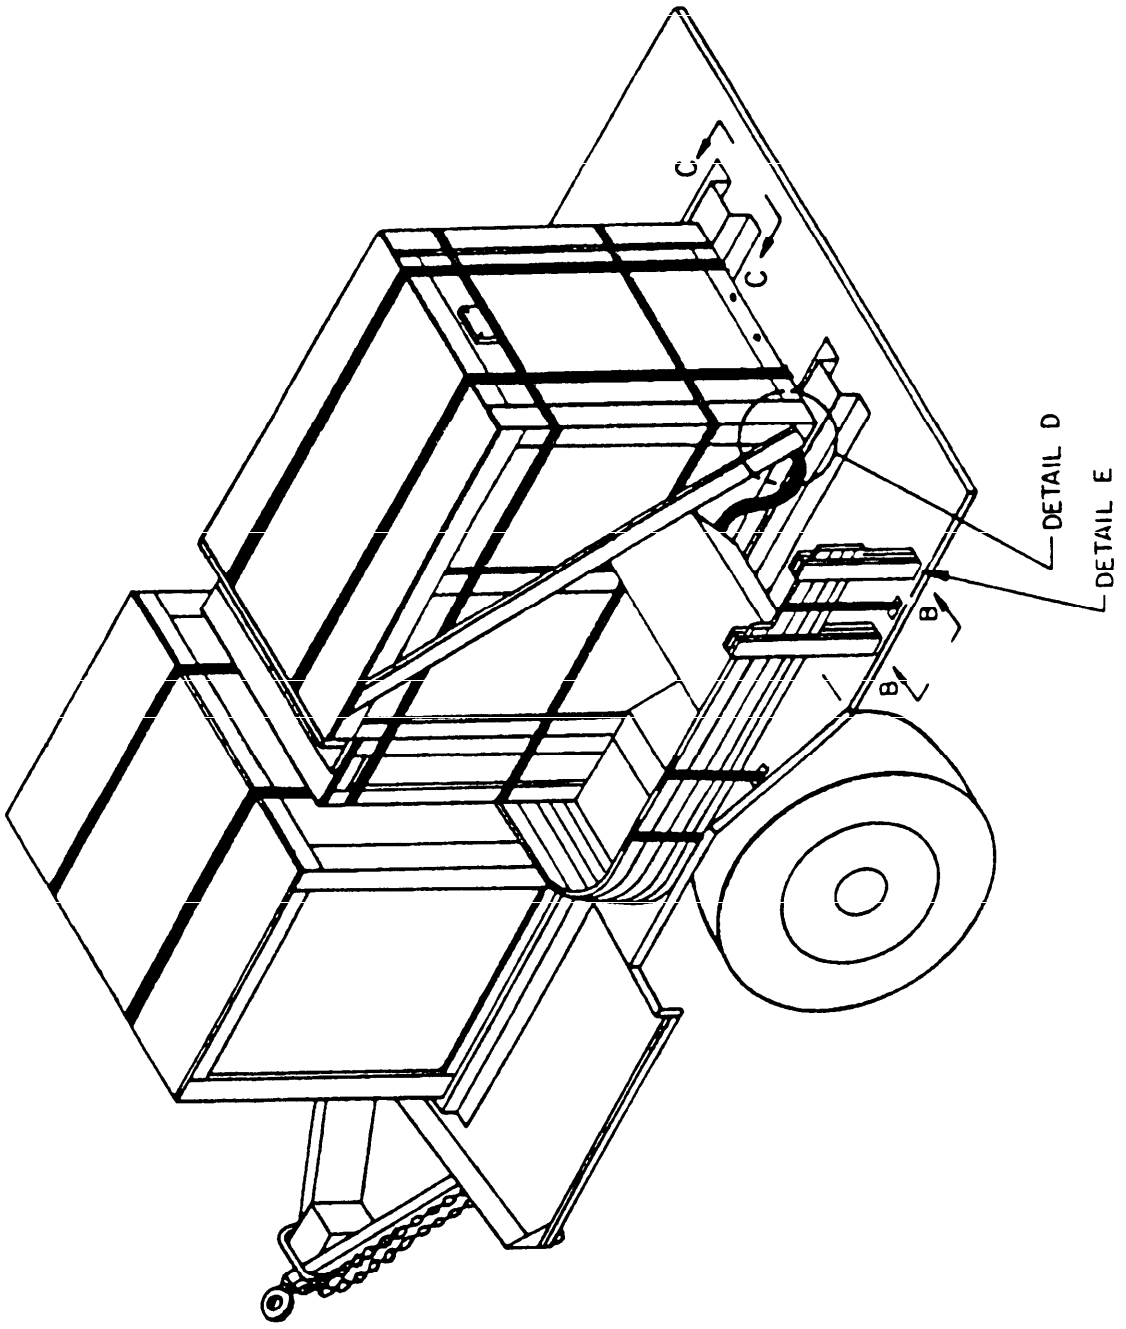


FIGURE 1. Packing configuration.

X-40968

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. TO PROVIDE ADEQUATE CLEARANCE, NO CLEATS SHALL BE APPLIED ON THE FORWARD FACE OF THE FORWARD GENERATOR BOX (1).
2. CORRUGATED PAPER (4) PLACED BETWEEN BOTTOM OF GENERATOR AND BARRIER MATERIAL (2).
3. FIBERBOARD PAD (3) PLACED BETWEEN BARRIER MATERIAL (2) AND WOOD WEDGE (6).
4. FIBERBOARD EDGE PROTECTORS (14) PLACED UNDER THE METAL STRAPPING (7) SECURING THE TOP BOWS.

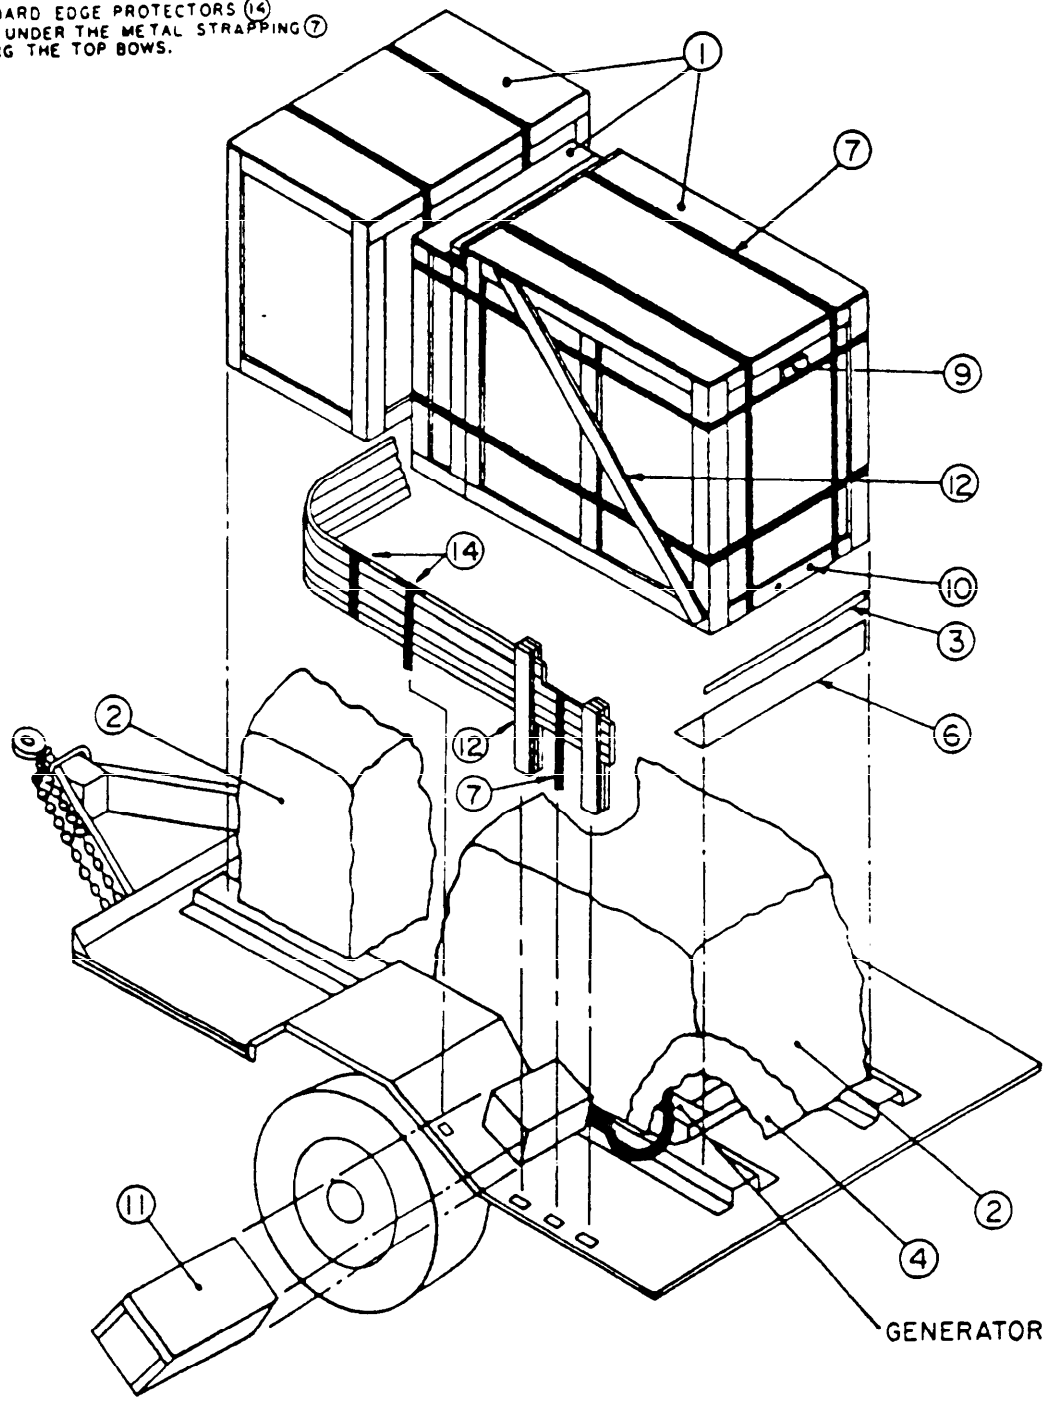


FIGURE 2. Preservation and packing assembly.

X-4097B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

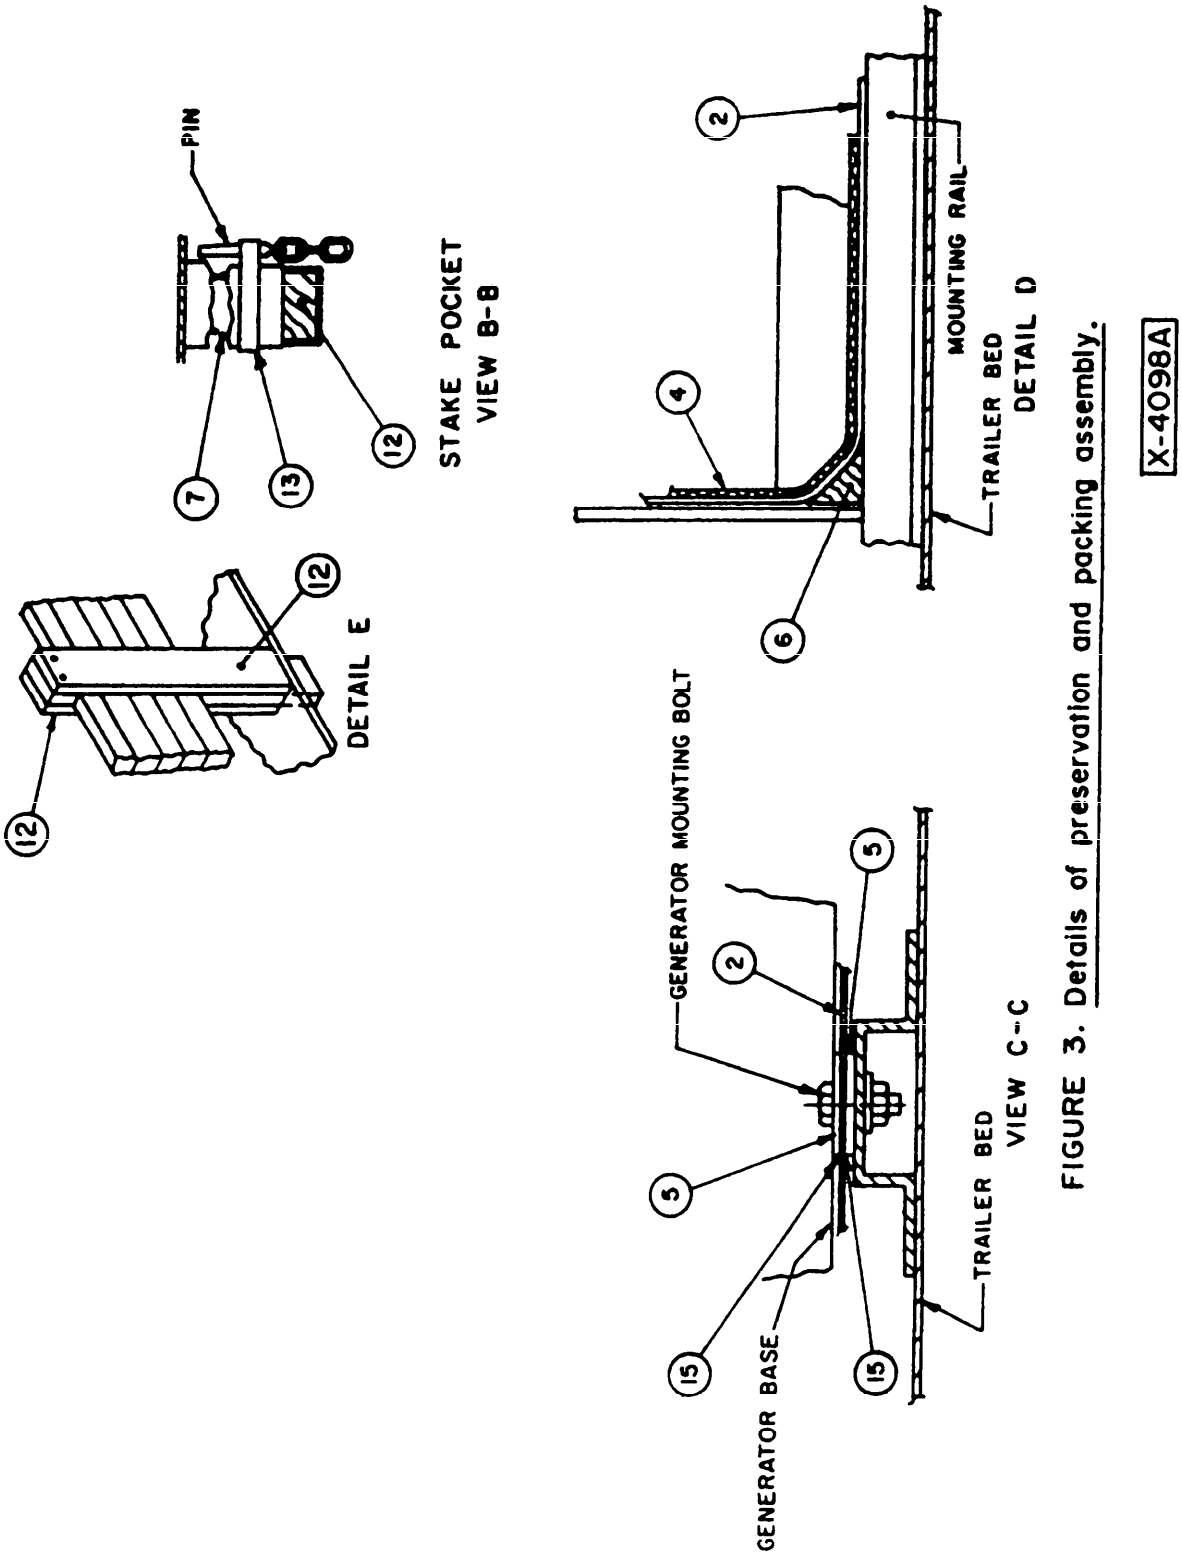


FIGURE 3. Details of preservation and packing assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-DS
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:11Z
Check the source to verify that this is the currentversion before use.

PLANT, ELECTRIC, TRAILER MOUNTED

POWER

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-52894B(ME)	Power Plant, Electric, Diesel Engine, Trailer Mounted 5 KW, 60 Hertz, AN/MJQ-16

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:11Z
Check the source to verify that this is the current version before use.