MIL-P-52897A(ME)
30 November 1982
SUPERSEDING
MIL-P-52897(ME)
16 March 1976

MILITARY SPECIFICATION

POWER PLANT, ELECTRIC

DIESEL ENGINE, TRAILER MOUNTED

10KW, 60 HERTZ, AN/MJQ-18

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers trailer mounted generator sets (hereinafter referred to as a power plant) designated AN/MJQ-18. The power plant consists of two Department of Defense standard, diesel-engine-driven, 10KW, 60 hertz generator sets, various auxiliary equipment, brackets, and hardware mounted on a modified Government-furnished trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6115

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

SPECIFICATION

FEDERAL

NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
UU-T-81	- Tags, Shipping and Stock.
MMM-A-1617	- Adhesive, Rubber Base, General Purpose.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solids, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-P-291	- Paperboard, Wrapping and Cushioning.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-G-12803	- Gasket Material, Non-Metallic.
MIL-G-28554	- Generator Sets, Mobile Electric Power, Packaging of.
MIL-C-45150	- Chassis, Trailer, 2-Wheel, Cart Type, 1/4 to 3-1/2 Ton.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailer Dollies, Preservation and Packaging of.
MIL-STD-642	- Identification Marking of Combat and Tactical Transport Vehicles.
MIL-STD-705	- Generator Sets, Engine-Driven, Methods of Tests and Instructions.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS35494-56	- Screw, Wood, Flat Head, Slotted, Steel and Brass.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13220E4465 - Power Plant, Electric, AN/MJQ-18.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3.1 Description. The power plants, AN/MJQ-18, shall be in accordance with Top Assembly, TA13220E4465 and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.1.1.1 Vehicle marking. Registration numbers and other marking of the trailer shall be in accordance with MIL-STD-642 (see 6.7).

3.2 First article (preproduction model). The contractor shall furnish one power plant for examination and test within the time specified (see 6.2), to prove prior to starting production that his production methods will produce power plants that comply with the requirements of this specification. Examinations and tests shall be as specified in Section 4; and unless otherwise specified herein, all examinations and tests shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examinations or tests.

3.3 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.4 Government-furnished property. The following property in the quantities indicated will be furnished by the Government (see 6.4):

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

Item No.	Description	Identification	Quantity for each AN/MJQ-18
1	Chassis, trailer, 1-1/2 ton, 2 wheel, Model M103A3	MIL-C-45150	1
2	Generator set, diesel-engine-driven 10 kW, 60 Hertz DOD Model MEP-003A	NSN 6115-00-465-1030	2

3.5 Workmanship. Workmanship shall be of a quality to assure that the power plants are free from defects resulting from defective material, incorrect manufacturing or assembly practices, incorrect treatment and painting, incomplete welds, rust, cracks, and other defects that could impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Disassembly inspection. Failure of the examination by the preproduction model shall be cause for disassembly in the presence of a Government representative of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected. Reassembly with accepted parts and retesting shall be the responsibility of the contractor. Government-furnished property shall be excluded from the requirements of this paragraph.

4.1.2 Component and material inspection. The contractor is responsibile for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.3 Acceptability criteria. Power plants which conform to all requirements in Section 3 and 5 of this specification and pass all applicable examinations and tests in Section 4 of this specification will be considered acceptable by the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the currentversion before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Preproduction inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction power plant shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection or for performing the disassembly inspection specified in 4.1.1.

4.3.2 Tests. Power plant components shall be tested as specified in 4.5.2. Failure of the test shall be cause for rejection or for performing the disassembly inspection specified in 4.1.1.

4.4 Quality conformance inspection.

4.4.1 Examination. Each power plant shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Power plant components shall be tested as specified in 4.5.2. Failure of the test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The power plants shall be examined for the following defects:

101. Treatment and painting not as specified.
102. Dimensions not as shown on drawings.
103. Components missing or not as specified.
104. Assembly not as shown on the drawings.
105. Workmanship not as specified.
106. Vehicle registration marking and identification plate, missing, incomplete, improper location or size.

4.5.2 Tests.

4.5.2.1 Test conditions. The following preparations shall be made prior to testing the distribution box assembly:

a. Cables running between the distribution box assembly and the generator sets shall be installed to the distribution box assembly rotary switch.
b. The free ends of the cables shall be attached to a commercial power source as follows:

1. Cable wire marked L1 shall be attached to Phase A.
2. Cable wire marked L2 shall be attached to Phase B.
3. Cable wire marked L3 shall be attached to Phase C.
4. Cable wire marked LO shall be attached to neutral.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.2.2 Test procedures. Tests shall be conducted in accordance with MIL-STD-705 and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days prior to the start of testing and at intervals not greater than 6 months thereafter.

4.5.2.3 Operation. The rotary switch of the distribution box shall be placed in the generator No. 1 position. Commercial power, equivalent to the rated load of the generator set, shall be supplied through the rotary switch for not less than 5 minutes. During this period, phase sequence (rotation) shall be tested in accordance with MIL-STD-705, Method 507.1. Phase rotation shall be L1, L2, and L3. This test shall be performed at the load terminals of the distribution box. At the conclusion of the generator No. 1 position test, the rotary switch shall be placed in the generator No. 2 position. Repeat the test. Inability of the distribution box assembly to maintain or transfer a rated load shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection. The preproduction pack shall be examined for defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107.	Materials, containers, or procedures not as specified for level A or B.	Each incorrect material, container, or procedure shall constitute one defect.
108.	Generator set not preserved as specified for level A or B.	
109.	Fire extinguisher not removed and placed in box as specified for level A or B.	
110.	Oil drain not disconnected and secured as specified for level A.	
111.	Power cables and ground wires not disconnected; cables, wire, and terminals not matchmarked and wrapped and secured as specified for level A or B.	
112.	Repair parts and maintenance tools not preserved as specified for level A or B.	
113.	Technical publications not preserved as specified for level A or B.	
114.	Tarpaulin not folded and placed in box as specified for level A and B.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

115. Trailer chassis components not preserved as specified for level A or B.
116. Preservation and packing not in accordance with the referenced document as specified for commercial.
117. Packing not as specified for level A or B.
118. Depreservation guides not prepared and attached to the power plant as specified for level A, B, or commercial.
119. Marking illegible, incomplete, incorrect, or missing for level A, B or commercial.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2), to prove prior to starting production packaging that the applied preservation, packing and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power plant or a production power plant. If the preproduction model power plant is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model power plant and production power plants.

5.2 Preservation. Preservation shall be level A, level B, or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Generator sets. Each generator set shall be preserved in accordance with MIL-G-28554, Level A. The generator sets shall be secured directly through the barrier material to the trailer using the required bolts in lieu of the wood base specified in the packaging requirements of MIL-G-28554. The humidity indicators and inspection ports shall be installed on an end or side in a location convenient for inspection of the humidity indicators. Before sealing the barrier, the sides, ends, and top of each generator shall be wrapped with a double thick wrap of paperboard cushioning material conforming to PPP-P-291, Type I, Style 2, to protect the barrier material from any sharp protrusions.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and placed in a close fitting box conforming to PPP-B-636, W5c, or W6c, style optional

5.2.1.3 Oil drain. The oil drain shall be disconnected at the trailer bed and secured to the generator frame with tape conforming to PPP-T-97, Type IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

5.2.1.4 Power cables and ground wires. Power cables and ground wires shall be disconnected from the generator sets. The cables, wires, and terminals on the generator sets shall be matchmarked with tags conforming to UU-T-81, Type A to facilitate reinstallation of the cables and wires. The disconnected ends shall be wrapped with paperboard cushioning material conforming to PPP-P-291, Type I, Style 2 and secured in place with tape conforming to PPP-T-97, Type IV.

5.2.1.5 Repair parts. The preservation application criteria and applicable submethods of MIL-P-116 shall be used to preserve and pack the repair parts when supplied.

5.2.1.6 Maintenance tools. Maintenance tools if any, shall be preserved in accordance with PPP-P-40, Level A.

5.2.1.7 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, Method IC-1 or IC-3.

5.2.1.8 Tarpaulin. The tarpaulin shall be folded to form a minimum size pack and placed in a close fitting box conforming to PPP-B-636, W5c, style optional.

5.2.1.9 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level A as specified for mobile vehicles.

5.2.1.10 Consolidation. The fire extinguisher, ground rods, hammer, fuel can adapters, technical publications, tarpaulin and the repair parts and maintenance tools when furnished shall be consolidated together in a box as shown in figure 1 and 2, located between the two generators.

5.2.2 Level B.

5.2.2.1 Generator sets. Each generator set shall be preserved in accordance with MIL-G-28554, Level B.

5.2.2.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and placed in a close fitting box conforming to PPP-B-636, Type CF, Class Domestic, Variety SW, Grade 125, style optional.

5.2.2.3 Power cables and ground wires. The power cables and ground wires shall be disconnected, the cable, wire, and generator terminals matchmarked, and the wires and cables wrapped and secured as specified for level A.

5.2.2.4 Repair parts, maintenance tools and technical publications. The repair parts, maintenance tools and technical publications shall be preserved as specified for level A.

5.2.2.5 Tarpaulin. The tarpaulin shall be folded to form a minimum size pack and placed in a close fitting box conforming to PPP-B-636, Type CF, Class Domestic, Variety SW, Grade 175, style optional.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:11Z
Check the source to verify that this is the currentversion before use.

5.2.2.6 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level A, as specified for mobile vehicles.

5.2.3 Commercial. Power plants shall be preserved in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be level A, level B, or commercial, as specified (see 6.2).

5.3.1 Level A or B. Packing shall be in accordance with table I, and figure 1, 2, and 3 and as specified herein.

5.3.2 Commercial. Power plants shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Level A and B. Marking for levels A and B shall be in accordance with MIL-STD-129.

5.4.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188.

5.5 Depreservation guides. Two copies of depreservation guides shall be prepared. Each copy shall be placed in a waterproof envelope marked "Depreservation Guide." One copy shall be secured on one of the generators and a second copy shall be secured in a conspicuous location elsewhere on the power plant. Unless otherwise specified (see 6.2), DA Form 2258 "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.6).

5.6 Preparation of Government-furnished property. Government-furnished property shall be preserved and packed as specified herein, regardless of the preservation and packing provided at the time of receipt by the contractor.

6. NOTES

6.1 Intended use. The power plant is intended for use by the Armed Services to supply electrical power for military operations.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Date of issue of DoDISS applicable to this contract and exceptions thereto (see 2.1.1).
c. Time frame required for submission of the preproduction model (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

d. When the Government will conduct any or all of the preproduction model examinations and tests. When the Government will conduct some but not all of the preproduction examinations and tests, the contracting officer should specify which examinations and tests will be conducted by the Government and which examinations and tests shall be conducted by the contractor (see 3.2).
e. Time frame required for submission of the preproduction pack (see 5.1).
f. Whether level A, level B, or commercial preservation, and level A, level B, or commercial packing is required (see 5.2 and 5.3).
g. When other than DA Form 2258 is to be used (see 5.5).

6.3 Preproduction model. Any changes or deviations of production power plants from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish power plants conforming to this specification.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.4.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power plants in accordance with this specification.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration number. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6115-A469

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.


TABLE 1
PRESERVATION AND PACKING MATERIAL

FIND NO.	IDENTIFICATION	DESCRIPTION	LEVEL A	LEVEL B
1	PPP-B-601, OVERSEAS TYPE, STYLE I, (NOTE 1 AND 2)	BOX, PLYWOOD, 1/4" SHEATHING	3	
	PPP-B-601, DOMESTIC TYPE, STYLE I, (NOTE 1 AND 2)	BOX, PLYWOOD, 1/4" SHEATHING		3
2	MIL-B-131, CLASS I	BARRIER MATERIAL	AR	
3	PPP-F-320 TYPE SF OR CF, CLASS WEATHER-RESISTANT	FIBERBOARD	4	
4	PPP-P-291, TYPE I, STYLE 2	CORRUGATED PAPER	2	
5	MIL-G-12803, TYPE I, 1-1/2" X 1-1/2" X 1/8"	GASKET 11/16" HOLE	16	
6	WOOD WEDGE	LUMBER, SOFTWOOD NOMINAL 2" X 4"	4	4
7	QQ-S-781, CLASS 1, TYPE I OR IV, FINISH B	STRAPPING, STEEL, FLAT, .020 X 3/4"	AR	
8	QQ-S-781, CLASS 1, TYPE I OR IV FINISH A	STRAPPING, STEEL, FLAT, .020 X 3/4"		AR
9	NN-P-530	INSPECTION WINDOW COVER, PLY-WOOD	2	
10	MS35494-56	SCREWS	8	8
11	PPP-B-601, OVERSEAS TYPE, STYLE I (NOTE 1 AND 3)	BOX, PLYWOOD	1	
	PPP-B-601, DOMESTIC TYPE, STYLE I (NOTE 1 AND 3)	BOX, PLYWOOD		1
12	FRAMING	LUMBER, SOFTWOOD NOMINAL 1" X 2"	AR	AR
13	PPP-T-97	TAPE, PRESSURE SENSITIVE	AR	AR
14	PPP-F-320 TYPE SF OR CF, CLASS WEATHER-RESISTANT	FIBERBOARD, EDGE PROTECTORS	AR	AR
15	MMM-A-1617 TYPE II	ADHESIVE, RUBBER BASE, GENERAL PURPOSE	AR	AR

NOTES:
1. NO CONTENT WEIGHT REQUIRED WITHOUT BOTTOM.
2. TOP TO BE WITHOUT CLEATS, 1/2 INCH THICKNESS, AND SHALL COMPLETELY COVER ALL EDGES.
3. SIDES AND TOP TO BE WITHOUT CLEATS, 1/4 INCH THICKNESS.
4. ALL NAILS USED IN BLOCKING AND SUPPORT STRUCTURE TO BE CEMENT COATED OR MECHANICALLY DEFORMED.

X-4015

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

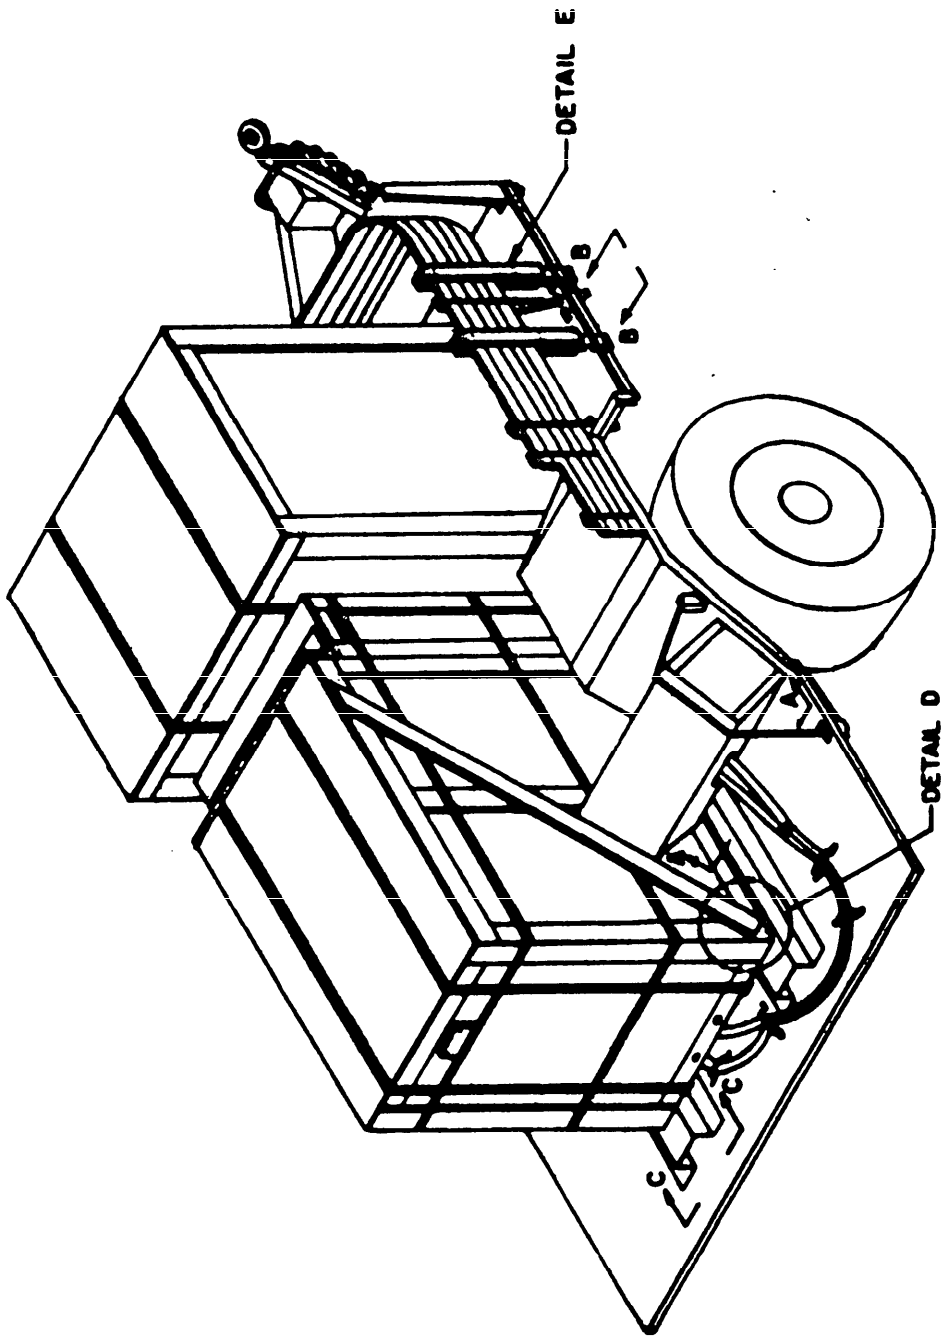

X-4012

FIGURE 1. Packing configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. TO PROVIDE ADEQUATE CLEARANCE, NO CLEATS SHALL BE APPLIED ON THE FORWARD FACE OF THE FORWARD GENERATOR BOX (1).
2. CORRUGATED PAPER (4) PLACED BETWEEN BOTTOM OF GENERATOR AND BARRIER MATERIAL (2).
3. FIBERBOARD PAD (3) PLACED BETWEEN BARRIER MATERIAL (2) AND WOOD WEDGE (6).
4. FIBERBOARD EDGE PROTECTORS (14) PLACED UNDER THE METAL STRAPPING (7) SECURING THE TOP BOWS.

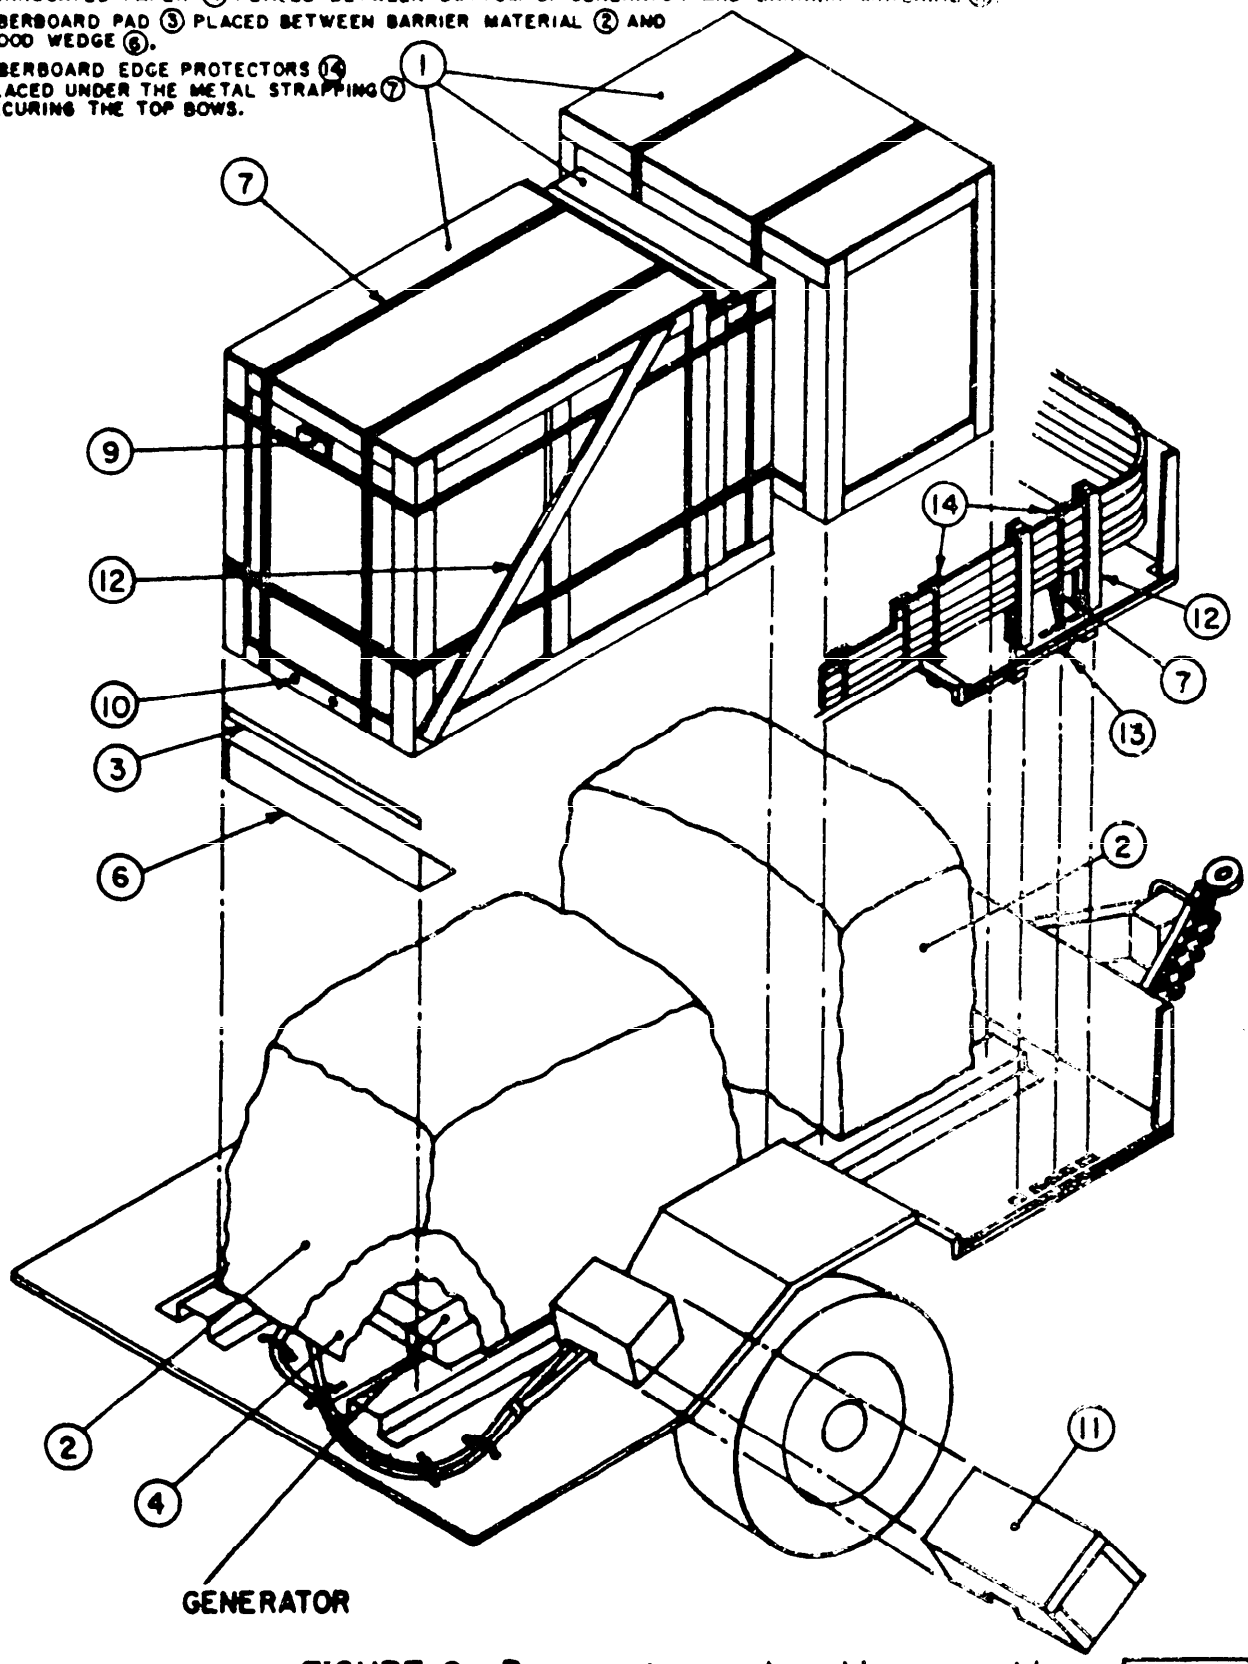


FIGURE 2. Preservation and packing assembly. X-4013

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

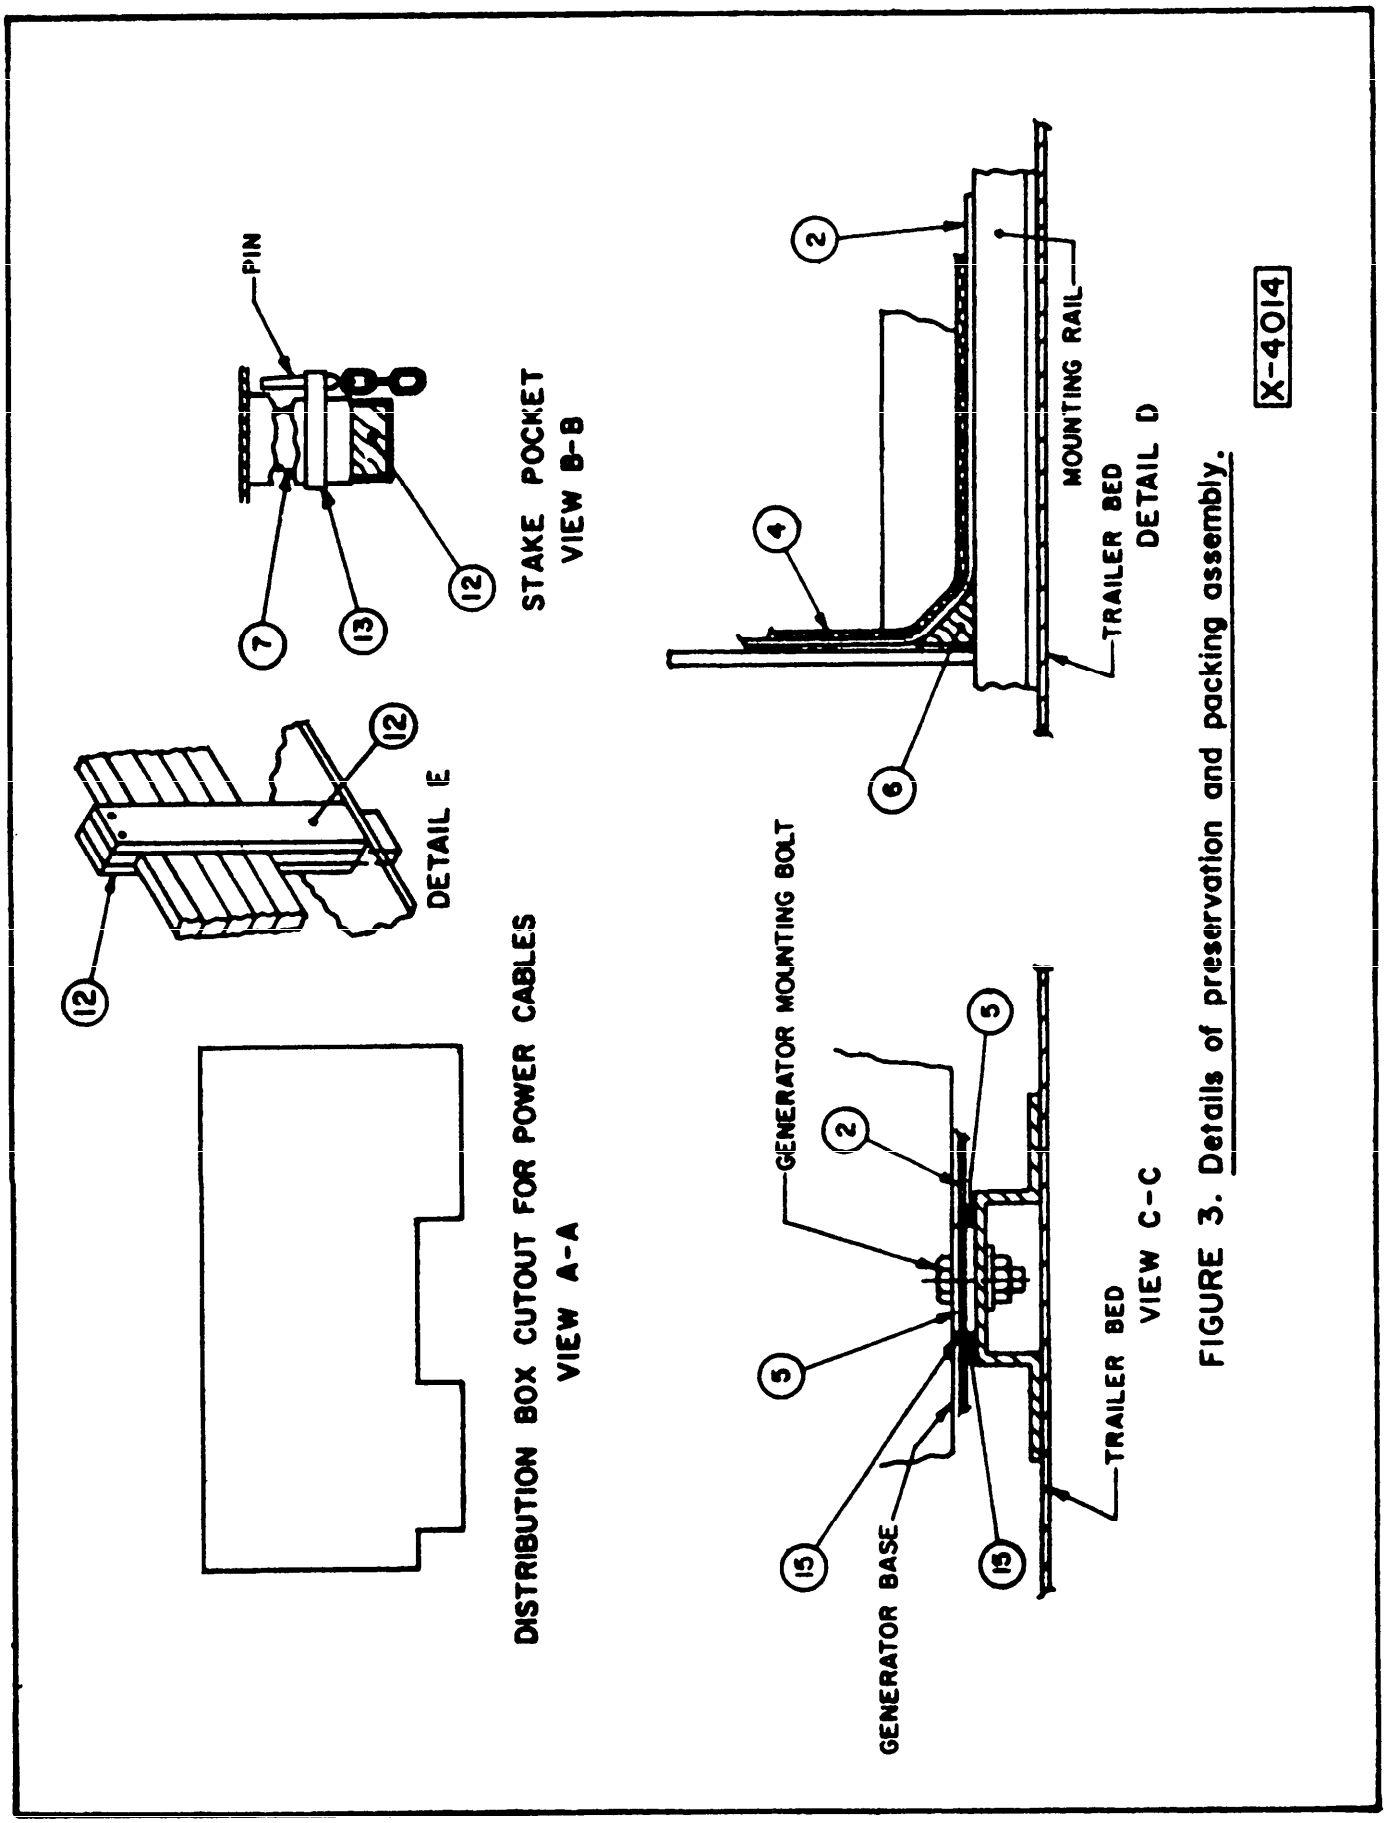


FIGURE 3. Details of preservation and packing assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-P-52897A(ME) Power Plant, Electric Diesel Engine, Trailer Mounted 10 KW, 60 Hertz, AN/MJQ-18

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Mobility Equipment R & D Command
Attn: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.