MILITARY SPECIFICATION

FOR

TRACTOR, WHEELED, WITH BACKHOE, LOADER, HYDRAULIC IMPACT TOOL AND HYDRAULIC EARTH AUGER ATTACHMENT, COMMERCIAL CONSTRUCTION EQUIPMENT (CCE)

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a commercial model, pneumatic-tired, two-wheel drive, diesel-engine-driven tractor with front end loader, rear mounted backhoe, and a hydraulic impact tool and earth auger.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-L-2105	- Lubricating Oil, Gear, Multipurpose.
MIL-M-7866	- Molybdenum Disulfide, Technical, Lubrication Grade.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-G-23827	- Grease, Aircraft and Instrument, Gear and Actuator Screw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-L-46167	- Lubricating Oil, Internal Combustion Engine, Arctic.
MIL-E-52798	- Enamel, Alkyd, Camouflage.

STANDARDS

MILITARY

MIL-STD-209	- Slinging and Tiedown Provisions For Lifting and Tying Down Military Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

TECHNICAL INFORMATION PACKAGE

(Application for copies should be addressed to US Army Mobility Equipment Research and Development Command ATTN: DRXFB-H, Fort Belvoir, VA 22060.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

INDUSTRIAL AND CONSTRUCTION EQUIPMENT DIVISION

ICED - A Dictionary of Terms and Definitions of Industrial Tractors and Construction Equipment.

(Application for copies should be addressed to the Industrial and Construction Equipment Division of the Farm and Industrial Equipment Institute, 410 North Michigan Avenue, Chicago, IL 60611.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF LABOR (DOL)

29 CFR 1926 - Occupational Safety & Health Administration Standards (OSHA).

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The tractor shall have two single nondriving, steerable front wheels; and two single, driving, nonsteerable rear wheels; pneumatic-tires; diesel-engine-drive; and shall be equipped with the following hydraulic operated attachments: A front end loader, a rear mounted backhoe, an impact tool and a earth auger. The term "tractor" throughout this specification, unless otherwise specified, shall be construed to mean a fully fueled and serviced tractor equipped with the attachments listed above. For definition of terms used herein, Industrial and Construction Equipment Division - Specification Definitions (ICED) or SAE shall apply. Backhoe and loader specifications shall be in accordance with ICED.

3.1.1 General. The tractor shall be equipped with all standard instruments, components, and accessories normally supplied and required for safe and effective operation of the tractor. The tractor shall be of the conventional design and heavy-duty construction to perform on unimproved terrain and various construction sites. The tractor shall be complete with all components that are standard with contractor's product, whether stipulated herein or not, together with such accessories as may be specified herein, to enable the tractor to function reliably and efficiently in sustained operations. The tractor shall be equipped with all other components and parts not specifically mentioned but necessary to provide a functional machine and shall conform in quality to that normally provided to the commercial industry. This tractor is to be employed worldwide and shall operate under all climatic conditions and at all altitudes where normally used by construction contractors. The tractor shall be the latest model of the standard commercial product of the contractor and shall have demonstrated industry acceptability by having been manufactured, marketed and sold in significant numbers to the commercial public; for the same or similar application, made up from the same or similar components, for at least 1 year prior to the invitation for bids or request for technical proposal; or, in the case of a recently introduced item, the contractor will submit sufficient valid industrial operational/test data to demonstrate the acceptability of the item. The introduction of normal product improvement changes in this 1 year period is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.2 First article (first-produced tractor). The contractor shall furnish, as specified (see 6.2), one tractor for examination and demonstration within the time frame specified (see 6.2) to prove prior to starting production that his production methods and choice of design detail will produce tractors that comply with the requirements of this specification. Examination and demonstration shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.2).

3.3 Production tractors. The Government will be notified of any change to the production tractor which results in a part number or configurational difference from the first article. The contracting officer may then terminate further delivery of the tractors to the Government, without penalty to the Government, when it is determined that such changes result in a tractor not conforming to this specification.

3.4 Standard and optional components and assemblies. Unless otherwise specified herein, standard or optional items, as listed in the contractor's published brochures and catalogs, shall be furnished to meet the requirements specified herein. When specific requirements are not specified herein, all items listed as standard equipment, or normally furnished as standard equipment, shall be provided.

3.5 Environmental conditions. The tractors shall be equipped with all standard and optional equipment required to enable it to start and operate normally at full capacity in temperatures ranging from minus 25° F to plus 110° F and to be stored for extended periods in temperatures ranging from minus 30° F to plus 160° F without damage. Cold start aids must be integral with the tractor and no aids may be used which rely upon external support such as electrical power source. Hand-operated aerosol cans are not permitted.

3.5.1 Winterization kit. When specified (see 6.2), a winterization kit shall be provided that can be installed on the tractor to permit operation of the tractor in an ambient temperature of minus 50° F and storage in an ambient temperature of minus 65° F. The kit shall include an insulated sound-suppressed ROPS/FOPS cab, hot water personnel heater, defrosting system, front and rear wipers, radiator winterfront, engine enclosures, battery heater as required, electric standby engine heater(s), tubes in all tires, adequate lighting for safe night operation, human factors engineering to permit safe and efficient operation by an operator wearing protective clothing. All necessary mounting hardware

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

shall be included in the kit. If required, heaters for the transmission, axle assembly, and hydraulic system shall be furnished. The personnel heater and defrosting system shall be of such capacity that the following criteria can be met when the tractor has been soaked and stabilized at minus 50° F:

(a) Engine start within 5 minutes after preheating for not more than 4 hours.
(b) Capable of maintaining an inside cab temperature of plus 50° F.
(c) Clear within 1 hour after engine start and maintain defrosting of 75 percent of all glassed areas.

3.6 Safety. The tractor shall conform to all Federal laws and regulations governing safety, air-pollution, and other health and safety requirements which are in effect relative to this type of equipment and its intended usage at the time of manufacture. Exhaust discharges from the tractor shall be directed so that they do not endanger personnel or unnecessarily obstruct the view of the operator. When available as standard or optional equipment, all rotating or reciprocating parts and other parts subject to high operational temperatures that are of such a nature or are so located as to be or become a hazard to the operating or maintenance personnel, shall be substantially guarded or insulated to the extent necessary to eliminate the hazard.

3.6.1 Reverse signal alarm. A reverse signal alarm in accordance with SAE J994 shall be provided. This alarm shall be distinguishable from all other noise levels of the tractor.

3.6.2 Noise limits. The noise level shall meet the requirements of OSHA Laws and Regulations in effect at date of manufacture when tested in accordance with SAE J919. If the noise level in the area occupied by the operator (excluding the horn and reverse signal alarm) exceeds 85 dB(A) when measured in accordance with SAE J919, a warning plate containing the following shall be permanently affixed to the tractor in a conspicuous protected location in the operator's compartment:

"CAUTION: HEARING PROTECTION REQUIRED WHEN THIS TRACTOR IS OPERATING"

The plate shall have a yellow background with black lettering and shall be of corrosion-resistant material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.6.3 Rollover Protective Structure (ROPS) and Falling Objects Protective Structure (FOPS). A removable rollover protective structure (ROPS) and falling objects protective structure (FOPS), conforming to SAE J394 or J104D and SAE J231, respectively, shall be furnished. A single structure meeting this combined ROPS and FOPS requirement is acceptable. A seatbelt conforming to SAE J386 shall be properly installed for use by the operator.

3.6.4 Horn. A hand or foot-operated horn shall be provided.

3.6.5 Heavy wire screening. The tractor shall be provided with heavy wire screening or other safety device so that the backhoe controls cannot be operated from other than the operator's seat. A 6-foot tall operator standing on the ground adjacent to either side of the backhoe swing pivot point shall be unable to operate the backhoe controls.

3.7 Physical characteristics.

3.7.1 Dimensions. The overall width of the tractor shall not exceed 96 inches. The reducible height with the backhoe and ROPS removed shall not exceed 91 inches.

3.7.2 Operating weight. The operating weight of the tractor shall be not more than 15,000 pounds and not less than 13,500 pounds. This weight shall not include the ROPS/FOPS, hydraulic impact tool, and hydraulic earth auger.

3.8 Buckets.

3.8.1 Loader bucket. The loader shall be equipped with a bucket of not less than 1-1/8 and not greater than 1-1/4 cubic yard capacity (SAE nominal heaped rating).

3.8.2 Backhoe bucket. The backhoe shall be equipped with a 24-inch segmented (2 in 1 - Jaw), heavy-duty, rock type bucket rated at a minimum heaped capacity of 7 cubic feet with a minimum opening width of 40 inches and a minimum clamping force of 4,000 pounds. Wherever the bucket teeth can make contact with the dipper, a striker plate shall be provided which will adequately protect the basic dipper structural members. The backhoe bucket shall be equipped with not less than four replaceable (pin retained) teeth.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:11Z
Check the source to verify that this is the current version before use.

3.9 Performance.

3.9.1 Loader performance.

3.9.1.1 Loader dump height clearance. The loader, when equipped with the bucket specified herein, shall have a minimum dump height clearance of 8 feet 2 inches at full height and at a 40 degree discharge dump angle when measured in accordance with ICED.

3.9.1.2 Loader reach. The loader when equipped with the bucket specified herein, shall have a reach of not less than 30 inches at maximum dump height and 40 degree discharge dump angle when measured in accordance with ICED. Maximum dump height is when the bucket hinge pin is at maximum height.

3.9.1.3 Loader lifting capacity. The loader shall have a lifting capacity to full height of not less than 4,500 pounds in accordance with ICED.

3.9.1.4 Loader breakout force. The loader shall have a breakout force of not less than 7,500 pounds in accordance with ICED.

3.9.1.5 Loader raising time. The raising time of the loader bucket shall not exceed 6 seconds in accordance with ICED.

3.9.1.6 Loader lowering time. The lowering time of the loader bucket shall not exceed 4.5 seconds in accordance with ICED.

3.9.1.7 Operational loader. The loader shall have the capability of: (1) Loading soil from a stockpile to a dump truck having a sideboard height of not less than 92 inches above ground level at a rate of not less than 75 bucket loads per hour. The bucket load per cycle shall not be less than 90 percent of the nominal heaped capacity of the bucket. (2) Loading soil from a stockpile and moving the soil a distance of not less than 75 feet at a rate of not less than 45 cycles per hour. The bucket load per cycle shall be not less than 90 percent of the nominal heaped capacity of the bucket. A cycle shall consist of loading from a stockpile, carrying the load in a forward gear the 75-foot distance, dumping, and returning empty to the stockpile.

3.9.2 Backhoe performance.

3.9.2.1 Backhoe digging depth. The backhoe shall have a maximum digging depth of not less than 15 feet when measured in accordance with ICED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

3.9.2.2 Backhoe loading height. The backhoe shall have a maximum loading height of not less than 115 inches when measured in accordance with ICED.

3.9.2.3 Backhoe digging force. Using the backhoe bucket cylinder, the digging force shall be not less than 10,500 pounds in accordance with ICED. Using the backhoe dipper cylinder, the digging force shall be not less than 6,500 pounds in accordance with ICED.

3.9.2.4 Backhoe lifting capacity. The lifting capacity at the backhoe loading height using the dipper stick cylinder and holding the boom cylinder shall be not less than 2,900 pounds in accordance with ICED.

3.9.2.5 Operational backhoe. The backhoe, using the bucket specified herein, shall be capable of excavating trenches to a depth of 15 feet.

3.10 Engine. The tractor shall be powered by a standard commercially supplied diesel engine with a net flywheel horsepower of 60 or greater at the SAE standard ambient conditions (referenced SAE J816). A muffler shall be furnished. The exhaust stack shall have a rain cap or be otherwise fabricated and mounted to prevent the entry of rain or snow. The coding system shall have the maximum capacity offered as standard equipment. The engine shall be the same engine that has been used in the contractor's standard commercial tractor of the same size for at least 1 year. The engine shall be of USA manufacture.

3.11 Transmission. The tractor shall be equipped with a constant mesh or synchromesh transmission having a full power hydraulic reversing clutch or shall be equipped with a closed loop, servo controlled hydrostatic transmission. The transmission shall provide not less than four forward speeds and not less than four reverse speeds; or when a hydrostatic transmission is provided, forward and reverse speeds shall be infinitely variable.

3.11.1 Travel speed. With the transmission furnished in 3.11, the tractor shall be capable of attaining forward speeds up to 17 mph on level pavement.

3.12 Steering. Hydraulic-power front wheel steering shall be provided.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

3.13 Brakes. The tractor shall be equipped with brakes on the two driving wheels which will operate simultaneously to control and safely stop the tractor under all operating conditions. The brakes shall conform to SAE J237.

3.14 Fuel capacity. The tractor shall be capable of sustained operation under conditions of maximum horsepower utilization for not less than 4 hours without refueling.

3.15 Tires. The front tires shall be the tires having the highest maximum tire load limit offered either as standard or optional equipment by the manufacturer for use with the loader bucket furnished. The rear tire size shall be not less than 16.9 x 24, shall have a ply rating of not less than 8 ply, and the tread type shall be R-4. Front or rear tire ballast is not acceptable and shall not be provided.

3.16 Front and rear axle. The front and rear axle assemblies shall be the standard commercial axles normally furnished with this size tractor.

3.17 Air cleaner. The engine shall be equipped with a dry type air cleaner and air restriction indicator.

3.18 Instruments, controls, and protection equipment. The following instruments, controls, and protection equipment shall be provided:

(a) Engine lubricating oil pressure gage, or engine oil low pressure warning light, or both.
(b) Ammeter or voltmeter, or alternator warning light, or both.
(c) Tachometer.
(d) Primary and secondary fuel filters.
(e) Suction line transmission filter or strainer.
(f) Hand throttle (tractor/backhoe operation).
(g) Hand-operated parking brake.
(h) Hydraulically damped backhoe boom swing stop.
(i) Antivandalism protection which shall include an instrument panel lock or cover.

3.19 Electrical system. The tractor shall be equipped with an electrical system including the following components:

(a) Directional signals.
(b) Flashing highway warning lights.
(c) Electric horn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.19.1 Lighting system. The tractor shall be capable of operating during the hours of darkness using the tractor mounted lighting system. Front working lights or front travel lights, rear working lights, tail lights, and stop (brake) lights shall be provided as the minimum to meet this requirement.

3.20 Counterweight. A counterweight is acceptable on the tractor, provided it is normally furnished on the standard tractor produced by the contractor. A counterweight offered as an option in the commercial market is not acceptable.

3.21 Tiedown provisions. The tractor shall be equipped with tiedown provisions to the extent available as standard or optional commercial equipment for worldwide transport by highway trailers, rail, ocean going carriers, and C-130, C-141, C-5A aircraft with minimum disassembly. Complete diagrams and instructions for tying down the tractor for the various transport modes above shall be provided and shall be included in the operator's manual. The instructions shall include instructions for component removal when required for transport. Instruction plate(s) or decal(s) containing diagrams and instructions for use of the tiedown provisions shall be permanently affixed to the tractor. Stencil or decal markings shall be applied to the tractor at each tiedown point. The tiedown procedure shall permit tiedown of the tractor to the floor (or deck) of the transport medium in such a manner as to prevent shifting or movement in any direction.

3.21.1 Slinging provisions. Slinging provisions in accordance with MIL-STD-209 shall be provided to enable the tractor with Roll-Over-Protective-Structure (ROPS) to be airlifted in its normal travel position by helicopter. Complete diagrams and instructions for lifting the tractor by the slinging provisions shall be provided and shall be included in the operator's manual. The instructions shall include instructions for component removal when required. Instruction plate(s) or decal(s) containing diagram(s) and instructions for use of the slinging provisions shall be permanently affixed to the tractor. Stencil or decal markings shall be applied to the tractor at each slinging point.

3.22 Toolbox. A suitable lockable storage compartment(s) of sufficient size to hold all tools required in 3.32 and technical publications required in 3.33 shall be provided on each tractor. The storage compartment(s) shall be permanently attached to the tractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.23 Hydraulic impact tool and earth auger.

3.23.1 Hydraulic impact tool. The hydraulic impact tool shall mount directly to the backhoe (2 in 1 - Jaw) bucket by means of an adaptor (Jaw Hitch) permitting the bucket to clamp-on and secure it in place. The impact tool shall be capable of delivering 1000 blows per minute and 125 foot-pounds of energy per blow to top of marking tool. The hydraulic pump used to operate the backhoe shall also be the hydraulic source to the impact tool, and shall be of sufficient capacity to operate the impact tool at the above specified performance level. The impact tool shall be capable of breaking concrete and rock, cutting asphalt, compacting backfill, and driving posts. To accomplish the above tasks, the following working tools shall be furnished with each impact tool:

(a) One each - 30 degree breaker for general rock and concrete breaking. The minimum cutting edge width shall be not less than 2-1/4 inches.
(b) One each - asphalt cutter to cut asphalt to a predetermined line. The minimum cutting edge width shall be not less than 12 inches.
(c) One each - relieved moil for concrete and hard rock breaking.
(d) One each - tamper for backfill compaction. The contact surface area shall be not less than 280 square inches.
(e) One each - post driver for horizontal and vertical post driving. This tool shall be large enough to drive a 4 inch diameter post.

3.23.2 Hydraulic earth auger. The earth auger shall mount directly to the backhoe (2 in 1 - Jaw) bucket by means of an adaptor (Jaw Hitch) permitting the bucket to clamp-on and secure it in place. The earth auger shall drill a 10-inch diameter hole 72 inches in depth. The auger shall have replaceable, hardened steel cutting edges with replaceable teeth. The auger point shall be forged from alloy steel and heat treated for long wear. In order to prevent breaking the auger bit when a solid object is hit, a shear bolt or pin in the drive spindle shall be provided. The hydraulic pump used to operate the backhoe shall also be the hydraulic source to the earth auger, and shall be of sufficient capacity to operate the earth auger effectively in all types of soil conditions.

3.24 Hydraulic system. The hydraulic system on the tractor shall be the contractor's commercial system and shall provide sufficient force and means for operating the loader, backhoe with the 2 in 1 - Jaw bucket,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

impact tool and earth auger. The hydraulic system shall be capable of delivering 23 gpm at 1800 psi to operate both the impact tool and earth auger. The hydraulics, including valving, hoses, and other components necessary to affect compatibility with the impact tool and earth auger shall be permanently mounted to the tractor prior to delivery. The hydraulic lines needed to affect compatibility shall have quick-disconnect couplings at the backhoe bucket location. Hydraulic hose(s) shall be routed in such a manner as to prevent chafing or rubbing against tractor components which could cause premature failure.

3.25 Transportability. The tractor shall be capable of being transported by highway trailers, rail, ocean going carriers, and air transported by C-130, C-141, and C-5A aircraft, and airlifted as an external load by helicopter. Removal of any components to meet the air transportable requirement shall be clearly defined in the instructions as required in 3.21 and 3.21.1. Cargo envelopes for the C-130, C-141, and C-5A aircraft are shown in Figures 1, 2, and 3 respectively. The contractor shall provide sufficient data to the Government to confirm that the tractor being supplied can be loaded and transported in the C-130, C-141, and C-5A aircraft.


3.26 Lubricants. The tractors shall be assembled, serviced, and delivered with the following approved military lubricants:


Engine: MIL-L-2104 or MIL-L-46167.
Transmission: MIL-L-2104 or MIL-L-46167.
Hydraulic System: MIL-L-2104 or MIL-L-46167.
Final drive or rear axle: MIL-L-2104, MIL-L-2105, or MIL-L-46167.
Grease lubrication points: MIL-M-7866, MIL-G-10924, or MIL-G-23827.

Lubricants not specified shall be standard commercial lubricants.

3.26.1 Special lubricants. Special lubricants required by the manufacturers to operate the hydraulic impact tool or hydraulic earth auger shall be overpacked with each tractor. A 3-month supply for continuous operation (8 hours per working day) shall be furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

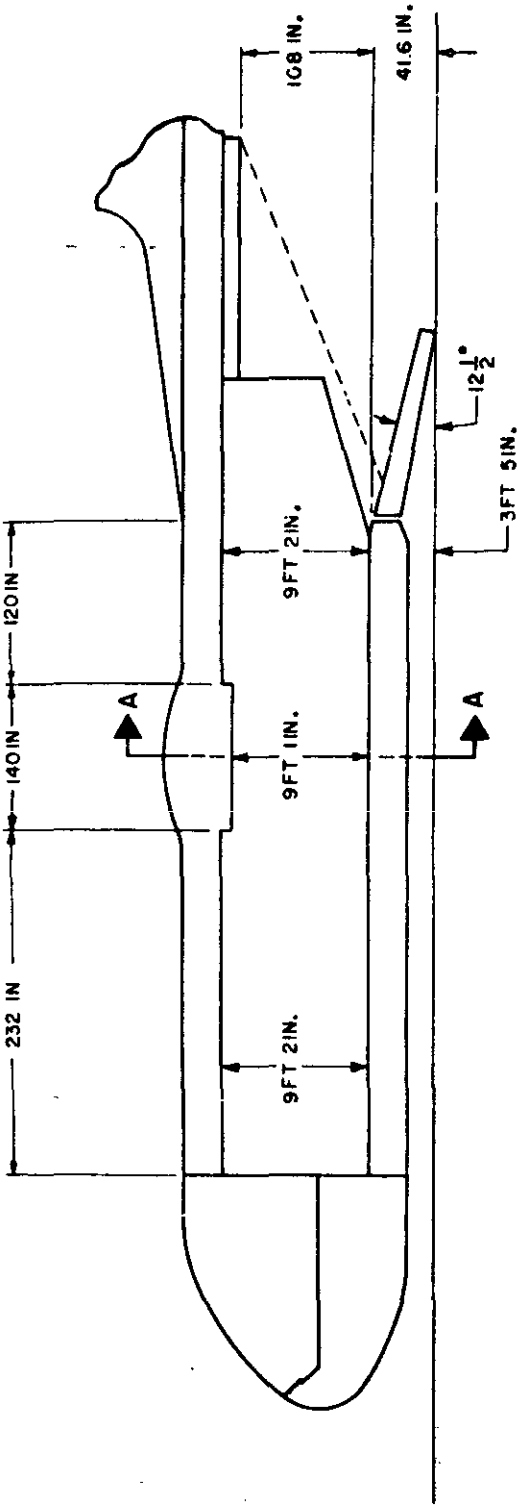

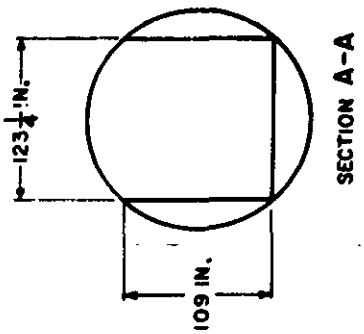


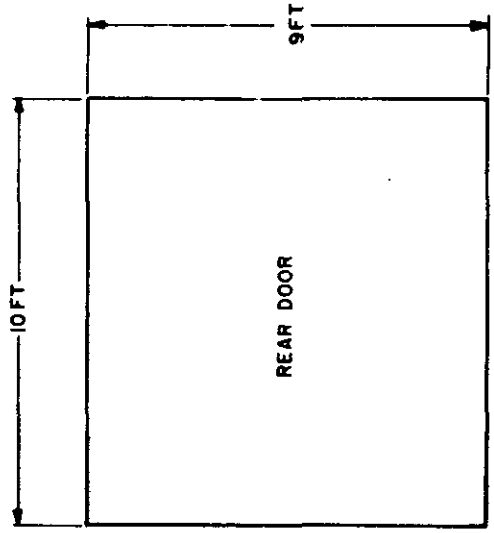


FIGURE 1. CARGO COMPARTMENT PROFILE (C-130) X-195

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

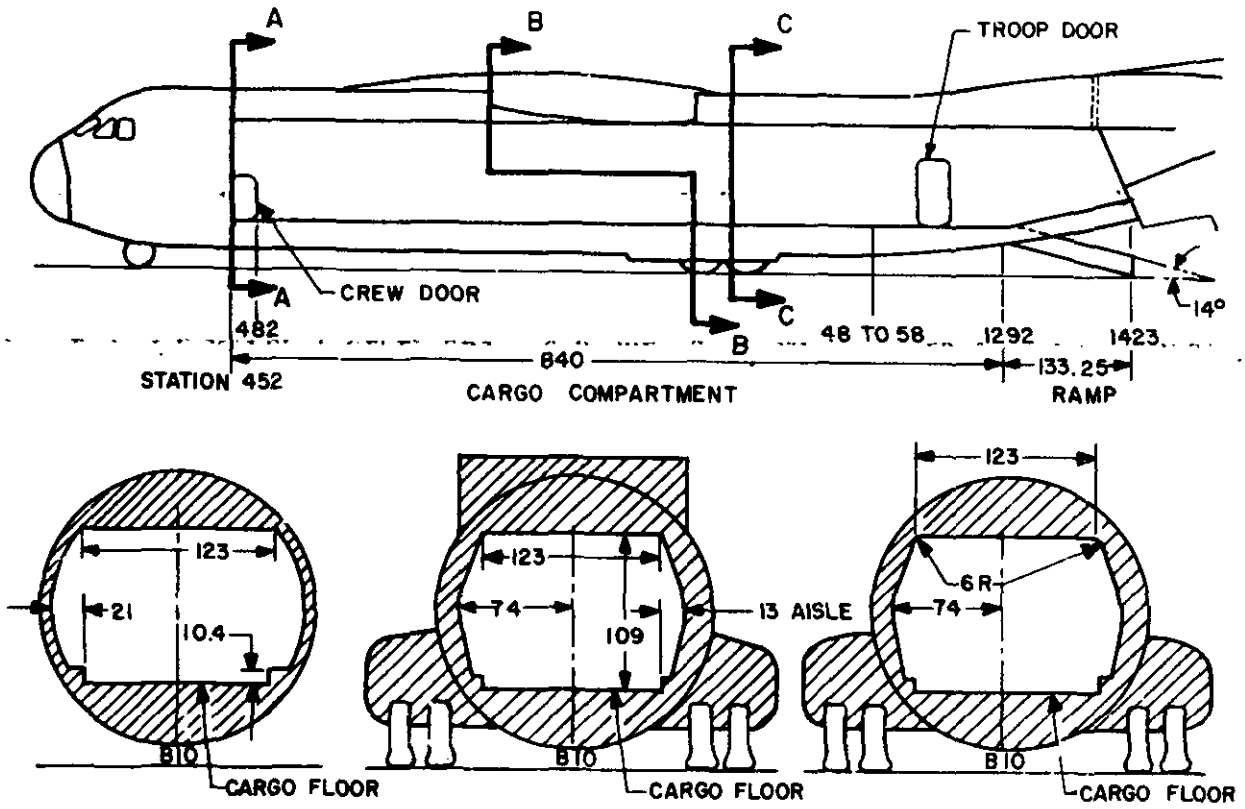

TYPICAL FROM STA 452.10 1108 EXCEPT AS NOTED — SECTION A-A

TYPICAL AT STA 734.7 AND 958 — SECTION B-B

TYPICAL AT STA 598 AND 1058 — SECTION C-C

CARGO COMPARTMENT DIMENSIONS AND CONTOURS C-141 AIRCRAFT

MAIN LOADING DOOR:
WIDTH - 123 (APPROXIMATELY)
HEIGHT- 109 (APPROXIMATELY)


NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. THE HEIGHT AND WIDTH OF THE COMPARTMENT ARE REDUCED 2 INCHES ACROSS THE UPPER OUTSIDE CORNERS OF THE COMPARTMENT AT FUS STA 1198 AND 1238 BY THE TROOP DOOR TRACKS
3. WHEN THE ROLLER CONVEYORS ARE TURNED UPRIGHT, USABLE HEIGHT WILL BE REDUCED 1.5 INCHES

FIGURE 2. C-141 Cargo envelope. X-3170

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

FORWARD CARGO OPENING C-5A
FORWARD KNEEL POSITION

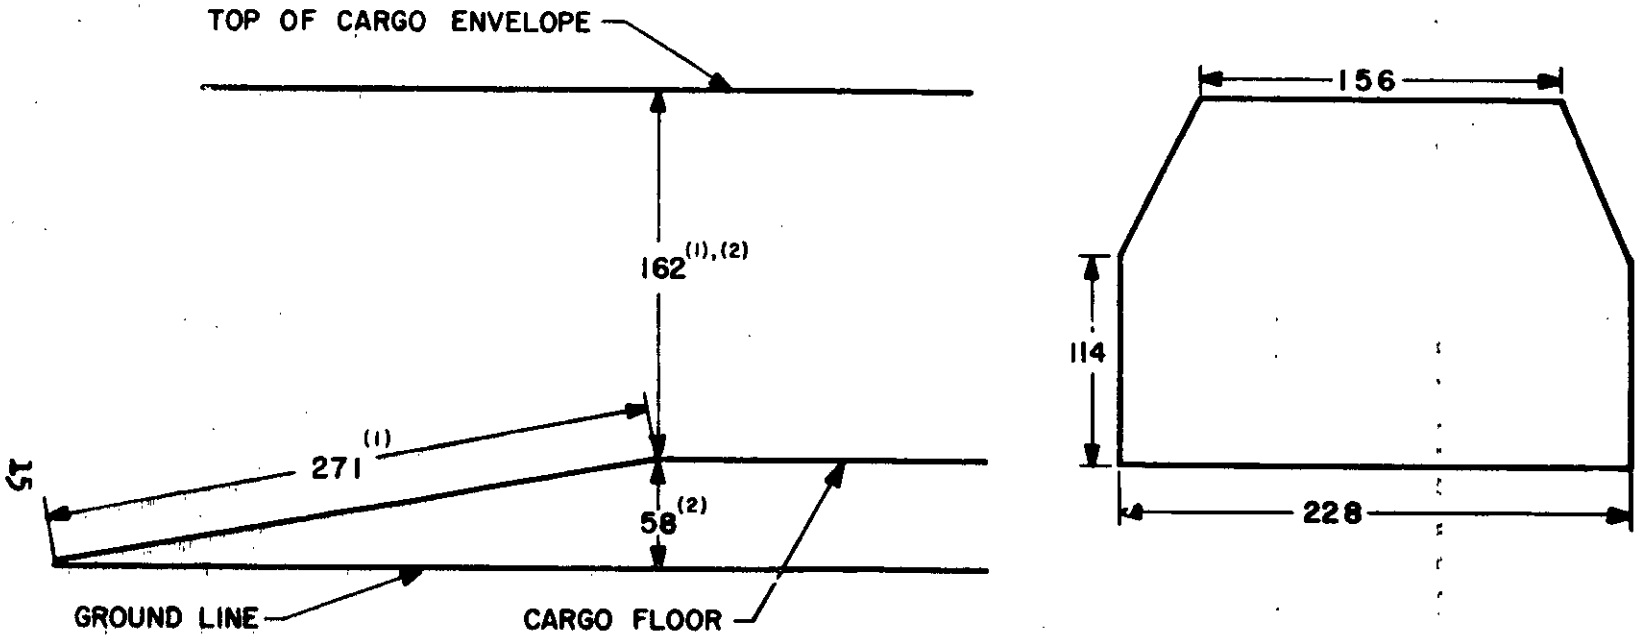

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCE: AMCP 706-130, ENGINEERING DESIGN HANDBOOK, DECEMBER 1967.
3. REFERENCE: USATECOM PROJECT NO 4-ES-065-050-004, SERVICE TEST OF C-5A AIRCRAFT, FIRST PARTIAL REPORT BY H.H JOHNSON, JR., CPT., JANUARY 1971.

FIGURE 3. C-5A. cargo envelope.

X-3171A

MIL-F-5300(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:11Z
Check the source to verify that this is the current version before use.

3.27 Treatment and painting. The portions of the tractor normally painted shall be cleaned, treated, primed, and painted in accordance with the contractor's standard commercial practice. The finishing coat shall be in accordance with MIL-E-52798, forest green color.

3.28 Identification plate(s). The tractor shall be furnished with an identification metal plate showing the manufacturer, model number, NSN, serial number, date of manufacture, and date of delivery. The identification plate shall be permanently affixed to the tractor in a readily accessible and conspicuous location. Instruction and warning plates or decals normally furnished to the commercial market shall be mounted on the tractor.

3.29 Stenciling. The Army registration number, operating weight, and center of gravity of the tractor shall be stenciled on both sides of the tractor in such a manner as to be readily identifiable. Tire pressure shall be stenciled on the tractor adjacent to each tire. The numbers and letters shall be Gothic capitals (black in color) and shall be not less than 2 inches high.

3.30 Deprocessing. Should deprocessing of the tractor, or any component or system, or drive assembly be required upon receipt of the tractor at its final destination, the contractor shall furnish complete deprocessing instructions. The instructions shall be conspicuously affixed to the tractor or the operator's platform.

3.31 Vehicle classification data sheet. The contractor shall complete and submit the vehicle classification data sheet (see Appendix) within the time frame specified (see 6.2 and 6.3). The contractor shall apply the Government-furnished weight classification number(s) to the tractor as requested (see 6.2 and 6.3).

3.32 Tools. Unless otherwise specified in the contract, any non-standard tools required for equipment operation and operators maintenance of the tractor shall be furnished. Any other specialized maintenance tools as equipment required to service the tractor shall be provided. These tools shall be inserted in the toolbox.

3.33 Technical publications. Unless otherwise specified in the contract, two sets of the following commercial manual(s) shall be furnished with the tractor after being approved by the Government (see 6.2):

(a) Operator, maintenance, parts, and overhaul manuals on the tractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

(b) Lubrication instructions if not included in (a) above on the tractor.
(c) Manuals on the backhoe bucket (2 in 1 - Jaw), hydraulic impact tool, and hydraulic earth auger. Copy of warranty for tractor, components, and attachment(s).
(d) When a winterization kit is required, winterization manual(s) shall be provided which will include: Operation of all components of the winterization kit; starting and operational aids required for extreme cold operation; care of the tractor during overnight and prolonged storage; maintenance instructions; lubrication instructions and lubrication orders; parts list; installation and removal instructions of kit components; effects of extreme cold on the tractor and the instructions to follow to minimize these effects; starting procedures, warmup procedures, and operation procedures (exercising tractor prior to full load operation); and instructions for de-winterizing the tractor for summer operation.

3.34 Basic issue items. Unless otherwise specified, each item on the Basic Issue Item List shall be furnished with the tractor (see 6.2).

3.35 Government-furnished property (GFP). The following items shall be furnished by the Government (see 6.4):

(a) Containers complete with logbook binders and forms. (The tractor contractor shall furnish the fasteners and shall install the container on the tractor).
(b) User Maintenance Support Plan.
(c) Vehicle Weight Classification Sign Kit.

3.36 Technical Information Package. The contractor shall complete and submit a Technical Information Package within the time frame specified (see 6.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. All inspections shall have Government representatives in attendance. Except as otherwise specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.6).

4.3 First article inspection. Prior to the examination and demonstration of the tractor, the following shall be performed:

(a) Service the tractor with the lubricants specified in 3.26 of grades required for ambient temperature at demonstration site.
(b) Limber up the tractor as prescribed by the contractor.

4.4 Examination and demonstration conditions.

(a) The contractor shall furnish the first article tractor within the time frame specified (see 6.2).
(b) Unless otherwise specified in the contract, the contractor shall complete and submit a demonstration report on the demonstrations and certifications required in 4.5.2.1 to 4.5.2.25 and 4.5.3 within the time frame specified (see 6.2).
(c) All examinations and demonstrations contained herein shall have Government representatives in attendance.

4.5 First article examination, demonstration, and certification.

4.5.1 First article examination. Prior to the first article demonstrations, the tractor shall be examined for the defects marked "X" in Column 1 of Table I. Prior to the first article demonstrations the tractor shall be examined and compared with the contractor's published brochures or literature and the contractor's completed Technical Information Package (see 3.36) to verify conformance. Presence of one or more defects, nonconformance to the contractor's published brochures or literature, nonconformance to the completed Technical Information Package shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE I. Examination Schedule

First Article	Individual	Defect	Requirement Paragraph
1	2	3	4
X	X	101. All standard components for the tractor not furnished.	3.1.1, 3.4
X	-	102. First article tractor not furnished or not as specified.	3.2
-	X	103. Production tractors not as specified.	3.3
X	X	104. Tractor not furnished with equipment to enable tractor to be stored for extended periods at temperature from -30 ° F to 160 ° F.	3.5
-	X	105. Winterization kit not furnished or tractor not furnished with equipment to enable tractor to be stored at an ambient temperature of -65° F.	3.5.1
X	X	106. Safety characteristics not furnished or not as specified.	3.6
X	X	107. Reverse signal alarm not as specified.	3.6.1
X	X	108. Warning plate not furnished or not as specified if noise limits are exceeded.	3.6.2
X	X	109. ROPS and FOPS not furnished.	3.6.3
X	X	110. Seat belt not as specified.	3.6.3
X	X	111. Horn not as specified.	3.6.4
X	X	112. Heavy wire screening not as specified.	3.6.5
X	X	113. Hydraulic front loader with bucket not as specified.	3.8, 3.8.1
X	X	114. Hydraulic rear mounted backhoe with bucket not as specified.	3.8, 3.8.2

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE I. Examination Schedule (Cont'd)

1	2	3	4
X	X	115. Striker plate not furnished.	3.8.2
X	X	116. Engine, muffler, and exhaust stack not furnished or not as specified.	3.10
X	X	117. Transmission not as specified.	3.11
X	X	118. Steering not as specified.	3.12
X	X	119. Brakes not as specified.	3.13
X	X	120. Tires not as specified.	3.15
X	X	121. Front and rear axle not as specified.	3.16
X	X	122. Air cleaners not as specified.	3.17
X	X	123. Instruments, controls, and protection equipment not furnished or not as specified.	3.18
X	X	124. Electrical system not as specified.	3.19
X	X	125. Lighting system not as specified.	3.19.1
X	X	126. Counterweight not as specified.	3.20
X	X	127. Slinging provisions not furnished.	3.21.1
X	X	128. Diagrams and instructions for slinging and tying down tractor not as specified.	3.21, 3.21.1
X	X	129. Instruction plate(s) or decal(s) or stencil markings not as specified.	3.21, 3.21.1
X	X	130. Toolbox not as specified.	3.22
X	X	131. Hydraulic impact tool not as specified.	3.23, 3.23.1
X	X	132. Hydraulic earth auger not as specified.	3.23.2
X	X	133. Hydraulic system not as specified.	3.24
X	X	134. Transportability instructions not as specified.	3.25
X	X	135. Lubricants not as specified.	3.26
X	X	136. Special lubricants (if required by manufacturers) not furnished.	3.26.1

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE I. Examination Schedule (Cont'd)

1	2	3	4
X	X	137. Treatment and painting not as specified.	3.27
X	X	138. Identification plates and marking not as specified.	3.28
X	X	139. Stenciling not as specified.	3.29
X	X	140. Deprocessing instructions (if applicable) not furnished.	3.30, 5.1
X	X	141. Weight classification number(s) not installed on tractors.	3.31
X	X	142. Tools (if applicable) not furnished.	3.32
X	X	143. Technical publications not as specified.	3.33
X	X	144. Basic issue items not furnished.	3.34
X	X	145. Government-furnished containers not installed on tractor.	3.35
X	-	146. Technical Information Package not as specified.	3.36
X	X	147. Parts or components missing.	Section 3
X	X	148. Assembly incomplete or incorrect.	Section 3
X	X	149. Cracked or broken parts or assemblies.	Section 3
X	X	150. Permanent deformation of any part or assembly.	Section 3
X	X	151. Leaks in coolant, fuel, oil lines, or cylinders.	Section 3
X	X	152. Material not of same quality as used on first article tractor.	Section 3

4.5.2 First article demonstrations. Upon sucessful completion of the examination specified in 4.3.1, the first article tractor shall be subjected to the demonstrations marked "X" in Column 1 of Table II. Failure of any demonstrations, evidence of any deficiency, need for adjustment or maintenance, malfunction of any control or component, any permanent deformation, or damage to any tractor system shall be cause for rejection. The order in which the demonstrations are performed is optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE II. Demonstration Schedule.

First article	Individual	Demonstration	Demonstration Paragraph	Requirement Paragraph
1	2	3	4	5
X	-	201. Environmental conditions (-25° F to 110° F).	4.5.2.1	3.5
X	-	202. Winterization kit (-50° F operation).	4.5.2.2	3.5.1
X	-	203. Noise limits.	4.5.2.3	3.6.2
X	-	204. ROPS and FOPS.	4.5.2.4	3.6.3
X	-	205. Dimensions.	4.5.2.5	3.7.1
X	-	206. Operating weight.	4.5.2.6	3.7.2
X	-	207. Loader bucket capacity.	4.5.2.7	3.8.1
X	-	208. Backhoe bucket capacity.	4.5.2.8	3.8.2
X	-	209. Loader dump height clearance.	4.5.2.9	3.9.1.1
X	-	210. Loader reach.	4.5.2.10	3.9.1.2
X	-	211. Loader lifting capacity.	4.5.2.11	3.9.1.3
X	-	212. Loader breakout force.	4.5.2.12	3.9.1.4
X	-	213. Loader raising time.	4.5.2.13	3.9.1.5
X	-	214. Loader lowering time.	4.5.2.14	3.9.1.6
X	-	215. Operational loader.	4.5.2.15	3.9.1.7
X	-	216. Backhoe digging depth.	4.5.2.16	3.9.2.1
X	-	217. Backhoe loading height.	4.5.2.17	3.9.2.2
X	-	218. Backhoe digging force.	4.5.2.18	3.9.2.3
X	-	219. Backhoe lifting capacity	4.5.2.19	3.9.2.4
X	-	220. Operational backhoe.	4.5.2.20	3.9.2.5
X	-	221. Travel speed.	4.5.2.21	3.11, 3.11.1
X	-	222. Fuel capacity.	4.5.2.22	3.14
X	-	223. Slinging provisions.	4.5.2.23	3.21.1
X	-	224. Hydraulic impact tool.	4.5.2.24	3.23, 3.23.1
X	-	225. Hydraulic earth auger.	4.5.2.25	3.23, 3.23.2
-	X	226. Individual run-in.	4.6.3, 4.6.3.1	Section 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.2.1 Environmental conditions. The tractor shall be serviced and lubricated with the lubricants specified in 3.26 of grades required at an ambient temperature of minus 25° F. Inability of the tractor to perform as indicated below or as specified in 3.5 shall constitute failure of this demonstration. The tractor shall be demonstrated as follows:

(a) Obtain a stabilized temperature of minus 25° F in radiator top tank, center cell of each battery, and all lubricant and hydraulic reservoirs.
(b) Using the cold start aid furnished (if applicable), the tractor engine shall start and run smoothly within 2 minutes of first cranking.
(c) All loader, backhoe, and stabilizer controls shall be operational.
(d) Engage transmission and move tractor forward and reverse as space permits.
(e) Operate brakes through "off" and "on" positions.

The above demonstration shall be repeated at plus 110° F with grades of lubricant required at this temperature.

4.5.2.2 Winterization kit. When specified (see 6.2) a winterization kit shall be installed on a production tractor that has been serviced and lubricated in accordance with the winterization manual(s) (see 3.33). Inability of the winterized tractor to perform as indicated below or as specified in 3.5.1 shall constitute failure of this demonstration. The tractor shall be demonstrated as follows:

(a) Obtain a stabilized temperature of minus 50° F in radiator top tank, center cell of each battery, all lubricant and hydraulic reservoirs, and 6 inches above floor of cab. Also stabilize to minus 50° F with brakes actuated.
(b) Preheat tractor engine by electric standby engine heater for not more than 4 hours.
(c) Using required starting aids, the tractor engine shall start and run smoothly within 5 minutes of first cranking.
(d) Within 1 hour after engine start personnel heater shall have raised cab temperature to 50° F. Demonstrate ability to control this temperature utilizing heater controls.
(e) Within 1 hour after engine starts 75 percent of all glassed areas shall be free of frost.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

(f) All loader, backhoe, and stabilizer controls shall be operational.
(g) Engage transmission and move tractor forward and reverse as space permits.
(h) Operate brakes through "off" and "on" positions.

4.5.2.3 Noise limits. The noise limits of the tractor shall be measured to prove conformance to 3.6.2. Should the noise level exceed 85dB(A), failure to provide the warning plate specified in 3.6.2 shall constitute failure of this demonstration.

4.5.2.4 Roll Over Protective Structure (ROPS) and Falling Objects Protective Structure (FOPS). The ROPS and FOPS shall be demonstrated to prove conformance to 3.6.3, including the removeability requirement. Nonconformance to 3.6.3 shall constitute failure of this demonstration.

4.5.2.5 Dimensions. The overall width and reducible height shall be measured to prove conformance to 3.7.1. Nonconformance to 3.7.1 shall constitute failure of this demonstration.

4.5.2.6 Operating weight. The operating weight of the tractor shall be determined to prove conformance to 3.7.2. Nonconformance to 3.7.2 shall constitute failure of this demonstration.

4.5.2.7 Loader bucket. The nominal heaped rating capacity of the bucket, measured in accordance with SAE J742b shall be determined to prove conformance to 3.8.1. Nonconformance to 3.8.1 shall constitute failure of this demonstration.

4.5.2.8 Backhoe bucket. The minimum heaped capacity of the bucket measured in accordance with SAE J296 shall be determined to prove conformance to 3.8.2. Nonconformance to 3.8.2 shall constitute failure of this demonstration.

4.5.2.9 Loader dump height clearance. The loader dump height clearance of the tractor shall be measured to prove conformance to 3.9.1.1. Nonconformance to 3.9.1.1 shall constitute failure of this demonstration.

4.5.2.10 Loader reach. The loader reach of the tractor shall be measured to prove conformance to 3.9.1.2. Nonconformance to 3.9.1.2 shall constitute failure of this demonstration.

4.5.2.11 Loader lifting capacity. The loader lifting capacity of the tractor shall be measured to prove conformance to 3.9.1.3. Nonconformance to 3.9.1.3 shall constitute failure of this demonstration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.2.12 Loader breakout force. The loader breakout force of the tractor shall be measured to prove conformance to 3.9.1.4. Nonconformance to 3.9.1.4 shall constitute failure of this demonstration.

4.5.2.13 Loader raising time. The raising time of the loader bucket shall be measured to prove conformance to 3.9.1.5. Nonconformance to 3.9.1.5 shall constitute failure of this demonstration.

4.5.2.14 Loader lowering time. The lowering time of the loader bucket shall be measured to prove conformance to 3.9.1.6. Nonconformance to 3.9.1.6 shall constitute failure of this demonstration.

4.5.2.15 Operational loader. The loader shall perform the truck loading operation for 4 clock hours to prove conformance to 3.9.1.7. A simulated truck sideboard may be used. The loader shall also perform the stockpile operation for 4 clock hours to prove conformance to 3.9.1.7. Inability of the tractor to perform as indicated in 3.9.1.7 shall constitute failure of this demonstration.

4.5.2.16 Backhoe digging depth. The backhoe digging depth of the tractor shall be measured to prove conformance to 3.9.2.1. Nonconformance to 3.9.2.1 shall constitute failure of this demonstration.

4.5.2.17 Backhoe loading height. The backhoe loading height of the tractor shall be measured to prove conformance to 3.9.2.2. Nonconformance to 3.9.2.2 shall constitute failure of this demonstration.

4.5.2.18 Backhoe digging force. The backhoe digging force of the tractor shall be measured to prove conformance to 3.9.2.3. Nonconformance to 3.9.2.3 shall constitute failure of this demonstration.

4.5.2.19 Backhoe lifting capacity. The backhoe lifting capacity of the tractor shall be measured to prove conformance to 3.9.2.4. Nonconformance to 3.9.2.4 shall constitute failure of this demonstration.

4.5.2.20 Operational backhoe. The backhoe shall perform excavation of trenches varying in depth from 9 to 15 feet for 6 clock hours to prove conformance to 3.9.2.5. Inability of the tractor to perform as indicated in 3.9.2.5 shall constitute failure of this demonstration.

4.5.2.21 Travel speed. The maximum attainable forward speed shall be measured to prove conformance to 3.11.1. Nonconformance to 3.11.1 shall constitute failure of this demonstration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.2.22 Fuel capacity. The fuel capacity of the tractor shall be measured to prove conformance to 3.14. Nonconformance to 3.14 shall constitute failure of this demonstration.

4.5.2.23 Slinging. The slinging provisions shall be demonstrated to prove conformance to 3.21.1. Nonconformance to 3.21.1 shall constitute failure of this demonstration. In addition weld failure or permanent deformation of the tractor or slinging provisions or failure to meet any applicable requirements of MIL-STD-209, shall constitute failure of this demonstration. The demonstration procedure shall be as follows:

(1) Lift the tractor and hold in suspension in its normal travel position using slings that converge not more than 24 feet above the lowest extremity of the tractor. Determine the forward angles of application for each attachment. Measure the clearance between each sling and the tractor. Measure eye openings and clearance dimensions of the slinging provisions.
(2) Restrain the tractor by anchoring the main frame and subject each slinging provision to a force of 2-1/2 times the load it carried when initially suspended. This force shall be applied in the direction as determined in (1) above. An alternate method of test is to lift the tractor as in (1) above and add weights to the main frame until the force is 2-1/2 times the initial force on each slinging eye. Hold the tractor under either of the above loading conditions for at least 90 seconds.

4.5.2.24 Hydraulic impact tool. The hydraulic impact tool, with each of the working tools listed in 3.23.1, shall be demonstrated for not less than 15 minutes to prove conformance to 3.23.1. Inability of the impact tool to perform as indicated in 3.23.1 shall constitute failure of this demonstration.

4.5.2.25 Hydraulic earth auger. The hydraulic earth auger shall be demonstrated for not less than 15 minutes to prove conformance to 3.23.2. Inability of the earth auger to perform as indicated in 3.23.2 shall constitute failure of this demonstration.

4.5.3 First article certification. In lieu of performing the demonstrations in 4.5.2.1 Environmental conditions; 4.5.2.3 Noise Limits;

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.2.4 Roll Over Protective Structure (ROPS) and Falling Objects Protective Structure (FOPS); 4.5.2.7 Loader bucket; 4.5.2.8 Backhoe bucket; 4.5.2.12 Loader breakout force; 4.5.2.18 Backhoe digging force; and 4.5.2.22 Fuel capacity, certified test reports or test data may be submitted to prove conformance to the requirements stated in Section 3. These certified test reports or test data shall be submitted to the Government at the time of the first article demonstration. Unacceptable test reports or unacceptable test data shall be cause for rejection.

4.6 Quality conformance inspection.

4.6.1 Individual examination. Prior to examination, each tractor and attachments shall be serviced with the lubricants specified in 3.26 and 3.26.1 grades required for use in the temperature range of the shipping destination. Each tractor shall be examined for the defects marked "X" in Column 2 of Table I. Presence of one or more defects or nonconformance to the Government approved first article tractor shall be cause for rejection.

4.6.2 Individual demonstrations. Upon successful completion of the examination specified in 4.6.1, the individual tractors shall be subjected to the demonstration, evidence of any deficiency, need for adjustment or maintenance, malfunction of any control or component, any permanent deformation, or damage to any tractor system shall be cause for rejection.

4.6.3 Individual run-in. The contractor shall submit the normal standard commercial run-in procedures during the invitation for bids or (Step I) request for technical proposal or as specified (see 6.2). These procedures, after being approved by the Government, shall be used for each tractor. At the completion of the individual run-in, evidence of any deficiency, need for adjustment or maintenance, contamination, malfunction of any control or component, any permanent deformation, damage to the hydraulic system, or evidence of leakage of fuel, lubricants, or hydraulic fluid shall be cause for rejection. The Government may require an additional run-in after deficiencies are corrected to the Government's satisfaction. If the contractor's run-in procedures are not acceptable to the Government the contractor shall perform the run-in procedures in 4.6.3.1 for each tractor.

4.6.3.1 Alternate individual run-in. Start and operate each tractor as follows: Operate the tractor in all gears forward and reverse at maximum speeds for 10 minutes. Operate tractor with a rated operating

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

load in the loader bucket both forward and reverse at maximum safe speeds commensurate with the load for 10 minutes. With the loader bucket loaded with the rated operating load, raise and lower the load through the full lifting cycle for 5 minutes. With the backhoe bucket loaded with the rated operating load, raise, swing (left and right), and lower the load through the full cycle for 5 minutes. Operate all other controls not used during the above two operations for 5 minutes. Operate stabilizer pads through their complete cycle not less than 10 times. Also include in each cycle sufficient down pressure on the stabilizers to raise the tractors rear wheels clear of the ground. Then install the impact tool and earth auger and actuate the hydraulic controls to assure proper operation. Evidence of any deficiency, need for adjustment or maintenance, contamination, malfunction of any control or component, any permanent deformation, damage to the hydraulic system, or evidence of leakage of fuel, lubricants, or hydraulic fluid shall be cause for rejection. The Government may require additional demonstrations after deficiencies are corrected.

5. PACKAGING

5.1 Preservation, packing, and marking. The tractor and all items issued with the tractor shall be suitably preserved, and packed for retail distribution directly to a using customer and in a manner to assure carrier acceptance and safe delivery to destination at lowest ratings in compliance with requirements of carrier rules and regulations applicable to the mode of transportation. In addition, the following specific requirements shall be accomplished. Items with critical surfaces required for fit or function shall be provided protection by the use of preservative coatings, volatile corrosion inhibitors, or desiccated packs. Items requiring protection from physical damage to surfaces, or which are fragile by nature shall be protected by wrapping, pack compartmentization, or cartonizing of the individual item. The cooling system shall be filled with a fresh clean solution of 50 percent water and 50 percent antifreeze conforming to MIL-A-46153, and a tag attached indicating the temperature to which the cooling system can be subjected before damage. All lubrication reservoirs, sumps, etc., shall be filled to the operating level with the grade of military lubricant designated for use in the temperature range at the shipping destination. A tag shall be attached in a conspicuous location to indicate which military lubricant has been used, the temperature range of lubricant used and grade of lubricant used. A deprocessing guide shall be furnished indicating in detail the preservation and packaging materials to be removed and any other servicing required prior to placing the tractor in operation. Marking shall reflect, as a minimum, the item name, National stock number, contract or purchase order number, and appropriate address markings on each unpacked item or shipping container. The marking shall be applied with a waterproof ink and shall provide a definite contrast.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The tractor covered in this specification is intended for excavation for pipelines, footings, drainage, and fortification; stockpiling; loading stockpiled materials into dump trucks and trailers; backfilling; rock and concrete breaking; tamping; asphalt cutting; post driving; and earth boring.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of first article tractor (see 3.2 and 4.4).
(c) Time frame for performing the first article examination and first article demonstrations (see 3.2).
(d) Quantity of production tractors to be furnished with winterization kits (see 3.5.1).
(e) Time frame for submitting data on transportability (see 3.25).
(f) U.S. Army registration numbers, plus their location, size, style, etc. (see 3.29).
(g) Time frame for completing and submitting the Vehicle Classification Data Sheet and applying the weight classification numbers including location (see 3.31 and 6.3).
(h) Time frame for submitting technical publications to the Government for approval (see 3.33).
(i) Items listed in the Basic Issue Item List (see 3.34).
(j) Time frame for completing and submitting the Technical Information Package (see 3.36).
(k) Time frame for submitting the first article demonstration report (see 4.4).
(l) Time frame for submitting a production winterized tractor (see 4.5.2.2).
(m) Time frame for submitting normal standard commercial run-in procedure (see 4.6.3).

6.3 Vehicle Classification Data Sheet. Additional copies of the Vehicle Classification Data Sheet may be obtained from MERADCOM, ATTN: DRXFB-HK, Fort Belvoir, VA 22060 (see 3.31).

6.4 Government-furnished property (GFP). The contracting officer should arrange to furnish the property specified with instructions on use of this property (see 3.35).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

Custodian:
Army - ME

Review activity:
Army - AT

Preparing activity:
Army - ME

Project 2420-A033

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

APPENDIX

Load Class		
E	C	H


VEHICLE CLASSIFICATION DATA SHEET
LOADER / BACKHOE TRACTOR

DATA REQUIRED FOR IDENTIFICATION AND LOAD CLASSIFICATION OF SUBJECT VEHICLE

NOMENCLATURE

Mfr	Model No.
NSN	Agency

Traveling Load Category		Total Weight W	Pay Load
Empty	E		
Cross Country or off Highway	C		
Laden or on Highway	H		

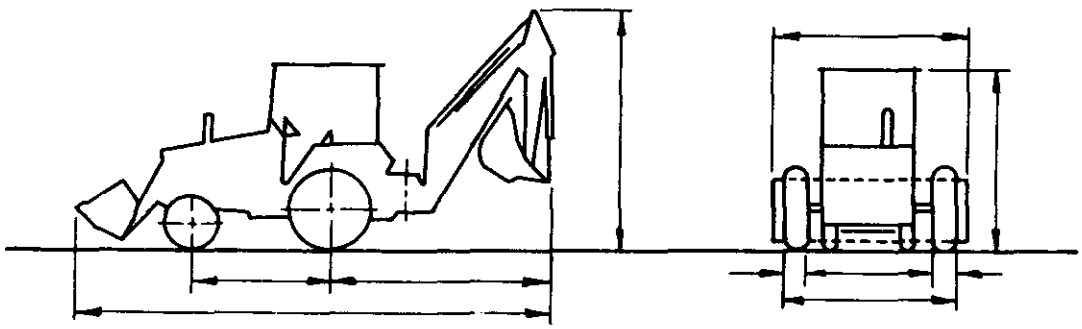

Traveling Load Category	Loads On		Front Tires			Rear Tires		
	A	B	No/ axle	size	psi	No/ axle	size	psi
Empty								
Cross Country or off Highway								
Laden or on Highway								

All loads in short tons
All loads to include weight of crew and appurtenances
Class Nos for vehicles over 3,000 lb
Longitudinal dimensions in feet
Vertical and transverse dimensions in inches

X-3172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research
and Development Command
ATTN: DRXFB-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-52908(ME) Tractor, Whld, w/Backhoe, Loader, Hydr Impact Tool & Hydr Earth Auger Attachment, Commercial Construction Equipment (CCE)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:11Z
Check the source to verify that this is the current version before use.