INCH-POUND

MIL-A-50687B (AR)
9 September 1992
SUPERSEDING
MIL-A-50687A (AR)
06 April 1990

MILITARY SPECIFICATION

ANTENNA ASSEMBLY AS-2049/VPS-2: 10556312 AND AS-2049A/VPS-2A: 12563321

This specification is approved for use by the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for Antenna Assembly AS-2049/VPS-2 which is used as the antenna for the Radar Set AN/VPS-2 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A **FSC 1285**

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control, Material, General Specification Governing the Manufacture and Inspection of
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-R-48427	-	Reflector and Feed Assembly, 10548028 and 10556313
MIL-S-50666	-	Servo Drive, Traverse, 10548052
MIL-S-50667	-	Servo Drive, Elevation, 10548062

STANDARDS

MILITARY

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9378480	-	Clamp, Hub, Miniature, Adjustable
10548028	-	Reflector and Feed Assembly
10548052	-	Servo Drive, Traverse
10548062	-	Servo Drive, Elevation
10548193	-	Servo Electronics
10549103	-	Base Support Assembly
10549134	-	Connector, Plug, Miniature
10556312	-	Antenna Assembly, AS-2049/VPS-2
10556313	-	Reflector and Feed Assembly
12563321	-	Antenna Assembly, AS-2049A/VPS-2A
12950877	-	Requirements for Soldering Electrical and Electronic Assemblies

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

SPECIAL PACKAGING INSTRUCTION

PS 10556312	-	Packaging of Antenna Assembly, AS-2049/VPS-2
PS 12563321	-	Packaging of the Antenna Assembly, AS-2049A/VPS-2A

(Copies of other Government documents, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10556312 or 12563321, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the antenna assembly shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
c. Part identification and marking.
d. Workmanship.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

3.2.1 Subassemblies. The subassemblies of the antenna shall have been inspected and accepted in accordance with their respective drawings and specifications prior to installation in the antenna assembly. The following subassemblies are covered by the indicated specifications:

Unit No.	Name	Specification
A1	Reflector and Feed Assembly 10556313 or 10548028	MIL-R-48427
A2	Servo Drive, Elevation 10548062	MIL-S-50667
A3	Servo, Traverse 10548052	MIL-S-50666

3.3 Environmental service conditions.

3.3.1 Vibration. The antenna assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to the equivalent of 6000 miles of track-laying vehicle operational vibration as defined by MIL-STD-810 narrowband random-on-random data for equipment installed on the deck of the M113 armored personnel carrier.

3.3.2 Shock. The antenna assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ±10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude operating. The antenna assembly shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

NOTE: The requirements of 3.5.1, 3.5.2, 3.5.3 and 3.5.4 need not be checked during the exposure period.

3.3.4 Temperature.

3.3.4.1 Operating. The antenna assembly shall meet the requirements of 3.4, 3.5, 3.5.5, 3.5.6 and 3.5.6.1 when stabilized thermally at any temperature between -40°F and +155°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

3.3.4.2 Non-operating (storage). The antenna assembly shall not suffer permanent damage when subjected to the constant temperature extremes of -60°F for a period of 24 hours and +160°F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The antenna assembly shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the antenna assembly.

3.5 Performance. The antenna assembly shall meet the radio frequency characteristics when tested on an antenna test range which shall provide far field vision ($2D^2/\lambda$). This requires a minimum of 75 feet between transmitting and receiving antennas for the measurements. The antenna assembly shall be tested between the frequency range of 9.15 and 9.25 GHz.

3.5.1 Antenna pattern (without radome). The energy of any side lobe shall be at least 22 decibels (dB) below the main lobe energy.

3.5.1.1 Antenna pattern (with radome). The energy of any side lobe shall be at least 22 dB below the main lobe energy for the E-plane and not less than 21 dB for the H-plane.

3.5.2 Beamwidth. The beamwidth of the main lobe shall be 3.4 deg. to 4.3 deg. for energy received.

3.5.3 Gain. The antenna assembly shall have a gain of at least 31 dB without radome and at least 30 dB with radome over an isotropic radiator.

3.5.4 Boresight. The optical axis of the boresight clamp and the electrical center of the antenna beam shall be within ± 1/8 degree.

3.5.5 VSWR. The VSWR of the antenna assembly, when pointed in a nonreflecting direction, shall not be greater than 1.5:1.

3.5.6 Servo drive. The elevation and traverse servo drives shall be driven by servo electronics, 10548193, with synchro input signal which causes the antenna to oscillate sinusoidally ± 25 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

3.5.6.1 Servo drive dynamic test. When the elevation and traverse servos are driven at 0.1 Hz, the antenna shall track to less than 1.5 milliradians (mrad). The antenna performance shall be such that the "DEMOD" output signal (TP3) of the appropriate servo electronics, 10548193, when filtered to the 10 to 30 Hz passband and converted to a true root mean square (rms) signal by using item 17, and recorded as shown in Figure 1, shall not exceed 300 millivolts (mV). For the recorded waveforms shown in Figure 1, Channel 1 displays the filtered "DEMOD" output signal while Channel 2 displays the filtered and averaged signal of Channel 1 so as to provide a less complex waveform for quantitative analysis. Figure 1 shows (a) an acceptable antenna, (b) a nonacceptable antenna having a peak dc output exceeding 300 mV, and (c) a nonacceptable antenna having, in addition to greater than 300 mV level, visible vibrations present in the reflector and feed assembly (λ^2E only).

3.5.7 Function potentiometers.

3.5.7.1 Elevation. With +15 volts direct current (Vdc) applied to J1-g, J1-f, J1-E, J1-F, J1-M and J1-N of the elevation drive, the potentiometer outputs of λ^2E at J1-S, λ^3E at J1-P and λE at J1-D shall provide the following voltages using J1-h as dc return:


a. A null of not more than 2.50 volts at 0 degrees elevation lead angle (trunnion output) for the λE potentiometer. A null of not more than 120 millivolts at 0 degrees elevation lead angle (trunnion output) for the λ^2E and λ^3E potentiometer output.

b. Measure the following voltage outputs at ± 10 degrees elevation lead angle (corresponds to 12.25 degrees of synchro input information).


Signal	Voltage
λE	7.40 volts maximum
λ^2E	2.30 ± 0.4 volts
λ^3E	0.90 ± 0.3 volts

c. The difference between the +10 degrees and -10 degrees lead angle voltages shall not exceed 0.2 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

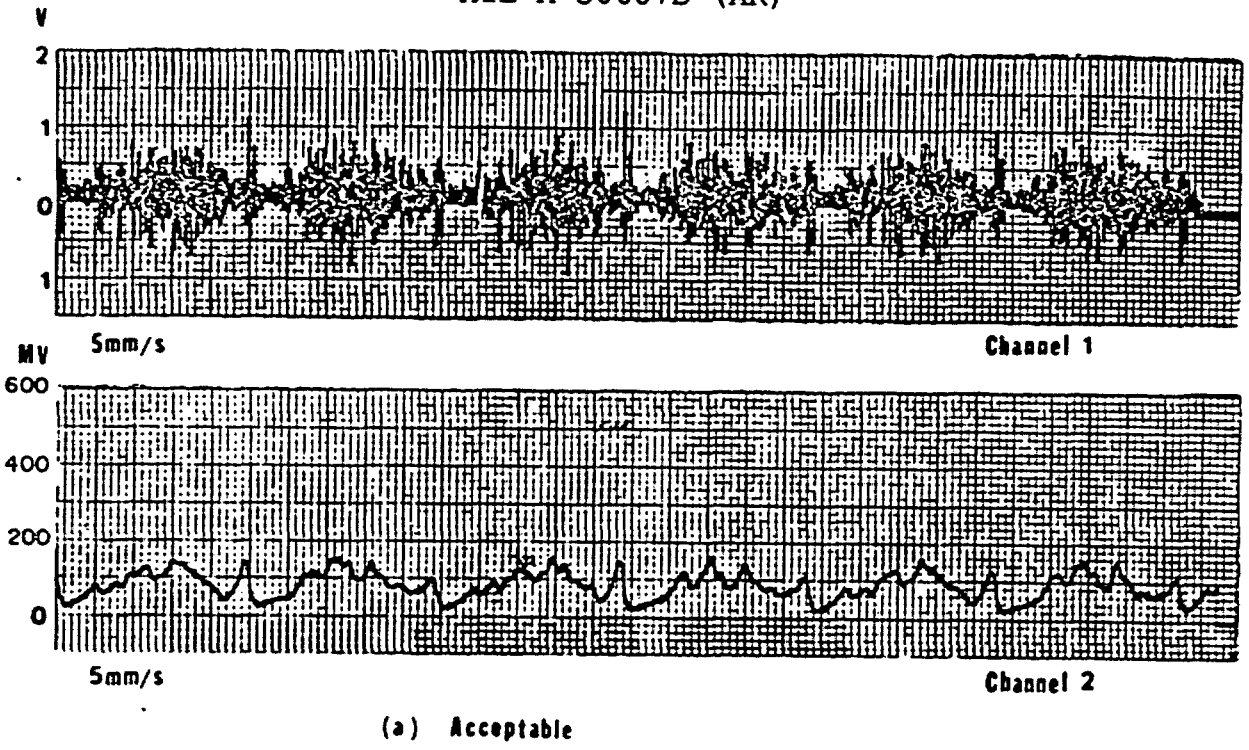


(a) Acceptable

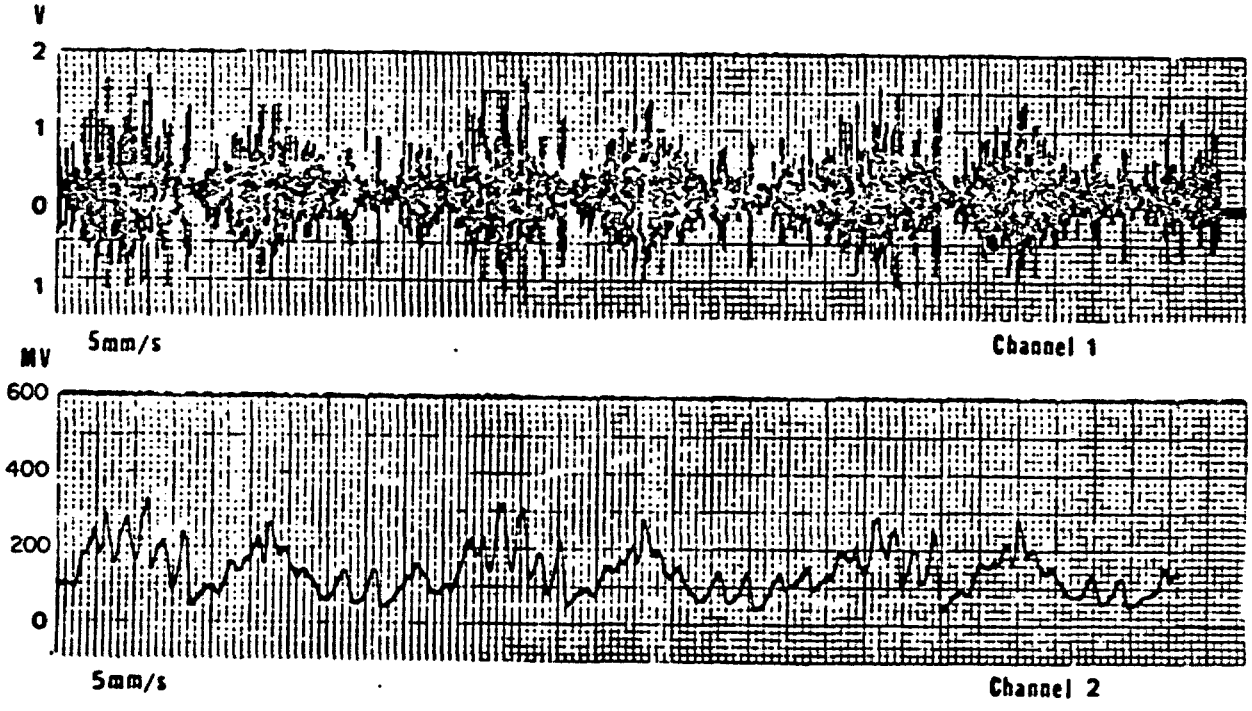

(b) Non-acceptable

FIGURE 1. Chart recording displays (sheet 1 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

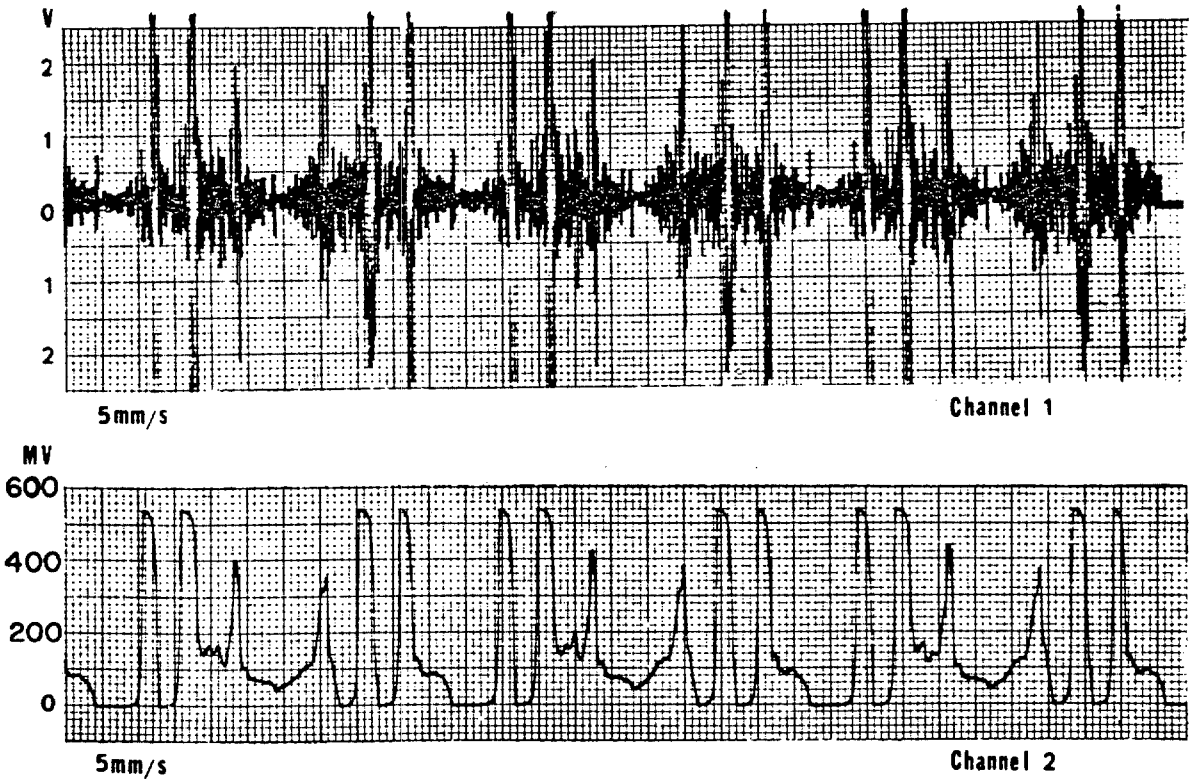

(c) Non-acceptable, visible vibration

FIGURE 1. Chart recording displays (sheet 2 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

3.5.7.2 Traverse. With 15 Vdc applied to J1-g and J1-f of the traverse servo drive, the λ^2T potentiometer output at J1-s shall provide the following voltages using J1-h as dc return:

a. A null of not more than 120 mV at 0 degrees traverse lead angle (trunnion output).

b. 2.4 ± 0.4 volts at ± 10 degrees traverse lead angle (± 10 degrees lead angle corresponds to ± 12.7 degrees of synchro input information).

c. The difference between the 10 degrees and -10 degrees lead angle voltages shall not exceed 0.2 V.

3.5.8 Tachometers.

3.5.8.1 Traverse. The output voltage between traverse drive connector pins J1-X and J1-W shall be 13.75 Vdc ± 5%, when the antenna is slewing at 1 radian/second ± 5%.

3.5.8.2 Elevation. The output voltage between elevation drive connector pins J1-X and J1-W shall be 13.75 Vdc ± 5%, when the antenna is slewing at 1 radian/second ± 5%.

3.6 First article. When specified in the contract or purchase order (see 6.2), a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the requirements of Note 2 of Drawing 12950877.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspections set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. Unless otherwise specified herein, the provisions of MIL-F-13926 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50°F to +90°F
b.	Relative Humidity	90% RH Max.
c.	Pressure	28 to 32 inches Hg

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 Sample. The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in the quantities indicated.

Name	Drawing	Quantity
Antenna Assembly AS-2049/VPS-2	10556312	3
Antenna Assembly AS-2049A/VPS-2A	12563321	3

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component, or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of any assembly, component or test specimen to comply with any of the requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and the same specification revision. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies.

a. The contractor's quality program or detailed inspection plan shall provide assurance of compliance of all characteristics with the applicable drawings and specifications utilizing as a minimum the conformance criteria specified in this document and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

b. Unless otherwise specified herein or provided for in the contract, alternative quality conformance procedures, methods or equipment, such as statistical process control, tool control, other types of sampling plans, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions herein. Prior to applying such alternative procedures, methods or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.3). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality conformance provisions(s) herein. In case of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis.

TABLE I. Functional tests (100 percent inspection).

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major 101. Electrical 102. Performance	 3.4 3.5	 4.7.2 4.7.3
Minor	None	N/A

4.5 Special sampling. One antenna assembly out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table I and shall then meet the requirements and tests in Table II. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE II. Special sampling.

Characteristic	Requirement	Test Procedures
Critical	None	N/A
Major 103. Vibration 104. Shock 105. Altitude 106. Temperature 107. Humidity (nonoperating)	 3.3.1 3.3.2 3.3.3 3.3.4 3.3.5	 4.7.1.1 4.7.1.2 4.7.1.3 4.7.1.4 4.7.1.5
Minor	None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test, as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 wherever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the standard test equipment listed in Table III (Test equipment list) shall be utilized in the performance of the applicable test methods of inspection as specified in 4.7.

TABLE III. Test equipment list.

Item Number	Description
1. Signal generator	Frequency: 9.15 to 9.25 GHz. RF power output: 1 to 100 mW. Modulator: AM modulation to 50% at 1 kHz, tunable ±10%
2. SWR meter and detector	Sensitivity: 0.15 µV, tuned to 1 kHz; calibrated to read SWR with a square-law detector
3. Slotted line and detector	Frequency: 9.15 to 9.25 GHz Residual SWR: Less than 1.05:1 Sensitivity: Sufficient to provide greater than 1 uV at 1 kHz. Square-law over greater than 20 dB.
4. Attenuator	Attenuation: 10 dB SWR: 1 to 1.1 Frequency: 9.2 GHz
5. Variable attenuator	Attenuation: 0 to 22 dB ± 5% Frequency: 9.2 GHz
6. Directional coupler	Coupling factor: 20 dB ± 1 dB SWR: 1 to 1.1
7. Frequency meter	Frequency: 9.15 to 9.25 GHz Accuracy: ± 1%
8. Standard gain horn	Gain between 15 and 25 dB at 9.2 GHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

TABLE III. Test equipment list. (continued)

Item Number	Description
9. Antenna test range	Distance between antennas: 75 ft Std. antenna gain: Sufficient to record VPS-2 antenna pattern, with minimum 30 dB dynamic range. Pedestal repeatability: ± 1 min. Pedestal azimuth travel: 360 deg Pedestal elevation travel: ± 20 deg from horizon Frequency: 9.15, 9.2 and 9.25 GHz Recorder: Signal vs. direction ± 1 min. Visual boresight: Target displaced in same direction from center of transmitting antenna by equal amount that boresight clamp is displaced from center of antenna assembly (11.25 ± .01 in.)
10. Test fixture (optional)	Fixture to mount antenna and return antenna in both planes, to within ± 1 minute of center between two electrical measurements.
11. Servo control unit	See Figure 2. See Table IV for parts list.
12. Dc power supply	24 Vdc, 10 A Load regulation: ± 1% Ripple: Less than 100 mV
13. Dc power supply	15 Vdc, 100 mA Load regulation: ± 0.1% Ripple: Less than 10 mV
14. Ac-Dc voltmeter	Range: 500 mV to 150 V Input impedance: 10 megohms
15. Shaft clamp	See Figure 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

TABLE III. Test equipment list. (continued)

Item Number	Description
16. Servo director	Synchro transmitter compatible with 11CT4e. Simple harmonic motion of one cycle per 5 and 10 seconds with ± 25 deg adjustable sector scan.
17. Rms voltmeter with Dc output, Hewlett Packard 3400A or equivalent	Response: Responds to rms value (heating value) of input signal. Frequency range: 10 Hz to 10 mHz Full scale accuracy: ± 5% from 10 Hz to 50 Hz Voltage range: 0.3 V to 3 V full scale Dc output: Ac to Dc converter Accuracy: ± 5% for 10 Hz to 50 Hz Output: 1 Vdc into open circuit for full scale deflection, proportional to meter deflection; 1 ma maximum Nominal source impedance 1000 Input impedance: 10 M shunted by 50 PF. Output noise: 1 mV rms.
18. Band pass filter	Frequency response: 0.02 Hz to 20 KHz Pass-band gain: 0 dB ± 1 dB Attenuation slope: nominal 24 dB per octave Maximum attenuation: greater than 80 dB Input impedance: 22 megohms or greater Parallel capacitance: 200 ± 50 pF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

TABLE III. Test equipment list. (continued)

Item Number	Description
19. Servo amplifier	In accordance with Drawing 10548193
20. Recorder	Two channel. Sensitivity: 5 mV/mm to 20 V/mm Speed: 1.0 to 100 mm/s Frequency response: 80 Hz
21. Power source, 400 Hz	115 V, 1A with distortion less than 1%
22. Base support assembly	In accordance with Drawing 10549103
23. Test cable W1	See Figure 5
24. Test Cable W2	See Figure 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

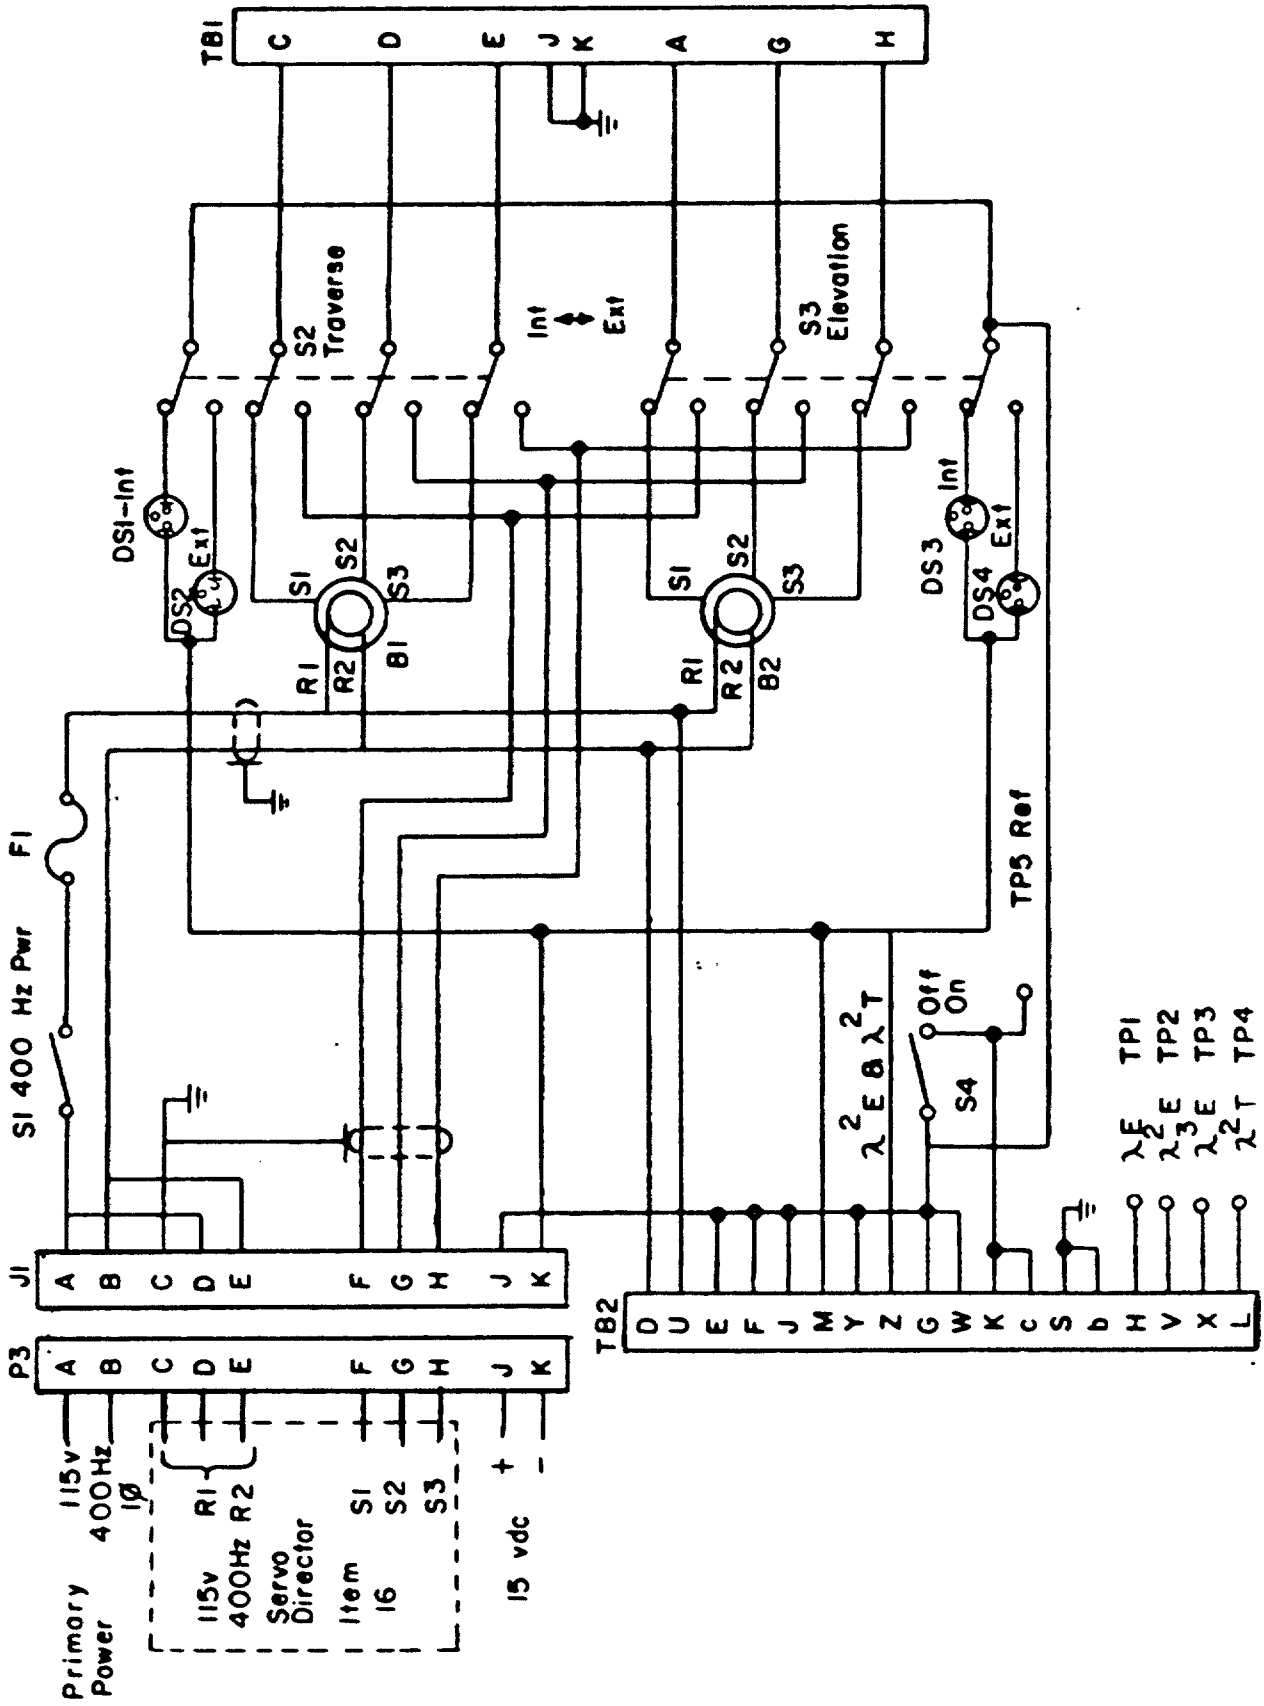



FIGURE 2. Servo control unit.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

TABLE IV. Servo control unit parts list.

Designation	Nomenclature and Description
J1	KPT02A-20-16P, chassis mounting
P1	KPT06B-16-26S, Cannon
TB1	Terminal board
TB2	Terminal board
B1	Synchro control transmitter, with dial
B2	Synchro control transmitter, with dial
S1, S4	Switch, SPST, 2A
S2, S3	Switch, 4PDT, 15A
F1, XF1	Fuse holder, and fuse, 1A
DS1 thru DS4	Neon glow lamp, NE-51
XDS1 thru XDS4	Lamp holder, Dialco 502-8136-102
TP1 thru TP5	Tip jack, H.H. Smith - 1501 or equivalent

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

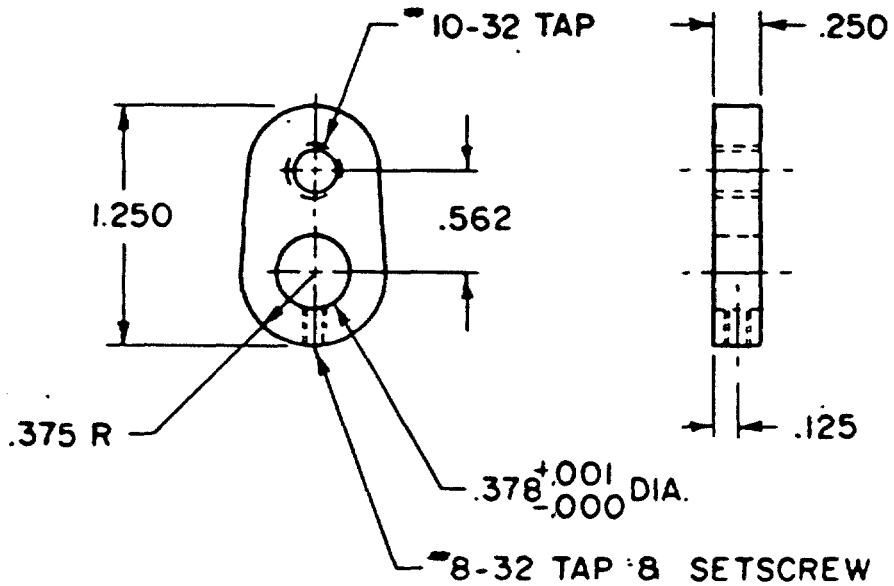

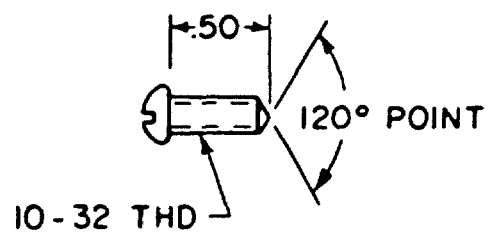

MATERIAL: CRES

FIGURE 3. Shaft clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 and paragraph 3.3.1 herein. The antenna assembly shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the antenna assembly shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the antenna assembly shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating). This test shall be performed as specified in Procedures II, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2, 4.7.3, for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (see Table III) and visual examination for compliance with 3.4.

4.7.3 Performance. The selected antenna assemblies shall be tested as follows: The tests for gain, boresight, VSWR, servo drive, dynamic test, and function potentiometers (4.7.3.3, 4.7.3.4, 4.7.3.5, 4.7.3.6 and 4.7.3.7) shall be performed on all antenna assemblies produced. The tests for antenna pattern (4.7.3.1) and beamwidth (4.7.3.2) need only be performed on the first article and at least 10 percent of production equipment. The tests for gain, boresight, antenna pattern and beamwidth (4.7.3.3, 4.7.3.4, 4.7.3.1 and 4.7.3.2) may be performed on the reflector and feed subassembly (Drawing 10556313) per requirement, at the discretion of the contractor.

4.7.3.1 Antenna pattern. The antenna pattern is to be obtained as follows:

a. Connect signal generator (item 1, Table III), to antenna test range transmitting antenna (part of item 9) through variable attenuator, item 5, and adjust frequency for 9.2 gigahertz (GHz).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

b. Use test fixture, item 10, to mount antenna assembly to pedestal and receiver of antenna test range (part of item 9) and point antenna assembly toward test transmitting antenna. Adjust antenna test range equipment controls for a peak on test range recorder while turning, in all directions, antenna assembly under test for maximum recorder deflection.

c. Adjust test range equipment for full recorder deflection.

d. Rotate antenna under test to 180 deg. (in azimuth) from transmitting antenna and make a 360 deg. azimuth recording of antenna assembly under test. Return antenna to peak deflection position of antenna test range and increase variable attenuator setting by 22 dB.

e. Note the recorder deflection. Decrease variable attenuator setting by 22 dB. Rotate the antenna to all side lobes. Note maximum recorder deflection for each side lobe. The side lobes of the antenna assembly as recorded above shall not be greater than the 22 dB down reference level.

f. Repeat a. to obtain full deflection. Rotate antenna under test in a vertical direction to 20 deg. from horizontal. Record pattern in elevation ±20 deg. from horizon. Return antenna to peak deflection of recorder and increase variable attenuator attenuation by 22 dB.

g. Note the recorder deflection. Decrease variable attenuator setting by 22 dB. Rotate the antenna vertically to all side lobes. Note maximum recorder deflection for each side lobe. The side lobes of the antenna assembly as recorded above shall not be greater than the 22 dB down reference level.

h. Repeat a. through g. for frequencies 9.15 and 9.25 GHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.7.3.2 Beamwidth. The beamwidths will be obtained by repeating 4.7.3.1a for 9.2 GHz.

a. Operate recorder to obtain expanded directional pattern (i.e., 6 deg. to 60 deg.).

b. Start azimuth pattern at least 3 deg. deflection from peak obtained above and record at least 3 deg. past peak.

c. Return antenna assembly to peak and adjust variable attenuator to obtain 3 dB attenuation.

d. Use this level to mark antenna pattern with 3 dB reference.

e. The 3 dB beamwidth as obtained shall be between 3.4 deg. and 4.3 deg.

f. Repeat a. through e. except rotation will be in elevation.

g. The 3 dB beamwidth as obtained shall be between 3.4 deg. and 4.3 deg.

h. Repeat a. through h. for frequencies of 9.15 and 9.25 GHz.

i. The 3 dB beamwidth as obtained shall be between 3.4 deg. and 4.3 deg.

4.7.3.3 Gain. The gain shall be obtained by performing 4.7.3.1a for 9.2 GHz using antenna test range or optional test fixture (no recording required).

a. Adjust the antenna test range equipment to obtain a variable attenuation of at least 3 dB greater than 31 dB, minus the "standard gain horn" gain when full recorder deflection or similar indication is obtained.

b. The antenna assembly under test is replaced with standard gain antenna and variable attenuator adjusted to obtain full recorder deflection.

c. The change in variable attenuator setting plus the gain of the standard gain antenna shall be no less than 31 dB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.7.3.4 Boresight. The boresight of the antenna shall be accomplished using the antenna test range (item 9) or holding fixture which allows movement of the antenna, plus/minus 4 1/2 minutes from center and return to center within ± 1 minute from electrical measurement.

a. The antenna shall be adjusted for electrical center (peak) by repeating 4.7.3.1a for 9.2 GHz using antenna test range or test fixture.

b. Adjust variable attenuator to increase attenuation by 3 dB and record level of recorder deflection.

c. Return variable attenuator to value before 3 dB increase.

d. Rotate antenna assembly until recorded level of 3 dB above is passed in azimuth.

e. Return antenna assembly back to obtain 3 dB reference above (above operations to overcome backlash).

f. Note reading or indication and continue rotation through peak and to next 3 dB reference. Note reading.

g. Move antenna assembly to halfway between the two 3 dB readings taking care to go past desired reading and return so approach is from same direction as before.

h. Repeat d. for elevation. Place telescope in boresight telescope holder and observe boresight target in cross hairs.

4.7.3.5 VSWR. Standing wave measurements are obtained by connecting signal generator, item 1, output to slotted line and detector, item 3, with attenuator, item 4, between item 1 and 3.

a. Connect SWR meter, item 2, to detector output.

b. Connect output of slotted line to antenna assembly under test and aim antenna in a nonreflecting direction.

c. Turn equipment on and allow to stabilize.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

d. Adjust frequency of signal generator to 9.2 GHz.

e. Adjust the modulation frequency of signal generator to obtain a peak reading of the SWR meter.

f. Adjust the signal generator attenuator level and slotted line probe for a full scale reading on the SWR meter and so that all measurements are made within the square law region of the slotted line detector.

g. Obtain the SWR as indicated on the SWR meter by movement of the slotted line probe for maximum to minimum voltage levels.

h. Repeat e. for 9.15 and 9.25 GHz. SWR shall be less than 1.5 to 1.

4.7.3.6 Servo drive dynamic test. The servo drives shall be tested as follows:

4.7.3.6.1 Servo drive dynamic test for 10556312.

a. Connect the antenna assembly to the test equipment as shown in Figure 4. Connect the servo electronics, item 19, to W1 and filter as shown by the solid outline in Figure 4, for the performance test on the elevation servo drive of the antenna.

b. The antenna assembly shall be mounted to a rigid platform during the following tests. Install the shaft clamp, item 15, to the elevation drive shaft and with the servo control unit, item 11, in the internal mode of operation set the elevation dial to 0 deg. Apply power to the antenna and adjust the shaft so the antenna is approximately 25 deg. above the horizontal, then lock in place with the shaft clamp.

c. Set the servo control unit to the external mode and adjust the servo director so that it is oscillating 25 deg. either side of 0 deg. at a 0.1 Hz rate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

d. Set the recorder, item 20, to operate at a chart speed of 5 millimeters per second (5 mm/s); Channel 1 gain at 1 volt per centimeter (1 V/cm) and Channel 2 gain at 20 millivolts per millimeter (20 mV/mm). Establish a zero reference for Channel 1 at the center of the chart and a zero reference for Channel 2 near the edge of the chart (see Figure 1).

e. Set the filter, item 18, for a band pass of 10 Hz to 30 Hz.

f. Set the true rms voltmeter, item 17, to the 1-volt scale.

g. With the antenna scanning ± 25 deg. of 0 deg. reference record four cycles of antenna operation. The maximum value of the signal as recorded on Channel 2 (rms voltmeter dc output) shall be 300 mV.

NOTE: In addition to the 300 mV limit being exceeded, the basic criteria for rejection of an antenna servo drive is chatter or vibration of the antenna dish or feed horn readily discernible by observation. Figure 1(c) displays a chart recording of such a condition.

h. For the performance test on the traverse servo drive, connect the servo electronics, item 19, to W2 and perform steps c. through g.

4.7.3.6.2 Servo drive dynamic test for 12563321.

a. Connect the antenna assembly to the test equipment as shown in Figure 4. Connect the servo electronics (item 19, Table III) to W1 and filter as shown by the solid outline in Figure 4 for the performance test on the elevation servo drive for the antenna.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

b. The antenna assembly shall be mounted to a rigid platform during the following tests. Loosen the clamp, hub, miniature, adjustable (9378480) on the elevation drive shaft and with the servo control unit (item 11, Table III) in the internal mode of operation set the elevation dial to 180°. Apply power to the antenna and adjust the shaft so the antenna is approximately 25° above the horizontal, then lock in place with the shaft clamp.

c. Set the servo control unit to the external mode and adjust the servo director so that it is oscillating 25° either side of +25° above horizontal at a 0.1 Hz rate.

d. Set the recorder (item 20, Table III) to operate at a chart speed of 5 millimeters per second (5mm/s); channel 1 gain at 1 volt centimeter (1 V/cm) and channel 2 gain at 20 millivolts per millimeter (20 mV/mm). Establish a zero reference for channel 1 at the center of the chart and a zero reference for channel 2 near the edge of the chart (see Figure 1).

e. Set the filter (item 18, Table III) for a band pass of 10 to 30 Hz.

f. Set the true rms voltmeter (item 17, Table III) to the 1 volt scale.

g. With the antenna scanning ± 25° either side of 25° above horizontal reference, record four cycles of antenna operation. The maximum value of the signal as recorded on channel 2 (rms voltmeter Dc output) shall be 300 mV.

NOTE: In addition to the 300 mV limit being exceeded, the basic criteria for rejection of an antenna servo drive is chatter or vibration of the antenna dish or feed horn readily discernible by observation. Figure 1(C) displays a chart recording of such a condition.

h. Lock the antenna shaft at 0° ± 2° elevation. (Internal mode of operation and elevation dial set at 180°.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

i. Connect servo electronics (item 19, Table III) to W2 and filter as shown by the dotted outline in Figure 4, for the performance test on the traverse servo drive of the antenna. Place servo control unit (item 11, Table III) in the internal mode of operation, set the elevation dial to 0° and apply power to the antenna.

j. Set the servo control unit to the external mode and adjust the servo director so that it is oscillating ± 25° either side of 0° at 0.1 Hz rate.

k. Set the recorder (item 20, Table III) to operate at a chart speed of 5 millimeters per second (5mm/s); channel 1 gain at 1 volt per centimeter (1 V/cm) and channel 2 gain at 20 millivolts per millimeter (20 mV/mm). Establish a zero reference for channel 1 at the center of the chart and a zero reference for channel 2 near the edge of the chart (see Figure 1).

l. Set the filter (item 8, Table III) for a band pass of 10 to 30 Hz.


m. Set the true rms voltmeter (item 17, Table III) to the 1 volt scale.

n. With the antenna scanning +25° either side of 0° reference, record four cycles of antenna operation. The maximum value of the signal as recorded on channel 2 (rms voltmeter Dc output) shall be 300 mV.

NOTE: In addition to the 300 mV limit being exceeded, the basic criteria for rejection of an antenna servo drive is chatter or vibration of the antenna dish or feed horn readily discernible by observation. Figure 1(c) displays a chart recording such a condition.

4.7.3.7 Function potentiometers. For test of the function potentiometers set up antenna assembly as shown in Figure 4. Synchros B1 of each servo drive shall have been adjusted for electrical 0 deg. Operate the servo control unit, item 11, to the internal mode of operation, and turn S4 to the on position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

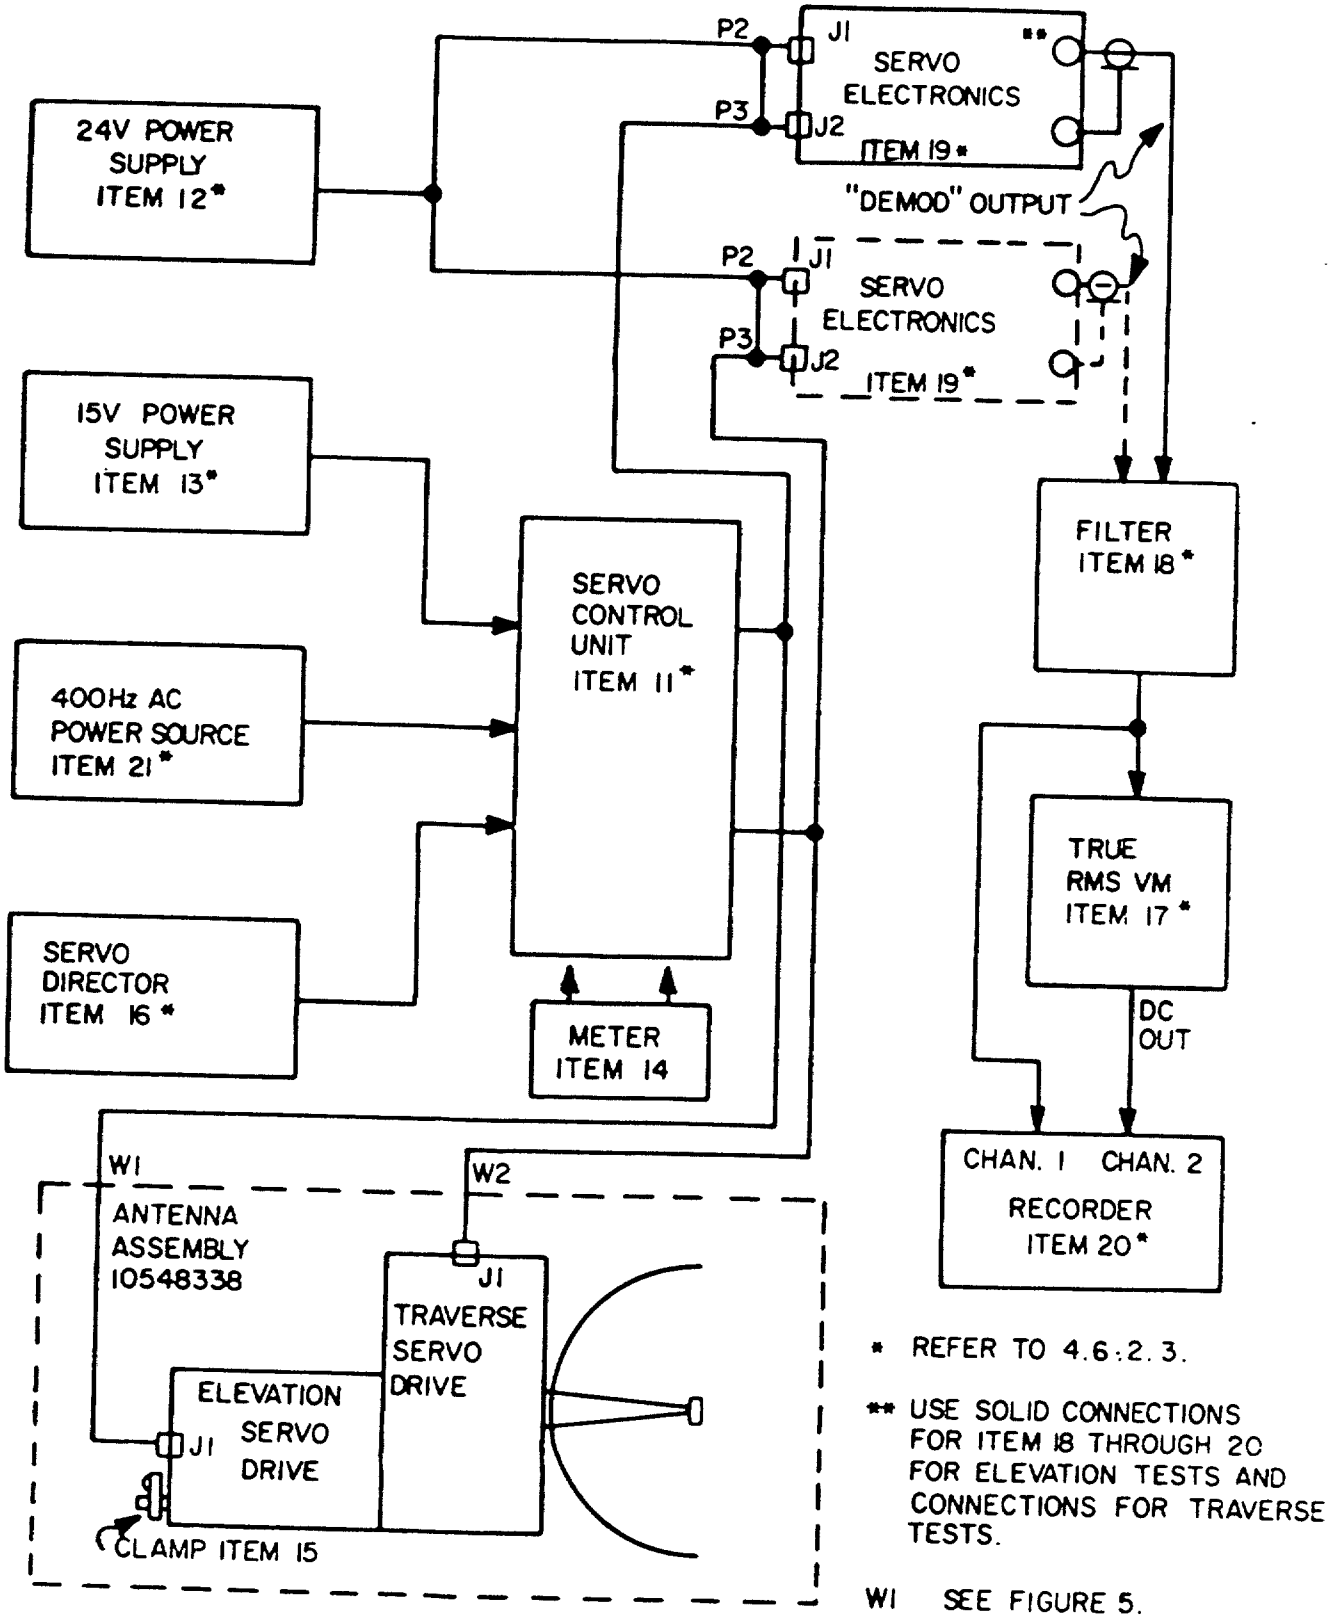

* REFER TO 4.6.2.3.


** USE SOLID CONNECTIONS FOR ITEM 18 THROUGH 20 FOR ELEVATION TESTS AND CONNECTIONS FOR TRAVERSE TESTS.

W1 SEE FIGURE 5.

W2 SEE FIGURE 6.

FIGURE 4. Test setup.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

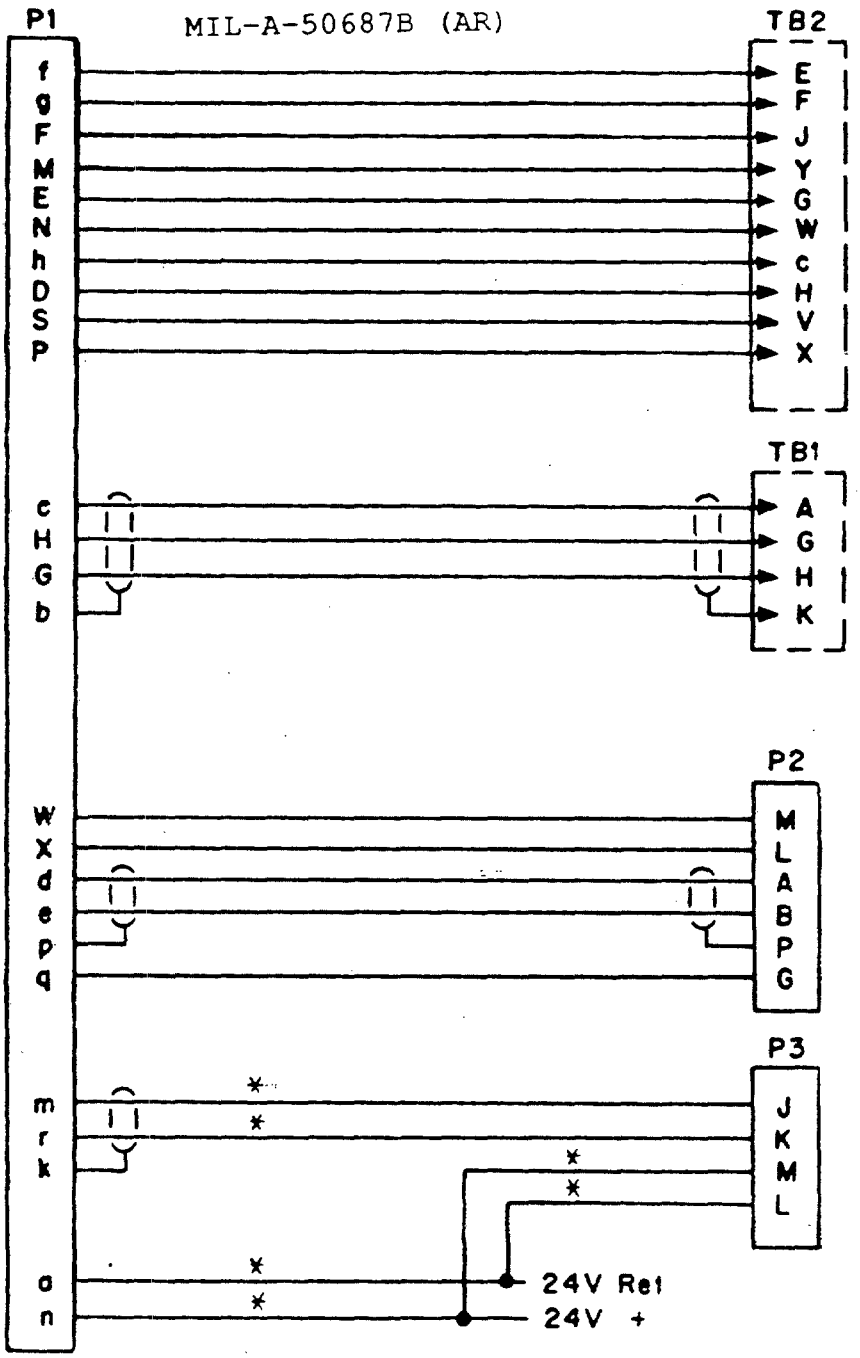

* CONDUCTOR SIZE 16 AWG, ALL OTHERS 22 AWG.
P1 - CONNECTOR, PLUG ARDEC PART NUMBER 10549134-8
P2 - CONNECTOR, PLUG - MS3116E-14-19-S
P3 - CONNECTOR, PLUG - MS3116C-14-12-S
TB1 & TB2 - PART OF SERVO CONTROL UNIT 11.

FIGURE 5. Test cable W1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

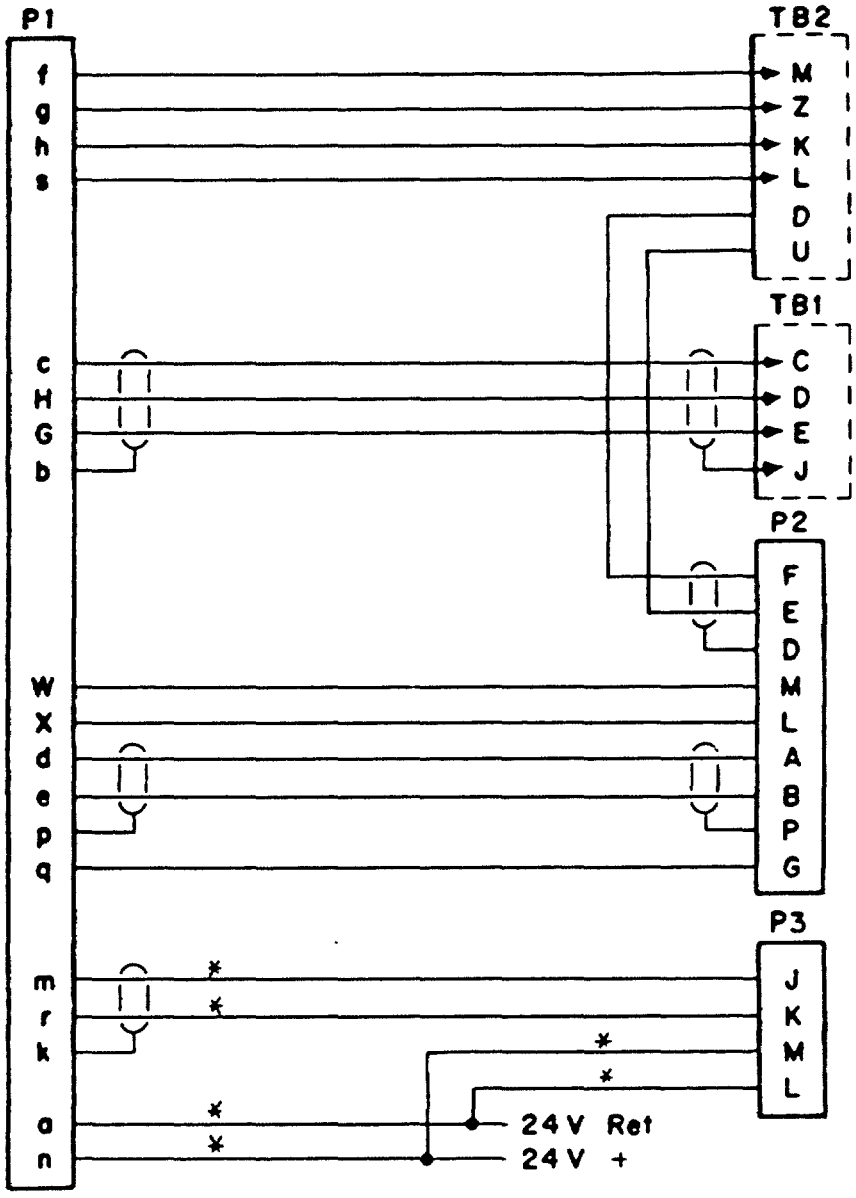

* CONDUCTOR SIZE 16 AWG, ALL OTHERS 22 AWG.
P1- CONNECTOR, PLUG ARDEC PART NUMBER 10549134-7
P2- CONNECTOR, PLUG-MS3116E-14-19-S
P3- CONNECTOR, PLUG-MS3116E-14-12-S
TB1 & TB2 PART OF SERVO CONTROL UNIT ITEM 11.

FIGURE 6. Test cable W2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

4.7.3.7.1 Elevation. Using the voltmeter, item 14, at TP1, TP2 and TP3 on the servo control unit, measurement of the λE, $\lambda^2 E$ and $\lambda^3 E$ potentiometer outputs is as specified in 3.5.7.1. Use TP5 on the servo control unit as reference for voltage measurements. When the lead angle is specified as ± 10 deg, position the dial of the servo control unit to ± 12.25 deg.

4.7.3.7.2 Traverse. Using the voltmeter at TP4 on the servo control unit, measure $\lambda^2 T$ potentiometer output to be as specified in 3.5.7.2. Use TP5 on the servo control unit as reference for voltage measurements. When the lead angle is specified as ± 10 deg., position the dial of the servo control unit to ± 12.7 deg.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of Note 2 of Drawing 12950877 as specified in paragraph 3.7.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instructions PS 10556312 and PS 12563321. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The antenna assembly is mounted on a vehicle and is used as an antenna for Radar Set AN/VPS-2A. In this function, it transmits pulsed RF power and receives radar echoes. Servo positioning of the antenna permits up to ± 25° offset in traverse from the position of the associated weapon and elevation positioning from -50° to +95°.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitiation, and if required, the specific issue of individual documents referenced (see 2.1.2).

c. Requirements for submission of first article sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

d. Applicable stock number.

e. Packaging requirements, if other than specified in Section 5.

f. Serialization requirements, if applicable.

g. Certificate of conformance for each lot or shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Fire Control System
Function Potentiometers
Radar Set
Reflector and Feed
Servo Electronics
Servo Control
VSWR

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-A-50687	2. DOCUMENT DATE (YYMMDD) 9 SEPTEMBER 1992

3. DOCUMENT TITLE ANTENNA ASSEMBLY AS-2049/VPS-2: 10556312 AND AS-2049A/VPS-2A: 12563321

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME U.S ARMY ARDEC STANDARDIZATION OFFICE	b. TELEPHONE (Include Area Code) (1) Commercial (201) 724-6674 (2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMACA-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:03Z
Check the source to verify that this is the current version before use.