MIL-P-50569C (AR)
1 JUNE 1982
SUPERSEDING
MIL-P-50569B
20 June 1979

MILITARY SPECIFICATION

PROJECTILE, 155MM, HE, ROCKET ASSISTED M549 SERIES, MOTOR BODY BONDING ASSEMBLY FOR

This specification is approved for use by the US Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 This specification contains requirements not covered by the drawings and provides quality assurance provisions for the fabrication of the motor body, nozzle insert and motor body bonding assembly for Projectile, 155MM, HE, Rocket Assisted, M549 and M549A1.

2. APPLICABLE DOCUMENTS.

2.1 Goverment documents

2.1.1 Specifications and standards. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

TT-C-490	-Cleaning Methods And Pretreatment Of Ferrous Surfaces For Original Coatings
PPP-B-636	-Boxes, Shipping, Fiberboard
TT-I-1795	-Ink, Marking, Stencil, Opaque (Porous And Non-Porous Surfaces)

FSC 1320

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn: DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-117	-Bags, Sleeves and Tubing - Interior Packaging
MIL-A-2550	-Ammunition, General Specification For
MIL-I-6868	-Inspection Process, Magnetic Particle
MIL-A-48078	-Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

FEDERAL

Federal Test Method

STD No. 141	-Paint, Varnish, Lacquer And Related Materials; Method Of Inspection And Testing
STD No. 151b	-Metal, Test Method

MILITARY

MIL-STD-105	-Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-410	-Nondestructive Testing Personnel Qualification And Certification
MIL-STD-453	-Inspection, Radiographic
MIL-STD-1169	-Packaging, Packing And Marking For Shipment Of Inert Ammunition Components

2.1.2 Other government documents, drawings, and publications. The following other government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)

Product And Packaging Drawings

8837835	-Pallet For Projectiles And Projectile Metal Parts
8861520	-Marking Diagram For Pallets For Projectiles 75MM To 120MM
9235979	-Motor Body Bonding Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

Inspection Equipment Drawings

9201550	-Fixture Hydrostatic Test
9278624	-Magnetic Particle Standard For Motor Body (Envelope Drawing)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity for bids or request for approval shall apply.)

2.1.3 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for approval shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

E8	-Tension Testing of Metallic Materials
E18	-Tests for Rockwell Hardness of Metallic Materials

(Copies may be purchased directly from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

American National Standards Institute (ANSI)

ANSI B46.1 - Surface Texture

(Application for copies should be addressed to the American National Standards Institute (ANSI), 1430 Broadway, New York, NY 10018).

2.1.4 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS.

3.1 Material. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Parts. The parts shall comply with all requirements specified on drawing (dwg.) 9235979, associated drawings and with all requirements specified in applicable specifications, and standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

3.3 Rotating band.

3.3.1 Minimum base metal penetration. There shall be penetration of the base metal at the weld interface in the form of arc cratering or intergranular penetrants such that a proper metallic bond is achieved between the copper and base metal.

3.3.2 Maximum base metal penetration. There shall be no evidence of arc cratering, except for where the starting weld pass is made, when the base metal is machined to 5.950 inches diameter minimum. There shall be no evidence of arc cratering at any location on the base metal when it is machined to 5.850 inches diameter minimum.

3.3.3 Cracks.

3.3.3.1 Finished machined rotating band. There shall be no evidence of cracks in the finished machined rotating band.

3.3.3.2 Base metal, 5.910 inch diameter minimum. There shall be evidence of not more than seven (7) cracks or intergranular penetrants at the 5.910 inch diameter except for where the starting weld pass is made. No single indication shall be greater than 1/4 inch in length and only those indications aft of a plane through the trap seat and perpendicular to the longitudinal axis are permitted.

3.3.3.3 Base metal, 5.850 inch diameter minimum. There shall be no evidence of cracks or intergranular penetrants at the 5.850 inch diameter.

3.3.4 Chemical requirements. The iron content of the rotating band shall not exceed 3.0 percent.

3.4 Metal defects. There shall be no cracks, seams, laminations or laps in the machined motor body as evidenced by magnetic particle inspection, except that intergranular penetrants no greater than 1/8 inch long are permitted in the undercut aft of the rotating band, including the angled surface. Intergranular penetrants no greater than 0.10 inch in length are permitted in the undercut forward of the rotating band as evidenced by magnetic particle inspection. Penetrants are not permitted on the bourrelet diameter. Penetrants will be relatively straight and longitudinal. Penetrants curving or tending to curve from longitudinal to circumferential will not be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

3.5 Hydrostatic test. The motor bodies shall withstand an internal hydrostatic pressure in accordance with the requirements specified on the drawing without evidence of leakage, cracks, flaws or ruptures. There shall be no permanent distortion of the motor body beyond that indicated on dwg. 9235977.

3.6 Proving ground test. The motor body bonding assembly shall not collapse, separate or break up in the gun bore or in flight.

3.7 Nozzle Insert.


3.7.1 Compression test. The nozzle insert shall withstand a compression load of 1800 pounds, minimum without cracking or breaking up when tested as specified in 4.4.3.6.1.

3.7.2 X-ray. (See Figure 1)

Zone A - There shall be no voids in Zone A greater than 0.030 inch in diameter.

Zone B - There shall be no voids greater than 0.060 inch in diameter. There shall be no voids greater than 0.030 inch in diameter which are closer than 0.060 inch apart.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the current version before use.

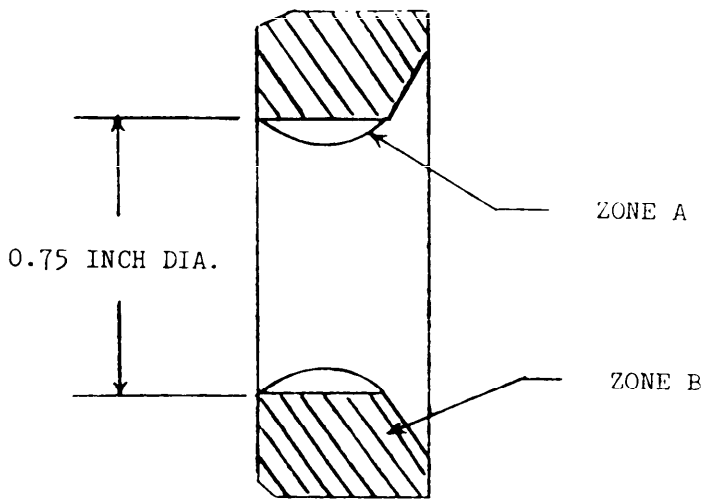

NOZZLE INSERT

FIGURE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

3.8 First Article Inspection. This specification makes provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.9 Workmanship. The requirements for workmanship are as shown on the applicable drawing in the applicable specification and the following:

3.9.1 Surface preparation. Preparation of metal surfaces shall be as specified on the applicable drawings and in the applicable specifications referenced thereon. Where cleaning and preparation are required by component details, the finish specified shall apply to indicated surfaces regardless of contour configuration.

3.9.2 Painting. Painting shall comply with the requirements of the applicable drawings. All paint shall be dry to the touch before packing for shipment. Drying time prior to testing shall be in accordance with the applicable specification.

3.9.3 Threads. Threads shall be full and undamaged for the entire minimum length or depth as specified on the applicable drawing, and shall be in accordance with the provisions of specification MIL-A-2550.

3.9.4 Burr. No part shall have a burr which might interfere with the assembly or function of the round or which might be injurious to personnel handling the item.

3.9.5 Foreign matter. No part or assembly shall contain dirt, grease, chips, rust, corrosion or other foreign matter.

3.9.6 Surface finish. The requirements for surface finish are as detailed on the applicable drawings. The roughness comparison specimens prescribed by ANSI-B46.1 shall be used as a basis for surface roughness determination.

3.9.7 Protection of rotating band. The machined rotating band shall be protected from being nicked, burred or otherwise damaged in subsequent handling prior to shipment.

3.10 Process control dimensions. The contractor shall prepare a process control plan for the dimensions marked process control. The plan shall be submitted to the technical agency for approval prior to use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item:

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated.

Part Description	Drawings	Quantity
Finished Machined Body Bonding Assemblies, Painted	9235979	20
Finished Machined Motor Bodies, Unpainted and Unknurled	9235977	15
Nozzle Inserts	9235978	20
Unbanded Motor Bodies	9235977	5

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein. Visual standards for examination of band seat after chemical removal of rotating band shall be prepared from the first article sample for acceptable visible intergranular penetration and proper distribution of arc cratering.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH CATEGORY	TITLE / EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	DRAWING NUMBER / NEXT HIGHER ASSEMBLY / PARAGRAPH REFERENCE /INSPECTION METHOD
	Motor Body Bonding Assembly		SHEET 1 OF 1		See Below
	Finished Machined Body Bonding Assemblies, Painted (Dwg. 9235979)				
	Examination for Defects	20	-	3.2	4.4.2.4 except MN201/ 4.4.2.6
	Ballistic Test	20	-	3.6	4.5.5
	Finished Machined Motor Bodies, Unpainted and Unknurled (Dwg. 9235977)				
	Examination for Defects	15	-	3.2	4.4.2.2/4.4.2.3
	Magnetic Particle Test	15	-	3.4	4.5.3
	Hydrostatic Test	15	-	3.5	4.5.2
	Properties of Rotating Band	2	-	3.3	4.4.3.4, 4.5.3
	Hydrogen Embrittlement Relief	2	-	3.2	4.4.3.5
	Mechanical Properties of Motor Body	2	-	3.4	4.4.3.3
	Nozzle Inserts (Dwg. 9235978)				
	Examination for Defects	20	-	3.2	4.4.2.5
	Compression Test	5	-	3.7.1	4.5.4.1
	Radiographic Inspection	20	-	3.7.2	4.5.4.2
	Unbanded Motor Bodies (Dwg. 9235977)				
	Examination for Defects	5	-	3.2	4.4.2.1

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 20240-26T04:02Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078 and the following:

4.4.1.1 Heat treatment inspection lot. Heat treatment inspection lots shall not exceed one mill heat of steel or 500 components, whichever is smallest. Whenever a break in heat treating of eight (8) hours or more occurs or a furnace is shut down for any length of time, the heat treatment inspection lot will be terminated and a new lot shall start. Additionally, heat treatment inspection lots shall be restricted to components heat treated in the same heat treating equipment, at the same temperature, for the same length of time and in one unchanged process. When a batch type furnace is used, the heat treatment inspection lot shall be further restricted to those components heat treated at the same time in one batch. Batches may be combined into larger heat treatment inspection lots after qualifying with individual batches provided qualifying procedures are submitted to and approved by the Government and provided all the other restrictions detailed above are met. Test samples shall be selected from the heat treatment inspection lot after final heat treatment. Components in heat treatment inspection lots shall remain grouped together and identified by inspection lot until mechanical property tests have been completed. Components from heat treatment inspection lots which comply with applicable requirements may be subsequently regrouped into final assembly lots.

4.4.2 Examination. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9235977
4.4.2.1	Motor Body, Prior to Banding				NEXT HIGHER ASSEMBLY 9235979
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined.				
Major					
101	Diameter of rotating band groove		0.40%	3.2	Gage
Minor					
201	Surface finish of band groove improper		0.65%	3.2	Visual
202	Width of band groove		0.65%	3.2	Gage
203	Evidence of poor workmanship		1.0%	3.9	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.2	Motor Body after Banding and Prior to Knurling and Hydrotesting		9235977
			NEXT HIGHER ASSEMBLY 9235979

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None Defined.				
Major					
101	Distance end surface to end of full form thread		0.40%	3.2	Gage
102	Runout of thread pitch diameter to outside diameter (at two projected tolerance zones)		0.40%	3.2	Gage
103	Thread runout gage not seated on Datum-B-		0.40%	3.2	Gage
104	Length of thread counterbore		0.40%	3.2	Gage
105	Depth of undercut forward of rotating band, max.		0.40%	3.2	Gage
Minor					
201	Distance threaded end surface to shoulder of step behind largest cavity with threads		0.65%	3.2	Gage
202	Length of largest cavity with threads		0.65%	3.2	Gage
203	Total length of motor body		0.65%	3.2	Gage
204	Distance threaded end surface to end of thread or thread undercut (as applicable) (max.)		0.65%	3.2	Gage
205	Distance threaded end surface to rotating band (leading edge above motor body outside diameter)		0.65%	3.2	Gage
206	Location of forward copper/steel interface not within undercut		0.65%	3.2	Gage
207	Evidence of poor workmanship		1.0%	3.9	Visual
208	Width of undercut forward of rotating band, max.		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50559C(AR)

PARAGRAPH	TITLE	SHEET 1 OF 4	DRAWING NUMBER
4.4.2.3	Motor Body, after Banding, Knurling, Hydrostatic Testing, and Prior to Painting		9235977
			NEXT HIGHER ASSEMBLY 9235979

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Hydrostatic Test		Note a	3.5	4.5.2
2	Magnetic Particle Test		100%	3.4	4.5.3
3	Magnetic Particle Test Stamp missing		100%	3.2	Visual
Major					
101	Surface finish of thread counterbore		0.40%	3.2	Visual
102	Mechanical Properties of motor body		Note b	3.4	4.4.3.3
103	Properties of rotating band		Note c	3.3	4.4.3.4, 4.5.3
104	Thread pitch diameter (max.)		0.25%	3.2	Gage
105	Minor thread diameter (max.)		100%	3.2	Gage
106	Motor body outside diameter		0.40%	3.2	Gage
107	Inside diameter of largest cavity with threads		0.40%	3.2	Gage
108	Inside diameter of step adjacent to largest cavity with threads		0.40%	3.2	Gage
109	Inside diameter of cavity with taper		0.40%	3.2	Gage
110	Runout of rotating band outside diameter with outside diameter of motor body		0.40%	3.2	Gage
111	Outside diameter of rotating band		0.40%	3.2	Gage
112	Location of large basic diameter in exit cone		0.40%	3.2	Gage
113	Location of small basic diameter in exit cone		0.40%	3.2	Gage
114	Location of small basic diameter on boattail		0.40%	3.2	Gage
115	Location of large basic diameter on boattail		0.40%	3.2	Gage
116	Length of exit cone		0.40%	3.2	Gage

NOTES:
a. See paragraph 4.4.3.1.
b. See paragraph 4.4.3.3.
c. See paragraph 4.4.3.4.

DD 13-0M Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE		SHEET 2 OF 4		DRAWING NUMBER
4.4.2.3	CONTINUATION SHEET				9235977
					NEXT HIGHER ASSEMBLY 9235979
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
117	Runout of large basic diameter in exit cone with outside diameter		0.40%	3.2	Gage
118	Location of large basic diameter in cavity with taper		0.40%	3.2	Gage
119	Location of small basic diameter in cavity with taper		0.40%	3.2	Gage
120	Diameter of small cavity adjacent to small end of exit cone (max.)		0.40%	3.2	Gage
121	Runout of small cavity adjacent to small end of exit cone with outside diameter		0.40%	3.2	Gage
122	Shoulder at small end of exit cone perpendicular to small cavity at small end of exit cone		0.40%	3.2	Gage
123	Knurl missing or inadequate		100%	3.2	Visual
124	Circular runout of cavity with taper at 6.00 ± .06		0.40%	3.2	Gage
125	Runout of largest cavity with threads at 1.25 inch and 4.00 ± .06 inch		0.40%	3.2	Gage
126	Runout of step adjacent to largest cavity with threads with outside diameter		0.40%	3.2	Gage
127	Runout of small basic diameter in cavity with taper with outside diameter		0.40%	3.2	Gage
128	Diameter of thread counterbore		0.40%	3.2	Gage
129	Runout of thread counterbore with outside diameter		0.40%	3.2	Gage
130	Diameter of thread undercut (Note a)		0.40%	3.2	Gage

NOTES:

a. If the optional thread undercut is used, this inspection shall be made in addition to the other major defects listed.

DRO[illegible]A Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE	SHEET 3 OF 4	DRAWING NUMBER
4.4.2.3	CONTINUATION SHEET		9235977
			NEXT HIGHER ASSEMBLY 9235979

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Length of cavity with taper		0.65%	3.2	Gage
202	Diameter of counterbore adjacent to large end of exit cone		0.65%	3.2	Gage
203	Total length of counterbore adjacent to large end of exit cone		0.65%	3.2	Gage
204	Width of groove in counterbore adjacent to large end of exit cone		0.65%	3.2	Gage
205	Depth of groove in counterbore adjacent to large end of exit cone		0.65%	3.2	Gage
206	Location of groove in counterbore adjacent to large end of exit cone		0.65%	3.2	Gage
207	Diameter of grooves in rotating band		0.65%	3.2	Gage
208	Profile of rotating band		0.65%	3.2	Gage
209	Inside diameter of boattail		0.65%	3.2	Gage
210	Radius in step adjacent to largest cavity with threads missing or improper		0.65%	3.2	Visual
211	Slots missing or mislocated in counterbore adjacent to large end of exit cone		0.65%	3.2	Visual
212	Surface finish of exit cone		0.65%	3.2	Visual
213	Chamfer on thread counterbore missing or improper		0.65%	3.2	Visual
214	Chamfer on counterbore adjacent to large end of exit cone missing or improper		0.65%	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE		SHEET 4 OF 4		DRAWING NUMBER
4.4.2.3	CONTINUATION SHEET				9235977
					NEXT HIGHER ASSEMBLY 9235979
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
215	Radius at intersection of bulkhead and exit cone projection missing or improper		0.65%	3.2	Visual
216	Radius at intersection of bulkhead and boat-tail missing or improper		0.65%	3.2	Visual
217	Radius in counterbore adjacent to large end of exit cone missing or improper		0.65%	3.2	Visual
218	Radius in small cavity adjacent to small end of exit cone missing or improper		0.65%	3.2	Visual
219	Diameter of band seat adjacent to rotating band		0.65%	3.2	Gage
220	Runout of band seat diameter adjacent to rotating band		0.65%	3.2	Gage
221	Runout of counterbore adjacent to large end of exit cone		0.65%	3.2	Gage
222	Wall thickness of counterbore adjacent to large end of exit cone		0.65%	3.2	Gage
223	Length of small cavity adjacent to small end of exit cone		0.65%	3.2	Gage
224	Surface finish improper		0.65%	3.2	Visual
225	Evidence of poor workmanship		1.0%	3.9	Visual

NOTES:

DRDSTA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.4	Motor Body, after Painting		9235977
			NEXT HIGHER ASSEMBLY 9235979

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Outside diameter of motor body (max.)		100%	3.2	Gage
102	Thread pitch diameter (min.)		0.25%	3.2	Gage
103	Inside diameter of step adjacent to largest cavity with threading (min.)		0.40%	3.2	Gage
104	Salt Spray Test		Note a	3.2	4.5.6
105	Protective coating thickness		Note a	3.2	4.5.6
Minor					
201	Diameter of small cavity adjacent to small end of exit cone (min.)		0.65%	3.2	Gage
202	Protective finish incomplete or damaged, exposing base metal		0.65%	3.2	Visual
203	Marking missing, misleading, incomplete or illegible		0.65%	3.2	Visual
204	Evidence of poor workmanship		1.0%	3.9	Visual

NOTES:
a. See Paragraph 4.4.3.8.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.5	Insert, Nozzle		9235978
			NEXT HIGHER ASSEMBLY 9235979

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Outside diameter		0.40%	3.2	Gage
102	Runout of end surface containing small diverging cavity		0.40%	3.2	Gage
103	Diameter of surface at small diverging cavity		0.40%	3.2	Gage
104	Runout of cavity at .05 location with outside diameter		0.40%	3.2	Gage
105	Chamfer missing or improper		0.40%	3.2	Visual
106	Surface finish of inside profile improper		0.40%	3.2	Visual
107	Throat diameter		0.40%	3.2	Gage
108	Compression Test	5/Lot		3.7.1	4.5.4.1
109	Grain Flow		100%	3.2	4.4.3.6.2
110	Radiographic Inspection		100%	3.7.2	4.5.4.2
Minor					
201	Diameter at large diverging cavity		0.65%	3.2	Gage
202	Flat, max.		0.65%	3.2	Gage
203	Runout of throat diameter with outside diameter		0.65%	3.2	Gage
204	Total length		0.65%	3.2	Gage
205	Evidence of poor workmanship		1.0%	3.9	Visual

NOTES:

DRDA[illegible] Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Motor Body Bonding Assembly				9235979
					NEXT HIGHER ASSEMBLY 9236005
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Proving Ground Test	Note a		3.6	4.5.5
Major					
101	Nozzle insert not properly bonded		100%	3.2	Manual
102	Nozzle insert not flush or below		0.40%	3.2	Gage
103	Insert assembled in proper position		0.40%	3.2	Gage
104	Excess adhesive in motor cavity		0.40%	3.2	Visual
Minor					
201	Rust or corrosion on motor body		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.0%	3.9	Visual

NOTES:

a. See Pargraph 4.4.3.7.2.

DRDSR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50569C (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Packaging		8837835
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	Pallet damaged (unserviceable)		0.65%	3.2	Visual
202	Improperly packed		0.65%	3.2	Visual
203	Strapping missing, loose or broken		0.65%	3.2	Visual
204	Marking missing, incorrect or illegible		0.65%	3.2	Visual
205	Box split or broke		0.65%	3.2	Visual

NOTES:

DRD[illegible] Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:02Z
Check the source to verify that this is the current version before use.

4.4.3 Testing.

4.4.3.1 Hydrostatic test. This test shall be performed on finish machine, unpainted motor bodies. The test shall be conducted on a 100 percent basis until 3,200 consecutive units have been hydrostatically tested without failure. After this criteria has been met, the motor bodies to be tested shall be selected in accordance with the following continuous type sampling plan: Randomly select motor bodies at a rate of one (1) out of each ten (10) manufactured. Whenever the production process is interrupted by more than five (5) days or homogeneity, as defined in paragraph 4.4.1, does not exist, a qualification quantity of 400 consecutive units shall be tested without failure before sampling inspection is initiated or reinstated. In the event of a test failure during sampling inspection, all motor bodies not hydrostatically tested from the previous 400 units manufactured shall be hydrostatically tested. In addition, before returning to sampling inspection, an additional 400 consecutive units shall be hydrostatically tested without failure. After completion and acceptance or the hydrostatic test, the part tested and only those parts actually tested and accepted shall be immediately identified by steel sampling the letter "H", .12 inch high x .01 inch max. depth, on the leading (chamfered) surface of the rotating band.

4.4.3.2 Magnetic particle. This test shall be conducted 100 percent. Hydrostatic testing as required shall be conducted prior to this test. Each banded finished machined motor body shall be magnetic particle inspected in accordance with 4.5.3 and specification MIL-I-6868. If any motor body fails to meet the requirements of 3.4, that motor body shall be rejected.

4.4.3.3 Mechanical properties of motor body.

4.4.3.3.1 Hardness. Each banded motor body from a heat-treated lot shall be identified and subjected to a hardness test on the surface indicated. Three (3) hardness readings shall be taken approximately 120 degrees apart. The test shall be conducted in accordance with ASTM Method E18. The 3 hardness readings thus obtained shall be averaged and used as the basis for selecting the tension test samples of paragraph 4.4.3.3.2.

4.4.3.3.2 Tension test (see 4.4.3.3.1). Two banded motor bodies from the same heat treat lot shall be selected for this test (one motor body from the highest hardness reading and one motor body from the lowest hardness reading). From each of these motor bodies, three longitudinal specimens shall be tested to provide yield strength and elongation data. One specimen shall be taken from the side wall near the boattail. The second

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:02Z
Check the source to verify that this is the current version before use.

specimen shall be taken with the gage length of the specimen directly beneath the rotating band. The third specimen shall be taken from the side wall of the threaded cavity near the motor body thread. Testing shall be conducted in accordance with ASTM, Method E8 with a sub-standard size round specimen with a one inch gage length.

4.4.3.3.2.1 Retest. If the high hardnes motor body fails the yield strength requirement, the entire heat treatment inspection lot shall be rejected. In the event the lowest hardness motor body fails to meet the yield strength requirement, higher hardness values may be selected and tested in accordance with 4.4.3.3.2 in order to establish the acceptance minimum hardness. Once this minimum hardness has been established, all motor bodies with hardness values below the new minimum shall be rejected. Failure to meet elongation regardless of hardness shall be cause for rejection of the entire inspection lot. Rejected motor bodies may be retempered or completely reheat treated at 500° Fahrenheit (F) to 1000°F for 15 minutes minimum prior to austenitizing. In addition, motor bodies shall not have subsequent machining operations that leave sharp corners that could cause cracking during heat treatment. The effectiveness of the reheat treating or retemper cycle shall be determined by reheat treating or retempering the remaining portion of the motor body sample that failed with the lot and then by retesting the sample after reheat treatment or retemper. In addition, one (1) sample motor body with the highest hardness and one (1) sample motor body with the lowest hardness after reheat treatment or retemper shall be selected and tested in accordance with 4.4.3.3.2. If no portion of the originally rejected motor body remains, then two (2) sample motor bodies shall be selected and tested with the highest hardness values and two (2) sample motor bodies shall be selected and tested with the lowest hardness values. Failure of any specimen to comply with either yield strength or elongation requirements shall be cause for rejection of the reheat treated or retempered lot.

4.4.3.4 Rotating band. A sample shall be taken, for chemical analysis and minimum penetration, from each overlay band machine, from each eight (8) hour shift or fraction of a shift from machines in use. The randomly selected motor bodies to be used as samples, and all bodies they represent, shall be identified for each machine and shift until all tests and examinations of 4.4.3.4 are complete. The bodies selected are not required to be heat treated.

4.4.3.4.1 Chemical analysis. The iron content of the copper shall be determined by chemical analysis of chips machined from the copper overlay. The chips for the sample

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

shall consist of copper overlay between 6.212-.005 and 6.162-.005 inches diameter. All of the chips shall be collected and crushed, with a sample portion of 20 ± 5 grams then randomly selected and dissolved. Chemical analysis shall be conducted in accordance with Federal Test Method Standard No. 151 except that the sample shall not be cleaned with a magnet. Samples having iron content of 2.0 percent max. shall be considered acceptable. Any sample having iron content 2.0 to 3.0 percent max. shall be considered acceptable upon demonstration of compliance, for that sample's base metal, with the requirements of 3.3.2 and 3.3.3 (per 4.4.3.4.3). Any sample having iron content in excess of 3.0 percent, and that portion of production represented by that sample, shall be considered rejected.

4.4.3.4.2 Minimum penetration. Each sample motor body selected in accordance with 4.4.3.4 shall be inspected for minimum base metal penetration. The remanent rotation band shall be dissolved by any method which will not damage the weld interface surface. The remanent band may be machined to 6.040 inches minimum diameter prior to dissolving the remaining copper. The surface shall be visually observed for minimum penetration as follows:

a. The sample shall be considered acceptable if the quantity and distribution of arc cratering equal or exceed that of the appropriate visual standards.

b. The sample shall be considered acceptable if the visible intergranular penetrants, under magnetic particle inspection, equal or exceed those of the appropriate magnetic particle standard.

c. The sample shall be considered acceptable if all of the following conditions are satisfied:

1. No uncratered area exceeds one square inch.

2. The sum of uncratered areas does not exceed six (6) square inches.

3. Uncratered areas are separated by 1/2 inch minimum.

4. No uncratered area is within 1/4 inch of the leading or trailing edge of the band seat.

5. Each uncratered area, when examined by magnetic particle inspection, exhibits four (4) or more intergranular penetrants.

Any sample failing to meet at least one of the above criteria, and that portion of production represented by that sample, shall be considered rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.4.3.4.3 Maximum penetration and cracks. Every third day's sample, from each band machine selected in accordance with 4.4.3.4 shall be examined for maximum penetration and cracks. Any sample failing to meet the applicable criteria, when examined in accordance with 4.4.3.4.3.1, 4.4.3.4.3.2 and 4.4.3.4.3.3, and that portion of production represented by that sample, shall be considered rejected. If the third day's sample is rejected, the second day's sample may be examined for acceptance of the two day's production, from that machine which the sample represents. If the second day's sample, and production represented by that sample, is rejected, the first day's sample may be examined for acceptance of that day's production.

4.4.3.4.3.1 Maximum penetration (other than starting weld pass). The sample band seat shall be machined to a minimum diameter of 5.950 inches. The band surface shall be visually examined for presence of arc cratering, except for the area at the start of the weld pass. The starting weld pass area is defined as 1/2 inch maximum on each side of the start-stop weld center line.

4.4.3.4.3.2 Cracks. Upon completion of 4.4.3.4.3.1, the band seat shall be machined to a minimum diameter of 5.910 inches. The entire band seat area shall be examined, by magnetic particle inspection, for cracks and intergrannular penetrants. The presence of indications in the starting weld pass area shall not be cause for rejection. If the entire band seat area is free of indications under magnetic particle inspection, and free of arc craters under visual examination, the sample shall be considered final accepted and examination under 4.4.3.4.3.3 is not required.

4.4.3.4.3.3 Maximum penetration and cracks (including starting weld pass). Upon completion of 4.4.3.4.3.2, and if required, the band seat shall be machined to a minimum diameter of 5.850 inches. The entire band seat area shall be visually examined for the presence of arc cratering, and examined by magnetic particle inspection for cracks and intergrannular penetrants. Presence of any craters, cracks or penetrants shall be cause for rejection of the sample and all production represented by the sample.

4.4.3.5 Hydrogen embrittlement relief. The contractor shall comply with the requirements of TT-C-490. For verification, the contractor shall submit a certificate of compliance that motor bodies have been relieved of hydrogen embrittlement.

4.4.3.6 Nozzle insert.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

4.4.3.6.1 Compression tests. A sample of five (5) nozzle inserts from each lot shall be compression tested in accordance with 4.5.4.1. If any piece fails to meet the minimum compression load requirement of 3.7.1, the lot shall be rejected.

4.4.3.6.2 Grain flow. A certificate of compliance shall be submitted with each lot that the grain flow of the nozzle insert is in accordance with the drawing. The contractor shall show evidence that adequate controls are being maintained in processing the nozzle insert from the billet or sheet to finished component to assure proper grain flow direction.

4.4.3.6.3 Radiographic inspection. This test shall be conducted 100 percent. The test shall be conducted in accordance with 4.5.4.2. If any nozzle insert fails to meet the requirements of 3.7.2, that piece shall be rejected.

4.4.3.7 Proving ground tests.

4.4.3.7.1 First article test. Twenty (20) motor body bonding assemblies from the first article sample shall be subjected to this test. If any of the sample motor body bonding assemblies fail to meet the requirements of 3.6, the first article sample shall be rejected. Range and deflection shall be recorded for information only. The test shall be conducted as specified in 4.5.5.

4.4.3.7.2 Production test. Beginning with the first lot produced and continuing until three consecutive lots have complied with the acceptance criteria specified herein, twenty motor body bonding assemblies shall be selected at random from each lot for this test. If any of the sample assemblies fail to meet the requirements of 3.6, the lot shall be rejected. After three consecutive lots have complied with the acceptance criteria, ten samples shall be selected at random from each lot and tested. If any sample motor body bonding assembly fails to meet the requirements of 3.6, the lot shall be rejected. Range and deflection shall be recorded for information only. The test shall be conducted as specified in 4.5.5.

4.4.3.8 Protective coating. The sample size and acceptance criteria, the inspection of cleaning the item and the application of protective coating shall be as specified in the applicable specification. Failure to comply with the requirements of TT-C-490 shall be cause for taking the corrective action prescribed therein.

4.4.3.8.1 Salt spray. The sample size and acceptance criteria for salt spray shall be in accordance with applicable specification. Failure to comply with the requirements of the applicable drawing and TT-C-490 shall be cause for taking the corrective action prescribed therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.4.3.8.2 Protective coating - thickness. Two samples shall be selected at random to represent each four-hour period, or less, of continuous paint production. The samples shall be inspected using the equipment in accordance with 4.5.6.2. The sample motor bodies shall be inspected for paint coating thickness at a minimum of four separate locations on each motor body. Any motor body failing to meet the applicable requirements shall be classed defective and every motor body painted since the last acceptable sample shall be rejected.

4.4.3.9 Tool control dimensions.

a. Dimensions marked tool control shall be gaged at the beginning or end of each working day (24 hrs.), during First Article Inspection and for the first component after each tooling change, adjustment or repair. Where destruction of the component is necessary to gage such dimensions, measurements of the tool may be substituted providing the contractor has established correlation between the tool dimensions and the component dimensions prior to the start of production.

b. When the contractor has satisfied (a) above, visual inspection of the tool control dimensions(s) will be permitted. Visual inspection shall be performed every two (2) hours for each machine in operation. If any tool control dimension(s) is in doubt during visual inspection, the dimension(s) shall be immediately gaged to determine acceptability. Corrective action will immediately be instituted by the contractor whenever a defective tool control dimension is found.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the Paragraph Reference/Inspection Method column in the tables starting with paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

4.5 Methods of inspection.

4.5.1 Materials, components and processes. Compliance with all requirements of Section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that all components (parts, subassemblies and materials) have been inspected and tested and found to comply with their respective drawing and specification's requirements, and that all specified manufacturing processes have been followed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.5.1.1 Visual and mechanical inspections. The visual, manual and mechanical inspections and tests shall verify compliance with the requirements of Section 3 and 5 of this specification in accordance with 4.4.2 herein and Table I.

4.5.2 Hydrostatic test. The motor body shall be mounted in a suitable test fixture in accordance with Dwg. 9201550 and tested to the pressure specified on Dwg. 9235977. The motor shall be temporarily marked at two locations on the outside diameter, one 90 degrees from the other. Measurements, of the outside diameter, shall be taken at the marked location before and after the hydrostatic test in the region indicated on the drawing, and the results recorded.

4.5.3 Magnetic particle inspection. The inspection shall be in accordance with specification MIL-I-6868 using the continuous, wet, fluorescent method. During inspection in accordance with 4.4.3.2, the suspension shall first be applied to all surfaces of the entire motor body. When inspection is in accordance with 4.4.3.4.2 or 4.4.3.4.3, only the machined area beneath the rotating band must be covered with suspension. The magnetic solid content of the suspension shall be maintained at 0.2 - 0.4 mililiters (ml) of solids per 100 mls of suspension when oil is used and 0.15 - 0.35 mls of solids per 100 mls suspension when water is used. Three applications of the magnetic field shall be made on the motor body with a minimum of 2,500 ampers (2800 perferred) per application. After draining the excess suspension, the motor body shall be inspected under ultra-violet light for the presence of defects. The adequacy of the inspection process shall be checked at the start of the daily production and at eight-hour intervals thereafter using a standard in accordance with Dwg. 9278624. All plugs in the standard shall be clearly defined for a full 360 degrees both inside and out. If the inspection process is determined to be inadequate, the condition shall be corrected and the proceeding 8 hours production shall be reinspected. The requirement of specification MIL-I-6868 to check system effectiveness by means of steel ring specimen shall be waived. The operator(s) of the equipment and the inspector(s) making the determination shall be certified in accordance with MIL-STD-410. Components which exhibit indications which are suspected of being shallow surface defects may have material removed to a maximum of 0.005 inches subject to the following restrictions:

a. These provisions for the removal of additional material shall not apply to the inspections beneath the rotating band on the samples selected in accordance with 4.4.3.4.

b. Involved areas shall be blended with adjacent surfaces to insure that no sharp edges, steps or gouges remain.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

c. The involved areas shall be independently checked for verification that all drawing dimensions (wall thickness, variations, etc.) are within acceptable limits.

d. The components shall be again subjected to magnetic particle inspection for verification of defect removal.

4.5.4 Nozzle insert.

4.5.4.1 Compressive test. The sample nozzle inserts shall be tested at a loading rate of 0.02 inch per minute. The nozzle insert shall be placed in the machine with the chamfered end down and the load applied axially to the large diverging cavity surface. If the nozzle insert meets the minimum load requirement, the load shall be applied until the insert cracks or breaks up and the load recorded for informational purposes.

4.5.4.2 Radiographic test. The nozzle inserts shall be radiographed with the large diverging cavity down and the radiographic beam parallel to the longitudinal axis. Radiographic inspection shall be in accordance with MIL-STD-453. The penetrameter shall be designed so as to assure a 2 percent sensitivity and the film density shall be 1.50 minimum.

4.5.5 Proving Ground. These tests shall be performed at a Government Proving Ground in accordance with the applicable Acceptance Test Procedure. The sample motor body bonding assemblies selected in accordance with 4.4.3.7 shall be loaded and assembled as specified on Dwg. 9236005 and fired at ambient temperature in a M185 or M199 series Cannon using a PXR-6297 proof charge. The propelling charges shall be uniformly temperature conditioned to +145°F minus 5°F for a minimum of 12 hours prior to the test. Pressure-time traces and differential pressure shall be obtained for information only for each round fired by means of a spindle tap in the breech of the cannon and a piezo gage at the projectile base location. Adequate photographic and instrumental coverage shall be provided to assure compliance with 3.6. Range and deflections shall be recorded for informational purposes only. Recovery and examination of metal parts for any abnormal condition shall be accomplished for information only.

4.5.6 Protective coating. The procedures for testing the cleaning of components and the application of protective coating shall be in accordance with the requirements of the applicable drawing and the specification listed thereon.

4.5.6.1 Salt spray testing. Salt spray testing shall be accomplished on production or sectioned motor bodies that were acceptable at the time of painting. If sectioned motor bodies

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

are used, sectioning shall be accomplished to allow testing of all major areas of the projectile on an alternating basis. The salt spray test shall be performed utilizing the equipment and procedures specified by Federal Test Method Standard No. 141 and TT-C-490.

4.5.6.2 Protective coating - thickness. Protective coating thickness testing shall be accomplished using commercially available equipment.

5. PACKAGING.

5.1 Packaging requirements. Minimum Military Package: Pack one Body, Motor for M549, in a RSC Style, "B" Flute, Type CF, domestic class, SW variety, Grade 175 min. Spec PPP-B-636, Fiberboard box. Inside dimensions of fiber box to be 6-3/8 inch x 6-3/8 inch x 10-3/4 inch high (Tolerance on dimension = + 1/16 inch). Body, Motor to be placed base down in box and 6-1/4 inch x 6-1/4 inch x .06 inch thick commercial chipboard filler placed on top adjacent to the knurled end of the motor. Additional filler shall be added for tight packing. Flaps of fiber box to be sealed in accordance with Spec PPP-B-636. The packed fiber box shall be placed in a Type I, Class E, Spec MIL-B-117 barrier bag. Prior to sealing bag, exhaust all excess air. Size of bag to be 14 inch min. x 20-1/2 inch min.

5.2 Packing. Minimum Military Package: 36 packaged motor bodies shall be placed vertical in a 6 x 6 pattern on a wood pallet in accordance with Dwg. F8837835. Pallet to be packed and strapped in accordance with Dwg. F8837835.

5.3 Marking.

5.3.1 Fiber box. Marking of fiber box and bag to be with black stencil ink Spec TT-I-1795. Label may be used on fiber box. Size of letters 1/8 inch min. Marking on the fiber box to be centrally located on one side. Marking on bag to be so positioned that it appears on the side of the box. Mark as follows:

1 Body, Motor for M549
Lot No. _____ Date Packed _____

5.3.2 Pallet. Marking of pallet to be in accordance with Dwg. C8861520. Descriptive Nomenclature: 36 -- Body, Motor for M549. Lot No. _____.

6. NOTES.

6.1 Intended use. The components covered by this specification are intended for use on the M549, 155MM, HE, Rocket Assisted Projectile Family.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment for design approvals. See MIL-A-48078. Submit designs as required to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAR-I, Dover, New Jersey 07801.

6.4 Data requirements. Data cards shall be prepared for each lot in accordance with the information specified in MIL-STD-1167.

6.5 Inspection lots. It is noted that the size of inspection lots of components, assemblies or items of delivery may differ from the actual quantities contractually scheduled for delivery. However, in order to facilitate scheduling of tests or deliveries, inspection lots of items of delivery may be equivalent to such contract quantities provided all of the lot formation criteria and sampling provisions of this specification are maintained.

6.6 Visual examination qualification. When compliance with the applicable requirement is in doubt as a result of visual examination, the characteristic may be measured or gaged to determine acceptability.

6.7 Proving Ground Test Summary.

Test	Sample Size (See 4.4.3.7)		Requirements
Security	*20	10	No Collapse, deformation or break-up (See 3.6)

*Applicable only for First Article Test and first three lots.

6.8 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data, originally prepared by these activities, is now under the cognizance of ARRADCOM.

6.9 Submission of ballistic test data. In addition to the normal distribution of records for items procured by the Department of the Army, two copies of all ballistic test data reports shall be forwarded to Commander, ARRADCOM, ATTN: DRDAR-QAR-Q and DRDAR-LCU-DI, Dover, New Jersey 07801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

6.10 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army - AR

Preparing activity:
Army - AR

(Project 1320-A596)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.