MIL-STD-1323/[illegible]
(NAVY)

2[illegible] AUGUST 19[illegible]

MILITARY STANDARD

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
FUZE, BOMB FMU-139/B
IN CONTAINER M548

UNIT LOAD DATA

NUMBER OF FUZES PER CONTAINER	9
NUMBER OF CONTAINERS PER UNIT LOAD	24
NUMBER OF FUZES PER UNIT LOAD	216
GROSS WEIGHT OF ONE CONTAINER	48 LBS
WEIGHT OF WOOD FRAMES	2[illegible] LBS
WEIGHT OF STEEL STRAPPING	[illegible] LB
WEIGHT OF PALLET	94 LBS
GROSS WEIGHT OF UNIT LOAD	1270 LBS △
CUBE	39.[illegible] CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
5 UNIT LOADS HIGH IN STORAGE

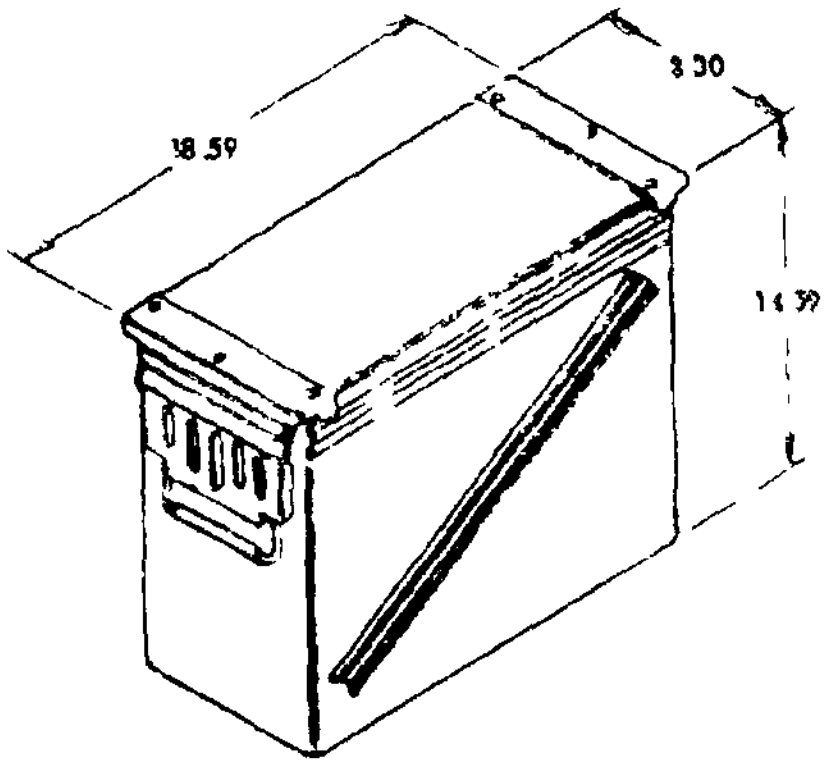

CONTAINER MECH DWG
19200 [illegible]5994

HAZARD CLASSIFICATION

DODIC/NALC NO	FUZE	HAZARD CLASS DOT	CC
F76[illegible]	FMU 139/B	A	VI
F81[illegible]	FMU 139(D-2)/B	INERT	INERT

AMSS NO - N/A

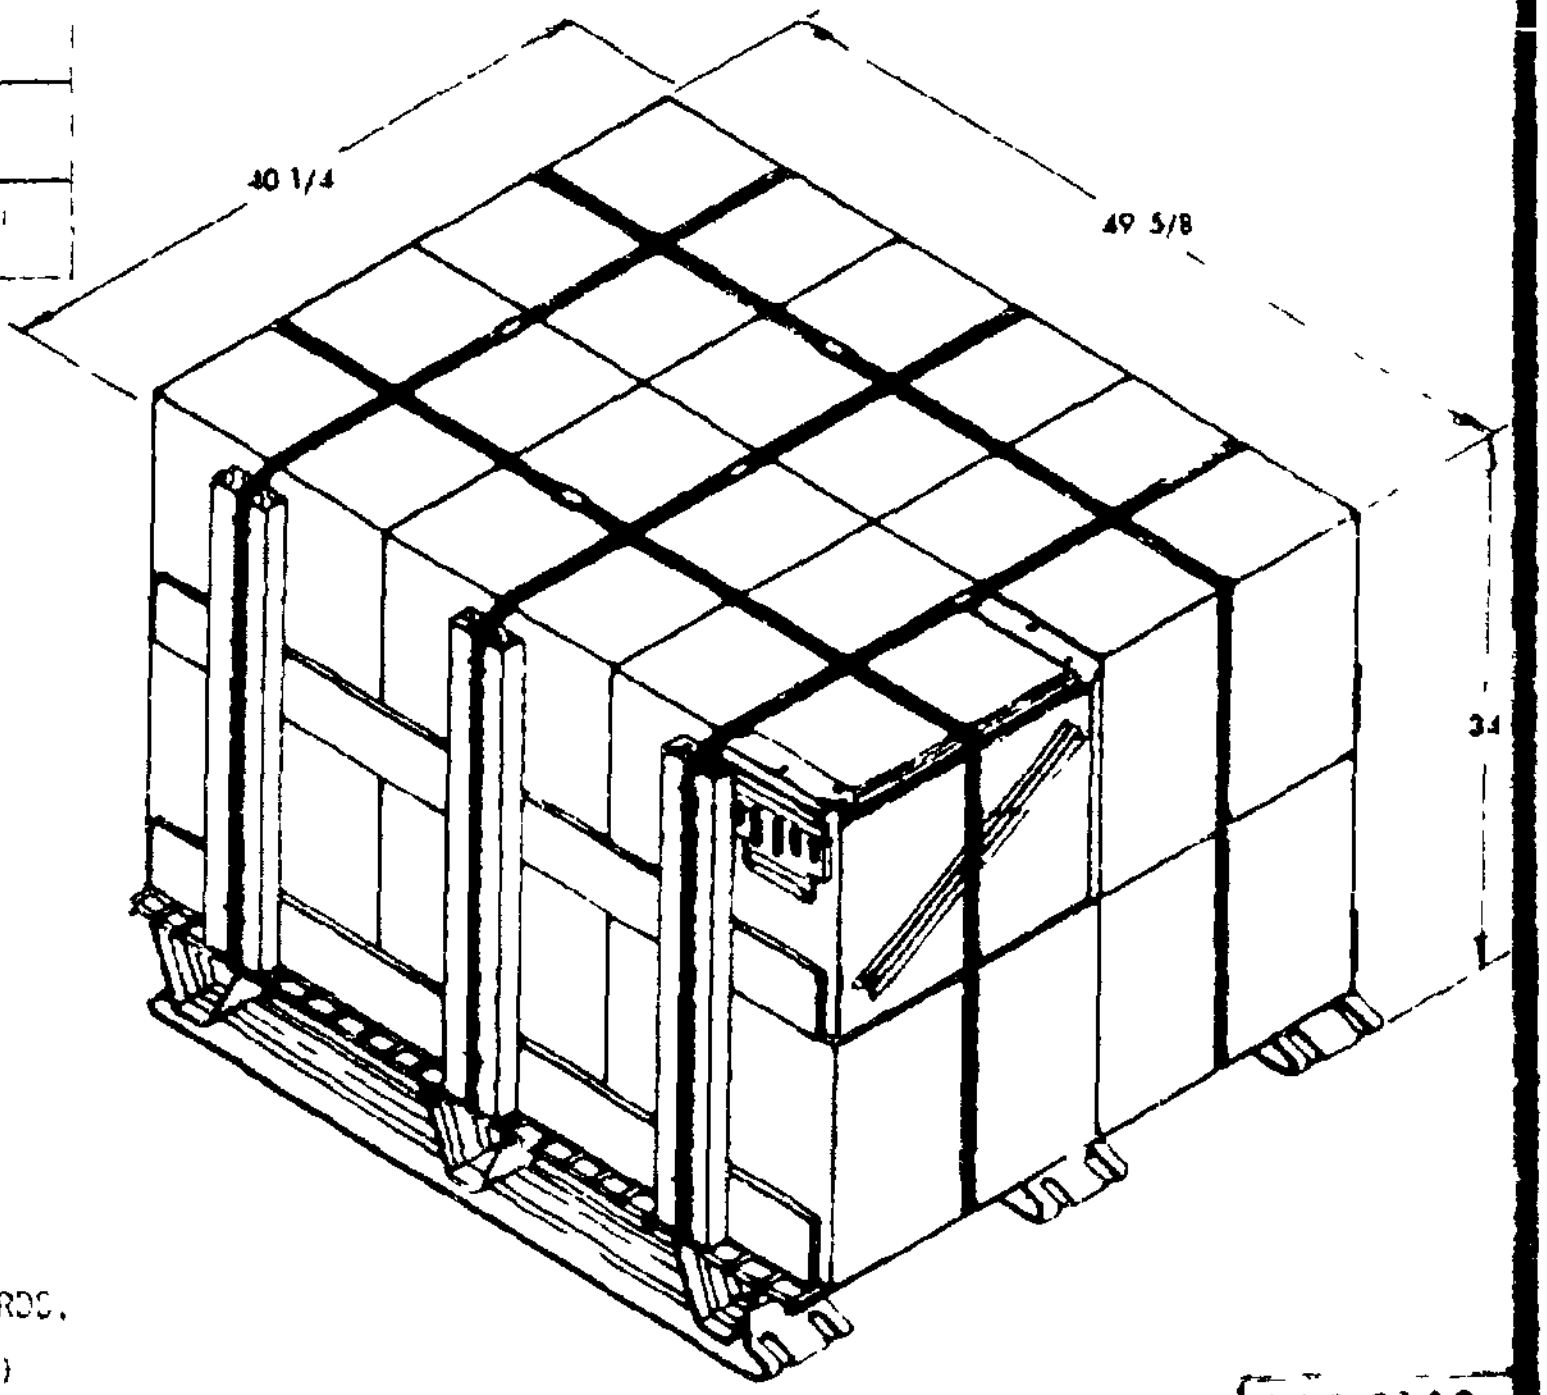

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETLOADING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATION

NWHC 8/12/86
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

8/20/86
SIGNATURE AIRSYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR 4/15/86
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD STRAPPING (ITEM 2) BETWEEN DECK WIRES OF PALLET (ITEM 1) AS SHOWN IN DETAIL A

(B) POSITION CONTAINER ON PALLET DECK WITH EQUAL UNDERHANG ON BOTH SIDES AND EQUAL OVERHANG ON BOTH ENDS

(C) POSITION STRAPPING (ITEM 2) AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH THE SEAL (ITEM 4)

(D) POSITION STRAPPING (ITEM 3) UNDER THE PALLET DECK AND AROUND THE PREFABRICATED SIDE FRAME ASSEMBLIES, TENSION AND DOUBLE NOTCH THE SEAL (ITEM 4)

(E) SECURE STRAPPING TO VERTICAL BATTENS OF THE SIDE FRAMES WITH STAPLES (ITEM 5) AS SHOWN

MARKING

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323

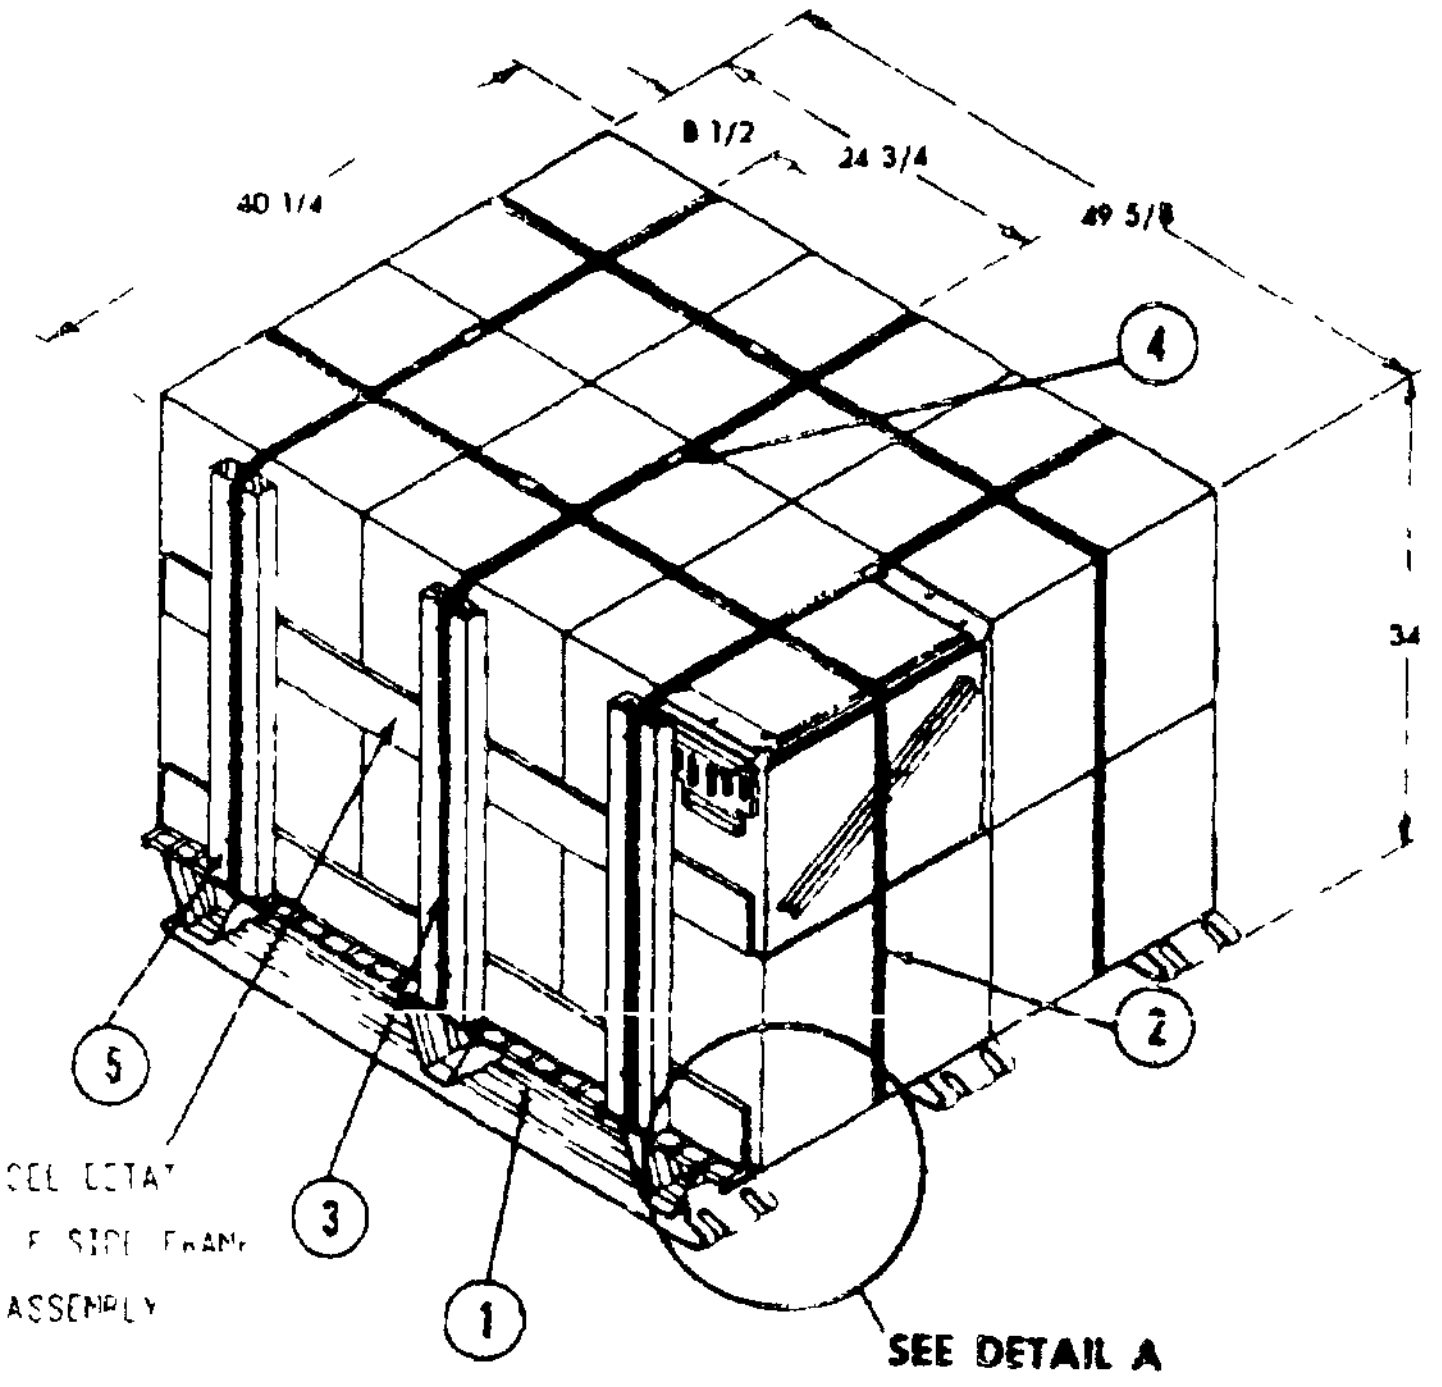

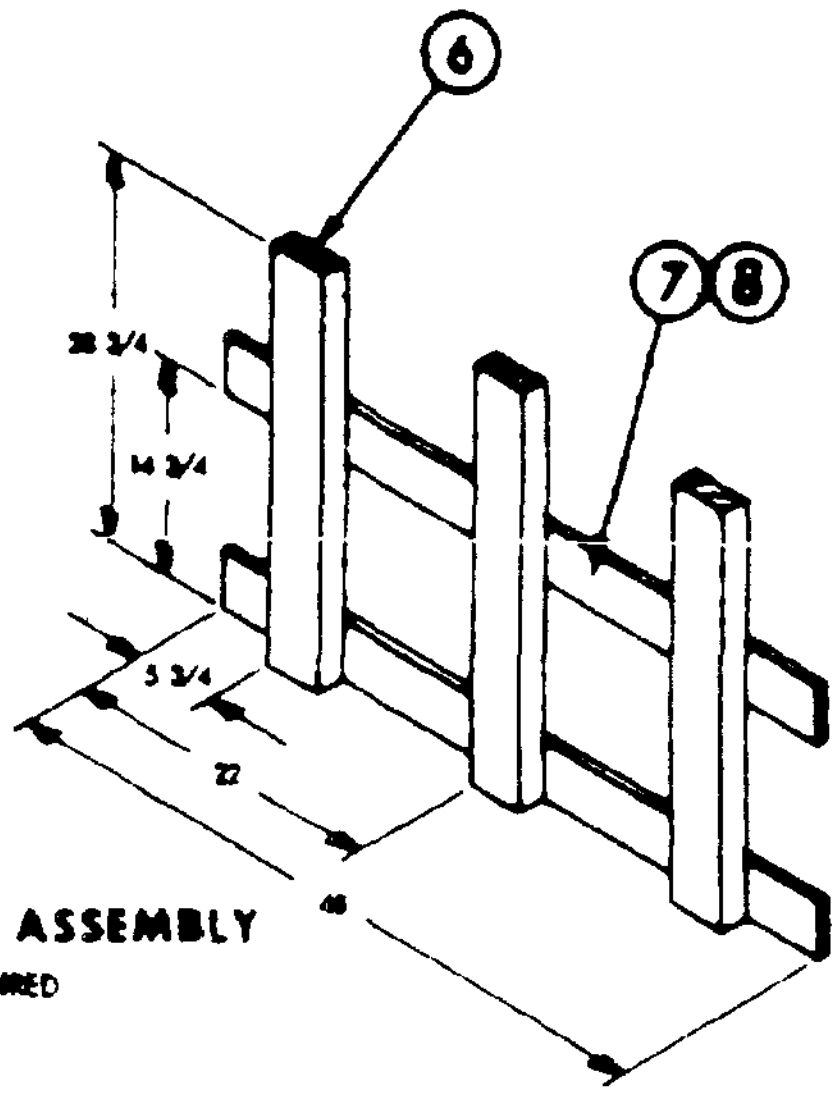

SIDE FRAME ASSEMBLY

2 REQUIRED

NOTE

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES

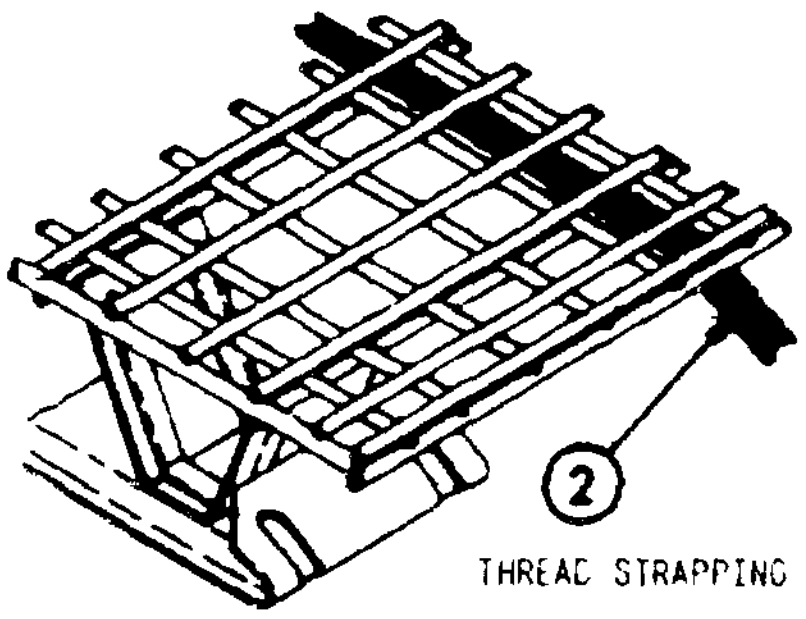

THREAD STRAPPING BETWEEN THE 6TH AND 7TH WIRE

DETAIL A

REQ'D	ITEM	DESCRIPTION	MAT'L	MAT'L SPEC.
3 PER JOINT	8	NAIL, BOX	SEE NOTE 1	6D
4	7	HORIZONTAL BATTEN	SEE NOTE 1	1/2 X 4 X 48
6	6	VERTICAL BATTEN	SEE NOTE 1	2 X 4 X 28-3/4
12	5	STAPLES	COMMERCIAL	3/4
5	4	SEAL	SEE NOTE 1	3/4
3	3	STRAPPING, STEEL	SEE NOTES 1 & 2	3/4 X .035 X 13 FT
2	2	STRAPPING, STEEL	SEE NOTES 1 & 2	3/4 X .035 X 14 FT 6 IN
1	1	PALLET, MK 3 MOD 0	SEE NOTE 1	40 X 48 X 4-3/4

LIST OF MATERIALS

DEPALLETIZING PROCEDURE

(A) REMOVE STAPLES

(B) CUT AND REMOVE STRAPPING

(C) REMOVE SIDE FRAMES

(D) REMOVE CONTAINERS

REVIEW ACTIVITY

NAVY-OS, AS

PREPARING ACTIVITY

NAVY-OS

(PROJECT NO [illegible])

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.