MIL-T-12219D(ME)
12 February 1985
SUPERSEDING
MIL-T-12219C(ME)
1 October 1975

MILITARY SPECIFICATION

TRESTLE, RAILWAY: STANDARD STEEL UNIT (T-TYPE)

This specification is approved for use by the Belvoir Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the structural components of the standard unit (T-type), steel railway trestle.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-B-575	- Bolts, Hexagon and Square.
FF-N-836	- Nut: Square, Hexagon, Cap, Slotted, Castle, Knurled, Welding and Single Ball Seat.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5420

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

FF-W-92	- Washers, Flat (Plain).
QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.

MILITARY

MIL-C-104	- Crates, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116	- Preservation, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-3774	- Crates, Wood; Open, 12,000- and 16,000- Pound Capacity.
MIL-G-20241	- Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-Sensitive.
MIL-C-52950	- Crates, Wood, Open and Covered.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

FEDERAL

FED-STD-101	- Test Procedure for Packaging Materials.
FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents. The following Government drawings form a part of this specification to the extent specified herein:

DRAWINGS

ME

D2624-1 to -4 inclusive	- Standard Unit Steel Trestle.
C13206E4482	- Washer, Beveled.

(Copies of specifications, standards, and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASME	- Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.
ANSI/AWS A5.1	- Covered Carbon Steel Arc Welding Electrodes.
ANSI/AWS D1.1	- Structural Welding Code-Steel, Section 5, Qualification.

(Applications for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 36	- Structural Steel.
A 108	- Steel Bars, Carbon, Cold-Finished, Standard Quality.
A 120	- Pipe, Steel, Black and Hot-Dipped Zinc-Coated (Galvanized) Welded and Seamless, For Ordinary Use.
D 3951	- Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19183.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies).

Source: https://assist.dla.mil -- Downloaded: 202640-17T22:33Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The trestle components shall be fabricated as shown on Drawings D2624-1 to -4, inclusive, and as specified herein.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the trestle. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or the designated representative.

3.2 First article. When specified (see 6.2), one or more of each trestle component being purchased shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.5).

3.3.1 Material deterioration and control. The trestle components shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as a corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

3.3.2 Structural steel. Structural steel shall conform to ASTM A 36.

3.3.3 Steel bars and rods. Steel bars and rods shall conform to ASTM A 108, grade 1018 or 1020.

3.4 Welding electrodes. Welding electrodes shall conform to ANSI/AWS A5.1, classification E 60 or E 70 series.

3.5 Pipe. Pipe shall conform to ASTM A 120, standard weight (Schedule 40), except that ends shall not be threaded and a hydrostatic test will not be required.

3.6 Bolts and nuts. Bolts shall conform to FF-B-575, type II. Nuts shall conform to FF-N-836, type II, style 6, steel.

3.7 Washers. Standard washers shall conform to FF-W-92, type A, grade I, class A. Beveled washers shall conform to Drawing C13206E4482, Dash No. 14.

3.8 Identification marking. The trestle components, except bolts, nuts, and washers, shall be identified as shown on the drawings. The bolts, nuts, and washers shall be identified in accordance with MIL-STD-130.

3.8.1 Metal stamping. The trestle components shall be metal stamped as shown on the drawings. Metal stamping shall be of such depth so as to be legible after painting.

3.8.2 Stenciling. The nomenclature, national stock number, weight and cubage shall be stenciled near the center on one side of each trestle component, except bolts, nuts, and washers. The letters "NET WT" shall precede the numerals in the weight and the letters "CU" shall precede the cubic displacement. Markings shall be gothic capitals and Arabic numerals 2 inches high where space permits. On small components, the stenciling shall be as large as practicable. Stenciling shall conform to MIL-T-704.

3.9 Treatment and painting. All trestle components, except bolts, nuts, and washers, shall be treated and painted in accordance with MIL-T-704, type B, lusterless. Unless otherwise specified (see 6.2), the finish color shall match color No. 36231, of FED-STD-595.

3.10 Workmanship.

3.10.1 Steel fabrication. Steel used in the fabrication of the trestle components shall be free from laminations and bends. Bent material shall be straightened by methods that will not change the physical properties of the material. Steel may be sheared, sawed, or flame-cut. Burned surfaces of flame-cut material shall be ground or machined to remove ash and cooling checks. All burrs and projections shall be removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

3.10.2 Bolted connections. Boltholes may be subpunched or drilled undersize prior to welding and reamed to full size after all welding has been completed, or drilled to full size after all welding has been completed. All holes shall be drilled or reamed through steel templates. Boltholes shall be drilled or reamed straight through from one side of the component.

3.10.3 Welders and welding.

3.10.3.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall obtain certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

ANSI/ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.
ANSI/AWS D1.1, Structural Welding Code-Steel, Section 5, Qualification.

Certification shall be made available for review by the contracting officer or designated representitive upon request. Contractors who make only horizontal welds need not qualify welders for "all position welding". Subject to approval by the Government, the contractor's standard welder qualification may be substituted in lieu of the above codes provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with ANSI/ASME or ANSI/AWS codes.

3.10.3.2 Welding. Surfaces and edges to be welded shall be smooth, uniform, and free from fins, tears, cracks, or other defects which would adversely affect the quality or strength of the weld. Surfaces to be welded and surfaces adjacent to a weld shall also be free from loose or thick scale, slag, rust, moisture, grease, or other foreign material that will prevent proper welding or produce objectionable fumes. Mill scale that withstands vigorous wire brushing, a thin rust-inhibitive coating, or antispatter compound may remain, except that for girders, all mill scale shall be removed from the surfaces on which flange-to-web welds are to be made by submerged arc-welding or by shielded metal-arc welding with low-hydrogen electrodes. Welding shall be in accordance with the applicable requirements of ANSI/AWS D1.1.

3.10.4 Jigs and fixtures. Shop-fabricated components shall be assembled in jigs or fixtures and joined while held in position. Jigs and fixtures shall be designed to prevent distortion or to limit the distortion to an amount that can be removed by straightening and stress-relieving without changing the physical characteristics of the metal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

3.10.5 Tolerances. The location of all holes shall be within plus or minus 1/32 inch of the dimensions shown on the drawings. The diameters of all holes shall be within plus 0.010 inch and minus 0.005 inch of the required diameter. The tolerances regarding the positioning of holes, the thickness of material, and the length, width, and depth of components shall be referenced from one end or side of the component and shall not be cumulative.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article trestle components shall be examined as specified in 4.5.1. presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. Trestle components shall be examined as specified herein for the following defects:

Major

101. Materials not as specified.
102. Materials are not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments.
103. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
104. Contractor does not have documentation available for identification of material, material finishes or treatment.
105. Dimensions not as shown on drawings.
106. Components missing or not as specified.
107. Weld defects, such as base metal cracks adjacent to or behind welds, cracks in weld metal, undercutting of base metal or between parts, porosity, lack of penetration, slag inclusions, or spatter.
108. Components containing sharp edges or projections.
109. Treatment and painting not as specified.
110. Identification or special markings incorrect, illegible, or missing.
111. Welding certification not as specified.
112. Structural steel not as specified.
113. Steel bares and rods not as specified.
114. Welding electrodes not as specified.
115. Pipe not as specified.
116. Bolts and nuts not as specified.
117. Workmanship not as specified.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection.

4.6.1.1 Examination. Examine the preproduction pack for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.1.2 Tests. The preproduction pack for level A or B shall be tested as follows by the applicable test method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

4.6.1.2.1 Boxed trestle components weighing less than 200 pounds. Boxed trestle components weighing less than 200 pounds shall be subjected to the free-fall drop test in accordance with FED-STD-101, test method 5007, procedure B.

4.6.1.2.2 Boxed trestle components weighing more than 200 pounds. Boxed trestle components weighing more than 200 pounds shall be subjected to the pendulum-impact test in accordance with FED-STD-101, test method 5012, except the vertical height of drop shall be 18 inches.

4.6.1.2.3 Crated trestle components. Crated trestle components shall be subjected to the rail impact test in accordance with MIL-STD-1186, appendix A. Crates not exceeding 9.5 feet in length shall be subjected to tests on each end and side, a total of 8 impacts.

4.6.1.3 Basis for rejection. The pack shall be examined at the conclusion of the preproduction pack test. Any shifting of contents, loosening or breaking of holddowns, ties, stays, blocking, or bracing, or any visual damage to the trestle components shall constitute failure of the preproduction pack and shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

118.	Materials, methods, or containers not as specified for level A or B. Each incorrect material, method, or container shall constitute one defect.
119.	Unpainted metal surfaces not coated with preservative for level A or B.
120.	Bundling and securing not as specified for level A or B.
121.	Strapping not spaced as specified for level A or B.
122.	Boxed contents not secured within the box in a manner to prevent free movement for level A or B.
123.	Blocking, bracing, and anchoring of crated components not in accordance with the appendix to the crate specification and the referenced document for level A or B.
124.	Preservation and packing not in accordance with the referenced document as specified for commercial.
125.	Marking missing, illegible, incorrect, or incomplete for level A, B, or commercial.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination and testing within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.4). The preproduction pack may be prepared utilizing either the first article trestle components or the production trestle components. If the first article trestle components are utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the first article trestle components and the production trestle components.

5.2 Preservation. Preservation shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Unprotected surfaces. Unpainted surfaces of trestle components shall be coated with type P-1 preservative. The preservative shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116.

5.2.1.2 Column units (Mk T-1, T-2, T-3, T-4). Column units of like description shall be bundled by bolting the flanges together with 3/4-inch diameter bolts and tie rods and strapping as shown in Figure 1. Strapping shall conform to QQ-S-781, class 1, type I or IV, light duty, finish B, size 3/4 inch by 0.035 inch. Straps shall be spaced not more than 30 inches apart.

5.2.1.3 Struts (Mk T-5). Struts (Mk T-5) shall be bundled in quantities most convenient for packing (not to exceed 10 each). The struts shall be nested and strapped with not less than two straps conforming to QQ-S-781, class 1, type I or IV, light duty, finish B, size 3/4 inch by 0.035 inch. The straps shall be spaced not more than 30 inches apart.

5.2.1.4 Bracing angles (Mk T-6, T-7). Bracing angles of like description shall be bundled in quantities most convenient for packing (not to exceed 20 each). The angles shall be nested and strapped with not less than two straps conforming to QQ-S-781, class 1, type I or IV, light duty, finish B, size as applicable. The straps shall be spaced not more than 30 inches apart.

5.2.1.5 Shim plates (Mk T-8) and splice plates (Mk T-11, T-17). Shim plates and splice plates of like description shall be stacked and bundled in quantities most convenient for packing. Each bundle shall be secured with not less than two 3/4-inch diameter bolts through matching holes.

Source: https://assist.dla.mil -- Downloaded: 20260-17T22:33Z
Check the source to verify that this is the current version before use.

5.2.1.6 Trestle joist members (mk T-9, T-10). Trestle joint members marked T-9 shall be bundled as shown in Figure 2. Joists marked T-10 shall be bundled in a similar manner as shown in Figure 2.

5.2.1.7 Bracing clips (Mk T-15), grillage clips (Mk T-16), spacers (Mk T-12, T-13, T-14), brackets (Mk T-36), holding plates (Mk T-37), fork and sleeve (Mk T-39), derrick, jib pins (Mk T-40), and bolts, nuts, and washers. These components of like description shall be placed in close-fitting boxes conforming to PPP-B-621, class 2, style 2, or in boxes conforming to PPP-B-601, overseas type, style A or B, in quantities not to exceed the weight limitation of the box specification. Blocking, bracing, or anchoring required to prevent free movement of the contents within the box shall be provided. The boxes shall be closed and strapped in accordance with the appendix to the applicable box specification. Strapping shall conform to QQ-S-781, class 1, type I or IV, size as applicable, finish B.

5.2.1.8 Derrick mast (Mk T-38). Derrick masts shall be bundled in quantities most convenient for packing (not to exceed six each). The masts shall be nested and strapped with not less than two straps conforming to QQ-S-781, class 1, type I or IV, light duty, finish B, 3/4 inch by 0.035 inch, spaced not more than 30 inches apart.

5.2.2 Level B. Preservation of trestle components shall be as specified in 5.2.1 for level A, except boxes shall be domestic type or class, as applicable, and strapping shall be finish A.

5.2.3 Commercial. Trestle components shall be preserved in accordance with ASTM D 3951.

5.3 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.3.1 Level A. All bundled components of like description, except those components specified in 5.2.1.2, 5.2.1.6, and 5.2.1.7, shall be packed together in boxes conforming to PPP-B-621, class 2, style 2 or PPP-B-601, overseas type, style A or B, or shall be packed in crates conforming to MIL-C-52950, type V, style A, class 1, MIL-C-3774, type I, style A, or MIL-C-104, type I, class 1 or 2, style A, as applicable to the weight of the components to be packed. Blocking, bracing, and anchoring of the components within the box or crate shall be in accordance with MIL-STD-1186. Closure and strapping shall be in accordance with the applicable box or crate specification or appendix thereto. Strapping shall conform to QQ-S-781, class 1, type I or IV, size as applicable, finish B. Boxed and bundled components specified in 5.2.1.2, 5.2.1.6, and 5.2.1.7 shall not require overpacking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

5.3.2 Level B. Packing shall be as specified in 5.3.1 for level A, except boxes shall be domestic type or class as applicable, and strapping shall be finish A.

5.3.3 Commercial. The trestle components shall be packed in accordance with ASTM D 3951.

5.4 Marking.

5.4.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

5.4.2 Commercial. Marking for commercial packaging shall be in accordance with ASTM D 3951; in addition, weight and cube of the pack shall be marked on the shipping container.

6. NOTES

6.1 Intended use. The trestle is intended for use as the structural support component for the standard railway bridge.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When a first article is required for inspection and approval and the number of units required (see 3.2).

c. Finish paint color, when other than specified (see 3.9).

d. Time frame required for submission of the preproduction pack (see 5.1).

e. Degree of preservation and degree of packing required (see 5.2 and 5.3).

6.3 First article. When a first article inspection is required, the item will be examined and should be a first produced item. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

6.4 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the trestle components in accordance with this specification.

6.5 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 5420-A341

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

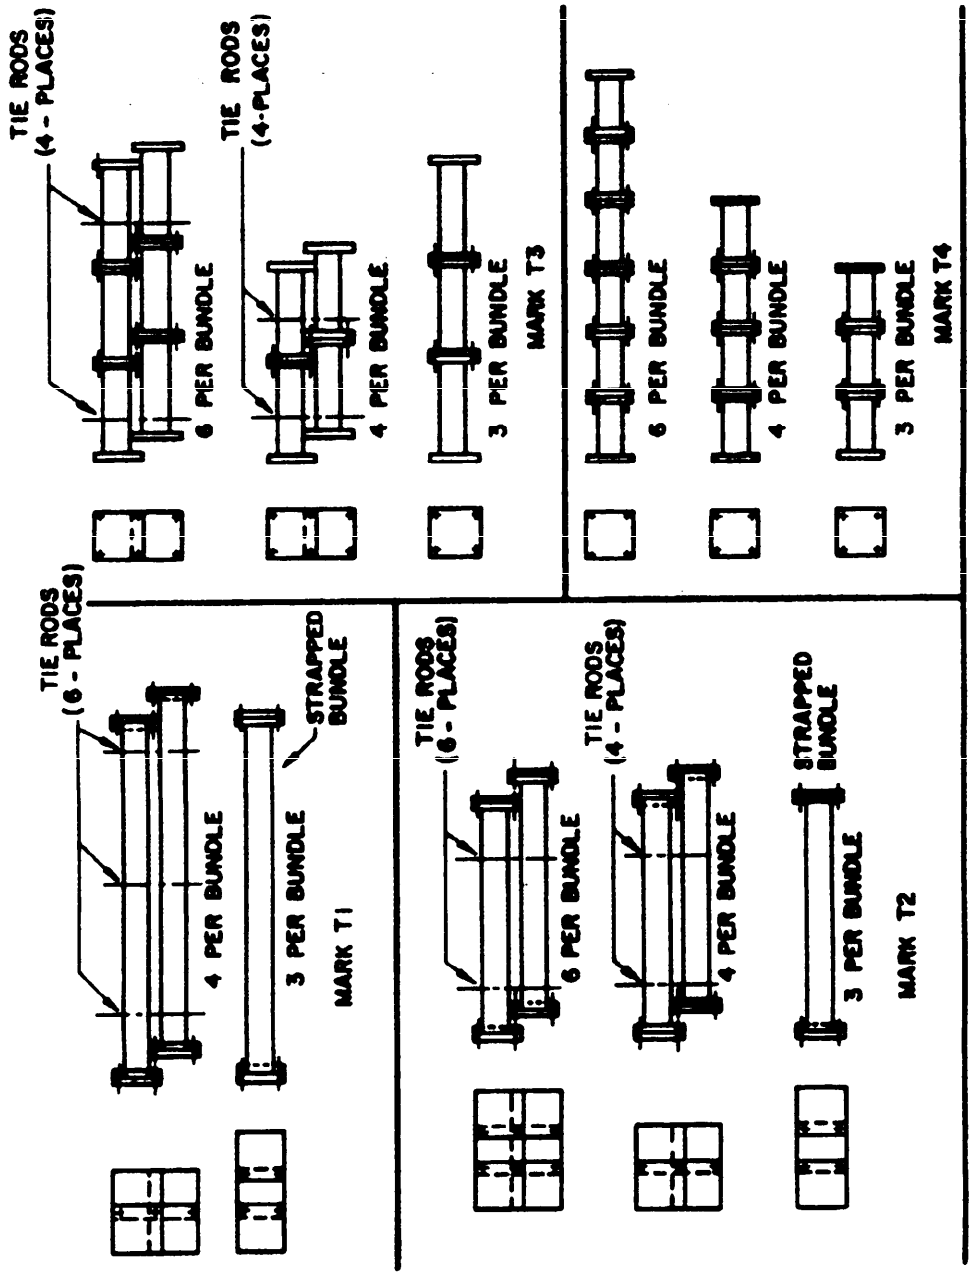


FIGURE 1. Column units - bundle arrangement.

X-4120

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:33Z
Check the source to verify that this is the currentversion before use.

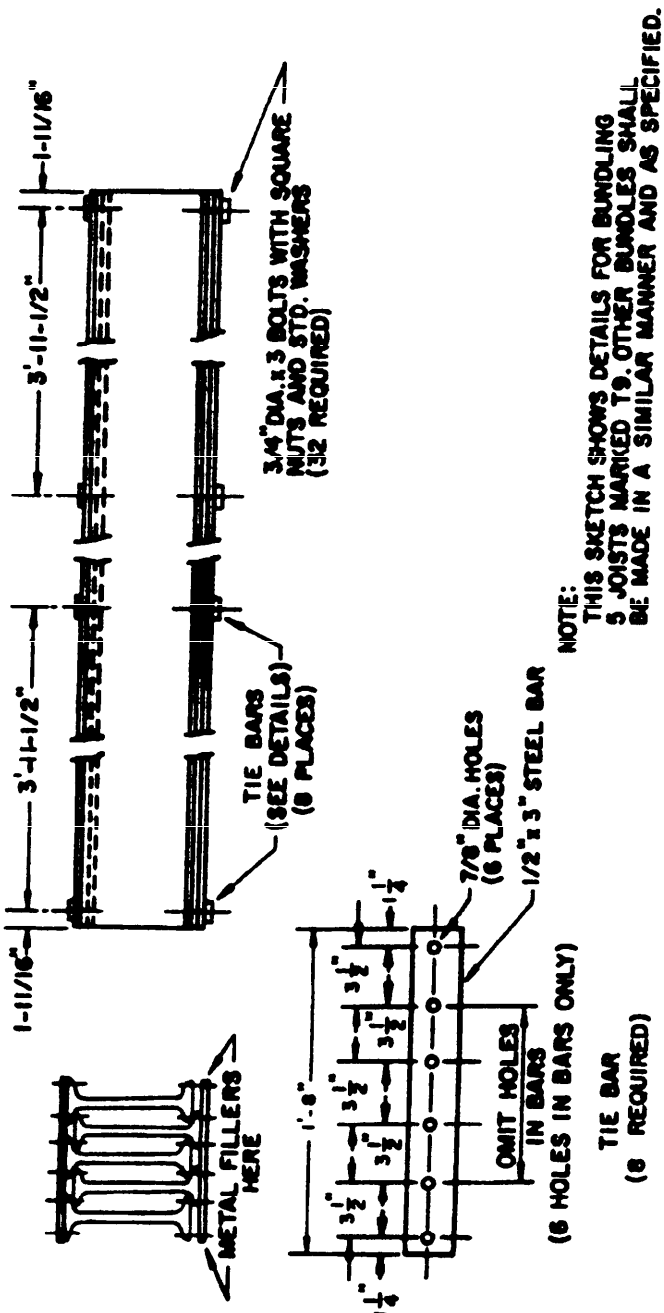


FIGURE 2. Joists – details of bundling.

X-4121

Source: https://assist.dla.mil - Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-12219D(ME)	Trestle, Railway: Standard Steel Unit (T-Type)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 83 MAR PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.daps.dla.mil - Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5606

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:33Z
Check the source to verify that this is the current version before use.