MIL-T-12400A(EL)
4 September 1969

SUPERSEDES
MIL-T-12400(Sig C)
2 January 1953

MILITARY SPECIFICATION

TEST SET, BATTERY TS-776( )/U

1. SCOPE

1.1 This specification covers the requirements of a battery tester designated as Test Set, Battery TS-776( )/U, which is designed to indicate the voltage of a 24 or 25 cell nickel-cadmium battery.

2. APPLICABLE DOCUMENTS

2.1 Documents. The following documents of the issue in effect at date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-T-111	Tape; Paper, Gummed (Sealing and Securing).
PPP-B-636	Box, Fiberboard
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-T-97	Tape; Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	Preservation, Methods of
MIL-B-117	Bags, Interior Packaging.
MIL-P-11268	Parts, Materials and Processes Used in Communication Equipment.
MIL-M-13231	Marking of Electronic Equipment.
MIL-F-14072	Finishes for Ground Signal Equipment.

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects.
MIL-STD-810	Military Standard Environmental Test Methods for Aerospace and Ground Equipment

DRAWINGS

ELECTRONICS COMMAND

SC-A-46439	List of Accessories for Package Tester
SC-DL-146789	Battery Test Set, TS-776( )/U

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity, or as directed by the contracting officer. Both the title and number or symbol should be stipulated wher requesting copies.)

3. REQUIREMENTS

3.1 Description. Test Set, Battery TS-776( )/U, is a small light weight portable battery tester, which is designed to accurately indicate the voltage of a 24 or 25 cell nickel-cadmium battery and its individual cells.

3.2 First article samples. The contractor shall furnish three (3) complete first article samples for approval, provided the invitation for bid and the contract requires first article samples.

3.3 Construction. The equipment shall be constructed in accordance with SC-DL-146789 and the requirements specified herein.

3.4 Parts, materials and processes-general. In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection of requirements therein, shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

3.5 Finish, protective. The equipment shall be finished in accordance with MIL-F-14072. This includes finish of hardware; such as, screws, etc., and necessary touch-up after mounting.

3.6 Marking. Marking shall conform to MIL-M-13231.

3.6.1 Visibility. Wherever practicable, parts and assemblies shall be so mounted that their identification markings shall be readily visible with a minimum disassembly of the equipment.

3.6.2 Serial numbers. Serial numbers are required.

3.6.3 Bounce preconditioning. Each test set produced shall be subjected to the bounce preconditioning test of 4.6 prior to Group A inspection. After bounce preconditioning, the test set shall not be repaired, aligned, cleaned or otherwise changed prior to performing electrical preconditioning and Group A acceptance test.

3.7 Electrical.

3.7.1 Accuracy. In the ranges of 1.25 V to 1.4 V and 28 V to 32 V, the equipment shall have the following accuracy (see 4.7.1).

Temperature	Accuracy (allowable tolerance)
+77°F ±3°F	Within ±0.5 percent of the indicated value.
-4°F (+0-6°F) and +125°F (+6-0°F)	Within ±1.0 percent of the indicated value.

3.7.2 Resistance of load circuit. The resistance of the load circuit shall be between 1.03 and 1.07 ohms when tested in accordance with 4.7.2.

3.7.3 Operational test. The test set shall show no evidence of change in value of reading as a result of performing the operational test of 4.7.3.

3.8 Service conditions. The test set shall be constructed so that no fixed part shall become loose, cracked, flaked, pitted or blistered; no movable part or control shall be shifted in setting, position or adjustment, and no permanent degradation shall be caused in performance below that specified in the following conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

3.8.1 Low temperature. The unit shall be subjected to the low temperature extremes of -4°F operating, and -65°F storage, and shall meet the electrical requirements of 3.7.1 at times specified when tested in accordance with 4.8.1.

3.8.2 High temperature. The unit shall be subjected to the high temperature extremes of 125°F operating, and 160°F storage, and shall meet the electrical requirements of 3.7.1 when tested in accordance with 4.8.2.

3.8.3 Altitude. The unit shall be subjected to the altitudes specified, and shall meet the electrical requirements of 3.7.1 at times specified when tested in accordance with 4.8.3.

3.8.4 Shock, bench-handling. The test set shall show no evidence of physical damage except minor surface abrasion and shall meet the requirements of 3.7.1 when tested in accordance with 4.8.4.

3.8.5 Shock, drop. The test set shall show no evidence of physical damage except minor surface abrasion and shall meet the requirements of 3.7.1 when tested in accordance with 4.8.5.

3.8.6 Bounce. The test set shall show no evidence of physical damage except minor surface abrasion and shall meet the requirements of 3.7.1 when tested in accordance with 4.8.6.

3.8.7 Vibration. The test set shall show no evidence of breakage or loosening of parts, and shall meet the requirements of 3.7.1 when tested in accordance with 4.8.7.

3.8.8 Humidity. The test set shall exhibit no physical damage of parts and materiel, such as corrosion, rust, blistering, swelling, deterioration, etc., or electrical degradation, when tested in accordance with 4.8.8.

3.8.9 Fungus. The test set shall show no evidence of viable fungus when tested in accordance with 4.8.9.

3.9 Visual and mechanical. The test set shall meet the requirements of MIL-STD-252 as specified in 4.9.

3.10 Interchangeability. Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable, without modification of such items or the equipment. Individual items shall not be handpicked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristics, etc. (see 4.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The test set shall be manufactured and assembled in accordance with the applicable portions of MIL-P-11268 as follows:

General requirements for plastic material and parts.
Wiring and cabling including:
  Slack
  Protection
  Clearance
  Splicing
  Connectors, general
  Grounding, general
Flux and cleaning agents for soldering
Process for soldering
Cleaning of equipment
General process for securing of parts
Process of welding
Connectors, general
Mechanical operation of controls
Tropicalization of material
Lubricants

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the contractor may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the contract and specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) First article inspection (Does not include preparation for delivery) (see 4.3).

(b) Inspection covered by subsidiary documents (see 4.4).

(c) Quality conformance inspection.

  (1) Quality conformance inspection of equipment before preparation for delivery (see 4.5).

  (2) Quality conformance inspection of preparation for delivery (see 4.11).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. This inspection shall be performed by the contractor and witnessed by a Government representative unless otherwise specified in the contract. It shall consist of Group A, B and C inspections (see Tables I, II and III respectively) on the three (3) samples of the completely assembled Test Set, Battery TS-776( )/U. The first article samples shall be inspected in this order: Group A and B for all units; and designated units for specific Group C inspections. Designation of units to specific Group C inspections shall be determined by the Government production engineer. After completion of all Group C tests, conforming units must be reinspected and pass all Group A inspections.

4.4 Inspection covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before preparation for delivery.

Item	Where required
Finish	3.5
Marking	3.6
Workmanship	3.11

4.5 Quality conformance inspection of equipment before preparation for delivery. The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government - at its discretion - may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements. Test equipment for Government verification inspection shall be made available by the contractor.

4.5.1 Group A inspection. Each unit of each lot of equipment, shall be inspected for conformance to all the inspection and test requirements of Table I. Each lot will be subject to verification, utilizing the procedures of MIL-STD-105, and the AQL's indicated in Table I. Group A inspection shall be performed in any order which is satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

Table I. Group A inspection

Inspection	Req. Para.	Insp. Para.	AQL Major	AQL Minor
Visual and mechanical	3.9	4.9	1 dphu*	4 dphu
Electrical				
Accuracy	3.7.1	4.7.1)	1 dphu	**
Resistance of load circuit	3.7.2	4.7.2)	for the	
Operational test	3.7.3	4.7.3)	group	

* Defects per hundred units.
** All electrical tests are major.

4.5.2 Group B inspection. This inspection, including sampling shall conform to Table II and to the special procedures for small sample inspection of MIL-STD-105. Group B inspection shall be performed on inspection lots that have passed Group A inspection, and on samples selected from units that have been subjected to and meet the Group A inspection.

4.5.2.1 Order of inspection within Group B. Group B inspection shall be performed in any order which is satisfactory to the Government.

Table II. Group B inspection

Inspection	Req. Para.	Test Para.	AQL
Interchangeability	3.10	4.10	6.5%

* Defects per hundred units.

4.5.3 Group C inspection. This inspection shall consist of the inspection specified in Table III and shall be performed on units that have been subjected to and met Group A and B inspection. Sample units shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

4.5.3.1.1 Three (3) samples of complete test set shall be selected at random, one (1) sample for each Group 1 through Group 3 in Table III. The samples selected shall be at the start of the contract from the first quality conformance inspection lot. The sample shall constitute Group C requirement for first 300 units produced, or less.

4.5.3.1.2 Thereafter, two (2) samples of the complete test set shall be selected at random, one (1) sample for each Group 2 and Group 3 in Table III from every 300 units and fraction thereof produced.

4.5.3.2 Evaluation of samples submitted to individual Group C inspection. After referenced samples in 4.5.3.1 have been subjected to an individual Group C inspection test and prior to subjection to the next Group C test (unless otherwise specified in the individual test) the sample shall meet all Group A requirements.

4.5.3.3 Noncompliance. The contractor shall immediately report in writing each Group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials, as applicable, and (ii) all units of product which were manufactured under the same conditions and which the Government considers subject to the same failure. Reports shall be forwarded to the responsible technical activity designated in the contract through the Quality Assurance Representative. After corrective action has been taken, additional sample units shall be subjected to Group C inspection.(all inspections, or the inspections which the sample failed, at the option of the Government). The final acceptance and shipment will be withheld until the Group C reinspection results have shown that the corrective action was effective.

4.5.3.4 Order of inspection within Group C. Group C inspection shall be performed in any order which is satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

Table III. Group C inspection

Inspection	Req. Para.	Test Para.
Group 1		
Fungus	3.8.9	4.8.9
Group 2		
Temperature (operating and non-operating)	3.8.1, 3.8.2	4.8.1, 4.8.2
Elevation (operating and non-operating)	3.8.3	4.8.3
Humidity	3.8.8	4.8.8
Group 3		
Vibration	3.8.7	4.8.7
Bounce	3.8.6	4.8.6
Shock, bench-handling	3.8.4	4.8.4
Shock, drop	3.8.5	4.8.5

4.5.4 Reinspection of conforming Group B and C sample units. Unless otherwise specified, sample units which have been subjected to and passed both Group B and Group C inspection may be accepted on contract or order, provided all damage is repaired and the sample units are subjected to and pass Group A inspection.

4.5.5 Disposition of Group C sample units. Unless otherwise specified, sample units which have been subjected to and passed Group C inspection, may be delivered on the contract or order, provided units meet requirements of 4.5.4.

4.6 Bounce preconditioning. Each test set produced shall be placed in its normal operating position or the table of a package tester of suitable capacity as made by the L.A.B. Corporation, Skaneateles, New York, with accessories as per Model 1000SC and SC-A-46439, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32 inch thick strip of material under one corner or edge of the equipment under test to a distance of 3 inches as the equipment bounces. The equipment shall be subjected to this preconditioning for 1 minute and shall then meet the requirements of 3.6.3.

4.7 Electrical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

4.7.1 Accuracy.

4.7.1.1 Low voltage. The test set shall be tested at 1.26, 1.30, 1.33, and 1.40 volts, using a variable dc power supply described in 4.7.3, connected to the cell test prod P-1 and shall meet the requirements of 3.7.1.

4.7.1.2 High voltage. The test set shall be tested at 28.0, 29.6, 30.0, and 32.0 volts, using a variable dc power supply described in 4.7.3, connected to the battery test plug P-2 and shall meet the requirements of 3.7.1.

4.7.2 Resistance of load circuit. The load resistance, when measured across plug P-2, with the switch set on the load position using a resistance bridge Electro-Scientific Industries Model 242, or equal, shall meet the requirements of 3.7.2. Resistance of the external cable and plug may be subtracted in order to verify this value.

4.7.3 Operational test. The test set shall be connected to a dc power supply capable of furnishing 30 volts at currents up to 30 amperes.

(a) Connect the power supply to the input of P-2 of the test set.

(b) Adjust the power supply voltage to precisely 28 volts, as read on the test set.

(c) Depress the load switch on the test set and maintain for 5 seconds.

(d) Release the load switch.

(e) The meter indication on the test set shall return to the initial reading (see 3.7.3).

4.8 Service conditions. The test set shall be tested in accordance with the following service conditions.

4.8.1 Low temperature. The unit in its normal operating configuration shall be subjected to the low temperature test specified in Procedure I, Method 502 of MIL-STD-810, with temperatures in steps 2 and 4 held for 24 hours each, and shall meet the requirements of 3.8.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

4.8.2 High temperature. The unit in its normal operating configuration shall be subjected to the high temperature test specified in Procedure I, Method 501 of MIL-STD-810, with temperature in step 4 held for 24 hours, and shall meet the requirements of 3.8.2.

4.8.3 Altitude. The unit in its normal operating configuration shall be subjected to the altitude test specified in Procedure I, Method 500 of MIL-STD-810, with altitude in step 3 held for 1 hour, and shall meet the requirements of 3.8.3.

4.8.4 Shock, bench-handling. The test set less the case, shall be positioned as for servicing on a solid two inch fir bench top and shall be subjected to the following:

(a) Tilt up the equipment through an angle of 30 degrees, using one edge of the equipment as an axis, and permit the assembly to drop back freely to the horizontal. Repeat, using other practicable edges of the same horizontal face as axes, for a total of four drops on horizontal face.

(b) Repeat (a) with the assembly resting on other faces, until it has been dropped for a total of four times on each face on which the equipment could be placed practicably during servicing.

(c) The equipment shall meet the requirements of 3.8.4.

4.8.5 Shock, drop. The test set shall be dropped a distance of 18 inches on each face, edge and corner for a total of 26 drops. Drops shall be made from a quick-release hook; or pendulum tester as made by L.A.B. Corporation, Skaneateles, New York, or equal. The floor or barrier receiving the impact shall be of two inch fir backed by concrete or a rigid steel frame. The equipment shall meet the requirements of 3.8.5.

4.8.6 Bounce. The test set shall be tested on a package tester of suitable capacity as made by the L.A.B. Corporation, Skaneateles, New York, with accessories as per Model 1000SC and SC-A-46439, or equal. The test shall be as follows:

(a) Secure the equipment to a 48 x 48 inch vehicular adapter plate. The adapter plate shall be free of cracks and broken welds, and all unused holes shall be plugged. No part of the mounte surface shall be less than seven inches from the edge of the adapter plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

(b) Cover the tester bed with a panel of 1/2 inch plywood, with the grain parallel to the drive chain. Space sixpenny nails, with the heads below the surface, at six inch intervals around all four edges and at three inch intervals in a six inch square in the center.

(c) Place the adapter plate on the bed of the package tester. Limit the lateral motion, by wooden fences, to not more than three inches and not less than one inch. Additional barriers may be used to safeguard personnel, provided that the fore-and-aft motion of the adapter plate against the backstop is not restrained.

(d) Operate the package tester, shafts in phase, for a total of three hours at 284 r/min ±2 r/min. Turn the equipment at the end of each 30 minutes so it will rest on a new surface.

(e) The equipment shall meet the requirements of 3.8.6.

4.8.7 Vibration. The test set in its normal operating configuration shall be subjected to the vibration test as follows:

(a) Secure the equipment directly to a vibration table that can be controlled within 10 percent of the specified amplitude. Mounting method shall be such that vibration within the equipment can be observed and measured.

(b) The equipment shall be vibrated with the frequency varying between 10 and 55 Hz at a total excursion of 0.03 ±0.006 inch, the frequency varying uniformly from 10 to 55 Hz and returning to 10 Hz in approximately 1 minute. Application of the vibration test specified above shall be in each of following directions:

(1) Horizontal, parallel to the major horizontal axis of the equipment for a period of 15 minutes for the specified frequency range of 10 to 55 Hz.

(2) Horizontal, at right angles to the major horizontal axis of the equipment for a period of 15 minutes for the specified frequency range of 10 to 55 Hz.

(3) Vertically to the major horizontal axis of the equipment for a period of 15 minutes for the specified frequency range of 10 to 55 Hz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

(c) The equipment shall meet the requirements of 3.8.7.

4.8.8 Humidity. The test set in its normal operating configuration, shall be subjected to the humidity test specified in Procedure II, Method 507 of MIL-STD-810, and shall meet the requirements of 3.8.8.

4.8.9 Fungus. The test set in its normal operating configuration, shall be subjected to 28 days of the fungus test specified in Procedure I, Method 508 of MIL-STD-810, and shall meet the requirements of 3.8.9.

4.9 Visual and mechanical. The test set shall be examined for the defects listed in MIL-STD-252, and shall meet the requirements of 3.9.

4.10 Interchangeability. The dimensions listed below shall be measured to determine conformance to the physical interchangeability requirement of 3.10. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) External and internal dimensions of case, cover and insertable assemblies, when such dimensions affect mating of parts.

(b) Dimensions of cavities, when such dimensions affect insertion of items.

(c) Location of hinges and fasteners on separable parts or assemblies which must mate, such as case, covers and mountings.

(d) Location of crystal test holders, battery holder and terminals.

(e) Location of switches, sockets and fasteners.

(f) Location of cover and fasteners on carrying case which must mate.

(g) Location of panel mounting screw holes on basic unit for mating with case.

4.11 Quality conformance inspection of preparation for delivery. Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY.

5.1 Preservation and packaging.

5.1.1 Level A. Each Test Set, Battery TS-776( )/U shall be packaged in accordance with items 1 through 5 of Figure 1 and Table IV.

5.1.2 Level C. Each Test Set, Battery TS-776( )/U shall be packaged in accordance with items 1 through 4 of Figure 1 and Table IV.

5.1.3 Package performance. Package testing shall be performed in accordance with the requirements of Specification MIL-P-116. The rough handling test and the cyclic exposure test will be required only when invoked in the bid request or contract. (see 6.2)

5.2 Packing.

5.2.1 Level A. Eight Test Sets, Battery TS-776( )/U shall be packed in accordance with items 6 through 8 of Figure 1 and Table IV. The box closure shall be as specified in the Appendix of the applicable box specification.

5.2.2 Level B. Eight Test Sets, Battery TS-776( )/U shall be packed as specified in 5.2.1, except item 7 shall be Class 1, 200 PSI, and item 8 shall be omitted.

5.2.3 Level C. Eight Test Sets, Battery TS-776( )/U shall be packed in shipping containers of the type, size and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the rules or regulations of the common carrier, applicable to the mode of transportation.

5.3 Marking. Interior packages and exterior shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

6. NOTES.

6.1 Intended use. Test Set, Battery TS-776( )/U is designed to accurately indicate the voltage of a 24 or 25 cell nickel-cadmium battery, and its individual cells.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE IV

F	ITEM	No.	Method MIL-	SIZE - INCHES			REQUIREMENT						
o.	Nomenclature	Read	P-116	L	W	D	Spec No.	T	C	V	G	F	S
	Technical Manual	2	IC-6	Fold pkg unit.	Manuals.	Place one on bottom and the other on top of							
1	Bag	2		11-1/2	9		MIL-B-117	II		d			
2	Test Set, TS-776/U	1	IC-2	8-7/8	4-3/4	6-5/8							
3	Pad, Corner	4		7-1/4	2-3/4	2	PPP-F-320	CF		SW	W6		
4	Box, Fiber	1		9-3/4	5-3/8	7-1/2	PPP-B-636		1			C	RSC
	Tape	2		16	2		UU-T-111		2				
		1		7-1/2	2								
5	Bag	1		17	16		MIL-B-117	1		d			
6	Pkg item 5	8		2L	2W	2D							
7	Box, Fiber	1		20-5/8	11-3/4	10-1/4	PPP-B-636	1	2		3	C	RSC
8	Tape, Banding	2		64	1/2		PPP-T-97	IV					

Lev. A - PACKED WEIGHT - 8 units 57 lbs.
Lev. A - PACKED VOLUME - 8 units 2.43 cu ft.

T - Type
C - Class
V - Variety
G - Grade
F - Flute
S - Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

TEST SET TS-776/U

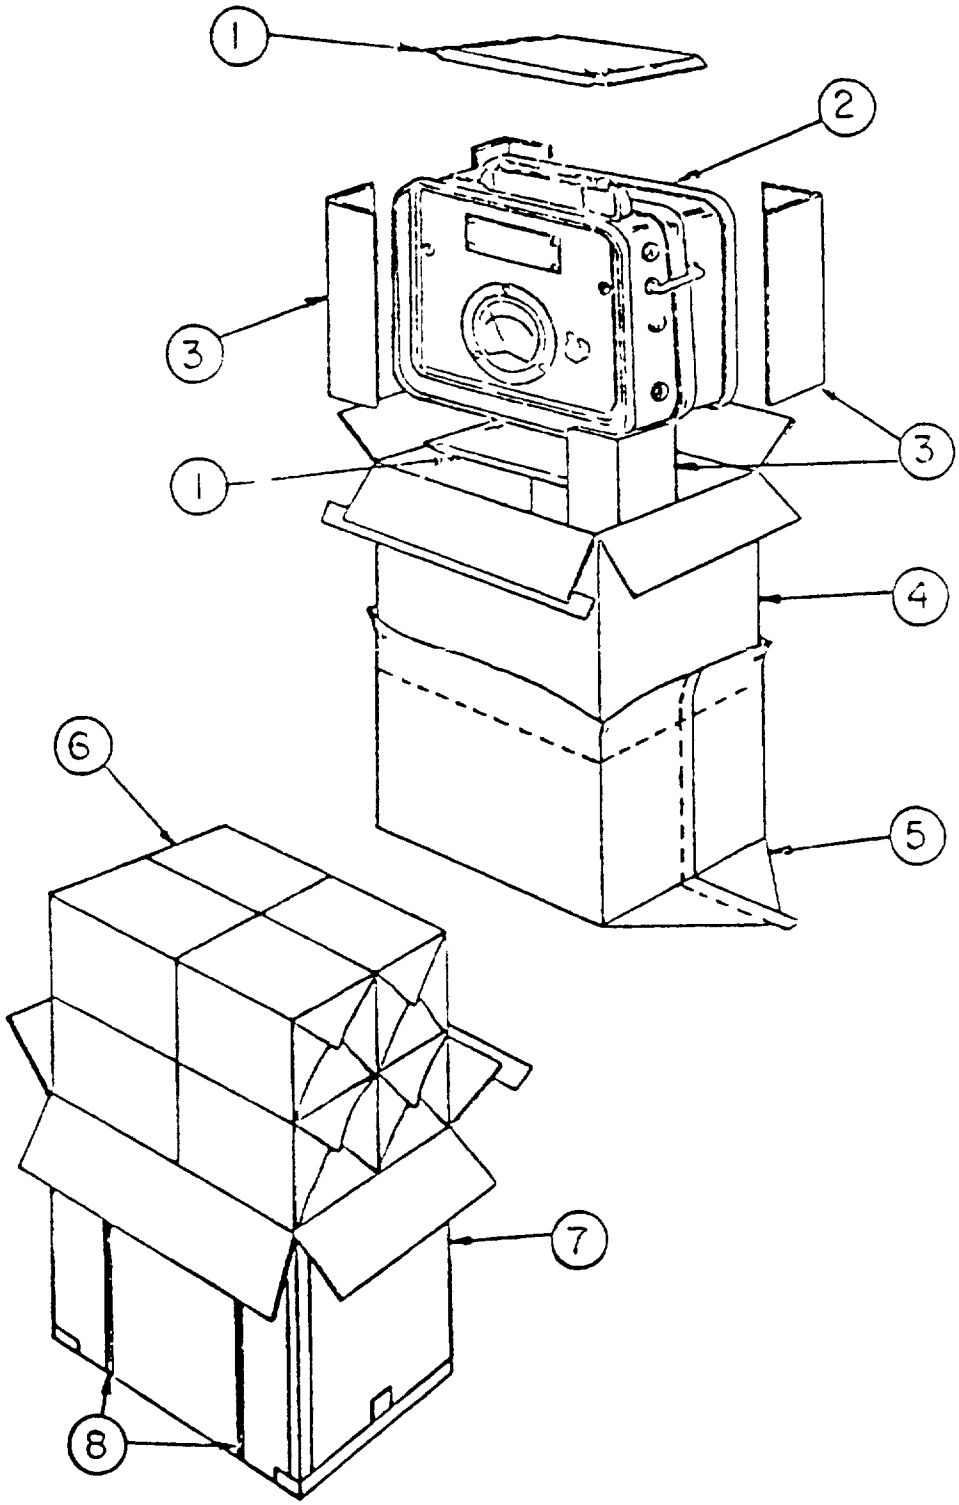


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification and any amendment thereto.

(b) Levels of preservation, packaging and packing required.

(c) If rough handling and functional tests are required.

(d) Quantity of first articles required.

(e) Place of final inspection.

(f) Technical literature required.

(g) Quantity of tools and running spare parts required.

(h) Marking for shipment and shipping containers.

6.3 Dimensional data. Sizes of packaging materials prescribed in Section 5, are based on the dimensions of the equipment cited on the applicable Bill of Material. When the dimensions of the equipment vary from those cited, the sizes of the packaging materials shall be adjusted accordingly. When shown in the Bill of Materials (Section 5), corrugated fiberboard manufactured with A, B or C fluting may be used at the option of the contractor. When the fluting used is not the same as that cited in the Bill of Material, the dimensions of the affected packaging and packing materials will be adjusted accordingly.

6.4 Nomenclature and type designation. The contractor should apply for nomenclature and type designation in accordance with the applicable clause in the contract. The parentheses in the type designation will be deleted or replaced by a letter identifying the particular design for example: SG-12F/U or AN/URM-73C.

6.5 Group C inspection. Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action (see 4.5.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

6.6 Temperature conversion. Temperature conversion from fahrenheit to centigrade as listed in this specification are as follows:

160°F	=	71°C
125°F	=	51.5°C
77°F	=	25°C
40°F	=	4.44°C
-4°F	=	-20°C
-65°F	=	-53.9°C

6.7 Verification inspection. Verification inspection by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

Custodians:
Army - EL

Preparing Activity
Army - EL

Project Number 6625-A290

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN AMSEL-[redacted]
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-T-12400A(EL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-PM 1068-68

To detach this, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:47Z
Check the source to verify that this is the current version before use.