MIL-T-14146A
AUGUST 25 1959
SUPERSEDING
MIL-T-14146(SigC)
30 AUGUST 1955

MILITARY SPECIFICATION

TELEPHONE SET TA-105( )/FTC

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers a weatherproof, wall mounted, mine type telephone set.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

FEDERAL

QQ-S-571 — Solder: Lead Alloy, Tin Lead Alloy, and Tin Alloy; Flux Cored Ribbon and Wire, and Solid Form.

UU-T-111 — Tape; Paper, Gummed (Sealing and Securing).

LLL-F-291 — Fiberboard; Corrugated, Single - Face (Flexible).

PPP-B-621 — Boxes, Wood, Nailed and Lock-Corner.

PPP-B-636 — Boxes, Fiber.

PPP-T-60 — Tape; Pressure Sensitive Adhesive, Waterproof — for Packaging and Sealing.

MILITARY

MIL-P-116 — Preservation, Methods of.

STANDARDS

MILITARY

MIL-STD-22 — Welded-Joint Designs.

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-109 — Inspection Terms and Definitions.

MIL-STD-129 — Marking for Shipment and Storage.

MIL-STD-130 — Identification Marking of U. S. Military Property.

FSC 5805

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

MIL–STD–169 — Extreme - Temperature Cycle.

MIL–STD–170 — Moisture Resistance Test Cycle for Ground Signal Equipment.

MIL–STD–252 — Wired Equipment, Classification of Visual and Mechanical Defects for.

DRAWINGS

SIGNAL CORPS

SC–DL–12096 — Telephone Set TA–105 ( )/FTC.

2.2 Other publications. The following documents form a part of this specification. Unless otherwise indicated the issue in effect on date of invitation for bids shall apply.

CONSOLIDATED CLASSIFICATION COMMITTEE

Uniform Freight Classification.
Consolidated Freight Classification.

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Union Station, Chicago 6, Ill.)

AMERICAN TRUCKING ASSOCIATION, INC.

National Motor Freight Classification.

(Application for copies should be addressed to the National Classification Board, 1424 Sixteenth Street, N. W., Washington 6, D. C.)

AMERICAN STANDARDS ASSOCIATION

Z–24.3–1944 — Sound Level Meters for Measurement of Noise and Other Sounds.

(Application for copies should be addressed to American Standards Association, Inc., 70 East Forty-fifth Street, New York 17, N. Y.)

3. REQUIREMENTS

3.1 Description. Telephone Set TA–105( )/FTC is a weatherproof, wall mounted, mine type telephone set for use on common battery telephone systems. The overall dimensions are 12¼ inches high by 9¾ inches wide by 8 inches deep.

3.2 Construction. The equipment shall be constructed in accordance with Drawing and Data List SC–DL–12096, and shall meet the requirements of this specification. In case of conflict between the specification and the drawing, the specification shall govern.

3.3 Preproduction samples. The contractor shall furnish preproduction samples including Pilot Pack for approval, as required by the invitation for bids and contract (see 6.2).

3.4 Parts, materials, and processes; general.

3.4.1 *Soldering.*

3.4.1.1 *Solder.* Solder used for electrical connections shall be composition Sn60 conforming to Specification QQ–S–571.

3.4.1.2 *Flux and cleaning agents.* No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections and for tinning or soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used where they can come in contact with insulation material. Where acid or acid salts are used, as permitted above, they shall be completely neutralized and removed immediately after use. Flux for soldering of electrical connections shal be rosin, rosin and alcohol, or rosin and turpentine.

3.4.1.3 *Process.* There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indicating proper flowing and wetting action, and shall not be crystallized, overheated, or underheated. The minimum necessary amount of flux and solder shall be used for electrical connections. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

soldering shall be so accomplished that no rosin remains on the joint or in the proximity of the joint. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign material remaining in the equipment, flux being spread over a larger area, or resulting damage to the equipment. Insulation material that has been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.4.2 *Welding.* Welds shall be of ample size. Where tack or spot welds are employed, the number of welds shall be sufficient to provide adequate strength and at least two welds shall be used to hold each welded part. Spot or tack welds in aluminum or magnesium shall be limited to lightly stressed, noncritical structures. Wherever practicable, the welded joint shall conform to Standard MIL–STD–22 and shall be such that gringing on the finished weld will be unnecessary. Surface to be welded shall be cleaned in accordance with good commercial practice and shall be free from rust, scale, paint, grease, and other foreign material, and shall conform to Drawing and Data List SC–DL–12096.

3.4.3 *Cleaning.* Soldered and brazed parts shall be cleaned in accordance with good commercial practice, or as specified in an applicable document, removing all solder particles, flux, and other foreign material from components. Welded parts and assemblies shall be cleaned to remove scale, oxidation products and excess flux by sandblasting, wire brushing or other suitable means. Cleaning process shall have no deleterious effect on the equipment. Corrosive material shall be removed completely before parts are assembled into the equipment.

3.5 Electrical and mechanical requirements.

3.5.1 *Operation.* Telephones shall operate without modification from either a 24- or 48-volt supply at the central station over 32 miles of 1,290 circular mil (No. 19 AWG) telephone cable. Volume and intelligibility of speech shall be satisfactory and audibility of the bell shall meet the requirements of 3.5.2.

3.5.2 *Ringer output.* The ringer, when installed in a completely assembled telephone shall be capable of producing a continuous signal audible at a distance of 150 feet, in the absence of extraneous noises, as determined by the test of 4.6.

3.5.3 *Dielectric strength.* Air gaps in the switch and electrical insulation shall have a minimum breakdown (voltage) of 500 volts when tested as specified in 4.7.

3.5.4 *Insulation resistance.* The insulation resistance shall be not less than 10 megohms between wiring, adjacent metal nonconductors and ground of the telephone assembly (see 4.8).

3.5.5 *Switch.* The switch shall be a "Make and Break Make," three-contact type, breaks two and makes one and capable of operating for 50,000 make and break cycles at a rate not in excess of 12 cycles per minute while carrying its rated load of 48 volts at 70 ma through each circuit (see 4.9).

3.6 Service conditions. The equipment shall meet the following service conditions:

3.6.1 *Equipment nonoperating.* The equipment shall comply with the operational requirements of 3.6.2 after subjection to any of the following nonoperating conditions successively or in combinations encountered during world-wide short-term storage and transit:

(a) *Temperature.* Exposure in the range of +160°F. to —80°F. (see 4.10).

(b) *Relative humidity.* Relative humidity up to 97 percent and ex-

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:54Z
Check the source to verify that this is the currentversion before use.

posure at 100-percent relative humidity, with condensation, for 4 hours (see 4.11).

(c) *Rain.* Two inches of rainfall per hour, with wind at nominal 20 miles per hour (see 4.12).

(d) *Vibration.* As described in 3.6.3.

3.6.2 *Equipment operating.* The equipment shall meet the performance requirements of this specification while subjected to any of the following conditions successively or in combinations likely to be encountered during world-wide operations:

(a) *Temperature.* Ambient temperature in the range of +125°F. to —40°F. (see 4.10).

(b) *Relative humidity.* Relative humidity up to 97 percent; and exposure at 100-percent relative humidity, with condensation for 4 hours (see 4.11).

3.6.3 *Vibration.* Except for internal resonance of specified parts and subassemblies, the equipment shall have no mechanical resonance below 55 cycles per second (see 4.13).

3.7 **Preconditioning.** The equipment shall be capable of meeting the inspection of section 4, without subsequent processing, after subjection to the bounce preconditioning of 4.4.

3.8 The equipment shall be marked for identification in accordance with Standard MIL-STD-130.

3.8.1 *Serial numbers.* Serial numbers are not required for this equipment.

3.9 **Interchangeability.** Corresponding units and replaceable assemblies, subassemblies, and parts shall be physically and functionally interchangeable as complete items without modification thereof or of other articles with which the items are used (see 4.14).

3.10 **Workmanship.** Workmanship on the Telephone Set TA-105( )/FTC shall be such as to meet all the requirements of this specification and any referenced subsidiary specification, standard, drawing, or other document when inspected in accordance with 4.15, including the applicable portions of the following paragraphs:

3.2 **Construction.**

3.4.1 *Soldering.*

3.4.2 *Welding.*

3.4.3 *Cleaning.*

4. QUALITY ASSURANCE PROVISIONS

4.1 **Contractor responsibility.** Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.1.1 *Classification of inspection.* Inspection shall be classified as follows:

(a) Preproduction inspection (does not include preparation for delivery,* (see 4.2).

(b) *Procurement inspection.* (Procurement inspection shall be the inspection performed by the contractor and by the Government, as specified by 4.3 and 4.16).

(1) Procurement inspection of items before preparation for delivery (see 4.3).

(2) Procurement inspection of preparation for delivery (see 4.16 and sec. 5).

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:54Z
Check the source to verify that this is the current version before use.

4.2 Preproduction inspection. This inspection shall consist of the preproduction inspection specified in table I. The preproduction will normally be performed in any order which is satisfactory to the Government.

TABLE I. *Preproduction inspection*

Inspection	Requirement paragraph	Inspection paragraph
Operations test	3.5.1	4.5
Ringer output test	3.5.2	4.6
Dielectric strength test	3.5.3	4.7
Insulation resistance test	3.5.4	4.8
Life test, switch	3.5.5	4.9
Temperature test	3.6.1 and 3.6.2	4.10
Moisture-resistance test	3.6.1 and 3.6.2	4.11
Rain test	3.6.1	4.12
Vibration test	3.6.3	4.13
Interchangeability	3.9	4.14
Visual and mechanical inspection	3.10	4.15

4.3 Procurement inspection of items before preparation for delivery. The contractor shall perform the inspection specified by (a) through (d) below, to demonstrate compliance with specified requirements. However, this does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government — at its discretion — may perform all or any part of the inspection specified in (a), to verify the contractor's compliance with specified requirements. (The amount of such verification inspection will depend on the extent to which the contractor's inspection procedures and records insure that the equipment on contract meets the specified procurement inspection (also see 6.7).

(a) Procurement inspection shall consist of group A, group B and group C inspection as specified in 4.3.1 through 4.3.3.2.

(b) When Standard MIL–STD–105 specifies action by the Government, the Government may authorize the contractor to perform any of such actions except that the responsibility for acceptance rests with the Government.

(c) Group B inspection shall normally be performed on inspection lots that have passed group A inspection and on samples selected from units that have been subjected to and met group A inspection. In addition, group C inspection shall normally be performed on sample units that have been subjected to and met group B inspection. However, the order may be varied when it is considered more practical to select separate samples for group B or group C inspection, or both.

(d) Each unit which will be subjected to group A, group B, or group C inspection shall be preconditioned after final assembly (see 3.7).

4.3.1 *Group A inspection.* This inspection (including sampling) shall conform to

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

table II and Standard MIL–STD–105. Unless otherwise specified, normal inspection shall be used at the start of the contract. Group A inspection shall be performed in any order which is satisfactory to the Government, except that the operations inspection (4.5) shall be last.

TABLE II. *Group A inspection*

Inspection	Requirement paragraph	Inspection paragraph	AQL	
			Major	Minor
Visual and mechanical				
Telephone Set TA–105( )/FTC	3.10	4.15	1.0%	4.0%
Electrical				
Dielectric strength	3.5.3	4.7	1.0%	(*)
Insulation resistance	3.5.4	4.8		
Operation	3.5.1	4.5	1.0%	(*)

* All electrical and operational defects are considered major.

4.3.2 *Group B inspection.* This inspection (including sampling) shall conform to table III and the appendix to Standard MIL–STD–105. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. The reduced inspection procedure shall be R–1. Disposition of nonconforming product (sample units and inspection lots) shall be in accordance with 4.3.5 and the requirements of Standard MIL–STD–105 for disposition of rejected product.

4.3.2.1 *Group B sampling plans.* The group B sampling plans, as listed in table III, shall be as follows:

Group B plan	*AQL*	*Inspection level for normal inspection*	*Inspection level for reduced inspection*
B–2	6.5%	L–7	L–5

4.3.2.2 *Order of inspection within group B.* Group B inspection shal be performed in any order which is satisfactory to the Government.

TABLE II. *Group B Inspection*

Inspection	Requirement paragraph	Inspection paragraph
Ringer output	3.5.2	4.6

4.3.3 *Group C inspection.* This inspection shall be as listed in table IV.

4.3.3.1 *Sampling for inspection of equipment.* Two telephones TA–105( )/FTC for each group C inspection shall be selected each month without regard to their quality, except that the units inspected at the start of the contract shall be selected from the first units produced.

4.3.3.2 *Noncompliance.* If a sample unit fails group C inspection, the contractor shall immediately investigate the cause of failure and shall report to the Government inspector the results thereof and details of the corrective action taken on the process and all units of product which were manufactured with the same conditions, materials, processes, etc. If the Government inspector does not consider that the corrective action will enable the product to meet specified requirements, or if the contractor cannot determine the cause of failure, the matter shall be referred to the contracting officer (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

TABLE IV. *Group C inspection*

Inspection	Requirement paragraph	Inspection paragraph
Moisture resistance	3.6.1 & 3.6.2	4.11
Temperature	3.6.1 & 3.6.2	4.10
Rain	3.6.1	4.12
Vibration	3.6.3	4.13
Interchangeability	3.9	4.14

4.3.4 *Reinspection of conforming group B and group C sample units.* Unless otherwise specified, sample units which have been subjected to and passed group B and group C inspection, or both, may be accepted on contract, provided that they are resubjected to and pass group A inspection after repair of all visible damage.

4.3.5 *Disposition of nonconforming product.* The following shall be suitably tagged or identified by equivalent means to indicate the cause of failure and means employed to correct the fault:

Sample units found defective during group A, B, or C inspection.

Inspection lots which failed during group A or B inspection.

Product which has been reworked as a result of failure during group C inspection.

The required information shall be presented to the Government when the product is submitted.

4.4 Bounce preconditioning. The equipment shall be placed in its normal operating position on the table of the Package Tester as made by the L.A.B. Corporation, Skaneateles, N. Y., or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a $\frac{1}{32}$-inch-thick strip of material under one corner or edge of the equipment to a distance of 3 inches as the equipment bounces. The equipment shall be subjected to this preconditioning for 1 minute. After bounce preconditioning, the equipment shall not be repaired, alined, cleaned, or otherwise changed prior to subjection to acceptance inspection.

4.5 Operations test. The equipment shall be connected to a central station with the equivalent of 32 miles of 1,290 circular mil (No. 19 AWG) telephone cable. Performance shall meet the requirements of 3.5.1.

4.6 Test for ringer output. The ringer output shall be equal to the output of a standard when measured. The ringer output shall be tested as follows:

A telephone TA–105( )/FT shall be used as a standard and shall be calibrated in the following manner. The telephone with cover closed shall be supported in a soundproof room free from reflecting surfaces. The sound intensity of the telephone bell shall be measured with a sound level meter conforming to the requirements of ASA Standard Z–24.3–1944. The microphone of the sound level meter shall be located successively in six positions 6 feet from the center of the telephone set, along axes (perpendicular) to the six surfaces of the telephone set. With the bell signal adjusted for maximum audibility and with a potential of 45-volts rms, 20 cycles, applied to the ringer, the sound intensity at each of the six positions shall be at least 60 db above 10^{-16} watts per square centimeter. The audio level of the "standard" shall be measured at the test position with the sound level meter. This reading shall be used as the reference. The bell output of the TA–105( )/FT, with cover closed, shall equal or exceed the reference reading of the sound level meter.

4.7 Dielectric strength. With the handset assembly removed and the switch contacts blocked open, a potential of 500-volts rms, 60-cycle ac shall be applied for a period of 10 seconds between wiring, adjacent metal nonconductors, and ground of the telephone assembly. There shall be no arcing or breakdown of insulation as a result of this test (see 3.5.3).

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:54Z
Check the source to verify that this is the current version before use.

4.8 Insulation resistance. With the handset assembly removed and the switch contacts blocked open, the insulation resistance shall be not less than 10 megohms (see 3.5.4).

4.9 Life test, switch. The switch shall be tested by operating it for 50,000 make and break cycles at a rate not in excess of 12 cycles per minute while carrying its rated load of 48 volts at 70 ma through each circuit (see fig. 1) (see 3.5.2).

4.10 Temperature test. The equipment shall be subjected to the temperature cycle of Standard MIL-STD-169. Equipment shall meet full specification requirements at steps 4, 8, and 10 (see 3.6.1 and 3.6.2).

4.11 Moisture-resistance test for equipment. The equipment shall be tested as follows:

4.11.1 *Test conditions.*

(a) Do not remove equipment from the humidity chamber for operations test.

(b) Start operations test not more than 5 minutes after power is applied to the components. Complete operations test as rapidly as possible. Do not leave power on after operations test has been completed.

4.11.2 *Test method.* The equipment shall be tested as follows:

(a) Dry at 130° ±5°F. for 24 hours.

(b) Condition at 77° ±5°F. and 40- to 50-percent relative humidity for 24 hours.

SWITCH TEST CIRCUIT

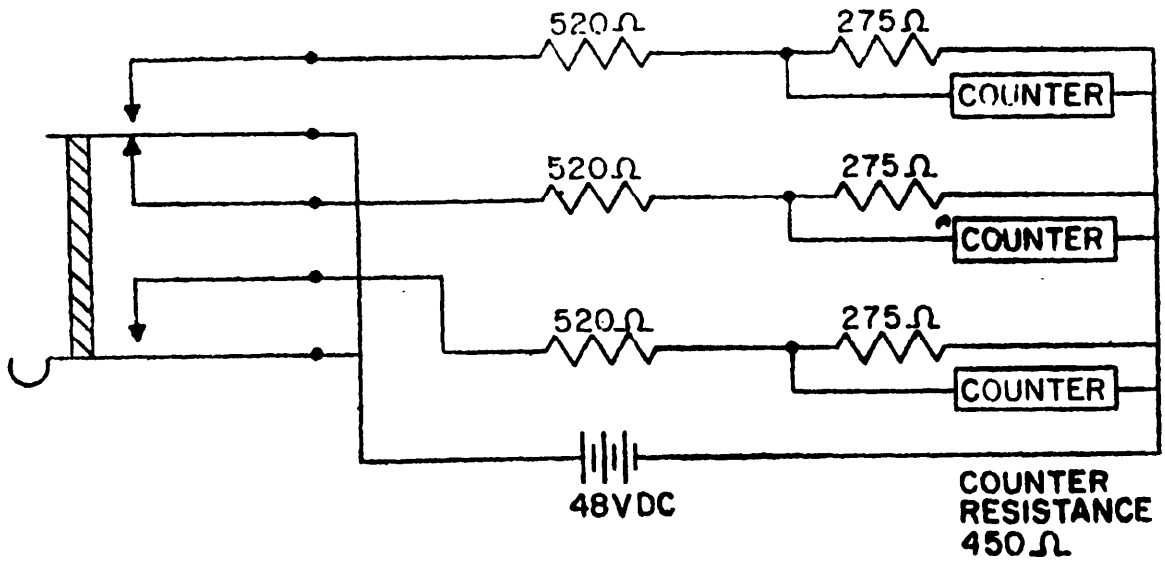


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

(c) Check operation as specified in 4.5 and readjust or realine as necessary to meet full specification requirements.

(d) Subject to continuous cycling for five 48-hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to Standard MIL–STD–170. The operations test specified in 4.5 shall be made during the periods shown on Standard MIL–STD–170.

(e) After cycling has been completed, condition the equipment for 24 hours at 77° ±5°F. and 40- to 60-percent relative humidity. Then adjust for optimum performance, using only those means provided by the equipment. No repair or replacement of parts shall be made. After adjustment, the equipment shall meet performance specified in 4.5.

4.11.3 *Failure.* If any equipment fails to meet performance specified in 4.5 during cycling, it shall be realigned or readjusted once. If the equipment then fails to meet 4.5 or fails subsequently during cycling, it does not pass the test.

4.12 **Rain test.** The equipment shall be tested, step by step, with all mounting holes sealed, as follows:

4.12.1 Dry at 150° ±5°F. for 48 hours.

4.12.2 Condition for 4 hours at 77° ±5°F. and 40- to 60-percent relative humidity.

4.12.3 The telephone shall be tested for proper operation in talking and signaling.

4.12.4 Place the equipment, in its normal operating position, with cover closed, in a test chamber maintained at 77° ±5°F. Allow simulated rainfall to fall on the exposed surfaces of the equipment. The water shall be at a temperature of 65° ±5°F. and shall fall freely at a rate of 2 inches per hour. Maintain this condition for 1 hour.

4.12.5 With the rainfall continuing at the 2-inch rate, introduce a simulated wind blowing horizontal at 20 ±5 miles per hour against one side of the equipment. The water shall fall on exposed surfaces and be blown by the wind against one side of the component. Maintain this condition for 1 hour.

4.12.6 Rotate the equipment 90° horizontally, to expose a second side of the equipment to the wind and rain. Maintain this condition for 1 hour.

4.12.7 Continue as in 4.12.6, until all four sides of the equipment have been exposed to the wind and rain, each side for 1 hour.

4.12.8 Open the equipment. There shall be no evidence of leakage.

4.12.9 Immediately after completion of the foregoing, repeat the test of 4.12.3. There shall be no degradation of performance.

4.13 **Vibration test.** The equipment shall be tested for resonant frequencies below 55 cycles per second, to determine compliance with 3.6.3 as follows:

(a) The equipment shall be fastened in its normal mounting position on a vibration table that can be controlled within 10 percent of the specified amplitude. The vibration table shall provide approximately sinusoidal vibration.

(b) The equipment shall be vibrated successively for 15 minutes in each of three mutually perpendicular directions that are parallel respectively to the edges of the equipment, over a frequency range of 10 to 55 cycles per second, in a 1-cycle-per-second steps.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:54Z
Check the source to verify that this is the current version before use.

The total excursion shall be constant at 1/64 inch.

(c) Mechanical resonance, if any, of the complete structure, of subassemblies, and of component parts shall be determined visually by means of a strobotac, as made by the General Radio Corporation, Cambridge, Mass., or equal, or by energizing the equipment and detecting mechanical vibration through electrical output indicators.

(d) If it is not practical to determine completely any mechanical resonances on the assembled equipment unit because of its compactness or inaccessibility of its subassemblies or component parts, the unit shall be broken down into logical subassemblies for the above vibration test. Such subassemblies shall be secured to the vibration table in the same manner as they are secured in the equipment unit.

4.14 Interchangeability. The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirement of 3.9. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) External and internal dimensions of cases, covers, and insertable assemblies, when such dimensions affect mating of parts.

(b) Location of hinges and fasteners on separable parts or assemblies which must mate, such as cases, covers, and mountings.

4.15 Visual and mechanical inspection. A thorough inspection shall be made on each completed equipment for mechanical fit, loose nuts and screws, welding, finish, poor workmanship and other defects. Fastening devices shall be checked for proper mechanical operation, welds finish, ground connections and the like checked for satisfactory workmanship and compliance with Standard MIL–STD–252.

4.16 Procurement inspection of preparation for delivery. The contractor shall perform the inspection specified by 4.16.1 and 4.16.2, to demonstrate compliance with specified requirements. However, this does not relieve the contractor of responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government — at its discretion — may perform all or any part of the inspection specified in 4.16.1 and 4.16.2, to verify the contractor's compliance with specified requirements. (The amount of such verification inspection will depend on the extent to which the contractor's inspection procedures and records insure that the equipment on contract meets the specified procurement inspection (also see 6.7)). When Standard MIL–STD–105 specifies action by the Government, the Government may authorize the contractor to perform any of such actions except that responsibility for acceptance rests with the Government.

4.16.1 *Preservation and packaging.* Inspection of preservation and packaging shall be as specified in Specification MIL–P–116. Classification of defects shall be as shown on table V.

TABLE V. *Preservation, and packaging and marking thereof*

Major defects:

1. Use of improper or defective material.
2. Quantity in unit package not as specified.
3. Incorrect packaging method applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

TABLE V.—Continued

4. Cushioning or padding omitted.
5. Cushioning inadequate for the physical and mechanical protection of the item.
6. Unsealed, punctured, or improperly sealed barrier bag, wrap, or envelope.
7. Stock number omitted, incorrect, or illegible.
8. Nomenclature omitted, incorrect, or illegible.
9. Marking of quantity of items in pakage omitted, incorrect, or illegible.
10. Different stock numbered items in the same unit package.

Minor defects:

1. Item not properly blocked or braced within the unit package to prevent movement.
2. Packaging material damaged.
3. Air not expelled from barrier.
4. Insufficient area of barrier material provided to permit 2 subsequent seals.
5. Any item of marking information other than 7 through 9 omitted, incorrect, or illegible.

4.16.2 *Packing and marking of exterior containers.* Packing and marking of exterior containers shall be given visual inspection for the defects listed and to determine conformance with the approved process sheet furnished by the contractor as required by the contract. This inspection shall conform to the appendix of Standard MIL–STD–105. Inspection level L–8 shall be used for normal inspection and L–6 for reduced inspection. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. The reduced inspection procedure shall be R–1. The AQL for major defects shall be four percent and the AQL for minor defects shall be ten percent. Classification of defects shall be as shown on table VI.

TABLE VI. *Packing and marking thereof*

Major defects:

1. Use of improper or defective material.
2. Quantity in pack not as specified.
3. Gross weight in excess of specified amount.
4. Box closure not as specified.
5. Type, grade, class, and style of the shipping container not as specified.
6. Strapping omitted.
7. Strapping inadequate or incorrectly applied.
8. Items not adequately blocked, braced, or cushioned within the shipping container to prevent movement or damage.
9. Shipping documents or packing list omitted.
10. Stock number omitted, incorrect, or illegible.
11. Nomenclature omitted, incorrect, or illegible.
12. Marking of quantity of items in pack omitted, incorrect, or illegible.
13. Destination marking omitted, incorrect, or illegible.
14. Service designation (color marking) omitted.
15. Specified special marking and labeling such as MAP labels, shipment digit markings, etc., omitted, incorrect, or illegible.
16. Overseas code marking omitted, incorrect, or illegible.

Minor defects

1. Unsealed carton.
2. Defective taping or sealing of carton.
3. Any other box defect which may be considered minor by definition of Standard MIL–STD–105.
4. Any item of required marking information other than 10 through 16 listed under major defects omitted, incorrect, or illegible.

4.16.2.1 *Inspection lot.* A lot for visual inspection of the pack shall be all completed packs which are identical and are submitted for inspection at one time.

4.16.2.2 *Disposition of nonconforming product.* Disposition of nonconforming product (sample units and inspection lots) shall be in accordance with the requirements of Standard MIL–STD–105 for disposition of rejected product. When submitted for acceptance, such product shall be suitably tagged or identified by equivalent means to indicate the cause of failure and means employed to

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the currentversion before use.

correct the fault. The required information shall be presented to the Government when the product is submitted.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 *Level A.* Telephone Set TA–105( )/FTC shall be preserved, packaged and tested in accordance with the procedures specified for the designated methods as prescribed in Specification MIL–P–116 and described in the following paragraphs:

5.1.1.1 *Telephone Set TA–105( )/FTC.* Each telephone set shall be packaged Method IC–5 as follows: Cushion each handset by wrapping in flexible, single-face, corrugated fiberboard, type I, conforming to Specification LLL–F–291. Secure the cushioning with gummed, paper tape, class 1, conforming to Specification UU–T–111. Immobilize the hook to prevent movement during transit. Secure the handset to the plate with waterproof, pressure-sensitive tape, type III, class 1, olive drab, conforming to Specification PPP–T–60. Fill the remaining void in the box with flexible, single-face, corrugated fiberboard. Close box cover and secure fastenings. Cushion each telephone set on all surfaces with cells or pads, or both, fabricated of double-faced, corrugated fiberboard, having a minimum dry bursting strength of 175 pounds, designed to absorb the shock of impact encountered in handling and transit. The cells or pads shall be equal to the water-resistant requirements of the fiberboard box in which they are used. Place the cushioned telephone set within a close-fitting fiberboard box, style RSC, W5c, conforming to the requirements of Specification PPP–B–636. Closure shall be in accordance with the appendix of the box specification. In addition, seal all seams and joints with waterproof, pressure-sensitive tape, type III, class 1, olive drab, conforming to Specification PPP–T–60.

5.1.2 *Level C.* Telephone Set TA–105( )/FTC shall be packaged in accordance with commercial practice and in a manner that will afford protection against corrosion, deterioration and physical damage, during direct shipment to the first receiving activity.

5.2 Packing.

5.2.1 *Level A.* A quantity of Telephone Sets TA–105( )/FTC shall be packed within a style 4, class 2, nailed, wood box, conforming to Specification PPP–B–621. Fabricate the box to fit contents snugly. The approximate gross weight for any shipping container shall not exceed 150 pounds. Closure shall be in accordance with the box specification.

5.2.1.1 *Metal strapping.* Shipping containers shall be strapped with flat, steel strapping, in conformance with the requirements of the appendix of the container specification, only for direct shipment to ports.

5.2.2 *Level B.* Telephone Set TA–105( )/FTC shall be packed as specified in 5.2.1 except that the style 4, nailed, wood box shall be class 1, conforming to Specification PPP–B–621. Fabricate the box to fit contents snugly. The approximate gross weight of any shipping container shall not exceed 200 pounds. Closure shall be in accordance with the box specification. Strapping is not required.

5.2.3 *Level C.* Telephone Set TA–105( )/FTC shall be packed for shipment in a manner conforming to the requirements of the Uniform Freight Classification for rail shipment, National Motor Freight Classification for truck shipment, Parcel Post Regulations and the regulations of other carriers as applicable to the mode of transportation employed, at the lowest transportation rate.

5.3 **Marking.** Interior packages and exterior shipping containers shall be marked in accordance with the applicable provisions of Standard MIL–STD–129.

GPO 826950–2

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:54Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Telephone Set TA–105( )/FTC is designed for outdoor use to withstand any inclemency of weather or atmospheric condition. It is used primarily for fire reporting stations, remote guard stations, and the like.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of the specification and any amendment thereto.

(b) Color required (to be determined by ordering service).

(c) Level of packaging and level of packing required for shipment (level A or level B).

(d) The specific paragraphs of section 5 which are applicable to the particular procurement.

(e) Preproduction inspection:

(1) Two samples of each item cited in section 1 are generally required so that lengthy environmental tests can be completed on one sample while complete performance measurements can be made on the second sample (see 3.3).

(2) Preproduction pack(s) as follows: Detailed instructions for preparation for delivery.

Note: These may be obtained from the Signal Corps Packaging Activity, U. S. Army Signal Supply Agency, 225 South Eighteenth Street, Philadelphia 3, Pa.

(f) Marking and shipping of samples.

(g) Place of final inspection.

6.3 Nomenclature. The parenthesis in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example TA–105W/FTC. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.4 Group C inspection. Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of corrective action (see 4.3.3).

6.5 Definition of level B. Level B packaging requirements detailed herein are designed to furnish protection against corrosion, deterioration, and physical damage during domestic shipments; covered storage for a period of three years or less; and distribution within the continental limits of the United States.

6.6 Inspection terms. The inspection terms used herein conform to Standard MIL–STD–109.

6.7 Verification inspection. The amount of verification inspection (by the Government) will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product, and will normally be identified by the categories listed below:

(a) *Type A*. The total of that inspection set forth in the Quality Assurance Provisions of this specification or the contract. Included in this category is that amount of inspection referred to as normal and tightened inspection by Standard MIL–STD–105.

(b) *Type B*. That inspection set forth in the Quality Assurance Provisions of this specification or the contract reduced in amount under the reduced inspection provisions of Standard MIL–STD–105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

(c) *Type C.* A reduced inspection procedure resulting in a material reduction in the amount of inspection set forth in the Quality Assurance Provisions of this specification. The amount of inspection is less than that provided for in type B and is based upon a consistently acceptable product resulting from a planned quality control system voluntarily employed by the contractor in the production of the product.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—Signal Corps
Navy—Marine Corps
Air Force

Preparing activity:
Army—Signal Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Electronics Command
ATTN: DRSEL-RD-TS-S
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:54Z
Check the source to verify that this is the current version before use.